

**FCC PART 15 SUBPART B, SUBPART C SECTION 15.231,
RSS GEN, & RSS 210
TEST REPORT**

for

**GRILL GUARD
Model: GC-GRILL1-B-345**

Prepared for

**NORTEK SECURITY & CONTROL LLC
1950 CAMINO VIDA ROBLE, SUITE 150
CARLSBAD, CA 92008**

Prepared by: _____

TOREY OLIVER

Reviewed by: _____

MATT HARRISON

**COMPATIBLE ELECTRONICS INC.
20621 PASCAL WAY
LAKE FOREST, CALIFORNIA 92630
(949) 587-0400**

DATE: JULY 18th, 2017

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	19	2	2	2	10	16	51

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



**Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500**

**Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600**

**Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700**

**Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400**

TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	5
1. PURPOSE	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
3. APPLICABLE DOCUMENTS	8
4. DESCRIPTION OF TEST CONFIGURATION	9
4.1 Description of Test Configuration	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1 EUT and Accessory List	11
5.2 EMI Test Equipment	12
6. TEST SITE DESCRIPTION	13
6.1 Test Facility Description	13
6.2 EUT Mounting, Bonding and Grounding	13
6.3 Facility Environmental Characteristics	13
6.4 Measurement Uncertainty	13
7. CHARACTERISTICS OF THE TRANSMITTER	14
7.1 Channel Number and Frequencies	14
7.2 Antenna	14
7.3 EUT Test Software	14
8. TEST PROCEDURES	15
8.1 RF Emissions	15
9. TEST PROCEDURE DEVIATIONS	19
10. CONCLUSIONS	19



LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Charts, and Photos • Test Setup Diagrams • Antenna Factors • Radiated Photos
E	Radiated Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Plot Map and Layout of Test Site Below 1GHz
2	Plot Map and Layout of Test Site Above 1GHz



GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full with the written permission of Compatible Electronics.

This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the federal government.

Device Tested: Grill Guard
Model: GC-GRILL1-B-345
S/N: None

Product Description: The Grill Guard is a contact ON/OFF sensor that alerts your security panel (and optionally a smartphone with Alarm.com) when the knob on a grill/stove is turned ON. It is compatible with 2GIG security panels, including GC2, GC3, and Vario.

Modifications: The EUT was not modified in order to comply with specifications.

Manufacturer: Nortek Security & Control LLC
1950 Camino Vida Roble, Suite 150
Carlsbad, CA 92008

Test Dates: July 18th, 2017

Test Specifications Covered by Accreditation:



EMI requirements

CFR Title 47, Part 15 Subpart C Sections 15.205, 15.207, 15.209 and 15.231
RSS GEN & RSS 210

Test Procedure: ANSI C63.4 & C63.10



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz.	The EUT is battery powered; therefore, this test was deemed unnecessary and thus was not performed.
2	Radiated RF Emissions & Harmonics, 9 kHz – 3,450 MHz.	Complies with the limits of CFR Title 47, Part 15 Subpart C Section 15.209, 15.231, & RSS GEN.
3	-20 dB Occupied Bandwidth of the Emission	Complies with the limits of CFR Title 47, Part 15, Subpart C, section 15.231 & RSS 210.
4	Peak Radiated EMI	Complies with the limits of CFR Title 47, Part 15, Subpart C, section 15.231 & RSS 210.
5	Transmit Timeout	Complies with the limits of CFR Title 47, Part 15, Subpart C, section 15.231 & RSS 210.

TABLE 1
SIX HIGHEST RADIATED EMISSIONS READINGS

	Reading Type (PK / QP / AV)	Polarization (Vert / Horz)	Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Delta (dB)	Test Distance
1	AV	H	690.00	42.28	46.00	-3.72	3-Meter
2	AV	H	345.00	65.33	77.26	-11.93	3-Meter
3	QP	H	331.80	35.05	46.00	-10.95	3-Meter
4	QP	H	333.90	34.42	46.00	-11.58	3-Meter
5	QP	H	334.30	34.31	46.00	-11.69	3-Meter
6	QP	H	332.40	34.30	46.00	-11.70	3-Meter



1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Grill Guard Model: GC-GRILL1-B-345. The EMI measurements were performed according to the measurement procedure described in ANSI C63.10. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT (equipment under test) hereafter, are within the specification limits defined by the Code of Federal Regulations Title 47, Part 15 Subpart B section 15.109, Subpart C sections 15.205, 15.209, 15.231, RSS GEN, & RSS 210.



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4 2014	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz.
ANSI C63.10: 2013	American National Standard for Testing Unlicensed Wireless Devices
RSS GEN	General Requirements for Compliance of Radio Apparatus
RSS 210	Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment



4. DESCRIPTION OF TEST CONFIGURATION


4.1 Description of Test Configuration

The Grill Guard Model: GC-GRILL1-B-345 (EUT) was setup in a standalone tabletop configuration. The EUT was checked in all 3 axes. The worst case was found to be the X-Axis. The EUT was continuously transmitting during the transmit tests and in standby mode for standby tests.

The EUT was tested with new batteries.

It was determined that the emissions were at their highest level when the EUT was transmitting in the configuration described above for Radiated Emissions. The final radiated data was taken in the above configuration. Please see Appendix E for the test data.

4.1.1 Photograph Test Configuration (X-Axis Shown)

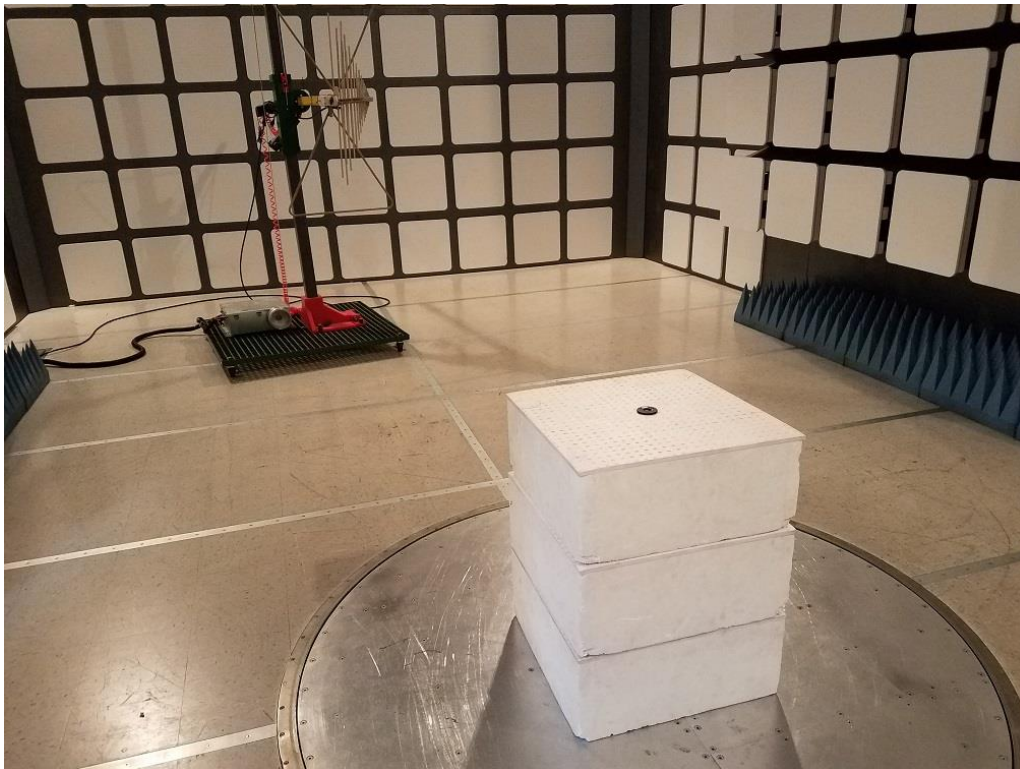


4.1.2 Cable Construction and Termination


The EUT had no interconnecting cables.

4.1.3 Axis Orientation


X axis

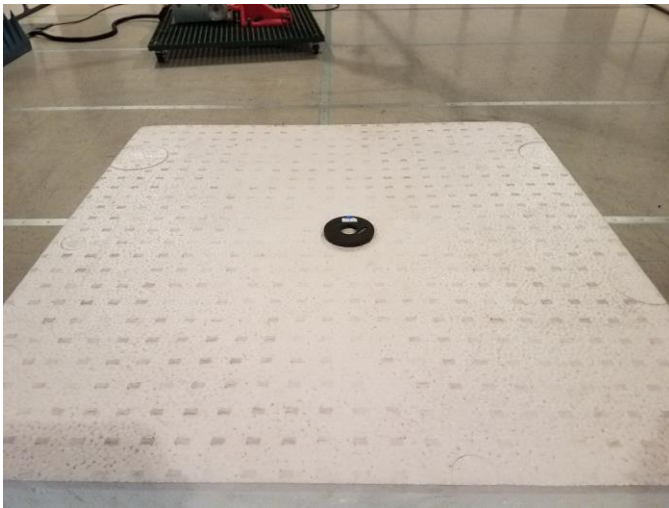

Y Axis

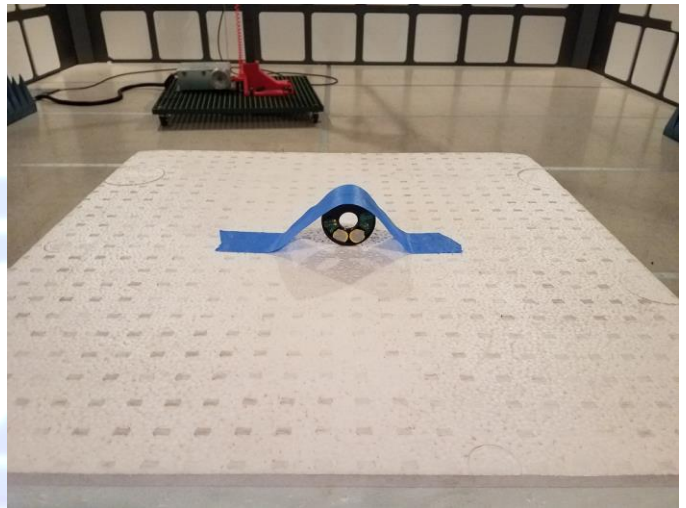

Z AXIS

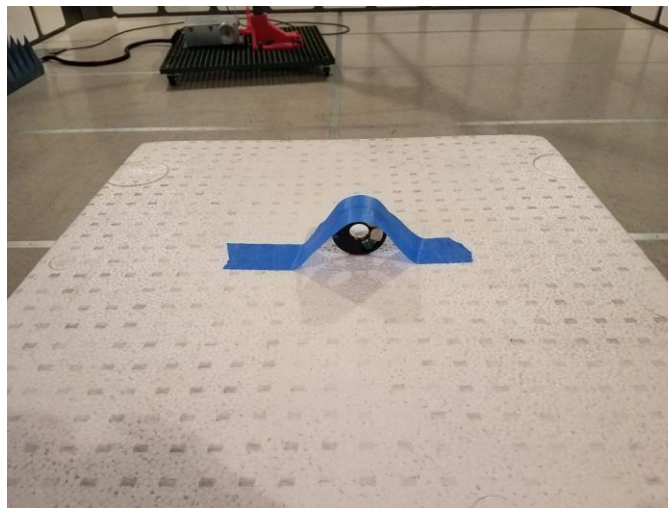

5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

#	EQUIPMENT TYPE	MANU-FACTURER	MODEL	SERIAL NUMBER
1	GRILL GUARD (EUT)	Nortek Security & Control LLC	GC-GRILL1-B-345	NONE



5.2 EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Computer	Compatible Electronics	NONE	NONE	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESIB40	100218	03/14/2017	03/14/2018
Antenna, Loop	Com Power	AL-130	121049	02/09/2017	02/09/2018
Antenna, CombiLog	Com Power	AC-220	25857	05/19/2016	05/19/2018
Antenna, Horn 1-18GHz	Com Power	AH-118	071250	05/17/2016	05/17/2018
Mast, Antenna Positioner	Sunol Science Corporation	TWR 95-4	020808-3	N/A	N/A
Antenna Mast	Sunol Science Corporation	TWR 95-4	020808-3	N/A	N/A
Turntable	Sunol Science Corporation	FM 2001	N/A	N/A	N/A
Mast and Turntable Controller	Sunol Science Corporation	SC104V	020808-1	N/A	N/A



6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and the figures in Appendix D of this report for test location.

6.2 EUT Mounting, Bonding and Grounding

For below 1GHz the EUT was mounted 1.0-meter-high on a non-conductive surface, which was placed above the ground plane for below 1GHz.

For above 1GHz the EUT was mounted on a 1.5-meter-high non-conductive tabletop, which was placed on the ground plane.

The EUT was not grounded.

6.3 Facility Environmental Characteristics

When applicable refer to the data sheets in Appendix E for the relative humidity, air temperature, and barometric pressure.

6.4 Measurement Uncertainty

“Compatible Electronics’ U_{lab} value is less than U_{cispr} , thus based on this – compliance is deemed to occur if no measured disturbance exceeds the disturbance limit

$$u_c(y) = \sqrt{\sum_i c_i^2 u^2(x_i)}$$

Measurement		U_{cispr}	$U_{lab} = 2 u_c(y)$
Conducted disturbance (mains port)	(150 kHz – 30 MHz)	3,6 dB	2.88
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(30 MHz – 1 000 MHz)	5,2 dB	4.04



7. CHARACTERISTICS OF THE TRANSMITTER

7.1 Channel Number and Frequencies

The EUT has one operating channel and the EUT has OOK modulation. The EUT has a fixed output power.

1 == 345 MHz

7.2 Antenna

The antenna is made up of an etched trace on the PCB.

7.3 EUT Test Software

PN: 10012793 REV X3 Firmware

Date: 09/07/2016

Location: Nortek Security & Control LLC. / Nortek Security & Control LLC 1950 Camino Vida Roble Suite 150, Carlsbad, Ca. 92008.



8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions


8.1.1 Conducted Emissions Test

Test Results: *The EUT was battery operated; therefore, this test was deemed unnecessary and thus was not performed. If this test had been performed it would have been as below.*

The EMI receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. The LISN output was measured using the EMI receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT received its power through the LISN, which was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the computer software.

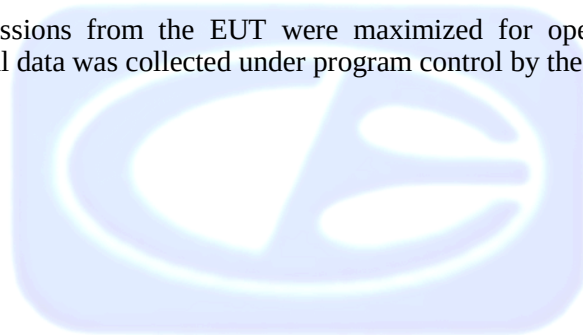

8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The EMI receiver was used as a measuring meter. The receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the receiver records the highest measured reading over all the sweeps.

For spurious emissions the quasi-peak detector was used for frequencies below 1GHz and the average detector was used for frequencies above 1 GHz.

For the Fundamental & Harmonic emissions a duty cycle average was used.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE (MHz)	TRANSDUCER	EFFECTIVE MEASUREMENT BANDWIDTH
.009 to .150	Active Loop Antenna	200 Hz
.150 to 30	Active Loop Antenna	9 kHz
30 to 1000	Combilog Antenna	100 kHz (120kHz for QP Measurements)
1000 to 3450	Horn Antenna	1 MHz

The TDK FAC-3 shielded test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4 & ANSI C63.10. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters in both vertical and horizontal polarizations (for E field radiated field strength).

Test Results:

The EUT complies with the limits of CFR Title 47 Part 15 Subpart B section 15.109, Subpart C sections 15.205, 15.209, 15.231, RSS GEN & RSS 210. The six highest emissions are listed in table 1.



8.1.3 *Peak radiated EMI*

The EUT was tested at a 3-meter test distance to obtain the final test data. The final qualification data sheets are located in Appendix E. This data also shows compliance at the band edges.

Duty Cycle Correction Factor = -20.00dB

$$\delta(\text{dB}) = 20 \log \left[\sum (nt_1 + mt_2 + \dots + \xi t_x) / T \right]$$

where

n is the number of pulses of duration t_1

m is the number of pulses of duration t_2

ξ is the number of pulses of duration t_x

T is the period of the pulse train or 100 ms if the pulse train length is greater than 100 ms

Pulse Type 1 = $44 * 150.300601 \mu\text{S} = 6613.226 \mu\text{S}$

Pulse Type 2 = $10 * 287.745491 \mu\text{S} = 2877.455 \mu\text{S}$

$6613.226 \mu\text{S} + 2877.455 \mu\text{S} = 9.490681 \text{ mS}$

Total On Time = 9.490681 mS

$9.490681 / 100 \text{ mS} = 0.0949$

$20 \log (0.0949) = -20.45 \text{ dB}$ correction factor

Max Duty Cycle Correction Factor = -20.00 dB

Test Results:

The EUT complies with Part 15, Subpart C, section 15.231 & RSS 210.



8.1.4 Bandwidth of the Fundamental

The -20 dB bandwidth was checked using the EMI Receiver in the spectrum analyzer mode to see that the emissions were wholly within the 0.25% of the operating frequency centered on the fundamental frequency. The RBW was set to 1-5% of the occupied bandwidth and the VBW was set to approximately three times the RBW. The span was to between two and five times the occupied bandwidth. A Plot of the -20 dB bandwidth is located in Appendix E.

Test Results:

The EUT complies with the requirements of CFR Title 47, Part 15, Subpart C, section 15.231 (c) for the -20 dB bandwidth of the fundamental. The EUT has a -20 dB bandwidth that is lies wholly within the 0.25% of the operating frequency centered on the fundamental frequency.

8.1.5 Occupied Bandwidth

The 99% occupied bandwidth was checked using EMI Receiver. The RBW was set to 1-5% of the occupied bandwidth and the VBW was set to approximately three times the RBW. The span was to between two and five times the occupied bandwidth. A Plot of the Occupied Bandwidth is located in Appendix E.

Test Results:

The EUT complies with the requirements of RSS GEN for the -20 dB bandwidth of the fundamental. The EUT has a -20 dB bandwidth that is lies wholly within the 0.25% of the operating frequency centered on the fundamental frequency.

8.1.6 Transmit Timeout

The Transmit timeout test was performed using the EMI Receiver to make sure the transmission coming from the transmitter would cease within 5 seconds after the activation. A Plot of the transmission duration is located in Appendix E.

Test Results:

The EUT complies with the requirements of CFR Title 47, Part 15, Subpart C, section 15.231 (c) & RSS 210 for Transmit Timeout less than 5 seconds.



9. TEST PROCEDURE DEVIATIONS

The test procedures were not deviated from throughout all tests.

10. CONCLUSIONS

The Grill Guard Model: GC-GRILL1-B-345 meets all of the relevant specification requirements defined in the Code of Federal Regulations Title 47, Part 15 Subpart C sections 15.205, 15.207, 15.209, 15.231, RSS GEN, & RSS 210.



APPENDIX A
***LABORATORY ACCREDITATIONS AND
RECOGNITIONS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

For the most up-to-date version of our scopes and certificates please visit

<http://celectronics.com/quality/scope/>

Quote from ISO-ILAC-IAF Communiqué on 17025:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025:2005 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025:2005 (Section 4) are written in language relevant to laboratory operations and meet the principles of ISO 9001:2008 Quality Management Systems — Requirements."

IC OAT's Test Site Registration Number: 2154C-1



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX B***MODIFICATIONS TO THE EUT***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

MODIFICATIONS TO THE EUT

There were no modifications were made during testing.



APPENDIX C***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

GRILL GUARD
MODEL: GC-GRILL1-B-345
S/N: NONE

No additional models were tested.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX D***DIAGRAMS, CHARTS, AND PHOTOS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

FIGURE 1: PLOT MAP AND LAYOUT OF TEST SITE BELOW 1GHZ


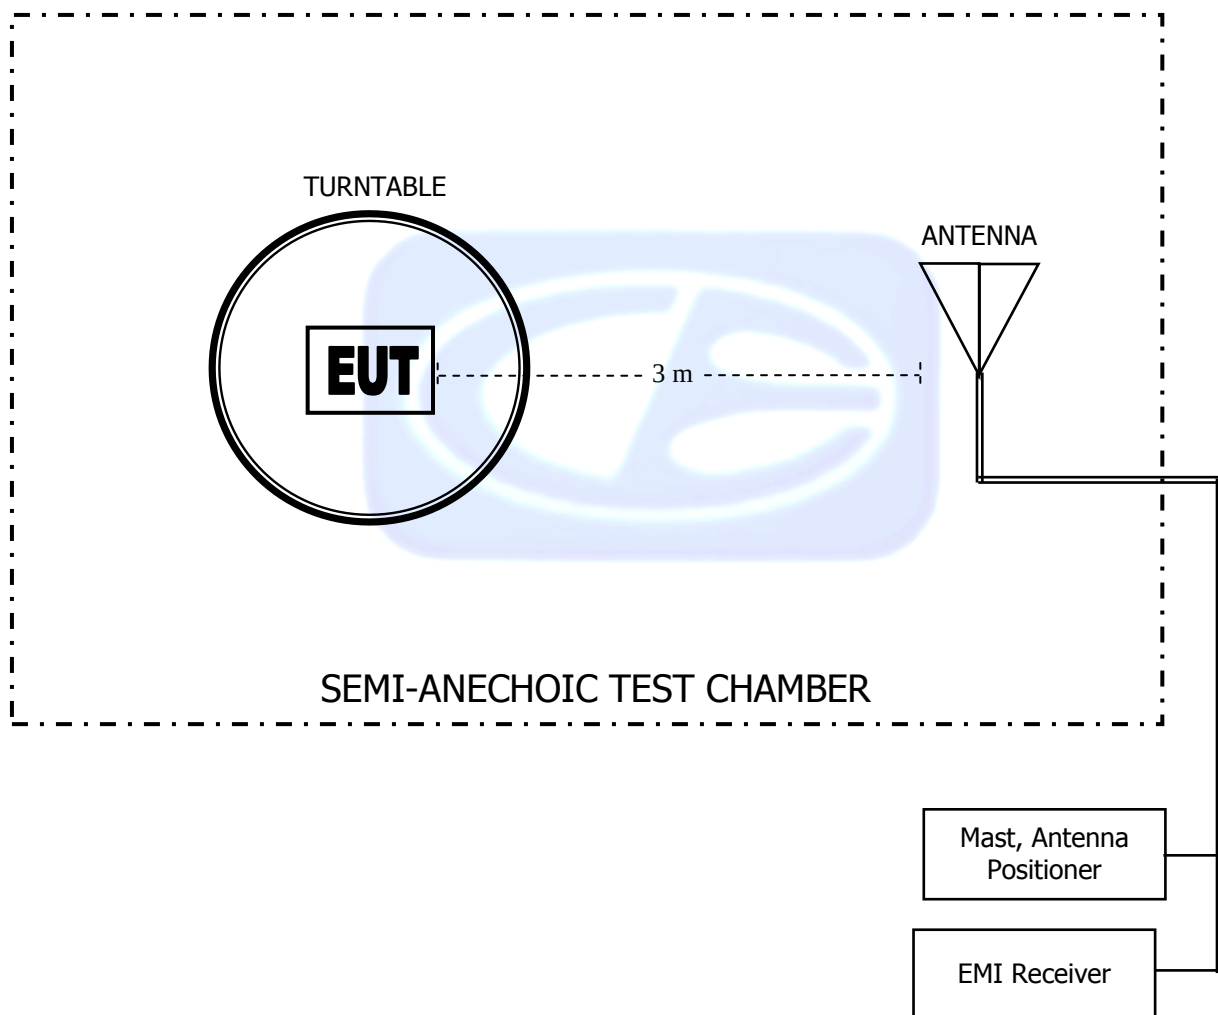


FIGURE 2: PLOT MAP AND LAYOUT OF TEST SITE ABOVE 1GHZ



COM-POWER AL-130**LOOP ANTENNA****S/N: 121049****CALIBRATION DUE: FEBRUARY 9, 2018**

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)	FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	-34.64	16.86	0.8	-36.32	15.18
0.01	-34.78	16.72	0.9	-36.22	15.28
0.02	-35.91	15.59	1.0	-36.22	15.28
0.03	-35.48	16.02	2.0	-35.91	15.59
0.04	-35.82	15.68	3.0	-35.91	15.59
0.05	-36.49	15.01	4.0	-36.01	15.49
0.06	-36.30	15.20	5.0	-35.80	15.70
0.07	-36.43	15.07	6.0	-36.00	15.50
0.08	-36.30	15.20	7.0	-35.90	15.60
0.09	-36.39	15.11	8.0	-35.70	15.80
0.1	-36.41	15.09	9.0	-35.70	15.80
0.2	-36.61	14.89	10.0	-35.60	15.90
0.3	-36.63	14.87	15.0	-36.52	14.98
0.4	-36.52	14.99	20.0	-35.75	15.75
0.5	-36.63	14.87	25.0	-37.78	13.72
0.6	-36.62	14.88	30.0	-38.62	12.88
0.7	-36.53	14.97			

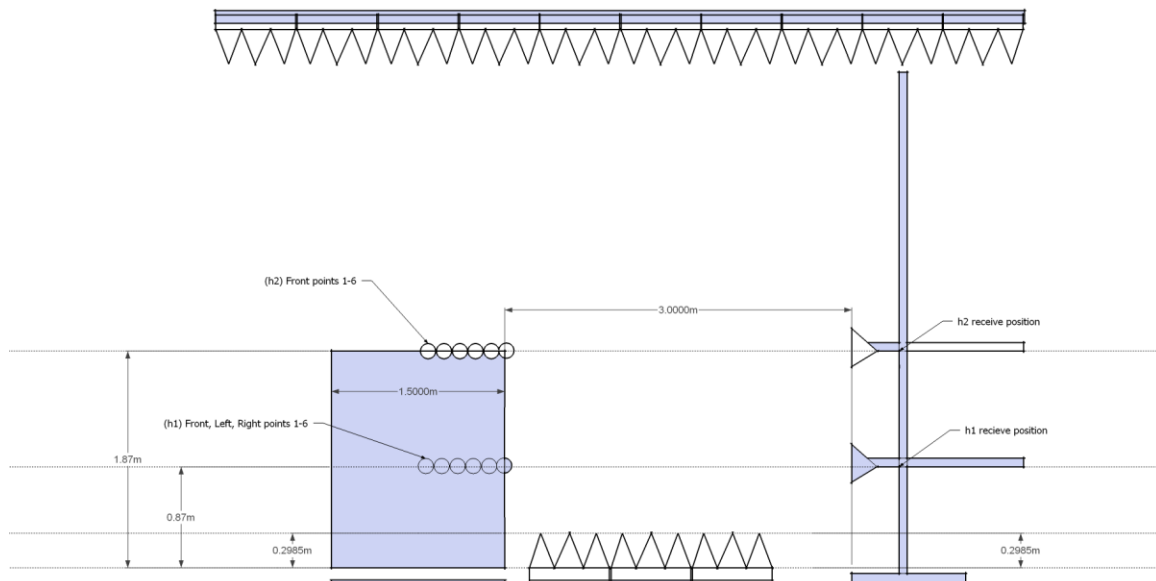

COM-POWER AC-220**LAB R - COMBILOG ANTENNA****S/N: 25857****CALIBRATION DUE: MAY 19, 2018**


FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	22.5	180	15.0
35	22.5	200	14.6
40	23.0	250	16.5
45	21.5	300	18.1
50	21.3	350	15.6
60	18.2	400	19.4
70	13.2	500	20.6
80	11.6	600	21.6
90	11.9	700	23.7
100	12.6	800	26.0
120	15.1	900	26.6
140	15.2	1000	28.5
160	13.3		



COM-POWER AH-118**HORN ANTENNA****S/N: 071250****CALIBRATION DUE: MAY 17, 2018**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
1000	24.40	9500	39.11
1500	25.61	10000	39.38
2000	28.71	10500	39.55
2500	29.09	11000	39.66
3000	30.24	11500	40.28
3500	30.94	12000	40.26
4000	31.77	12500	40.64
4500	32.29	13000	41.33
5000	33.70	13500	41.74
5500	34.28	14000	41.52
6000	34.83	14500	41.80
6500	35.07	15000	43.51
7000	36.79	15500	41.03
7500	37.45	16000	40.88
8000	37.67	16500	40.18
8500	37.75	17000	42.59
9000	38.15	17500	44.49
		18000	45.27



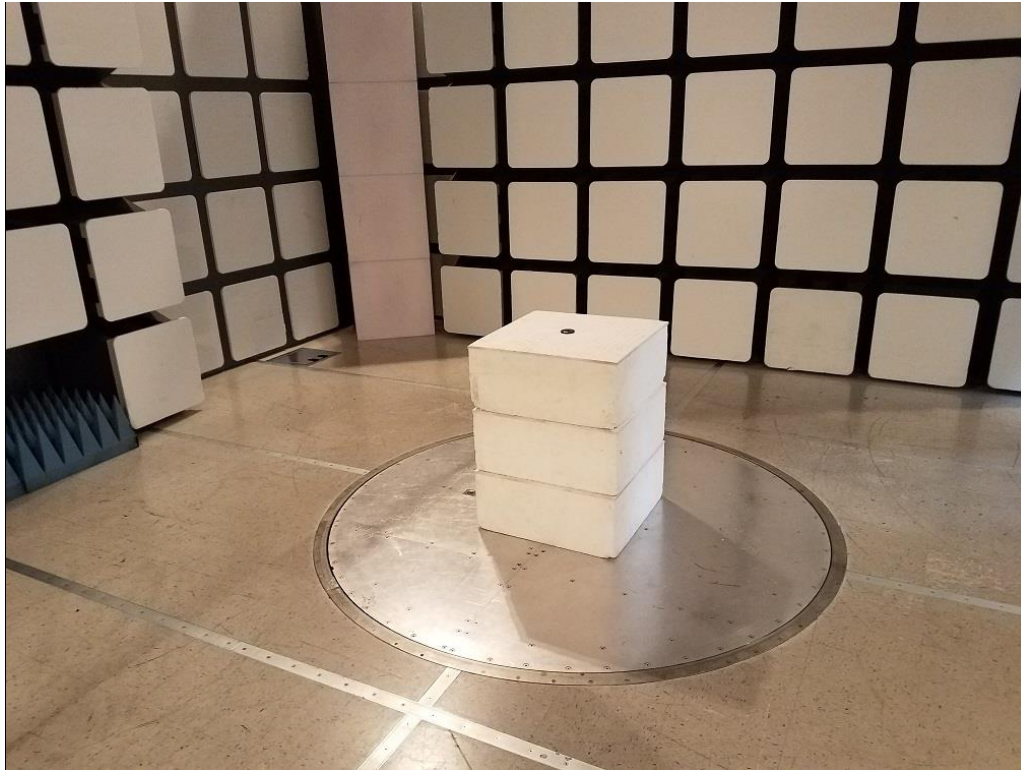

FRONT VIEW

NORTEK SECURITY & CONTROL LLC
GRILL GUARD
MODEL: GC-GRILL1-B-345
FCC SUBPART C - RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**




Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

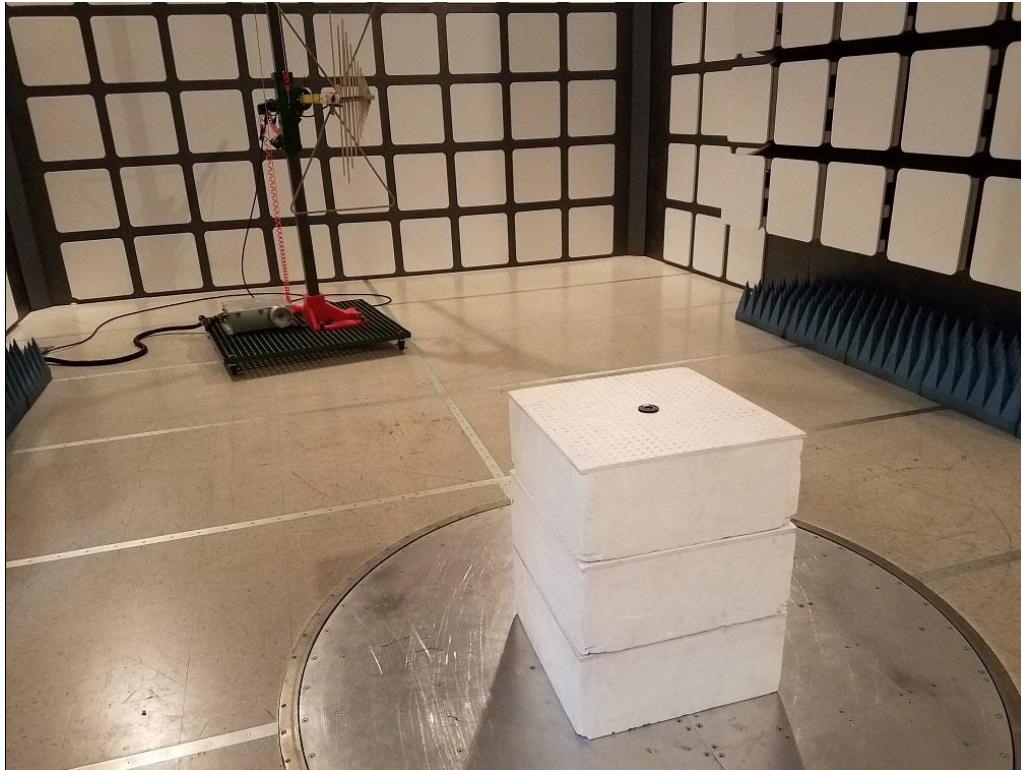**REAR VIEW**

NORTEK SECURITY & CONTROL LLC
GRILL GUARD
MODEL: GC-GRILL1-B-345
FCC SUBPART C - RADIATED EMISSIONS < 1GHZ


**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600


Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

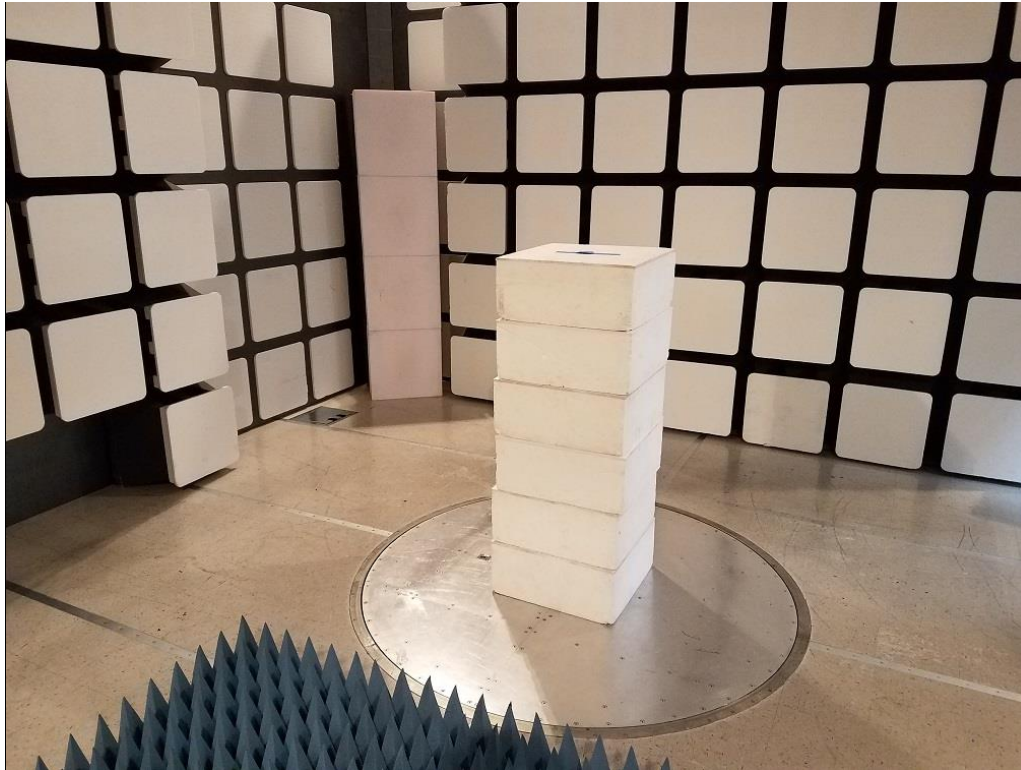**FRONT VIEW**

NORTEK SECURITY & CONTROL LLC
GRILL GUARD
MODEL: GC-GRILL1-B-345
FCC SUBPART C - RADIATED EMISSIONS > 1GHZ

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

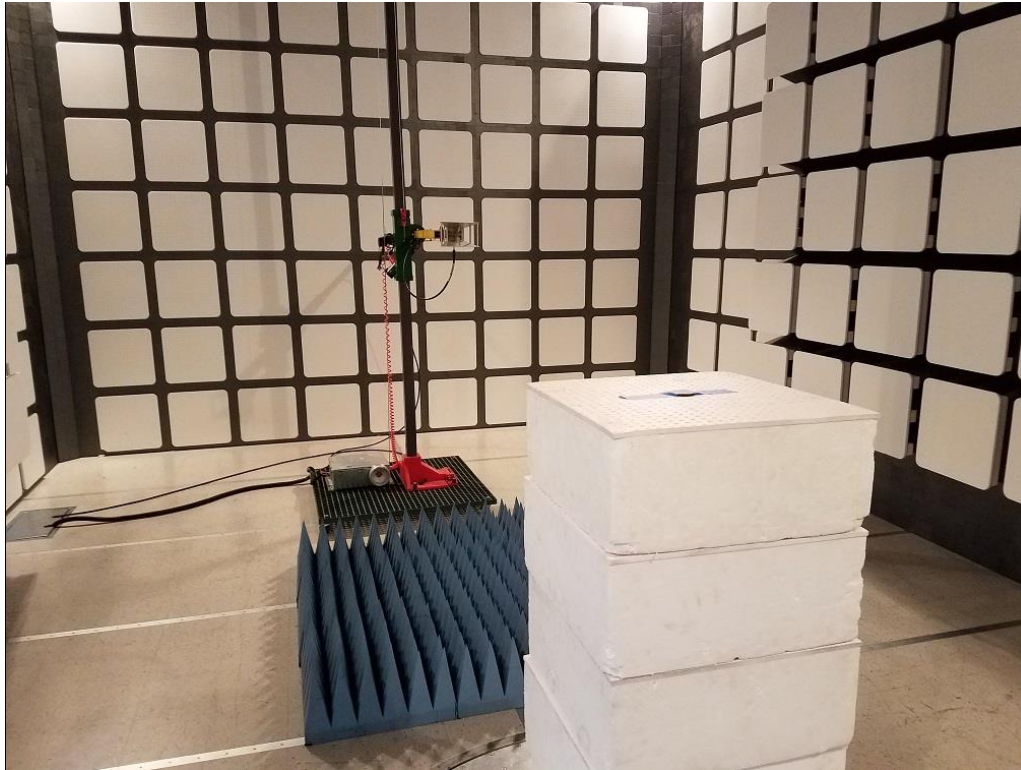**REAR VIEW**

NORTEK SECURITY & CONTROL LLC
GRILL GUARD
MODEL: GC-GRILL1-B-345
FCC SUBPART C - RADIATED EMISSIONS > 1GHZ

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX E***RADIATED EMISSIONS DATA SHEETS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.209
File: Radiated Pre-Scan 30-1000Mhz.set
Operator: Torey Oliver
EUT Type: Grill Guard / GC-GRILL1-B-345
EUT Condition: The EUT is constantly transmitting 345 MHz.
Comments: X-Axis
Temp: 73f
Hum: 43%
Battery Powered

7/18/2017 11:27:10 AM
Sequence: Preliminary Scan

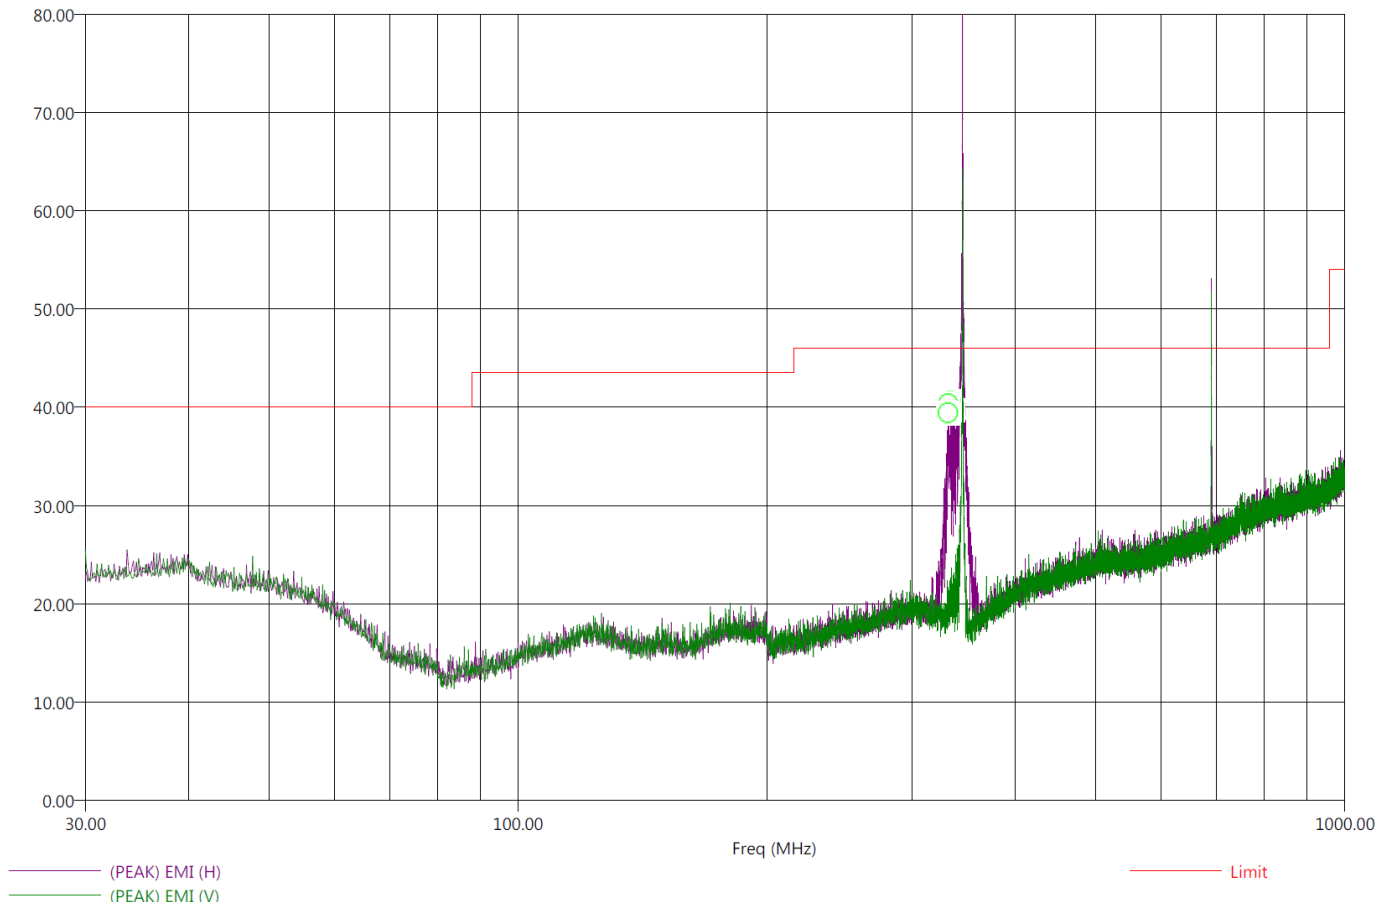Compatible Electronics, Inc. FAC-3 (Lab R)Electric Field Strength (dB μ V/m)

***There were no radiated emissions other than harmonics found below 30 MHz or above 1GHz.
No additional emissions were found in standby mode.***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.209
File: Radiated Final 30-1000Mhz.set
Operator: Torey Oliver
EUT Type: Grill Guard / GC-GRILL1-B-345
EUT Condition: The EUT is constantly transmitting 345 MHz.
Comments: X-Axis
Temp: 73f
Hum: 43%
Battery Powered

7/18/2017 1:08:55 PM
Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq (MHz)	(QP) Margin (dB)	(QP) EMI (dBµV/m)	(PEAK) EMI (dBµV/m)	Limit (dBµV/m)	Pol	Ttbl Agl (deg)	Twr Ht (cm)	Transducer (dB)	Cable (dB)
331.50	-11.97	34.03	42.66	46.00	H	270.25	110.98	16.48	1.59
331.80	-10.95	35.05	43.64	46.00	H	136.25	106.44	16.47	1.60
332.40	-11.70	34.30	42.82	46.00	H	353.00	112.17	16.43	1.60
333.90	-11.58	34.42	43.88	46.00	H	315.50	104.83	16.37	1.60
334.30	-11.69	34.31	42.48	46.00	H	310.25	106.62	16.35	1.60
336.10	-13.68	32.32	40.76	46.00	H	0.00	106.62	16.25	1.60

*There were no radiated emissions other than harmonics found below 30 MHz or above 1GHz.
No additional emissions were found in standby mode.*



FUNDAMENTAL & HARMONICS

DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

FUNDAMENTAL FIELD STRENGTH

FCC 15.231

Company: Nortek

EUT: Grill Guard

Model: GC-GRILL1-B-345

Duty Cycle Correction Factor: -20.00

Date: 7/18/2017

Lab: R

Tested By: Torey Oliver

Compatible Electronics, Inc. FAC-3

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Table	Tower	Comments
345.00	84.52	H	97.26	-12.74	Peak	141	1.00	X-Axis
345.00	64.52	H	77.26	-12.74	Avg	141	1.00	X-Axis
345.00	80.76	V	97.26	-16.50	Peak	307	1.65	Z-Axis
345.00	60.76	V	77.26	-16.50	Avg	307	1.65	Z-Axis



HARMONICS - HORIZONTAL

FCC 15.231

Company: Nortek
EUT: Grill Guard
Model: GC-GRILL1-B-345
Duty Cycle Correction Factor: -20.00

Date: 7/18/2017
Lab: R
Tested By: Torey O.

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
690.00	62.28	H	66.00	-3.72	Peak	1.24	298	X-AXIS
690.00	42.28	H	46.00	-3.72	Avg	1.24	298	X-AXIS
1035.00	--	H	73.98	--	Peak	--	--	No Emissions Found
1035.00	--	H	53.98	--	Avg	--	--	No Emissions Found
1380.00	--	H	73.98	--	Peak	--	--	No Emissions Found
1380.00	--	H	53.98	--	Avg	--	--	No Emissions Found
1725.00	--	H	73.98	--	Peak	--	--	No Emissions Found
1725.00	--	H	53.98	--	Avg	--	--	No Emissions Found
2070.00	48.34	H	73.98	-25.64	Peak	1.39	85	X-AXIS
2070.00	28.34	H	53.98	-25.64	Avg	1.39	85	X-AXIS
2415.00	--	H	73.98	--	Peak	--	--	No Emissions Found
2415.00	--	H	53.98	--	Avg	--	--	No Emissions Found
2760.00	--	H	73.98	--	Peak	--	--	No Emissions Found
2760.00	--	H	53.98	--	Avg	--	--	No Emissions Found
3105.00	--	H	73.98	--	Peak	--	--	No Emissions Found
3105.00	--	H	53.98	--	Avg	--	--	No Emissions Found
3450.00	51.42	H	73.98	-22.56	Peak	4.00	0	X-AXIS
3450.00	31.42	H	53.98	-22.56	Avg	4.00	0	X-AXIS

Test distance
3 meter



HARMONICS - VERTICAL

FCC 15.231

Company: Nortek
EUT: Grill Guard
Model: GC-GRILL1-B-345
Duty Cycle Correction Factor: -20.00

Date: 7/18/2017
Lab: R
Tested By: Torey O.

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
690.00	--	V	66.00	--	Peak	--	--	No Emissions Found
690.00	--	V	46.00	--	Avg	--	--	No Emissions Found
1035.00	--	V	73.98	--	Peak	--	--	No Emissions Found
1035.00	--	V	53.98	--	Avg	--	--	No Emissions Found
1380.00	--	V	73.98	--	Peak	--	--	No Emissions Found
1380.00	--	V	53.98	--	Avg	--	--	No Emissions Found
1725.00	--	V	73.98	--	Peak	--	--	No Emissions Found
1725.00	--	V	53.98	--	Avg	--	--	No Emissions Found
2070.00	--	V	73.98	--	Peak	--	--	No Emissions Found
2070.00	--	V	53.98	--	Avg	--	--	No Emissions Found
2415.00	--	V	73.98	--	Peak	--	--	No Emissions Found
2415.00	--	V	53.98	--	Avg	--	--	No Emissions Found
2760.00	--	V	73.98	--	Peak	--	--	No Emissions Found
2760.00	--	V	53.98	--	Avg	--	--	No Emissions Found
3105.00	--	V	73.98	--	Peak	--	--	No Emissions Found
3105.00	--	V	53.98	--	Avg	--	--	No Emissions Found
3450.00	--	V	73.98	--	Peak	--	--	No Emissions Found
3450.00	--	V	53.98	--	Avg	--	--	No Emissions Found

Test distance
3 meter



***DUTY CYCLE
PLOTS***




Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400


DUTY CYCLE

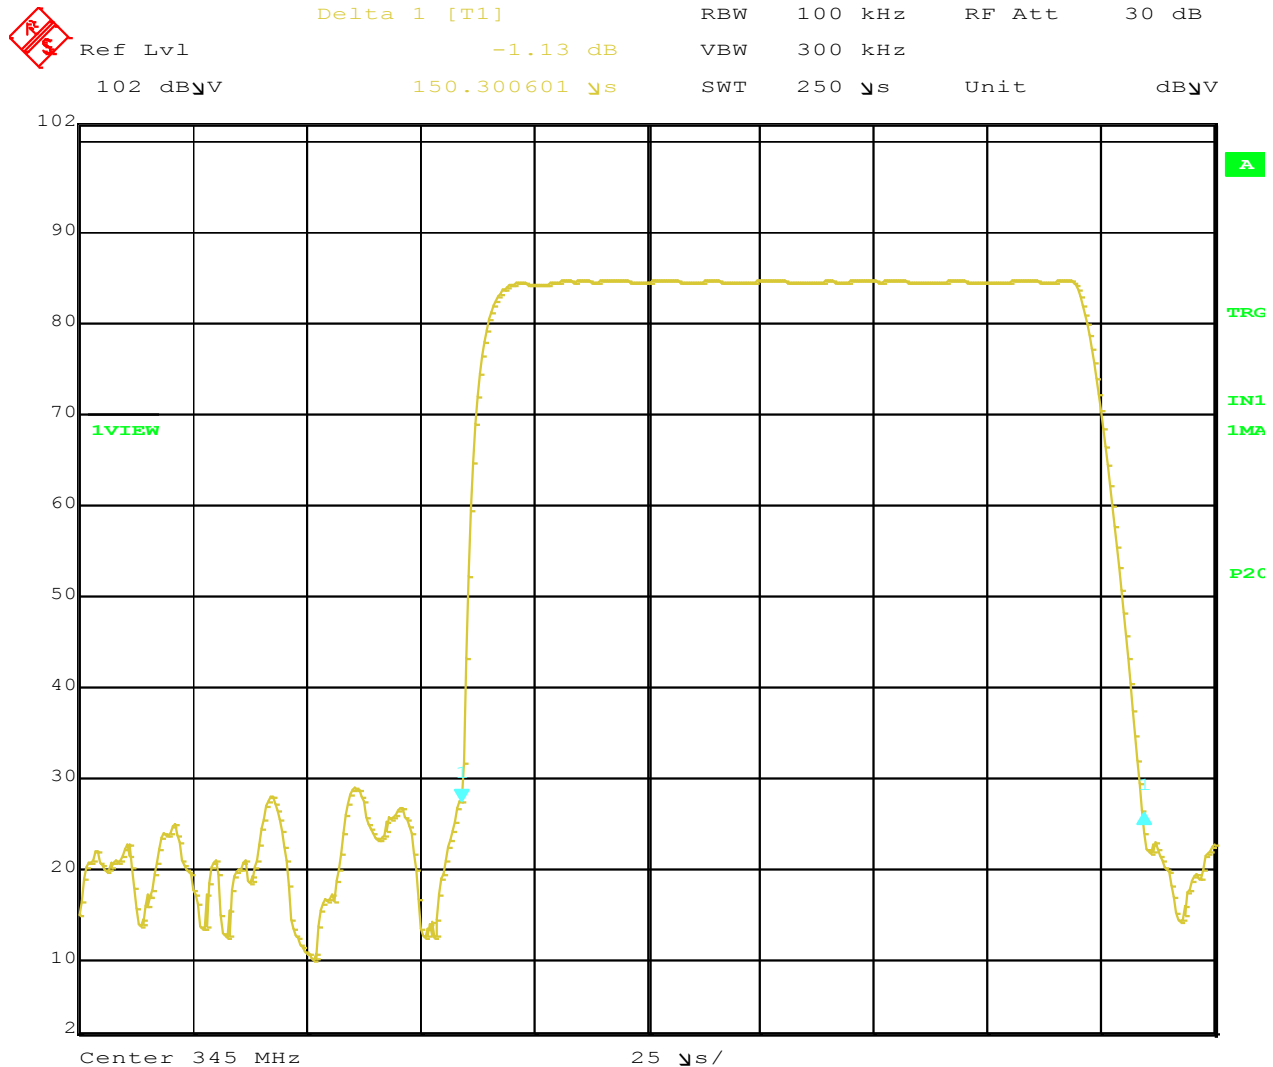

Time of Pulse Type 1 = 150.300601 μ S




DUTY CYCLE

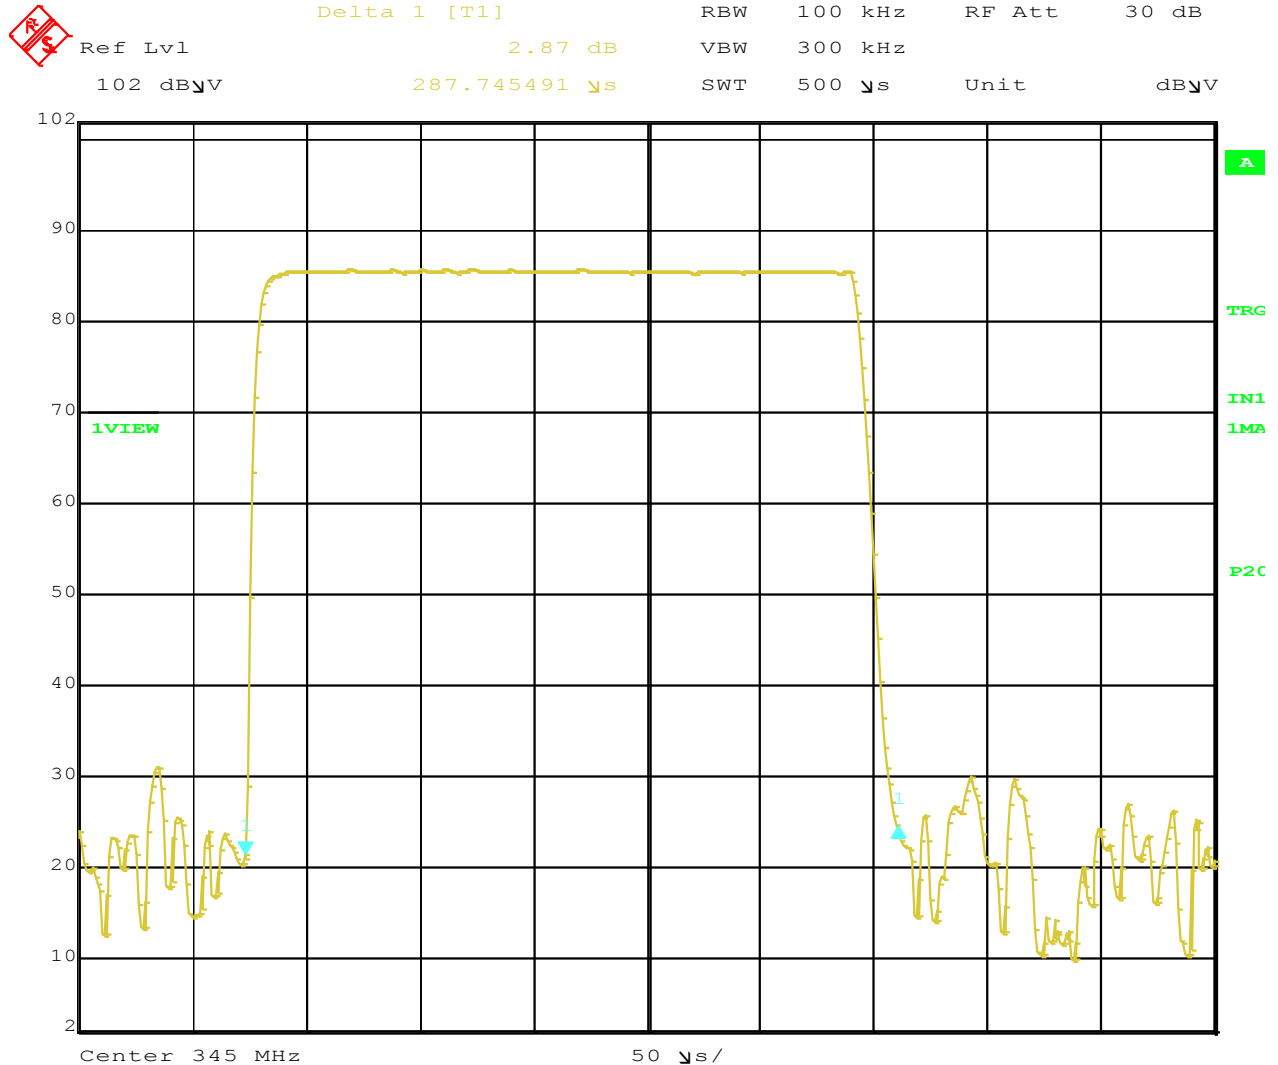

Time of Pulse Type 2 = 287.745491 μ S




DUTY CYCLE

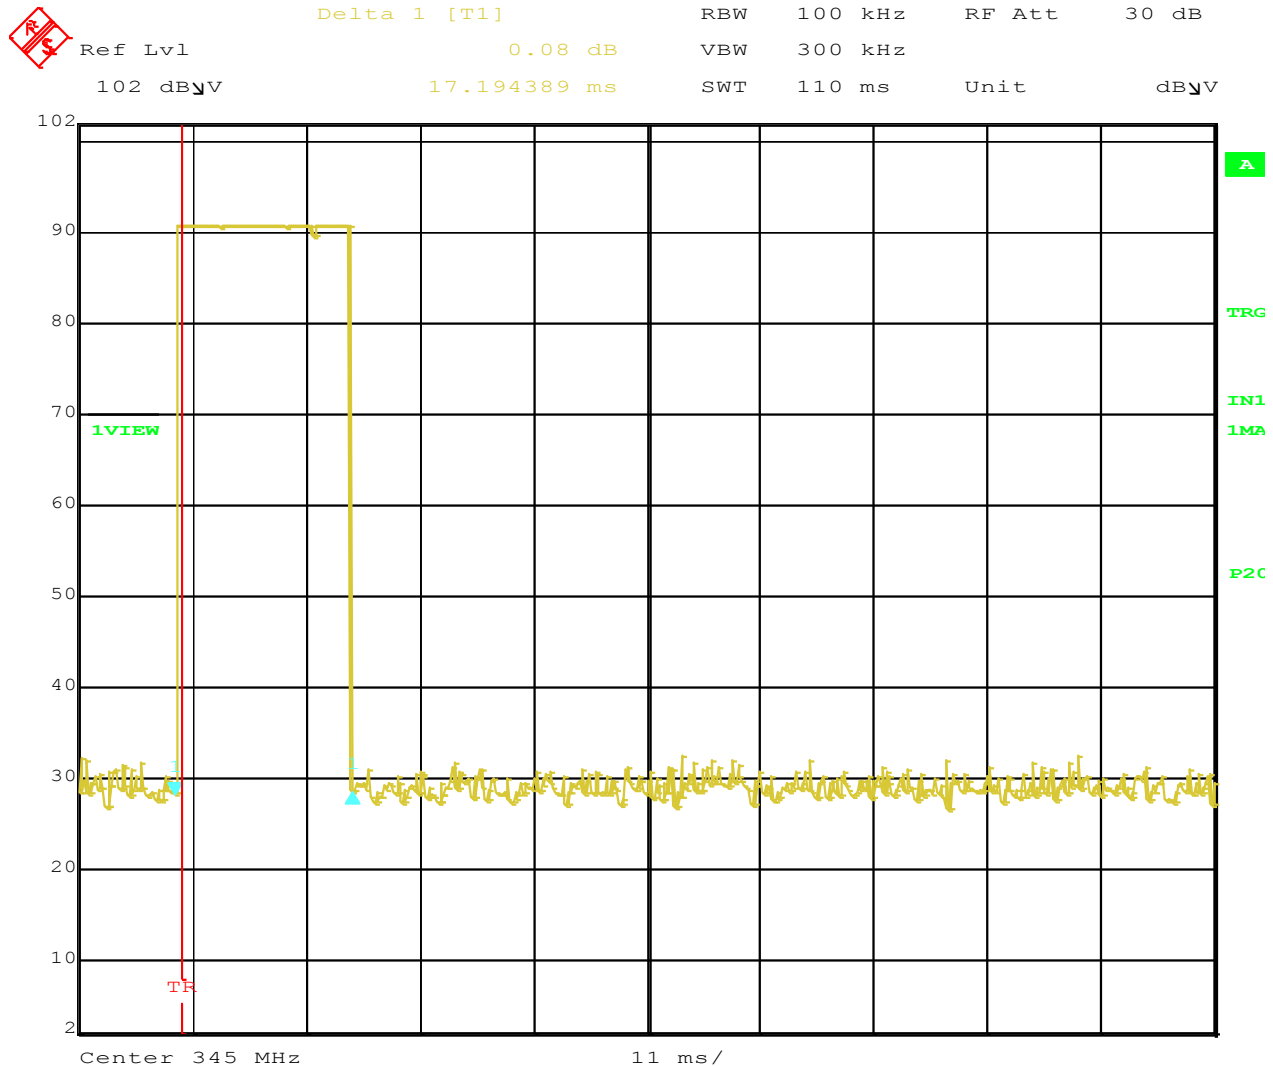

Total On Time in a 100 ms Span = 9.490681 mS



Duty Cycle

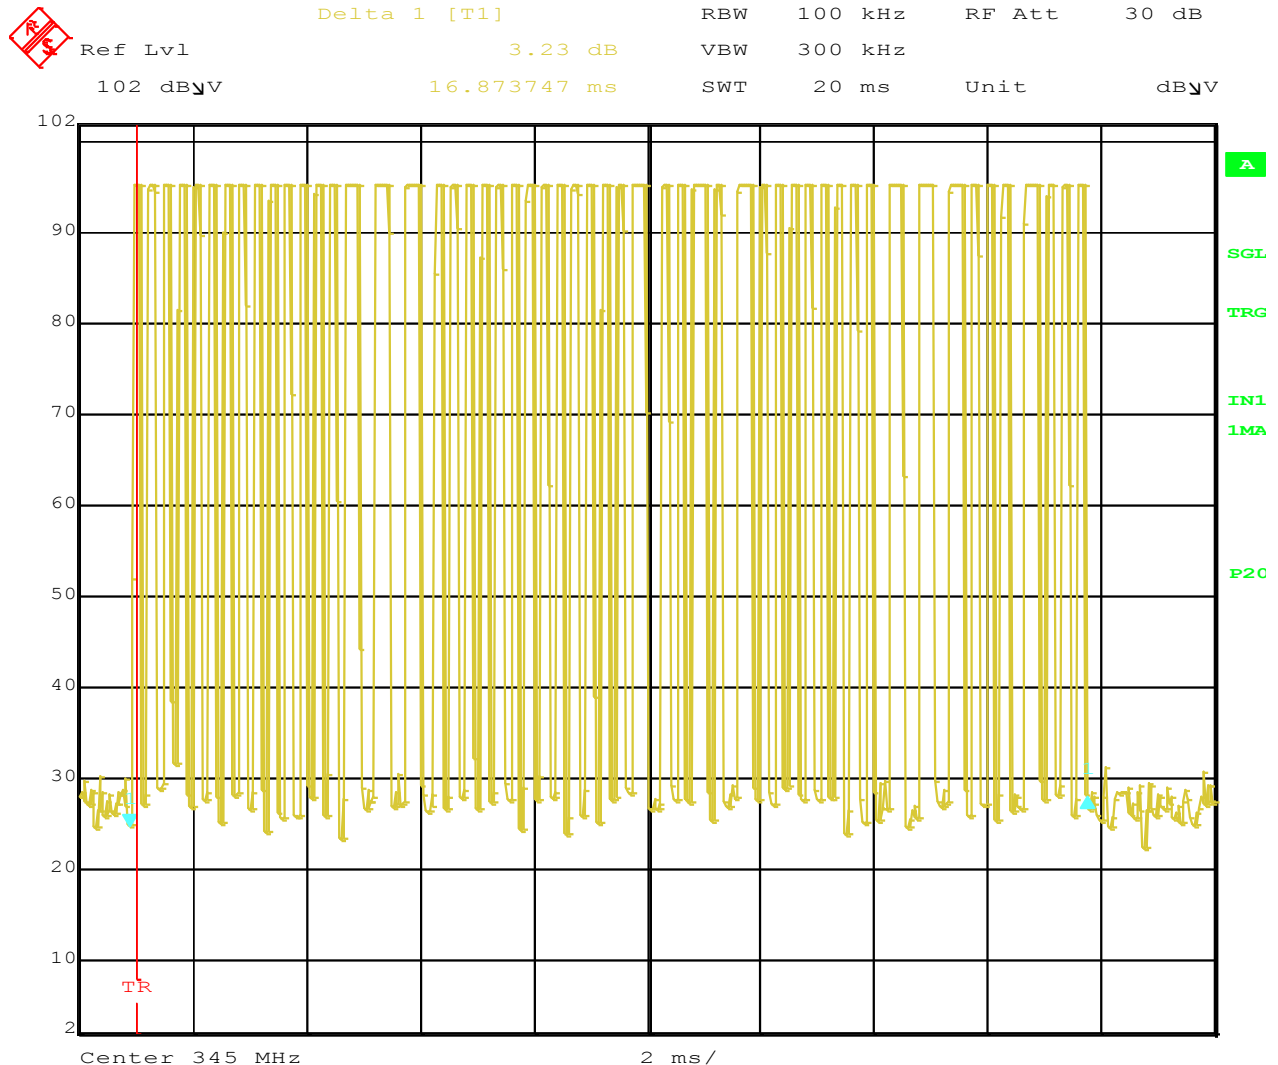

Comment A: duty cycle pulses

Number of Pulses in Worst Case 100 mS = 54

Pulse Type 1 On Time = 150.300601 μS *44 = 6613.226 μS

Pulse Type 2 On Time = 287.745491 μS *10 = 2877.455 μS

6613.226 μS + 2877.455 μS = 9.490681 mS

Duty Cycle = 9.490681 mS / 100 mS = 0.0949

The Peak to Average Duty Cycle Correction = -20.00dB



***TRANSMIT TIMEOUT
DATA***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

TRANSMIT TIMEOUT


FCC 15.231

Company: Nortek
EUT: Grill Guard
Model: GC-GRILL1-B-345

Date: 7/18/2017
Lab: R
Tested By: Torey O.

Freq. (MHz)	Time (S)	Limit (S)	Margin	Comments
345.00	2.30	5	-2.70	

This is a normal operation which is the worst case transmission.

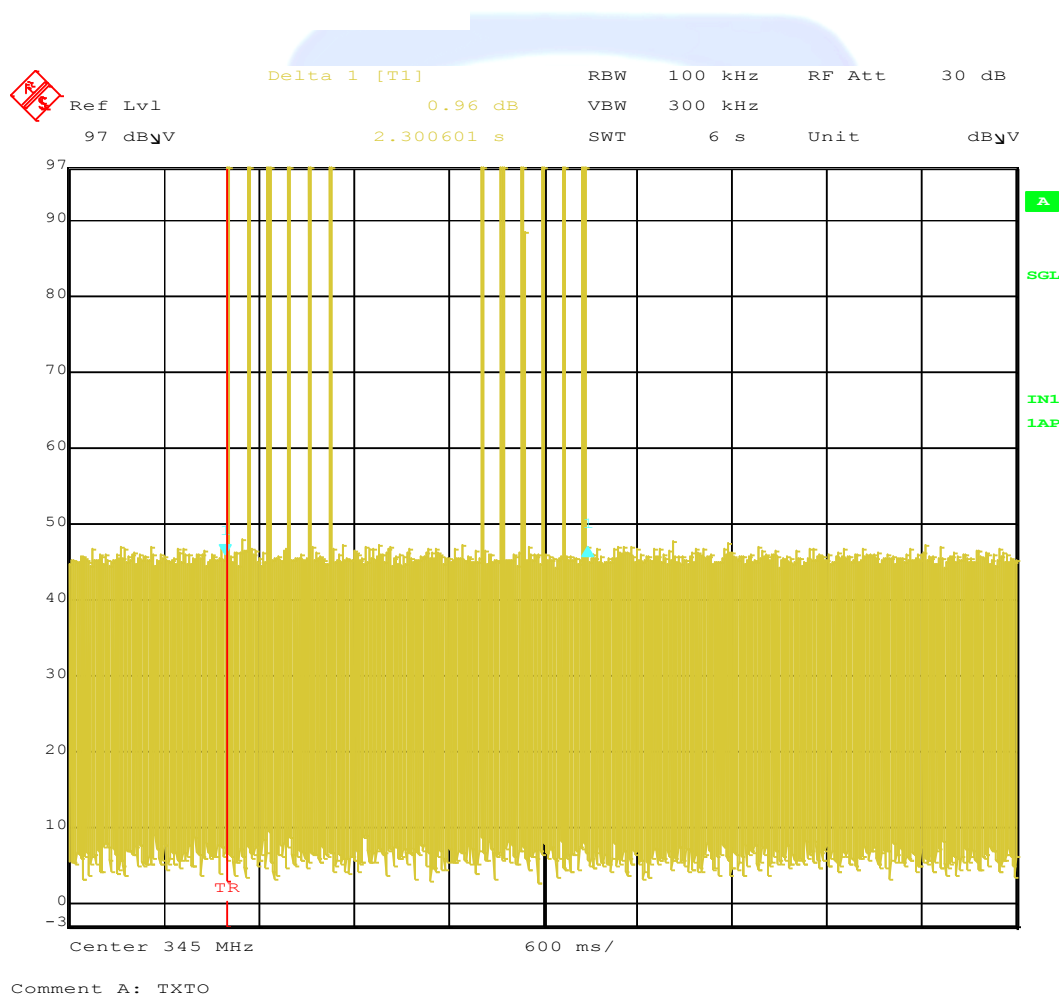

***-20 dB & Occupied Bandwidth
DATA***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400


-20dB & 99% BANDWIDTHS

FCC 15.231


Company: Nortek
EUT: Grill Guard
Model: GC-GRILL1-B-345

Date: 7/18/2017
Lab: R
Tested By: Torey O

Freq. (MHz)	Bandwidth (kHz)	Limit (kHz)	Margin	Comments
345.00	765.53	862.50	-96.97	-20dB
345.00	39.28	N/A	N/A	99%

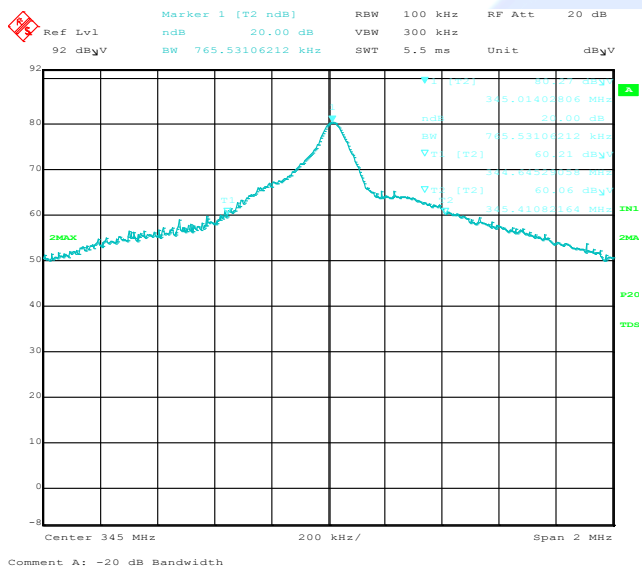

Comment A: -20 dB Bandwidth

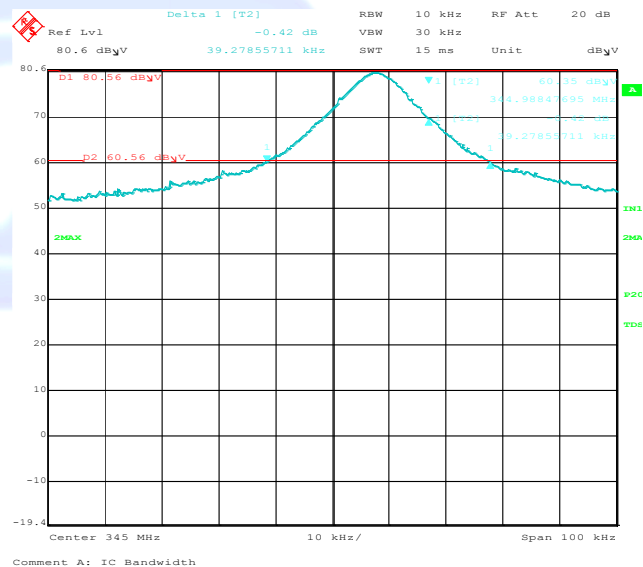

Comment A: 99% Bandwidth



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400