

VERTICAL

Fri 2003 May 16 13:37

REF 80.0 dB μ V

MKR 433.84 MHz

10dB/

A_Max


Posi

B_Blank

Posi

71.88 dB μ V

MARKER
433.84 MHz

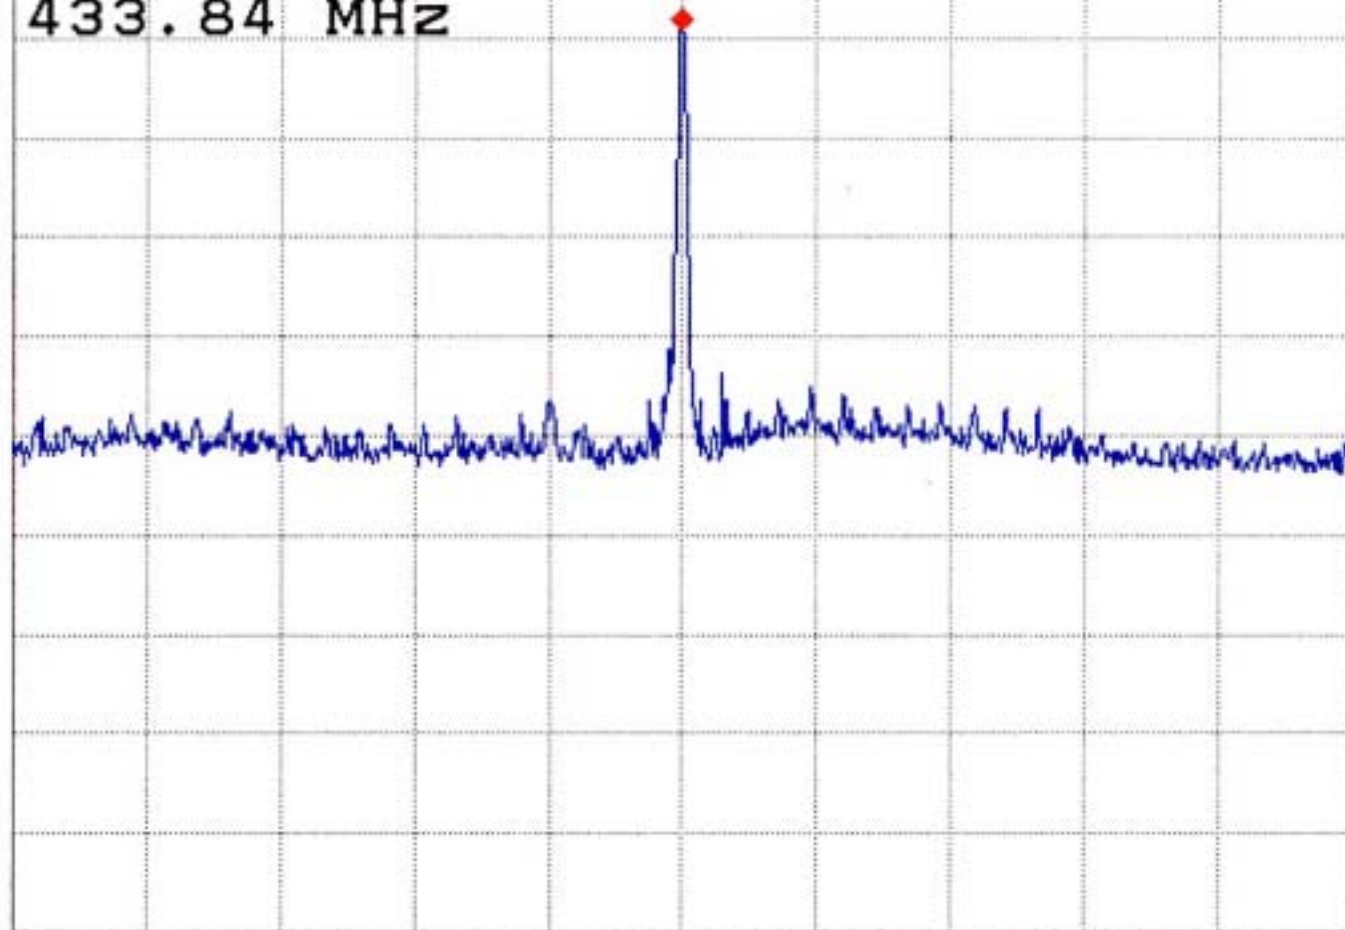

CENTER 433.84 MHz

SPAN 40.00 MHz

*RBW 100 kHz *VBW 100 kHz *SWP 20 ms

ATT 5 dB

HORIZONTAL

Fri 2003 May 16 13:49

REF 80.0 dB μ V

MKR 433.84 MHz

10dB/

A_Max


Posi

B_Blank

Posi

73.02 dB μ V

CENTER
433.84 MHz

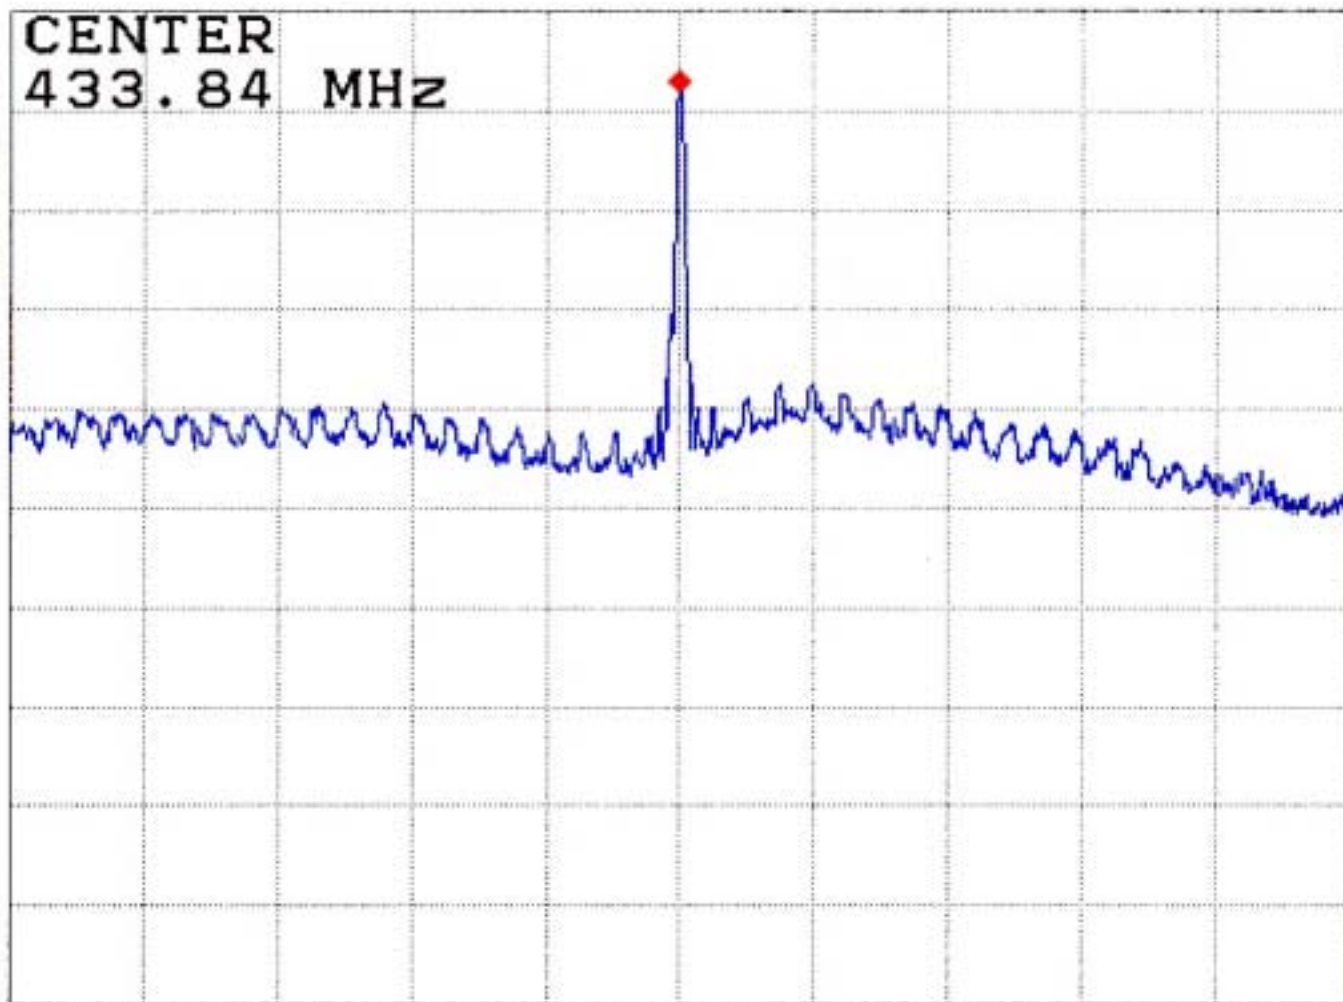

CENTER 433.84 MHz


SPAN 40.00 MHz

*RBW 100 kHz *VBW 100 kHz *SWP 20 ms

ATT 5 dB

Measurement Result

Operation Mode:	Receiver Mode	Test Configuration:	EUT/TX
Fundamental Frequency:	433.92 MHz	Test Date:	May 16, 2003
Temperature:	25	Test By:	Jimmy Chen
Humidity:	62%	Pol:	Vertical

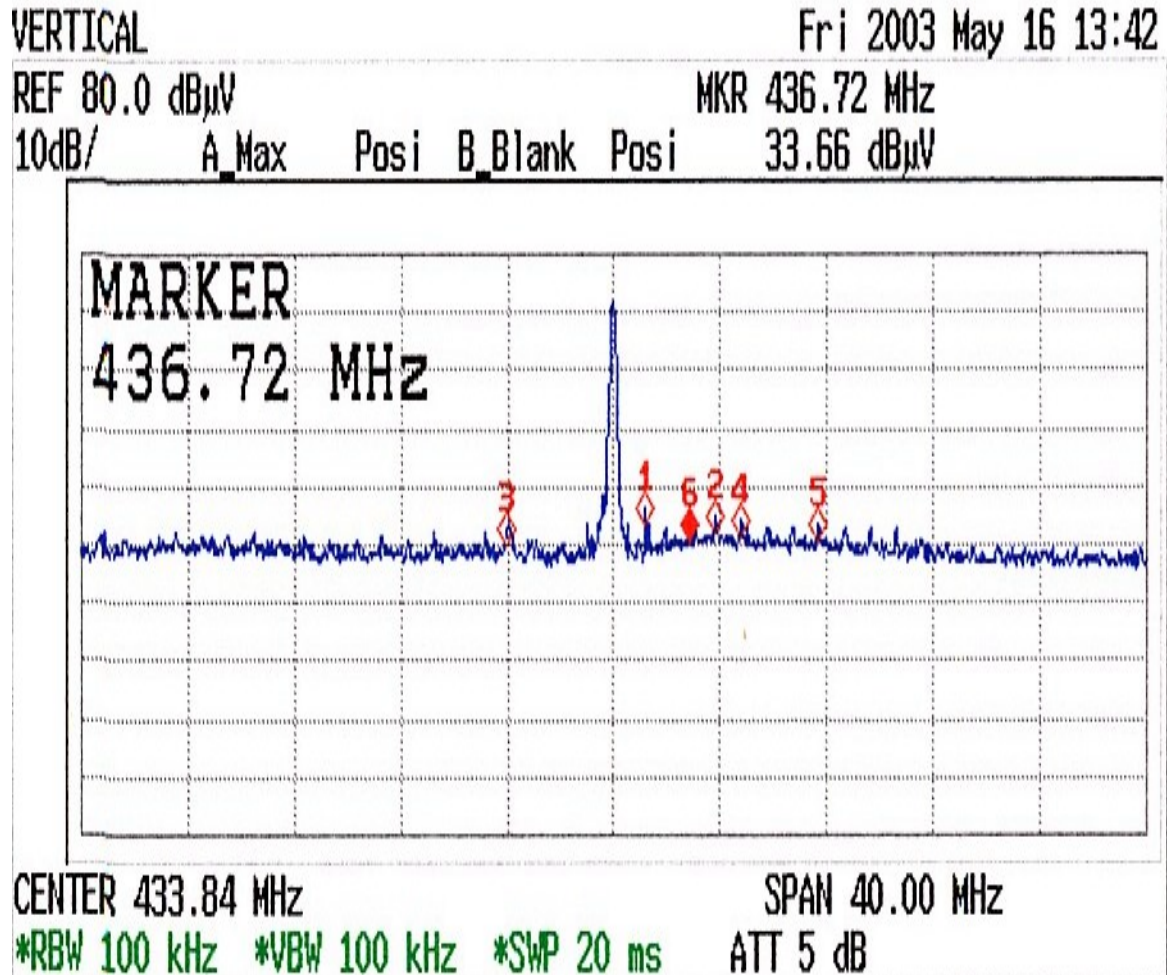


Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
429.800	V	Peak	33.17	0.35	33.52	46.00	-12.48
435.040	V	Peak	36.27	0.17	36.44	46.00	-9.56
436.720	V	Peak	33.66	0.12	33.78	46.00	-12.22
437.680	V	Peak	34.90	0.08	34.98	46.00	-11.02
438.640	V	Peak	33.98	0.05	34.03	46.00	-11.97
441.520	V	Peak	33.32	-0.05	33.27	46.00	-12.73

Note: No other emissions were found within 20dB below the limits from 30-2000MHz.

Measurement Result

Operation Mode: Receiver Mode
 Fundamental Frequency: 433.92 MHz
 Temperature: 25
 Humidity: 62 %

Test Configuration: EUT/TX
 Test Date: May 16, 2003
 Test By: Jimmy Chen
 Pol: Horizontal

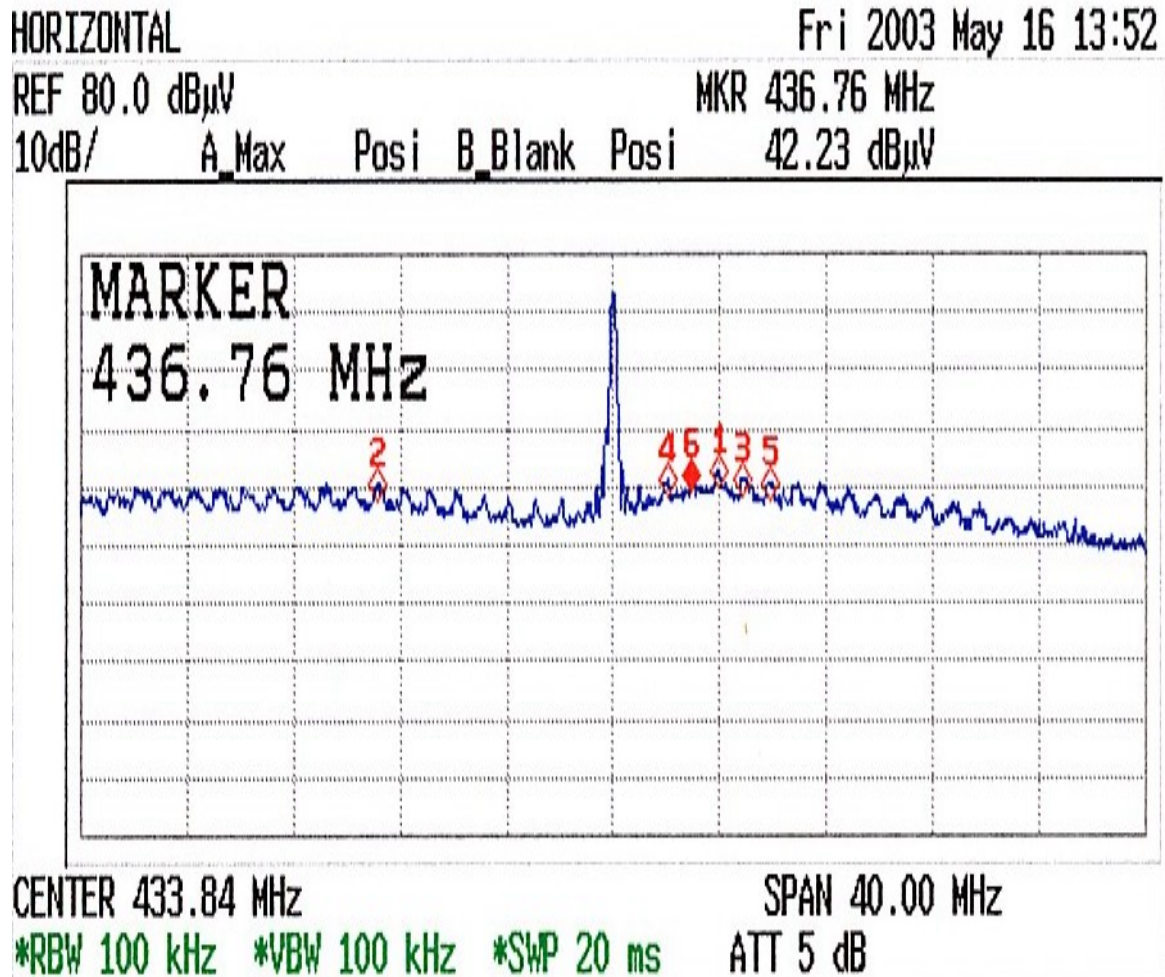

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
425.000	H	Peak	40.73	0.51	41.24	46.00	-4.76
435.880	H	Peak	41.28	0.14	41.42	46.00	-4.58
436.760	H	Peak	42.23	0.11	42.34	46.00	-3.66
437.840	H	Peak	42.41	0.08	42.49	46.00	-3.51
438.720	H	Peak	41.37	0.05	41.42	46.00	-4.58
439.720	H	Peak	40.76	0.02	40.78	46.00	-5.22

Note: No other emissions were found within 20dB below the limits from 30-2000MHz.