



CERTIFICATION TEST REPORT

Report Number. : 4790309672-FR2V3

Applicant : Kaonbroadband CO., LTD.
884-3, Seongnam-daero, Bundang-gu, Seongnam-si
Gyeonggi-do, South Korea

Model : AR1344P, AR1344, AR1344E, AR1344E2, EVO6700AP2

FCC ID : 2AXCW-AP67002

EUT Description : WiFi6 Smart Mesh

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

May 13, 2022

Prepared by:

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,

Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433



ACCREDITED

Testing Laboratory

TL-637

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	04/20/22	Initial issue	Jaehyong Lee
V2	05/10/22	Updated to address about the TCB's question	Jaehyong Lee
V3	05/13/22	Updated to address about the TCB's question	Jaehyong Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
1.1. INTRODUCTION OF TEST DATA REUSE	6
1.2. DIFFERENCE	6
1.3. SPOT CHECK VERIFICATION DATA	6
1.4. REFERENCE DETAIL	7
2. TEST METHODOLOGY	8
3. FACILITIES AND ACCREDITATION	8
4. CALIBRATION AND UNCERTAINTY	9
4.1. MEASURING INSTRUMENT CALIBRATION	9
4.2. SAMPLE CALCULATION	9
4.3. MEASUREMENT UNCERTAINTY	9
4.4. DECISION RULE	9
5. EQUIPMENT UNDER TEST	10
5.1. DESCRIPTION OF EUT	10
5.2. MAXIMUM OUTPUT POWER	12
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	12
5.4. LIST OF TEST REDUCTION AND MODES	12
5.5. TESTED CHANNELS LIST	13
5.6. WORST-CASE CONFIGURATION AND MODE	13
5.7. DESCRIPTION OF TEST SETUP	14
6. MEASUREMENT METHODS	16
7. TEST AND MEASUREMENT EQUIPMENT	17
8. SUMMARY TABLE	18
9. REFERENCE MEASUREMENT RESULTS	19
9.1. ON TIME AND DUTY CYCLE RESULTS	19
9.1.1. ON TIME AND DUTY CYCLE PLOT	20
10. ANTENNA PORT TEST RESULTS	24
10.1. 6 dB BANDWIDTH	24
10.1.1. 802.11ax HE20 MODE IN THE 2.4 GHz BAND	26
10.1.2. 802.11ax HE40 MODE IN THE 2.4 GHz BAND	26
10.2. OUTPUT POWER	27
10.2.1. 802.11ax HE20 MIMO MODE IN THE 2.4 GHz BAND	28

10.2.2. 802.11ax HE40 MIMO MODE IN THE 2.4 GHz BAND.....	30
10.3. PSD	32
10.3.1. 802.11ax HE20 MIMO MODE IN THE 2.4 GHz BAND.....	34
10.3.2. 802.11ax HE40 MIMO MODE IN THE 2.4 GHz BAND.....	35
10.4. OUT-OF-BAND EMISSIONS	36
10.4.1. 802.11ax HE20 MODE IN THE 2.4 GHz BAND	37
10.4.2. 802.11ax HE40 MODE IN THE 2.4 GHz BAND	45
11. RADIATED TEST RESULTS	49
11.1. TRANSMITTER ABOVE 1 GHz	51
11.2. Spurious Emissions for Simultaneous Transmission	56
11.2.1. Worst test case RSDB condition	56
11.2.1. Test Results.....	56
11.3. WORST-CASE BELOW 1 GHz.....	57
12. AC POWER LINE CONDUCTED EMISSIONS	58
APPENDIX A. SPOT CHECK DATA.....	59
➤ 6 dB BANDWIDTH	59
➤ PSD	59
➤ BANDEDGE	60
➤ CONDUCTED SPURIOUS EMISSIONS	60
➤ BANDEDGE	61
➤ HARMONICS AND SPURIOUS EMISSIONS	62

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Kaonbroadband CO., LTD.

EUT DESCRIPTION: WiFi6 Smart Mesh

MODEL NUMBER: AR1344P, AR1344, AR1344E, AR1344E2, EVO6700AP2

SERIAL NUMBER: Proto type (CONDUCTED);
Proto type (RADIATED)

DATE TESTED: MAY 03, 2021 – JULY 28, 2021 & AUG. 11, 2021 (Original);
FEB. 28, 2022 – MAR. 31, 2022 (Spot check)

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



Robby Lee
Senior Laboratory Engineer
UL Korea, Ltd.

Tested By:



Jaehyong Lee
Laboratory Engineer Associate
UL Korea, Ltd.

1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: 2AXCW-AP6700 DTS WLAN_802.11ax(FCC CFR 47 Part 15C). And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

1.2. DIFFERENCE

The FCC ID: 2AXCW-AP67002 shares the same enclosure and circuit board as FCC ID: 2AXCW-AP6700. The WLAN antennas and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary conducted data and radiated emissions that the performance of the FCC ID: 2AXCW-AP6700 remains representative of FCC ID: 2AXCW-AP67002. The test data of FCC ID: 2AXCW-AP6700 being submitted for this application to cover WLAN features.

1.3. SPOT CHECK VERIFICATION DATA (Worst case of each test items)

➤ Conducted test items

Band	Test Item	Mode	Test Limit	Original model	Spot check model	Deviation	Remark
				FCC ID : 2AXCW-AP6700	FCC ID : 2AXCW-AP67002		
DTS WLAN 802.11ax (2.4GHz)	6dB Bandwidth	DTS_2.4_6dB_11ax40_26T_RU0_2437_A1	Minimum 0.5 MHz	2.06 MHz	2.10 MHz	0.04 dB	
	PSD	DTS_2.4_PSD_11ax20_26T_RU4_2437_A	8 dBm/3kHz	6.89 dBm/3kHz	7.05 dBm/3kHz	0.16 dB	
	BANDEDGE	DTS_2.4_BE_11ax20_26T_RU0_2412_A1	30 dBc	43.60 dBc	47.31 dBc	-3.71 dB	
		DTS_2.4_BE_11ax40_26T_RU0_2422_A1	30 dBc	46.96 dBc	51.04 dBc	-4.08 dB	
	CSE	DTS_2.4_CSE_11ax20_SU_2437_A2	30 dBc	51.79 dBc	49.11 dBc	2.68 dB	
		DTS_2.4_CSE_11ax40_26T_RU0_2422_A1	30 dBc	48.49 dBc	47.52 dBc	0.97 dB	

➤ Radiated emissions

Band	Test Item	Mode	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
					FCC ID : 2AXCW-AP6700	FCC ID : 2AXCW-AP67002		
DTS WLAN 802.11ax (2.4GHz)	Band Edge	DTS_BE_V_ax_40_2422_26T_RU0_A	2422 MHz	54 dBuV/m	72.46 dBuV/m	57.93 dBuV/m	-14.53 dB	
	RSE	DTS_HARM_ax_40_2452_26T_RU9_A	7356 MHz	54 dBuV/m	51.62 dBuV/m	35.00 dBuV/m	-16.62 dB	

Comparison of two models, upper deviation is within 3 dB range and all test results are under FCC Technical Limits.

1.4. REFERENCE DETAIL

Reference application that contains the reused reference data in the individual test reports:

Equipment Class	Reference FCC ID (Parent)	Application Type	Reference Test report number	Exhibit Type	Variant Test Report Number	Data Re-used
DTS	2AXCW-AP6700	Original Grant	4789901731-FR1 (802.11b/g/n)	Test Report	4790309672-FR1 (802.11b/g/n)	All (Except for section 10.3 (Below 1GHz) and 11(AC Power Line))
			4789901731-FR2 (802.11ax)	Test Report	4790309672-FR2 (802.11ax)	All (Except for section 11.3 (Below 1GHz) and 12(AC Power Line))

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 DTS Meas Guidance v05r02.
4. KDB 662911 D01 Multiple Transmitter Output v02r01
5. KDB 484596 D01 Referencing Test Data v01
6. ANSI C63.10-2013

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
☒	Chamber 1
☒	Chamber 2
☒	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

UL Korea, Ltd. is accredited by National Radio Research Agency, Designation Number KR0161, for all testing performed within the scope of this report.

ISED CABID	ISED Company Number	FCC Registration
KR0161	2324L	644529

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 28.9 \text{ dBuV/m} &= 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.87 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.05 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.78 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.58 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Accuracy Method specified in Procedure 2, Clause 4.4.3 in IEC Guide 115:2007.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a WiFi6 Smart Mesh.

This test report addresses the DTS (WLAN ax) operational mode.

This report covers the models AR1344P and AR1344, AR1344E, AR1344E2, EVO6700AP2.
The difference between these models is only the memory size.

Model	Memory size
AR1344P, AR1344E2, EVO6700AP2	256MB/512MB (FLASH MEMORY / SDRAM)
AR1344, AR1344E	128MB/256MB (FLASH MEMORY / SDRAM)

The model AR1344P was set for final test.

WiFi Operating mode

Frequency rage	Mode	Antenna 1	Antenna 2
2.4GHz (2412 MHz ~ 2462 MHz)	802.11ax(HE20) MIMO / SU	TX/RX	TX/RX
	802.11ax(HE40) MIMO / SU	TX/RX	TX/RX
	802.11ax(HE20) MIMO / RU mode (OFDMA)	TX/RX	TX/RX
	802.11ax(HE40) MIMO / RU mode (OFDMA)	TX/RX	TX/RX

Note: The EUT does supported only MIMO(SDM).

Simultaneous TX Condition

Simultaneous Tx Condition - RSDB

Mode	# of TX	5GHz WLAN				2.4GHz WLAN		Test Case
		ANT1	ANT2	ANT3	ANT4	ANT1	ANT2	
2.4GHz + 5GHz RSDB MIMO	6	O	O	O	O	O	O	O

[illegible]

Mode	Tones number in RU	RU offset
HE20	26T	0
		4
		8
	52T	37
		38
		40
	106T	53
54		
242T / SU ^{Note 1}	61 / -	
HE40	26T	0
		9
		17
	52T	37
		41
		44
	106T	53
		54
		56
	242T	61
		62
484T / SU ^{Note 1}	63 / -	

Page 11 of 63

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Frequency Range [MHz]	Mode	Output Power [dBm]		Output Power [mW]	
		ANT1	ANT2	ANT1	ANT2
2412 - 2462	802.11ax(HE20) MIMO	22.56		180.30	
	802.11ax(HE40) MIMO	21.66		146.55	

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.
Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes an internal antennas, with ANT 1 & 2's maximum gain of 1.88 dBi.

The EUT uses ANT 1 and 2 as the same antenna.

5.4. LIST OF TEST REDUCTION AND MODES

The output power on covered modes is equal to or less than one referenced.

Frequency Range [MHz]	Mode	Coverd by
2412 - 2462	802.11ax HE20 RU 242T mode 2TX	802.11ax HE20 SU mode 2TX
	802.11ax HE40 RU 484T mode 2TX	802.11ax HE40 SU mode 2TX

5.5. TESTED CHANNELS LIST

Ch.	Frequency [MHz]	802.11ax(HE20)	802.11ax(HE40)
1	2412	O	-
2	2417	O	-
3	2422	-	O
6	2437	O	O
9	2452	-	O
10	2457	O	-
11	2462	O	-

5.6. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The EUT is used on the X axis as a fixed device.; therefore, all radiated testing was performed with the EUT in X orientation.

Worst-case selection criteria for test items :

- For the radiated band-edge test, the test data for RU was only reported in this test report because SU mode is same or lower than n mode. And the PSD of 26RU is highest across all RU tones.
- For the spurious emissions, it was tested at the bandwidth/RU allocation with actual highest power and bandwidth/RU allocation with actual highest PSD for each bandwidth.
(The test data for RU was only reported in this test report because SU mode is same or lower than n mode. And the PSD of 26RU is highest across all RU tones)
- For the 6dB Bandwidth, it was tested at the RU allocation with lowest tones number for each bandwidth.

Based on the baseline scan, the worst-case data rates were:

802.11ax HE20 mode: MCS0 (2TX / SDM)

802.11ax HE40 mode: MCS0 (2TX / SDM)

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacture	Model	Serial Number	FCC ID
Switching mode Power Adaptor	CHENZHO FRECOM ELECTRONICS	F18L16- 120150SPAU	N/A	N/A


I/O CABLE

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Pin	Shielded	1.5m	N/A
2	LAN	2	RJ-45	Shielded	2.0m	N/A


TEST SETUP

The EUT is a stand-alone unit during the tests.
Test software exercised the EUT to enable DTS mode.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

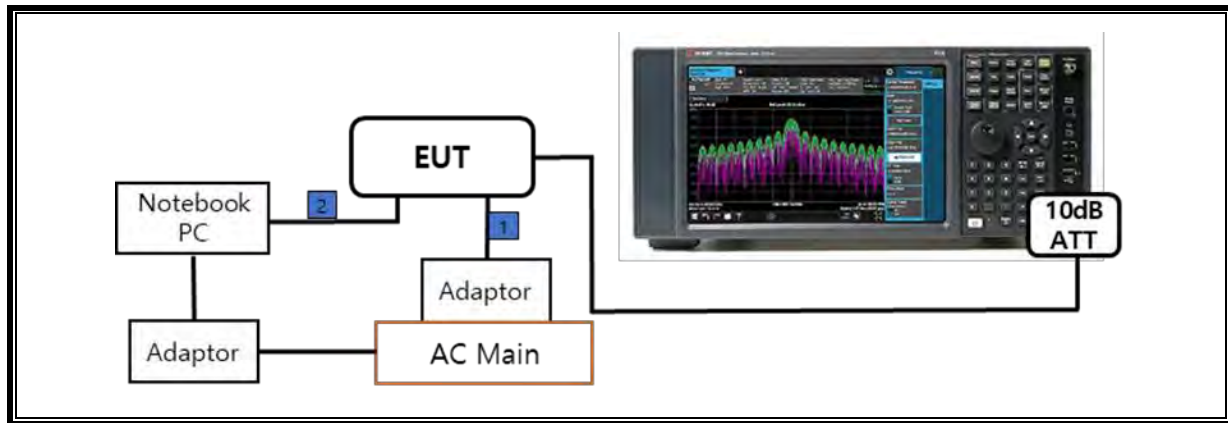

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

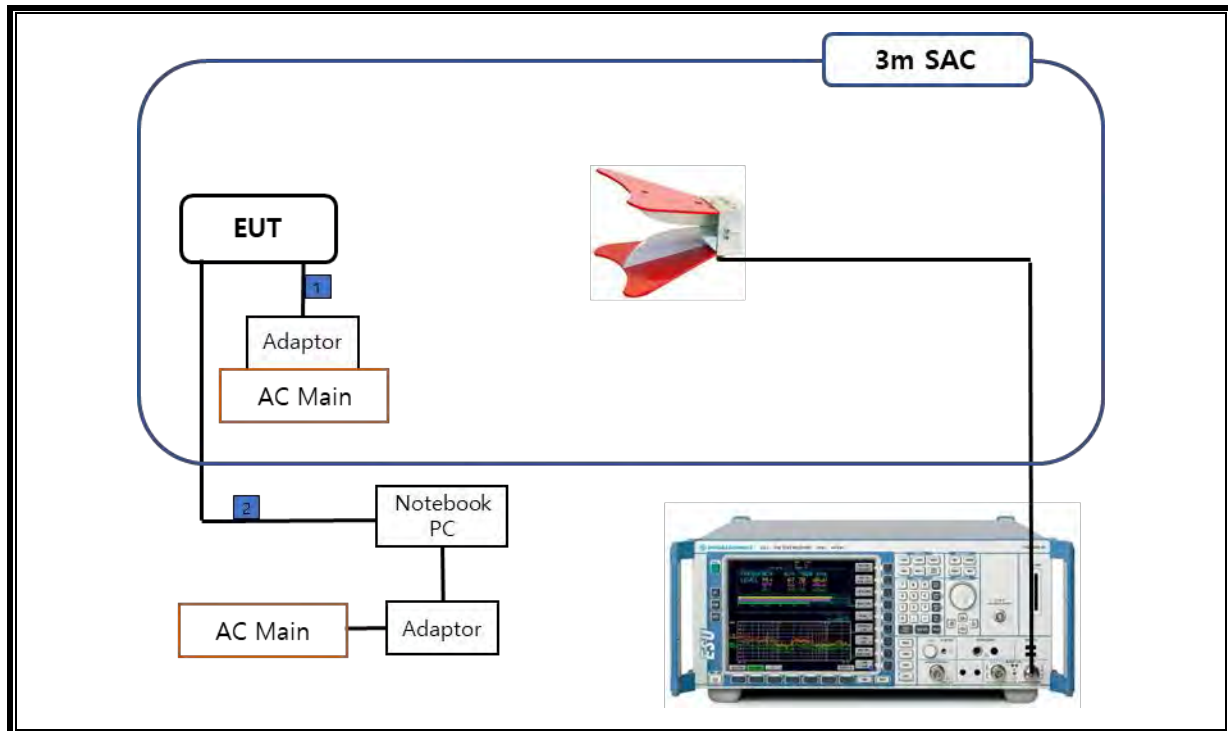

6. MEASUREMENT METHODS

6 dB BW : ANSI C63.10-2013, Section 11.8.2 Option 2

OUTPUT POWER : ANSI C63.10-2013, Section 11.9.2.3.1 Method AVGPM

POWER SPECTRAL DENSITY : ANSI C63.10-2013, Section 11.10.3 & 11.10.5 Method AVGPSD-1 and Method AVGPSD-2

Out-of-band Emissions (Conducted) : ANSI C63.10-2013, Section 11.11 Emissions in nonrestricted frequency bands

Out-of-band Emissions in Non-restricted Bands: ANSI C63.10-2013, Section 11.11 Emissions in nonrestricted frequency bands

Out-of-band Emissions in Restricted Bands : ANSI C63.10-2013, Section 11.12 Emissions in restricted frequency bands

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	2022-08-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	2022-08-13
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	2022-08-13
Antenna, Horn, 18 GHz	ETS	3115	00167211	2022-07-27
Antenna, Horn, 18 GHz	ETS	3115	00161451	2022-08-15
Antenna, Horn, 18 GHz	ETS	3117	00168724	2022-07-27
Antenna, Horn, 18 GHz	ETS	3117	00168717	2022-08-15
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2022-08-04
Preamplifier	ETS	3116C-PA	00168841	2022-08-04
Preamplifier, 1000 MHz	Sonoma	310N	341282	2022-08-02
Preamplifier, 1000 MHz	Sonoma	310N	351741	2022-08-02
Preamplifier, 1000 MHz	Sonoma	310N	370599	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029168	2022-08-02
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9030B	MY57143717	2023-01-11
RF Switching Unit	TA Engineering	TA-018S-16	SW-1	N/A
10dB ATTENUATOR	MINI-CIRCUITS	BW-K10-2W44+	2117	2022-10-22
Power Sensor	R&S	NRP8S	104520	2022-08-04
Power Sensor	R&S	NRP8S	104521	2022-08-04
Power Sensor	R&S	NRP8S	111164	2022-10-15
Power Sensor	R&S	NRP-Z91	102681	2022-08-04
Attenuator	R&S	10dB	None	2022-08-05
Attenuator	R&S	10dB	None	2022-08-05
Attenuator	R&S	10dB	None	2022-08-05
Attenuator	R&S	10dB	None	2022-08-05
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2022-08-02
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2022-08-02
EMI Test Receive, 3 GHz	R&S	ESR3	102592	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	019	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	020	2022-08-02
LISN	R&S	ENV216	102478	2022-08-06
OPEN SWITCH AND CONTROL	R&S	OSP220	101437	N/A
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2023-10-06
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	R&S	EMC32	Ver 10.60.10	

8. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.247 (a)(2)	Occupied Band width (6dB)	> 500kHz	Conducted	Pass
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-30dBc		Pass
15.247 (b)(3)	TX conducted output power	< 30dBm		Pass
15.247 (e)	PSD	< 8dBm		Pass
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Refer to the DTS WLAN Test report (No.:4790309672-FR1)
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m	Radiated	Pass

9. REFERENCE MEASUREMENT RESULTS


9.1. ON TIME AND DUTY CYCLE RESULTS


LIMITS


None; for reporting purposes only.


Mode	ANT	Tone	On Time [ms]	Period [ms]	Duty Cycle X [Linear]	Duty Cycle X [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
802.11ax HE20	ALL	26T	3.082	3.115	0.99	98.94	0	0.324
		52T	2.944	2.977	0.99	98.89	0	0.340
		106T	2.863	2.897	0.99	98.83	0	0.349
		242T	2.816	2.848	0.99	98.88	0	0.355
		SU	3.027	3.058	0.99	98.99	0	0.330
802.11ax HE40	ALL	26T	3.091	3.123	0.99	98.98	0	0.324
		52T	2.945	2.977	0.99	98.93	0	0.340
		106T	2.863	2.896	0.99	98.86	0	0.349
		242T	2.816	2.849	0.99	98.84	0	0.355
		484T	2.802	2.834	0.99	98.87	0	0.357
		SU	2.400	2.431	0.99	98.72	0	0.417

9.1.1. ON TIME AND DUTY CYCLE PLOT

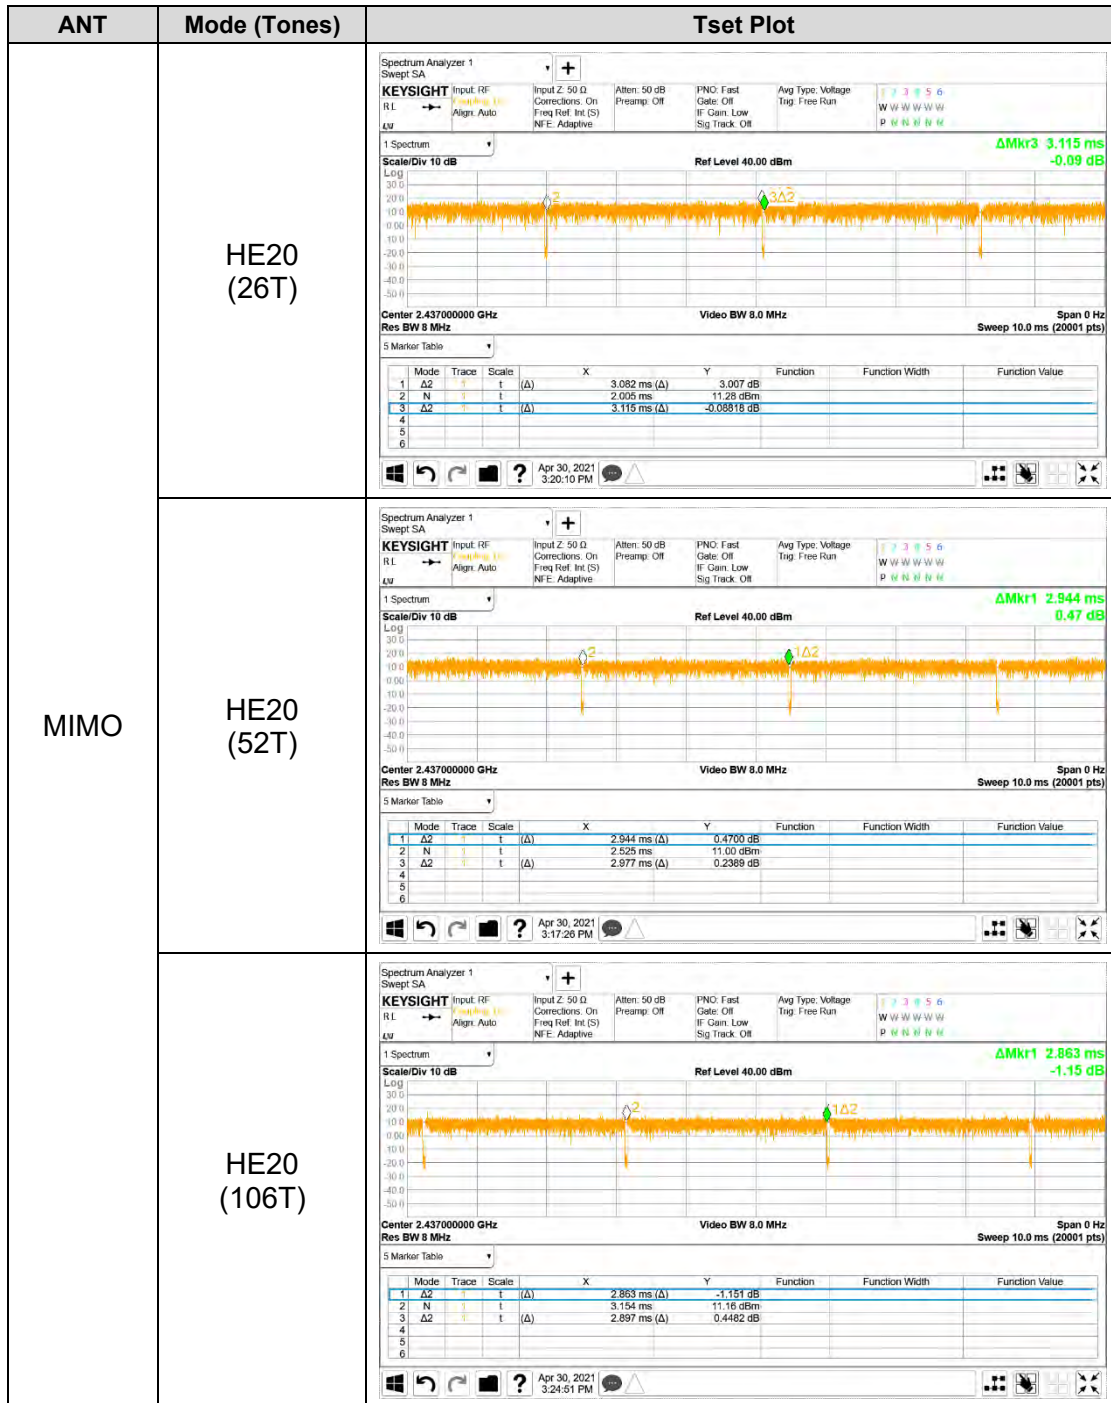

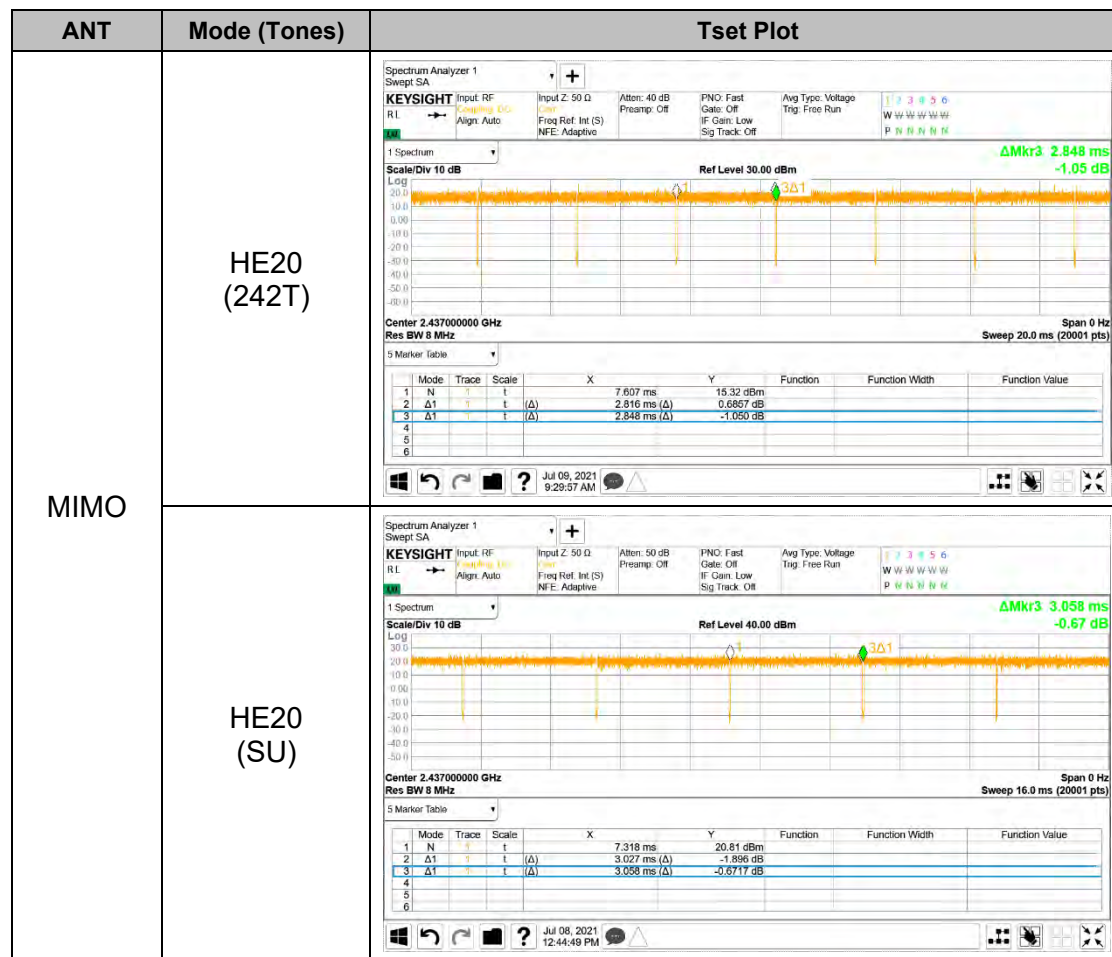

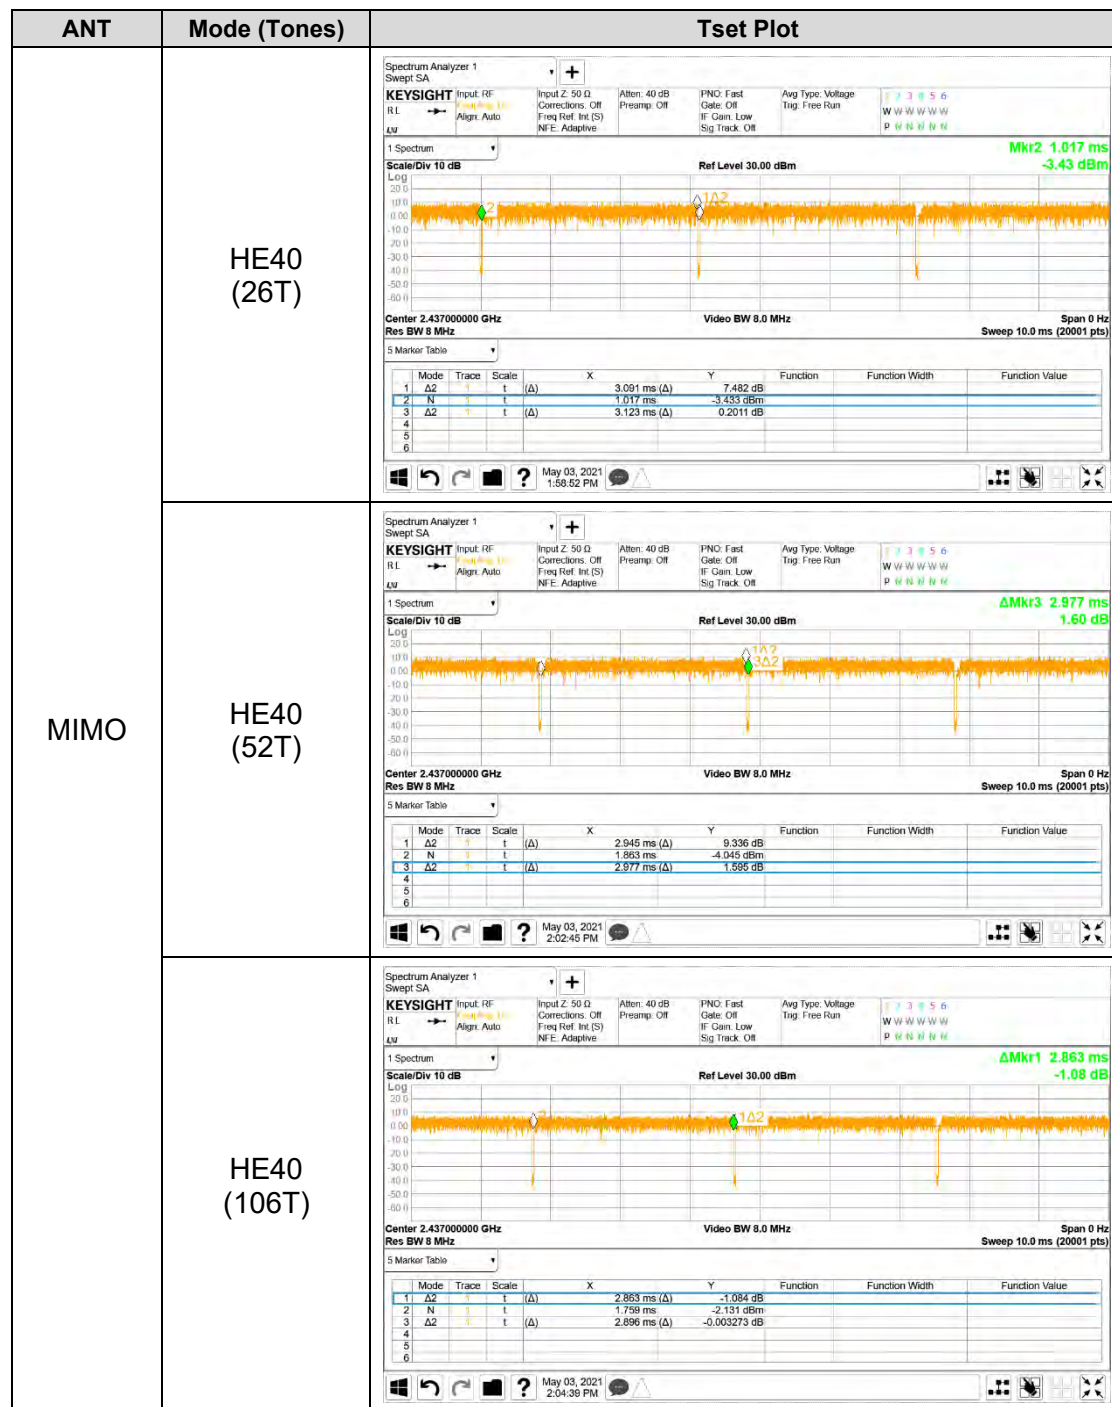

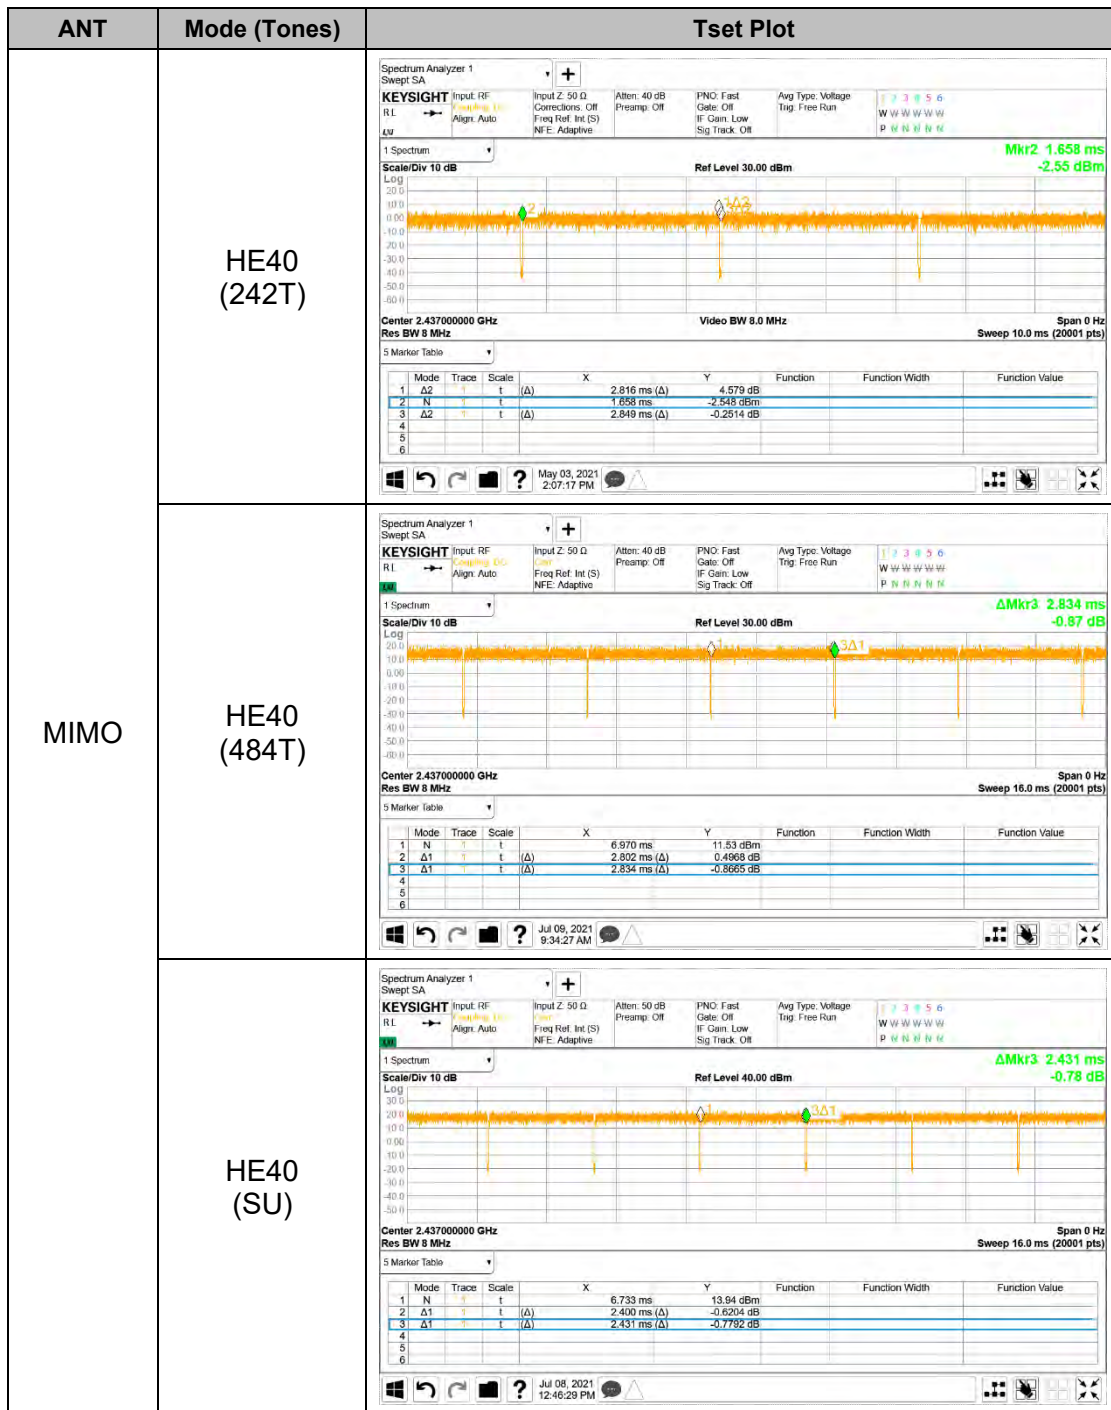

10. ANTENNA PORT TEST RESULTS

10.1. 6 dB BANDWIDTH

LIMITS

6dB Bandwidth:

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE



6dB Bandwidth:

Reference to KDB 558074 D01 15.247 Meas Guidance: The transmitter output is connected to a spectrum analyzer with the RBW set to 100 kHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

RESULTS

- Please refer to the next page

WORST CASE TEST PLOTS

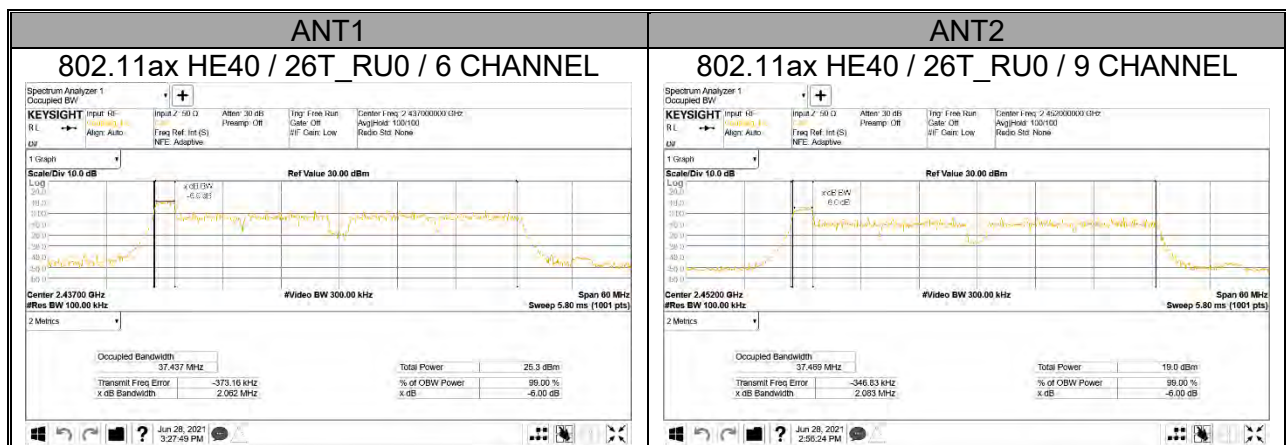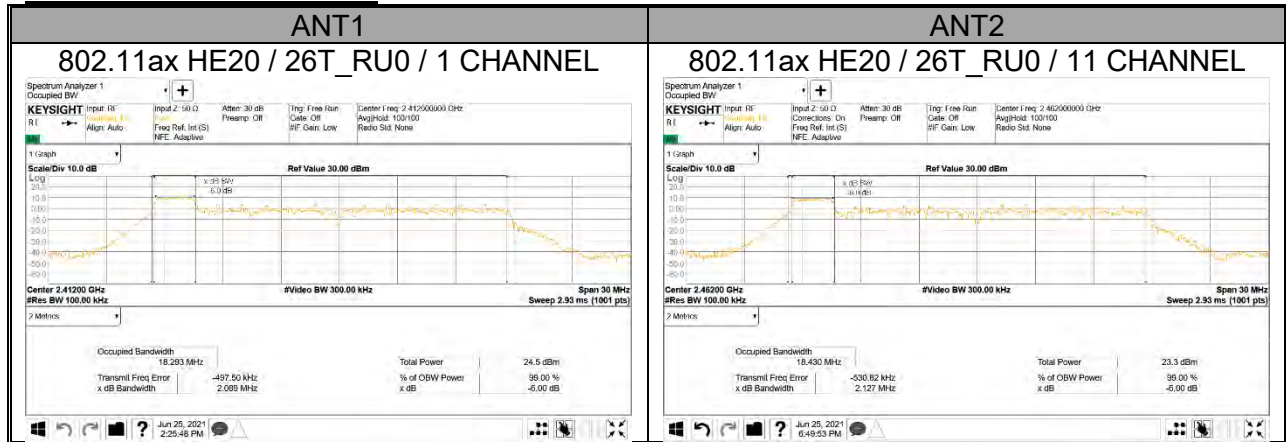

10.1.1. 802.11ax HE20 MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	Tones	RU offset	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
				ANT1	ANT2	
1	2412	26T	0	2.089	2.184	0.5
2	2417			2.170	2.208	
6	2437			2.146	2.173	
10	2457			2.158	2.171	
11	2462			2.171	2.127	
Worst				2.089	2.127	

10.1.2. 802.11ax HE40 MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	Tones	RU offset	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
				ANT1	ANT2	
3	2422	26T	0	2.066	2.091	0.5
6	2437			2.062	2.132	
9	2452			2.066	2.083	
Worst				2.062	2.083	

10.2. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband RF frame average power sensor.

The cable assembly insertion loss and duty cycle correction factor was entered as an offset in the power sensor to allow for direct reading of power.

Output power measurement was performed utilizing the method AVGPM under KDB558074 D01 15.247 Meas Guidance 8.3.2.3.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is equal among the chains.
The directional gain is:

Bands [MHz]	ANT 1 [dBi]	ANT 2 [dBi]	Directional Gain [dBi]
2 412 – 2 462	1.88	1.88	1.88

Note: Array gain calculation for CDD

For power measurements on IEEE 802.11 devices:

- Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$
- Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT}

RESULTS

- Please refer to the next page

10.2.1. 802.11ax HE20 MIMO MODE IN THE 2.4 GHz BAND

Frequency Range [MHz]	ANT Gain	FCC Power Limit [dBm]	Max Power [dBm]
	Directional Gain [dBi]		
2412 - 2462	1.88	30	30
Included in Calculations of Corr'd Power			
Duty Cycle CF	HE20	26T	0 dB
		52T	0 dB
		106T	0 dB
		242T	0 dB
		SU	0 dB

Calculation of Output Power result

→ Total Corr'd Power = ANT1 Power + ANT2 Power + Duty Cycle CF

Channel	Frequency [MHz]	Tones	RU Offset	Meas Power [dBm]		Total Corr'd Power [dBm]	Power Limit [dBm]
				ANT1	ANT2		
1	2412	26T	0	15.35	15.34	18.36	30
			4	15.76	15.86	18.82	
			8	15.71	15.48	18.61	
		52T	37	14.45	14.30	17.39	
			38	14.77	14.78	17.79	
			40	14.80	14.52	17.67	
		106T	53	14.33	14.43	17.39	
			54	14.51	14.40	17.47	
		242T	61	14.35	14.43	17.40	
		SU	-	14.71	14.81	17.77	
2	2417	26T	0	15.10	15.05	18.09	30
			4	15.68	15.82	18.76	
			8	15.45	15.41	18.44	
		52T	37	15.15	15.22	18.20	
			38	15.59	15.69	18.65	
			40	15.52	15.38	18.46	
		106T	53	15.40	15.46	18.44	
			54	15.67	15.68	18.69	
		242T	61	16.41	16.60	19.52	
		SU	-	16.69	16.83	19.77	
6	2437	26T	0	14.69	15.14	17.93	30
			4	15.76	15.86	18.82	
			8	15.66	15.53	18.61	
		52T	37	16.21	16.17	19.20	
			38	16.58	16.77	19.69	
			40	16.90	16.43	19.68	
		106T	53	17.19	17.28	20.25	
			54	17.51	17.41	20.47	
		242T	61	19.06	19.03	22.06	
		SU	-	19.53	19.57	22.56	

Channel	Frequency [MHz]	Tones	RU Offset	Meas Power [dBm]		Total Corr'd Power [dBm]	Power Limit [dBm]
				ANT1	ANT2		
10	2457	26T	0	14.68	15.15	17.93	30
			4	15.74	15.89	18.83	
			8	15.63	15.50	18.58	
		52T	37	16.25	16.24	19.26	
			38	16.53	16.72	19.64	
			40	16.88	16.47	19.69	
		106T	53	17.12	17.30	20.22	
			54	17.49	17.38	20.45	
		242T	61	17.09	17.34	20.23	
		SU	-	17.28	17.52	20.41	
11	2462	26T	0	14.96	15.01	18.00	30
			4	15.68	15.92	18.81	
			8	15.45	15.90	18.69	
		52T	37	14.26	14.09	17.19	
			38	14.51	14.61	17.57	
			40	14.45	14.85	17.66	
		106T	53	14.09	14.12	17.12	
			54	14.33	14.53	17.44	
		242T	61	12.41	12.62	15.53	
		SU	-	12.63	12.83	15.74	

10.2.2. 802.11ax HE40 MIMO MODE IN THE 2.4 GHz BAND

Frequency Range [MHz]	ANT Gain	FCC Power Limit [dBm]	Max Power [dBm]
	Directional Gain [dBi]		
2422 - 2452	1.88	30	30
Included in Calculations of Corr'd Power			
Duty Cycle CF	HE40	26T	0 dB
		52T	0 dB
		106T	0 dB
		242T	0 dB
		484T	0 dB
		SU	0 dB

Calculation of Output Power result

→ Total Corr'd Power = ANT1 Power + ANT2 Power + Duty Cycle CF

Channel	Frequency [MHz]	Tones	RU Offset	Meas Power [dBm]		Total Corr'd Power [dBm]	Power Limit [dBm]
				ANT1	ANT2		
3	2422	26T	0	10.18	10.53	13.37	30
			9	10.67	10.95	13.82	
			17	10.74	10.61	13.69	
		52T	37	10.51	10.57	13.55	
			40	10.64	10.80	13.73	
			44	10.85	10.63	13.75	
		106T	53	10.28	10.59	13.45	
			56	10.61	10.56	13.60	
		242T	61	10.38	10.67	13.54	
			62	10.80	10.69	13.76	
6	2437	26T	65	10.79	10.61	13.71	30
			SU	10.76	10.86	13.82	
		52T	0	15.17	15.19	18.19	
			9	15.33	15.51	18.43	
			17	15.40	15.26	18.34	
		106T	37	16.13	16.15	19.15	
			40	15.76	15.82	18.80	
			44	16.26	15.79	19.04	
		242T	53	16.42	16.49	19.47	
			56	16.48	16.22	19.36	
		484T	61	17.39	17.50	20.46	30
			62	17.53	17.29	20.42	
		SU	65	18.45	18.25	21.36	
			-	18.69	18.61	21.66	

Channel	Frequency [MHz]	Tones	RU Offset	Meas Power [dBm]		Total Corr'd Power [dBm]	Power Limit [dBm]
				ANT1	ANT2		
9	2452	26T	0	10.34	10.77	13.57	30
			9	10.55	10.49	13.53	
			17	10.03	10.42	13.24	
		52T	37	10.01	10.55	13.30	
			40	10.57	10.52	13.56	
			44	10.40	10.75	13.59	
		106T	53	10.39	10.62	13.52	
			56	10.43	10.77	13.61	
		242T	61	10.46	10.58	13.53	
			62	10.29	10.61	13.46	
		484T	65	10.09	10.39	13.25	
		SU	-	10.17	10.40	13.30	

10.3. PSD

LIMITS

FCC §15.247

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

Power Spectral Density was performed utilizing the method AVGPS-1 under KDB558074 D01 15.247 Meas Guidance section 8.4.

DIRECTIONAL ANTENNA GAIN


The TX chains are uncorrelated and the antenna gain is equal among the chains.
The directional gain is:

Bands [MHz]	ANT 1 [dBi]	ANT 2 [dBi]	Directional Gain [dBi]
2 412 – 2 462	1.88	1.88	1.88

RESULTS

- Please refer to the next page

WORST CASE TEST PLOTS

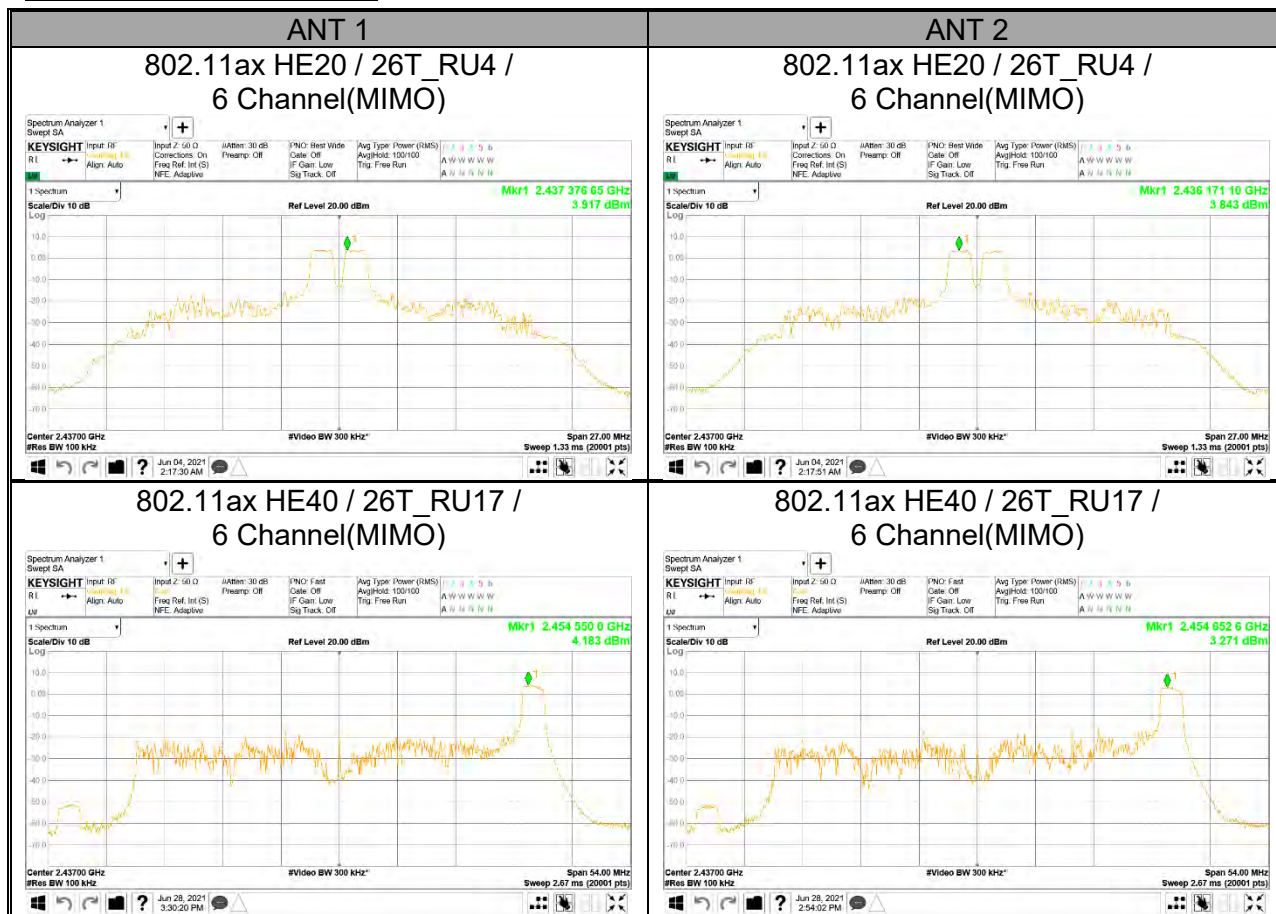

10.3.1. 802.11ax HE20 MIMO MODE IN THE 2.4 GHz BAND

Included in Calculations of Corr'd Power				
Duty Cycle CF	HE20	26T	0	dB
		SU	0	dB

2TX

Total PSD = ANT1 Meas PSD + ANT2 Meas PSD + Duty Cycle CF

Channel	Frequency [MHz]	Tones	RU Offset	Meas PPSD [dBm/100kHz]		Total Corr'd PPSD [dBm/100kHz]	PPSD Limit [dBm/3kHz]	Margin [dB]
				ANT1	ANT2			
1	2412	26T	0	3.21	3.07	6.15	8.00	-1.85
			4	4.24	3.31	6.81		-1.19
			8	3.70	3.33	6.53		-1.47
		SU	-	-6.77	-6.94	-3.84		-11.84
2	2417	26T	0	2.36	2.15	5.27	8.00	-2.73
			4	3.18	3.17	6.18		-1.82
			8	2.98	2.84	5.92		-2.08
		SU	-	-4.90	-4.95	-1.91		-9.91
6	2437	26T	0	3.18	2.94	6.07	8.00	-1.93
			4	3.92	3.84	6.89		-1.11
			8	3.75	3.32	6.55		-1.45
		SU	-	-1.74	-2.02	1.13		-6.87
10	2457	26T	0	2.14	2.39	5.28	8.00	-2.72
			4	2.90	3.03	5.98		-2.02
			8	2.95	3.03	6.00		-2.00
		SU	-	-3.94	-4.33	-1.12		-9.12
11	2462	26T	0	2.54	2.25	5.41	8.00	-2.59
			4	3.42	3.42	6.43		-1.57
			8	3.13	3.28	6.22		-1.78
		SU	-	-9.11	-8.92	-6.00		-14.00

10.3.2. 802.11ax HE40 MIMO MODE IN THE 2.4 GHz BAND

Included in Calculations of Corr'd Power				
Duty Cycle CF	HE40	26T	0	dB
		SU	0	dB

2TX

Total PSD = ANT1 Meas PSD + ANT2 Meas PSD + Duty Cycle CF

Channel	Frequency [MHz]	Tones	RU Offset	Meas PPSP [dBm/100kHz]		Total Corr'd PPSP [dBm/100kHz]	PPSP Limit [dBm/3kHz]	Margin [dB]
				ANT1	ANT2			
3	2422	26T	0	-1.30	-1.71	1.51	8.00	-6.49
			9	-1.02	-1.43	1.79		-6.21
			17	-0.54	-1.23	2.14		-5.86
		SU	-	-12.66	-13.33	-9.97		-17.97
6	2437	26T	0	3.69	3.30	6.51	8.00	-1.49
			9	3.53	2.89	6.23		-1.77
			17	4.18	3.27	6.76		-1.24
		SU	-	-4.91	-5.81	-2.32		-10.32
9	2452	26T	0	-2.22	-2.23	0.79	8.00	-7.21
			9	-2.17	-2.74	0.57		-7.43
			17	-1.97	-2.72	0.68		-7.32
		SU	-	-14.35	-14.79	-11.55		-19.55

10.4. OUT-OF-BAND EMISSIONS

LIMITS

FCC §15.247 (d)

Output power was measured based on the use of average measurement, therefore the required attenuation is 30 dB.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.


RESULTS

- Please refer to the next page


10.4.1. 802.11ax HE20 MODE IN THE 2.4 GHz BAND

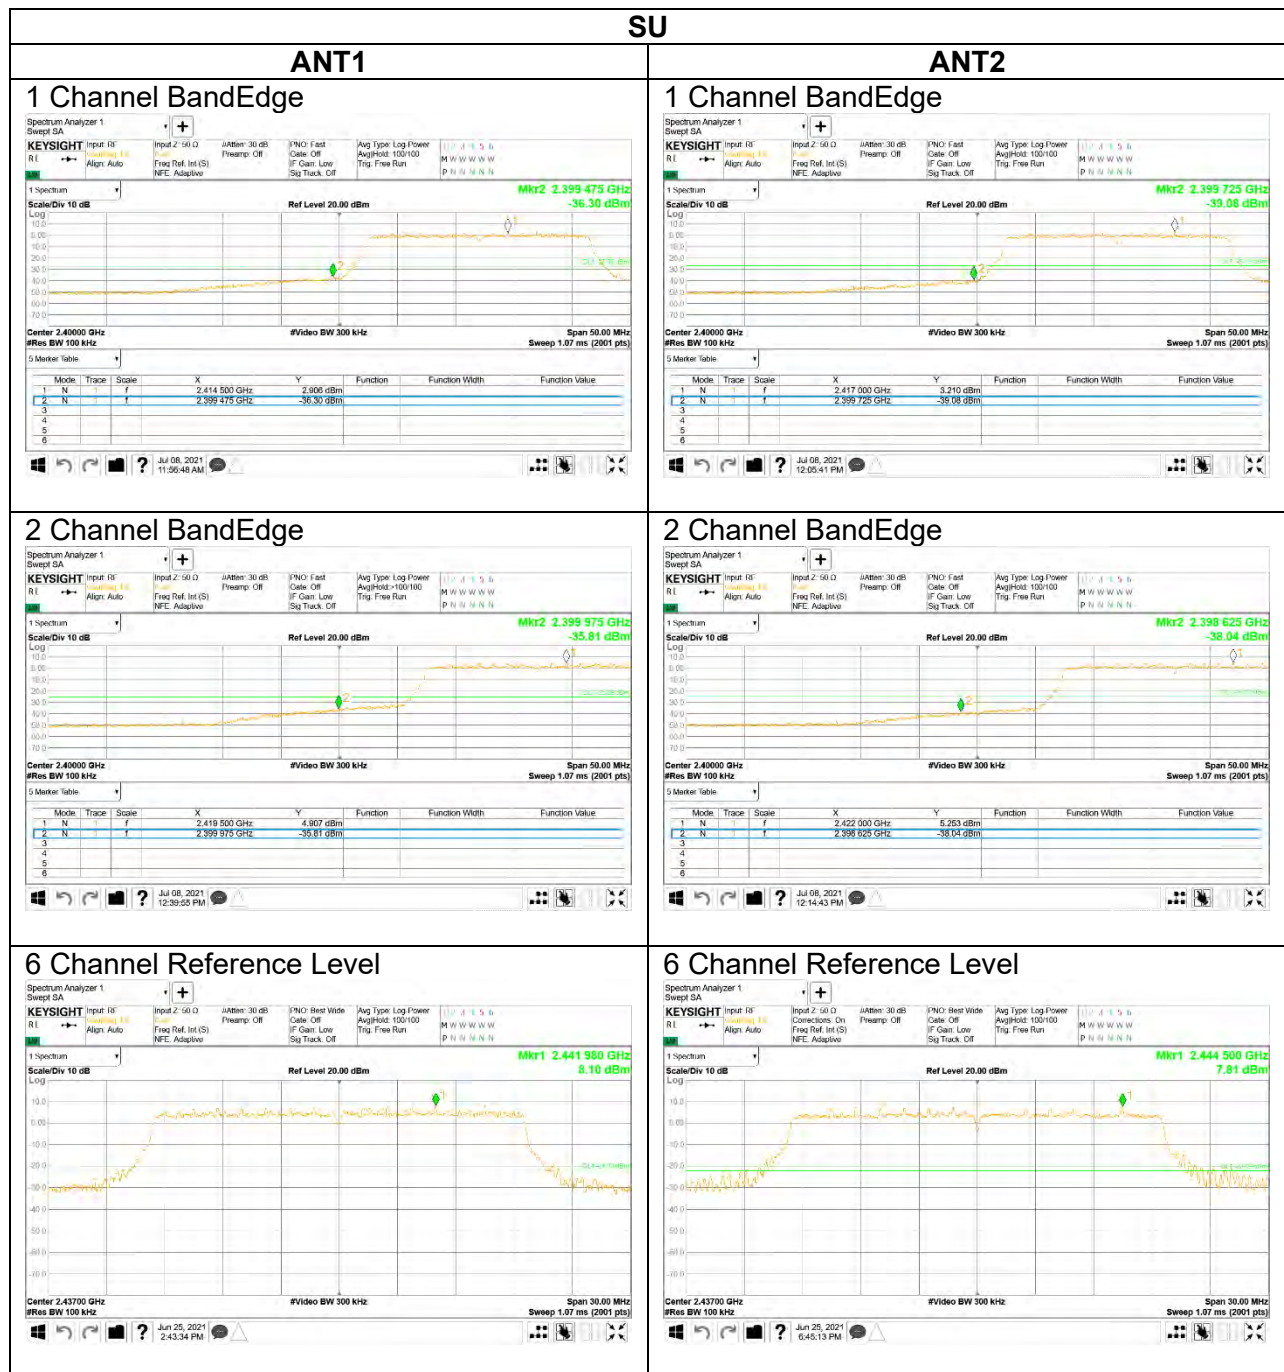


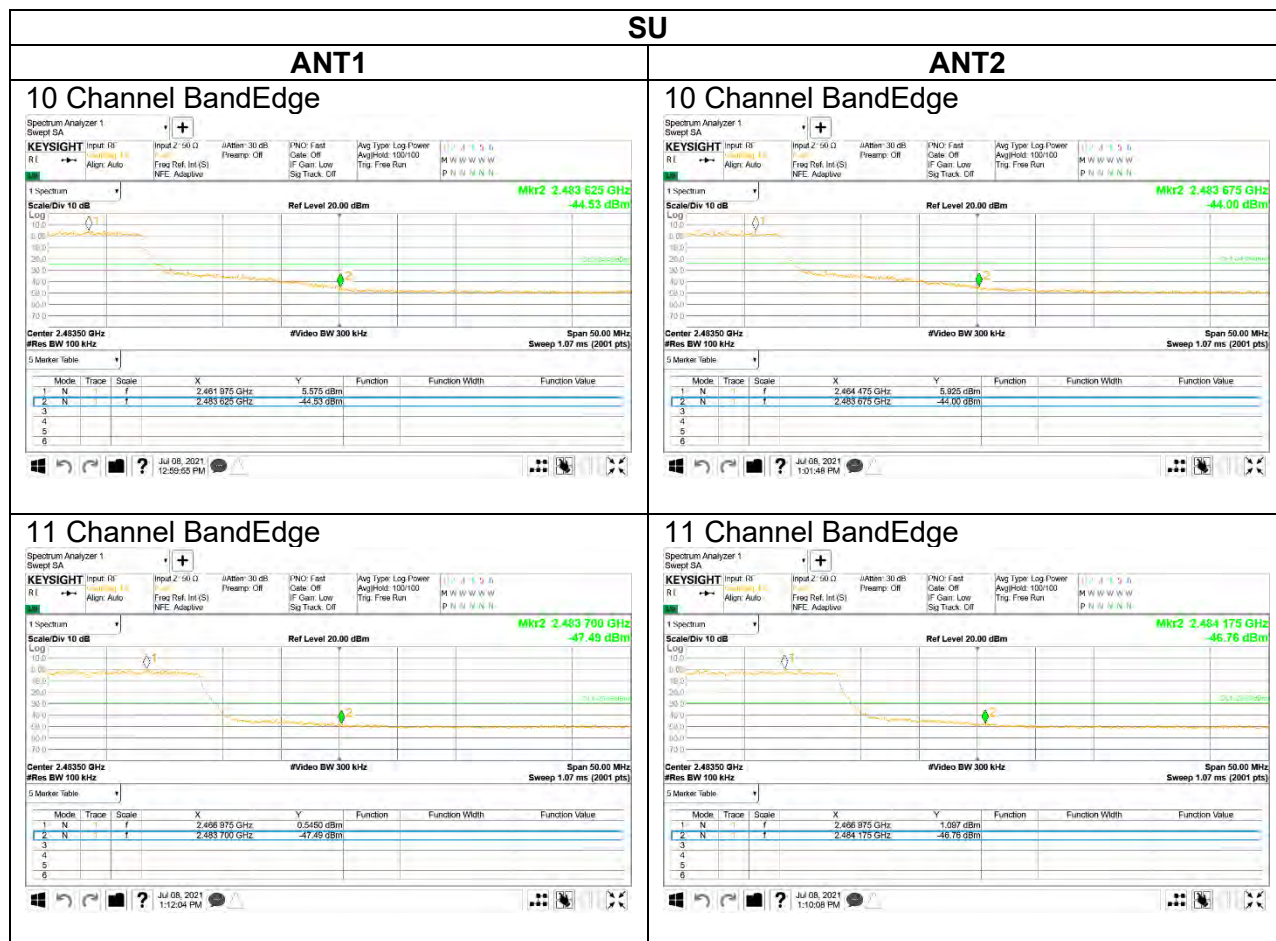

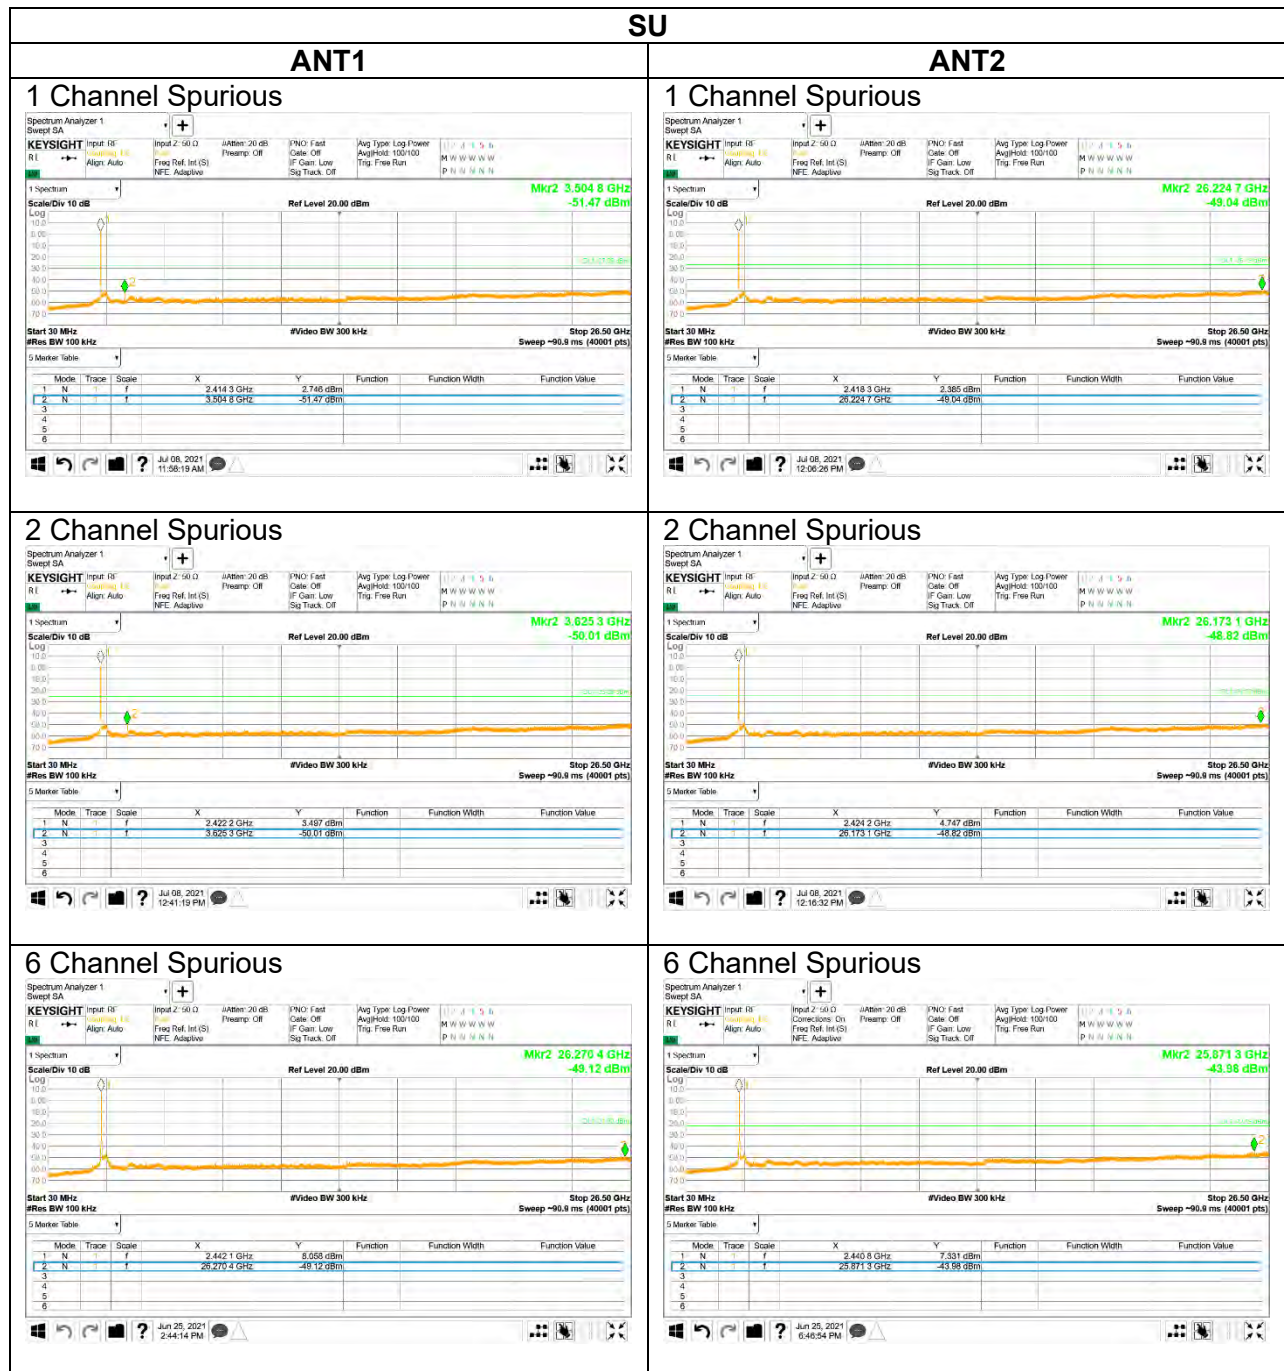





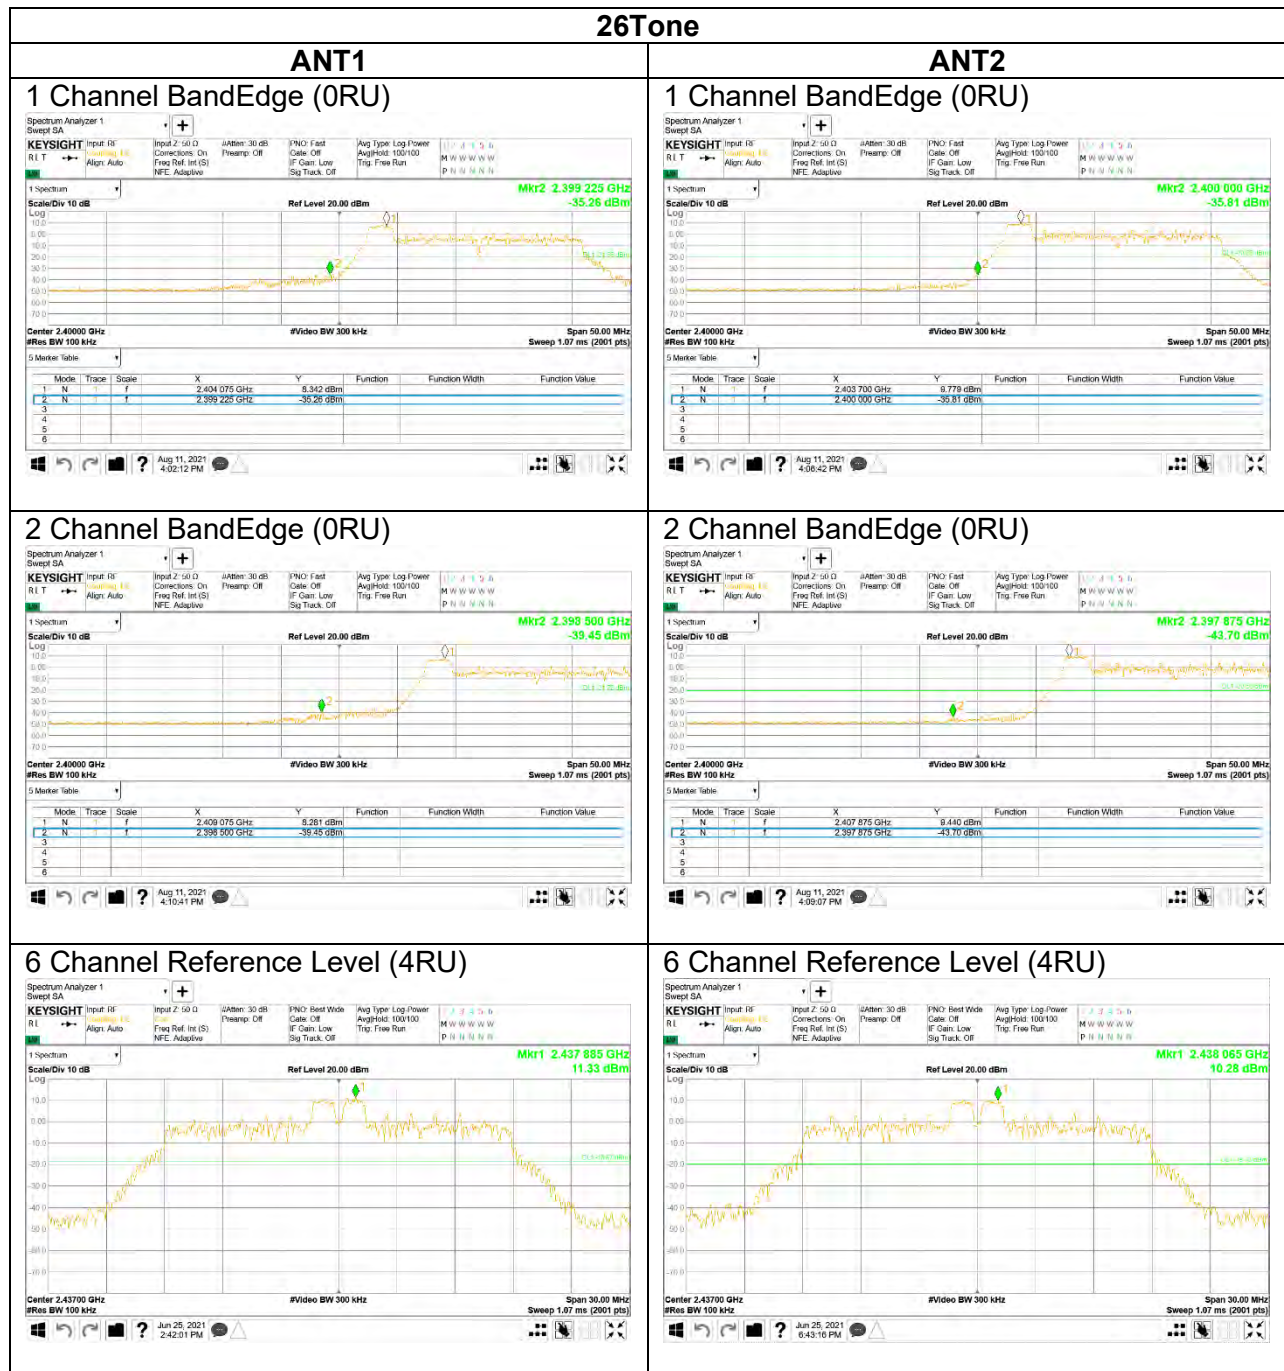

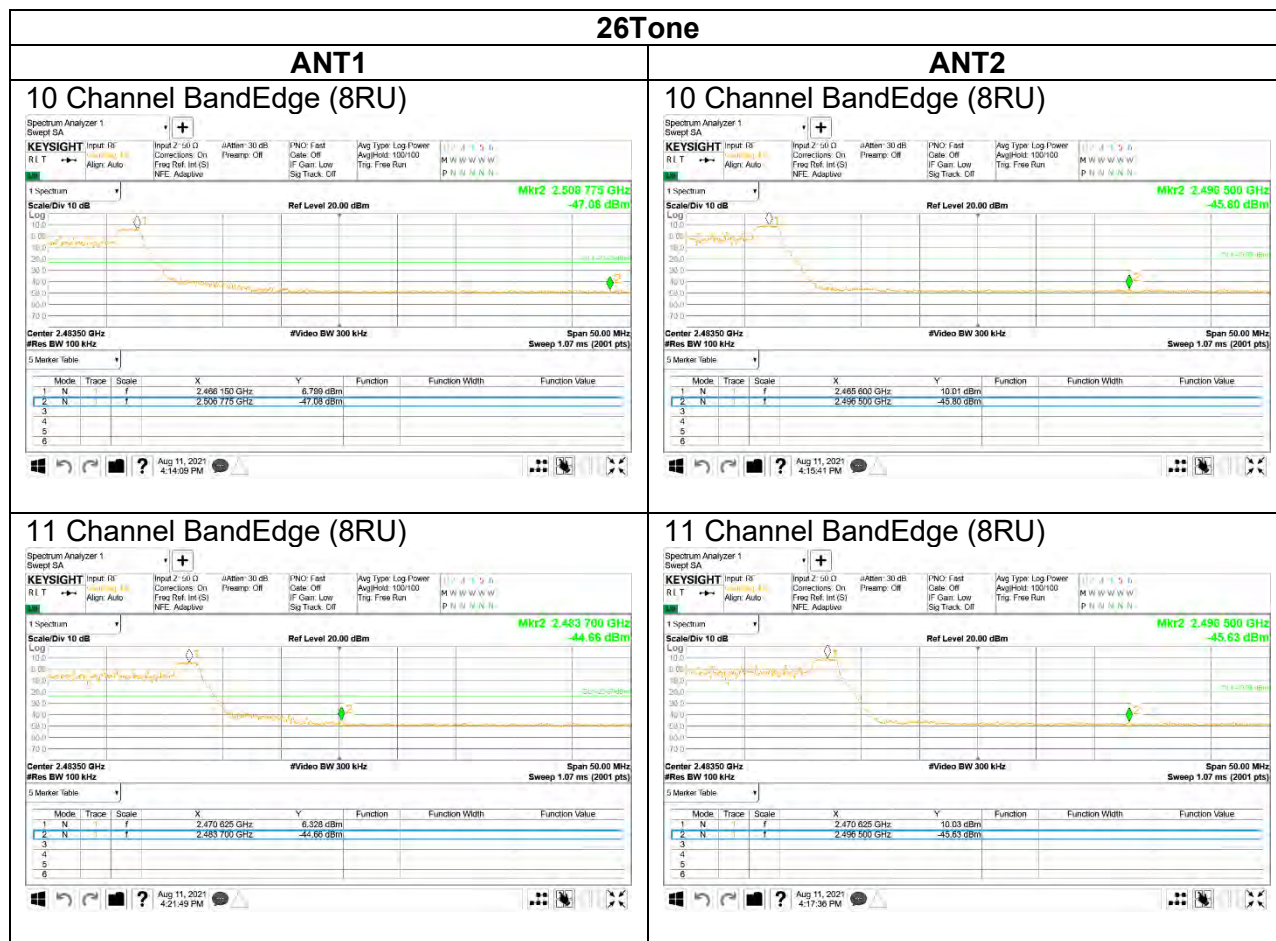



26Tone

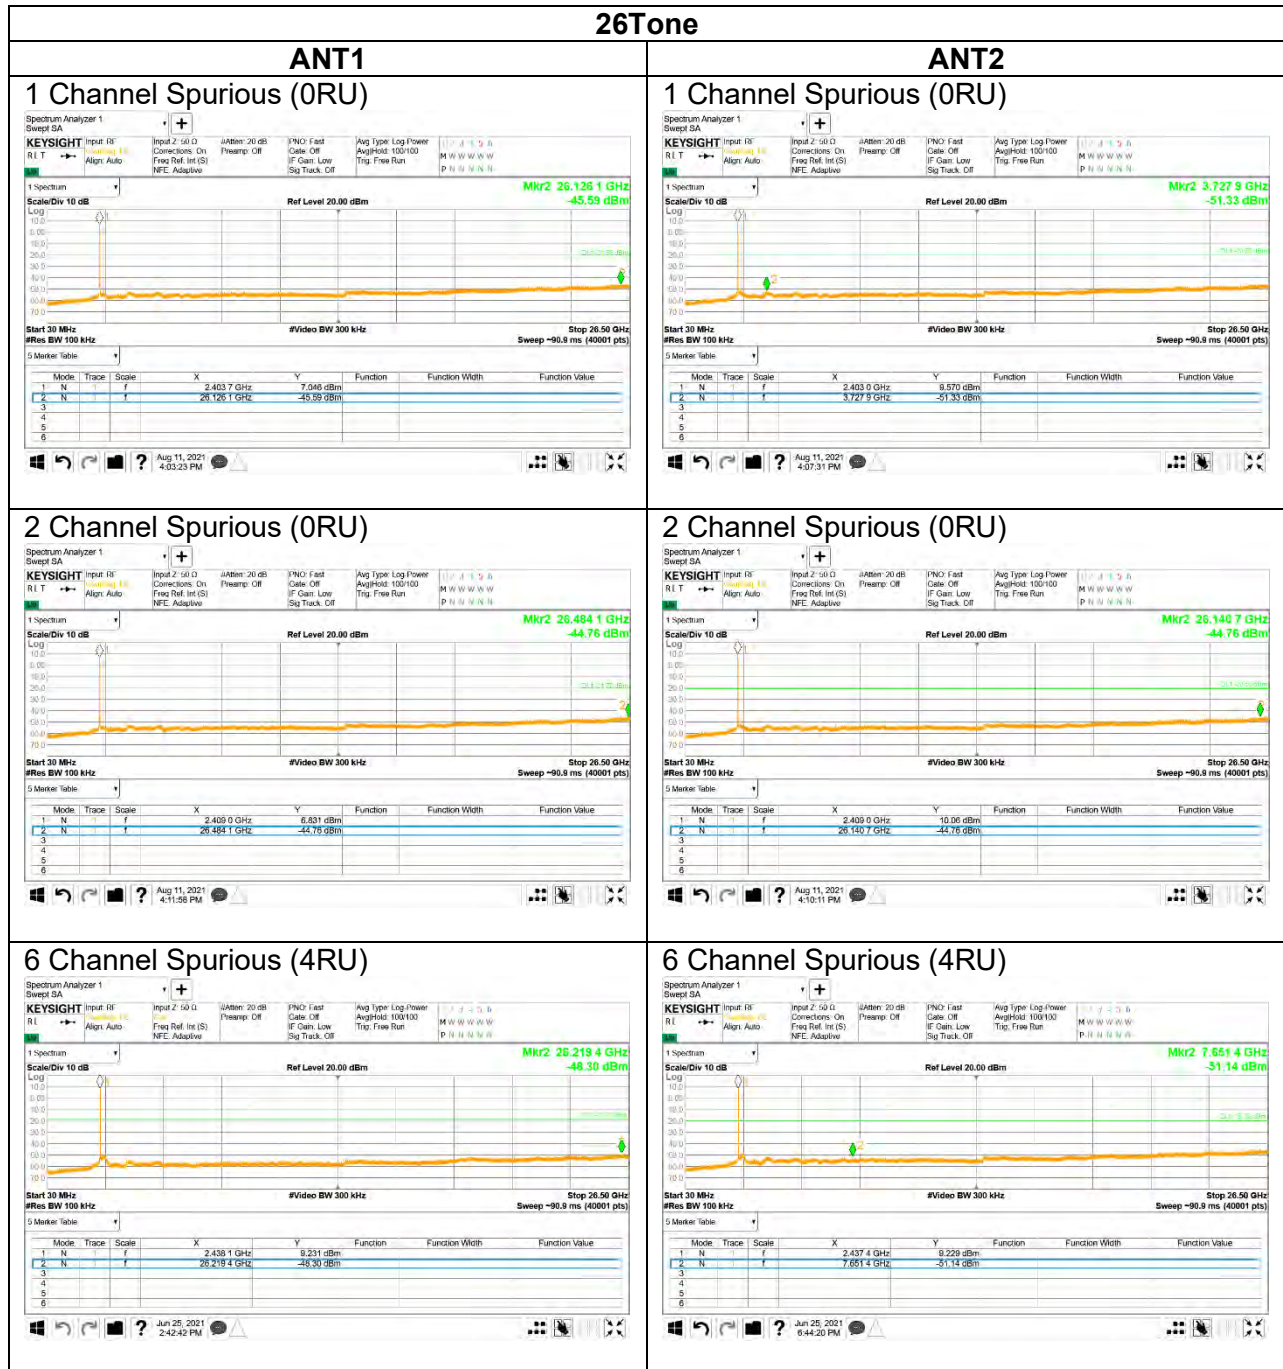

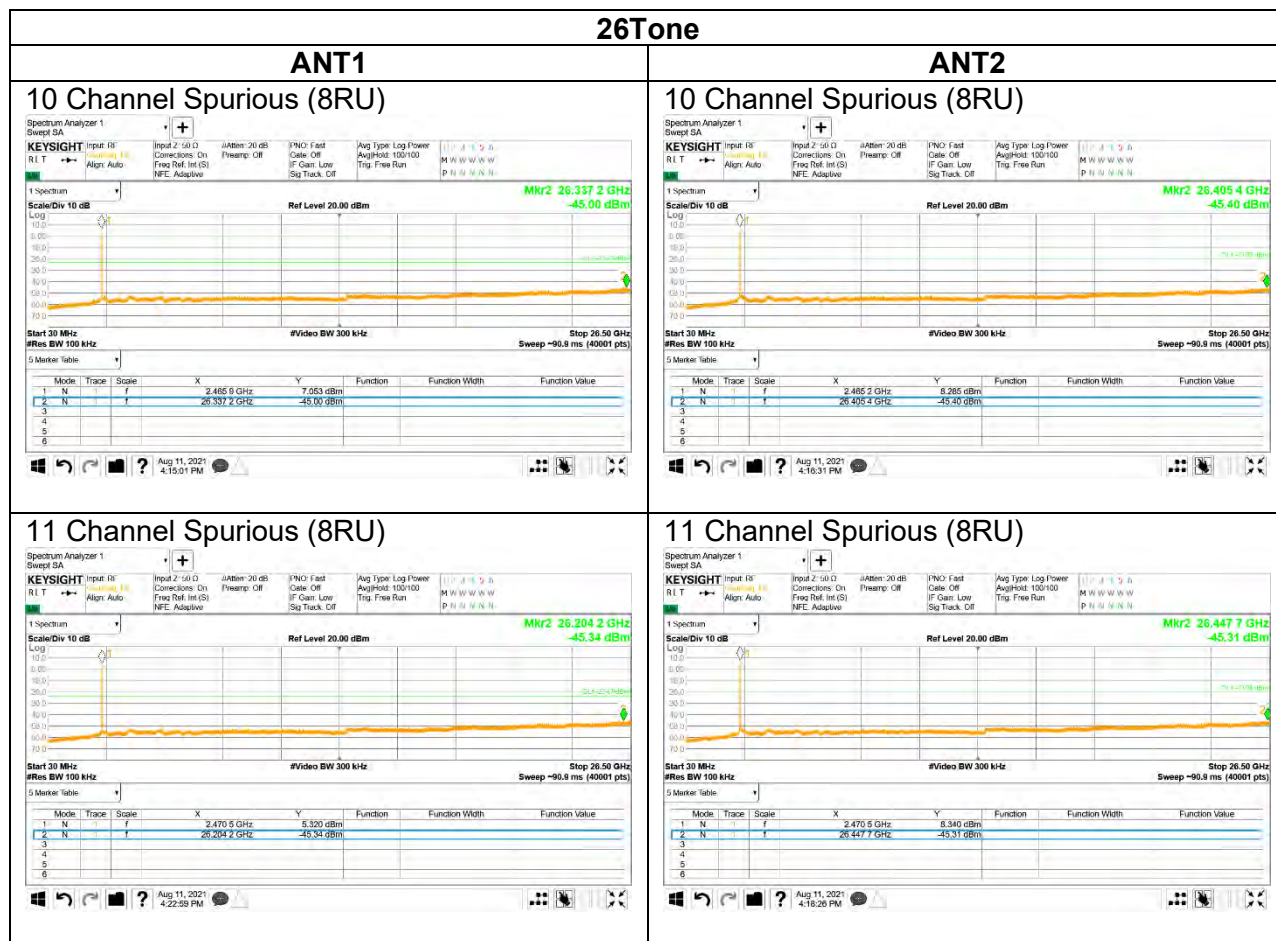

10.4.2. 802.11ax HE40 MODE IN THE 2.4 GHz BAND

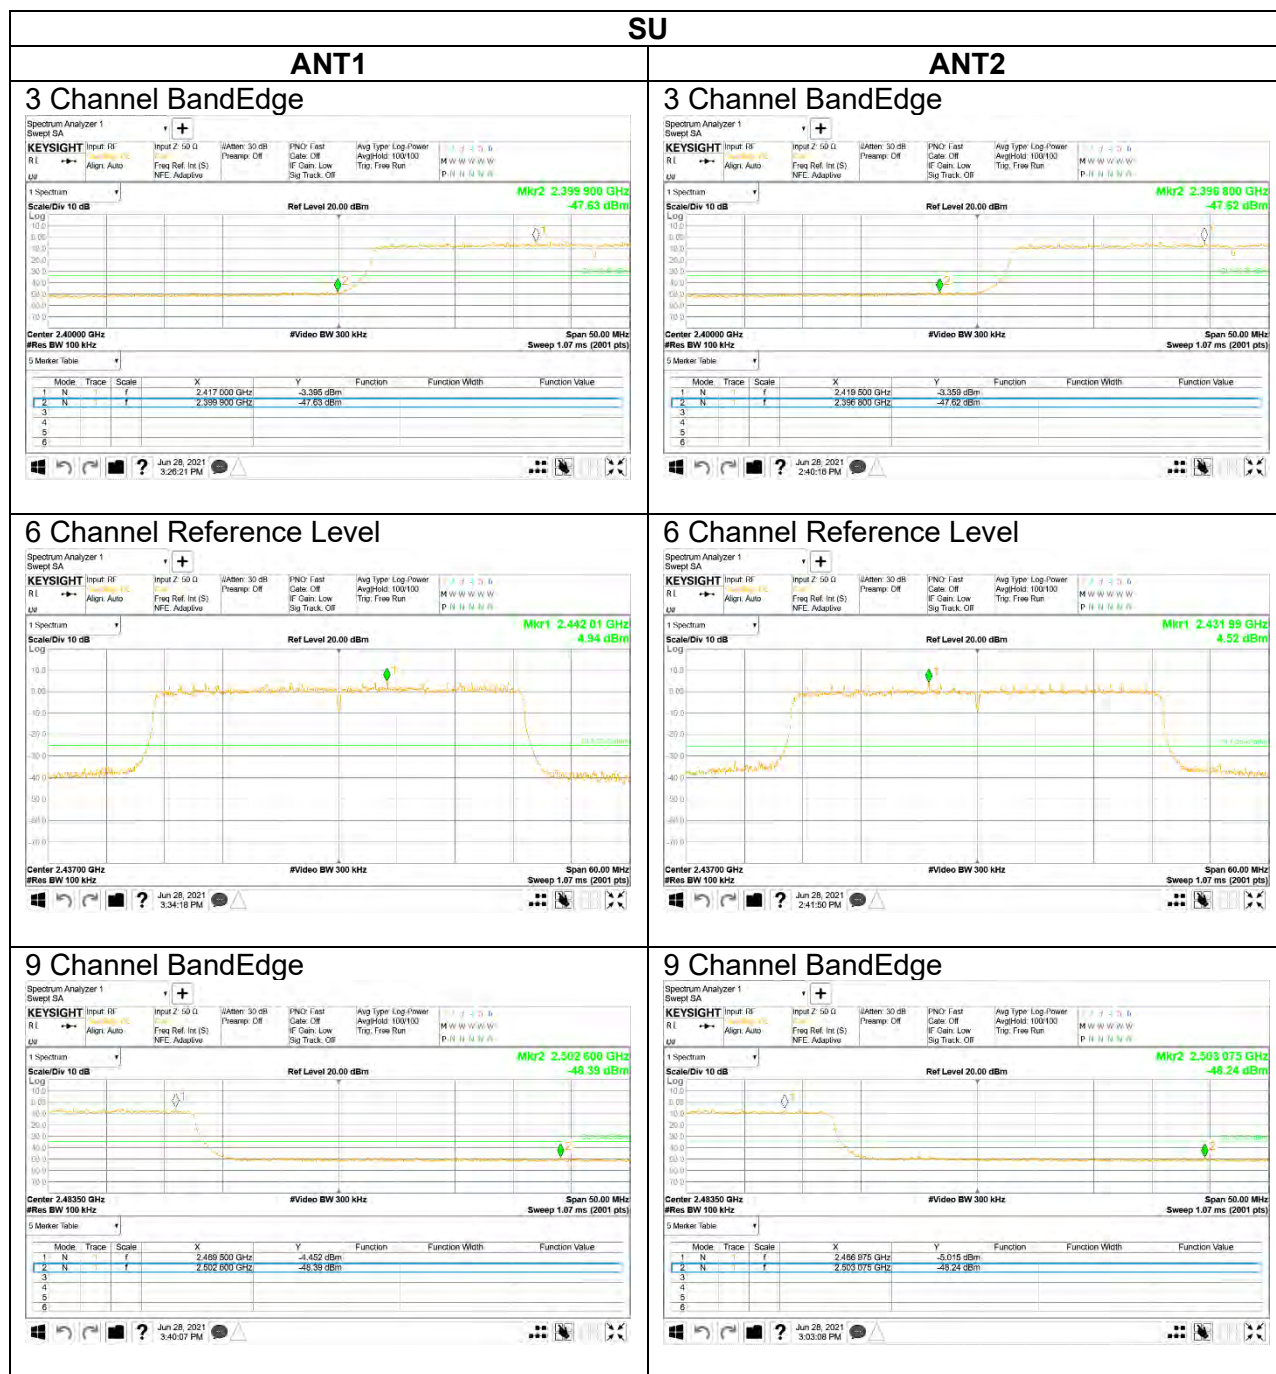


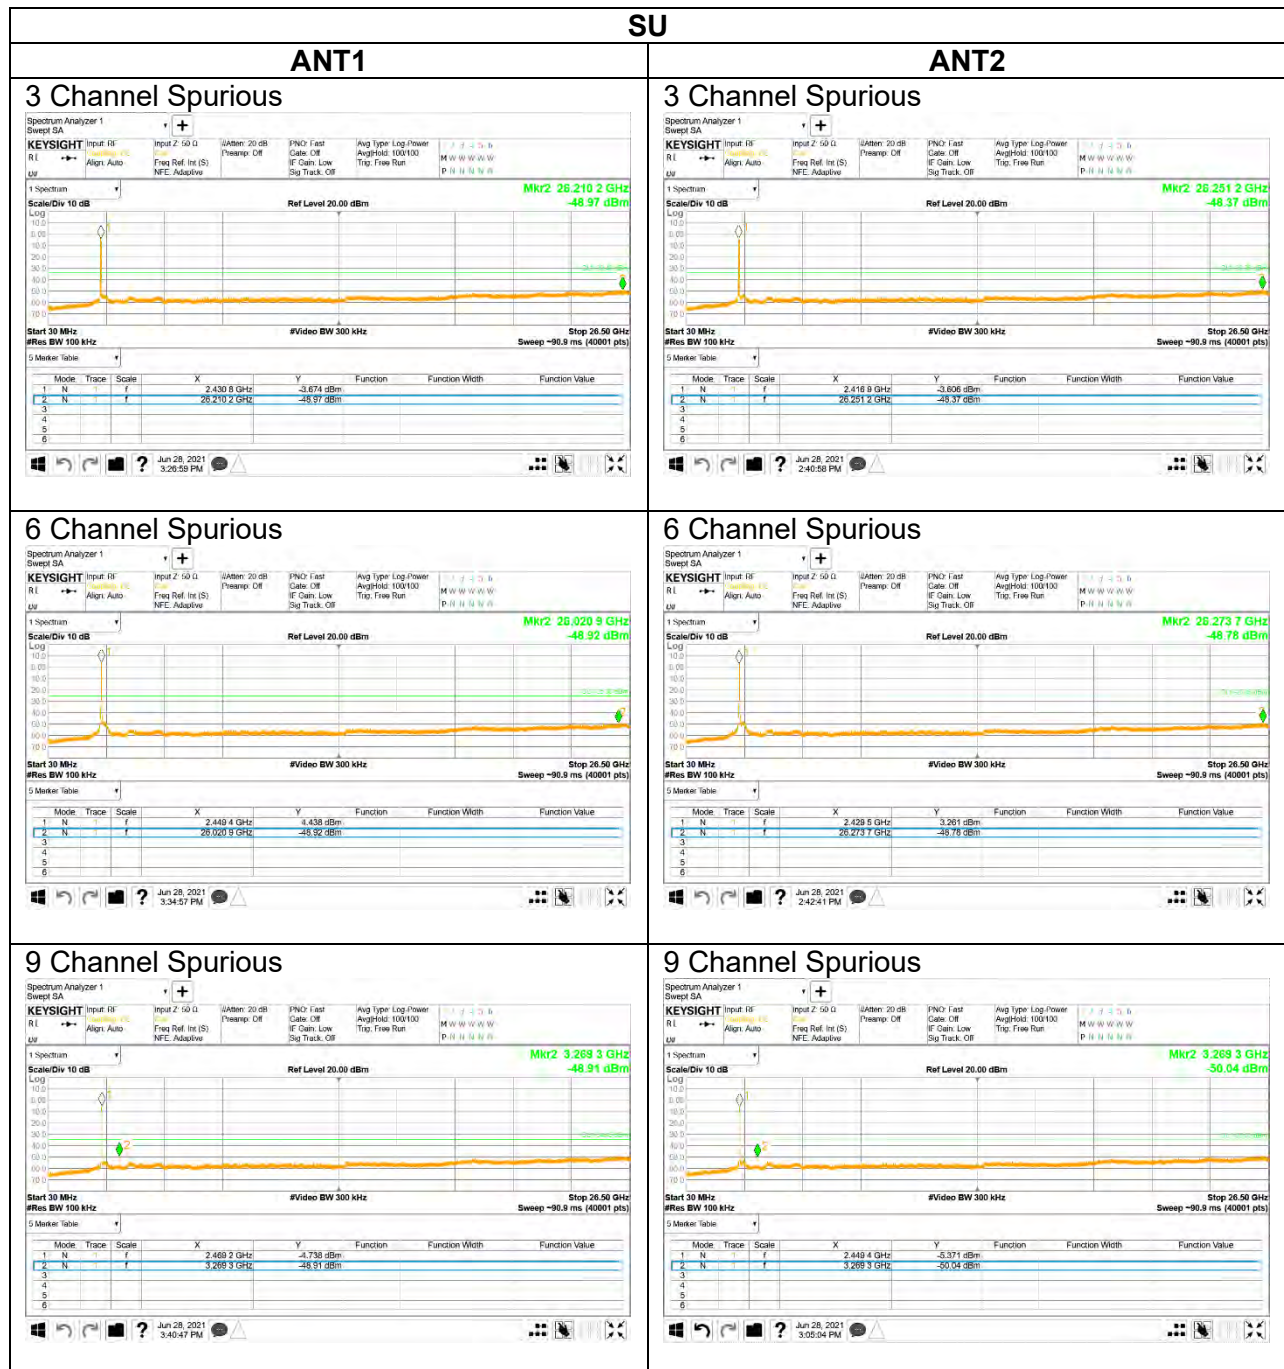

26Tone


ANT1

3 Channel BandEdge (0RU)

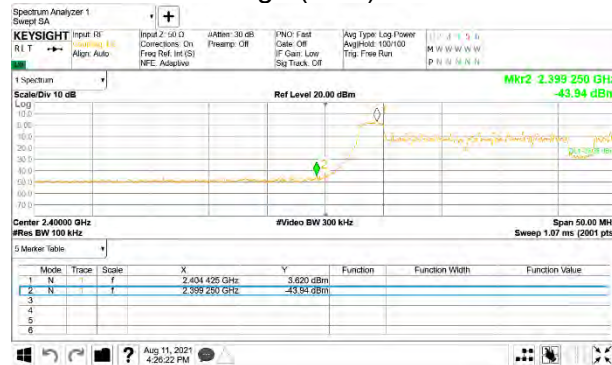

ANT2

3 Channel BandEdge (0RU)

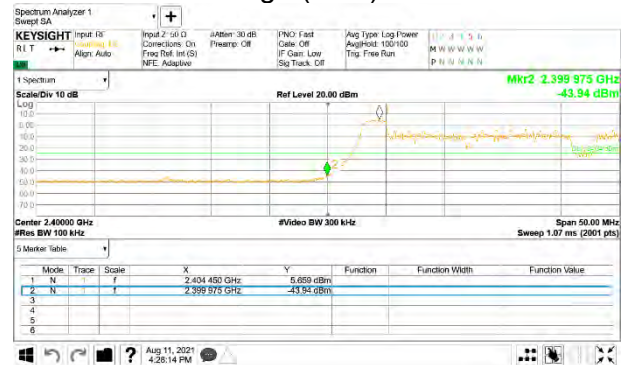


6 Channel Reference Level (9RU)




6 Channel Reference Level (9RU)



9 Channel BandEdge (17RU)

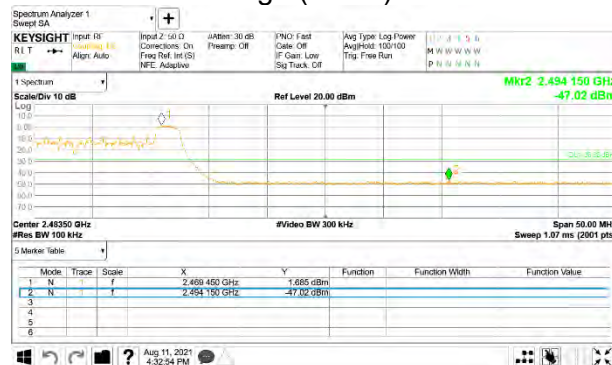


9 Channel BandEdge (17RU)

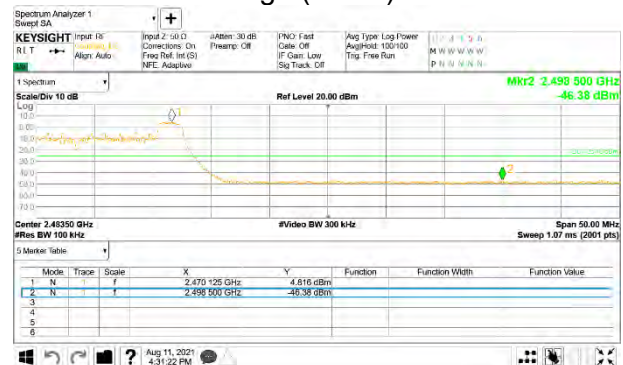

26Tone


ANT1

3 Channel Spurious (0RU)

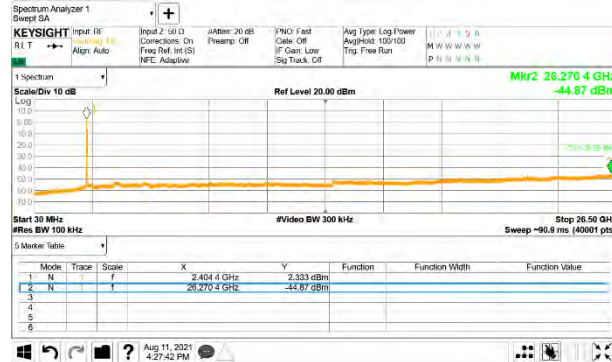


ANT2


3 Channel Spurious (0RU)

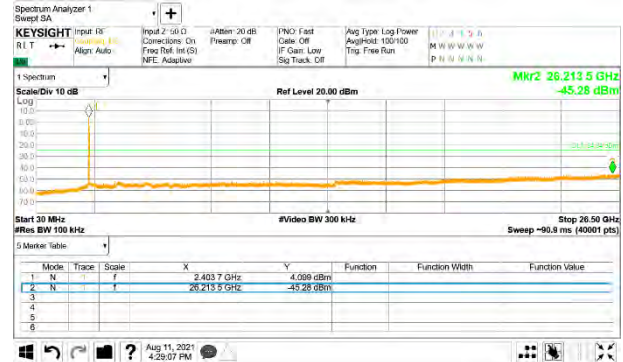


6 Channel Spurious (9RU)

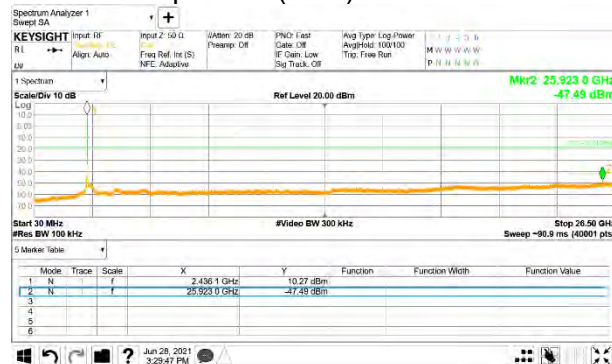


6 Channel Spurious (9RU)

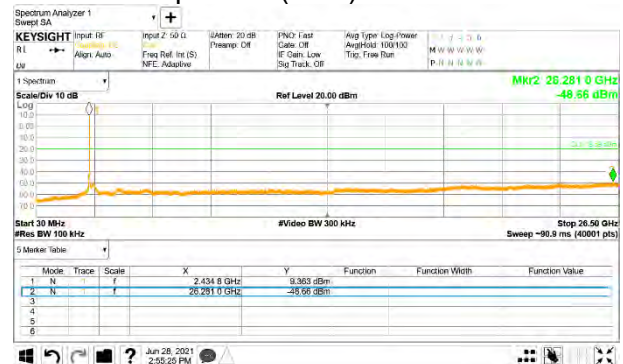

9 Channel Spurious (17RU)

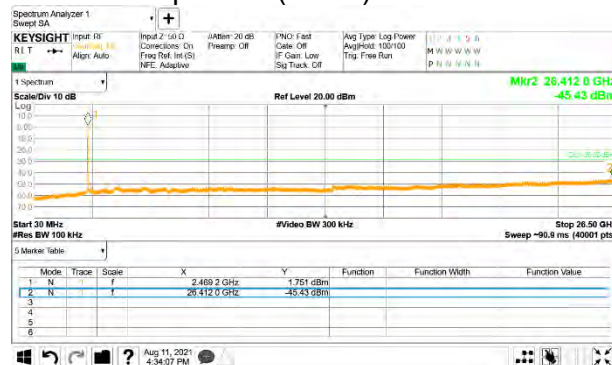

9 Channel Spurious (17RU)

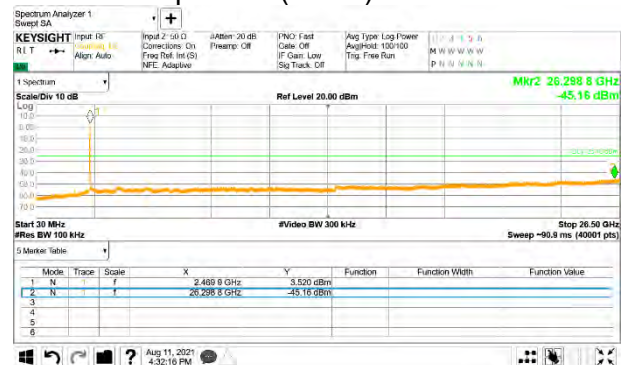

11. RADIATED TEST RESULTS

LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

FCC Part 15.205 (a) : Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~ 156.52525	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.7 ~ 156.9	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	162.0125 ~ 167.17	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	167.72 ~ 173.2	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	240 ~ 285	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	322 ~ 335.4	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	399.90 ~ 410	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	608 ~ 614	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	960 ~ 1240	3345.8 ~ 3358		
			3600 ~ 4400		

▪ FCC Part 15.205(b) : The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1 GHz and 150 cm for above 1 GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. (Restricted bandedge, Final detection of spurious harmonic emissions)

Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

The spectrum from 1 GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


Note : Emission was pre-scanned from 9 kHz to 30 MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).
Per FCC part 15.31(o), test results were not reported.

Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open field test site.
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.

11.1. TRANSMITTER ABOVE 1 GHz

BANDEDGE (WORST CASE: 802.11ax HE40_MIMO_CH 9)

VERTICAL Result

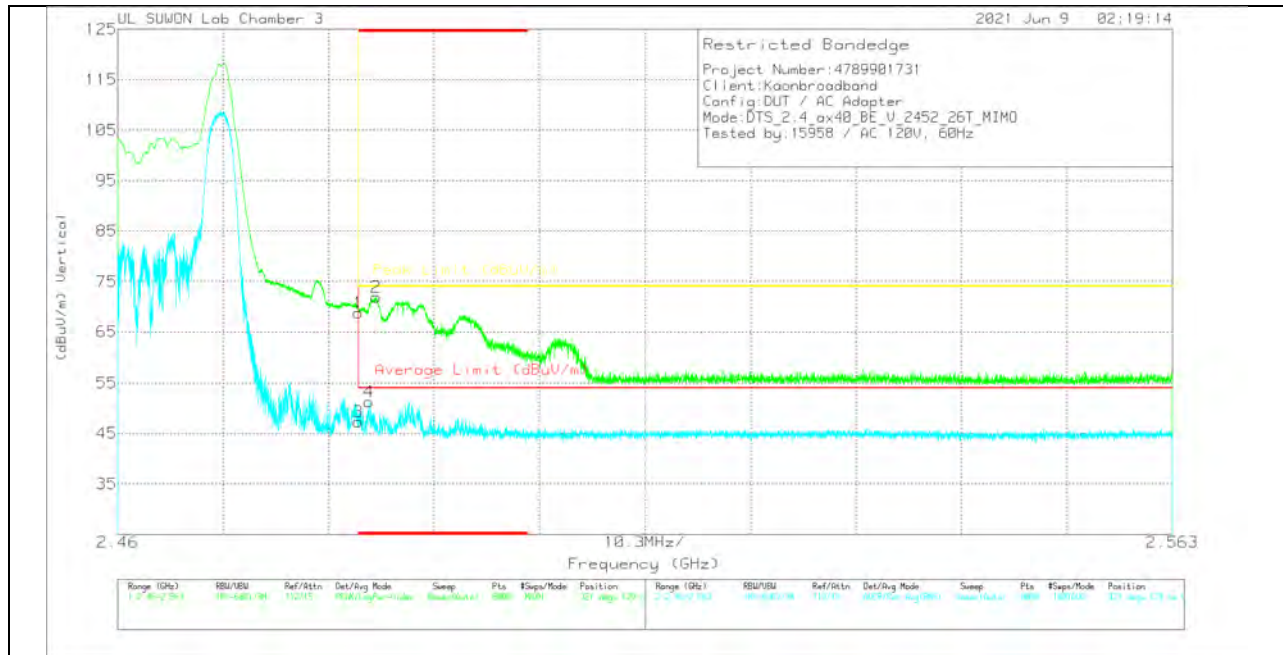

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	60.87	Pk	32.9	-25	68.77	-	-	74	-5.23	321	129	V
2	* 2.48524	64.02	Pk	32.9	-25	71.92	-	-	74	-2.08	321	129	V
3	* 2.4835	39.37	RMS	32.9	-25	47.27	54	-6.73	-	-	321	129	V
4	* 2.48453	43.36	RMS	32.9	-25	51.26	54	-2.74	-	-	321	129	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE TEST DATA

802.11ax(HE20)

Freq. [MHz]	Tone / RU	Antenna	Frequency [GHz]	Reading [dBuV]	Detector Mode	ANT Factor	Loss [dB]	DC Corr [dB]	Result [dBuV/m]	AV Limit [dBuV/m]	AV Margin [dB]	PK Limit [dBuV/m]	PK Margin [dB]	Azimuth [Degs]	Height [cm]	Polarity
2412	26T / 0 RU	MIMO	* 2.39	52.77	Pk	32.80	-25.20	0	60.37	-	-	74.00	-13.63	205	169	H
			* 2.38989	53.92	Pk	32.80	-25.20	0	61.52	-	-	74.00	-12.48	205	169	H
			* 2.39	34.62	RMS	32.80	-25.20	0	42.22	54.00	-11.78	-	-	205	169	H
			* 2.3899	35.36	RMS	32.80	-25.20	0	42.96	54.00	-11.04	-	-	205	169	H
			* 2.39	56.02	Pk	32.80	-25.20	0	63.62	-	-	74.00	-10.38	295	188	V
			* 2.38988	56.85	Pk	32.80	-25.20	0	64.45	-	-	74.00	-9.55	295	188	V
			* 2.39	35.76	RMS	32.80	-25.20	0	43.36	54.00	-10.64	-	-	295	188	V
			* 2.38967	38.38	RMS	32.80	-25.20	0	45.98	54.00	-8.02	-	-	295	188	V
			* 2.39	44.76	Pk	32.80	-25.20	0	52.36	-	-	74.00	-21.64	206	170	H
			* 2.38771	47.84	Pk	32.80	-25.20	0	55.44	-	-	74.00	-18.56	206	170	H
2417	26T / 0 RU	MIMO	* 2.39	35.66	RMS	32.80	-25.20	0	43.26	54.00	-10.74	-	-	206	170	H
			* 2.38812	35.99	RMS	32.80	-25.20	0	43.59	54.00	-10.41	-	-	206	170	H
			* 2.39	49.14	Pk	32.80	-25.20	0	56.74	-	-	74.00	-17.26	314	187	V
			* 2.38918	52.48	Pk	32.80	-25.10	0	60.18	-	-	74.00	-13.82	314	187	V
			* 2.39	34.63	RMS	32.80	-25.20	0	42.23	54.00	-11.77	-	-	314	187	V
			* 2.38983	36.21	RMS	32.80	-25.20	0	43.81	54.00	-10.19	-	-	314	187	V
			* 2.4835	47.59	Pk	32.90	-25.00	0	55.49	-	-	74.00	-18.51	208	132	H
			* 2.48356	49.38	Pk	32.90	-25.00	0	57.28	-	-	74.00	-16.72	208	132	H
			* 2.4835	35.90	RMS	32.90	-25.00	0	43.80	54.00	-10.20	-	-	208	132	H
			* 2.4859	36.80	RMS	32.90	-25.00	0	44.70	54.00	-9.30	-	-	208	132	H
2457	26T / 8 RU	MIMO	* 2.4835	50.83	Pk	32.90	-25.00	0	58.73	-	-	74.00	-15.27	327	175	V
			* 2.48499	52.48	Pk	32.90	-25.00	0	60.38	-	-	74.00	-13.62	327	175	V
			* 2.4835	37.27	RMS	32.90	-25.00	0	45.17	54.00	-8.83	-	-	327	175	V
			* 2.48441	38.02	RMS	32.90	-25.00	0	45.92	54.00	-8.08	-	-	327	175	V
			* 2.4835	52.81	Pk	32.90	-25.00	0	60.71	-	-	74.00	-13.29	201	164	H
			* 2.48382	56.06	Pk	32.90	-25.00	0	63.96	-	-	74.00	-10.04	201	164	H
			* 2.4835	34.93	RMS	32.90	-25.00	0	42.83	54.00	-11.17	-	-	201	164	H
			* 2.48404	36.78	RMS	32.90	-25.00	0	44.68	54.00	-9.32	-	-	201	164	H
			* 2.4835	60.93	Pk	32.90	-25.00	0	68.83	-	-	74.00	-5.17	304	206	V
			* 2.48376	63.62	Pk	32.90	-25.00	0	71.52	-	-	74.00	-2.48	304	206	V
2462	26T / 8 RU	MIMO	* 2.4835	37.40	RMS	32.90	-25.00	0	45.30	54.00	-8.70	-	-	304	206	V
			* 2.48414	42.24	RMS	32.90	-25.00	0	50.14	54.00	-3.86	-	-	304	206	V

802.11ax(HE40)

Freq. [MHz]	Tone / RU	Antenna	Frequency [GHz]	Reading [dBuV]	Detector Mode	ANT Factor	Loss [dB]	DC Corr [dB]	Result [dBuV/m]	AV Limit [dBuV/m]	AV Margin [dB]	PK Limit [dBuV/m]	PK Margin [dB]	Azimuth [Degs]	Height [cm]	Polarity
2422	26T / 0 RU	MIMO	* 2.39	56.05	Pk	32.80	-25.20	0	63.65	-	-	74.00	-10.35	208	163	H
			* 2.38994	56.85	Pk	32.80	-25.20	0	64.45	-	-	74.00	-9.55	208	163	H
			* 2.39	37.19	RMS	32.80	-25.20	0	44.79	54.00	-9.21	-	-	208	163	H
			* 2.38993	36.17	RMS	32.80	-25.20	0	43.77	54.00	-10.23	-	-	208	163	H
			* 2.39	64.71	Pk	32.80	-25.20	0	72.31	-	-	74.00	-1.69	304	141	V
			* 2.38994	64.86	Pk	32.80	-25.20	0	72.46	-	-	74.00	-1.54	304	141	V
			* 2.39	44.15	RMS	32.80	-25.20	0	51.75	54.00	-2.25	-	-	304	141	V
			* 2.38973	42.49	RMS	32.80	-25.20	0	50.09	54.00	-3.91	-	-	304	141	V
			* 2.4835	56.29	Pk	32.90	-25.00	0	64.19	-	-	74.00	-9.81	192	185	H
			* 2.48507	58.05	Pk	32.90	-25.00	0	65.95	-	-	74.00	-8.05	192	185	H
2452	26T / 17 RU	MIMO	* 2.4835	36.89	RMS	32.90	-25.00	0	44.79	54.00	-9.21	-	-	192	185	H
			* 2.48429	39.52	RMS	32.90	-25.00	0	47.42	54.00	-6.58	-	-	192	185	H
			* 2.4835	60.87	Pk	32.90	-25.00	0	68.77	-	-	74.00	-5.23	321	129	V
			* 2.48524	64.02	Pk	32.90	-25.00	0	71.92	-	-	74.00	-2.08	321	129	V
			* 2.4835	39.37	RMS	32.90	-25.00	0	47.27	54.00	-6.73	-	-	321	129	V
			* 2.48453	43.36	RMS	32.90	-25.00	0	51.26	54.00	-2.74	-	-	321	129	V


Note1. Pk - Peak detector, RMS - RMS detector

Note2. * - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Note3. The test data for 26RU was only reported in this test report

HARMONICS AND SPURIOUS EMISSIONS(WORST CASE)

802.11ax HE40_MIMO_CH 9 HORIZONTAL

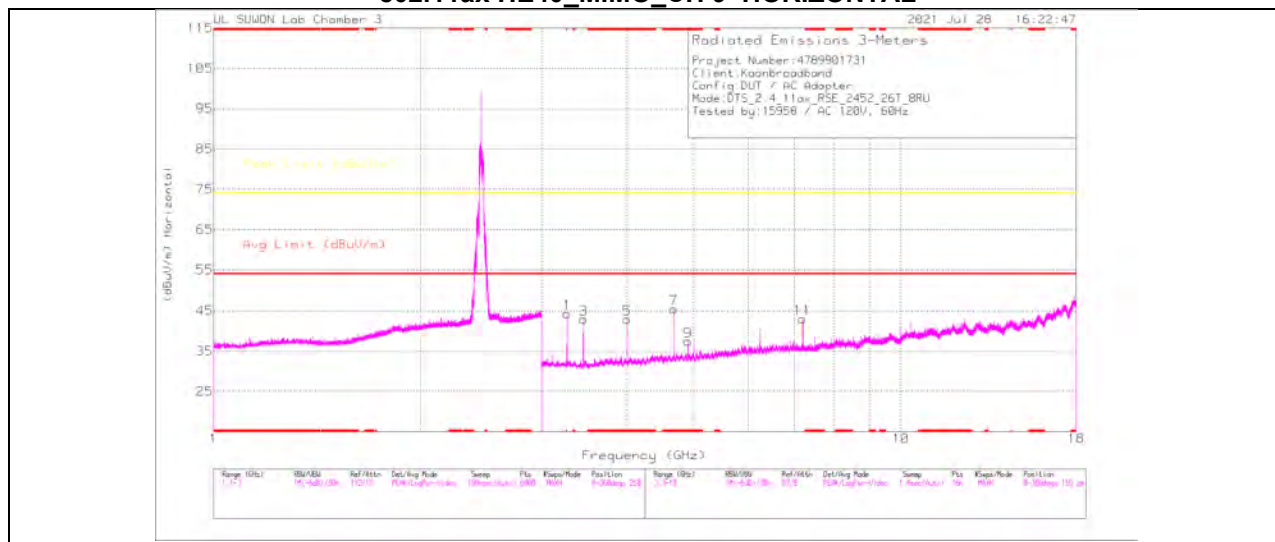

802.11ax HE40_MIMO_CH 9 VERTICAL

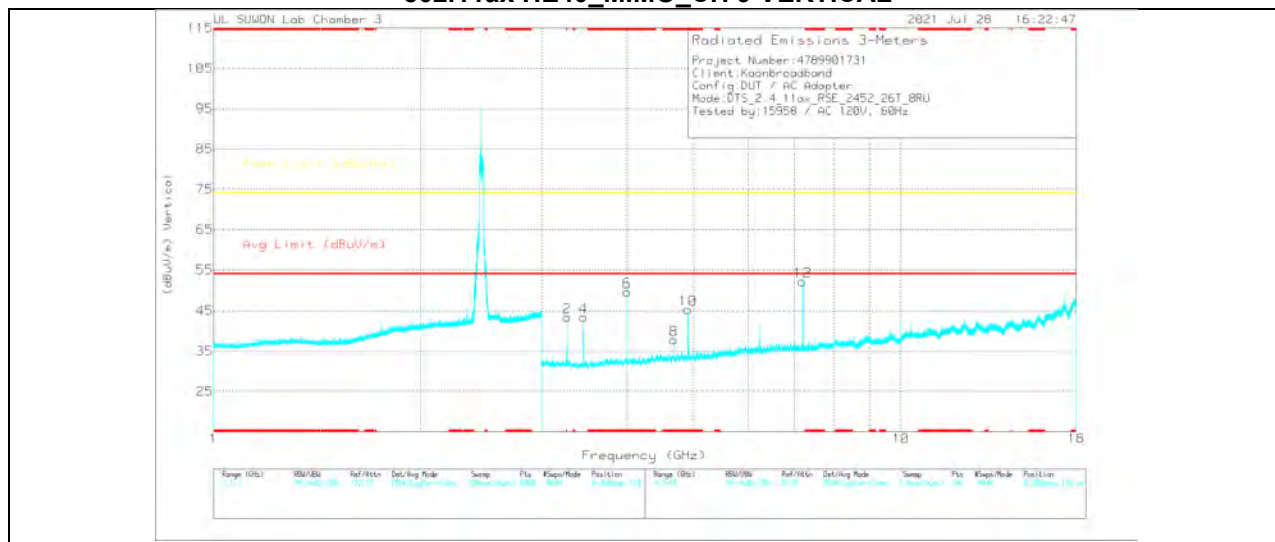

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

DATA

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0021895 7	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3.2693	46.08	PK2	33.4	-32.9	46.58	-	-	74	-27.42	351	172	H
* 3.99993	47.02	PK2	33.9	-31.3	49.62	-	-	74	-24.38	82	397	H
* 3.99996	43.22	MAV1	33.9	-31.3	45.82	54	-8.18	-	-	82	397	H
* 4.67585	45.8	PK2	34.5	-30.2	50.1	-	-	74	-23.9	344	291	H
* 4.67509	30.23	MAV1	34.5	-30.2	34.53	54	-19.47	-	-	344	291	H
* 4.90173	57.89	PK2	34.7	-31	61.59	-	-	74	-12.41	175	298	H
* 4.90111	45.03	MAV1	34.7	-30.9	48.83	54	-5.17	-	-	175	298	H
7.19992	39.41	PK2	36.1	-25.5	50.01	-	-	74	-23.99	20	331	H
* 11.46998	31.27	PK2	38.7	-21.2	48.77	-	-	74	-25.23	237	158	H
* 11.50718	20.43	MAV1	38.7	-21.2	37.93	54	-16.07	-	-	237	158	H
3.26936	45.33	PK2	33.4	-32.9	45.83	-	-	74	-28.17	37	229	V
* 4.00014	47.49	PK2	33.9	-31.3	50.09	-	-	74	-23.91	332	299	V
* 4	44.56	MAV1	33.9	-31.3	47.16	54	-6.84	-	-	332	299	V
* 4.67554	41.58	PK2	34.5	-30.2	45.88	-	-	74	-28.12	277	321	V
* 4.67514	29.7	MAV1	34.5	-30.2	34	54	-20	-	-	277	321	V
* 4.90223	48.47	PK2	34.7	-31	52.17	-	-	74	-21.83	342	177	V
* 4.90185	34.58	MAV1	34.7	-31	38.28	54	-15.72	-	-	342	177	V
7.20005	43.71	PK2	36.1	-25.5	54.31	-	-	74	-19.69	14	130	V
* 11.48349	31.75	PK2	38.7	-21.2	49.25	-	-	74	-24.75	81	129	V
* 11.50403	20.33	MAV1	38.7	-21.2	37.83	54	-16.17	-	-	81	129	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

Note: In the above emissions, frequencies other than harmonic are local oscillator generated during product operation regardless of RF transmission and were measured only in worst mode.

HARMONICS AND SPURIOUS EMISSIONS TEST DATA

802.11ax(HE20)-26RU mode

Freq. [MHz]	Tone / RU	Antenna	Frequency [GHz]	Reading [dBuV]	Detector Mode	ANT Factor	Loss [dB]	DC Corr [dB]	Result [dBuV/m]	AV Limit [dBuV/m]	AV Margin [dB]	PK Limit [dBuV/m]	PK Margin [dB]	Azimuth [Degs]	Height [cm]	Polarity
2412	26T / 4 RU	MIMO	* 4.82394	54.00	PK2	34.60	-30.30	0	58.30	-	-	74.00	-15.70	0	167	H
			* 4.82405	41.13	MAV1	34.60	-30.30	0	45.43	54.00	-8.57	-	-	0	167	H
			7.237	51.79	PK2	36.00	-25.60	0	62.19	-	-	74.00	-11.81	192	147	H
			* 4.82447	51.67	PK2	34.60	-30.30	0	55.97	-	-	74.00	-18.03	152	101	V
			* 4.82407	37.70	MAV1	34.60	-30.30	0	42.00	54.00	-12.00	-	-	152	101	V
			7.235	40.79	PK2	36.00	-25.60	0	51.19	-	-	74.00	-22.81	13	129	V
2417	26T / 4 RU	MIMO	* 4.83385	52.97	PK2	34.60	-30.40	0	57.17	-	-	74.00	-16.83	15	181	H
			* 4.83411	39.72	MAV1	34.60	-30.40	0	43.92	54.00	-10.08	-	-	15	181	H
			7.250	47.76	PK2	36.00	-25.50	0	58.26	-	-	74.00	-15.74	195	155	H
			7.250	33.45	MAV1	36.00	-25.40	0	44.05	-	-	-	-	195	155	H
			* 4.83433	48.55	PK2	34.60	-30.40	0	52.75	-	-	74.00	-21.25	148	362	V
			* 4.83429	35.37	MAV1	34.60	-30.40	0	39.57	54.00	-14.43	-	-	148	362	V
2437	26T / 4 RU	MIMO	7.250	37.95	PK2	36.00	-25.40	0	48.55	-	-	74.00	-25.45	41	351	V
			7.250	24.18	MAV1	36.00	-25.40	0	34.78	-	-	-	-	41	351	V
			* 4.87392	57.61	PK2	34.60	-30.80	0	61.41	-	-	74.00	-12.59	7	178	H
			* 4.87387	44.96	MAV1	34.60	-30.80	0	48.76	54.00	-5.24	-	-	7	178	H
			7.3119	53.68	PK2	36.00	-25.10	0	64.58	-	-	74.00	-9.42	188	150	H
			* 7.31178	38.14	MAV1	36.00	-25.10	0	49.04	54.00	-4.96	-	-	188	150	H
2457	26T / 8 RU	MIMO	* 4.87401	50.89	PK2	34.60	-30.80	0	54.69	-	-	74.00	-19.31	133	389	V
			* 4.87407	37.73	MAV1	34.60	-30.80	0	41.53	54.00	-12.47	-	-	133	389	V
			* 7.31085	37.82	PK2	36.00	-25.10	0	48.72	-	-	74.00	-25.28	334	103	V
			* 7.311	29.07	MAV1	36.00	-25.10	0	39.97	54.00	-14.03	-	-	334	103	V
			* 4.9316	57.09	PK2	34.70	-30.90	0	60.89	-	-	74.00	-13.11	175	296	H
			* 4.93124	42.95	MAV1	34.70	-30.90	0	46.75	54.00	-7.25	-	-	175	296	H
2462	26T / 4 RU	MIMO	* 7.396	51.24	PK2	36.00	-24.40	0	62.84	-	-	74.00	-11.16	201	143	H
			* 7.3963	36.07	MAV1	36.00	-24.40	0	47.67	54.00	-6.33	-	-	201	143	H
			* 4.93191	49.52	PK2	34.70	-30.90	0	53.32	-	-	74.00	-20.68	194	155	V
			* 4.93177	34.97	MAV1	34.70	-30.90	0	38.77	54.00	-15.23	-	-	194	155	V
			* 7.39759	41.44	PK2	36.00	-24.30	0	53.14	-	-	74.00	-20.86	182	192	V
			* 7.39507	25.61	MAV1	36.00	-24.40	0	37.21	54.00	-16.79	-	-	182	192	V
2462	26T / 4 RU	MIMO	* 4.92389	57.28	PK2	34.70	-30.90	0	61.08	-	-	74.00	-12.92	155	281	H
			* 4.92411	44.18	MAV1	34.70	-30.90	0	47.98	54.00	-6.02	-	-	155	281	H
			* 7.38688	53.18	PK2	36.00	-24.40	0	64.78	-	-	74.00	-9.22	188	162	H
			* 7.38662	38.32	MAV1	36.00	-24.40	0	49.92	54.00	-4.08	-	-	188	162	H
			* 4.92389	53.69	PK2	34.70	-30.90	0	57.49	-	-	74.00	-16.51	123	395	V
			* 4.9239	40.35	MAV1	34.70	-30.90	0	44.15	54.00	-9.85	-	-	123	395	V
2462	26T / 4 RU	MIMO	* 7.38699	44.26	PK2	36.00	-24.40	0	55.86	-	-	74.00	-18.14	39	264	V
			* 7.38666	29.14	MAV1	36.00	-24.40	0	40.74	54.00	-13.26	-	-	39	264	V

802.11ax(HE40)-26RU mode

Freq. [MHz]	Tone / RU	Antenna	Frequency [GHz]	Reading [dBuV]	Detector Mode	ANT Factor	Loss [dB]	DC Corr [dB]	Result [dBuV/m]	AV Limit [dBuV/m]	AV Margin [dB]	PK Limit [dBuV/m]	PK Margin [dB]	Azimuth [Degs]	Height [cm]	Polarity
2422	26T / 9 RU	MIMO	* 4.8417	55.53	PK2	34.60	-30.40	0	59.73	-	-	74.00	-14.27	360	180	H
			* 4.84116	42.92	MAV1	34.60	-30.40	0	47.12	54.00	-6.88	-	-	360	180	H
			* 7.26384	49.43	PK2	36.00	-25.30	0	60.13	-	-	74.00	-13.87	179	157	H
			* 7.26256	33.57	MAV1	36.00	-25.30	0	44.27	54.00	-9.73	-	-	179	157	H
			* 4.84165	51.80	PK2	34.60	-30.40	0	56.00	-	-	74.00	-18.00	139	115	V
			* 4.84177	38.32	MAV1	34.60	-30.40	0	42.52	54.00	-11.48	-	-	139	115	V
2437	26T / 9 RU	MIMO	* 7.26282	37.74	PK2	36.00	-25.30	0	48.44	-	-	74.00	-25.56	330	103	V
			* 7.26606	27.36	MAV1	36.00	-25.40	0	37.96	54.00	-16.04	-	-	330	103	V
			* 4.87169	57.92	PK2	34.60	-30.70	0	61.82	-	-	74.00	-12.18	4	192	H
			* 4.87123	44.43	MAV1	34.60	-30.70	0	48.33	54.00	-5.67	-	-	4	192	H
			* 7.30757	53.33	PK2	36.00	-25.20	0	64.13	-	-	74.00	-9.87	182	156	H
			* 7.30649	38.81	MAV1	36.00	-25.30	0	49.51	54.00	-4.49	-	-	182	156	H
2452	26T / 9 RU	MIMO	* 4.87177	53.02	PK2	34.60	-30.70	0	56.92	-	-	74.00	-17.08	138	376	V
			* 4.87171	39.28	MAV1	34.60	-30.70	0	43.18	54.00	-10.82	-	-	138	376	V
			* 7.30761	44.43	PK2	36.00	-25.20	0	55.23	-	-	74.00	-18.77	207	385	V
			* 7.30725	30.24	MAV1	36.00	-25.20	0	41.04	54.00	-12.96	-	-	207	385	V
			* 4.90173	57.89	PK2	34.70	-31.00	0	61.59	-	-	74.00	-12.41	175	298	H
			* 4.90111	45.03	MAV1	34.70	-30.90	0	48.83	54.00	-5.17	-	-	175	298	H
2452	26T / 9 RU	MIMO	* 7.35251	54.20	PK2	36.00	-24.90	0	65.30	-	-	74.00	-8.70	183	164	H
			* 7.35223	40.52	MAV1	36.00	-24.90	0	51.62	54.00	-2.38	-	-	183	164	H
			* 4.90223	48.47	PK2	34.70	-31.00	0	62.17	-	-	74.00	-21.83	342	177	V
			* 4.90185	34.58	MAV1	34.70	-31.00	0	38.28	54.00	-15.72	-	-	342	177	V
			* 7.35165	46.33	PK2	36.00	-24.80	0	57.53	-	-	74.00	-16.47	269	378	V
			* 7.35183	32.27	MAV1	36.00	-24.80	0	43.47	54.00	-10.53	-	-	269	378	V

Note1. PK2 - KDB558074 Method: Maximum Peak / MAV1 - KDB558074 Option 1 Maximum RMS Average

Note2. * - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Note3. The test data for 26RU was only reported in this test report

11.2. Spurious Emissions for Simultaneous Transmission

11.2.1. Worst test case RSDB condition

Case 1 (2.4GHz WLAN SISO & 5GHz WLAN MIMO)

Case 1	2.4 GHz WLAN Antenna ANT2	5GHz WLAN Antenna ALL
Mode	802.11b	802.11a
Channel	11	157
Frequency[MHz]	2462	5785
Data Rate	1Mbps	6Mbps

Case 2 (2.4GHz WLAN MIMO & 5GHz WLAN MIMO)

Case 1	2.4 GHz WLAN Antenna ALL	5GHz WLAN Antenna ALL
Mode	802.11b	802.11a
Channel	1	157
Frequency[MHz]	2412	5785
Data Rate	1Mbps	6Mbps

11.2.1. Test Results

Please refer to the FCC Report UNII 802.11a_n_ac WLAN (Report No.: 4790309672-FR3)

11.3. WORST-CASE BELOW 1 GHz

RESULTS

WORST EMISSIONS

Please refer to the FCC Report DTS WLAN (Report No.: 4790309672-FR1)

12. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

WORST EMISSIONS


Please refer to the FCC Report DTS WLAN(Report No.: 4790309672-FR1)

APPENDIX A. SPOT CHECK DATA


➤ 6 dB BANDWIDTH

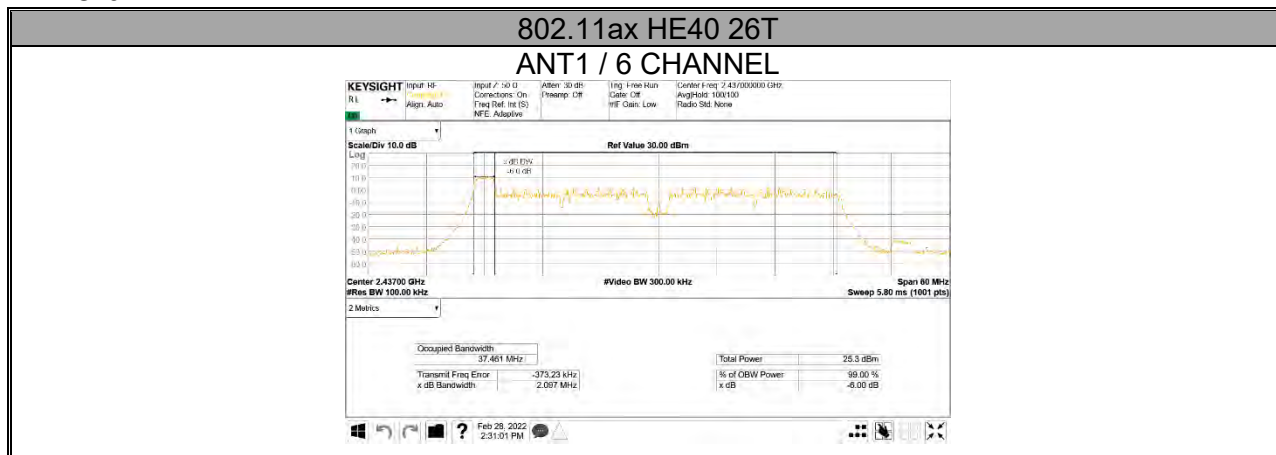


➤ PSD

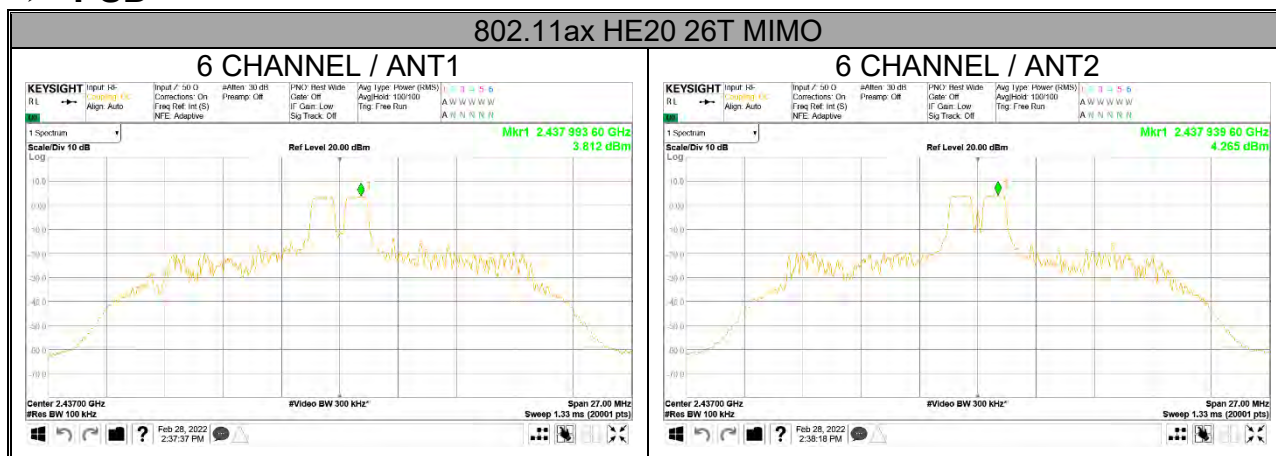

➤ BANDEDGE

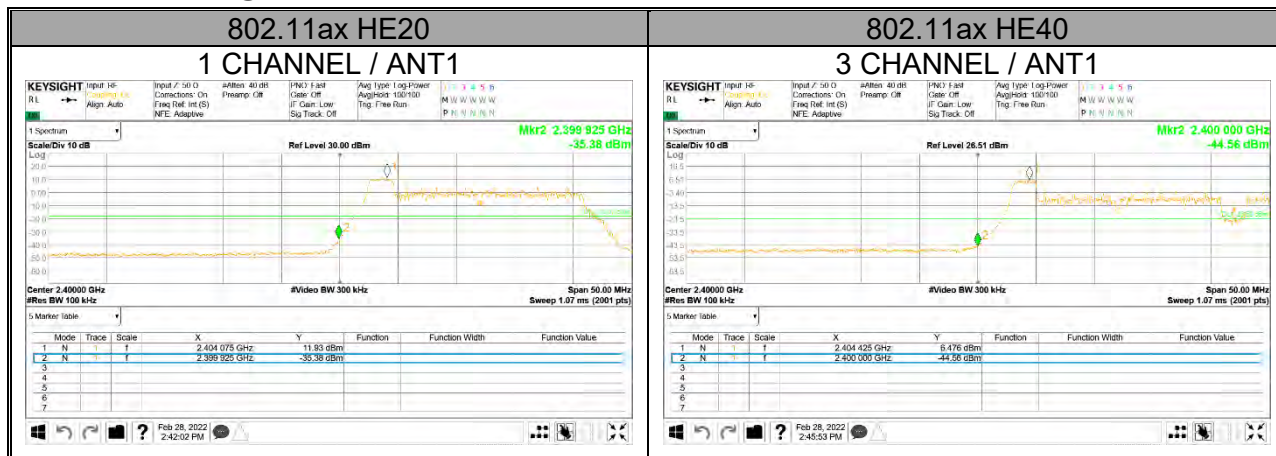


➤ CONDUCTED SPURIOUS EMISSIONS

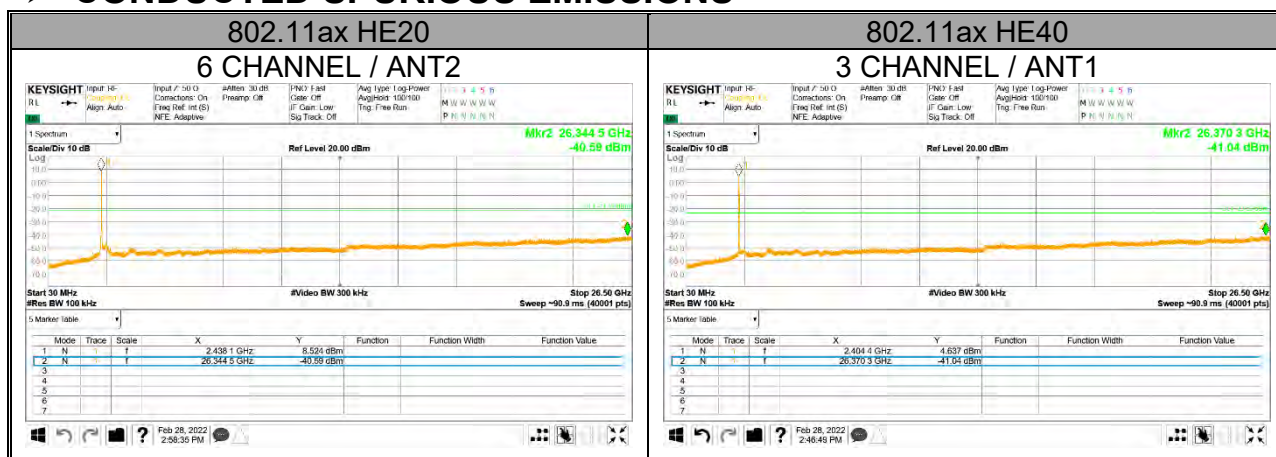

➤ BANDEGE

802.11ax HT40 26T MIMO CH3

VERTICAL RESULT

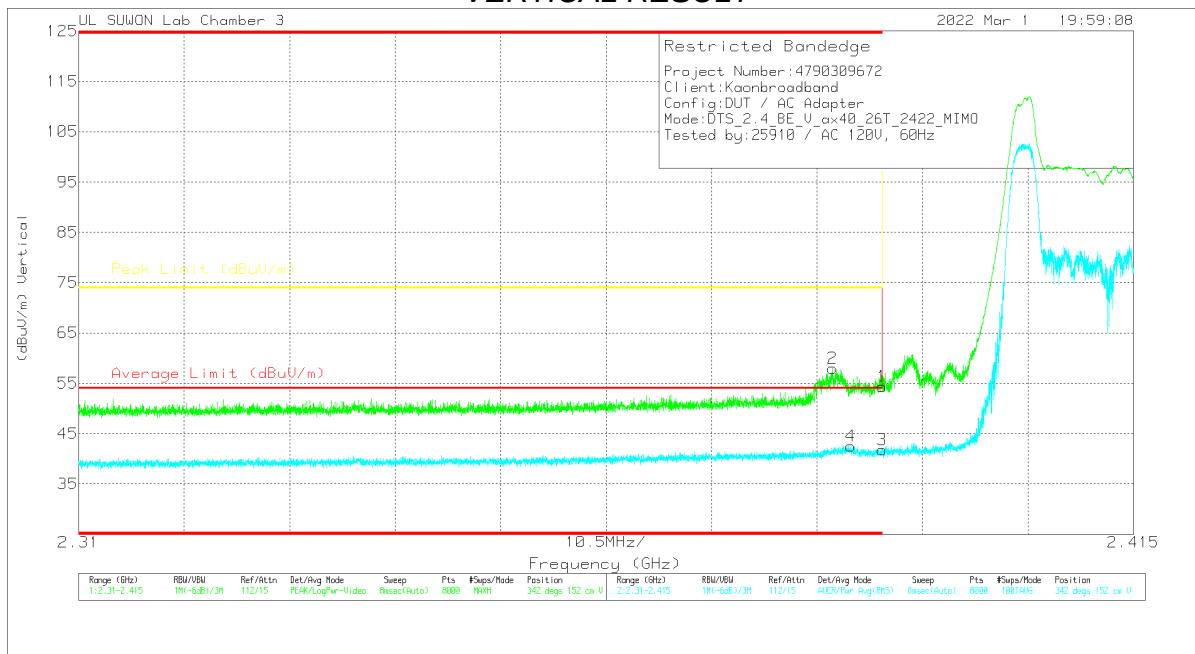

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	46.96	Pk	32.8	-25.4	54.36	-	-	74	-19.64	342	152	V
2	* 2.38503	50.63	Pk	32.7	-25.4	57.93	-	-	74	-16.07	342	152	V
3	* 2.39	34.4	RMS	32.8	-25.4	41.8	54	-12.2	-	-	342	152	V
4	* 2.38686	35.26	RMS	32.7	-25.4	42.56	54	-11.44	-	-	342	152	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

➤ HARMONICS AND SPURIOUS EMISSIONS

802.11ax HE40_26T_MIMO_CH 9 RESULTS

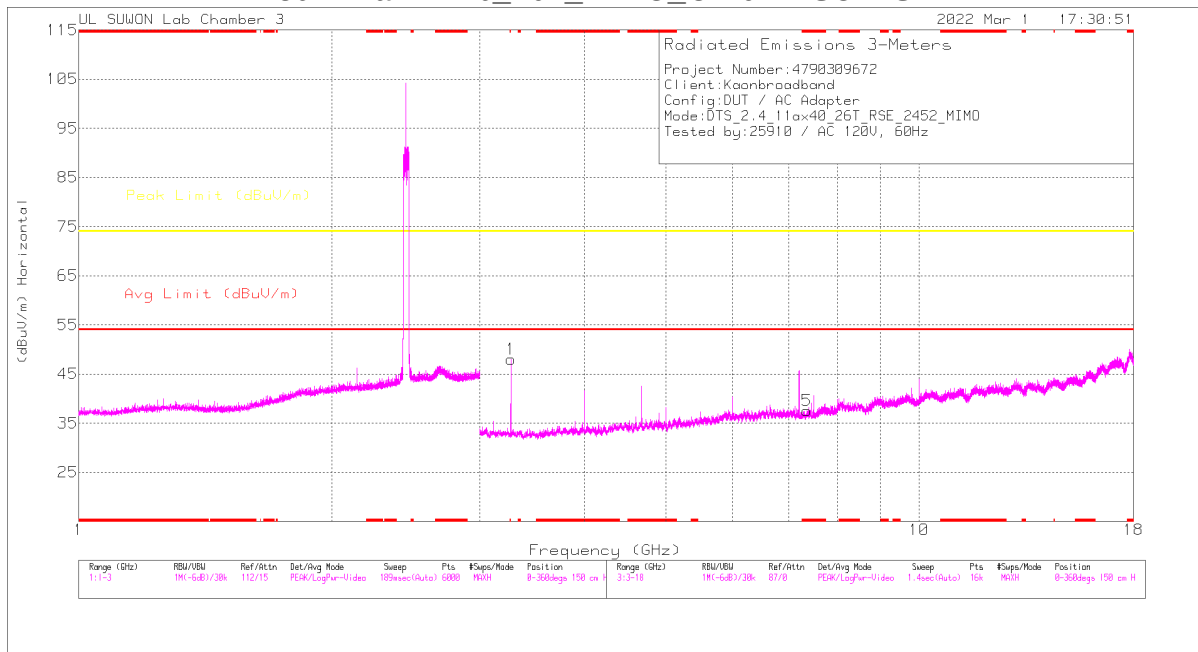

HORIZONTAL

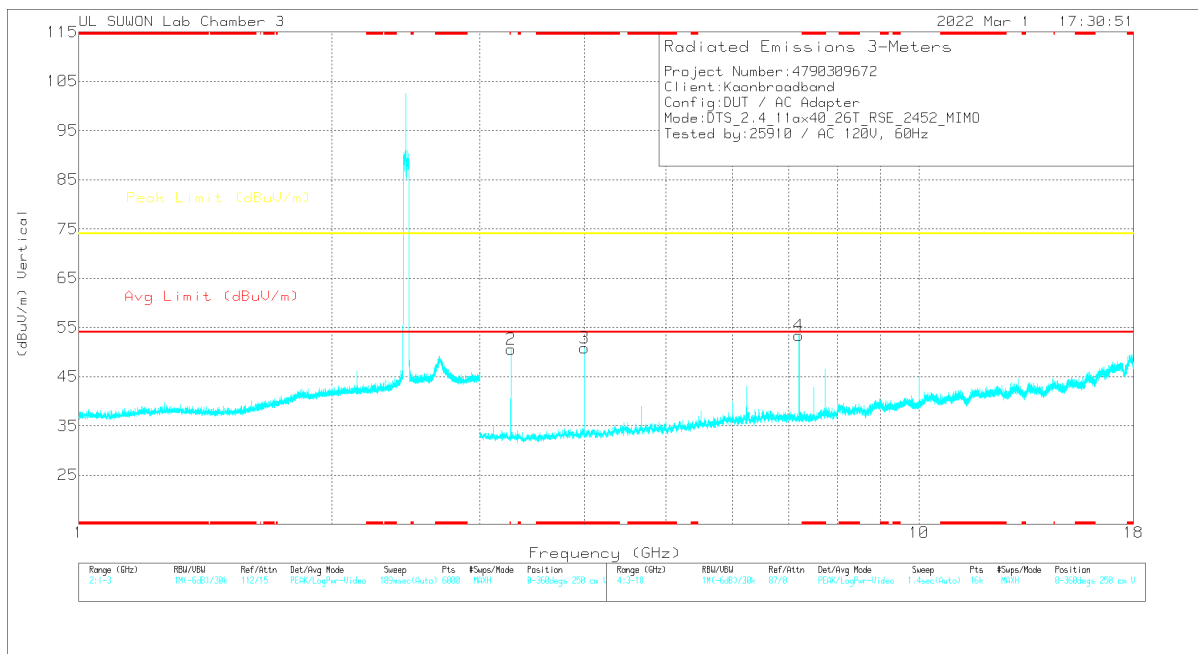

VERTICAL

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

DATA

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3.26929	47.73	PK2	33.4	-32.9	48.23	-	-	74	-25.77	280	104	H
* 7.36195	35.85	PK2	36	-24.8	47.05	-	-	74	-26.95	4	135	H
* 7.36053	23.8	MAv1	36	-24.8	35	54	-19	-	-	4	135	H
3.2693	50.33	PK2	33.4	-32.9	50.83	-	-	74	-23.17	325	101	V
* 4	50.61	PK2	33.9	-31.3	53.21	-	-	74	-20.79	9	105	V
* 3.99997	48.38	MAv1	33.9	-31.3	50.98	54	-3.02	-	-	9	105	V
7.19997	44.13	PK2	36.1	-25.5	54.73	-	-	74	-19.27	10	119	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

END OF TEST REPORT