


5.0 x 3.0 x 0.5 (mm) ISM 915 MHz Ceramic Chip Antenna (AA702)

Engineering Specification

1. Product Number

H	2	U	6	4	U	1	H	2	C	0	2	0	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---

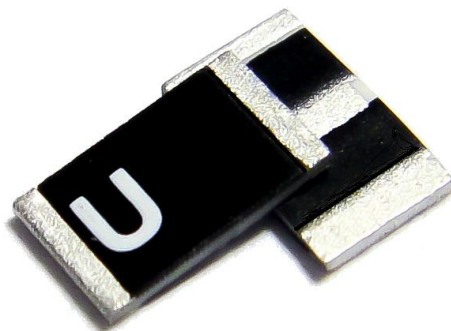

2. Features

- *Stable and reliable in performances
- *Low profile, compact size
- *RoHS 2.0 compliance
- *SMT processes compatible
- *AEC-Q200 compliant

3. Applications

- *ISM 915 MHz Band applications
- *IoT applications
- *IEEE 802.11ah/ Wi-Fi Certified HaLow technology

4. Description

Unictron's AA702 ceramic chip antenna is designed for ISM 915MHz band applications, covering frequencies 902~928 MHz. Fabricated with proprietary design and processes, AA702 shows excellent performance and is fully compatible with SMT processes which can decrease the assembly cost and improve device's quality and consistency.

2020-07-07

Document
Control Center



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Jane

Designed by : Allen

Checked by : Mike

Approved by : Herbert

TITLE : 5.0 x 3.0 x 0.5 (mm) ISM 915MHz Ceramic Chip Antenna
(AA702) Engineering Specification

DOCUMENT
NO.

H2U64U1H2C0200


REV.
M

5. Layout Guide & Electrical Specifications

5-1. Layout Guide (unit : mm)

Solder Land Pattern:

The solder land pattern (gold marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions.

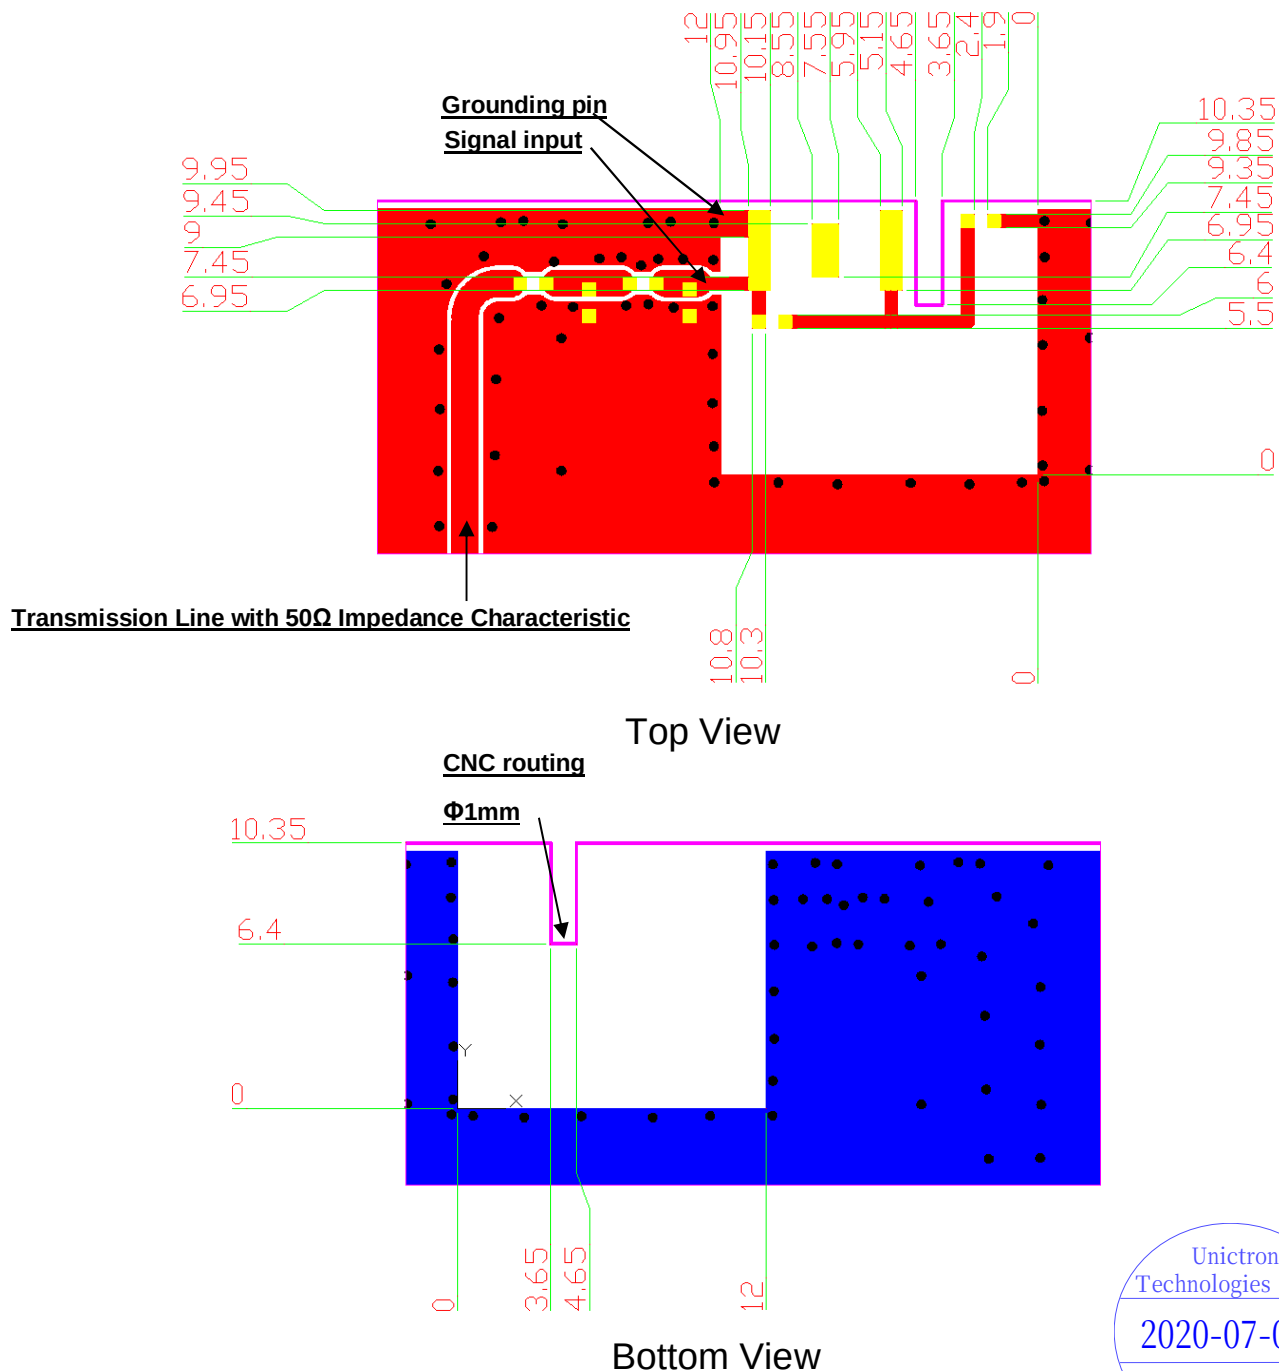

詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Jane

Designed by : Allen

Checked by : Mike

Approved by : Herbert

TITLE : 5.0 x 3.0 x 0.5 (mm) ISM 915MHz Ceramic Chip Antenna
(AA702) Engineering Specification

DOCUMENT
NO.

H2U64U1H2C0200

REV.
M

5-2. Electrical Specifications (Evaluation Board Dimensions: 80 x 40 mm²)


5-2-1. Electrical Table

Characteristics		Specifications	Unit
Outline Dimensions		5.0 x 3.0 x 0.5	mm
Ground Plane Dimensions		80 x 40	mm
Working Frequency		902~928	MHz
VSWR (@ center frequency)*		2 Max.	
Characteristic Impedance		50	Ω
Polarization		Linear Polarization	
Peak Gain	(@915 MHz)	0.8 (typical**)	dBi
Efficiency		52 (typical**)	%

*Center frequency means the frequency with the lowest value in return loss of the chip antenna on the evaluation board.

**A typical value is for reference only, could be changed due to the system or equipment of measurement is different.

5-2-2. Frequency vs. V.S.W.R. and Total Radiation Gain

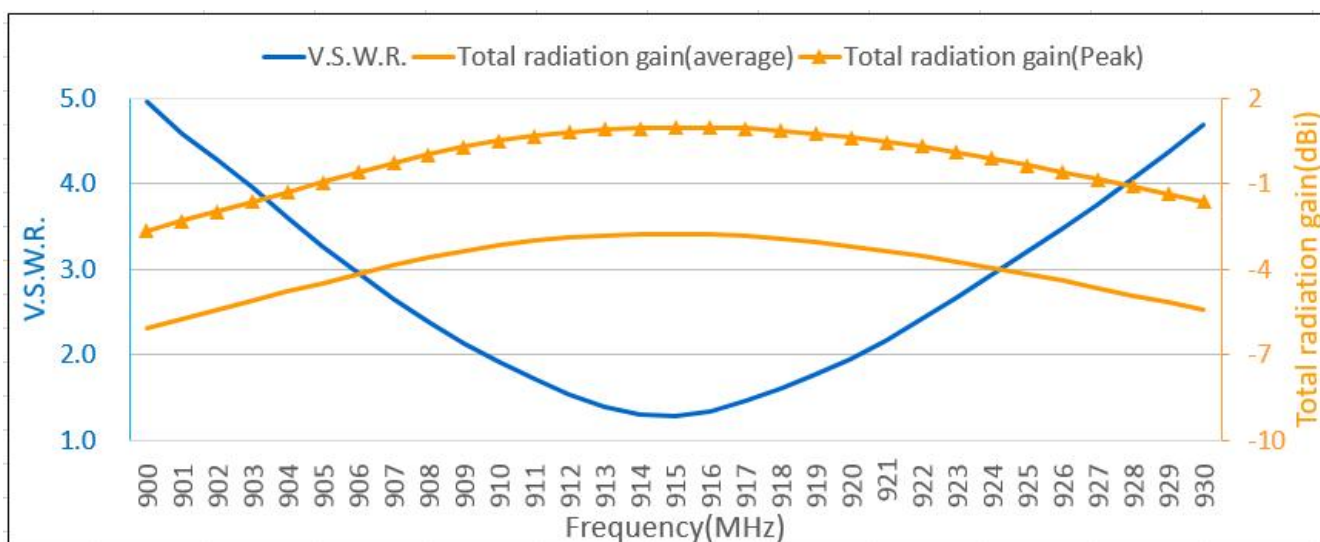

詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Jane

Designed by : Allen

Checked by : Mike

Approved by : Herbert

TITLE : 5.0 x 3.0 x 0.5 (mm) ISM 915MHz Ceramic Chip Antenna
(AA702) Engineering Specification


DOCUMENT
NO.

H2U64U1H2C0200

REV.
M

6. Outline Dimensions of Antenna & Evaluation Board (unit: mm)


6-1. Antenna Dimensions

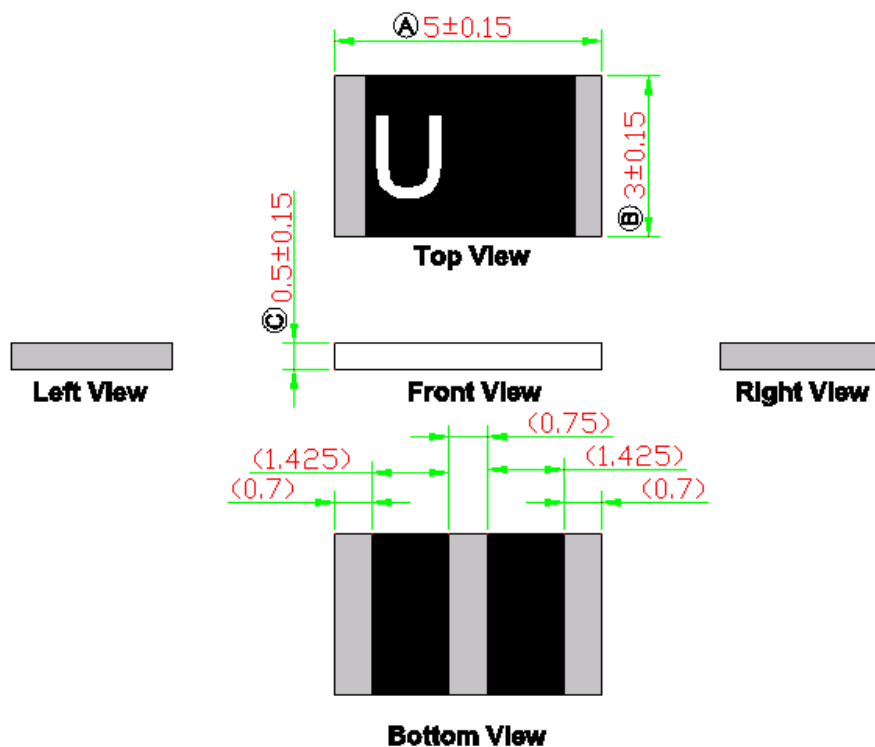

NOTE:

1. All materials are RoHS compliant.
2. "A~C" Critical Dimensions.
3. "()" Reference Dimensions.

PIN Definitions

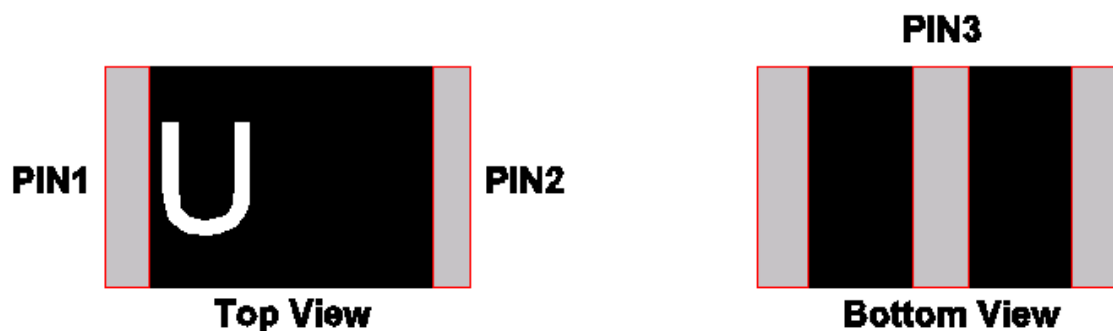

PIN	1	2	3
Soldering Pad	Signal	Tuning / Ground	N/C

2020-07-07

Document
Control Center



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Jane

Designed by : Allen

Checked by : Mike

Approved by : Herbert

TITLE : 5.0 x 3.0 x 0.5 (mm) ISM 915MHz Ceramic Chip Antenna
(AA702) Engineering Specification


DOCUMENT
NO.

H2U64U1H2C0200

REV.

M

6-2. Evaluation Board with Antenna

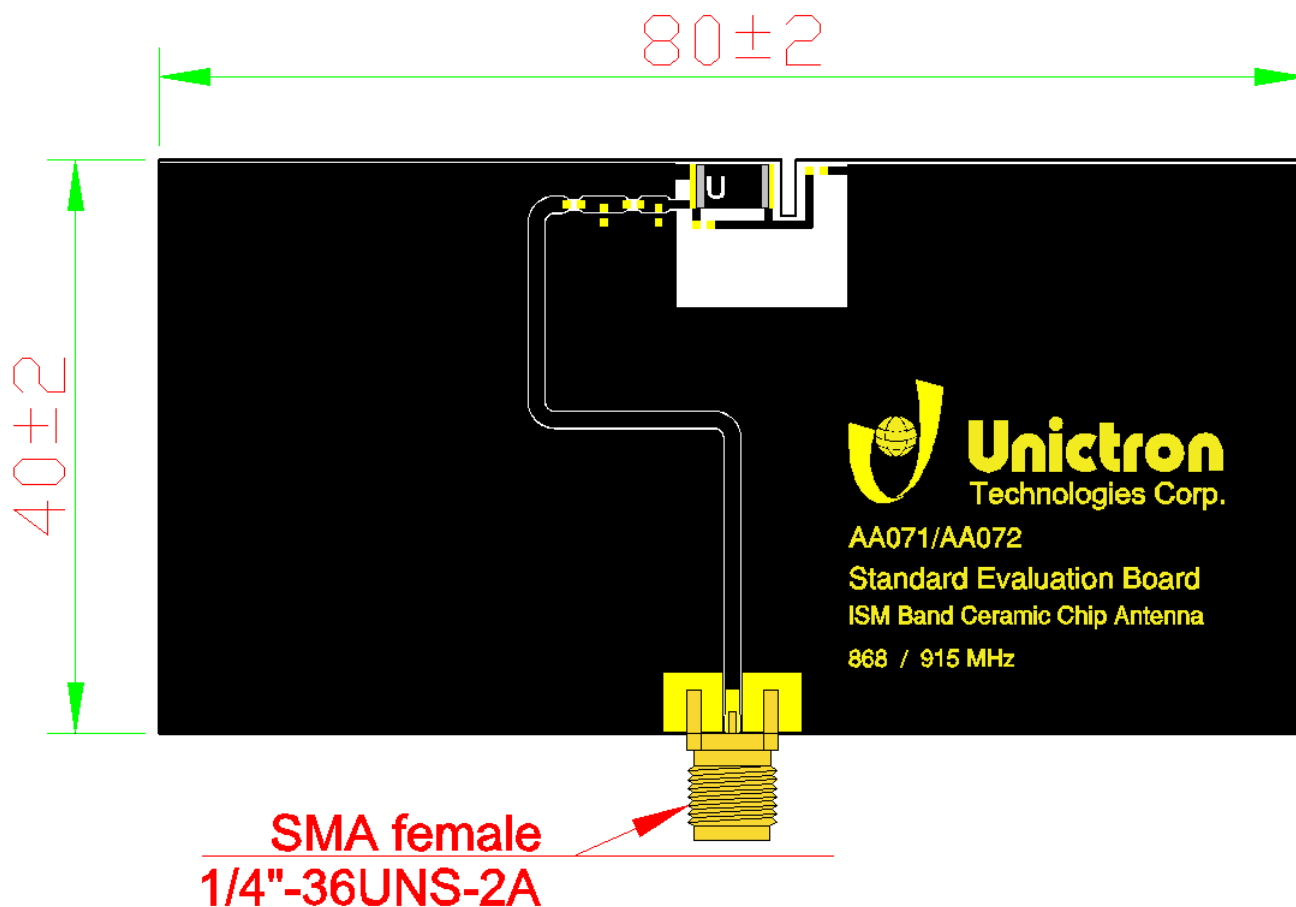

Unit: mm



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Jane

Designed by : Allen

Checked by : Mike

Approved by : Herbert

TITLE : 5.0 x 3.0 x 0.5 (mm) ISM 915MHz Ceramic Chip Antenna
(AA702) Engineering Specification





DOCUMENT
NO.

H2U64U1H2C0200

REV.
M

7. 3D Radiation Gain Pattern (with 80 x 40 mm² Evaluation Board)

3D Radiation Gain Pattern @ 915 MHz (unit: dBi)

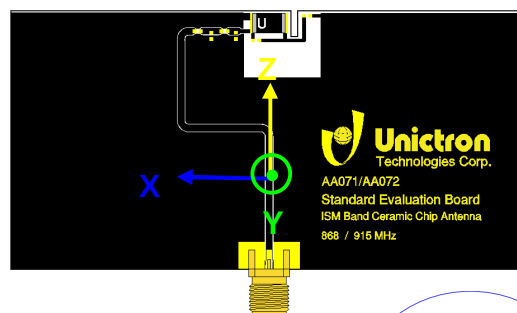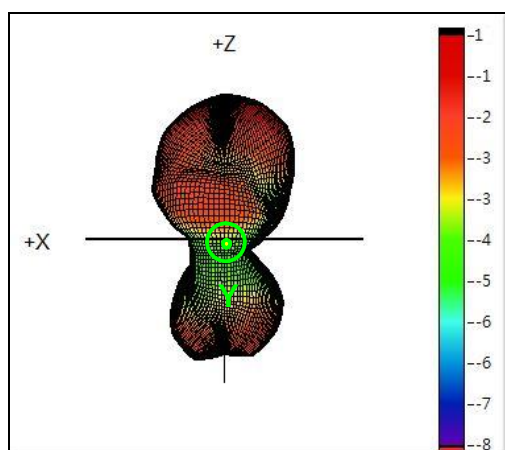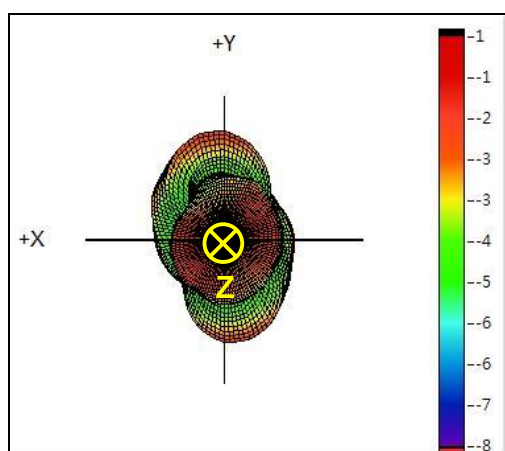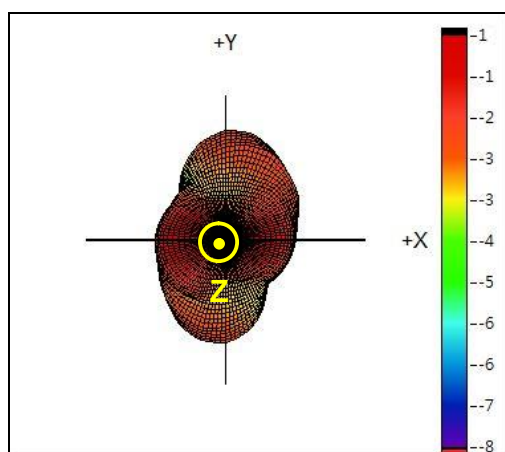

Unictron
Technologies Corp.
2020-07-07
Document
Control Center



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Jane

Designed by : Allen

Checked by : Mike

Approved by : Herbert

TITLE : 5.0 x 3.0 x 0.5 (mm) ISM 915MHz Ceramic Chip Antenna
(AA702) Engineering Specification


DOCUMENT
NO.

H2U64U1H2C0200

REV.
M


8. Frequency Tuning and Matching Circuit

8-1. Chip antenna tuning scenario :

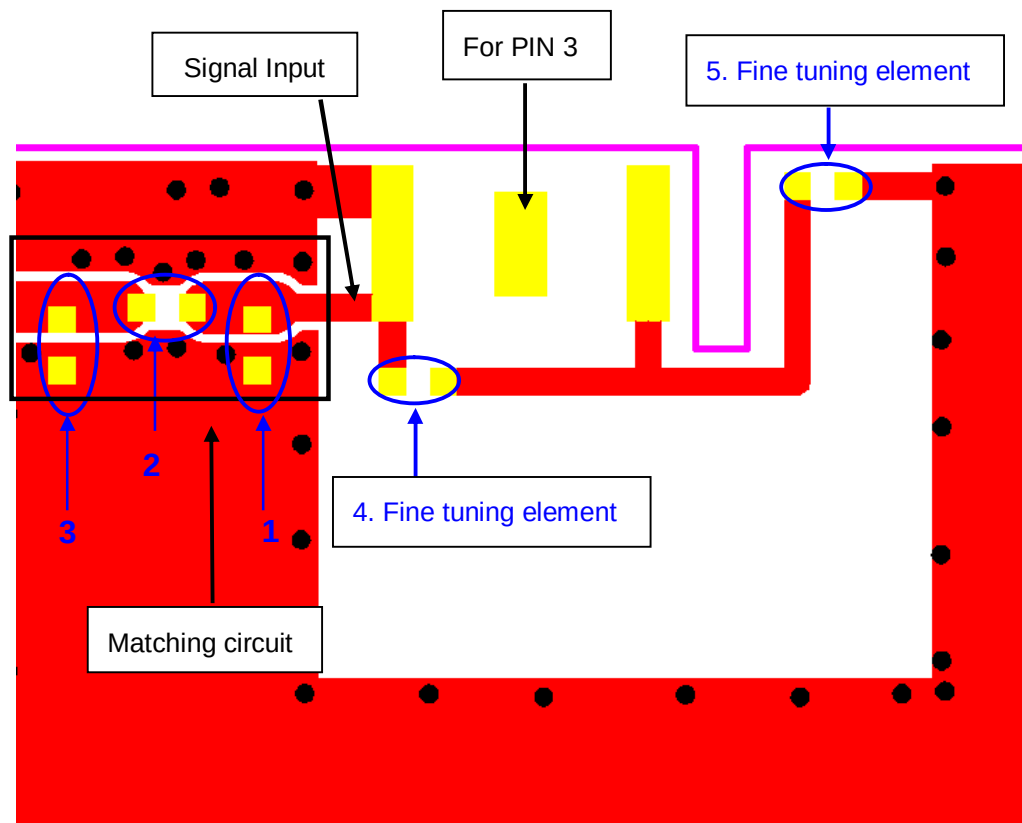

8-2. Matching Circuit :

With the following recommended values of matching and tuning components, the center frequencies will be about 915 MHz at our standard 80x40 mm² evaluation board. However, these are typical reference values which may need to be changed when circuit boards or part vendors are different.

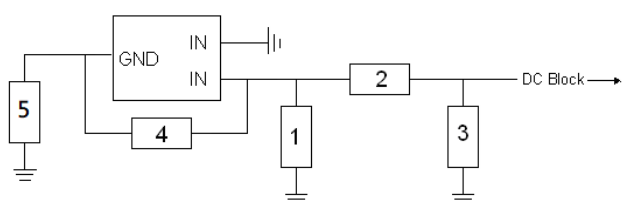

System Matching Circuit Component			
Location	Description	Vendor	Tolerance
1	N/A	-	-
2	6pF, (0402)	Murata	±0.05pF
3	N/A	-	-
4.Fine tuning element	3.3pF, (0402)	Murata	±0.05pF
5.Fine tuning element	2.2pF, (0402)	Murata	±0.05pF



詠業科技股份有限公司
Unictron Technologies Corporation
Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Jane

Designed by : Allen

Checked by : Mike

Approved by : Herbert


TITLE : 5.0 x 3.0 x 0.5 (mm) ISM 915MHz Ceramic Chip Antenna
(AA702) Engineering Specification

DOCUMENT
NO.


H2U64U1H2C0200

REV.
M

8-3. Reference for the Use of Frequency Tuning Element

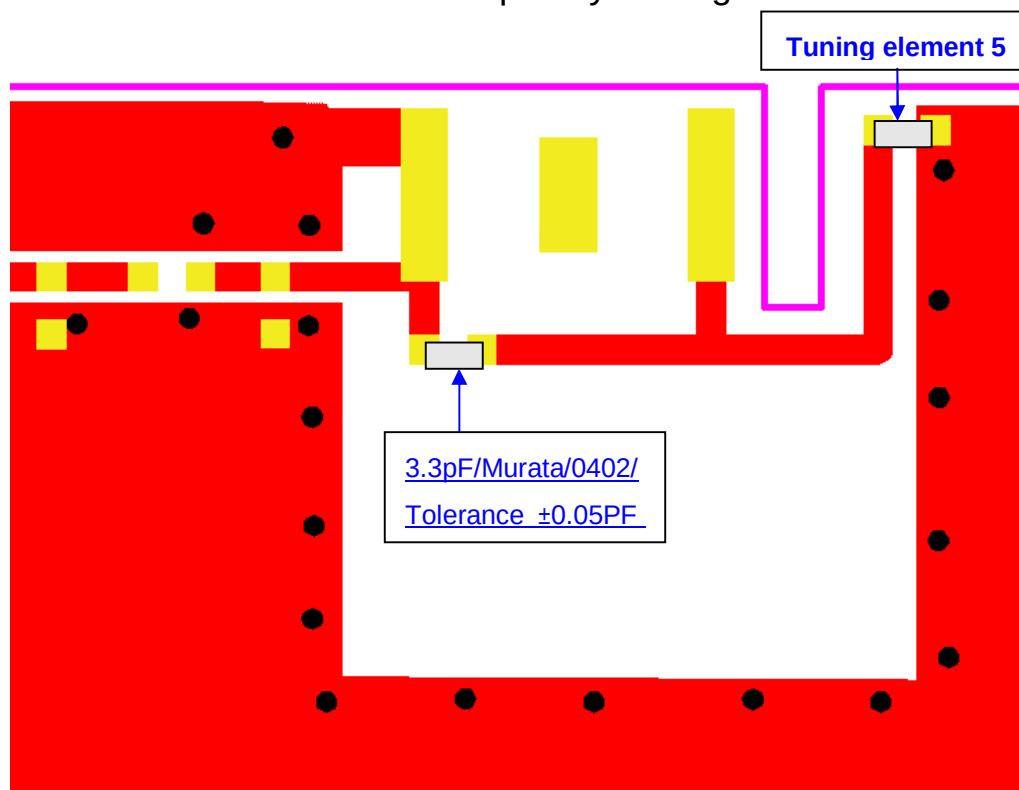

Frequencies vs. capacitance of tuning element 5

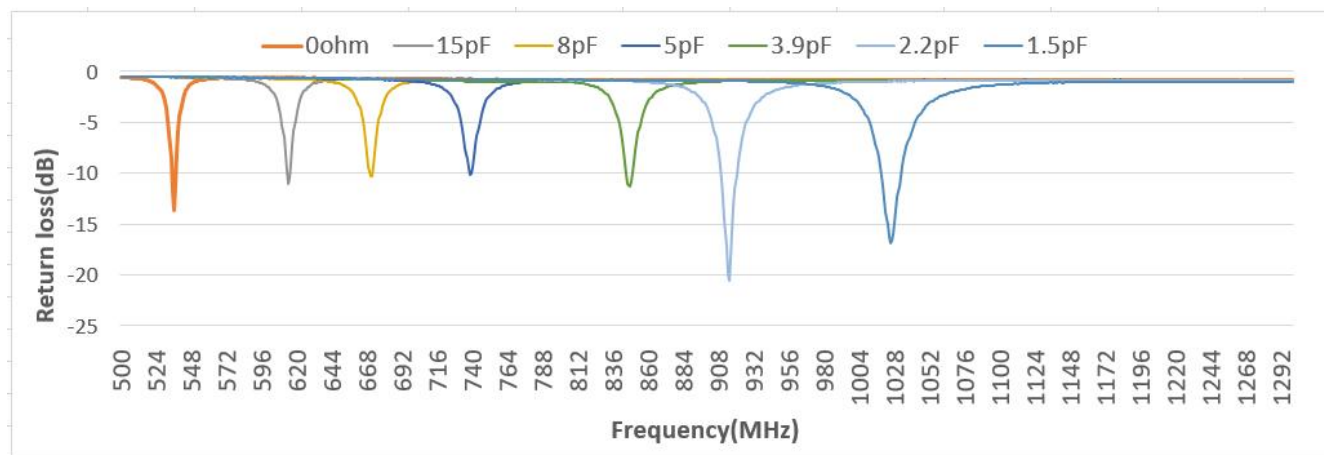

詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Jane

Designed by : Allen

Checked by : Mike

Approved by : Herbert

TITLE : 5.0 x 3.0 x 0.5 (mm) ISM 915MHz Ceramic Chip Antenna
(AA702) Engineering Specification


DOCUMENT
NO.

H2U64U1H2C0200

REV.
M

9. Soldering Conditions

Solder paste alloy: SAC305 (Sn96.5/Ag3/Cu0.5) Lead Free solder paste

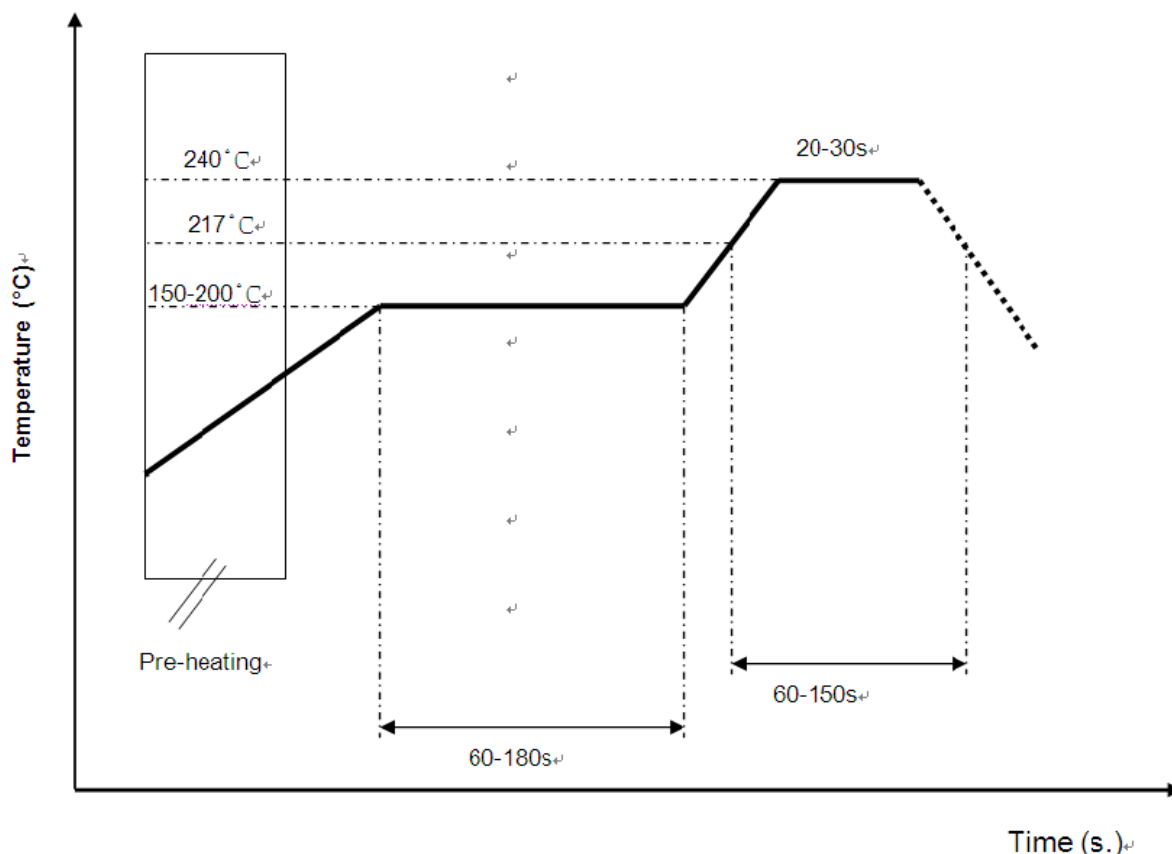

* Recommended solder paste alloy: SAC305 (Sn96.5 /Ag3 /Cu0.5) Lead Free solder paste

10. Reminders for users of Unictron's AA702 ceramic chip antennas

- 10-1. This chip antenna is made of ceramic materials which is relatively more rigid and brittle compared to circuit board materials. Furthermore, the length of this antenna is quite long. Bending of circuit board at the locations where chip antenna is mounted may cause the cracking of solder joints or antenna itself.
- 10-2. Punching/cutting of the break-off tab of PCB panel may cause severe bending of the circuit board which may result in cracking of solder joints or chip antenna itself. Therefore break-off tab shall be located away from the installation site of chip antenna.
- 10-3. Be cautious when ultrasonic welding process needs to be used near the locations where chip antennas are installed. Strong ultrasonic vibration may cause the cracking of chip antenna solder joints.

Unictron
Technologies Corp.
2020-07-07
Document
Control Center



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Jane

Designed by : Allen

Checked by : Mike

Approved by : Herbert

TITLE : 5.0 x 3.0 x 0.5 (mm) ISM 915MHz Ceramic Chip Antenna
(AA702) Engineering Specification

DOCUMENT
NO.


H2U64U1H2C0200

REV.
M

11. Packing

- (1) Quantity/Reel: 6000 pcs/Reel
- (2) Plastic tape:

a. Tape Drawing

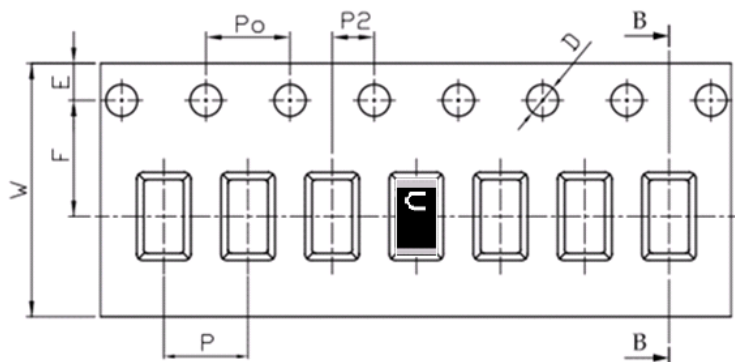

b. Tape Dimensions (unit: mm)

Feature	Specifications	Tolerances
W	12.00	±0.30
P	8.00	±0.10
E	1.75	±0.10
F	5.50	±0.10
P2	2.00	±0.10
D	1.50	+0.10 -0.00
P0	4.00	±0.10
10P0	40.00	±0.20

12. Operating & Storage Conditions

12-1. Operating

- (1) Maximum Input Power: 2 W
- (2) Operating Temperature: -40°C to 85°C
- (3) Relative Humidity: 10% to 70%

12-2. Storage (sealed)


- (1) Storage Temperature: -5°C to 40°C
- (2) Relative Humidity: 20% to 70%
- (3) Shelf Life: 1 year

12-3. Storage (unsealed)

Meet the criteria of J-STD-033 MSL2a

12-4. Storage (After mounted on customer's PCB with SMT process)

- (1) Storage Temperature: -40°C to 85°C
- (2) Relative Humidity: 10% to 70%



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Jane

Designed by : Allen

Checked by : Mike

Approved by : Herbert

TITLE : 5.0 x 3.0 x 0.5 (mm) ISM 915MHz Ceramic Chip Antenna
(AA702) Engineering Specification

DOCUMENT
NO.

H2U64U1H2C0200

REV.
M

13. Notice

(1) Installation Guide:

Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information.

(2) All specifications are subject to change without notice.



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Jane

Designed by : Allen

Checked by : Mike

Approved by : Herbert

TITLE : 5.0 x 3.0 x 0.5 (mm) ISM 915MHz Ceramic Chip Antenna
(AA702) Engineering Specification

DOCUMENT
NO.

H2U64U1H2C0200

REV.
M