



TEST REPORT

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr		Report No.: KR23-SPF0027-B Page (1) of (137)	KCTL
1. Client ◦ Name : Samsung Electronics Co., Ltd. ◦ Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea ◦ Date of Receipt : 2023-03-14			
2. Use of Report : Certification			
3. Name of Product and Model : Notebook PC ◦ Model Name : NP935QNA ◦ Manufacturer and country of Origin : Samsung Electronics Co., Ltd. / VIETNAM			
4. FCC ID : A3LNP935QNA			
5. Date of Test : 2023-04-13 ~ 2023-05-13			
6. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing (Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)			
7. Test Standards : IEEE 1528-2013, ANSI/IEEE C95.1, KDB Publication			
8. Test Results : Refer to the test result in the test report			
Affirmation	Tested by Name : Mungi Jeong (Signature)		Technical Manager Name : Jongwon Ma (Signature)
			2023-06-05
Eurofins KCTL Co.,Ltd. As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by Eurofins KCTL Co.,Ltd.			

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0027-B Page (2) of (137)	
---	--	---

REPORT REVISION HISTORY

Date	Revision	Page No
2023-05-26	Originally issued	-
2023-06-02	Device Overview revised	5
	Antenna information revised	6, 7, 9, 131
	KDB Publication version revised	7
	U-NII Band Tune up power revised	10
	Simultaneous Transmission revised	32~35
	Estimated SAR tables updated	33~34
	Power Reduction Verification revised	123~130
	Antenna Location & Distance revised	131
2023-06-05	Simultaneous Transmission revised	32~34

Note: The Report No. KR23-SPF0027-A is superseded by the report No. KR23-SPF0027-B.

This report shall not be reproduced except in full, without the written approval of Eurofins KCTL Co.,Ltd. This document may be altered or revised by Eurofins KCTL Co.,Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Eurofins KCTL Co.,Ltd. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

☒ Statement not required by the standard or client used for type testing

1. Identification when information is provided by the customer: Information marked " # " is provided by the customer. - Disclaimer: This information is provided by the customer and can affect the validity of results.

CONTENTS

1. General information.....	4
2. Device information	5
3. Specific Absorption Rate	15
4. SAR Measurement Procedures.....	16
5. SAR Measurement Configurations.....	17
6. RF Exposure Limits	18
7. FCC SAR General Measurement Procedures.....	19
8. RF Average Conducted Output Power.....	22
9. System Verification	26
10. SAR Test Results	28
11. Simultaneous Transmission	32
12. SAR Measurement Variability.....	35
13. Measurement Uncertainty.....	36
14. Test Equipment Information	37
15. Test System Verification Results	39
16. Test Results.....	44
Appendixes List.....	56
Appendix A. Calibration certificate	57
Appendix B. SAR Tissue Specification.....	121
Appendix C. Power Reduction Verification	122
Appendix D. #Antenna Location & Distance	130
Appendix E. EUT Photo	131
Appendix F. Test Setup Photo.....	135
End of test report	137

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0027-B Page (4) of (137)	
---	--	---

1. General information

Client : Samsung Electronics Co., Ltd.
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
 Manufacturer : Samsung Electronics Co., Ltd.
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
 Factory : SAMSUNG ELECTRONICS VIETNAM CO.,LTD.(SEV)
 Address : Khu Cong nghiep Ten Phong 1, Yen Trung, Yen Phong, Bac Ninh, Vietnam
 Laboratory : Eurofins KCTL Co.,Ltd.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-3327, G-198, C-3706, T-1849
 CAB Identifier: KR0040, ISED Number: 8035A
 KOLAS No.: KT231

1.1 Report Overview

This report details the results of testing carried out on the samples listed in section 2, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this test report is used in any configuration other than that detailed in the test report, the manufacturer must ensure the new configuration complies with all relevant standards and certification requirements. Any mention of Eurofins KCTL Co.,Ltd. Wireless lab or testing done by Eurofins KCTL Co.,Ltd. Wireless lab made in connection with the distribution or use of the tested product must be approved in writing by Eurofins KCTL Co.,Ltd. Wireless lab.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0027-B Page (5) of (137)	 
---	---	---

2. Device information

2.1 Basic description

Product Name		Notebook PC
Product Model Number		NP935QNA
Product Manufacturer		Samsung Electronics Co., Ltd.
Host Product Serial Number	Radiation	KQZZ930W300395M
	Conduction	KQZZ930W300160T, KQZZ930W300149P
Mode of Operation		WLAN 802.11a,b,g,n,ac,ax, Bluetooth
Device Overview		WLAN 2.4 GHz: 2 412.0 MHz ~ 2 472.0 MHz U-NII-1: 5 180.0 MHz ~ 5 240.0 MHz U-NII-2A: 5 260.0 MHz ~ 5 320.0 MHz U-NII-2C: 5 500.0 MHz ~ 5 720.0 MHz U-NII-3: 5 745.0 MHz ~ 5 825.0 MHz U-NII-5: 5 955.0 MHz ~ 6 415.0 MHz U-NII-6: 6 435.0 MHz ~ 6 515.0 MHz U-NII-7: 6 535.0 MHz ~ 6 855.0 MHz U-NII-8: 6 875.0 MHz ~ 7 115.0 MHz Bluetooth: 2 402.0 MHz ~ 2 480.0 MHz
TDWR Information		5.60 GHz ~ 5.65 GHz band (TDWR) is supported by the device.

2.2 Summary of SAR Test Results

Band	Equipment Class	Highest Reported
		1g SAR (W/kg)
WLAN 2.4 GHz	DTS	1.09
U-NII-2A	NII	1.18
U-NII-2C	NII	0.79
U-NII-3	NII	0.72
Bluetooth	DSS/DTS	0.61
Simultaneous SAR per KDB 690783 D01v01r03		1.50

2.3 #Antenna information

Antenna Type		PIFA antenna				
Band		WLAN 2.4 GHz / Bluetooth	UNII-1	UNII-2A	UNII-2C	UNII-3
Peak gain (dBi)	Main	-1.05	3.63	3.67	4.22	4.22
	Aux	1.07	3.21	3.84	3.59	2.19
Band		UNII-4	UNII-5	UNII-6	UNII-7	UNII-8
Peak gain (dBi)	Main	N/A	-3.45	-5.54	-2.51	-2.64
	Aux	N/A	-1.40	-3.34	-3.52	-4.25



2.4 #Maximum Tune-up power

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D04v01.

When the specified maximum output power is the same for both UNII Band1 and UNII Band 2A, begins SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is $\leq 1.2\text{W/kg}$, SAR is not required for UNII band1 $> 1.2\text{W/kg}$, both bands should be tested independently for SAR.

2.4.1 #Maximum WLAN Output Power (Max Notebook & Tablet Mode)

Band	Mode	Channel	Output Power (dBm)	
			Target	Max. Allowed
WLAN 2.4 GHz (Aux)	802.11b	Except 12,13	18.50	19.50
		12	2.00	3.00
		13	-1.00	0.00
	802.11g	Except 12,13	17.50	18.50
		12	2.00	3.00
		13	-1.00	0.00
	802.11n (HT20)	Except 12,13	18.00	19.00
		12	2.00	3.00
		13	-1.00	0.00
	802.11ax (SU 20 MHz)	Except 12,13	14.00	15.00
		12	2.00	3.00
		13	-1.00	0.00
	802.11ax RU 26T_20 MHz	Except 12,13	9.00	10.00
		12, 13	-6.00	-5.00
	802.11ax RU 52T_20 MHz	Except 12,13	12.00	13.00
		12, 13	-3.00	-2.00
	802.11ax RU 106T_20 MHz	Except 12,13	14.00	15.00
		12	2.00	3.00
		13	-1.00	0.00
	802.11ax RU 242T_20 MHz	Except 12,13	14.00	15.00
		12	2.00	3.00
		13	-1.00	0.00

Note: WLAN 2.4 GHz only supports Aux in SISO mode.

Band	Mode	Channel	Output Power (dBm)	
			Target	Max. Allowed
WLAN 2.4 GHz (MIMO)	802.11b	Except 12,13	21.50	22.50
		12	5.00	6.00
		13	2.00	3.00
	802.11g	Except 12,13	20.50	21.50
		12	5.00	6.00
		13	2.00	3.00
	802.11n (HT20)	Except 12,13	21.00	22.00
		12	5.00	6.00
		13	2.00	3.00
	802.11ax (SU 20 MHz)	Except 12,13	17.00	18.00
		12	5.00	6.00
		13	2.00	3.00
	802.11ax RU 26T_20 MHz	Except 12,13	12.00	13.00
		12, 13	-3.00	-2.00
	802.11ax RU 52T_20 MHz	Except 12,13	15.00	16.00
		12, 13	0.00	1.00
	802.11ax RU 106T_20 MHz	Except 12,13	17.00	18.00
		12	5.00	6.00
		13	2.00	3.00
	802.11ax RU 242T_20 MHz	Except 12,13	17.00	18.00
		12	5.00	6.00
		13	2.00	3.00
U-NII-1, U-NII-2A, U-NII-2C, U-NII-3 (MIMO)	802.11a	All Channel	18.00	19.00
	802.11n(HT20)	All Channel	18.00	19.00
	802.11n(HT40)	All Channel	16.00	17.00
	802.11ac(VHT20)	All Channel	16.00	17.00
	802.11ac(VHT40)	All Channel	16.00	17.00
	802.11ac(VHT80)	All Channel	16.00	17.00
	802.11ac(VHT160)	All Channel	15.00	16.00
	802.11ax SU 20 MHz	All Channel	16.00	17.00
	802.11ax SU 40 MHz	All Channel	14.00	15.00
	802.11ax SU 80 MHz	All Channel	15.00	16.00
	802.11axSU 160 MHz	All Channel	13.00	14.00
	802.11ax RU 26T_20/40/80/160 MHz	All Channel	10.00	11.00
	802.11ax RU 52T_20/40/80/160 MHz	All Channel	12.50	13.50
	802.11ax RU 106T_20/40/80/160 MHz	All Channel	13.00	14.00
	802.11ax RU 242T_20/40/80/160 MHz	All Channel	13.00	14.00
	802.11ax RU 484T_40/80/160 MHz	All Channel	13.00	14.00
	802.11ax RU 996T_80/160 MHz	All Channel	13.00	14.00
	802.11ax RU 2x996T_160 MHz	All Channel	13.00	14.00

Note: WLAN 5 GHz only supports MIMO mode.

2.4.2 #Maximum WLAN Output Power (Tablet Mode-Grip Sensor)

Band/Ant.	Mode	Channel	Output Power (dBm)	
			Target	Max. Allowed
WLAN 2.4 GHz (Aux)	802.11b	Except 12,13	12.00	13.00
		12	2.00	3.00
		13	-1.00	0.00
	802.11g	Except 12,13	12.00	13.00
		12	2.00	3.00
		13	-1.00	0.00
	802.11n (HT20)	Except 12,13	12.00	13.00
		12	2.00	3.00
		13	-1.00	0.00
	802.11ax (SU 20 MHz)	Except 12,13	12.00	13.00
		12	2.00	3.00
		13	-1.00	0.00
	802.11ax RU 26T_20 MHz	Except 12,13	9.00	10.00
		12, 13	-6.00	-5.00
	802.11ax RU 52T_20 MHz	Except 12,13	9.00	10.00
		12, 13	-3.00	-2.00
	802.11ax RU 106T_20 MHz	Except 12,13	9.00	10.00
		12	2.00	3.00
		13	-1.00	0.00
	802.11ax RU 242T_20 MHz	Except 12,13	9.00	10.00
		12	2.00	3.00
		13	-1.00	0.00

Note: WLAN 2.4 GHz only supports Aux in SISO mode.

Band/Ant.	Mode	Channel	Output Power (dBm)	
			Target	Max. Allowed
WLAN 2.4 GHz (MIMO)	802.11b	Except 12,13	15.00	16.00
		12	5.00	6.00
		13	2.00	3.00
	802.11g	Except 12,13	15.00	16.00
		12	5.00	6.00
		13	2.00	3.00
	802.11n (HT20)	Except 12,13	15.00	16.00
		12	5.00	6.00
		13	2.00	3.00
	802.11ax (SU 20 MHz)	Except 12,13	15.00	16.00
		12	5.00	6.00
		13	2.00	3.00
	802.11ax RU 26T_20 MHz	Except 12,13	12.00	13.00
		12, 13	-3.00	-2.00
	802.11ax RU 52T_20 MHz	Except 12,13	12.00	13.00
		12, 13	0.00	1.00
	802.11ax RU 106T_20 MHz	Except 12,13	12.00	13.00
		12	5.00	6.00
		13	2.00	3.00
	802.11ax RU 242T_20 MHz	Except 12,13	12.00	13.00
		12	5.00	6.00
		13	2.00	3.00
U-NII-1, U-NII-2A, U-NII-2C, U-NII-3 (MIMO)	802.11a	All Channel	12.00	13.00
	802.11n(HT20)	All Channel	12.00	13.00
	802.11n(HT40)	All Channel	12.00	13.00
	802.11ac(VHT20)	All Channel	12.00	13.00
	802.11ac(VHT40)	All Channel	12.00	13.00
	802.11ac(VHT80)	All Channel	12.00	13.00
	802.11ac(VHT160)	All Channel	11.50	12.50
	802.11ax SU 20 MHz	All Channel	12.00	13.00
	802.11ax SU 40 MHz	All Channel	12.00	13.00
	802.11ax SU 80 MHz	All Channel	12.00	13.00
	802.11ax SU 160 MHz	All Channel	11.50	12.50
	802.11ax RU 26T_20/40/80/160 MHz	All Channel	10.00	11.00
	802.11ax RU 52T_20/40/80 MHz	All Channel	12.00	13.00
	802.11ax RU 52T_160 MHz	All Channel	11.50	12.50
	802.11ax RU 106T_20/40/80 MHz	All Channel	12.00	13.00
	802.11ax RU 106T_160 MHz	All Channel	11.50	12.50
	802.11ax RU 242T_20/40/80 MHz	All Channel	12.00	13.00
	802.11ax RU 242T_160 MHz	All Channel	11.50	12.50
	802.11ax RU 484T_40/80 MHz	All Channel	12.00	13.00
	802.11ax RU 484T_160 MHz	All Channel	11.50	12.50
	802.11ax RU 996T_80 MHz	All Channel	12.00	13.00
	802.11ax RU 996T_160 MHz	All Channel	11.50	12.50
	802.11ax RU 2x996T_160 MHz	All Channel	11.50	12.50

Note: WLAN 5 GHz only supports MIMO mode.

2.4.3 #Maximum Bluetooth Output Power

Band	Mode	Channel	Output Power (dB m)	
			Target	Max. Allowed
Bluetooth	BDR(GFSK)	All Channel	12.30	13.30
	EDR ($\pi/4$ DQPSK)	All Channel	9.50	10.50
	EDR(8DPSK)	All Channel	9.50	10.50
	LE 1M,2M (GFSK)	All Channel	9.00	10.00

2.5 SAR Test Configurations

2.5.1 #DUT Antenna Locations

The device is a 2-in-1 model that operations as a laptop when folded 90 degrees and as a tablet when folded 360 degrees.

When in tablet mode the overall dimensions of this device are > 20 cm.

A diagram showing the location of the device antennas can be found in Appendix D.

2.5.2 SAR Test Exclusion Considerations (Tablet Mode)

Device's each edge positions consider SAR test exclusion according to Appendix B.4 of KDB 447498 D04 Interim General RF exposure guide.

If each antenna operate to between 0.3 GHz to 6GHz, and Antenna to DUT surface's distance are within 0.5cm to 40cm, then below Formula can use for SAR test exclusion.

$$P_{th}(mW) = ERP_{20cm}(mW) = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

$$P_{th}(mW) = \begin{cases} ERP_{20cm}(d/20cm)^x & d \leq 20 \text{ cm} \\ ERP_{20cm} & 20cm < d \leq 40cm \end{cases}$$

where

$$x = -\log_{10} \left(\frac{60}{ERP_{20cm}\sqrt{f}} \right)$$

And f is in GHz, d is the separation distance (cm), and ERP_{20cm} is per Formula.

[Max Tablet]

Ant.	Band	Freq. [MHz]	Output Power		ERP	Separation distances [mm]					SAR Exemption				
			dBm	mW		Rear	Left	Right	Top	Bot.	Rear	Left	Right	Top	Bottom
Main	2.4 GHz	2462	19.50	89	43	5	112	165	192	5	3 mW Measure	1015 EXEMPT	2122 EXEMPT	2831 EXEMPT	3 mW Measure
	U-NII-2A	5320	19.00	79	113	5	112	165	192	5	1 mW Measure	921 EXEMPT	2055 EXEMPT	2812 EXEMPT	1 mW Measure
	U-NII-2C	5720	19.00	79	128	5	112	165	192	5	1 mW Measure	913 EXEMPT	2048 EXEMPT	2810 EXEMPT	1 mW Measure
	U-NII-3	5825	19.00	79	128	5	112	165	192	5	1 mW Measure	911 EXEMPT	2047 EXEMPT	2810 EXEMPT	1 mW Measure
Aux	2.4 GHz	2462	19.50	89	70	5	78	200	192	5	3 mW Measure	510 EXEMPT	3060 EXEMPT	2831 EXEMPT	3 mW Measure
	U-NII-2A	5320	19.00	79	117	5	78	200	192	5	1 mW Measure	436 EXEMPT	3060 EXEMPT	2812 EXEMPT	1 mW Measure
	U-NII-2C	5720	19.00	79	111	5	78	200	192	5	1 mW Measure	429 EXEMPT	3060 EXEMPT	2810 EXEMPT	1 mW Measure
	U-NII-3	5825	19.00	79	80	5	78	200	192	5	1 mW Measure	428 EXEMPT	3060 EXEMPT	2810 EXEMPT	1 mW Measure
	Bluetooth	2480	13.30	21	17	5	78	200	192	5	3 mW Measure	509 EXEMPT	3060 EXEMPT	2831 EXEMPT	3 mW Measure

[Tablet-Grip Sensor]

Ant.	Band	Freq. [MHz]	Output Power		ERP	Separation distances [mm]					SAR Exemption				
			dBm	mW		Rear	Left	Right	Top	Bot.	Rear	Left	Right	Top	Bottom
Main	2.4 GHz	2462	13.00	20	10	5	112	165	192	5	3 mW Measure	1015 EXEMPT	2122 EXEMPT	2831 EXEMPT	3 mW Measure
	U-NII-2A	5320	13.00	20	28	5	112	165	192	5	1 mW Measure	921 EXEMPT	2055 EXEMPT	2812 EXEMPT	1 mW Measure
	U-NII-2C	5720	13.00	20	32	5	112	165	192	5	1 mW Measure	913 EXEMPT	2048 EXEMPT	2810 EXEMPT	1 mW Measure
	U-NII-3	5825	13.00	20	32	5	112	165	192	5	1 mW Measure	911 EXEMPT	2047 EXEMPT	2810 EXEMPT	1 mW Measure
Aux	2.4 GHz	2462	13.00	20	16	5	78	200	192	5	3 mW Measure	510 EXEMPT	3060 EXEMPT	2831 EXEMPT	3 mW Measure
	U-NII-2A	5320	13.00	20	29	5	78	200	192	5	1 mW Measure	436 EXEMPT	3060 EXEMPT	2812 EXEMPT	1 mW Measure
	U-NII-2C	5720	13.00	20	28	5	78	200	192	5	1 mW Measure	429 EXEMPT	3060 EXEMPT	2810 EXEMPT	1 mW Measure
	U-NII-3	5825	13.00	20	20	5	78	200	192	5	1 mW Measure	428 EXEMPT	3060 EXEMPT	2810 EXEMPT	1 mW Measure
	Bluetooth	2480	13.30	21	17	5	78	200	192	5	3 mW Measure	509 EXEMPT	3060 EXEMPT	2831 EXEMPT	3 mW Measure

Note 1: For distances < 5mm, a distance of 5mm is used to determine SAR exclusion and estimated SAR value.

Note 2: Output power is the worst of the maximum rated power (including tune-up or manufacturing tolerances) and ERP(E.I.R.P – 2.15 dB).

Note 3: The values listed in "SAR Exemption" are the output power thresholds for which SAR measurements are required.

The value is calculated by KDB 447498 D04 and must be less than the threshold for SAR exemption.

Note 4: Formulas round separation distance to nearest mm and power to nearest mW before calculating thresholds or exemption values.

Device Type	Ant. / Band		Device Edge for SAR Testing (Rear View)					
			Front	Rear	Left Edge	Right Edge	Top	Bottom
Notebook	WLAN & Bluetooth		No	Yes	No	No	No	No
Tablet	Main	WLAN 2.4 GHz	No	Yes	No	No	No	Yes
		U-NII-2A	No	Yes	No	No	No	Yes
		U-NII-2C	No	Yes	No	No	No	Yes
		U-NII-3	No	Yes	No	No	No	Yes
	Aux	WLAN 2.4 GHz	No	Yes	No	No	No	Yes
		U-NII-2A	No	Yes	No	No	No	Yes
		U-NII-2C	No	Yes	No	No	No	Yes
		U-NII-3	No	Yes	No	No	No	Yes
		Bluetooth	No	Yes	No	No	No	Yes



Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0027-B Page (14) of (137)	
--	---	---

2.6 SAR Test Methods and Procedures

The tests documented in this report were performed in accordance with IEEE 1528-2013 and the following published KDB procedures:

- IEEE 1528-2013
- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D04 General RF Exposure Guidance v01
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 616217 D04 SAR for laptop and tablets v01r02
- April 2019 TCB Workshop Notes (Tissue Simulating Liquids)
- November 2019 TCB Workshop Notes (Hall Effect and Gravity Sensor Guidance)
- April 2022 TCB Workshop Notes (SPLSR)



3. Specific Absorption Rate

3.1 Introduction

The SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational / controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement Procedures

4.1 SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan & Zoom Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot and Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly. Area Scan & Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.

* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

5. SAR Measurement Configurations

5.1 Body-supported device

A typical example of a body supported device is a wireless enabled laptop device that among other orientations may be supported on the thighs of a sitting user. To represent this orientation, the device shall be positioned with its base against the flat phantom. Other orientations may be specified by the manufacturer in the user instructions. If the intended use is not specified, the device shall be tested directly against the flat phantom in all usable orientations.

The screen portion of the device shall be in an open position at a 90° angle as seen in Figure 1 (left side), or at an operating angle specified for intended use by the manufacturer in the operating instructions. Where a body supported device has an integral screen required for normal operation, then the screen-side will not need to be tested if the antenna(s) integrated in it ordinarily remain(s) 200 mm from the body. Where a screen mounted antenna is present, the measurement shall be performed with the screen against the flat phantom as shown in Figure 1 (right side), if operating the screen against the body is consistent with the intended use.

Other devices that fall into this category include table type portable computers and credit card transaction authorisation terminals, point-of sale and/or inventory terminals. Where these devices may be torso or limb-supported, the same principles for body-supported devices are applied.

The example in Figure 2) shows a tablet form factor portable computer for which SAR should be separately assessed with

- d) each surface and
- e) the separation distances

positional against the flat phantom that correspond to the intended use as specified by the manufacturer. If the intended use is not specified in the user instructions, the device shall be tested directly the flat phantom in all usable orientations.



Figure 1. Notebook

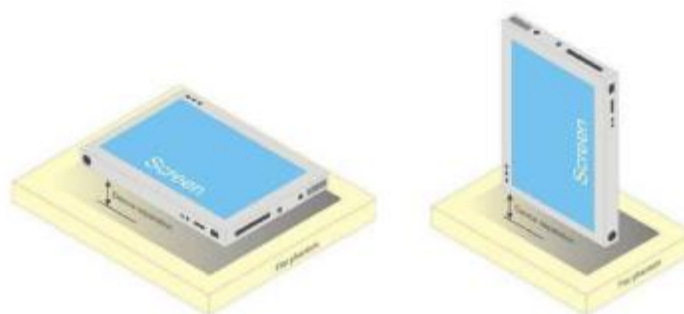


Figure 2. Tablet form factor portable computer

6. RF Exposure Limits

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Partial Peak SAR ¹⁾ (Partial)	1.60 mW/g	8.00 mW/g
Partial Average SAR ²⁾ (Whole Body)	0.08 mW/g	0.40 mW/g
Partial Peak SAR ³⁾ (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

- 1) The spatial Peak value of the SAR averaged over any 1g gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- 2) The spatial Average value of the SAR averaged over the whole body.
- 3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

7. FCC SAR General Measurement Procedures

7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. Test highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

7.2 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

7.2.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 – 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

7.2.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

7.2.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency point requirements.

7.2.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.

7.2.5 2.4 GHz SAR Test Requirement

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following.

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM are additionally evaluated for SAR if highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

7.2.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz band, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0027-B Page (21) of (137)	
--	---	---

7.2.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output power is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements.

7.2.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.


8. RF Average Conducted Output Power

8.1 WLAN Average Conducted Output Power

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported.

Power Measurement Setup

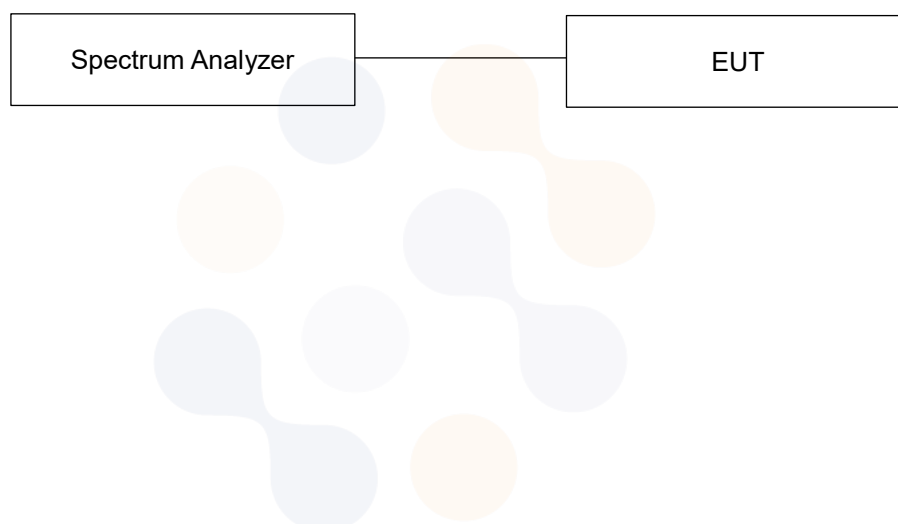

8.1.1 WLAN Average Conducted Output Power (Max Notebook & Tablet Mode)

Band	Mode	Freq. [MHz]	Channel	Conducted Powers (dBm)	
				Aux	MIMO
WLAN 2.4 GHz	802.11b	2 412.0	1	18.76	20.95
		2 437.0	6	19.01	21.49
		2 462.0	11	19.12	21.15
U-NII-1	802.11a	5 180.0	36	-	18.36
		5 200.0	40	-	18.37
		5 220.0	44	-	18.07
		5 240.0	48	-	18.04
U-NII-2A	802.11a	5 260.0	52	-	17.97
		5 280.0	56	-	18.00
		5 300.0	60	-	18.52
		5 320.0	64	-	18.53
U-NII-2C	802.11a	5 500.0	100	-	18.21
		5 600.0	120	-	18.43
		5 620.0	124	-	18.10
		5 720.0	144	-	17.64
U-NII-3	802.11a	5 745.0	149	-	18.76
		5 785.0	157	-	18.03
		5 825.0	165	-	18.20

8.1.2 WLAN Average Conducted Output Power (Tablet Mode-Grip Sensor)

Band	Mode	Freq. [MHz]	Channel	Conducted Powers (dBm)	
				Aux	MIMO
WLAN 2.4 GHz	802.11b	2 412.0	1	11.51	14.96
		2 437.0	6	12.04	15.57
		2 462.0	11	11.74	15.07
U-NII-1	802.11ac (VHT80)	5 210.0	42	-	11.23
U-NII-2A	802.11ac (VHT80)	5 290.0	58	-	11.05
U-NII-2C	802.11ac (VHT80)	5 530.0	106	-	11.11
		5 610.0	122	-	11.06
		5 690.0	138	-	11.54
U-NII-3	802.11ac (VHT80)	5 775.0	155	-	11.07

8.2 Bluetooth Average Conducted Output Power (Max Notebook Mode & Tablet Mode)

Mode	Freq. [MHz]	Channel	Conducted Powers
			(dBm)
BDR_DH5 (1 Mbps)	2 402.0	0	12.20
	2 441.0	39	13.21
	2 480.0	78	11.67
BDR_2DH5 (2 Mbps)	2 402.0	0	9.06
	2 441.0	39	9.92
	2 480.0	78	8.57
BDR_3DH5 (3 Mbps)	2 402.0	0	9.06
	2 441.0	39	9.92
	2 480.0	78	8.58
LE (1 Mbps 37)	2 402.0	0	8.78
	2 441.0	39	9.76
	2 480.0	78	8.13
LE (1 Mbps 255)	2 402.0	0	8.56
	2 440.0	19	9.56
	2 480.0	39	8.09
LE (2 Mbps 37)	2 402.0	0	8.66
	2 440.0	19	9.67
	2 480.0	39	8.06
LE (2 Mbps 255)	2 402.0	0	8.58
	2 440.0	19	9.59
	2 480.0	39	8.03


8.3 Bluetooth Duty Factor

Mode	Packet	On Time (ms)	On-Off Time (ms)	Duty Cycle (%)	Duty Cycle Compensate Factor
BDR(GFSK)	DH5	2.88	3.75	0.768	1.302

8.4 Bluetooth Power Measurement Setup



8.5 Bluetooth Duty Plot

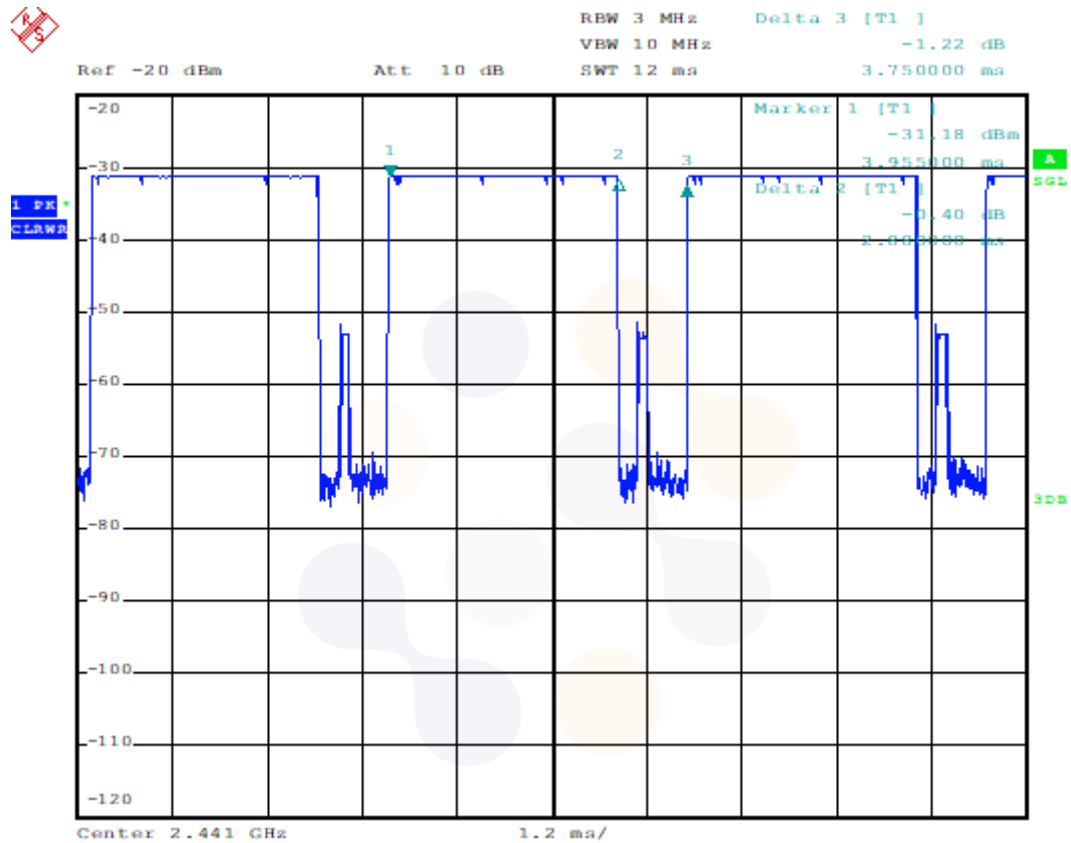

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0027-B Page (26) of (137)	
---	---	---

9. System Verification

9.1 Measurement date and environment

Shield room	Date	Environment	
		Temperature (°C)	Humidity (%)
8F - 5	2023-04-13	22.0 ~ 22.3	40.8
	2023-04-14	22.1 ~ 22.5	40.5
8F - 4	2023-05-13	20.7 ~ 20.9	49.3

9.2 Tissue Verification

The dielectric properties for this Tissue Simulant Liquids were measured by using the SPEAG Model DAK3.5 Dielectric Probe in conjunction with Agilent E5071B Network Analyzer (300 kHz – 8 500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in Table 1. For the SAR measurement given in this report. The temperature variation of the Tissue Simulant Liquids was $(22 \pm 2) ^\circ\text{C}$.

Freq. (MHz)	Limit/Measured		Permittivity (ρ)	Conductivity (σ)	Temp. (°C)
2 450.0	Recommended Limit		$39.20 \pm 5 \%$ (37.24~41.16)	$1.80 \pm 5 \%$ (1.71~1.89)	22 ± 2
	Measured	2023-04-13	39.70	1.84	20.90
	Measured	2023-05-13	38.09	1.75	20.86
5 250.0	Recommended Limit		$35.95 \pm 5 \%$ (34.15~37.75)	$4.71 \pm 5 \%$ (4.47~4.95)	22 ± 2
	Measured	2023-04-14	36.10	4.73	20.79
5 600.0	Recommended Limit		$35.50 \pm 5 \%$ (33.73~37.28)	$5.07 \pm 5 \%$ (4.82~5.32)	22 ± 2
	Measured	2023-04-14	35.30	5.14	20.79
5 750.0	Recommended Limit		$35.35 \pm 5 \%$ (33.58~37.12)	$5.22 \pm 5 \%$ (4.96~5.48)	22 ± 2
	Measured	2023-04-14	35.10	5.33	20.79


<Table 1. Measurement result of Tissue electric parameters>

9.3 Test System Verification

The microwave circuit arrangement for system verification is sketched below picture.

The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the Table 2.

During the tests, the ambient temperature of the laboratory was in the range $(22 \pm 2) ^\circ\text{C}$, the relative humidity was in the range $(50 \pm 20)\%$ and the liquid depth Above the ear/grid reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

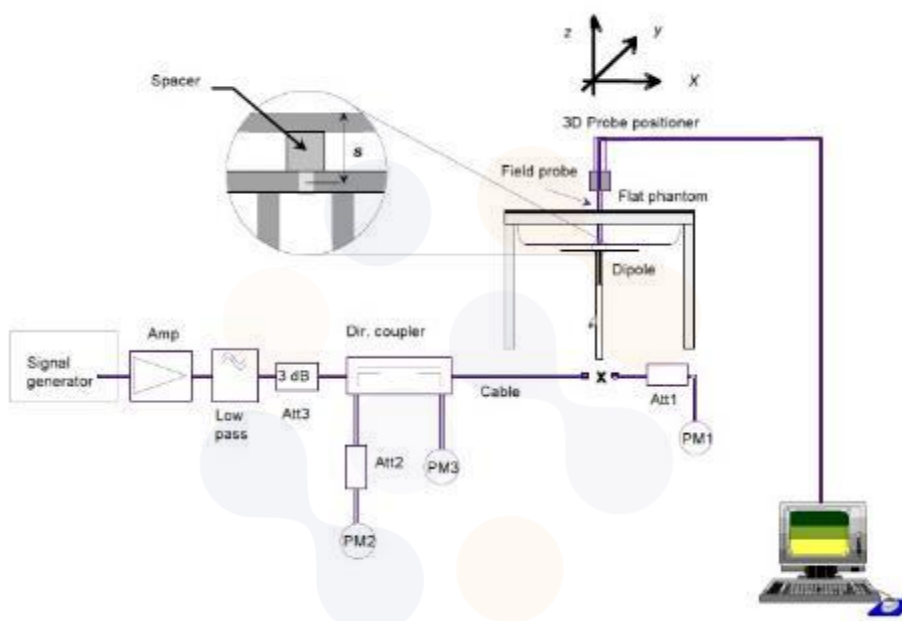

Verification Kit	Probe S/N	Frequency (MHz)	Tissue Type	Date		Limit/Measured (Normalized to 1 W)
D2450V2 SN: 1091	EX3DV4 SN: 7772	2450.0	HSL	Recommended Limit 1g (Normalized)		52.20 ± 10 % (46.98~57.42)
				Measured	2023-04-13	54.20
D2450V2 SN: 895	EX3DV4 SN: 3697			Recommended Limit 1g (Normalized)		52.30 ± 10 % (47.07~57.53)
				Measured	2023-05-13	53.30
D5GHzV2 SN: 1293	EX3DV4 SN: 7772	5 250.0	HSL	Recommended Limit 1g (Normalized)		80.50 ± 10 % (72.45~88.55)
				Measured	2023-04-14	84.40
D5GHzV2 SN: 1293	EX3DV4 SN: 7772	5 600.0	HSL	Recommended Limit 1g (Normalized)		82.60 ± 10 % (74.34~90.86)
				Measured	2023-04-14	85.60
D5GHzV2 SN: 1293	EX3DV4 SN: 7772	5 750.0	HSL	Recommended Limit 1g (Normalized)		79.20 ± 10 % (71.28~87.12)
				Measured	2023-04-14	76.90

<Table 2. System Verification Result>

10. SAR Test Results

10.1 Standalone Body SAR Test Results (Notebook Mode)

WLAN 2.4 GHz											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensat Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11b	Aux	Rear	0	2 462.0	19.12	19.50	1.091	1.011	0.191	0.211	1
	MIMO	Rear	0	2 437.0	21.49	22.50	1.262	1.012	0.387	0.494	2

U-NII-2A											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensat Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11a	MIMO	Rear	0	5 320.0	18.53	19.00	1.114	1.062	0.227	0.269	3

U-NII-2C											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensat Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11a	MIMO	Rear	0	5 600.0	18.43	19.00	1.140	1.062	0.213	0.258	4

U-NII-3											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensat Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11a	MIMO	Rear	0	5 745.0	18.76	19.00	1.057	1.062	0.171	0.192	5

Bluetooth											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensat Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
BDR_DH5	Aux	Rear	0	2 441.0	13.21	13.30	1.021	1.016	0.033	0.034	6

10.2 Standalone Body SAR Test Results (Tablet Mode)

WLAN 2.4 GHz											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensation Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11b	Grip Sensor off										
	Aux	Rear	7	2 462.0	19.12	19.50	1.091	1.011	0.617	0.681	
		Bottom	7	2 462.0	19.12	19.50	1.091	1.011	0.150	0.165	
	MIMO	Rear	7	2 437.0	21.49	22.50	1.262	1.012	0.600	0.766	
		Bottom	7	2 437.0	21.49	22.50	1.262	1.012	0.229	0.292	
	Grip Sensor on										
	Aux	Rear	0	2 437.0	12.04	13.00	1.247	1.011	0.742	0.935	
		Rear	0	2 462.0	11.74	13.00	1.337	1.011	0.733	0.991	7
		Bottom	0	2 437.0	12.04	13.00	1.247	1.011	0.157	0.198	
	MIMO	Rear	0	2 437.0	15.57	16.00	1.104	1.012	0.786	0.878	
		Rear	0	2 462.0	15.07	16.00	1.239	1.012	0.871	1.092	8
		Bottom	0	2 437.0	15.57	16.00	1.104	1.012	0.221	0.247	
	Repeated SAR Test										
	MIMO	Rear	0	2 462.0	15.07	16.00	1.239	1.012	0.829	1.039	

U-NII-2A											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensation Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11a	Grip Sensor off										
	MIMO	Rear	7	5 320.0	18.53	19.00	1.114	1.062	0.397	0.470	
		Bottom	7	5 320.0	18.53	19.00	1.114	1.062	1.000	1.183	9
802.11ac VHT-80	Grip Sensor on										
	MIMO	Rear	0	5 290.0	11.05	13.00	1.567	1.160	0.341	0.620	
		Bottom	0	5 290.0	11.05	13.00	1.567	1.062	0.279	0.464	
802.11a	Repeated SAR Test										
	MIMO	Bottom	7	5 320.0	18.53	19.00	1.114	1.062	0.967	1.144	

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0027-B Page (30) of (137)	 
---	--	---

U-NII-2C											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensat Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11a	Grip Sensor off										
	MIMO	Rear	7	5 600.0	18.43	19.00	1.140	1.062	0.647	0.783	
		Bottom	7	5 600.0	18.43	19.00	1.140	1.062	0.652	0.789	10
802.11ac VHT-80	Grip Sensor on										
	MIMO	Rear	0	5 690.0	11.54	13.00	1.400	1.160	0.406	0.659	
		Bottom	0	5 690.0	11.54	13.00	1.400	1.062	0.257	0.382	

U-NII-3											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensat Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11a	Grip Sensor off										
	MIMO	Rear	7	5 745.0	18.76	19.00	1.057	1.062	0.623	0.699	
		Bottom	7	5 745.0	18.76	19.00	1.057	1.062	0.640	0.718	11
802.11ac VHT-80	Grip Sensor on										
	MIMO	Rear	0	5 775.0	11.07	13.00	1.560	1.160	0.354	0.641	
		Bottom	0	5 775.0	11.07	13.00	1.560	1.062	0.214	0.355	

Bluetooth											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensat Factor	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
BDR_DH5	Aux	Rear	0	2 441.0	13.21	13.30	1.021	1.016	0.589	0.611	12
		Bottom	0	2 441.0	13.21	13.30	1.021	1.016	0.144	0.149	

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0027-B Page (31) of (137)	
--	---	---

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Liquid tissue depth was at least 15 cm.
5. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
6. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.

WLAN & Bluetooth Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
2. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance.
3. When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
4. When the specified maximum output power is the same for both UNII Band1 and UNII Band 2A, begins SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is $\leq 1.2\text{W/kg}$, SAR is not required for UNII band1 $> 1.2\text{W/kg}$, both bands should be tested independently for SAR.
5. When the maximum reported 1g averaged SAR is $\leq 0.8\text{ W/kg}$, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was $\leq 1.20\text{ W/kg}$ for 1g evaluations or all test channels were measured.
6. WLAN & Bluetooth transmission was verified using a spectrum analyzer.


11. Simultaneous Transmission

11.1 #Simultaneous Transmission Configurations

No.	Scenario	Operation
1	WLAN 2.4 GHz MIMO	Yes
2	WLAN 5 GHz MIMO	Yes
3	WLAN 5 GHz MIMO + Bluetooth Aux	Yes
4	WLAN 6 GHz MIMO	Yes
5	WLAN 6 GHz MIMO + Bluetooth Aux	Yes
6	WLAN 2.4 GHz Aux + WLAN 5 GHz + WLAN 6 GHz (RSDB scenario)	No

Notes:

- It does not transmit simultaneously the Bluetooth and WLAN 2.4 GHz.
- It is to use the Bluetooth and WLAN same antenna path.

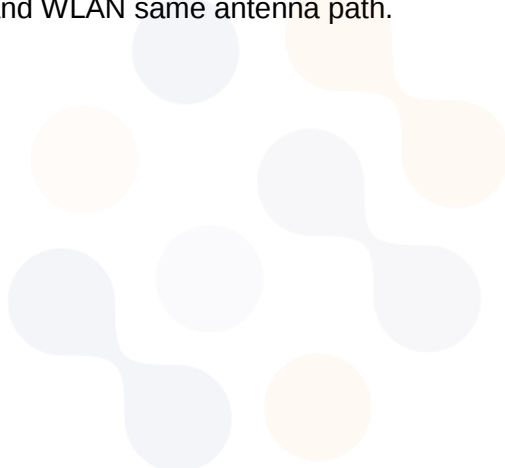

11.2 Estimated SAR (Tablet Mode)

When standalone SAR is not required to be measured, SAR must also be estimated to determine simultaneous transmission SAR test exclusion.

[Tablet Mode]

Ant.	Band	Freq. [MHz]	Output Power			Separation distances [mm]					Estimated 1g SAR Value (W/kg)				
			dBm	mW	ERP [mW]	Rear	Left	Right	Top	Bottom	Rear	Left	Right	Top	Bottom
Main	2.4 GHz	2462	19.50	89	43	5	112	165	192	5	Measure	0.035	0.017	0.013	Measure
	U-NII-2A	5320	19.00	79	113	5	112	165	192	5	Measure	0.049	0.022	0.016	Measure
	U-NII-2C	5720	19.00	79	128	5	112	165	192	5	Measure	0.056	0.025	0.018	Measure
	U-NII-3	5825	19.00	79	128	5	112	165	192	5	Measure	0.056	0.025	0.018	Measure
Aux	2.4 GHz	2462	19.50	89	70	5	78	200	192	5	Measure	0.070	0.012	0.013	Measure
	U-NII-2A	5320	19.00	79	117	5	78	200	192	5	Measure	0.107	0.015	0.017	Measure
	U-NII-2C	5720	19.00	79	111	5	78	200	192	5	Measure	0.103	0.015	0.016	Measure
	U-NII-3	5825	19.00	79	80	5	78	200	192	5	Measure	0.075	0.010	0.011	Measure
	Bluetooth	2480	13.30	21	17	5	78	200	192	5	Measure	0.017	0.003	0.003	Measure

[Tablet Mode-Grip Sensor]

Band / Ant.		Freq. [MHz]	Output Power			Separation distances [mm]					Estimated 1g SAR Value (W/kg)				
			dBm	mW	ERP [mW]	Rear	Left	Right	Top	Bottom	Rear	Left	Right	Top	Bottom
Main	2.4 GHz	2462	13.00	20	20	5	112	165	192	5	Measure	0.008	0.004	0.003	Measure
	U-NII-2A	5320	13.00	20	28	5	112	165	192	5	Measure	0.012	0.005	0.004	Measure
	U-NII-2C	5720	13.00	20	32	5	112	165	192	5	Measure	0.014	0.006	0.005	Measure
	U-NII-3	5825	13.00	20	32	5	112	165	192	5	Measure	0.014	0.006	0.005	Measure
Aux	2.4 GHz	2462	13.00	20	16	5	78	200	192	5	Measure	0.016	0.003	0.003	Measure
	U-NII-2A	5320	13.00	20	29	5	78	200	192	5	Measure	0.027	0.004	0.004	Measure
	U-NII-2C	5720	13.00	20	28	5	78	200	192	5	Measure	0.026	0.004	0.004	Measure
	U-NII-3	5825	13.00	20	20	5	78	200	192	5	Measure	0.019	0.003	0.003	Measure
	Bluetooth	2480	13.30	21	17	5	78	200	192	5	Measure	0.017	0.003	0.003	Measure

Notes:

- For distances < 5mm, a distance of 5mm is used to determine SAR exclusion and estimated SAR value.
- Output power is the worst of the maximum rated power (including tune-up or manufacturing tolerances) and ERP(E.I.R.P – 2.15 dB).
- Estimated SAR values were calculated as $SAR_{est} = 0.4 * P_{ant}/P_{th}$ [W/kg] according to the April, 2022 TCB workshop. (P_{th} is Section 2.6.2 Value, P_{ant} is Maximum Output power.)
- Formulas round separation distance to nearest mm and power to nearest mW before calculating estimated SAR or determining if SAR is excluded.

11.3 Simultaneous Transmission Analysis(standalone)

Exposure Condition (Body) /Position		WLAN 2.4 GHz	WLAN 5 GHz	WLAN 6 GHz	Bluetooth	
		MIMO	MIMO	MIMO		
		【①】	【②】	【③】		
Notebook	Rear	0.494	0.269	0.205	0.034	
Tablet	Rear	1.092	0.783	0.886	0.611	
	Left	0.070	0.107	-	0.017	
	Right	0.017	0.025	-	0.003	
	Top	0.013	0.018	-	0.003	
	Bottom	0.292	1.183	0.277	0.149	
Summation						
Exposure Condition /Position		【①】	【②】	【②+④】	【③】	【③+④】
Body (Notebook)	Rear	0.494	0.269	0.303	0.205	0.239
Body (Tablet)	Rear	1.092	0.783	1.394	0.886	1.497
	Left	0.070	0.107	0.124	-	0.017
	Right	0.017	0.025	0.028	-	0.003
	Top	0.013	0.018	0.021	-	0.003
	Bottom	0.292	1.183	1.332	0.277	0.426

Notes:

- Simultaneous transmission SAR test exclusion considerations
Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneously transmitting antenna. When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. Per KDB Publication 447498 D04.
- When the sum of SAR1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR1g 1.6 W/kg), the SPLSR procedures is not required. When the sum of SAR1g is greater than the SAR limit (SAR1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.
- For WLAN 6GHz value, refer to the Report No. KR23-SPF0028.

12. SAR Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg.
- 2) **When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.**
- 3) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

RF Exposure Conditions	Band	Mode	Ant.	Frequency (MHz)	EUT Position	Separation Distance (mm)	Measured 1 g SAR (W/kg)	Repeated 1 g SAR (W/kg)	Ratio
Tablet	WLAN 2.4 GHz	802.11b	MIMO	2 462.0	Rear	0	0.871	0.829	1.05
	U-NII-2A	802.11ac (VHT80)	MIMO	5 320.0	Bottom	7	1.000	0.967	1.03

13. Measurement Uncertainty

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Standard 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.



Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0027-B Page (37) of (137)	
---	--	---

14. Test Equipment Information

Test Platform	SPEAG DASY8 System			
Version	DASY8: 16.2.2.1588			
Location	Eurofins KCTL Co.,Ltd., 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea			
Manufacture	SPEAG			
Hardware Reference				
Equipment	Model	Serial Number	Date of Calibration	Due date of next Calibration
Shield Room	-	8F - 4	-	-
	-	8F - 5	-	-
DASY6 Robot	TX60 Lspeag	F/19/0007289/A/001	-	-
DASY8 Robot	TX2-60L	F/22/0040786/A/001	-	-
Phantom	2mm Oval Phantom ELI5	2098	-	-
	ELI Phantom V8.0	2182	-	-
Mounting Device	Laptop Holder	-	-	-
DAE	DAE4	1756	2022-11-07	2023-11-07
	DAE4	1759	2022-11-07	2023-11-07
Probe	EX3DV4	3697	2023-04-13	2024-04-13
	EX3DV4	7772	2022-11-14	2023-11-14
MXA SIGNAL ANALYZER	N9020A	MY520900024	2022-11-22	2023-11-22
ESG Vector Signal Generator	E4438C	MY42080845	2023-02-09	2024-02-09
Dual Power Meter	EPM-442A	GB37480680	2022-05-02	2023-05-02
	E4419B	GB40202503	2022-11-21	2023-11-21
Power Sensor	8481H	2703A11902	2022-05-02	2023-05-02
	8481H	3318A18090	2022-05-02	2023-05-02
	E9301A	US39210857	2022-11-21	2023-11-21
	E9301A	US39212236	2022-11-21	2023-11-21
Attenuator	8491A	21552	2022-05-02	2023-05-02
	8491A	35560	2022-05-02	2023-05-02
	8491A	35934	2022-05-02	2023-05-02
	PE7005-10	2228-4	2022-12-15	2023-12-15
	PE7005-10	2228-5	2022-12-15	2023-12-15
	PE7005-10	2228-6	2022-12-15	2023-12-15
Power Amplifier	AMP2027	10010	2022-05-02	2023-05-02
Power Amplifier	AMP2027ADB	10005	2022-07-06	2023-07-06

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0027-B Page (38) of (137)	
---	---	---

Hardware Reference				
Equipment	Model	Serial Number	Date of Calibration	Due date of next Calibration
Directional Coupler	772D	MY46151145	2022-11-21	2023-11-21
Dual Directional Coupler	772D	2839A00719	2023-02-09	2024-02-09
Low Pass Filter	PE8721	2205	2022-12-14	2023-12-14
	PE8725	2144	2022-12-14	2023-12-14
	PE87FL1016	2213	2022-12-14	2023-12-14
Dipole Validation Kits	D2450V2	895	2022-07-15	2024-07-15
	D2450V2	1091	2022-10-14	2024-10-14
	D5GHzV2	1293	2023-01-25	2025-01-25
ENA Series Network Analyzer	E5071B	MY42403524	2023-02-09	2024-02-09
Dielectric Assessment Kit	DAK-3.5	1078	2022-05-30	2023-05-30
Humidity/Temp	PC-5400TRH	PC-5400TRH-1	2022-11-21	2023-11-21
	MHB-382SD	46301	2023-02-14	2024-02-14
Bluetooth Tester	TESCOM	TC-3000C	2022-07-11	2023-07-11
Spectrum Analyzer	FSP7	100289	2022-12-08	2023-12-08

15. Test System Verification Results

Eurofins KCTL Co.,Ltd.

Measurement Report for D2450V2 - SN1091, FRONT, D2450, UID 0 -, Channel 50 (2450.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D2450V2 - SN1091, Speag	10.0 x 10.0 x 290.0	1091	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 10.00	D2450	CW, 0--	2450.0, 50	6.94	1.84	39.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2182	HBBL-600-10000 , 2023- Apr-13	EX3DV4 - SN7772, 2022-11- 14	DAE4 Sn1756, 2022-11- 07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023- 04-13	2023-04-13
psSAR1g [W/kg]	5.30	5.42
psSAR8g [W/kg]	2.81	2.79
psSAR10g [W/kg]	2.55	2.52
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		-0.00

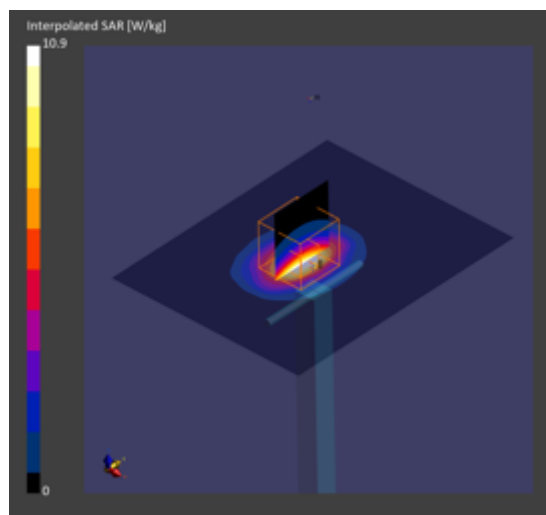

Date: 5/13/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [2450 MHz Verification Input Power 100 mW 2023-05-13.da5:0](#)

DUT: Dipole 2450 MHz D2450V2, Type: D2450V2, Serial: D2450V2 - SN:895

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 38.087$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697;ConvF(7.2, 7.2, 7.2) @ 2450 MHz; Calibrated: 4/13/2023
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1759; Calibrated: 11/7/2022
- Phantom: ELI V8.0_Left; Type: QD OVA 004 Ax; Serial: 2098
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/2450 MHz Verification Input Power 100 mW 2023-05-13/Area Scan (10x11x1):

Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 6.68 W/kg

Configuration/2450 MHz Verification Input Power 100 mW 2023-05-13/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 73.29 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 11.1 W/kg

SAR(1 g) = 5.33 W/kg; SAR(10 g) = 2.49 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 8.97 W/kg

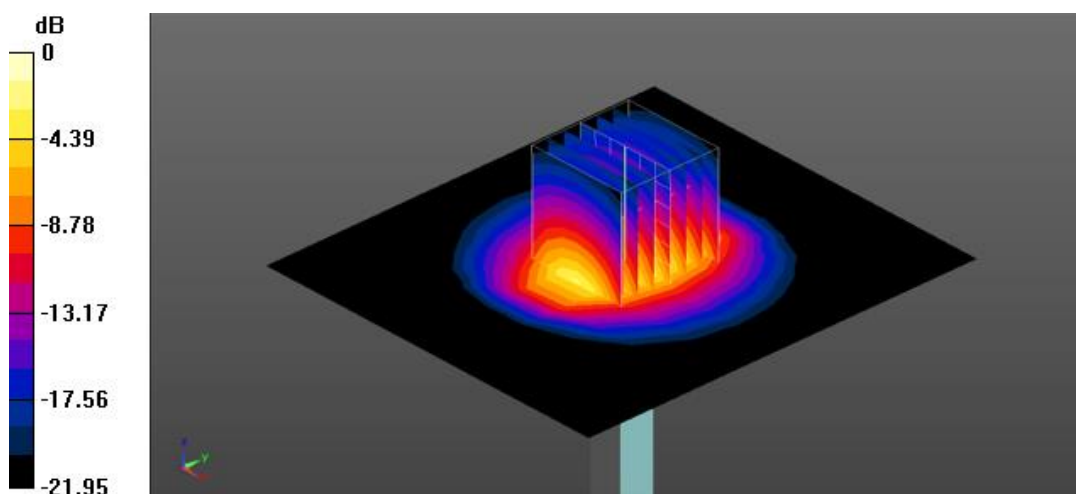

0 dB = 8.97 W/kg = 9.53 dBW/kg

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0027-B Page (41) of (137)	
---	--	---

Eurofins KCTL Co.,Ltd.

Measurement Report for D5GHzV2 - SN1293, FRONT, D5GHz, UID 0 -, Channel 25 (5250.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D5GHzV2 - SN1293,	10.0 x 10.0 x 300.0	1293	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 10.00	D5GHz	CW, 0--	5250.0, 25	5.05	4.73	36.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2182	HBBL-600-10000 , 2023-Apr-14	EX3DV4 - SN7772, 2022-11-14	DAE4 Sn1756, 2022-11-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-04-14	2023-04-14
psSAR1g [W/kg]	7.71	8.44
psSAR8g [W/kg]	2.73	2.86
psSAR10g [W/kg]	2.36	2.46
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		-0.00

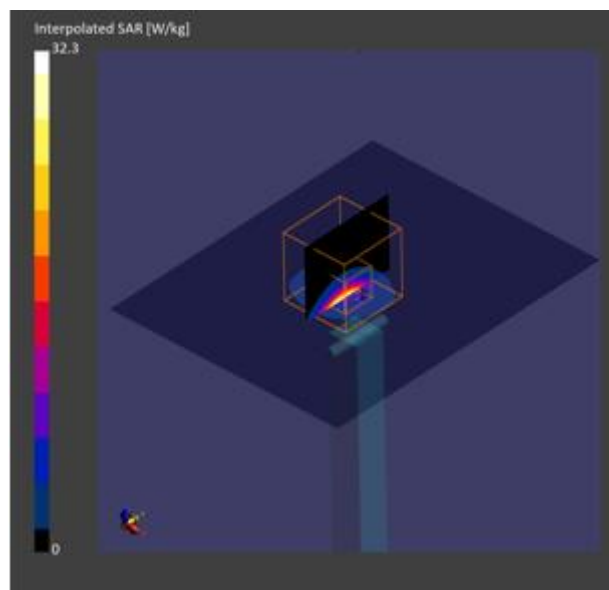

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0027-B Page (42) of (137)	
---	--	---

Eurofins KCTL Co.,Ltd.

Measurement Report for D5GHzV2 - SN1293, FRONT, D5GHz, UID 0 -, Channel 60 (5600.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D5GHzV2 - SN1293,	10.0 x 10.0 x 300.0	1293	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 10.00	D5GHz	CW, 0--	5600.0, 60	4.46	5.14	35.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2182	HBBL-600-10000 , 2023-Apr-14	EX3DV4 - SN7772, 2022-11-14	DAE4 Sn1756, 2022-11-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-04-14	2023-04-14
psSAR1g [W/kg]	7.83	8.56
psSAR8g [W/kg]	2.74	2.90
psSAR10g [W/kg]	2.37	2.49
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		0.02

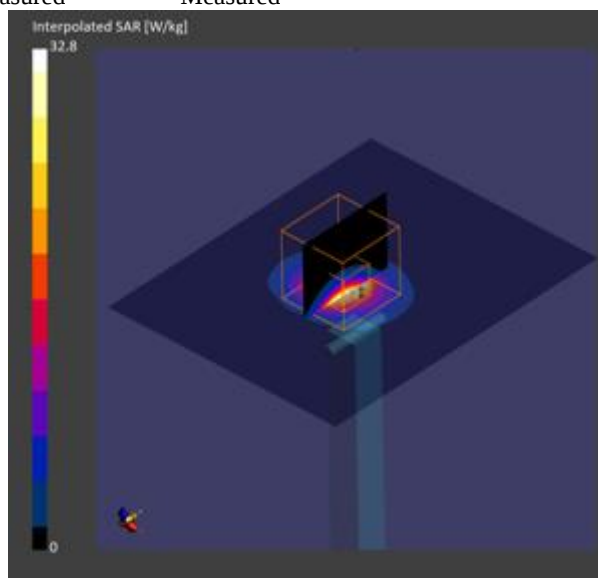

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0027-B Page (43) of (137)	
---	--	---

Eurofins KCTL Co.,Ltd.

Measurement Report for D5GHzV2 - SN1293, FRONT, D5GHz, UID 0 -, Channel 75 (5750.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D5GHzV2 - SN1293,	10.0 x 10.0 x 300.0	1293	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 10.00	D5GHz	CW, 0--	5750.0, 75	4.53	5.33	35.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2182	HBBL-600-10000 , 2023-Apr-14	EX3DV4 - SN7772, 2022-11-14	DAE4 Sn1756, 2022-11-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-04-14	2023-04-14
psSAR1g [W/kg]	7.06	7.69
psSAR8g [W/kg]	2.46	2.60
psSAR10g [W/kg]	2.12	2.23
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		0.03

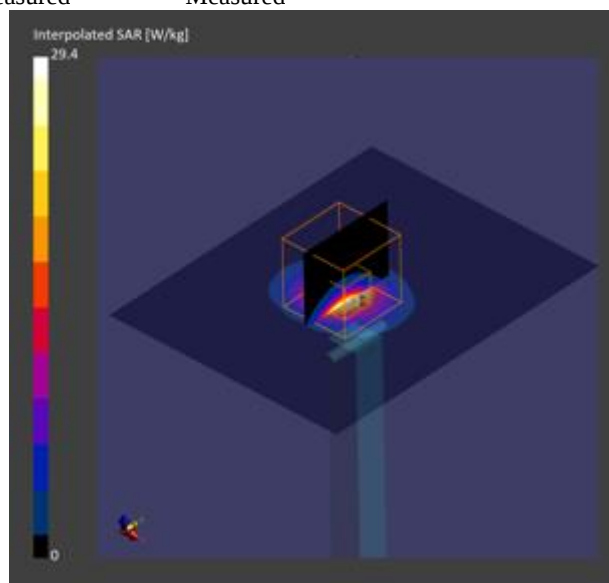

16. Test Results

1)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP935QNA, BACK, D2450, 802.11b, UID 0 -, Channel 11 (2462.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP935QNA, SAMSUNG	302.0 x 202.0 x 11.0	KQZZ930W300395M	Laptop + Aux

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	D2450	CW, 0--	2462.0, 11	6.94	1.85	39.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2182	HBBL-600-10000 , 2023-Apr-13	EX3DV4 - SN7772, 2022-11-14	DAE4 Sn1756, 2022-11-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 240.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-04-13	2023-04-13
psSAR1g [W/kg]	0.182	0.191
psSAR8g [W/kg]	0.098	0.096
psSAR10g [W/kg]	0.089	0.087
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		0.02

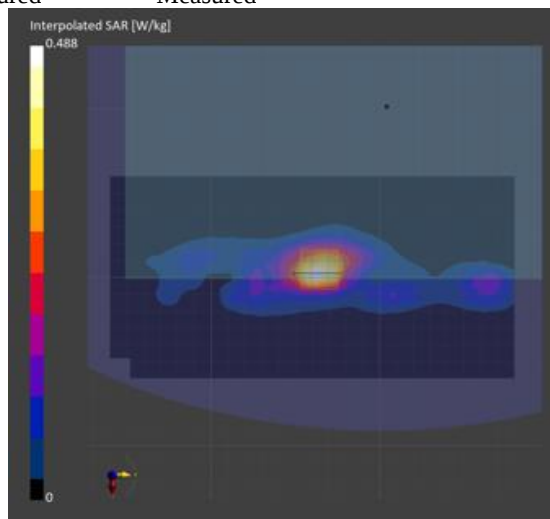

2)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP935QNA, BACK, D2450, 802.11b, UID 0 -, Channel 6 (2437.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP935QNA, SAMSUNG	302.0 x 202.0 x 11.0	KQZZ930W300395M	Laptop + MIMO

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	D2450	CW, 0--	2437.0, 6	6.94	1.83	39.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2182	HBBL-600-10000 , 2023-Apr-13	EX3DV4 - SN7772, 2022-11-14	DAE4 Sn1756, 2022-11-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 264.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-04-13	2023-04-13
psSAR1g [W/kg]	0.373	0.387
psSAR8g [W/kg]	0.205	0.203
psSAR10g [W/kg]	0.187	0.185
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		-0.02

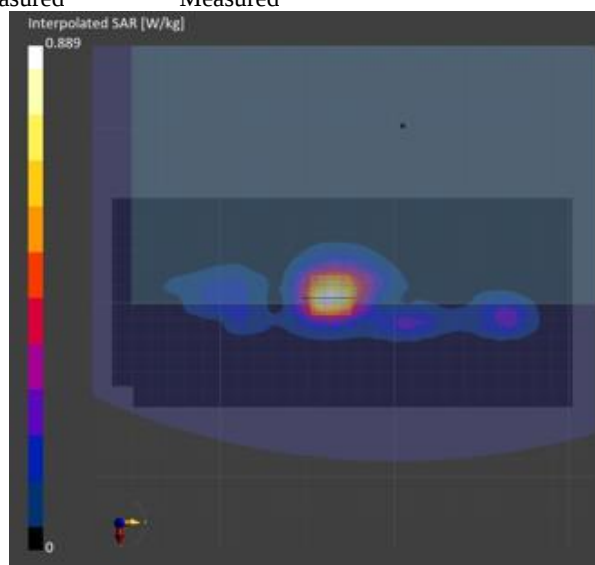

3)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP935QNA, BACK, D5GHz, 802.11a, UID 0 -, Channel 64 (5320.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP935QNA, SAMSUNG	302.0 x 202.0 x 11.0	KQZZ930W300395M	Laptop + MIMO

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	D5GHz	CW, 0--	5320.0, 64	5.05	4.82	35.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2182	HBBL-600-10000 , 2023-Apr-14	EX3DV4 - SN7772, 2022-11-14	DAE4 Sn1756, 2022-11-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	140.0 x 220.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-04-14	2023-04-14
psSAR1g [W/kg]	0.206	0.227
psSAR8g [W/kg]	0.073	0.075
psSAR10g [W/kg]	0.064	0.064
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		0.05

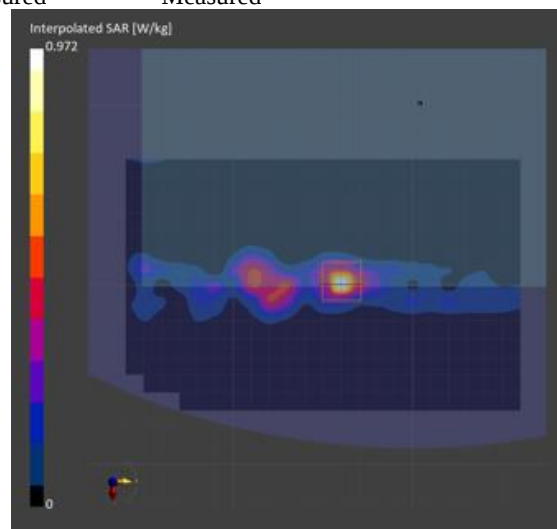

4)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP935QNA, BACK, D5GHz, 802.11a, UID 0 -, Channel 120 (5600.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP935QNA, SAMSUNG	302.0 x 202.0 x 11.0	KQZZ930W300395M	Laptop + MIMO

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	D5GHz	CW, 0--	5600.0, 120	4.46	5.14	35.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2182	HBBL-600-10000 , 2023-Apr-14	EX3DV4 - SN7772, 2022-11-14	DAE4 Sn1756, 2022-11-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 220.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-04-14	2023-04-14
psSAR1g [W/kg]	0.181	0.213
psSAR8g [W/kg]	0.070	0.071
psSAR10g [W/kg]	0.063	0.061
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		-0.14

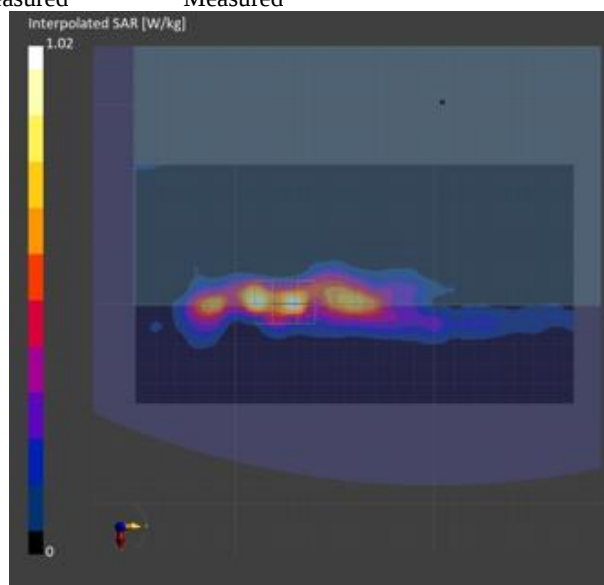

5)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP935QNA, BACK, Custom Band, 802.11a, UID 0 -, Channel 149 (5745.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP935QNA, SAMSUNG	302.0 x 202.0 x 11.0	KQZZ930W300395M	Laptop + MIMO

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 0--	5745.0, 149	4.53	5.33	35.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2182	HBBL-600-10000 , 2023-Apr-14	EX3DV4 - SN7772, 2022-11-14	DAE4 Sn1756, 2022-11-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 220.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-04-14	2023-04-14
psSAR1g [W/kg]	0.160	0.171
psSAR8g [W/kg]	0.065	0.055
psSAR10g [W/kg]	0.059	0.047
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		0.05

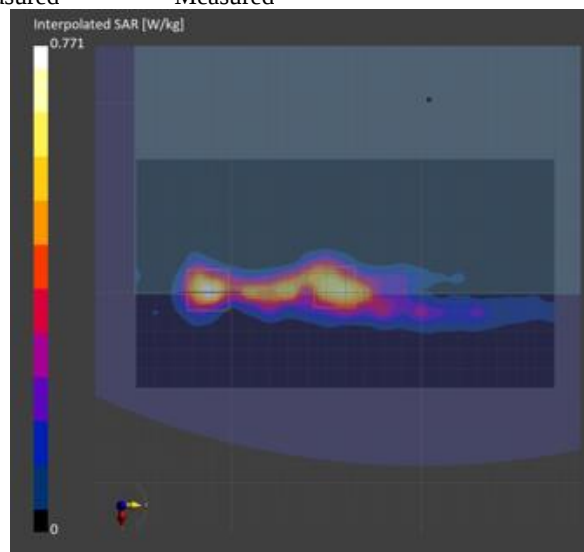

6)

Date: 5/13/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [1. Bluetooth BDR_DH5_Notebook.da53:0](#)

DUT: NP935QNA, Type: Notebook, Serial: KQZZ930W300395M

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.30167
Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.738$ S/m; $\epsilon_r = 38.102$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697;ConvF(7.2, 7.2, 7.2) @ 2441 MHz; Calibrated: 4/13/2023
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1759; Calibrated: 11/7/2022
- Phantom: ELI V8.0_Left; Type: QD OVA 004 Ax; Serial: 2098
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Bluetooth_BDR_DH5_CH39_Rear_0 mm/Area Scan (11x13x1): Measurement grid:
dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0654 W/kg

Configuration/Bluetooth_BDR_DH5_CH39_Rear_0 mm/Zoom Scan (7x8x7)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.329 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0940 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.013 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0659 W/kg

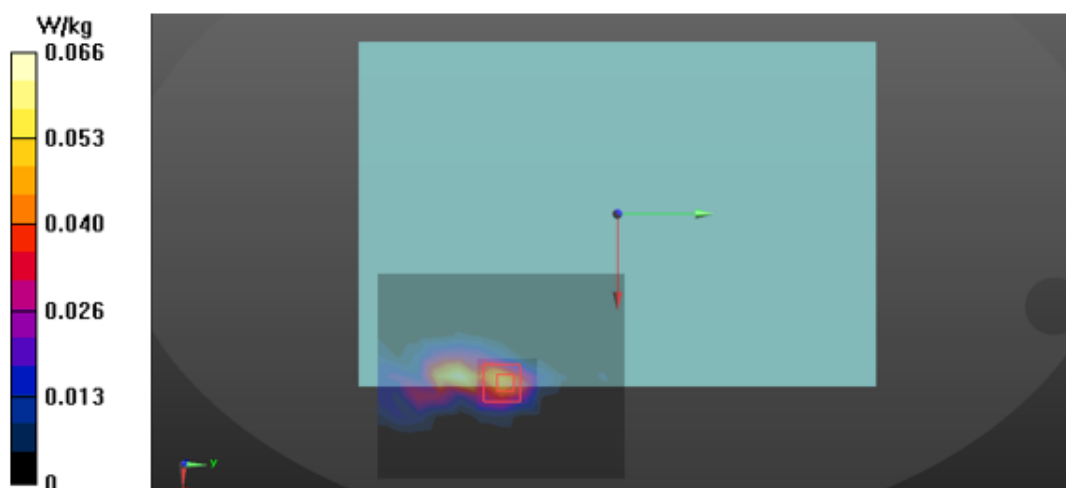

7)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP935QNA, BACK, D2450, 802.11b, UID 0 -, Channel 11 (2462.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP935QNA, SAMSUNG	302.0 x 202.0 x 11.0	KQZZ930W300395M	Tablet + Aux

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	D2450	CW, 0--	2462.0, 11	6.94	1.85	39.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2182	HBBL-600-10000 , 2023-Apr-13	EX3DV4 - SN7772, 2022-11-14	DAE4 Sn1756, 2022-11-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 240.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-04-13	2023-04-13
psSAR1g [W/kg]	0.591	0.733
psSAR8g [W/kg]	0.296	0.306
psSAR10g [W/kg]	0.266	0.270
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		0.02

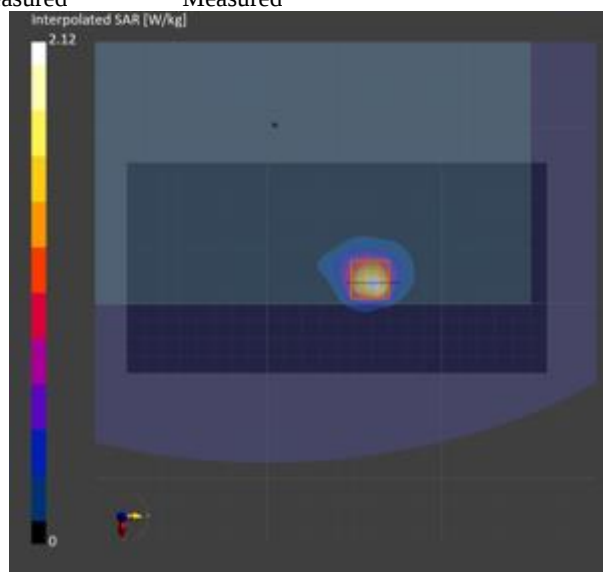

8)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP935QNA, BACK, D2450, 802.11b, UID 0 -, Channel 11 (2462.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP935QNA, SAMSUNG	302.0 x 202.0 x 11.0	KQZZ930W300395M	Tablet + MIMO

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	D2450	CW, 0--	2462.0, 11	6.94	1.85	39.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2182	HBBL-600-10000 , 2023-Apr-13	EX3DV4 - SN7772, 2022-11-14	DAE4 Sn1756, 2022-11-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 240.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-04-13	2023-04-13
psSAR1g [W/kg]	0.703	0.871
psSAR8g [W/kg]	0.353	0.363
psSAR10g [W/kg]	0.317	0.320
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		0.11

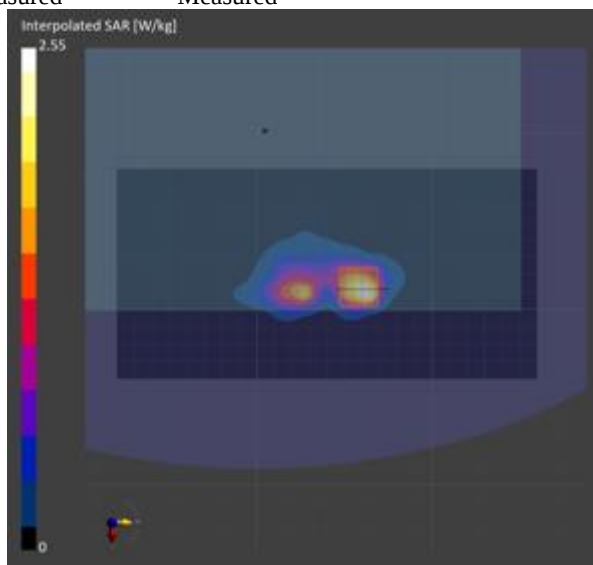

9)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP935QNA, EDGE BOTTOM, D5GHz, 802.11a, UID 0 -, Channel 64 (5320.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP935QNA, SAMSUNG	302.0 x 202.0 x 11.0	KQZZ930W300395M	Tablet + MIMO

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 7.00	D5GHz	CW, 0--	5320.0, 64	5.05	4.82	35.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2182	HBBL-600-10000 , 2023-Apr-14	EX3DV4 - SN7772, 2022-11-14	DAE4 Sn1756, 2022-11-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 140.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-04-14	2023-04-14
psSAR1g [W/kg]	1.05	1.00
psSAR8g [W/kg]	0.356	0.354
psSAR10g [W/kg]	0.309	0.308
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		-0.02

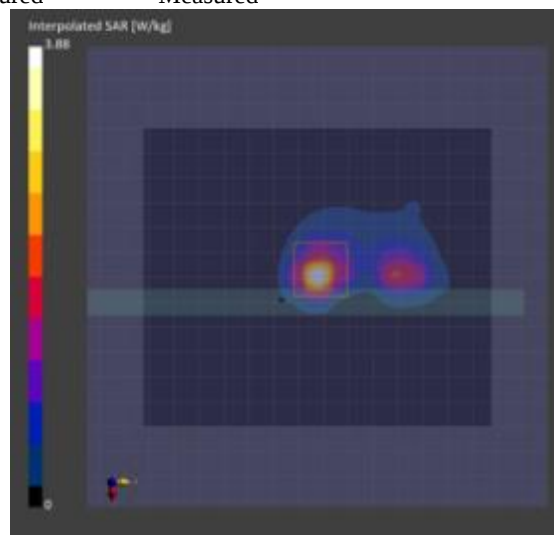

10)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP935QNA, EDGE BOTTOM, D5GHz, 802.11a, UID 0 -, Channel 120 (5600.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP935QNA, SAMSUNG	302.0 x 202.0 x 11.0	KQZZ930W300395M	Tablet + MIMO

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 7.00	D5GHz	CW, 0--	5600.0, 120	4.46	5.14	35.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2182	HBBL-600-10000 , 2023-Apr-14	EX3DV4 - SN7772, 2022-11-14	DAE4 Sn1756, 2022-11-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	140.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-04-14	2023-04-14
psSAR1g [W/kg]	0.616	0.652
psSAR8g [W/kg]	0.222	0.220
psSAR10g [W/kg]	0.194	0.190
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		-0.06

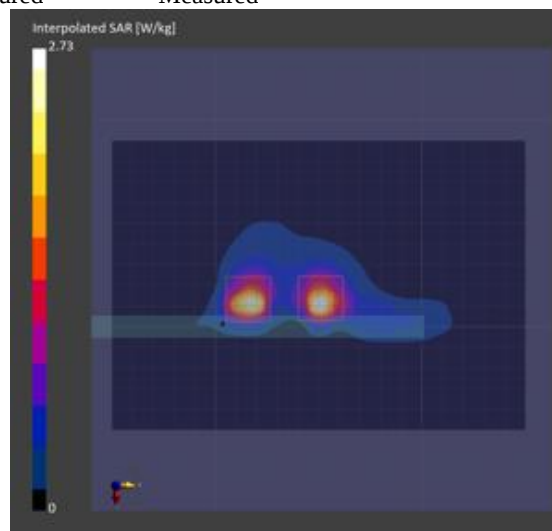

11)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP935QNA, EDGE BOTTOM, Custom Band, 802.11a, UID 0 -, Channel 149 (5745.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP935QNA, SAMSUNG	302.0 x 202.0 x 11.0	KQZZ930W300395M	Tablet + MIMO

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 7.00	Custom Band	CW, 0--	5745.0, 149	4.53	5.33	35.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2182	HBBL-600-10000 , 2023-Apr-14	EX3DV4 - SN7772, 2022-11-14	DAE4 Sn1756, 2022-11-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	140.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-04-14	2023-04-14
psSAR1g [W/kg]	0.608	0.640
psSAR8g [W/kg]	0.221	0.224
psSAR10g [W/kg]	0.194	0.194
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		-0.02

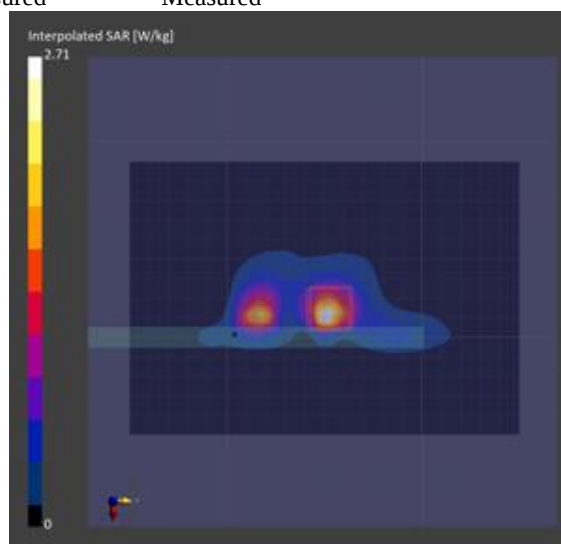

12)

Date: 5/13/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [2. Bluetooth BDR DH5 Tablet.da53:0](#)

DUT: NP935QNA, Type: Tablet, Serial: KQZZ930W300395M

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.30167
 Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.738$ S/m; $\epsilon_r = 38.102$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697;ConvF(7.2, 7.2, 7.2) @ 2441 MHz; Calibrated: 4/13/2023
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1759; Calibrated: 11/7/2022
- Phantom: ELI V8.0 Left; Type: QD OVA 004 Ax; Serial: 2098
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Bluetooth_BDR_DH5_CH39_Rear_0 mm/Area Scan (11x12x1): Measurement grid:
 dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.848 W/kg

Configuration/Bluetooth_BDR_DH5_CH39_Rear_0 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid:
 dx=5mm, dy=5mm, dz=5mm


Reference Value = 27.06 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.226 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.14 W/kg

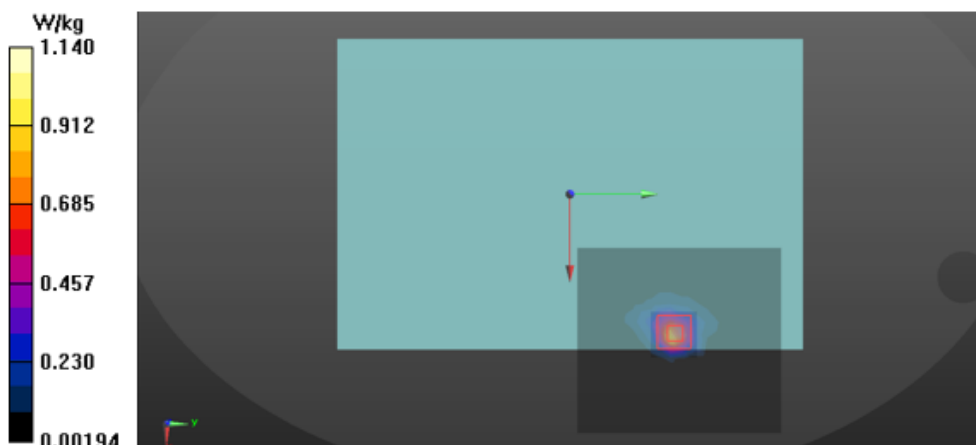

Appendixes List

Appendix A	A.1 Probe Calibration certificate (EX3DV4_3697) A.2 Probe Calibration certificate (EX3DV4_7772) A.3 Dipole Calibration certificate (D2450V2_895) A.4 Dipole Calibration certificate (D2450V2_1091) A.5 Dipole Calibration certificate (D5GHzV2_1293)
Appendix B	SAR Tissue Specification
Appendix C	Power Reduction Verification
Appendix D	#Antenna Location & Distance
Appendix E	EUT Photo
Appendix F	Test Setup Photo