

EMC

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Mobile Phone

ISSUED TO
vivo Mobile Communication Co., Ltd.

No.168 Jinghai East Rd., Chang'an, Dongguan, Guangdong, China

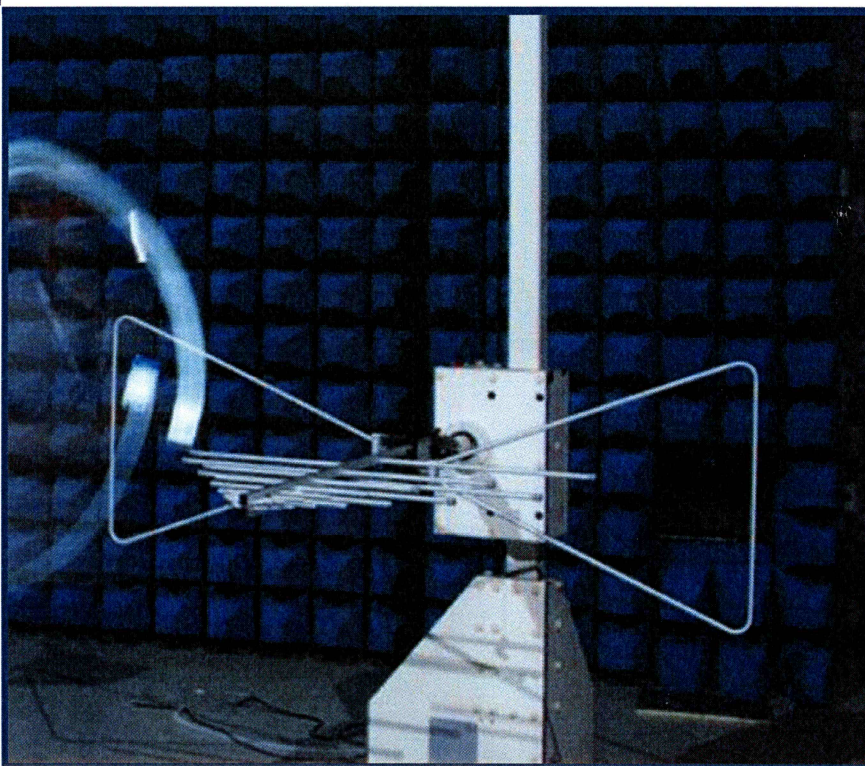

Tested by: Liu Zhenxiang
Liu Zhenxiang

Date: Aug. 16, 2021

Approved by: Liao Jianming

Liao Jianming
(Technical Director)

Date: Aug. 16, 2021

Report No.: BL-SZ2170620-401
EUT Name: Mobile Phone
Model Name: V2110
Brand Name: vivo
Test Standard: 47 CFR Part 15 Subpart B
FCC ID: 2AUCY-V2110

Test Conclusion: Pass
Test Date: Jul. 20, 2021 ~ Jul. 22, 2021
Date of Issue: Aug. 16, 2021

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Aug. 16, 2021</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	4
1.1	Identification of the Testing Laboratory.....	4
1.2	Identification of the Responsible Testing Location.....	4
1.3	Laboratory Condition.....	4
1.4	Announce.....	4
2	PRODUCT INFORMATION.....	5
2.1	Applicant Information.....	5
2.2	Manufacturer Information.....	5
2.3	Factory Information.....	5
2.4	General Description for Equipment under Test (EUT).....	5
2.5	Ancillary Equipment.....	6
2.6	Technical Information.....	6
3	SUMMARY OF TEST RESULTS.....	7
3.1	Test Standards.....	7
3.2	Verdict.....	7
3.3	Test Uncertainty.....	7
4	GENERAL TEST CONFIGURATIONS.....	8
4.1	Test Environments.....	8
4.2	Test Equipment List.....	8
4.3	Test Enclosure list.....	10
4.4	Test Configurations.....	11
4.5	Test Setups.....	12
4.6	Test Conditions.....	14
5	TEST ITEMS.....	15
5.1	Emission Tests.....	15
ANNEX A	TEST RESULTS.....	17

A.1	Radiated Emission	17
A.2	Conducted Emission	25
ANNEX B	TEST SETUP PHOTOS	29
ANNEX C	EUT EXTERNAL PHOTOS	29
ANNEX D	EUT INTERNAL PHOTOS.....	29

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	30% to 60%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report refer to the BALUN report mode v7.0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	vivo Mobile Communication Co., Ltd.
Address	No.168 Jinghai East Rd., Chang'an, Dongguan, Guangdong, China

2.2 Manufacturer Information

Manufacturer	vivo Mobile Communication Co., Ltd.
Address	No.168 Jinghai East Rd., Chang'an, Dongguan, Guangdong, China

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	Mobile Phone
Model Name Under Test	V2110
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	MP_0.1
Software Version	PD2138GF_EX_A_3.6.11
Dimensions (Approx.)	164.26mm*76.08mm*8.0mm
Weight (Approx.)	180g

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	vivo
	Model No.	B-S2
	Serial No.	N/A
	Capacity	Minimal Capacity: 4910mAh Typical capacity: 5000mAh
	Rated Voltage	3.87 V
	Limit Charge Voltage	4.45 V
	Manufacturer	Huizhou Desay Battery Co., Ltd
Ancillary Equipment 2	Adapter	
	Brand Name	vivo
	Model No.	V1820L0B1-US (US Plug)
	Serial No.	N/A
	Rated Input	100-240 V~, 0.5 A, 50/60 Hz
	Rated Output	5.0 V- 2.0 A, 9.0 V- 2.0 A
	Manufacturer	Dongguan Aohai Technology Co., Ltd
Ancillary Equipment 3	USB Cable 1	
	Model No.	BK-C-32
	Length (Approx.)	1 m
Ancillary Equipment 4	Earphone	
	Model No.	XE160
	Length (Approx.)	1 m
Note 1: Letter in () means plug type.		

2.6 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EGPRS 850/1900 MHz 3G Network WCDMA/HSDPA/HSUPA Band 2/4/5 4G Network FDD LTE Band 2/4/5/7/12/17/66 TDD LTE Band 38/41 LTE CA Uplink (UL): CA_7C, CA_38C, CA_41C Bluetooth (BR+EDR+BLE) 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80) U-NII-1/2A/2C/3, GPS, GLONASS, BDS, Galileo, FM Receiver
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

The Highest Speed of Processor	2.0 GHz
--------------------------------	---------

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B (10-1-19 Edition)	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low- Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Result
1	Radiated Emission	15.109	Pass	Annex A .1
2	Conducted Emission, AC Ports	15.107	Pass	Annex A .2

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	2.96 dB
Radiated emissions (30 MHz-1 GHz)	3.67 dB
Radiated emissions (1 GHz-18 GHz)	3.57 dB
Radiated emissions (18 GHz-40 GHz)	5.16 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

Environment Parameter	Selected Values During Tests			
	Temperature	Voltage	Relative Humidity	Ambient Pressure
Normal Temperature, Normal Voltage (NTNV)	20°C to 25°C	AC 120 V/60 Hz	30% to 60%	100 kPa to 102 kPa

4.2 Test Equipment List

Radiated Emission Test For Frequency Below 1 GHz (10 m)						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2021.06.01	2022.05.31	☐
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	9168-0883	2020.05.11	2022.05.10	☐
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.08.08	2021.08.07	☐
Test Software	BALUN	BL410_E	V19.918	--	--	☐

Radiated Emission Test For Frequency Below 1 GHz (3 m)						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2020.09.18	2021.09.17	☒
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2022.07.01	☒
Anechoic Chamber	YIHENG	9m*6m*6m	N/A	2018.07.18	2022.07.17	☒
Test Software	BALUN	BL410_E	V19.918	--	--	☒

Radiated Emission Test For Frequency 1 GHz-18 GHz						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2020.09.18	2021.09.17	☒
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2022.07.01	☒
Anechoic Chamber	YIHENG	9m*6m*6m	N/A	2018.07.18	2022.07.17	☒
Test Software	BALUN	BL410_E	V19.918	--	--	☒

Conducted disturbance Test						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9010B	MY5711030 9	2021.06.01	2022.05.31	☒
LISN	SCHWARZBECK	NSLK 8127	8127-687	2021.06.08	2022.06.07	☒
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.4m*3.1m*2 .8m	N/A	2018.08.16	2021.08.15	☒
Test Software	BALUN	BL410_E	V19.918	--	--	☒

4.3 Test Enclosure list


Description	Manufacturer	Model	Serial No.	Length	Description	Use
PC	Dell	015K3N	N/A	N/A	Special Handled	☐
Laptop	Apple	A1465	N/A	N/A	N/A	☒
Printer	HP	DESKJET 1000	N/A	N/A	N/A	☐
Keyboard	Logitech	Y-BP62a	N/A	N/A	N/A	☐
Mouse	Logitech	M100	N/A	N/A	N/A	☐
USB disk	Kingston	N/A	N/A	N/A	N/A	☐
TF Card	Kingston	N/A	N/A	N/A	N/A	☒
VGA Cable	N/A	N/A	N/A	1.5 m	Shielded with core	☒
HDMI Cable	N/A	N/A	N/A	1.5 m	Shielded with core	☐
DVI Cable	N/A	N/A	N/A	1.5 m	Shielded with core	☐
Coaxial video cable	N/A	N/A	N/A	2.0 m	Shielded with core	☐
iPhone	Apple	A1586	N/A	N/A	N/A	☐
Phone	MI	M4	N/A	N/A	N/A	☐
Bluetooth Earphone	SAMSUNG	Gear Circle	N/A	N/A	N/A	☐
Wireless Communication s Test Set	R&S	CMW500	142028	N/A	Cal. Due 2022.06.07	☒
WIFI Router	TP-LINK	TL-WDR7500	N/A	N/A	N/A	☐
Earphone	N/A	OPPO	N/A	1.1 m	N/A	☐
Car Battery	Camel	55530	N/A	N/A	12 V/55 Ah	☐
Artificial load	N/A	N/A	N/A	N/A	2.5 Ω /100 W	☐
Artificial load	N/A	N/A	N/A	N/A	5 Ω /100 W	☐
Electronic Load	ITECH	IT8511	N/A	N/A	N/A	☐
USB Cable	N/A	N/A	N/A	1.5 m	Shielded with core	☐
DC Power Supply	ITECH	IT6863A	60001401068 7210006	N/A	N/A	☐
LCD Monitor	SAMSUNG	UA32C4000P	N/A	N/A	N/A	☐
LCD Monitor	Dell	U241HB	N/A	N/A	N/A	☐
RJ45 Cable	N/A	N/A	N/A	1.5 m	Shielded with core	☐

4.4 Test Configurations

Test Configurations (TC) No.	Description
TC01	<u>The GSM 850 MHz RX Test Mode</u> GSM 850 MHz RX + EUT +Adapter + USB Cable + Battery + Headset
TC02	<u>The EGPRS 850 MHz RX Test Mode</u> EGPRS 850 MHz RX + EUT +Adapter + USB Cable + Battery + Headset
TC03	<u>The WCDMA Band 5 RX Test Mode</u> WCDMA Band 5 RX + EUT +Adapter + USB Cable + Battery + Headset
TC04	<u>The FDD LTE Band 5 RX Test Mode</u> LTE Band 5 RX + EUT +Adapter + USB Cable + Battery + Headset
TC05	<u>The FDD LTE Band 12 RX Test Mode</u> LTE Band 12 RX + EUT +Adapter + USB Cable + Battery + Headset
TC06	<u>The FDD LTE Band 17 RX Test Mode</u> LTE Band 17 RX + EUT +Adapter + USB Cable + Battery + Headset
TC07	<u>The Camera Test Mode</u> EUT + Adapter + USB Cable + Battery + Headset + TF Card
TC08	<u>The Video Play Test Mode</u> EUT + Adapter + USB Cable + Battery + Headset + TF Card
TC09	<u>The USB Test Mode</u> EUT + USB Cable + Battery + Laptop+ Headset + TF Card


4.5 Test Setups

Test Setup 1

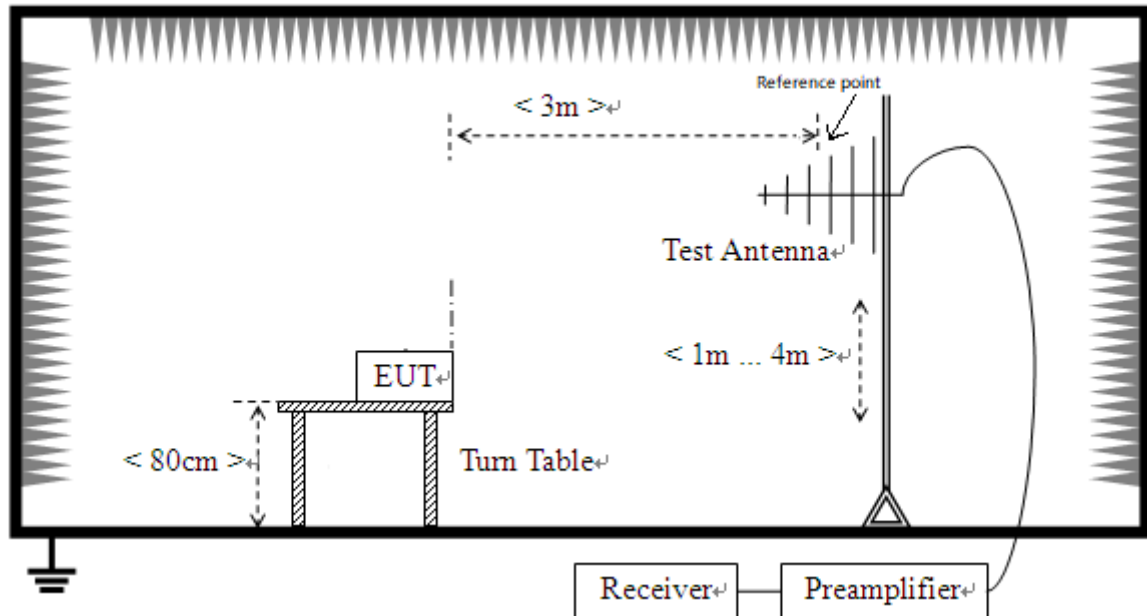


(For Radiated Emission Test (30 MHz-1 GHz))

Test Setup 2

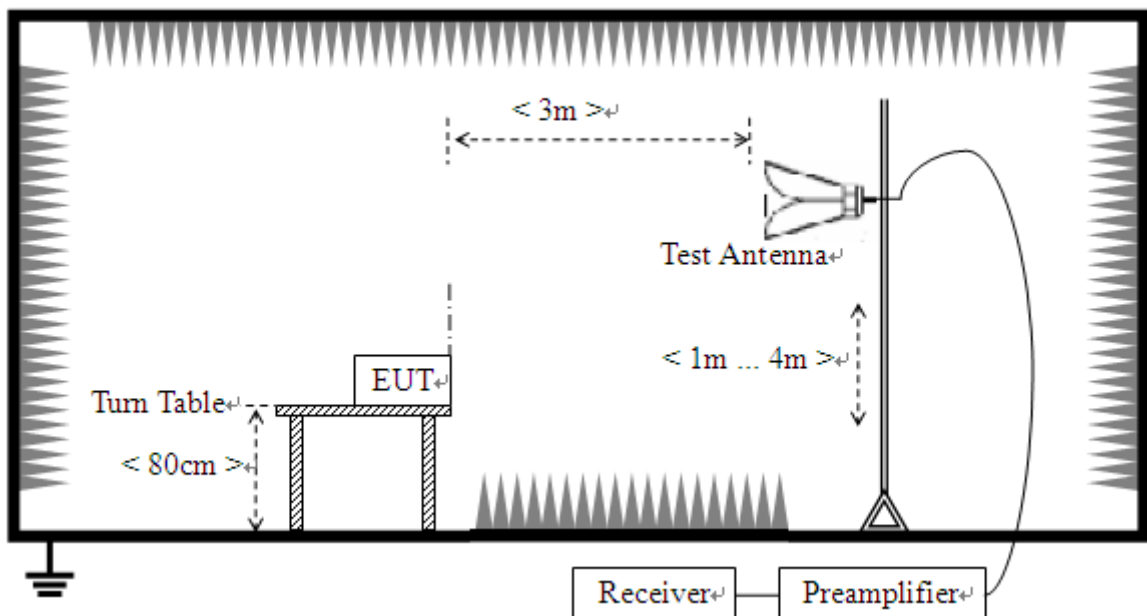

(For Radiated Emission Test (above 1 GHz))

Test Setup 3

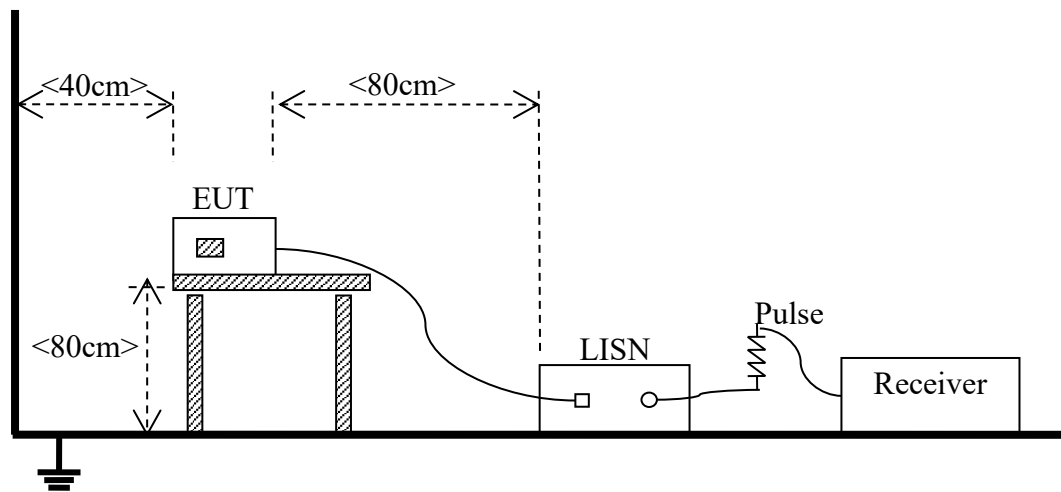

(For Conducted Emission, AC Ports Test)

4.6 Test Conditions

Test Case	Test Conditions	
Radiated Emission	Test Env.	NTNV
	Test Setup	Test Setup 1&2
	Test Configuration	TC01~TC09 ^{Note}
Conducted Emission, AC Ports	Test Env.	NTNV
	Test Setup	Test Setup 3
	Test Configuration	TC01~TC09 ^{Note}

Note: Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report. The Camera Test Mode is the worst mode in this report.

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class B (at 10 m)	Class A (at 10 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	30	90	39
88 - 216	150	43.5	33.5	150	43.5
216 - 960	200	46	36	210	46.4
Above 960	500	54	44	300	49.5

NOTE:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log$ [Field Strength ($\mu\text{V/m}$)].
- 2) In the emission tables above, the tighter limit applies at the band edges.

5.1.1.2 Test Setup

Refer to 4.5 section (test setup 1 to test setup 2) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

5.1.1.4 Test Result

Please refer to ANNEX A.1.

NOTE:

1. Results (dB $\mu\text{V/m}$) = Reading (dB μV) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Over limit = Results – Limit.

5.1.2 Conducted Emission

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.5 section test (test setup 3) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.1.2.4 Test Result

Please refer to ANNEX A.2.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Over limit = Results – Limit.

ANNEX A TEST RESULTS

A.1 Radiated Emission

Note 1: The symbol of "--" in the table which means not application.


Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The Radiated Emission from 18G-40G is noise only, do not show on the report.

Test Data and Plots


The Camera Test Mode

A.1.1 Test Antenna Vertical, 30 MHz – 1 GHz

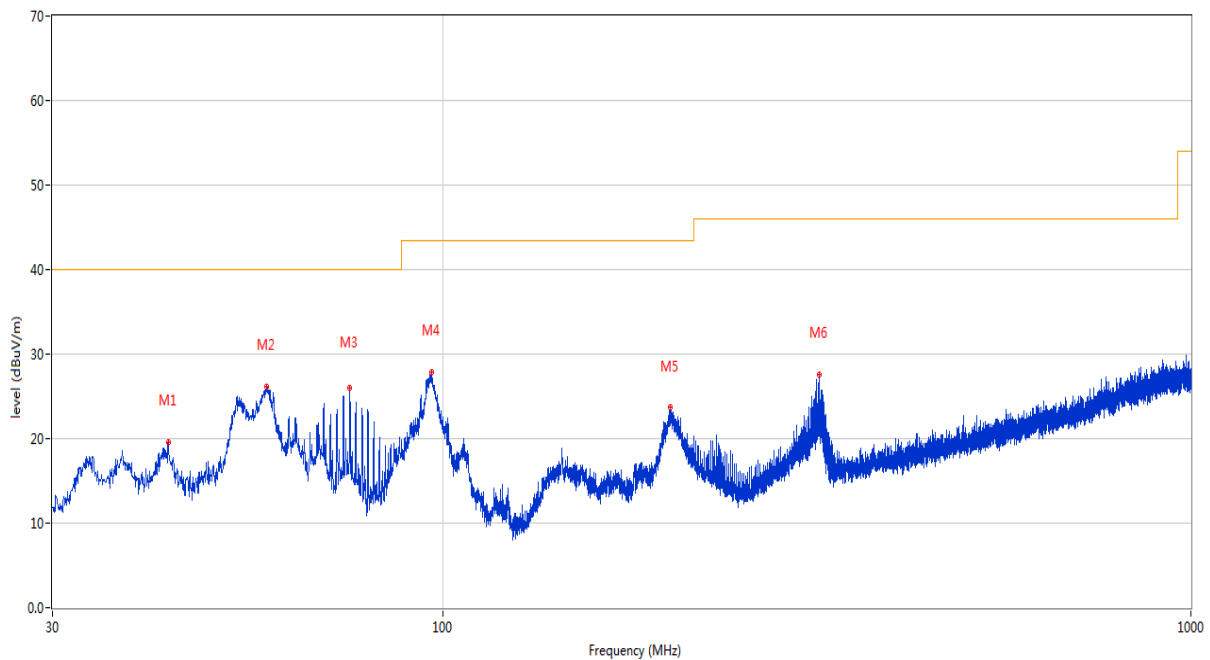


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	42.852	19.52	-23.39	40.0	-20.48	Peak	249.20	100	Vertical	Pass
2	58.081	26.19	-24.11	40.0	-13.81	Peak	245.10	100	Vertical	Pass
3	74.960	26.00	-28.54	40.0	-14.00	Peak	216.20	200	Vertical	Pass
4	96.542	27.88	-24.79	43.5	-15.62	Peak	360.00	200	Vertical	Pass
5	201.253	23.67	-23.91	43.5	-19.83	Peak	23.50	100	Vertical	Pass
6	318.575	27.59	-21.18	46.0	-18.41	Peak	63.10	100	Vertical	Pass

A.1.2 Test Antenna Horizontal, 30 MHz – 1 GHz

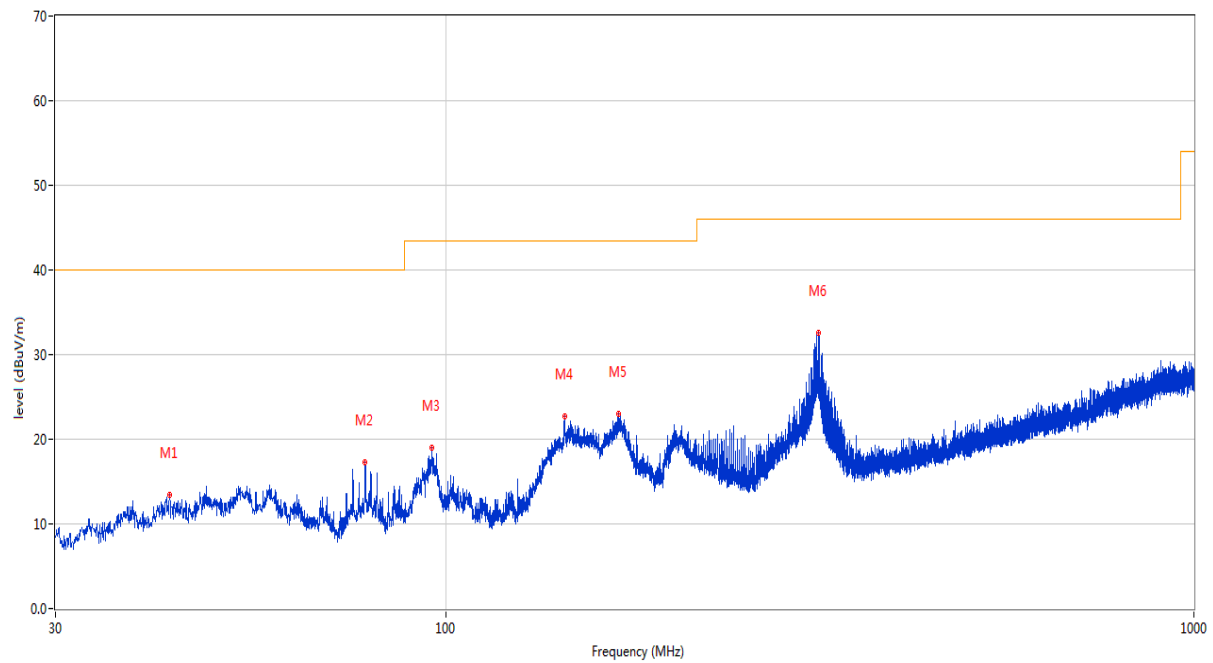


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	42.610	13.47	-23.41	40.0	-26.53	Peak	11.00	200	Horizontal	Pass
2	77.869	17.22	-28.45	40.0	-22.78	Peak	301.60	200	Horizontal	Pass
3	95.620	19.02	-24.82	43.5	-24.48	Peak	284.10	200	Horizontal	Pass
4	143.926	22.76	-27.71	43.5	-20.74	Peak	360.00	200	Horizontal	Pass
5	170.165	23.03	-26.71	43.5	-20.47	Peak	360.00	200	Horizontal	Pass
6	314.307	32.53	-21.15	46.0	-13.47	Peak	91.50	100	Horizontal	Pass

A.1.3 Test Antenna Vertical, 1 GHz – 18 GHz

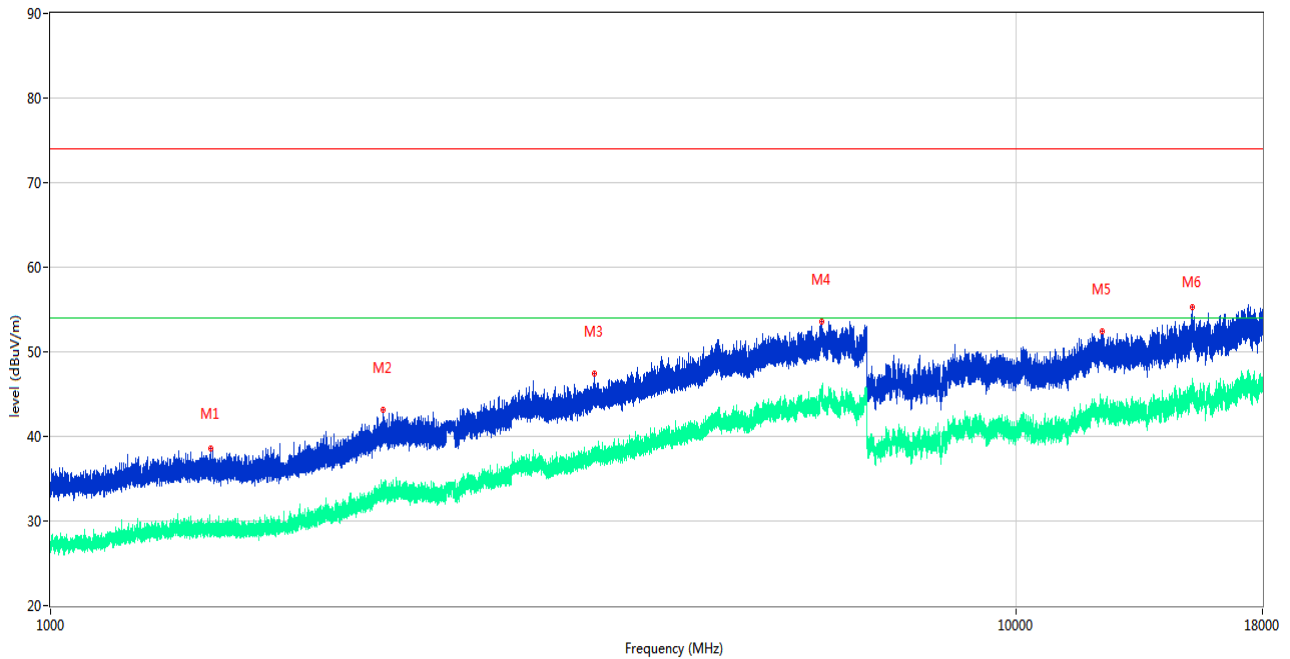

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1464.500	38.63	-17.60	74.0	-35.37	Peak	147.00	150	Vertical	Pass
1**	1464.500	28.81	-17.60	54.0	-25.19	AV	147.00	150	Vertical	Pass
2	2209.700	43.11	-12.91	74.0	-30.89	Peak	287.00	150	Vertical	Pass
2**	2209.700	33.30	-12.91	54.0	-20.70	AV	287.00	150	Vertical	Pass
3	3655.000	47.38	-6.44	74.0	-26.62	Peak	322.00	150	Vertical	Pass
3**	3655.000	38.56	-6.44	54.0	-15.44	AV	322.00	150	Vertical	Pass
4	6289.800	53.59	-0.31	74.0	-20.41	Peak	168.00	150	Vertical	Pass
4**	6289.800	44.65	-0.31	54.0	-9.35	AV	168.00	150	Vertical	Pass
5	12268.724	52.41	1.41	74.0	-21.59	Peak	15.00	150	Vertical	Pass
5**	12268.724	43.54	1.41	54.0	-10.46	AV	15.00	150	Vertical	Pass
6	15233.776	55.34	0.99	74.0	-18.66	Peak	360.00	150	Vertical	Pass
6**	15233.776	46.10	0.99	54.0	-7.90	AV	360.00	150	Vertical	Pass

A.1.4 Test Antenna Horizontal, 1 GHz – 18 GHz

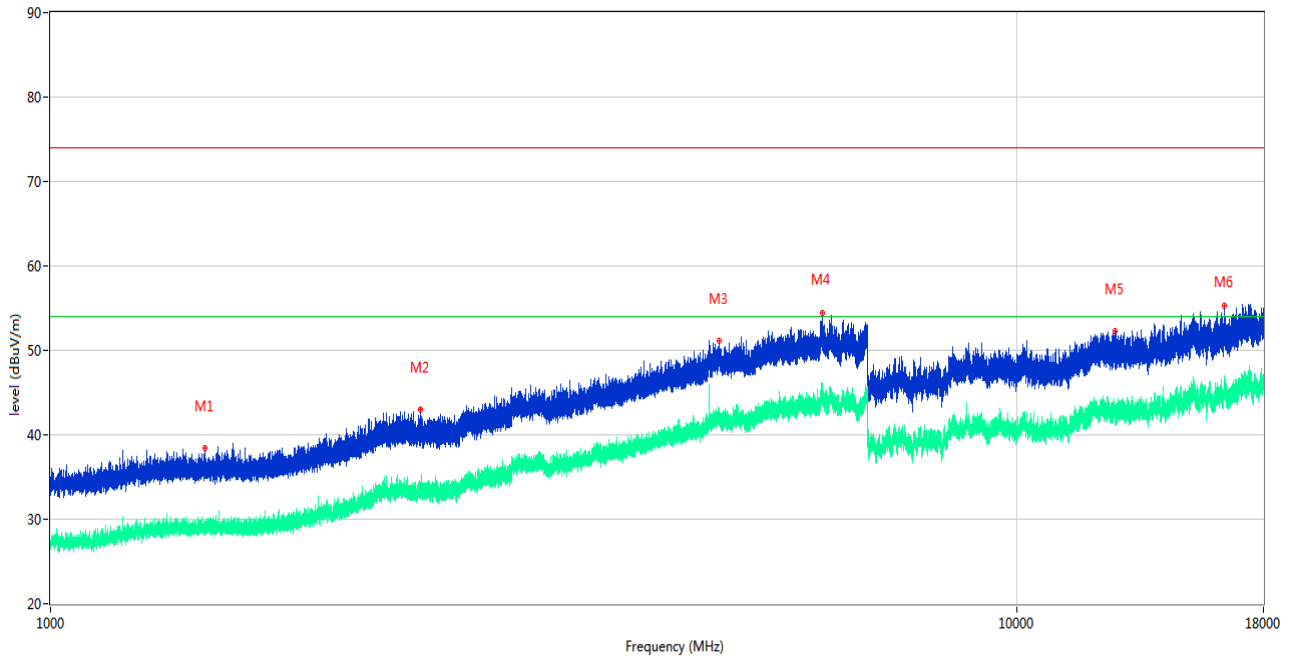


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1445.200	38.48	-17.43	74.0	-35.52	Peak	234.00	150	Horizontal	Pass
1**	1445.200	29.55	-17.43	54.0	-24.45	AV	234.00	150	Horizontal	Pass
2	2413.900	42.94	-12.26	74.0	-31.06	Peak	252.00	150	Horizontal	Pass
2**	2413.900	32.60	-12.26	54.0	-21.40	AV	252.00	150	Horizontal	Pass
3	4921.200	51.14	-2.51	74.0	-22.86	Peak	182.00	150	Horizontal	Pass
3**	4921.200	42.09	-2.51	54.0	-11.91	AV	182.00	150	Horizontal	Pass
4	6295.400	54.43	-0.51	74.0	-19.57	Peak	247.00	150	Horizontal	Pass
4**	6295.400	44.26	-0.51	54.0	-9.74	AV	247.00	150	Horizontal	Pass
5	12628.963	52.22	1.47	74.0	-21.78	Peak	0.00	150	Horizontal	Pass
5**	12628.963	42.29	1.47	54.0	-11.71	AV	0.00	150	Horizontal	Pass
6	16392.188	55.33	1.55	74.0	-18.67	Peak	51.00	150	Horizontal	Pass
6**	16392.188	45.29	1.55	54.0	-8.71	AV	51.00	150	Horizontal	Pass

Test Data and Plots


The USB Test Mode

A.1.5 Test Antenna Vertical, 30 MHz – 1 GHz

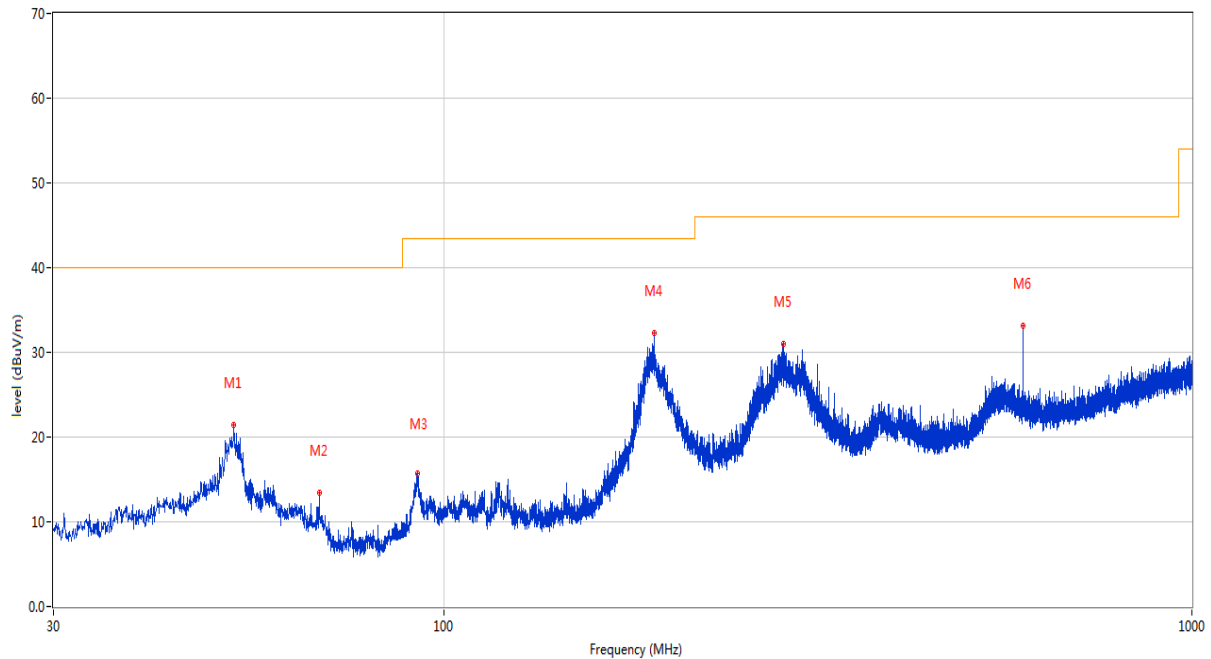


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	52.310	21.41	-23.12	40.0	-18.59	Peak	92.10	100	Vertical	Pass
2	68.024	13.40	-25.88	40.0	-26.60	Peak	181.70	100	Vertical	Pass
3	92.129	15.71	-25.62	43.5	-27.79	Peak	360.10	200	Vertical	Pass
4	190.729	32.28	-25.18	43.5	-11.22	Peak	100.60	100	Vertical	Pass
5	284.577	31.02	-22.08	46.0	-14.98	Peak	50.20	200	Vertical	Pass
6	593.958	33.15	-14.68	46.0	-12.85	Peak	0.00	100	Vertical	Pass

A.1.6 Test Antenna Horizontal, 30 MHz – 1 GHz

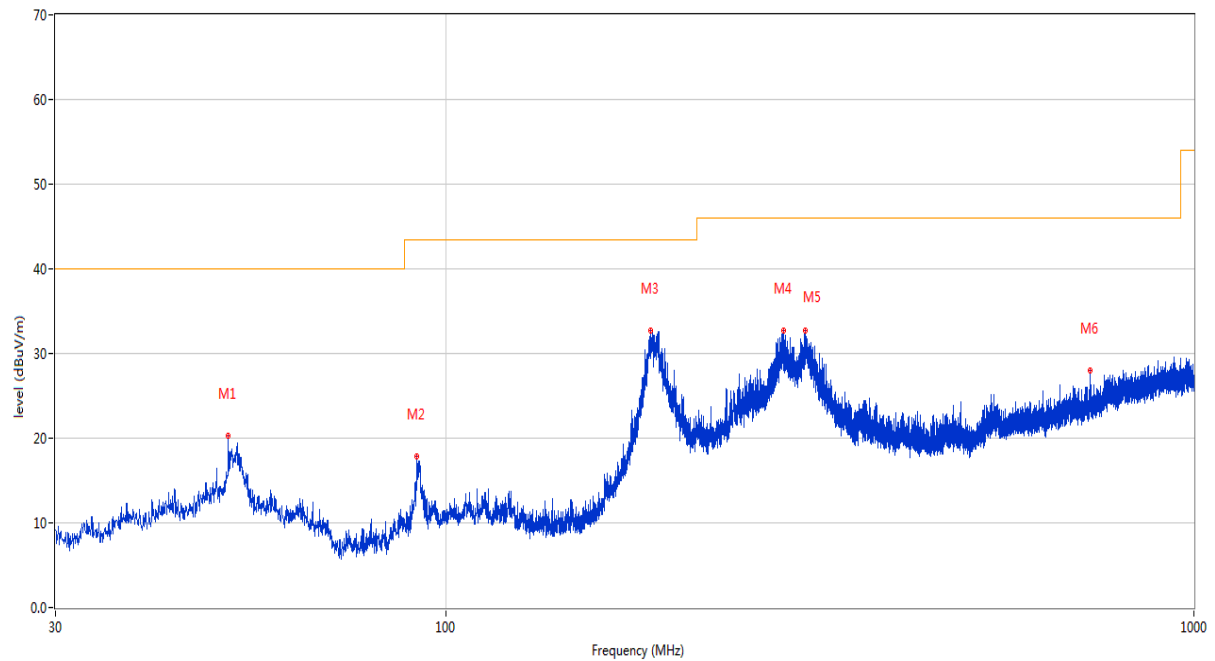


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	51.049	20.24	-23.23	40.0	-19.76	Peak	360.00	200	Horizontal	Pass
2	91.401	17.82	-25.77	43.5	-25.68	Peak	276.40	200	Horizontal	Pass
3	187.383	32.65	-25.44	43.5	-10.85	Peak	75.10	100	Horizontal	Pass
4	282.249	32.68	-21.79	46.0	-13.32	Peak	125.80	100	Horizontal	Pass
5	302.328	32.65	-21.33	46.0	-13.35	Peak	161.30	100	Horizontal	Pass
6	726.994	27.97	-12.33	46.0	-18.03	Peak	360.00	200	Horizontal	Pass

A.1.7 Test Antenna Vertical, 1 GHz – 18 GHz

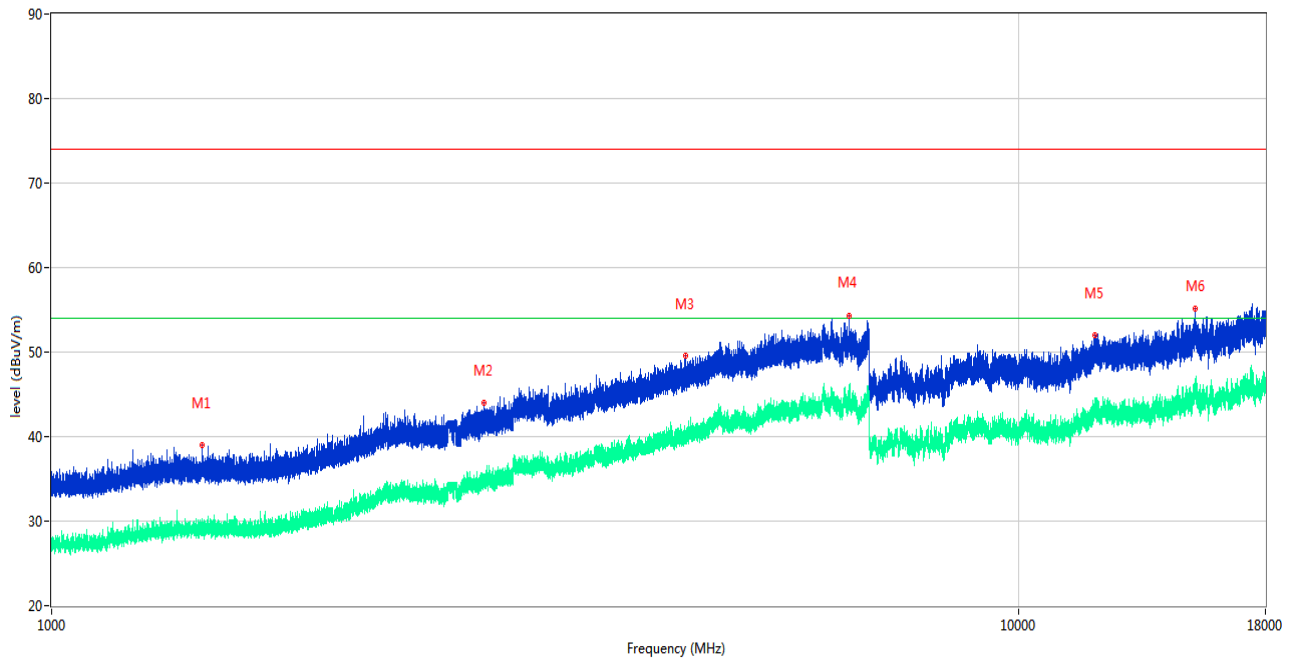

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1430.500	38.95	-17.29	74.0	-35.05	Peak	210.00	150	Vertical	Pass
1**	1430.500	29.07	-17.29	54.0	-24.93	AV	210.00	150	Vertical	Pass
2	2796.700	44.01	-10.63	74.0	-29.99	Peak	210.00	150	Vertical	Pass
2**	2796.700	34.37	-10.63	54.0	-19.63	AV	210.00	150	Vertical	Pass
3	4528.800	49.58	-4.16	74.0	-24.42	Peak	155.00	150	Vertical	Pass
3**	4528.800	39.96	-4.16	54.0	-14.04	AV	155.00	150	Vertical	Pass
4	6687.200	54.33	-0.23	74.0	-19.67	Peak	300.00	150	Vertical	Pass
4**	6687.200	43.79	-0.23	54.0	-10.21	AV	300.00	150	Vertical	Pass
5	12003.651	51.97	1.29	74.0	-22.03	Peak	152.00	150	Vertical	Pass
5**	12003.651	43.00	1.29	54.0	-11.00	AV	152.00	150	Vertical	Pass
6	15229.838	55.12	0.89	74.0	-18.88	Peak	0.00	150	Vertical	Pass
6**	15229.838	45.82	0.89	54.0	-8.18	AV	0.00	150	Vertical	Pass

A.1.8 Test Antenna Horizontal, 1 GHz – 18 GHz

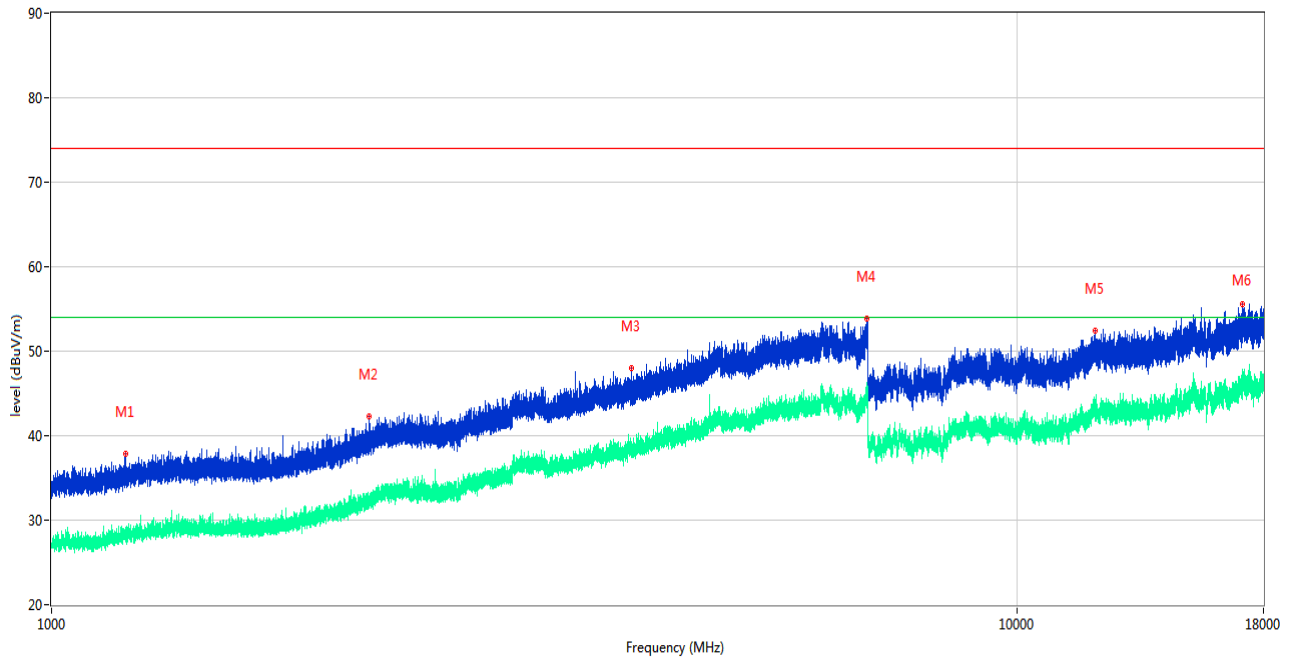

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1193.200	37.90	-17.89	74.0	-36.10	Peak	255.00	150	Horizontal	Pass
1**	1193.200	28.80	-17.89	54.0	-25.20	AV	255.00	150	Horizontal	Pass
2	2133.700	42.31	-13.95	74.0	-31.69	Peak	360.00	150	Horizontal	Pass
2**	2133.700	31.93	-13.95	54.0	-22.07	AV	360.00	150	Horizontal	Pass
3	3983.000	48.03	-5.62	74.0	-25.97	Peak	196.00	150	Horizontal	Pass
3**	3983.000	38.14	-5.62	54.0	-15.86	AV	196.00	150	Horizontal	Pass
4	6996.400	53.87	0.19	74.0	-20.13	Peak	325.00	150	Horizontal	Pass
4**	6996.400	44.89	0.19	54.0	-9.11	AV	325.00	150	Horizontal	Pass
5	12062.588	52.42	0.91	74.0	-21.58	Peak	360.00	150	Horizontal	Pass
5**	12062.588	42.86	0.91	54.0	-11.14	AV	360.00	150	Horizontal	Pass
6	17131.650	55.60	2.24	74.0	-18.40	Peak	261.00	150	Horizontal	Pass
6**	17131.650	46.29	2.24	54.0	-7.71	AV	261.00	150	Horizontal	Pass


A.2 Conducted Emission

Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Test Data and Plots


The Camera Test Mode

A.2.1 L Phase

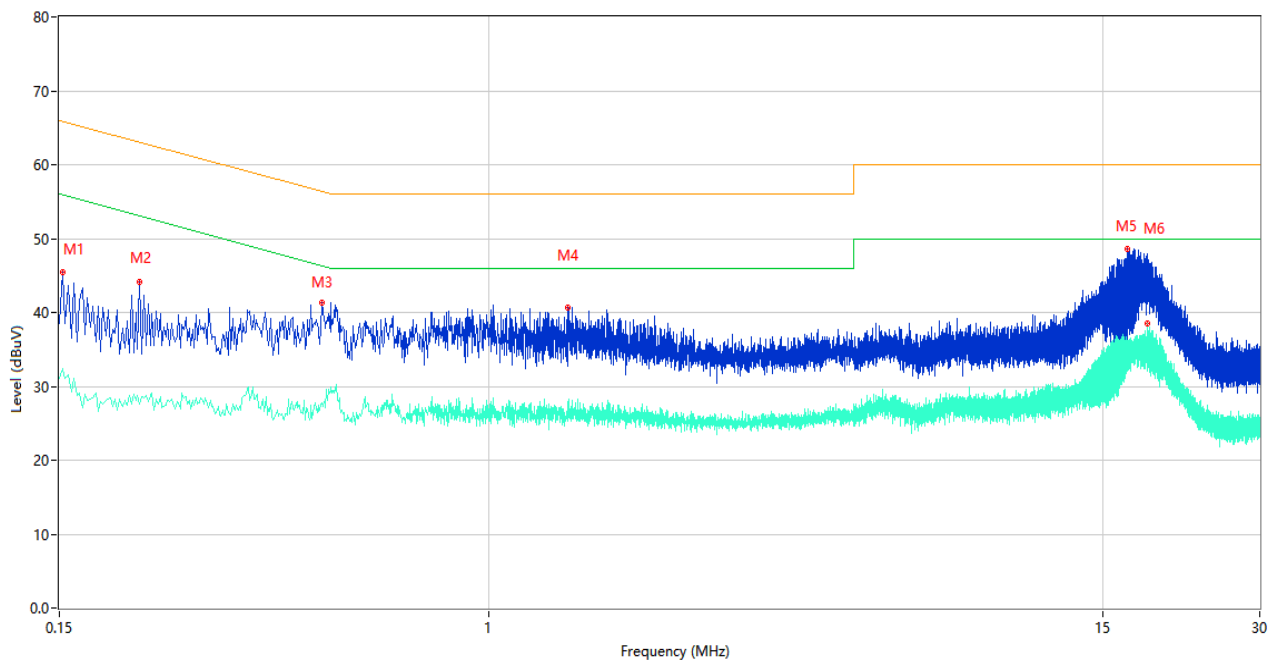

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.150	38.47	10.41	66.00	-27.53	Peak	L	Pass
1**	0.150	31.10	10.41	56.00	-24.90	AV	L	Pass
2	0.214	44.07	10.38	63.05	-18.98	Peak	L	Pass
2**	0.214	27.58	10.38	53.05	-25.47	AV	L	Pass
3	0.478	41.24	10.29	56.37	-15.13	Peak	L	Pass
3**	0.478	27.78	10.29	46.37	-18.59	AV	L	Pass
4	1.418	40.73	10.25	56.00	-15.27	Peak	L	Pass
4**	1.418	27.94	10.25	46.00	-18.06	AV	L	Pass
5	16.710	48.60	10.45	60.00	-11.40	Peak	L	Pass
5**	16.710	35.74	10.45	50.00	-14.26	AV	L	Pass
6	18.264	47.94	10.50	60.00	-12.06	Peak	L	Pass
6**	18.264	38.50	10.50	50.00	-11.50	AV	L	Pass

A.2.2 N Phase

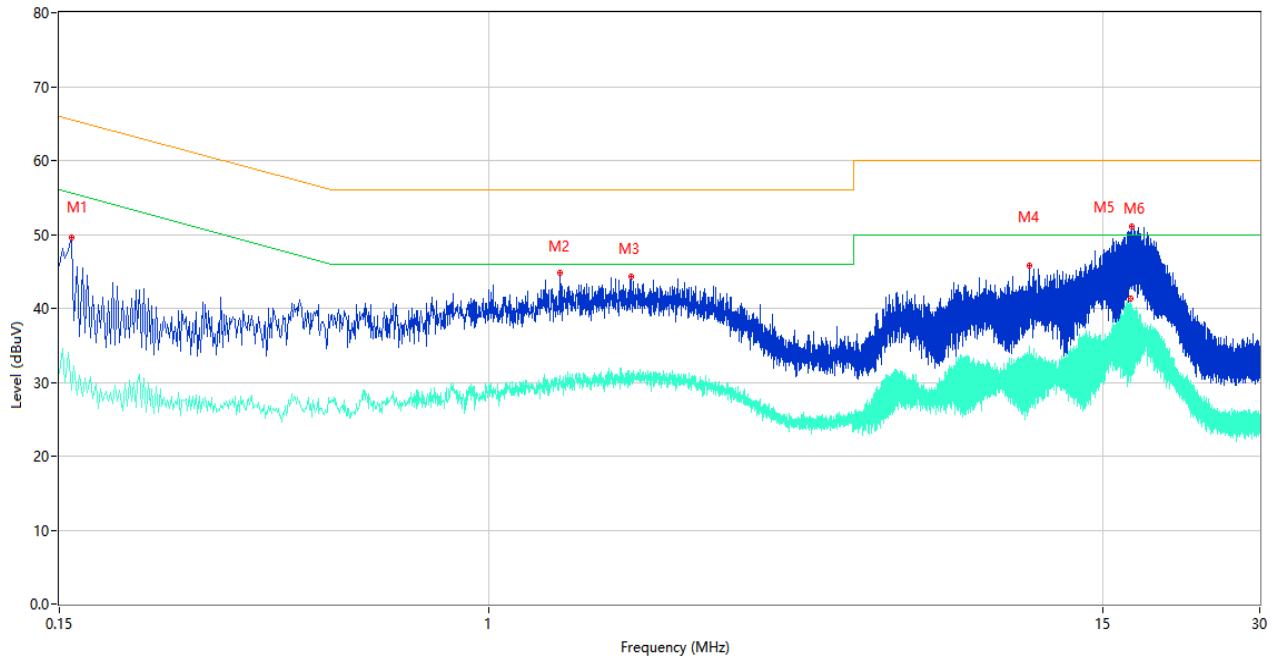


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.158	49.61	10.40	65.57	-15.96	Peak	N	Pass
1**	0.158	28.92	10.40	55.57	-26.65	AV	N	Pass
2	1.364	44.82	10.25	56.00	-11.18	Peak	N	Pass
2**	1.364	30.67	10.25	46.00	-15.33	AV	N	Pass
3	1.872	44.37	10.24	56.00	-11.63	Peak	N	Pass
3**	1.872	31.17	10.24	46.00	-14.83	AV	N	Pass
4	10.858	45.78	10.38	60.00	-14.22	Peak	N	Pass
4**	10.858	27.42	10.38	50.00	-22.58	AV	N	Pass
5	17.000	46.63	10.46	60.00	-13.37	Peak	N	Pass
5**	17.000	41.36	10.46	50.00	-8.64	AV	N	Pass
6	17.022	51.10	10.46	60.00	-8.90	Peak	N	Pass
6**	17.022	31.71	10.46	50.00	-18.29	AV	N	Pass

Test Data and Plots


The USB Test Mode

A.2.3 L Phase

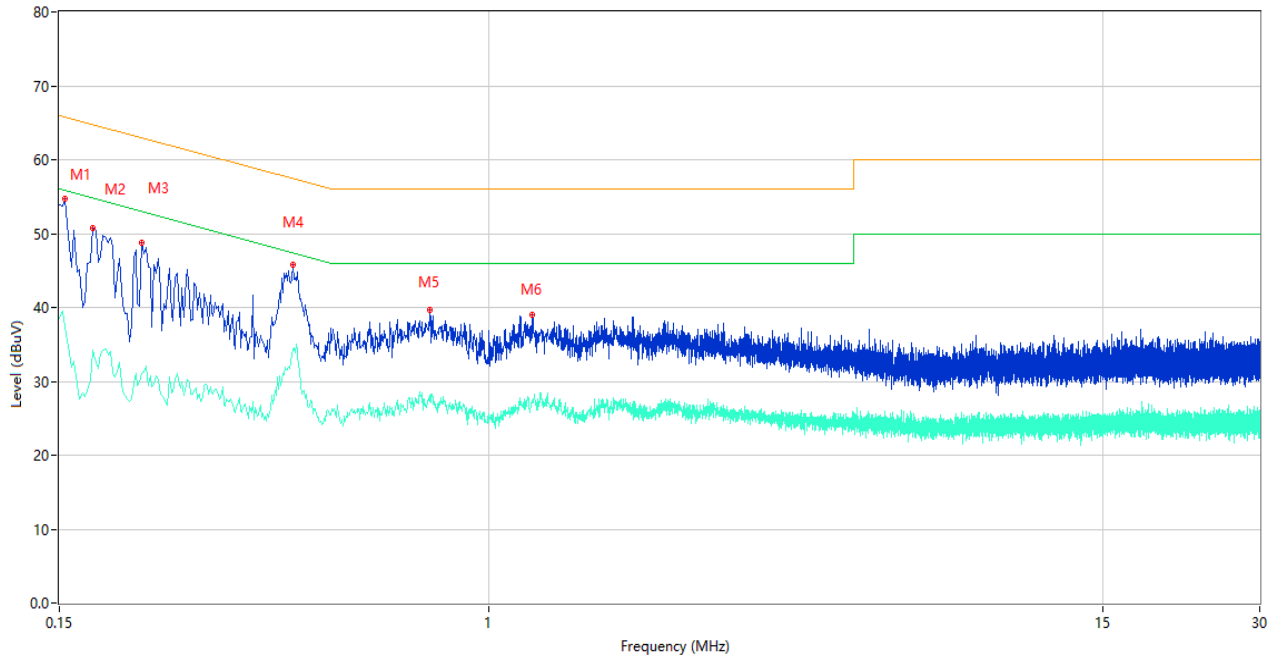

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.154	54.64	10.41	65.78	-11.14	Peak	L	Pass
1**	0.154	37.43	10.41	55.78	-18.35	AV	L	Pass
2	0.174	50.80	10.39	64.77	-13.97	Peak	L	Pass
2**	0.174	34.23	10.39	54.77	-20.54	AV	L	Pass
3	0.216	48.84	10.37	62.97	-14.13	Peak	L	Pass
3**	0.216	31.01	10.37	52.97	-21.96	AV	L	Pass
4	0.420	45.86	10.31	57.45	-11.59	Peak	L	Pass
4**	0.420	34.22	10.31	47.45	-13.23	AV	L	Pass
5	0.770	39.60	10.26	56.00	-16.40	Peak	L	Pass
5**	0.770	28.12	10.26	46.00	-17.88	AV	L	Pass
6	1.208	38.96	10.25	56.00	-17.04	Peak	L	Pass
6**	1.208	27.16	10.25	46.00	-18.84	AV	L	Pass

A.2.4 N Phase

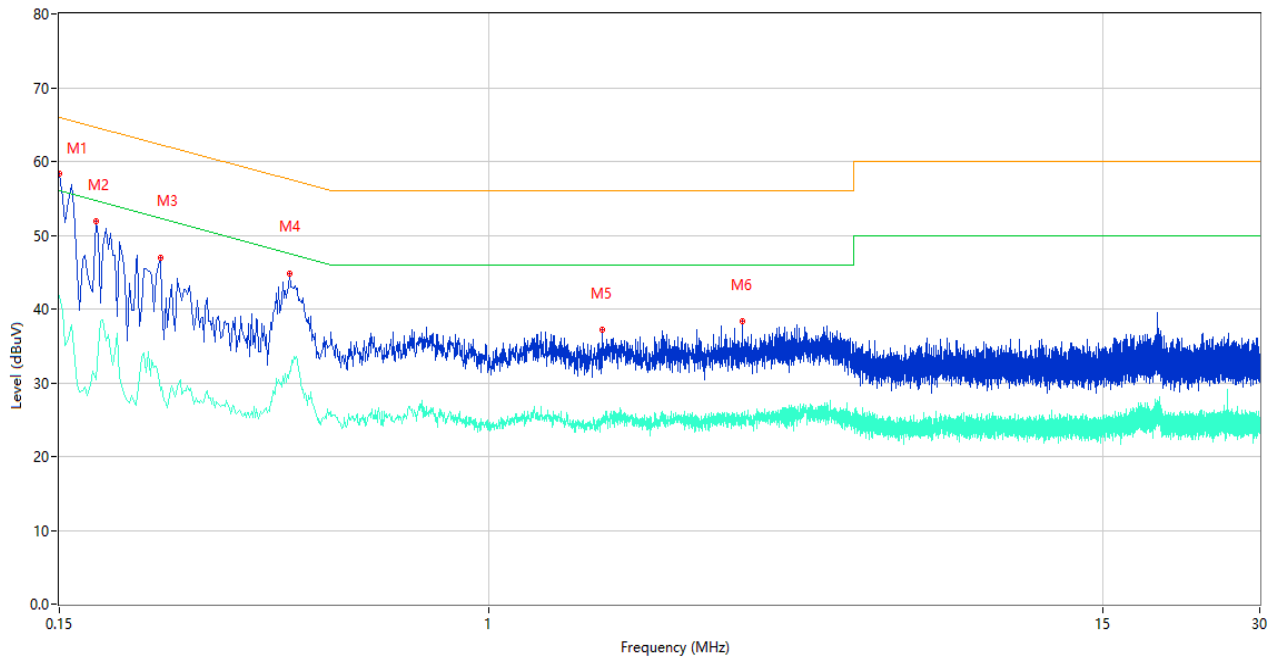

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.150	58.43	10.41	66.00	-7.57	Peak	N	Pass
1**	0.150	41.83	10.41	56.00	-14.17	AV	N	Pass
2	0.176	51.87	10.39	64.67	-12.80	Peak	N	Pass
2**	0.176	30.36	10.39	54.67	-24.31	AV	N	Pass
3	0.234	46.99	10.35	62.31	-15.32	Peak	N	Pass
3**	0.234	29.00	10.35	52.31	-23.31	AV	N	Pass
4	0.414	44.84	10.31	57.57	-12.73	Peak	N	Pass
4**	0.414	31.56	10.31	47.57	-16.01	AV	N	Pass
5	1.646	37.14	10.26	56.00	-18.86	Peak	N	Pass
5**	1.646	25.25	10.26	46.00	-20.75	AV	N	Pass
6	3.058	38.27	10.29	56.00	-17.73	Peak	N	Pass
6**	3.058	25.95	10.29	46.00	-20.05	AV	N	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2170620-AE.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2170620-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2170620-AI.PDF”.

--END OF REPORT--