

EMC TEST REPORT

FCC 47 CFR Part 15B
Industry Canada RSS-Gen

Electromagnetic compatibility - Unintentional radiators

Report Reference No. : G0M-1407-4031-EC0115B-V01

Testing Laboratory : Eurofins Product Service GmbH

Address : Storkower Str. 38c
15526 Reichenwalde
Germany

Accreditation :



A2LA Accredited Testing Laboratory, Certificate No.: 1983.01
FCC Filed Test Laboratory, Reg.-No.: 96970
IC OATS Filing assigned code: 3470A

Applicant's name : GN Netcom A/S

Address : Lautrupbjerg 7
2750 Ballerup
DENMARK

Test specification:

Standard..... : 47 CFR Part 15 Subpart B
RSS-Gen, Issue 3, 2010-12
ANSI C63.4:2009

Equipment under test (EUT):

Product description	Bluetooth Speakerphone	
Model No.	HFS210	
Additional Models	None	
Hardware version	V25	
Firmware / Software version	V3.3.0	
Contains	FCC-ID: BCE-HFS210A	IC: 2386C-HFS210
Test result	Passed	

Test Report No.: G0M-1407-4031-EC0115B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Possible test case verdicts:

- not applicable to test object: N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Date of receipt of test item: 2014-07-31

Date (s) of performance of tests: 2014-08-22 - 2014-08-22

Compiled by: Steffen Zunke

Tested by (+ signature).....: Steffen Zunke 

Approved by (+ signature): Marcus Klein 

Date of issue: 2014-08-26

Total number of pages: 31

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Version History

Version	Issue Date	Remarks	Revised by
V01	2014-08-26	Initial Release	

REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1	Photos – Equipment external	6
1.2	Photos – Equipment internal	8
1.3	Photos – Test setup	10
1.4	Supporting Equipment Used During Testing	11
1.5	Operating Modes	12
1.6	Test Equipment Used During Testing	13
1.7	Sample emission level calculation	14
2	RESULT SUMMARY	15
3	TEST CONDITIONS AND RESULTS	16
3.1	Test Conditions and Results – Radiated emissions	16
3.2	Test Conditions and Results – AC power line conducted emissions	29


1 Equipment (Test item) Description

Description	Bluetooth Speakerphone	
Model	HFS210	
Additional Models	None	
Serial number	None	
Hardware version	V25	
Software / Firmware version	V3.3.0	
Contains FCC-ID	N/A	
Contains IC	N/A	
Power supply	5VDC via USB	
Radio module	Type	Bluetooth module
	Model	CSR 8635
	Manufacturer	CSR
	HW Version	V25
	SW Version	V3.3.0
	FCC-ID	BCE-HFS210A
	IC	2386C-HF210
Manufacturer	GN Netcom A/S Lautrupbjerg 7 2750 Ballerup DENMARK	
Highest emission frequency	500 MHz - 1000 MHz (up to 5 GHz)	
Device classification	Class B	
Equipment type	Tabletop	
Number of tested samples	1	



1.1 Photos – Equipment external




EUT Connector Side

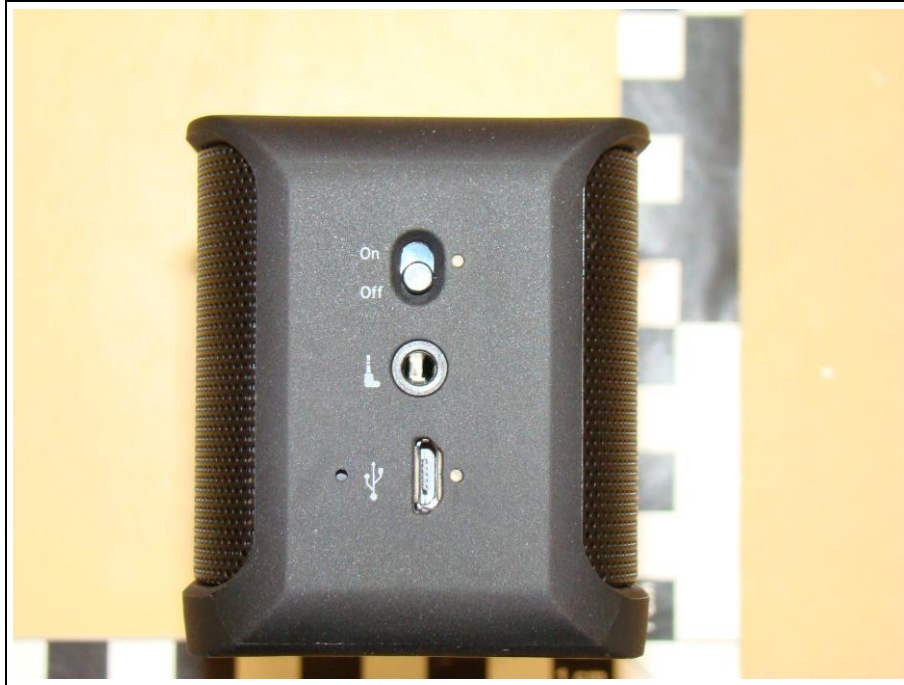



1.2 Photos – Equipment internal

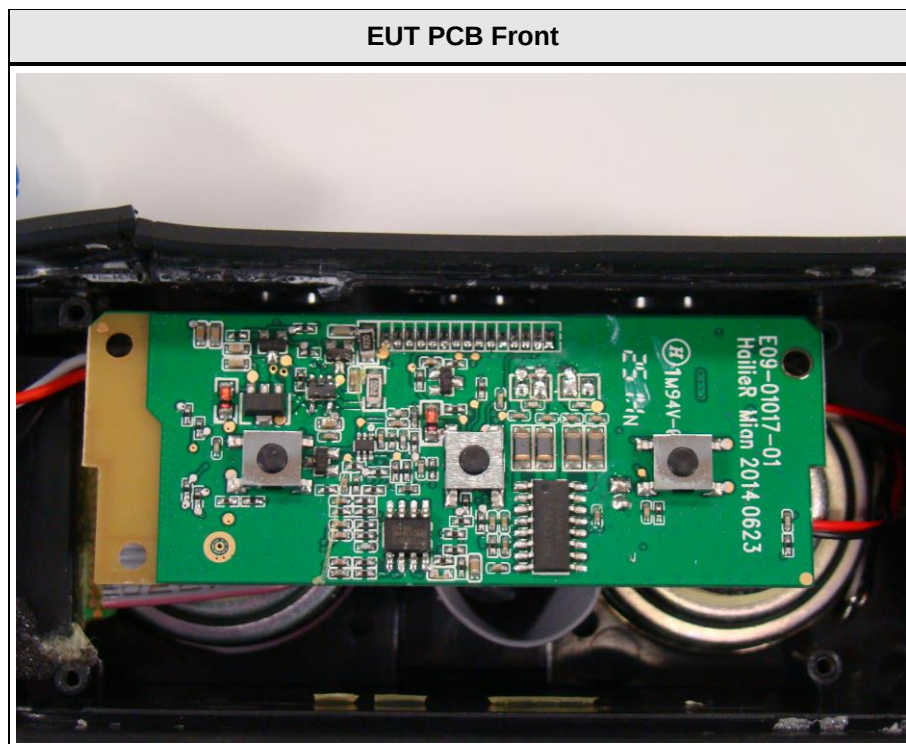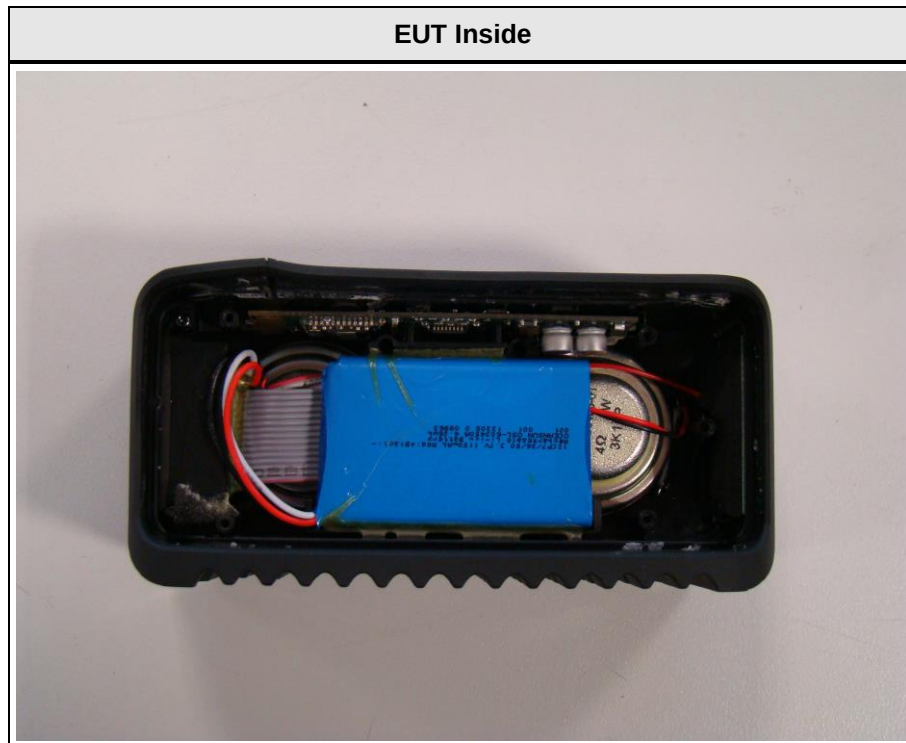

EUT PCB Back

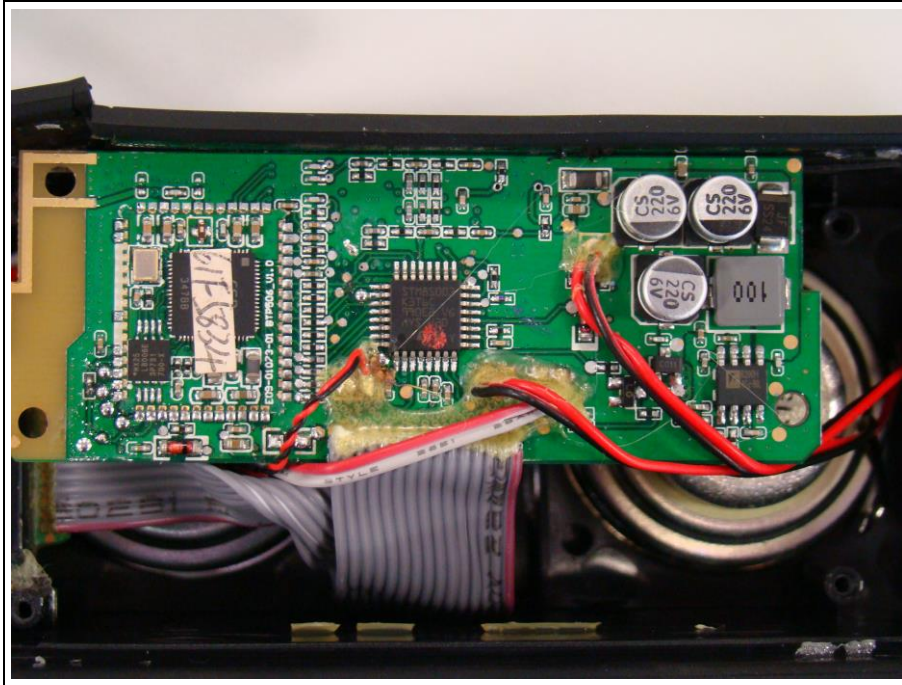

1.3 Photos – Test setup

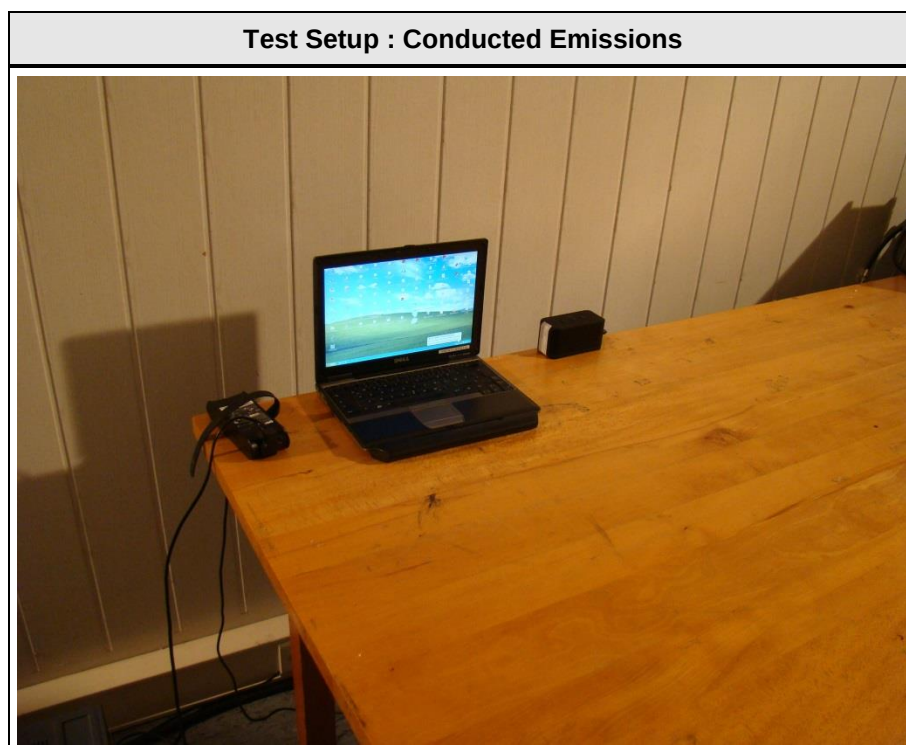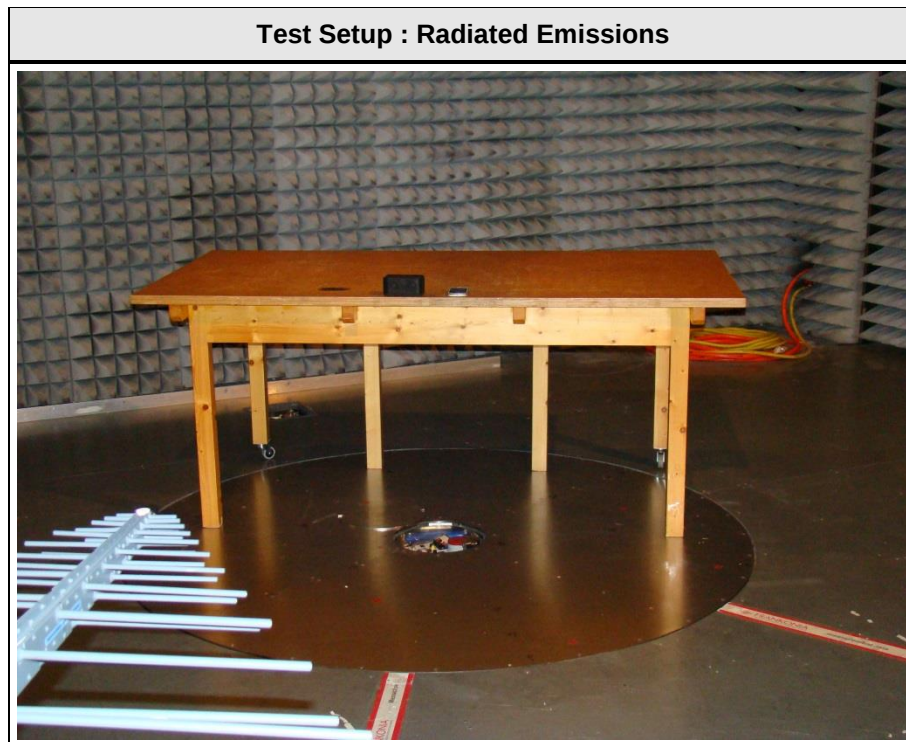

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
AE	Smartphone	Samsung	S3 mini	-
AE	Laptop	DELL	D430	-

***Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

1.5 Operating Modes

Mode #	Description
1	Bluetooth connection to a smartphone
2	Charging

1.6 Test Equipment Used During Testing

Radiated emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD-Antenne	R&S	HL 223	EF00187	2014-03	2017-03
LPD-Antenna	R&S	HL 025	EF00327	2013-02	2016-02
EMI Test Receiver	R&S	ESU8	EF00379	2014-03	2015-03
EMI Test Receiver	R&S	ESCS30	EF00295	2013-10	2014-10

Conducted emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2012-10	2014-10
AMN	R&S	ESH3-Z5	EF00036	2012-11	2014-11
EMI Test Receiver	R&S	ESCS 30	EF00295	2013-10	2014-10

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15B, Industry Canada RSS-Gen				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 RSS-Gen 4.9 & 4.10	Radiated emissions	ANSI C 63.4	PASS	-
47 CFR 15.107 RSS-Gen 7.2.4	AC power line conducted emissions	ANSI C63.4	PASS	-
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Radiated emissions


Radiated emissions acc. FCC 47 CFR 15.109 / IC RSS-Gen					Verdict: PASS		
Laboratory Parameters:		Required prior to the test			During the test		
Ambient Temperature		15 to 35 °C			23 °C		
Relative Humidity		30 to 60 %			35 %		
Test according referenced standards		Reference Method					
		ANSI C63.4					
Sample is tested with respect to the requirements of the equipment class		Equipment class					
		Class B					
Test frequency range determined from highest emission frequency		Highest emission frequency					
		500 MHz - 1000 MHz (up to 5 GHz)					
Fully configured sample scanned over the following frequency range		Frequency range					
		30 MHz to 5 GHz					
Operating mode		1 / 2					
Limits and results Class B							
Frequency [MHz]	Quasi-Peak [dBµV/m]	Result	Average [dBµV/m]	Result	Peak [dBµV/m]	Result	
30 – 88	40	PASS	-		-	-	
88 – 216	43.5	PASS	-		-	-	
216 – 960	46	PASS	-		-	-	
960 – 1000	54	PASS	-		-	-	
> 1000	-	-	54	PASS	74	PASS	
Comments:							

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1407-4031

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Speakerphone
 Model: HFS210
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 23°C, Unom: 5VDC via USB
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3m
 Mode: Bluetooth link to Smartphone
 Test Date: 2014-08-22
 Note:

Index 1

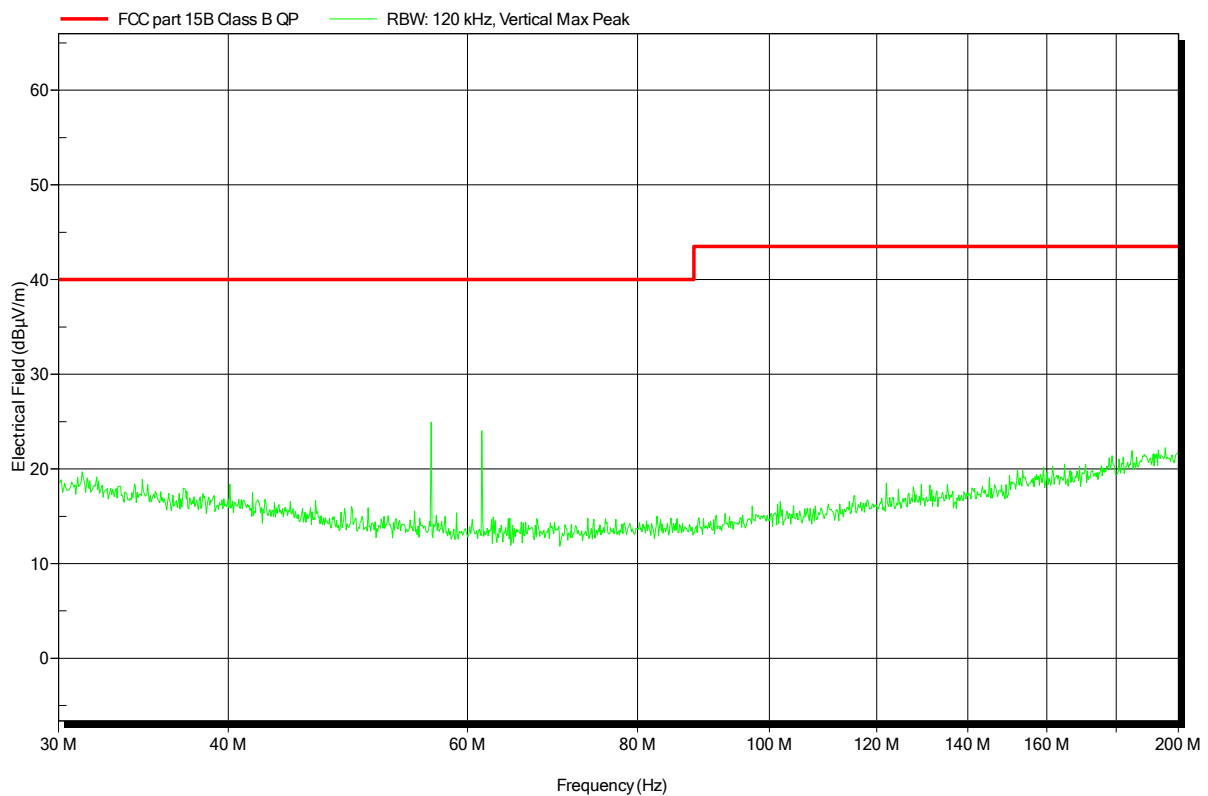


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1407-4031

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Speakerphone
 Model: HFS210
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 23°C, Unom: 5VDC via USB
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3m
 Mode: Bluetooth link to Smartphone
 Test Date: 2014-08-22
 Note:

Index 2

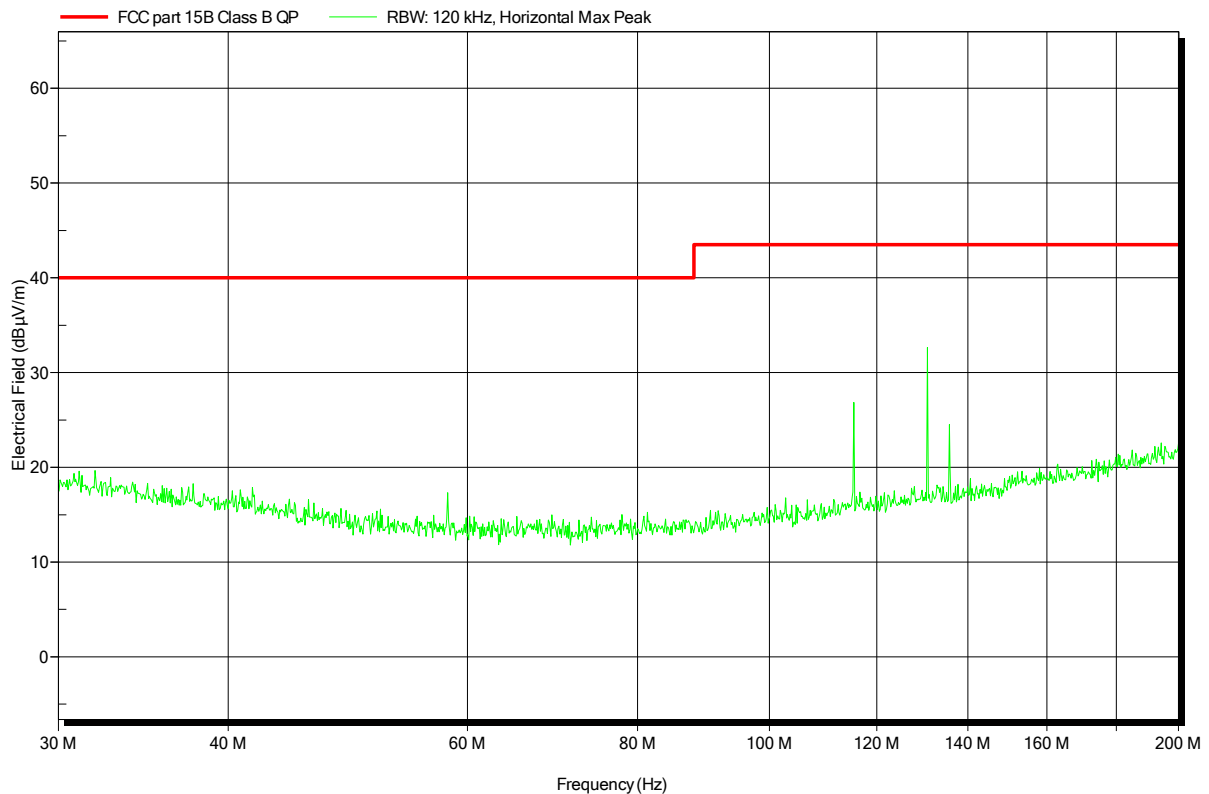


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1407-4031

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Speakerphone
 Model: HFS210
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 23°C, Unom: 5VDC via USB
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3m
 Mode: Bluetooth link to Smartphone
 Test Date: 2014-08-22
 Note:

Index 8

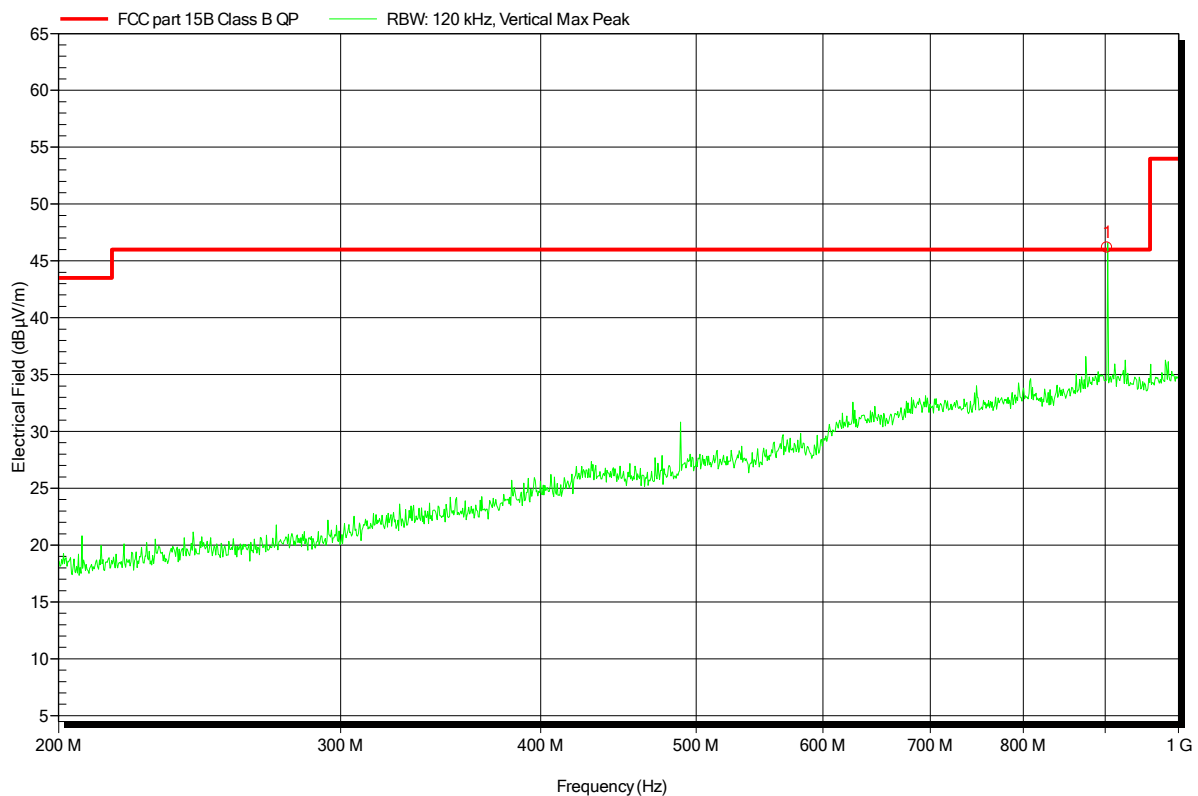


Frequency
 902.42 MHz GSM carrier smartphone

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1407-4031

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Speakerphone
 Model: HFS210
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 23°C, Unom: 5VDC via USB
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m
 Mode: Bluetooth link to Smartphone
 Test Date: 2014-08-22
 Note:

Index 7

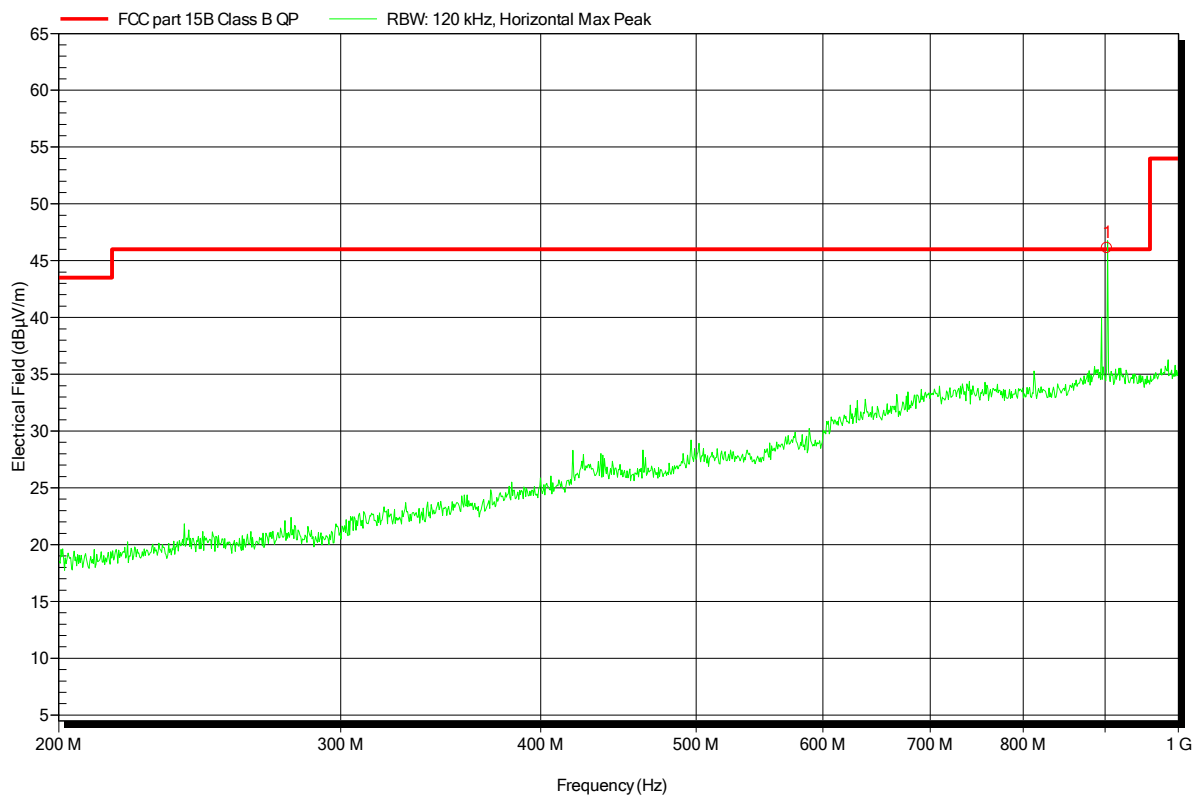


Frequency
 902.42 MHz GSM carrier smartphone

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1407-4031

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Speakerphone
 Model: HFS210
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 23°C, Unom: 5VDC via USB
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3m
 Mode: Bluetooth link to Smartphone
 Test Date: 2014-08-26
 Note:

Index 11

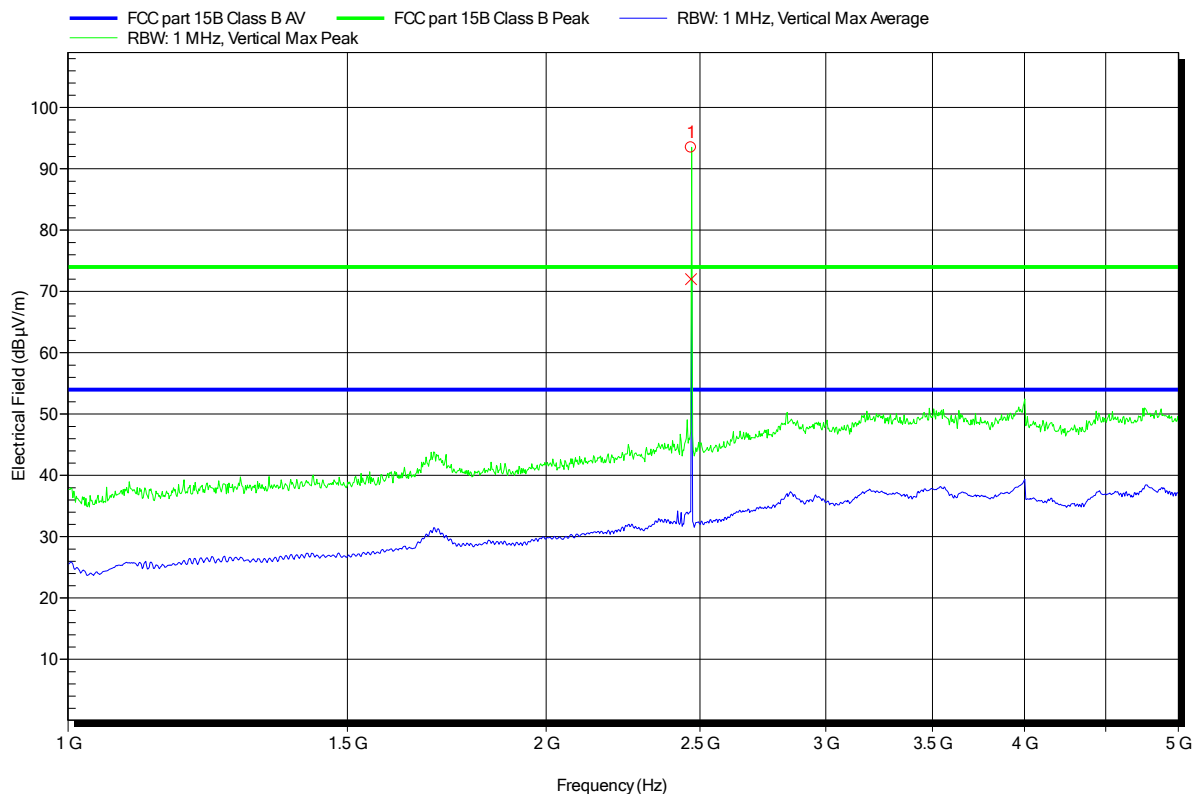


Frequency
 2.468 GHz Bluetooth carrier

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1407-4031

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Speakerphone
 Model: HFS210
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 23°C, Unom: 5VDC via USB
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3m
 Mode: Bluetooth link to Smartphone
 Test Date: 2014-08-26
 Note:

Index 12

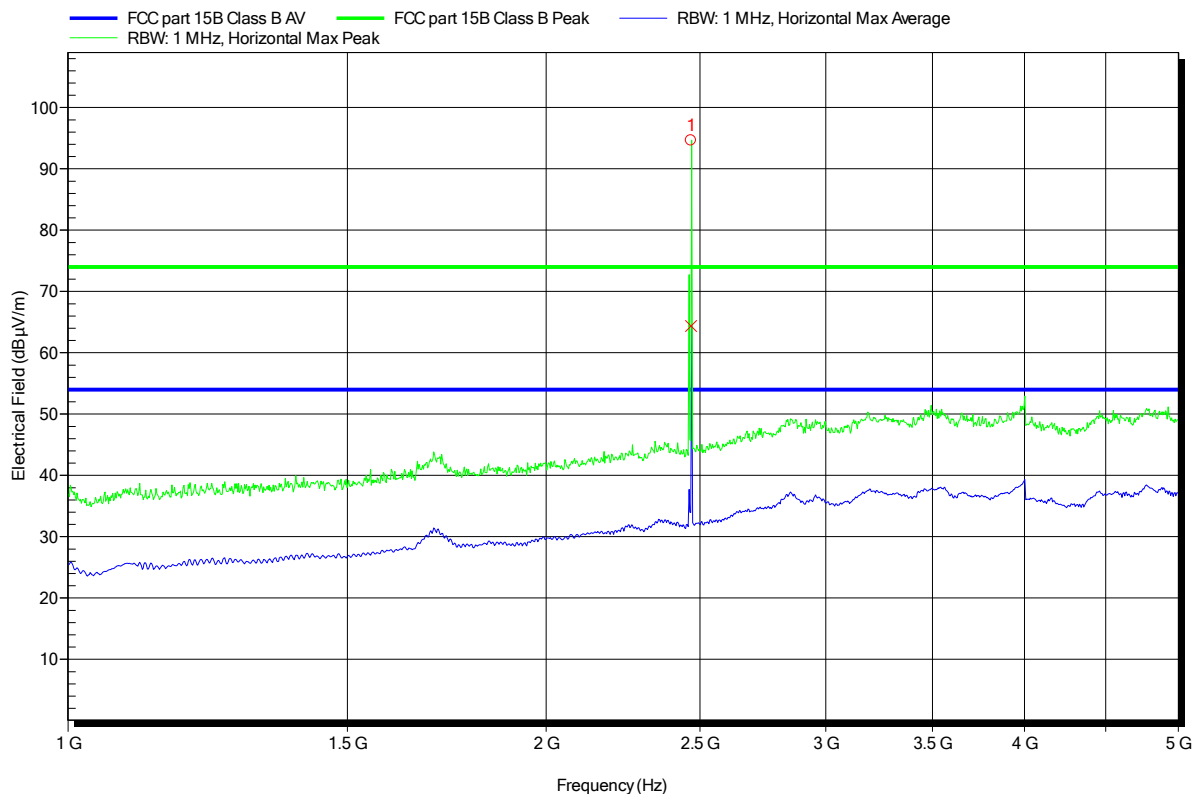


Frequency
 2.468 GHz Bluetooth carrier

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1407-4031

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Speakerphone
 Model: HFS210
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 23°C, Unom: 5VDC via USB
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3m
 Mode: charging
 Test Date: 2014-08-26
 Note:

Index 14

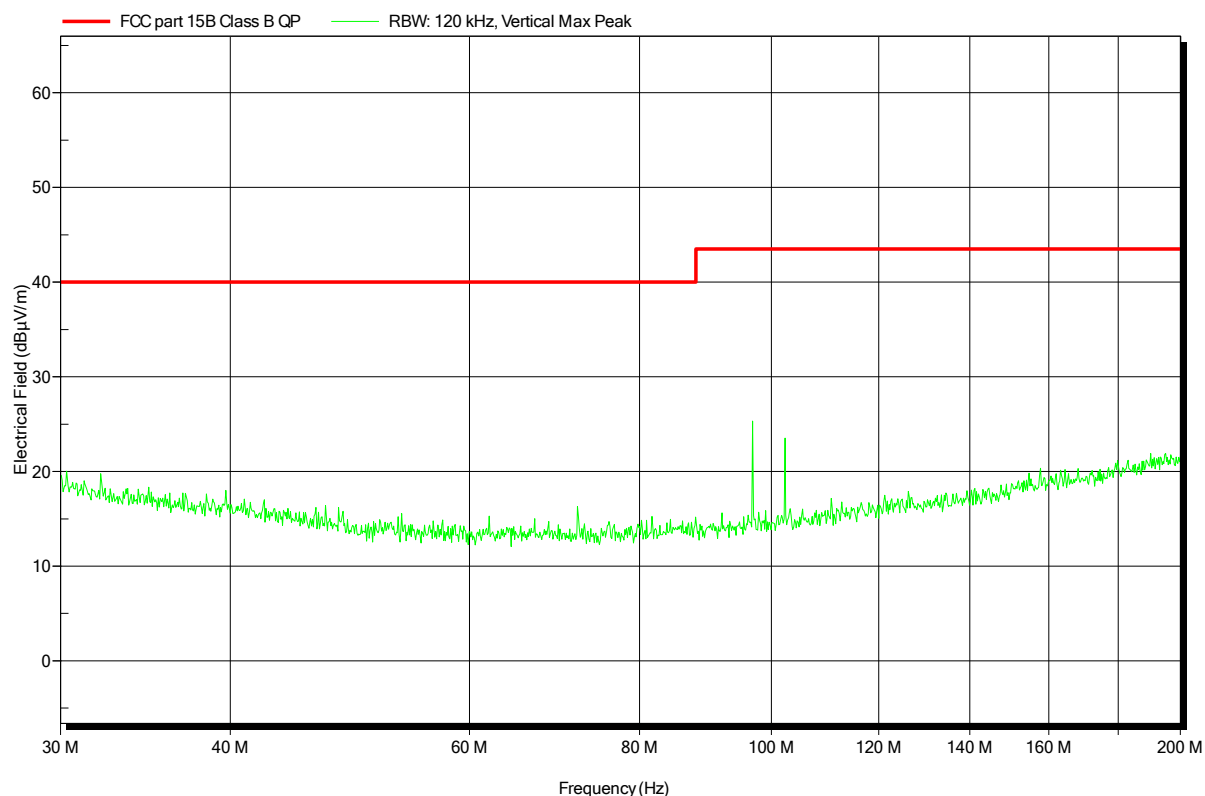


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1407-4031

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Speakerphone
 Model: HFS210
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 23°C, Unom: 5VDC via USB
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3m
 Mode: charging
 Test Date: 2014-08-26
 Note:

Index 15

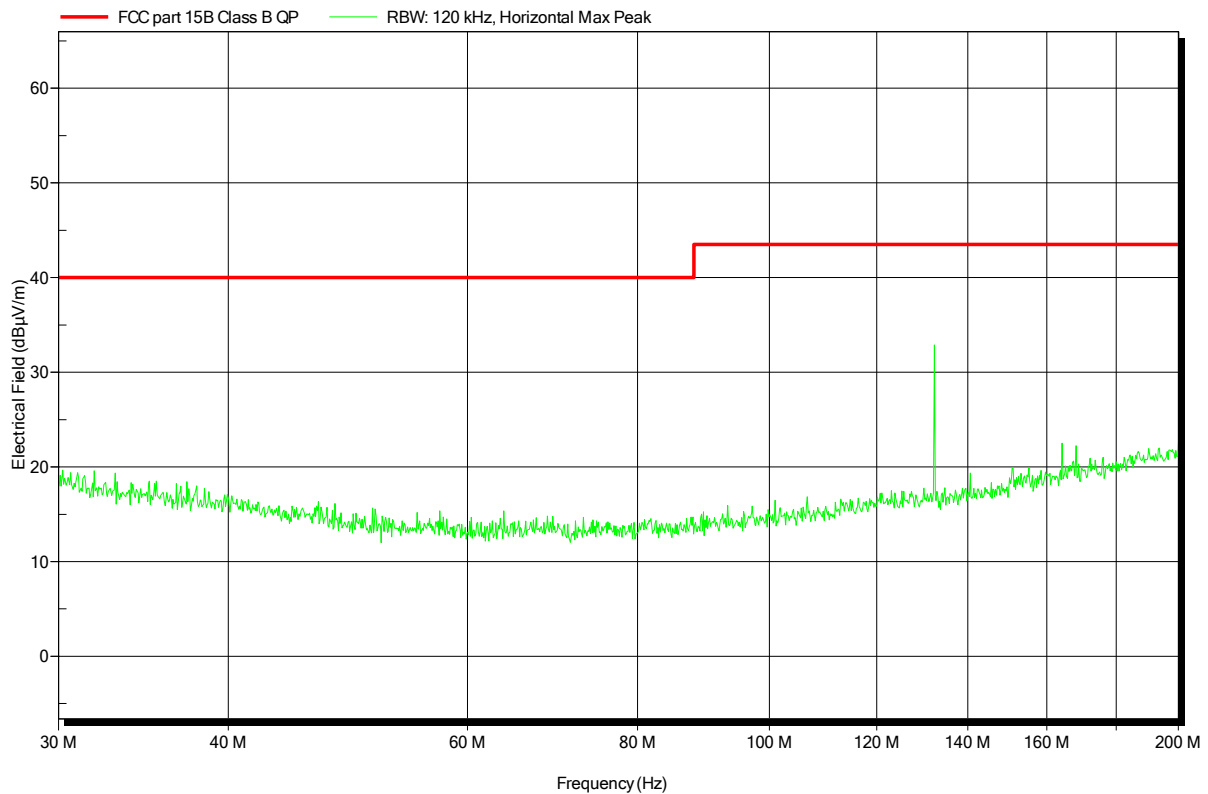

Test Report No.: G0M-1407-4031-EC0115B-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1407-4031

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Speakerphone
 Model: HFS210
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 23°C, Unom: 5VDC via USB
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3m
 Mode: charging
 Test Date: 2014-08-26
 Note:

Index 20

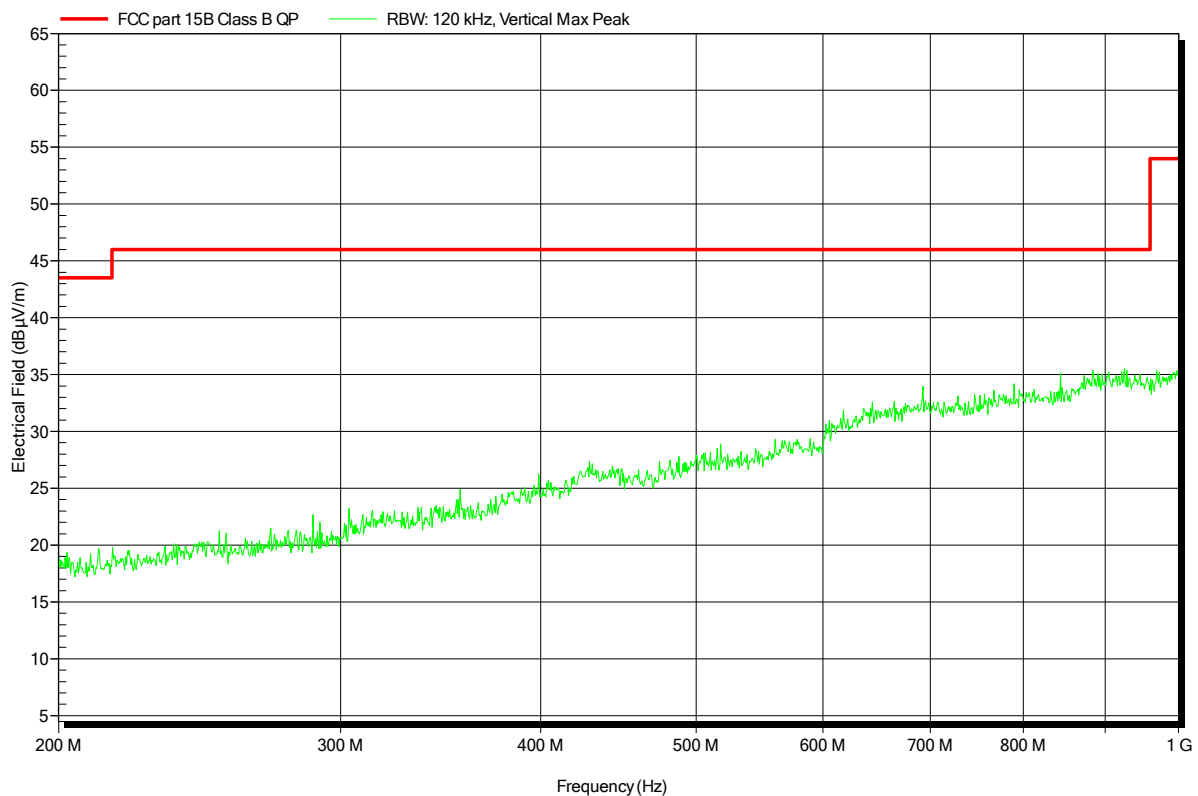


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1407-4031

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Speakerphone
 Model: HFS210
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 23°C, Unom: 5VDC via USB
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m
 Mode: charging
 Test Date: 2014-08-26
 Note:

Index 18

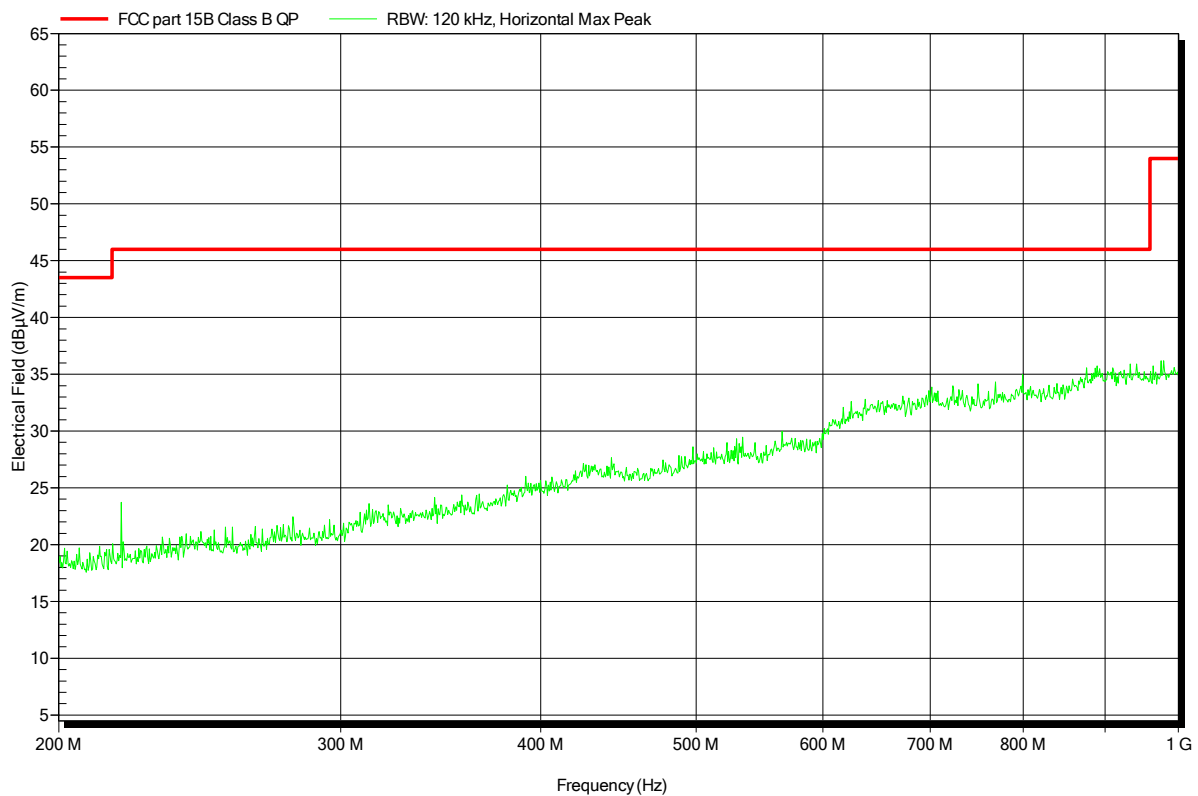


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1407-4031

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Speakerphone
 Model: HFS210
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 23°C, Unom: 5VDC via USB
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3m
 Mode: charging
 Test Date: 2014-08-26
 Note:

Index 22

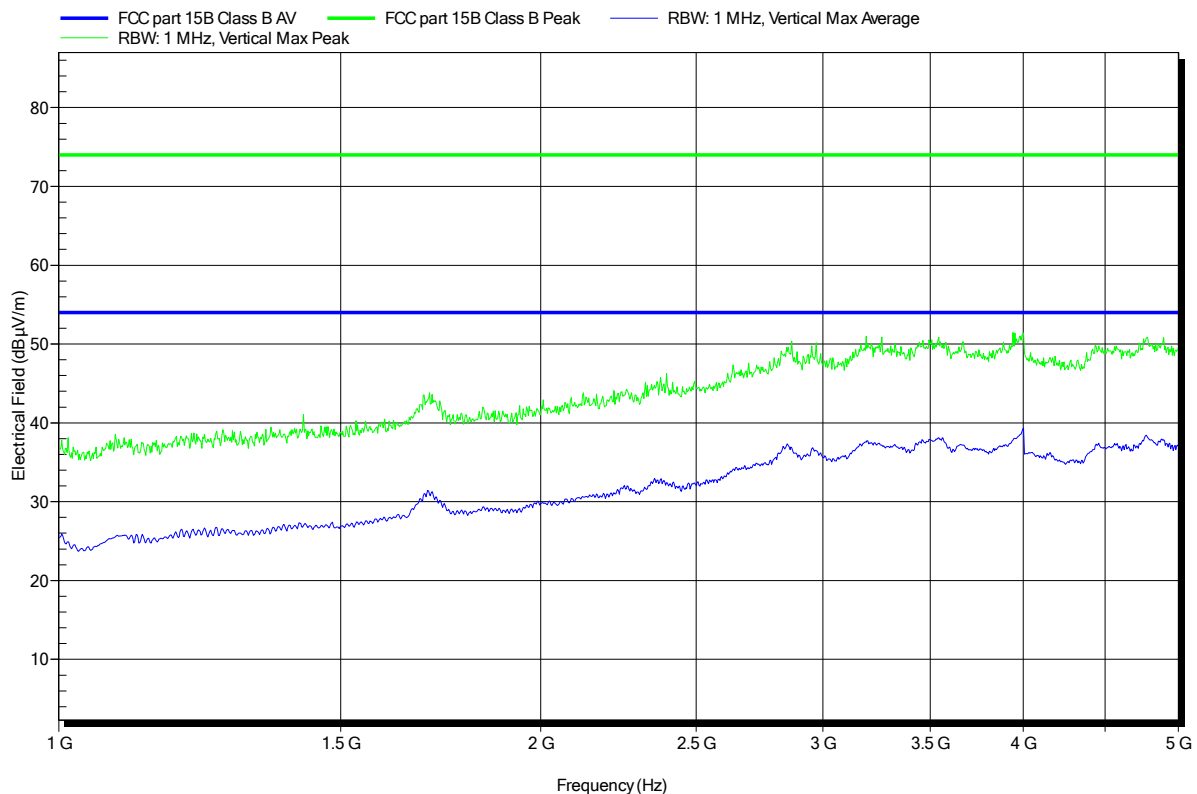


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1407-4031

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Speakerphone
 Model: HFS210
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 23°C, Unom: 5VDC via USB
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3m
 Mode: charging
 Test Date: 2014-08-26
 Note:

Index 23

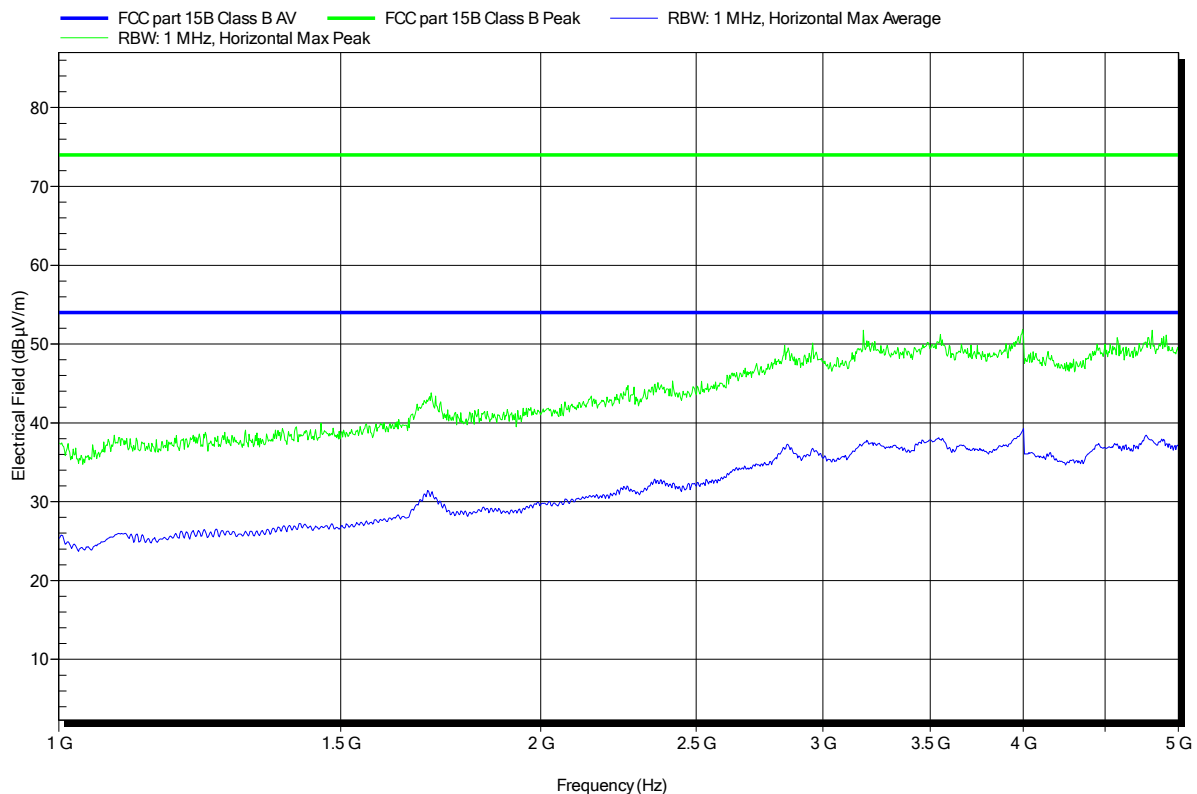

3.2 Test Conditions and Results – AC power line conducted emissions


Conducted emissions acc. FCC 47 CFR 15.107 / IC RSS-Gen			Verdict: PASS	
Laboratory Parameters:		Required prior to the test		During the test
Ambient Temperature		15 to 35 °C		23 °C
Relative Humidity		30 to 60 %		35 %
Test according referenced standards		Reference Method		
		ANSI C63.4		
Fully configured sample scanned over the following frequency range		Frequency range		
		0.15 MHz to 30 MHz		
Sample is tested with respect to the requirements of the equipment class		Equipment class		
		Class B		
Points of Application		Application Interface		
AC Mains		LISN		
Operating mode		2		
Limits and results Class B				
Frequency [MHz]	Quasi-Peak [dBµV]	Result	Average [dBµV]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments:				
* Limit decreases linearly with the logarithm of the frequency.				

EMI voltage test in the ac-mains according to FCC Part 15b

Project number: G0M-1407-4031

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Speakerphone
 Model: HFS210
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 23°C, Unom: 5VDC via USB
 LISN: ESH2-Z5 N
 Mode: charging
 Test Date: 2014-08-26
 Note:

Index 25

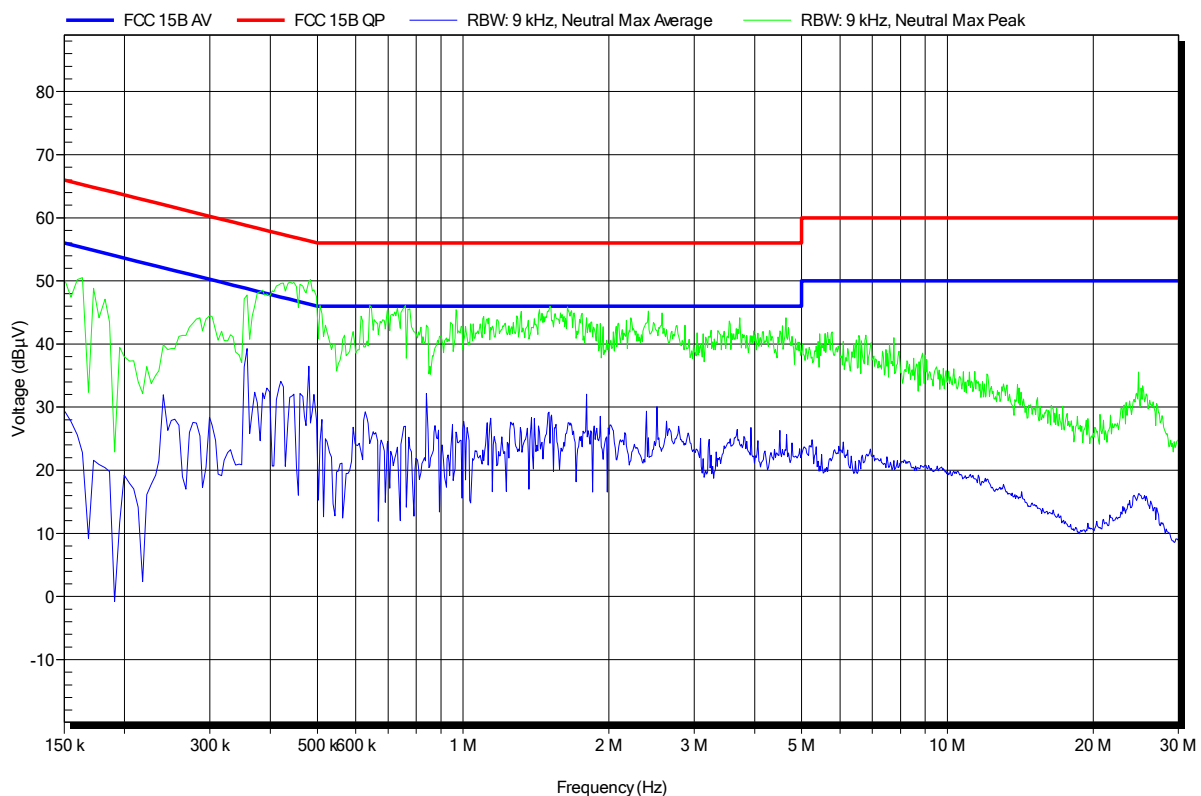

EMI voltage test in the ac-mains according to FCC Part 15b

Project number: G0M-1407-4031

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Speakerphone
 Model: HFS210
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 23°C, Unom: 5VDC via USB
 LISN: ESH2-Z5 L
 Mode: charging
 Test Date: 2014-08-26
 Note:

Index 26

