



## LDS02 – LoRaWAN Door Sensor User Manual

---

Document Version: 1.1

Image Version: v1.3

Version	Description	Date
1.0	Release	2021-May-16
1.1	Add more Battery Description	2021-Jul-1

<b>1. Introduction.....</b>	<b>4</b>
1.1 What is LDS02 LoRaWAN Door Sensor .....	4
1.2 Features.....	5
1.3 Applications.....	5
1.4 Dimension.....	5
1.5 Firmware Change log .....	5
<b>2. Power ON LDS02 .....</b>	<b>6</b>
<b>3. How to install LDS02 .....</b>	<b>6</b>
<b>4. Operation Mode .....</b>	<b>7</b>
4.1 How it works?.....	7
4.2 Example to join LoRaWAN network.....	7
4.3 Uplink Payload.....	11
4.4 Downlink Payload.....	12
4.5 Integrate with Datasake.....	15
4.6 Alarm Base on Timeout .....	18
4.7 LEDs.....	19
<b>5. Battery &amp; How to replace.....</b>	<b>20</b>
5.1 Battery Type and replace.....	20
5.2 Power Consumption Analyze .....	20
<b>6. Use AT Command.....</b>	<b>22</b>
6.1 Access AT Command.....	22
<b>7. FAQ .....</b>	<b>23</b>
7.1 How to upgrade the image?.....	23
7.2 How to change the LoRa Frequency Bands/Region? .....	23
7.3 Can I disable uplink for each event to save battery life? .....	23
<b>8. Order Info .....</b>	<b>24</b>
<b>9. Packing Info .....</b>	<b>24</b>

---

10.	Support .....	24
-----	---------------	----

## 1. Introduction

### 1.1 What is LDS02 LoRaWAN Door Sensor

The Dragino LDS02 is a LoRaWAN Door Sensor. It detects door open/close status and uplink to IoT server via LoRaWAN network. user can see the door status, open time, open counts in the IoT Server.

LDS02 is powered by 2 x AAA batteries and target for long time use, these two batteries can provide about 16,000 ~ 70,000 uplink packets. After battery running out, user can easily open the enclosure and replace with 2 common AAA batteries.

The LDS02 will send periodically data every day as well as for each door open/close action. It also counts the door open times and calculate last door open duration. User can also disable the uplink for each open/close event, instead, device can count each open event and uplink periodically.

LDS02 has the open alarm feature, user can set this feature so device will send Alarm if the door has been open for a certain time.

Each LDS02 is pre-load with a set of unique keys for LoRaWAN registration, register these keys to LoRaWAN server and it will auto connect after power on.



## 1.2 Features

- ✓ LoRaWAN Class A v1.0.3
- ✓ Frequency Bands: DTS:903-914.2MHz, Hybrid System:903.9~905.3 MHz
- ✓ SX1262 LoRa Core
- ✓ Door Open/Close detect
- ✓ Door open/close statistics
- ✓ 2 x AAA LR03 Batteries
- ✓ AT Commands to change parameters
- ✓ Uplink on periodically and open/close action
- ✓ Remote configure parameters via LoRa Downlink
- ✓ Firmware upgradable via program port

## 1.3 Applications

- ✓ Smart Buildings & Home Automation
- ✓ Logistics and Supply Chain Management
- ✓ Smart Metering
- ✓ Smart Agriculture
- ✓ Smart Cities
- ✓ Smart Factory

## 1.4 Dimension



## 1.5 Firmware Change log

LDS02 use the same firmware as LWL02


[LDS02 Image files – Download link](#)

## 2. Power ON LDS02

When receive the LDS02, please open the enclosure and add 2 x AAA batteries to power it. The [LED](#) will blink when device is powered.

## 3. How to install LDS02

When install the LDS02 on wall. Please make sure install as below so the marks will close to each other when close the door.

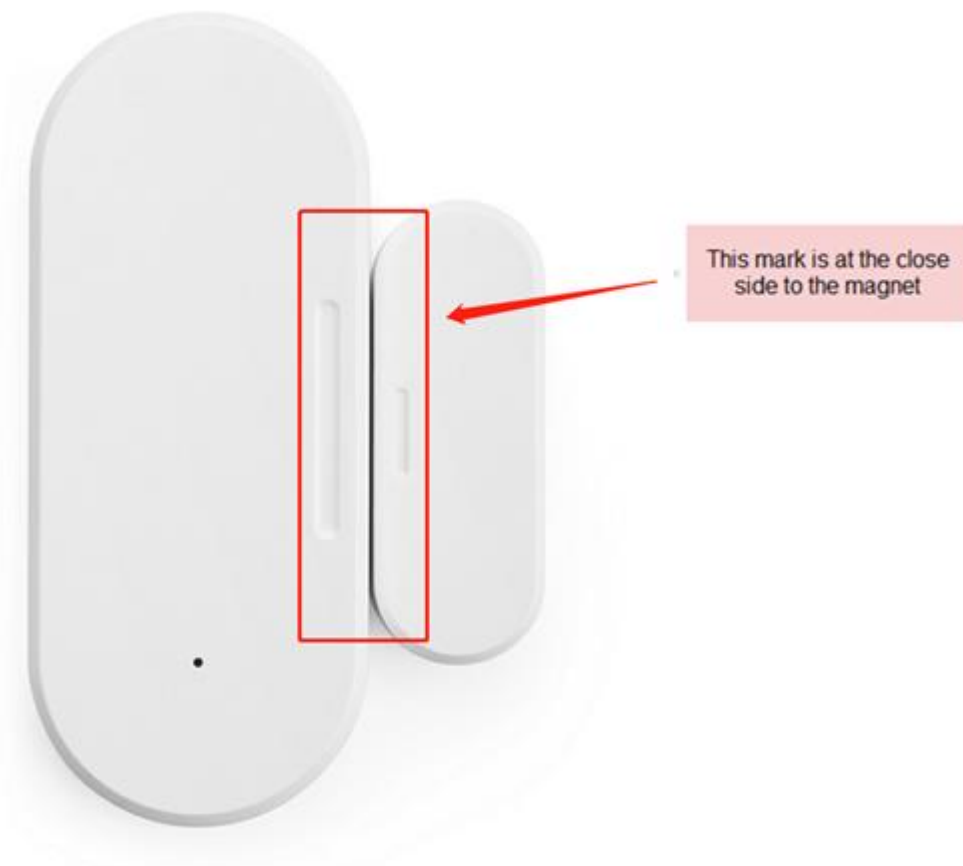

## 4. Operation Mode

### 4.1 How it works?

The LDS02 is configured as LoRaWAN OTAA Class A mode by default. It has OTAA keys to join network. To connect a local LoRaWAN network, user just need to input the OTAA keys in the network server and [power on](#) the LDS02. It will auto join the network via OTAA.

In case user can't set the OTAA keys in the network server and has to use the existing keys from server. User can [use AT Command](#) to set the keys in the devices.

### 4.2 Example to join LoRaWAN network

Here shows an example for how to join the [TTN V3 Network](#). Below is the network structure, we use [LG308](#) as LoRaWAN gateway here.



The LDS02 is installed on the door edge to detect the open / close event. And send the status to LoRaWAN server. The LDS02 will uplink two type of messages to the server.

- ✓ A keep-alive message which send once per day.
- ✓ A door event message when there is a door open/close. ([Alarm event can be disabled](#))

The LG308 is already set to connect to [TTN V3 network](#). What we need to now is only configure the TTN V3:

**Step 1:** Create a device in TTN V3 with the OTAA keys from LDS02.

Each LDS02 is shipped with a sticker with unique device EUI:



Add APP EUI in the application.

Add application

Owner \*

davidhuang

Application ID \*

My new application

Application name

My new application

Description

Description for my new application

Optional application description; can also be used to save notes about the application

[Create application](#)

**Reviewed by** *Debra A. Miller*

Approved by:	100
Reviewed at:	948 E. 2020-11-11-00
Substantiated at:	Apr 30, 2020-11-00-00

• [Help others](#)

0	100-000-000	0000000000	Foreign data message to recipient's survey
0	100-000-000	0000000000	Home country data message
0	100-000-000	0000000000	Export office data message
0	100-000-000	0000000000	Import office data message
0	100-000-000	0000000000	Inventory/ITL processing data message
0	100-000-000	0000000000	Item data message

View all articles »

*Engineering Journal*, Vol. 146

22

Figure 4

[Return to top of page](#)

[Return to top of page](#)

© 2004 Blackwell Publishing Ltd  
Journal of Internal Medicine 255: 105–112



## Register end device

From The LoRaWAN Device Repository
Manually

### 1. Select the end device

Brand <sup>\*</sup>

Dragino Technology Co., Ltd.

Model <sup>\*</sup>

Type to search...

Cannot find your exact end device?

LBT1

LDD520

LDD575

LDS01

LGT92

LHT05

LSE01

LSN50-V2

### 2. Enter registration data

Please choose an end device first to

Register end device

LDS02 and LDS01 use the same payload structure. So choose LDS01 as the model here.

### 1. Select the end device

Brand <sup>*</sup>	Model <sup>*</sup>	Hardware Ver. <sup>*</sup>	Firmware Ver. <sup>*</sup>	Profile (Region) <sup>*</sup>
Dragino Technology Co., Ltd.	LDS01	Unknown	1.1.0	EU_863_870

**LDS01**

MAC V1.1.2, PHY V1.1.2 (EU), Use the air activation (OTM), Class B

LoRaWAN Class B device

[Product website](#)

### 2. Enter registration data

Frequency plan <sup>\*</sup>

Default

The frequency plan used by the end device

AppID <sup>\*</sup>

00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00

AppID is the application ID of the end device. If no AppID is provided by the device manufacturer (usually for development), it can be filled with zeros.

Device ID <sup>\*</sup>

You can also choose to create the device manually.

## Register end device

[From The LoRaWAN Device Repository](#) [Manually](#)

### Preparation

Activation mode \*

☒ Over the air activation (OTAA)

☐ Activation by personalization (ABP)

☐ Multicast

☐ Do not configure activation

LoRaWAN version ⓘ \*

Select... | v

Network Server address

eu1.cloud.thethings.network

Application Server address

eu1.cloud.thethings.network

External Join Server ⓘ

Add APP KEY and DEV EUI

### 2. Enter registration data

**Frequency plan**  \*

Europe 863-870 MHz (SF12 for RXQ)
▼

The frequency plan used by the end device

**AppEUI**  \*

.....
00

The AppEUI uniquely identifies the owner of the end device. If no AppEUI is provided by the device manufacturer (usually for dev

**DevEUI**  \*

.....

The DevEUI is the unique identifier for this end device

**AppKey**  \*

.....


The root key to derive session keys to secure communication between the end device and the application

**End device ID** \*

my-new-device

After registration

**Step 2:** [Power on](#) LDS02 and it will auto join to the TTN V3 network. After join success, it will start to upload message to TTN V3 and user can see in the panel.



### 4.3 Uplink Payload

Uplink Payload total 10 bytes.

Size(bytes)	2	1	3	3	1
value	Status&BAT	MOD Always:0x01	Total open door events	Last door open duration (unit: min)	<a href="#">Alarm</a>

Example:



payload: 00 00 01 00 25 00 01 BAT\_V: 2.952 DOOR\_OPEN\_STATUS: 0 DOOR\_OPEN\_TIMES: 37 LAST\_DOOR\_OPEN\_DURATION: 1 MOD: 1


Example Payload Decoder in TTN V3:

[http://www.dragino.com/downloads/index.php?dir=LoRa\\_End\\_Node/LDS02/Payload/](http://www.dragino.com/downloads/index.php?dir=LoRa_End_Node/LDS02/Payload/)

#### 4.4 Downlink Payload

Downlink Control Type	Type Code	Downlink payload size(bytes)
TDC (Transmit Time Interval—Keep Alive Interval)	0x01	4
RESET	0x04	2
<a href="#">Set confirmed mode</a>	0x05	2
<a href="#">Clear Counting</a>	0xA6	2
<a href="#">Enable/Disable Alarm</a>	0xA7	2
<a href="#">Control ADR/DR</a>	0xA8	3
<a href="#">Set Alarm Timeout</a>	0xA9	4

Example Downlink payload setting in TTN V3:

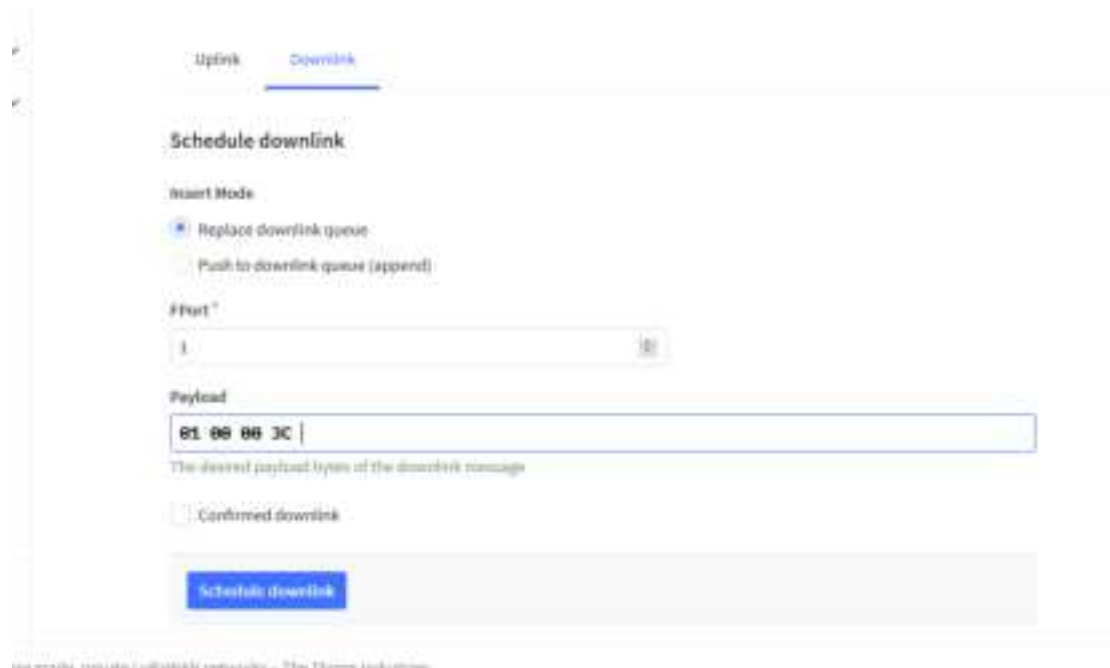

### Type Code 0x01

If the payload=0100003C, means to control the LDS02's Keep Alive interval to 0x00003C=60(S)

### Type Code 0x04

If payload = 0x04FF, it will reset the LDS02.

### Type Code 0x05

0x05 00: Set uplink to LoRaWAN unconfirmed mode

0x05 01: Set uplink to LoRaWAN confirmed mode

### Type Code 0xA6

Example: 0xA601: Clear Counting

For LDS02: reset both count number and time.

### Type Code 0xA7

0xA7 01 : Equal to AT+DISALARM=1

0xA7 00 : Equal to AT+DISALARM=0

### Type Code 0xA8

Format: 0xA8 aa bb

aa: 1: Enable ADR; 0: Disable ADR (Same as AT+CADR command)

bb: set DR (Same as AT+CDATARATE ,only valid after ADR=0)

Example: 0x A8 00 02 : Set ADR=0 and DR=1

### Type Code 0xA9


See [Alarm Base Timeout](#) for detail.

## 4.5 Integrate with Datacake

Datacake provides a human friendly interface to show the sensor data, once we have data in TTN V3, we can use Datacake to connect to TTN V3 and see the data in Datacake. Below are the steps:

Step 1: Be sure that your device is programmed and properly connected to the network at this time.

Step 2: To configure the Application to forward data to Datacake you will need to add integration. To add the Datacake integration, perform the following steps:

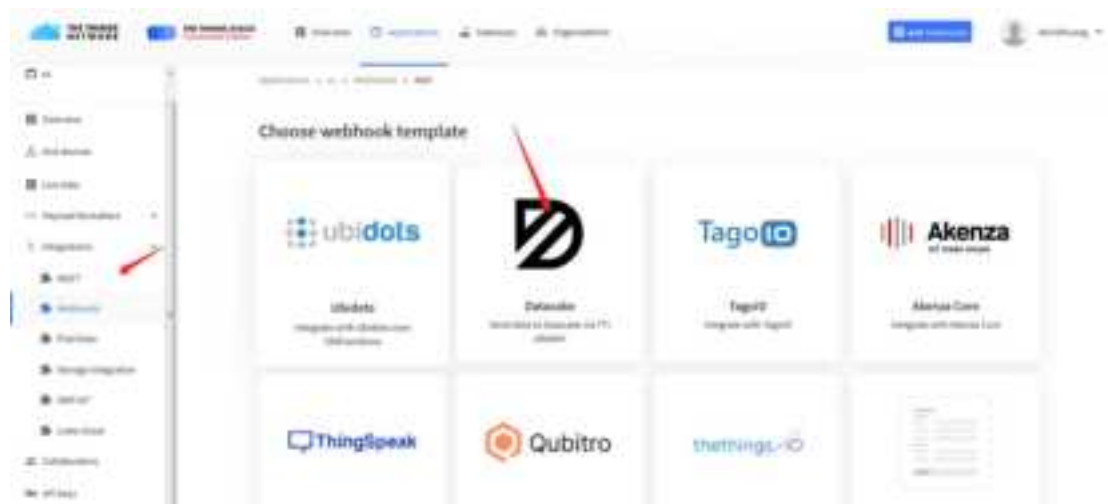

Applications > lgt92test > Webhooks > Add > Datacake

## Add custom webhook

### Template information



#### Datacake

Send data to Datacake via TTI adapter

[About Datacake](#) | [Documentation](#)

### Template settings


Webhook ID \*

Token \*

Datacake API Token


Create datacake webhook



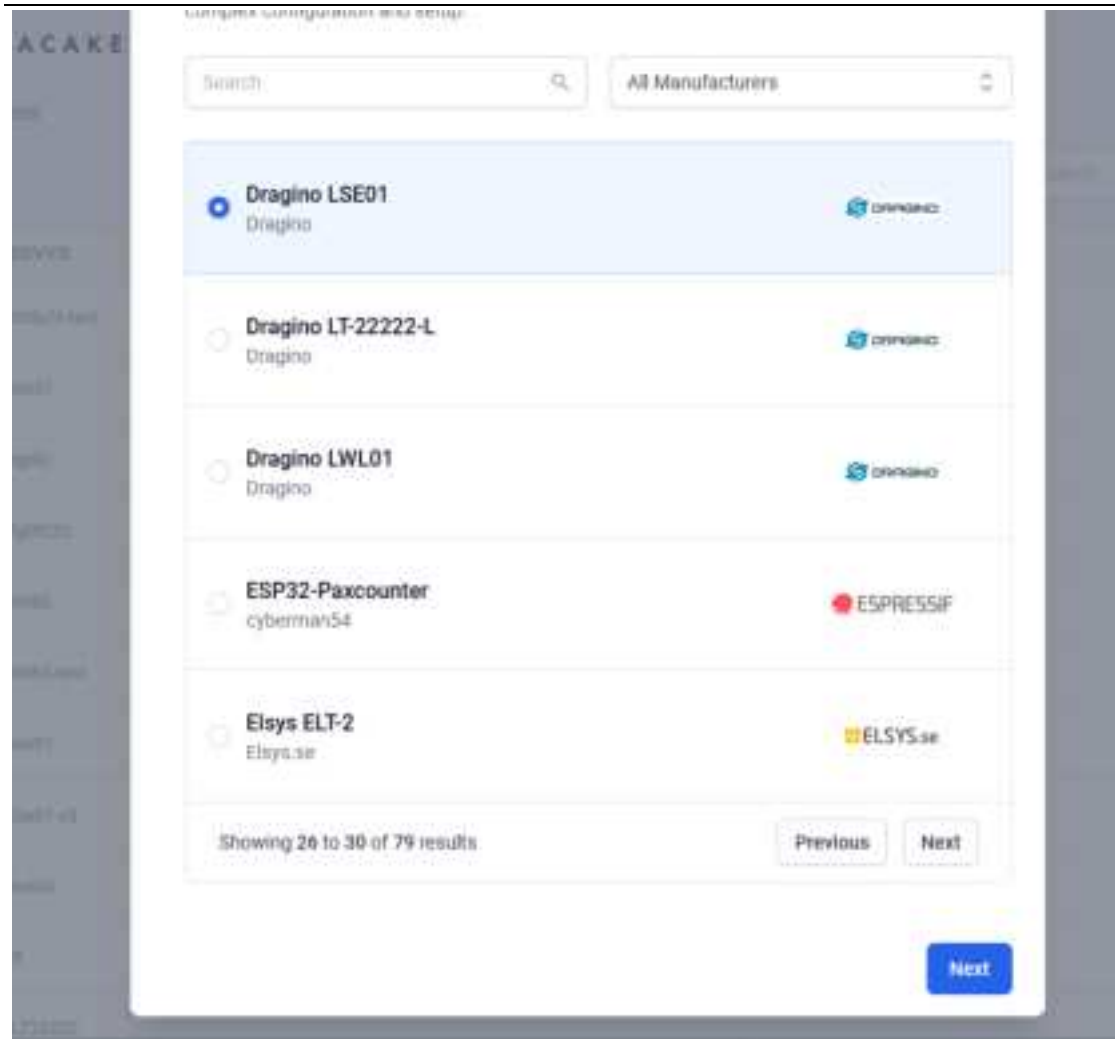

Step 3: Create an account or log in Datacake.

Step 4: Search LDS02 and add DevEUI.

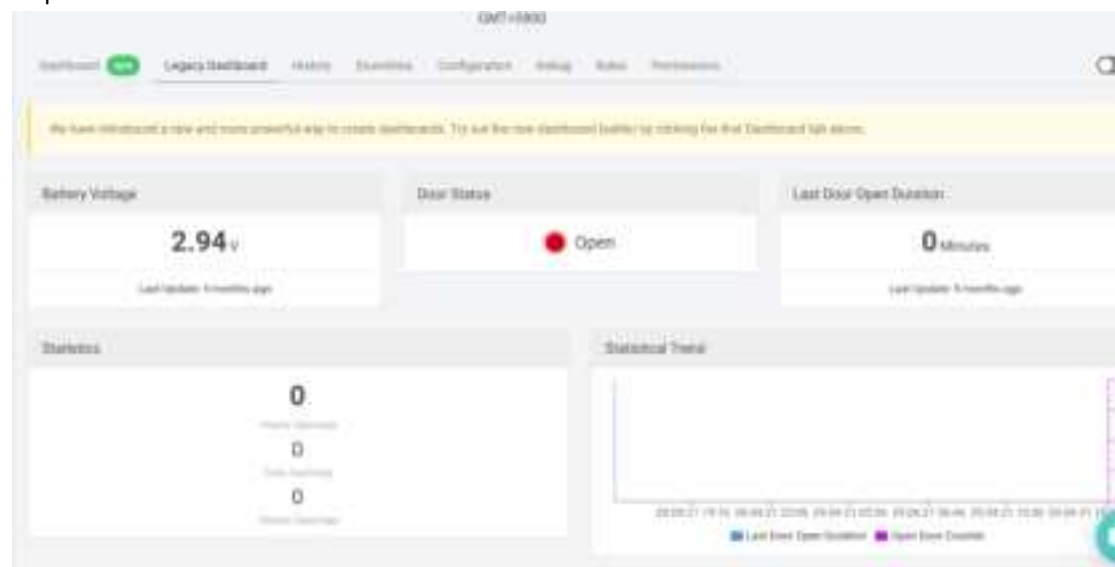

## 4.6 Alarm Base on Timeout

LDS02 can monitor the timeout for a status change, this feature can be used to monitor some event such as open fridge too long etc.

User configure this feature by using:

**AT Command** to configure:

- AT+TTRIG=1,30 → When status change from close to open, and device keep in open status for more than 30 seconds. LDS02 will send an uplink packet, the Alarm bit (the lowest bit of 10<sup>th</sup> byte of payload) on this uplink packet is set to 1.
- AT+TTIG=0,0 → Default Value, disable timeout Alarm.

**Downlink Command** to configure:

Command: 0xA9 aa bb cc

A9: Command Type Code

aa: status to be monitor

bb cc: timeout.

If user send 0xA9 01 00 1E: equal to AT+TTRIG=1,30

Or

0xA9 00 00 00: Equal to AT+TTRIG=0,0. Disable timeout Alarm.

## 4.7 LEDs

Action	LED behavior
Power On	GREEN on 1s, RED on 1s, BLUE on 1s
Joined successful	GREEN LED on 5s
Send an uplink message	GREEN LED blinks once
Got a downlink message	BLUE LED blinks once

## 5. Battery & How to replace

### 5.1 Battery Type and replace

LDS02 is equipped with 2 x AAA LR03 batteries. If the batteries running low (shows 2.1v in the platform). User can buy generic AAA battery and replace it.

Note:

- 1) The LDS02 doesn't have any screw, use can use nail to open it by the middle.
- 2) Make sure the direction is correct when install the AAA batteries.

**Important Notice: Make sure use new AAA LR03 battery and the battery doesn't have broken surface.**

Example of AAA LR03 batter:



### 5.2 Power Consumption Analyze

Dragino battery powered product are all runs in Low Power mode. We have an update battery calculator which base on the measurement of the real device. User can use this calculator to check the battery life and calculate the battery life if want to use different transmit interval.

Instruction to use as below:

Step 1: Downlink the up-to-date DRAGINO\_Battery\_Life\_Prediction\_Table.xlsx from:

[https://www.dragino.com/downloads/index.php?dir=LoRa\\_End\\_Node/Battery\\_Analyze/](https://www.dragino.com/downloads/index.php?dir=LoRa_End_Node/Battery_Analyze/)

Step 2: Open it and choose

- Product Model
- Uplink Interval
- Working Mode

And the Life expectation in difference case will be shown on the right.





When entering the first command, the **RED LED** will on and user can now input AT Commands. After input all needed AT Commands, please input AT+CLPM=1 to set the device to work in Low Power mode and **RED LED** will be off.

More detail AT Command manual can be found at [AT Command Manual](#)

## 7. FAQ

### 7.1 How to upgrade the image?

User can upgrade the firmware of LDS02 for bug fix, new features, or change working region. The upgrade instruction are here:

[http://wiki.dragino.com/index.php?title=Firmware\\_Upgrade\\_Instruction](http://wiki.dragino.com/index.php?title=Firmware_Upgrade_Instruction)

### 7.2 How to change the LoRa Frequency Bands/Region?

If user has for example US915 frequency and want to change it to AS923 frequency. User can follow the introduction for [how to upgrade image](#). When download the images, choose the required image file for download.

### 7.3 Can I disable uplink for each event to save battery life?

Yes, User can use below method to disable this:

via AT Command:

AT+DISALARM=1, End node will only send packet in TDC time.

AT+DISALARM=0, End node will send packet in TDC time or status change for door sensor.

via LoRaWAN downlink Command:

0xA701 : Equal to AT+DISALARM=1

0xA700 : Equal to AT+DISALARM=0

## 9. Packing Info

### Package Includes:

- ✓ LDS02 x 1

### Dimension and weight:

- ✓ Device Size: 69.2 x 29.2 x 14.8 mm

## 10. Support

- Support is provided Monday to Friday, from 09:00 to 18:00 GMT+8. Due to different timezones we cannot offer live support. However, your questions will be answered as soon as possible in the before-mentioned schedule.
- Provide as much information as possible regarding your enquiry (product models, accurately describe your problem and steps to replicate it etc) and send a mail to

[support@dragino.com](mailto:support@dragino.com)



**FCC Caution:**

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**IMPORTANT NOTE:**

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**FCC Radiation Exposure Statement:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.