

## ELECTROMAGNETIC COMPATIBILITY TEST REPORT



**Report Reference Number:** E10676-1901\_Versa Wireless\_KF2GIG\_Rev1.1  
**Total Number of Pages:** 33  
**Date of Issue:** August 6, 2019

**EMC Test Laboratory:** **QAI Laboratories Inc.**  
**Address:** 3980 North Fraser Way, Burnaby, BC, V5J 5K5 Canada  
**Phone:** (604) 527-8378  
**Fax:** (604) 527-8368

**Laboratory Accreditations (per ISO/IEC 17025:2005):**



**American Association for Laboratory Accreditation Certificate Number: 3657.02**

This report has been completed in accordance with the requirements of ISO/IEC xxx5. Test results contained in this report are within QAI Laboratories ISO/IEC xxx5 accreditation. QAI Laboratories authorizes the applicant to reproduce this report, provided it is reproduced in its entirety and for the use by the company's employees only.

**EMC Client:** Versa Wireless  
**Address:** 103 - 19292 60th Ave., Surrey, BC V3S 3M2, Canada  
**Phone:** (604) 427-0857

**Applicable Test Standards:** FCC Title 47 CFR Part 15: Subpart B  
FCC Title 47 CFR Part 15: Subpart C 15.231  
ICES-003 Issue 6  
RSS-210 Issue 9  
RSS-Gen Issue 5

**Equipment Tested:** Security System Keyfob with 4 Buttons  
**Model Number(s):** KF2GIG  
**FCC ID:** 2AD9X- KF2GIG  
**IC Certification Number:** 12637A- KF2GIG  
**Manufacturer:** Versa Wireless



## REVISION HISTORY

Date	Report Number	Rev #	Details	Author's Initials
August 6, 2019	E10676_1901_VersaWireless_KF2GIG_Rev	1.1	1. Horn antenna info corrected (p. 10), 2. MPE Section deleted, 3. Antenna gain corrected (p. 7).	MK
July 23, 2019	E10676_1901_VersaWireless_KF2GIG_Rev	1.0	Final	MK
July 12, 2019	E10676_1901_VersaWireless_KF2GIG_Rev	0.0	Draft	MK
<i>All previous versions of this report have been superseded by the latest dated revision as listed in the above table. Please dispose of all previous electronic and paper printed revisions accordingly.</i>				

## REPORT AUTHORIZATION

The data documented in this report is for equipment provided by Versa Wireless. The tests were performed on the sample equipment as requested by Versa Wireless for the purpose of demonstrating compliance with FCC Title 47 CFR Part 15: Subpart B and Subpart C, 15.231, ICES-003 Issue 6, RSS-210 Issue 9, and RSS-Gen Issue 5 as agreed upon by Versa Wireless as per Quote 19SH01241.

Versa Wireless is responsible for the tested product configuration, continued product compliance, and for the appropriate auditing of subsequent products as required. This report may comprise partial list of tests that are required for FCC or IC Declaration of Conformity and can only be produced by the manufacturer.

This is to certify that the following report is true and correct to the best of our knowledge.



Radio Testing by Bruce Balston, Senior  
RF/EMC Test Engineer



Emissions Testing & Report by Maryam  
Kashi, RF/EMC Test Engineer



Approved by Parminder Singh  
Director of EMC Department

## QAI FACILITIES

Founded in 1994 by a group of experienced certification and testing experts, QAI is an independent third-party testing, inspection and certification organization which serves the building industry, government and individuals with cost effective solutions through our in-house capabilities / services, and an established world-wide network of qualified affiliates. To help get your product to market, trust the provider that many leading global manufacturers do: QAI.

### British Columbia

#### QAI Laboratories Inc.

#### Main Laboratory/Headquarters

3980 North Fraser Way,  
Burnaby, BC V5J Canada

### Ontario

#### QAI Laboratories Inc.

1081 Meyerside Drive, Unit #14  
Mississauga, ON L5T 1M4 Canada

### Virginia

#### QAI Laboratories Ltd.

1047 Zachary Taylor Hwy,  
Suite A Huntly, VA 22640 USA

### California

#### QAI Laboratories Ltd.

8385 White Oak Avenue Rancho  
Cucamonga, CA 91730 USA

### Oklahoma

#### QAI Laboratories Ltd.

108th East Avenue,  
Tulsa, OK 74116 USA

## QAI EMC ACCREDITATION

QAI EMC is your one-stop regulatory compliance partner for electromagnetic compatibility (EMC) and electromagnetic interference (EMI). Products are tested to the latest and applicable EMC/EMI requirements for domestic and international markets. QAI EMC goes above and beyond being a testing facility—we are your regulatory compliance partner. QAI EMC has the capability to perform RF Emissions and Immunity for all types of electronics manufacturing including Industrial, Scientific, Medical, Information Technology, Telecom, Wireless, Automotive, Marine and Avionics.

EMC Laboratory Location	FCC Designation (3m SAC)	IC Registration (3m SAC)	A2LA Certificate
Burnaby, BC, Canada	CA9543	21146-1	3657.02



**Headquarters & EMC Laboratory in Burnaby, BC**

## TABLE OF CONTENTS

<b>REVISION HISTORY .....</b>	<b>2</b>
<b>REPORT AUTHORIZATION.....</b>	<b>2</b>
<b>QAI FACILITIES .....</b>	<b>3</b>
<b>QAI EMC ACCREDITATION .....</b>	<b>3</b>
<b>TABLE OF CONTENTS .....</b>	<b>4</b>
<b>Section I: EXECUTIVE SUMMARY .....</b>	<b>5</b>
<b>1.1 Purpose .....</b>	<b>5</b>
<b>1.2 Scope .....</b>	<b>5</b>
<b>1.3 Summary of Results .....</b>	<b>5</b>
<b>Section II: GENERAL INFORMATION .....</b>	<b>6</b>
<b>2.1 Product Description .....</b>	<b>6</b>
<b>2.2 Environmental Conditions .....</b>	<b>8</b>
<b>2.3 Measurement Uncertainty .....</b>	<b>8</b>
<b>2.4 Worst Test Case .....</b>	<b>8</b>
<b>2.5 Sample Calculations of Emissions Data .....</b>	<b>8</b>
<b>2.6 Test Equipment List .....</b>	<b>10</b>
<b>Section III: TEST RESULTS.....</b>	<b>11</b>
<b>3.1 Antenna Requirement.....</b>	<b>11</b>
<b>3.2 Transmission Time.....</b>	<b>12</b>
<b>3.3 Duty Cycle Correction Factor Calculation .....</b>	<b>14</b>
<b>3.4 Field Strength of Carrier Frequency .....</b>	<b>16</b>
<b>3.5 99% Occupied Bandwidth.....</b>	<b>17</b>
<b>3.6 Intentional Spurious Emissions .....</b>	<b>19</b>
<b>3.7 Receiver Radiated Emissions .....</b>	<b>25</b>
<b>Appendix A: TEST SETUP PHOTOS.....</b>	<b>27</b>
<b>Appendix B: ABBREVIATIONS.....</b>	<b>32</b>

## Section I: EXECUTIVE SUMMARY

### 1.1 Purpose

The purpose of this report is to demonstrate and document the compliance of “KF2GIG” as per Sections 1.2 & 1.3 of this report.

### 1.2 Scope

The information documented in this report is based on the test methods and levels as per Quote 19SH01241:

- **FCC Title 47 CFR Part 15** – Radio Frequency Devices, Subpart B- Unintentional Radiators.
- **ICES-003 Issue 6** – Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement.
- **FCC Title 47 CFR Part 15** – Radio Frequency Devices, Subpart C - Intentional Radiators
  - o §15.231 - Periodic Operation in the band 40.66-40.70 MHz and above 70 MHz
- **RSS-210 Issue 9** – License-exempt Radio Apparatus (All Frequency Bands): Category I Equipment
  - o Annex 1 - Momentarily Operated Devices and Remote Control
- **RSS-Gen Issue 5** – General Requirements and Information for the Certification of Radio Apparatus

### 1.3 Summary of Results

The following tests demonstrate the testimony to “FCC and IC” Mark Electromagnetic compatibility radio testing for the “Versa Plus” device manufactured by Ion Digital Canada.


**The following testing was performed pursuant to FCC & IC Radio and RF Emissions Standards**

Test Description	Applicable FCC Test Standard	Applicable IC Test Standard	Test Method	Result
Antenna Requirement	Title 47 CFR Part 15: Subpart C §15.203	Rss-Gen Issue 5 Section 7.1.2	N/A	PASS
Transmission Time	Title 47 CFR Part 15: Subpart C §15.231 (a)	RSS-210 Issue 9	N/A	PASS
Duty cycle Correction Factor Calculation	Title 47 CFR Part 15: Subpart C	Rss-Gen Issue 4	ANSI C63.10-2013	PASS
Field Strength of Carrier Frequency	Title 47 CFR Part 15: Subpart C §15.231 (b)	RSS-210 Issue 9 RSS-Gen Issue 5	ANSI C63.10-2013	PASS
99% Occupied Bandwidth	Title 47 CFR Part 15: Subpart C §15.231 (c)	RSS-210 Issue 9 RSS-Gen Issue 4	ANSI C63.10-2013	PASS
Intentional Spurious Emissions	Title 47 CFR Part 15: Subpart C §15.231 (b)	RSS-210 Issue 9 RSS-Gen Issue 5	ANSI C63.10-2013	PASS
Receiver Radiated Emissions	Title 47 CFR Part 15: Subpart B §15.109 in Restricted Bands	RSS-Gen Issue 5	ANSI C63.4-2014	PASS

## Section II: GENERAL INFORMATION

### 2.1 Product Description

The information provided in this section is for the Equipment Under Test (EUT) and corresponding Auxiliary Equipment required to perform the tests as a complete system.

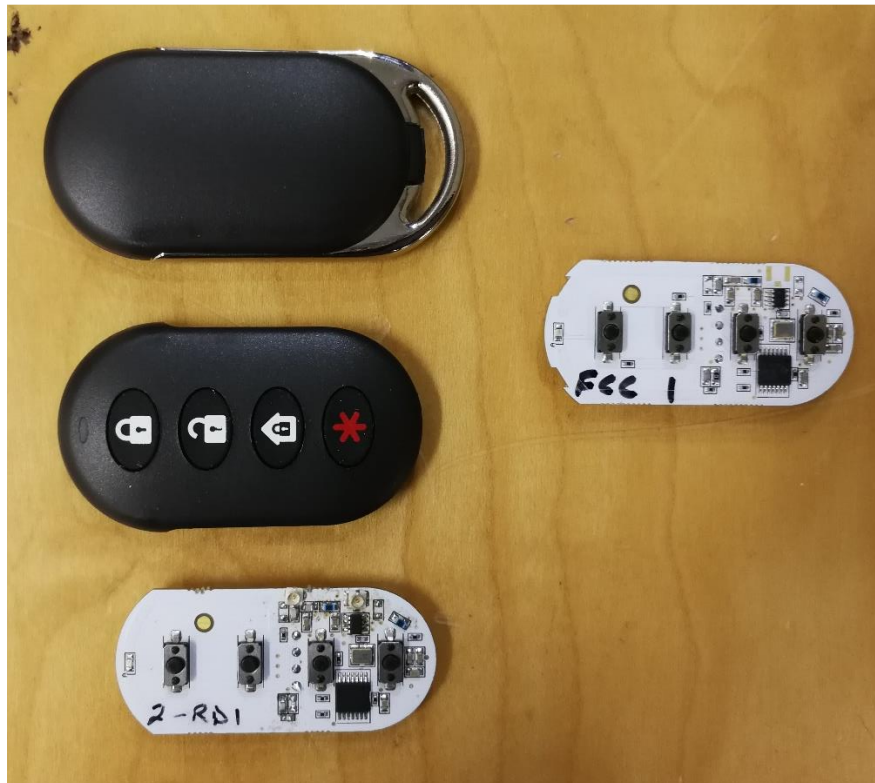

**EUT – KF2GIG: Casing, normal operation and CW units**



**Battery – 3VDC CR2032**

### Equipment Under Test (EUT) Information

<b>EUT</b>	Security System Keyfob with 4 Buttons
<b>Description</b>	Momentary transmitter
<b>FCC ID</b>	2AD9X- KF2GIG
<b>IC Number</b>	12637A- KF2GIG
<b>Manufacturer</b>	Versa Wireless
<b>Model No.</b>	KF2GIG
<b>Serial No.</b>	
<b>Operating Frequency</b>	344.97 MHz
<b>Transmit Power</b>	-7 dBm e.i.r.p.
<b>Modulation Type</b>	ASK - OOK
<b>Test Channels</b>	344.97 MHz
<b>Data Rate</b>	2 kbps
<b>Antenna Type</b>	Loop
<b>Antenna Gain</b>	-25 dBi
<b>Input Power</b>	CR2032, Coin Cell Battery, 3VDC

## 2.2 Environmental Conditions

The equipment under test was operated and tested under the following environmental conditions:

Parameter	Conditions
Location	Indoors
Temperature	22-28°C
Relative Humidity	39.7 - 54.4%

## 2.3 Measurement Uncertainty

Parameter	Uncertainty
Radiated Emissions, 30MHz-1GHz	± 2.40 dB
Radiated Emissions, 1GHz-40GHz	± 2.48 dB
Radio Frequency	±1.5 x 10 <sup>-5</sup> MHz
Total RF Power Conducted	±1.36 dB
Spurious Emissions, Conducted	±1.36 dB
RF Power Density, Conducted	±1.36 dB
Temperature	±1°C
Humidity	±5 %
DC and low frequency voltages	±3 %

## 2.4 Worst Test Case

Worst-case orientation was determined during the preliminary testing. The final radiated emissions were performed in the worst-case orientation.

## 2.5 Sample Calculations of Emissions Data

Radiated and conducted emissions were performed using EMC32 software developed by Rohde & Schwarz. Transducer factors like Antenna factors, Cable Losses and Amplifier gains were stored in the test templates which are used to perform the emissions measurements. After test is finished, data is generated from the EMC32 consisting of product details, emission plots and final data tables as shown below.

Frequency (MHz)	Q-Peak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Ant. Ht. (cm)	Pol	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
42.663900	33.0	1000.000	120.000	100.0	H	70.0	13.2	7.5	40.5

Quasi Peak reading shown in the table above is already corrected by the software using correction factor shown in column "Corr." The correction factor listed under "Corr." table calculated as:

$$\text{Corr. (dB)} = \text{Antenna factor} + \text{Cable loss}$$

Or

$$\text{Corr. (dB)} = \text{Antenna factor} + \text{Cable Loss} - \text{Amp gain (if pre-amplifier was used)}$$

The final Quasi-peak reading shown in the data is calculated by the software using following equation:

Client: Versa Wireless

Report Number: E10676-1901\_VersaWireless-KF2GIG\_Rev1.1



$$\text{Corrected Quasi Peak (dB}\mu\text{V/m)} = \text{Raw Quasi-Peak Reading} + \text{Antenna factor} + \text{Cable loss}$$

To obtain the final Quasi-Peak or Average reading during power line conducted emissions, transducer factors are included in the final measurement as shown below.

Frequency (MHz)	Q-Peak (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	PE	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.150	44.3	1000.000	9.000	GND	0.6	21.7	66.0

Frequency (MHz)	Average (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	PE	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.150	27.2	1000.000	9.000	GND	0.6	28.8	56.0

Quasi-Peak or Average reading shown in above table is already corrected by the software using the correction factor shown in column "Corr." The correction factor listed under "Corr." table calculated as:

$$\text{Corr. (dB)} = \text{Antenna factor} + \text{Cable loss}$$

The final Quasi-peak or Average reading shown in the data is calculated by the software using following equation:

$$\text{Corr. Quasi-Peak/Average Reading (dB}\mu\text{V)} = \text{Raw Quasi Peak/Average Reading} + \text{Antenna factor} + \text{Cable loss}$$

The allowable margins from the limits, as per the standards, were calculated for both radiated and conducted emissions:

$$\text{Margin (dB)} = \text{Limit} - \text{Quasi-Peak or Average reading}$$

## 2.6 Test Equipment List

The tables below contain all the equipment used by QAI Laboratories in conducting all tests on the Equipment Under Test (EUT) as per Section 1.3.

### Emissions Test Equipment

Manufacturer	Model	Description	Serial No.	Calibration Due Date
Sunol Sciences	SM46C	Turntable	051204-2	N/A
Sunol Sciences	TWR95	Mast	TREML0001	N/A
EMCO	6502	Loop Antenna	6502	11/13/2020
Sunol Sciences	JB1	Biconilog Antenna 30MHz – 2GHz	A070209	2020-Aug-16
ETS Lindgren	3117	Horn Antenna 1GHz-18GHz	75944	2020-Aug-29
ETS Lindgren	2165	Turntable	00043677	N/A
ETS Lindgren	2125	Mast	00077487	N/A
Rohde & Schwarz	ESU40	EMI Receiver	100011	2019-Dec-01
Fischer	FCC-LISN-50-25-2-08	LISN (150kHz-30MHz)	2041	2018-Nov-19
ETS Lindgren	S201	5-meter Semi-Anechoic Chamber	1030	N/A
AH Systems	PAM118	Amplifier 10KHz-18GHz	189	Conditional Use
WEINSCHL ENGINEERING	44	6db attenuator	665	N/A
Insulated Wire Inc.	SPS-1753-1140-SPS	Yellow cable, 3m	102395	N/A
Insulated Wire Inc.	SPS-1753-2400-SPS	Yellow cable, 6m	091096	N/A

*Note: Equipment listed above have 3 years calibration interval.*

### Measurement Software List

Manufacturer	Model	Version	Description
Rhode & Schwarz	EMC 32	6.20.0	Emissions Test Software

## Section III: TEST RESULTS

### 3.1 Antenna Requirement

**Date Performed:**

March 26, 2019

**Test Standard:**

FCC 47 CFR Part 15.203 and IC RSS-Gen Section 7.1.2

**Applicable Regulation:**

The purpose of this requirement is to make certain that no other antenna, except for that provided by the responsible party, shall be used with the Equipment-Under-Test (EUT) as defined in FCC CFR 47 Part 15.203 & RSS-Gen:

“An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.” ... “the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.”

**Modifications:**

No modification was required to comply for this test.

**Result:**

An integrated antenna is used on this product and it is not field replaceable.

## 3.2 Transmission Time

### Date Performed:

March 26, 2019

### Test Standard:

- Title 47 CFR Part 15: Subpart C, §15.231 (a)
- RSS-210 Issue 9, A.1.1


### Requirement(s):

- A manually operated transmitter shall be equipped with a push-to-operate switch and be under manual control at all times during transmission. When released, the transmitter shall cease transmission within no more than 5 seconds of being released.
- A transmitter that has been activated automatically shall cease transmission within 5 seconds of activation.

### Result:

The EUT complies with the applicable standard.

### Data/Plot:

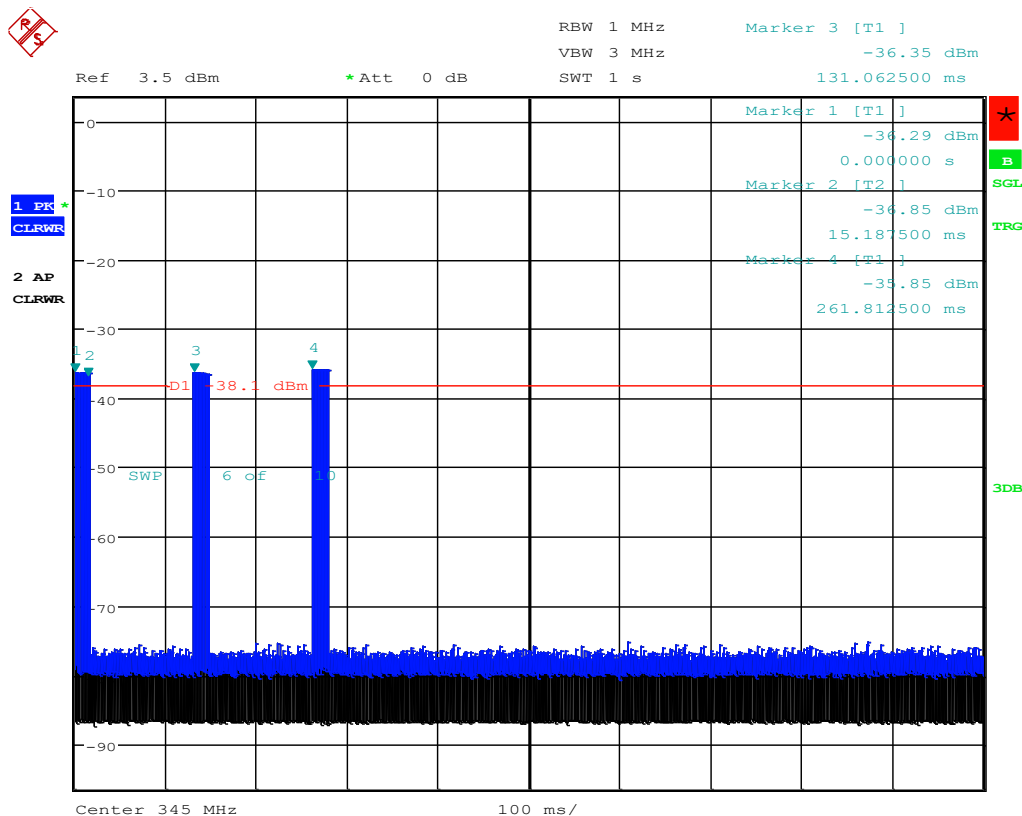

Plot 1: Transmission Time Measurement

Measured TX Transmission Time	Limit	Result
280 ms	< 5 s	PASS

**Table 1: Transmission time measurement data**

### 3.3 Duty Cycle Correction Factor Calculation

#### Date Performed:

March 26, 2019


#### Requirement(s):

- § 15.35(c) - Unless otherwise specified, e.g. § 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

#### Method of Measurement:

- ANSI C63.10-2013 standard.

#### Data/Plot:

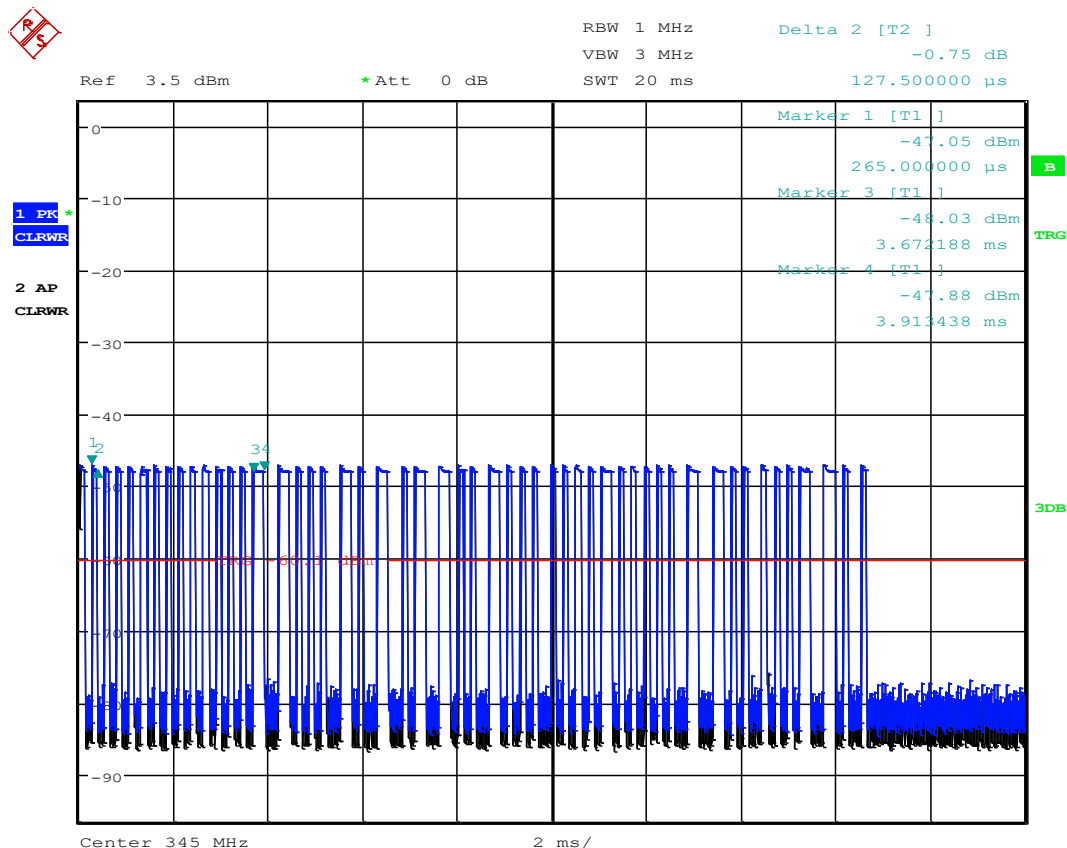

**Table 2: Duty Cycle Correction Factor Calculation**

Data Transmissions		Number of pulses
Long Pulse Duration	$3.913 - 3.672 = 0.241 \text{ ms}$	12
Short pulse Duration	0.1275 ms	39
Total Transmissions Duration	$(12 \times 0.241) + (39 \times 0.1275) = 8,287 \text{ ms}$	
On Time within 100 msec	7.865 ms	
<b>Duty Cycle Correction factor</b>	<b><math>20\log (7.865/100) = -22.01 \text{ dB}</math></b>	

### 3.4 Field Strength of Carrier Frequency

#### Date Performed:

March 23, 2018

#### Test Standard:

- Title 47 CFR Part 15: Subpart C, §15.231 (b)
- RSS-210 Issue 9, A.1.2
- RSS-Gen Issue 5, 8.9 & 8.10

#### Test Method:

- ANSI C63.10-2013

#### Required Limit(s):

The field strength of emissions from intentional radiators operated under this section (§15.231) shall not exceed the following:

Fundamental Frequency, $f$ (MHz)	Field strength of Fundamental ( $\mu\text{V/m}$ )	Field strength of Fundamental (dB $\mu\text{V/m}$ )
40.66 – 40.70	2250	67.0
70 – 130	1250	62.0
130 – 174	1250 – 3750*	62.0 – 71.5*
174 – 260	3750	71.5
260 – 470	3750 – 12500*	71.5 – 82.0*
above 470	12500	82.0
* - Linear interpolation with frequency, $f$ , in MHz: For 130-174 MHz: Field Strength ( $\mu\text{V/m}$ ) = $(56.82 \times f) - 6136$ For 260-470 MHz: Field Strength ( $\mu\text{V/m}$ ) = $(41.67 \times f) - 7083$		
<b>Note 1:</b> The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.		

#### Data & Plot:

Freq.	Raw Peak at 3m	Ant. Pol.	System Loss/Correction Factor	Corrected Peak at 3m	Duty Cycle Corr. Factor	Avg FS	Limit Avg	Margin	EUT Orientation
MHz	dB $\mu\text{V/m}$		dB	dB $\mu\text{V/m}$	dB	dB $\mu\text{V/m}$	dB $\mu\text{V/m}$	dB	
345	67.2	V	23.8	91.0	22	69.0	80.8	11.0	Flat, Buttons up
345	50.3	H	23.8	77.1	22	55.1	80.8	25.7	Flat, Buttons up

**Note:** EUT was tested in xy (flat), yz, and xz-plane orientations. Reported results above pertain to the worst case.

**Result:** The EUT complies with the applicable standard.



### 3.5 99% Occupied Bandwidth

**Date Performed:**

March 26, 2019

**Test Standard:**

- Title 47 CFR Part 15: Subpart C, §15.231 (c)
- RSS-210 Issue 9, A.1.3
- RSS-Gen Issue 5, 6.6

**Test Method:18.6**

- ANSI C63.10-2013

**Required Limit(s):**

- The 99% bandwidth of momentarily operated devices shall be less or equal to 0.25% of the centre frequency for devices operating between 70 MHz and 900 MHz. For devices operating above 900 MHz, the 99% bandwidth shall be less or equal to 0.5% of the centre frequency.

**Method of Measurement:**

- As called in the ANSI C63.10-2013 standard.


**Modifications:**

No modification was required to comply for this test.

**Result:**

The EUT complies with the applicable standard.

**Data/Plot:**

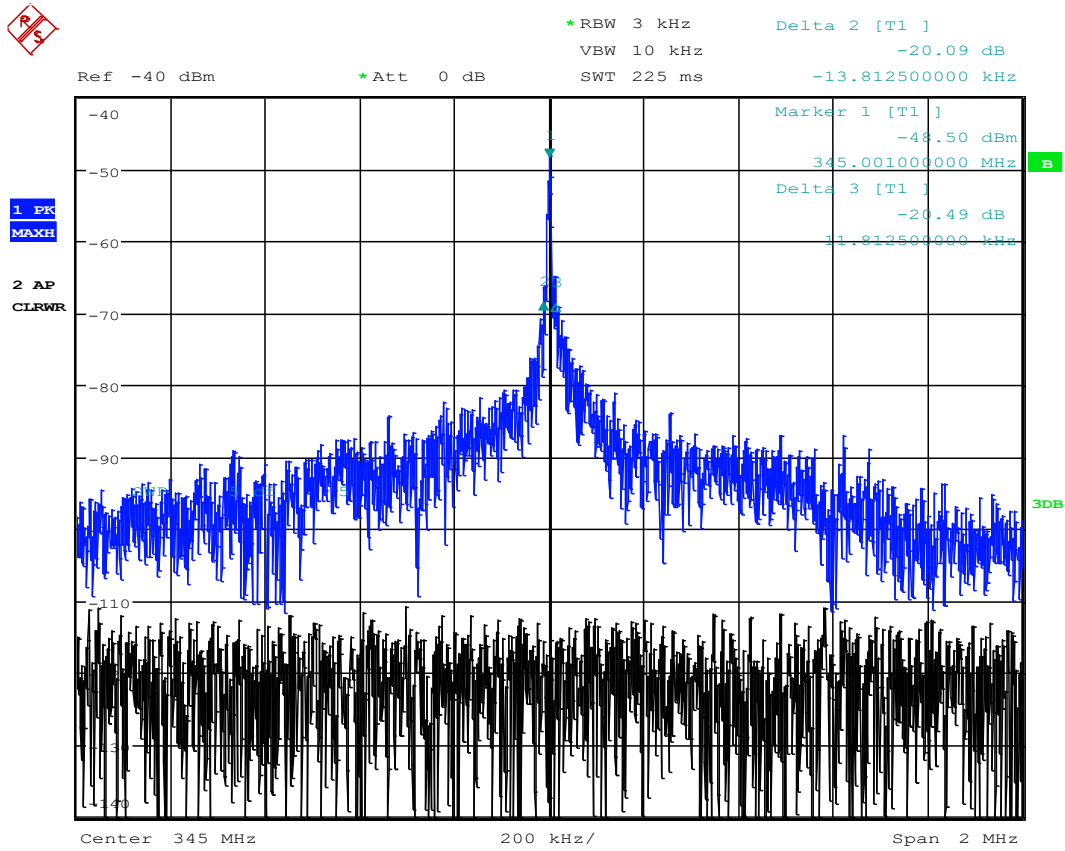

**Plot 2: 99% Occupied Bandwidth**

**Table 5: 99% OBW Data**

Frequency (MHz)	Measured 99% BW (MHz)	Limit (MHz)	Result
345	0.0256	1082.5	PASS

### 3.6 Intentional Spurious Emissions

#### Date Performed:

1-6 GHz: March 15, 2019  
30 MHz-1 GHz: March 25, 2019  
1 kHz – 30 MHz: April 11, 2019

#### Test Standard:

- Title 47 CFR Part 15: Subpart C, §15.231 (b)
- RSS-210 Issue 9, A.1.2
- RSS-Gen Issue 5, 8.9 & 8.10

#### Test Method:

- ANSI C63.10-2013

#### Required Limit(s):

The field strength of emissions from intentional radiators operated under this section (§15.231) shall not exceed the following:

Fundamental Frequency, $f$ (MHz)	Field strength of Fundamental ( $\mu\text{V/m}$ )	Field strength of Fundamental (dB $\mu\text{V/m}$ )	Field strength of Spurious Emissions ( $\mu\text{V/m}$ )	Field strength of Spurious Emissions (dB $\mu\text{V/m}$ )
40.66 – 40.70	2250	67.0	225	47.0
70 – 130	1250	62.0	125	62.0
130 – 174	1250 – 3750*	62.0 – 71.5*	125 – 375*	42.0 – 51.5*
174 – 260	3750	71.5	375	51.5
260 – 470	3750 – 12500*	71.5 – 82.0*	375 – 1250*	51.5 – 62.0*
above 470	12500	82.0	1250	62.0
* - Linear interpolation with frequency, $f$ , in MHz: For 130-174 MHz: Field Strength ( $\mu\text{V/m}$ ) = $(56.82 \times f) - 6136$ For 260-470 MHz: Field Strength ( $\mu\text{V/m}$ ) = $(41.67 \times f) - 7083$				
<b>Note 1:</b> The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.				

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

Frequency, $f$ (MHz)	Field strength (dB $\mu\text{V/m}$ )
0.009 – 0.490	$(20 \times \log(2400/f \text{ (kHz)})) + 40 \text{ dB}$
0.490 – 1.705	$(20 \times \log(24000/f \text{ (kHz)})) + 20 \text{ dB}$
1.705 – 30.0	49.5
30 – 88	40.0
88 – 216	43.5
216 – 960	46.0
above 960	54.0
<b>Note 1:</b> The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.	
<b>Note 2:</b> The emissions limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.	

Unwanted emissions that fall into the restricted bands specified on the table below shall comply with the limits specified on the table limits above as per §15.209 and Clause 8.9 of RSS-Gen.

FCC Restricted Bands:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

IC/RSS Restricted Bands:

MHz	MHz	GHz
0.090-0.110	240-285	9.0-9.2
2.1735-2.1905	322-335.4	9.3-9.5
3.020-3.026	399.9-410	10.6-12.7
4.125-4.128	608-614	13.25-13.4
4.17725-4.17775	960-1427	14.47-14.5
4.20725-4.20775	1435-1626.5	15.35-16.2
5.677-5.683	1645.5-1646.5	17.7-21.4
6.215-6.218	1660-1710	22.01-23.12
6.26775-6.26825	1718.8-1722.2	23.6-24.0
6.31175-6.31225	2200-2300	31.2-31.8
8.291-8.294	2310-2390	36.43-36.5
8.362-8.366	2655-2900	Above 38.6
8.37625-8.38675	3260-3267	
8.41425-8.41475	3332-3339	
12.29-12.293	3345.8-3358	
12.51975-12.52025	3500-4400	
12.57675-12.57725	4500-5150	
13.36-13.41	5350-5460	
16.42-16.423	7250-7750	
16.69475-16.69525	8025-8500	
16.80425-16.80475		
25.5-25.67		
37.5-38.25		
73-74.6		
74.8-75.2		
108-138		
156.52475-156.52525		
156.7-156.9		

## Method of Measurement:

The EUT was tested in our 3 m SAC and was positioned on the center of the turntable. The transmitter was set for continuous transmission. The operating frequency of the device was measured for all radiated emissions 10 kHz to 6 GHz up to the 10th harmonic of the highest fundamental frequency. The EUT was pre-scanned in 3 different orthogonal orientations and was found to radiate highest when placed flat on the table top as indicated in the test photos.

Transmission is generated once button is pressed. Since this involved human intervention in the SAC, EUT with Continuous Wave (CW) was tested, and Duty Cycle Correction Factor (DDCF) as per 4.4 was applied to calculate results for modulated transmission.

## Modifications:


No modification was required to comply for this test.

## Result:


The EUT complies with the applicable standard.

## Data/Plot:

### 1 – 30 MHz:

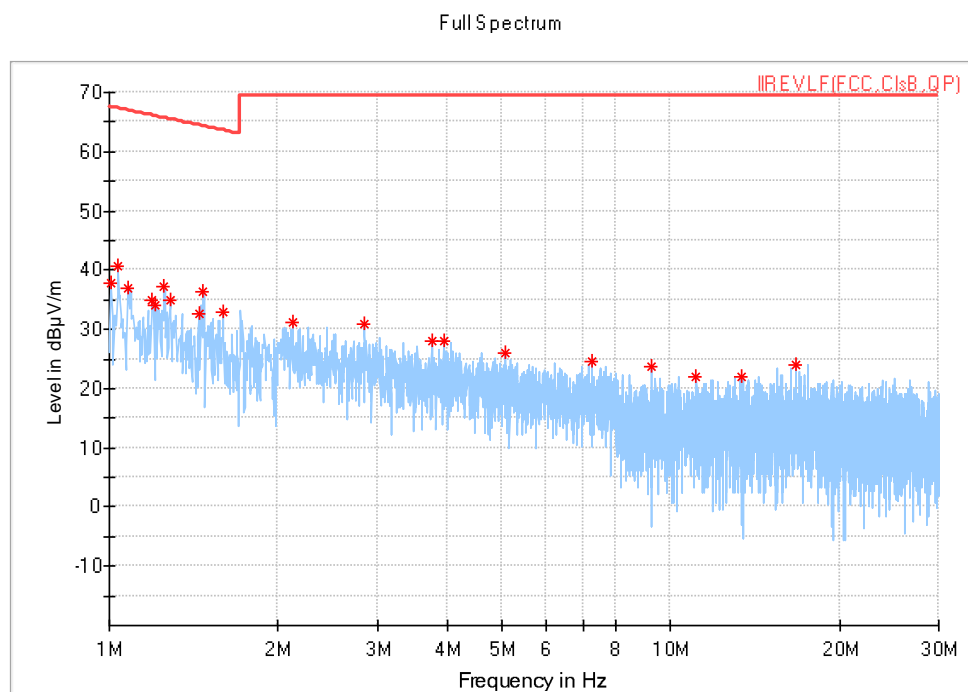


**Plot 3: Radiated Emissions (1-30M Hz) – Vertical Pol.**

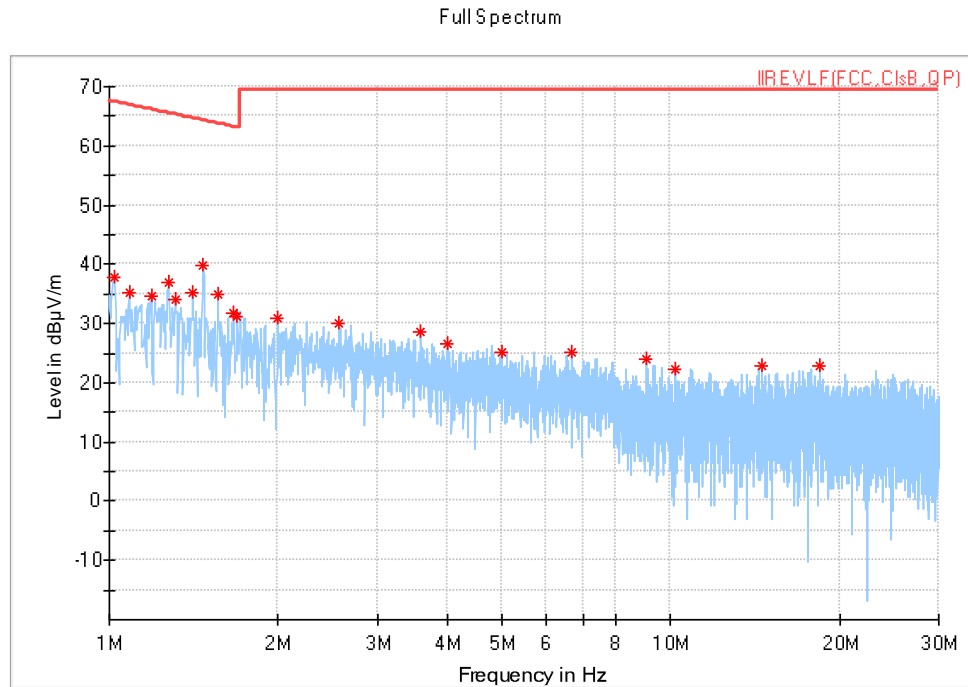

**Plot 4: Radiated Emissions (1-30M Hz) – Parallel Pol.**

**Note:** No emissions found within 20 dB margin of limit line.


30 MHz – 1 GHz:

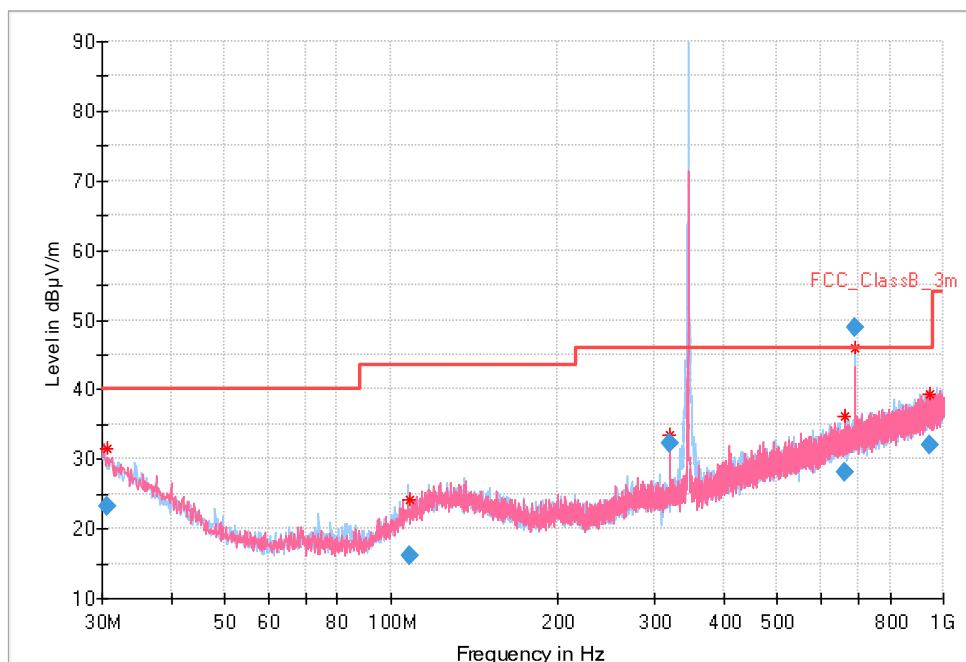

Plot 5: Radiated Emissions (30MHz-1GHz) scanned at 3m SAC

Frequency (MHz)	QuasiPeak (dBμV/m)	DCCF (dB)	DCCF_Corrected QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.688536	23.12	-	-	40.00	16.88	1000.0	120.000	236.0	V	0.0	26.7
108.299850	16.17	-	-	43.50	27.33	1000.0	120.000	200.0	H	24.0	20.3
319.509850	32.21	-	-	46.00	13.79	1000.0	120.000	188.0	H	201.0	23.3
661.942450	28.18	-	-	46.00	17.82	1000.0	120.000	108.0	V	106.0	30.7
689.992600	48.79	22	26.79	46.00	19.21	1000.0	120.000	118.0	H	215.0	31.1
942.013950	32.09	-	-	46.00	13.91	1000.0	120.000	213.0	H	226.0	34.7

1 – 6 GHz:

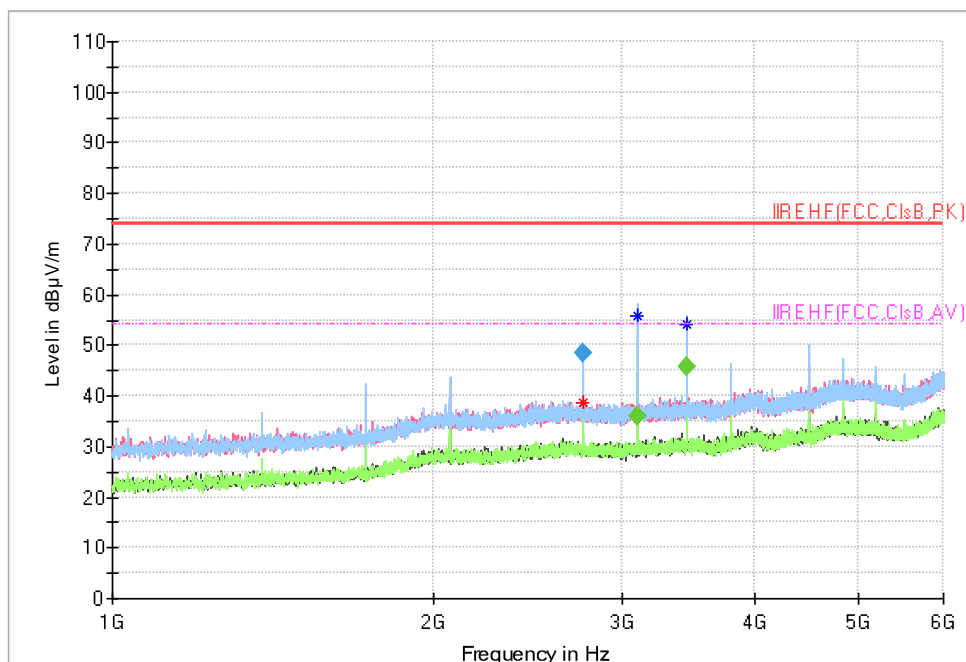

**Plot 6: Radiated Emissions (1GHz-6GHz) scanned at 3m SAC**

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	DCCF (dB)	DCCF-corrected Results (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Band width (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2759.995200	48.56	---	22	26.56	74.00	47.44	1000.0	1000	246.0	V	2.0	1.5
3105.014800	---	36.03	22	14.03	54.00	39.97	1000.0	1000	246.0	V	2.0	1.4
3450.017600	---	45.62	22	23.62	54.00	30.38	1000.0	1000	246.0	V	2.0	2.4



## 3.7 Receiver Radiated Emissions

### Date Performed:

March 28, 2019

### Test Standard:

- RSS-Gen Issue 5, 7.1

### Test Method:

- ANSI C63.4-2014

### Required Limit(s):

Spurious emissions from receivers shall not exceed the radiated limits shown below

Frequency, <i>f</i> (MHz)	Field strength (dB $\mu$ V/m)
30 – 88	40.0
88 – 216	43.5
216 – 960	46.0
above 960	54.0
<b>Note 1:</b> The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.	

### Method of Measurement:

The EUT was tested in our 3 m SAC and was positioned on the center of the turntable. The transmitter was set for continuous transmission. The device was measured for all radiated emissions from 30 MHz to 3 GHz. The EUT was pre-scanned in 3 different orthogonal orientations and was found to radiate highest when placed flat on the table top as indicated in the test photos.


### Modifications:

No modification was required to comply for this test.

### Result:

The EUT complies with the applicable standard.

**Data/Plot:**

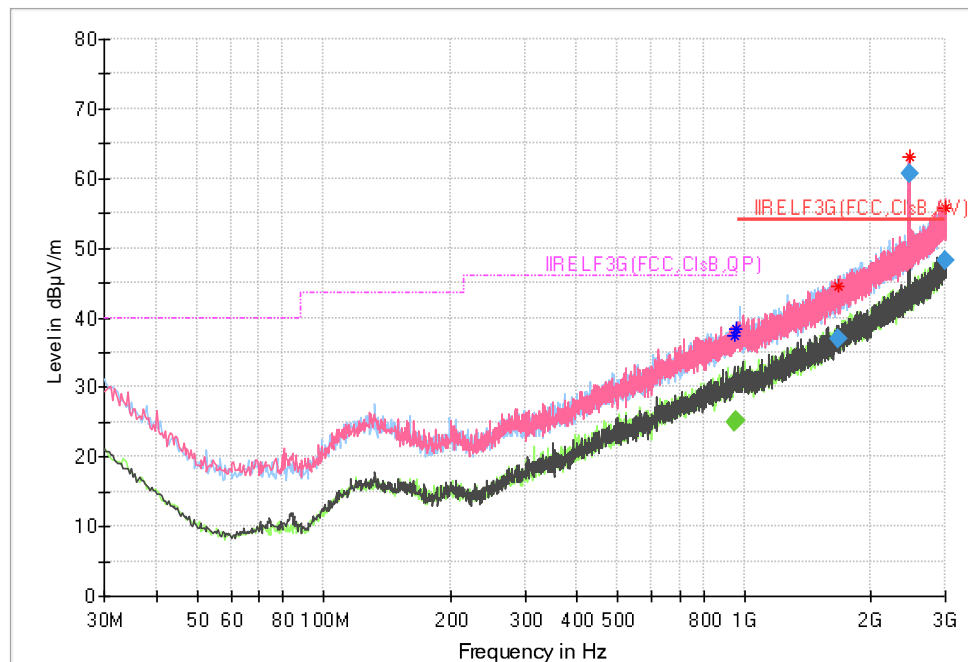

**Plot 7: Radiated Emissions scanned at 3m SAC**


**Note:**

2.4 GHz signal was determined to be ambient and not of the EUT.

**Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
944.251050	---	25.02	46.00	20.98	1000.0	120.000	225.0	V	45.0	34.7
951.709950	---	25.18	46.00	20.82	1000.0	120.000	127.0	H	238.0	34.8
1673.919300	37.00	---	54.00	17.00	1000.0	120.000	225.0	H	71.0	41.6
2997.813900	48.22	---	54.00	5.78	1000.0	120.000	225.0	V	0.0	51.3


## Appendix A: TEST SETUP PHOTOS

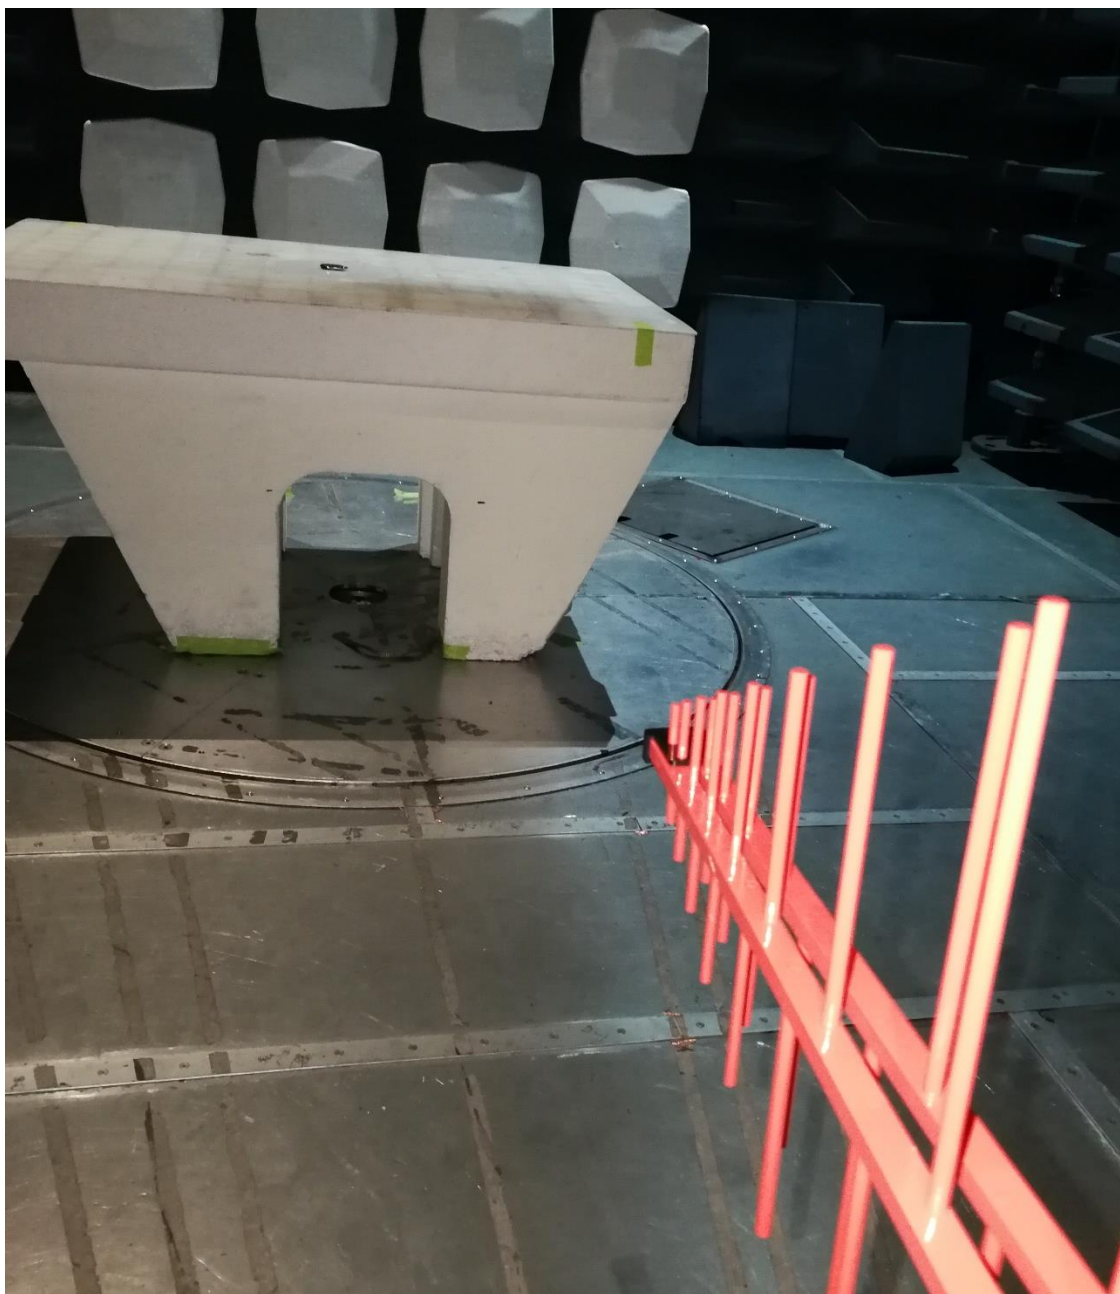

**Figure 1: SAC Radiated Spurious Emissions (30 MHz – 1 GHz) at 3m**



**Figure 2: SAC Radiated Spurious Emissions (1 - 30 MHz) at 3m**

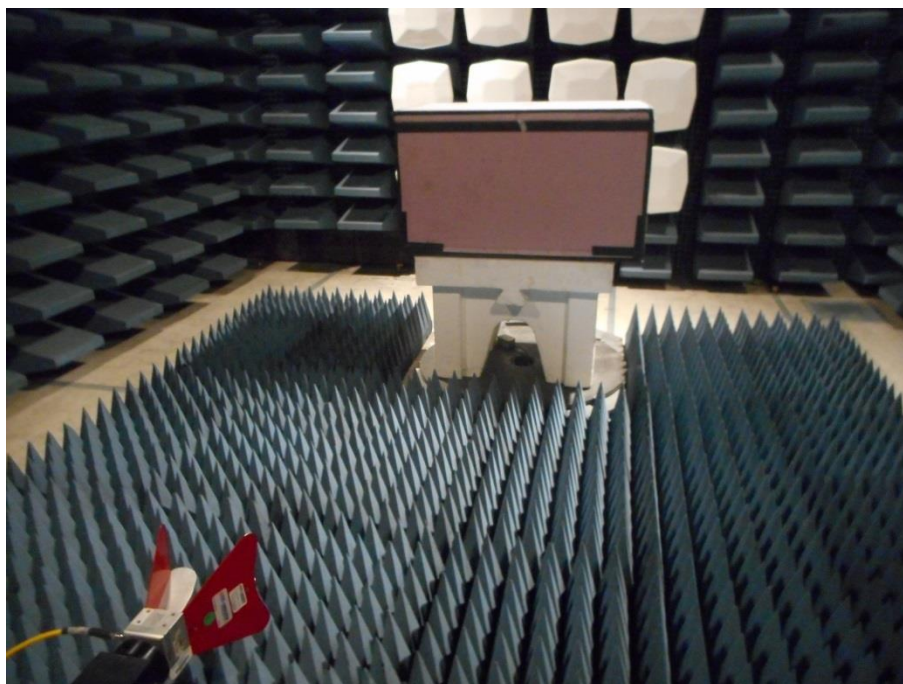


**Figure 3: SAC Radiated Spurious Emissions (1-18 GHz) at 3m**





**Figure 4: SAC Radiated Spurious Emissions – Encased EUT on turntable**

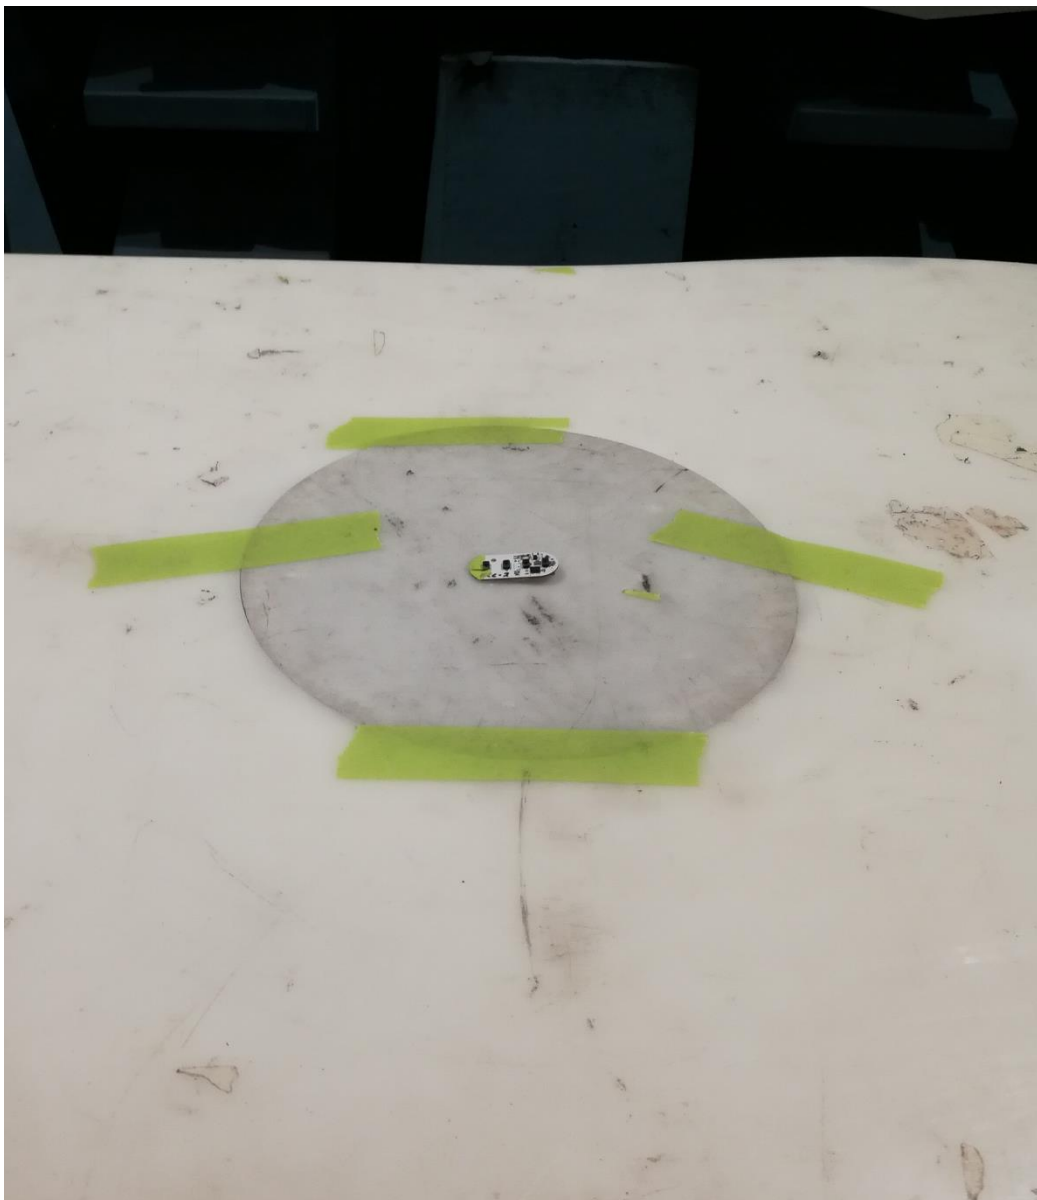

**Figure 5: SAC Radiated Spurious Emissions – EUT w/o casing on turntable**

## Appendix B: ABBREVIATIONS

Abbreviation	Definition
AC	Alternating Current
AM	Amplitude Modulation
CE	European Conformity
CISPR	Comité International Spécial des Perturbations Radioélectriques
DC	Direct Current
EFT	Electrical Fast Transient
EMC	ElectroMagnetic Compatibility
EMI	ElectroMagnetic Interference
ESD	ElectroStatic Discharge
EUT	Equipment Under Test
FCC	Federal Communications Commission
IC	Industry Canada
ICES	Interference Causing Equipment Standard
IEC	International Electrotechnical Commission
LISN	Line Impedance Stabilizing Network
OATS	Open Area Test Site
RF	Radio Frequency
RMS	Root-Mean-Square
SAC	Semi-Anechoic Chamber



**END OF REPORT**