


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	22°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	2.4G + 5G

Horizontal

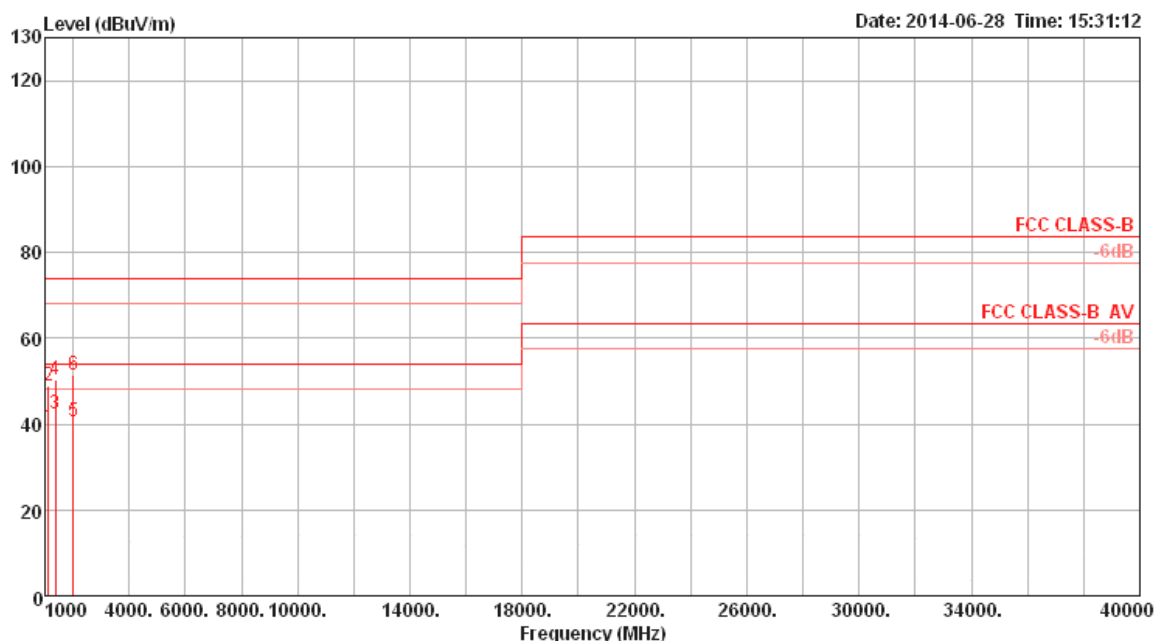

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	1124.00	39.16	54.00	-14.84	46.44	2.72	24.43	34.43	Average	100	13	HORIZONTAL
2	1124.66	48.96	74.00	-25.04	56.24	2.72	24.43	34.43	Peak	100	13	HORIZONTAL
3	1372.00	42.35	54.00	-11.65	48.90	3.02	25.17	34.74	Average	100	254	HORIZONTAL
4	1373.25	50.19	74.00	-23.81	56.74	3.02	25.17	34.74	Peak	100	254	HORIZONTAL
5	2000.00	40.71	54.00	-13.29	44.71	3.80	27.10	34.90	Average	112	45	HORIZONTAL
6	2001.36	51.45	74.00	-22.55	55.45	3.80	27.10	34.90	Peak	112	45	HORIZONTAL

Vertical

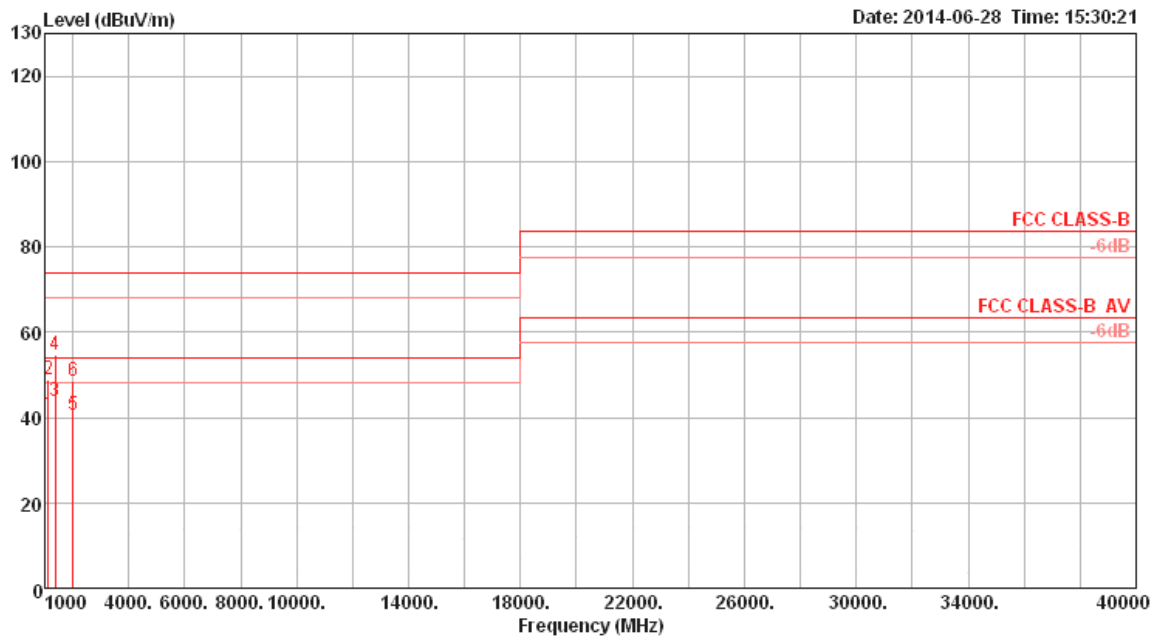

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	1124.00	40.58	54.00	-13.42	47.86	2.72	24.43	34.43	Average	100	357	VERTICAL
2	1124.33	49.04	74.00	-24.96	56.32	2.72	24.43	34.43	Peak	100	357	VERTICAL
3	1371.64	43.67	54.00	-10.33	50.22	3.02	25.17	34.74	Average	105	55	VERTICAL
4	1372.62	54.67	74.00	-19.33	61.22	3.02	25.17	34.74	Peak	105	55	VERTICAL
5	2000.00	40.71	54.00	-13.29	44.71	3.80	27.10	34.90	Average	100	168	VERTICAL
6	2000.03	48.36	74.00	-25.64	52.36	3.80	27.10	34.90	Peak	100	168	VERTICAL