



# TEST REPORT

**FCC ID: 2AIZN-X609B****Product: Mobile Phone****Model No.: X609B****Additional Model No.: N/A****Trade Mark: Infinix****Report No.: FCC18080068A-BT****Issued Date: Oct. 16, 2018**

Issued for:

**INFINIX MOBILITY LIMITED****RMS 05-15, 13A/F SOUTH TOWER WORLD FINANCE CTR HARBOUR CITY 17  
CANTON RD TST KLN HONG KONG**

Issued By:

**World Standardization Certification & Testing Group Co., Ltd.****Building A-B, Baoshi Science & Technology Park, Baoshi Road,  
Bao'an District, Shenzhen, Guangdong, China****TEL: +86-755-26996192****FAX: +86-755-86376605**

**Note:** The results contained in this report pertain only to the tested sample. This report shall not be reproduced, except in full, without written approval of World Standardization Certification & Testing Group Co., Ltd. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.







## Table of Contents

|                                                  |           |
|--------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION</b>                    | <b>3</b>  |
| 1.1 GENERAL DESCRIPTION OF EUT                   | 4         |
| 1.2 FACILITIES AND ACCREDITATIONS                | 5         |
| 1.3 DESCRIPTION OF TEST MODES                    | 6         |
| 1.4 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING | 7         |
| 1.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) | 8         |
| <b>2. SUMMARY OF TEST RESULTS</b>                | <b>9</b>  |
| <b>3. MEASUREMENT INSTRUMENTS</b>                | <b>10</b> |
| <b>4. EMC EMISSION TEST</b>                      | <b>11</b> |
| 4.1 CONDUCTED EMISSION MEASUREMENT               | 11        |
| 4.2 RADIATED EMISSION MEASUREMENT                | 15        |
| <b>5. NUMBER OF HOPPING CHANNEL</b>              | <b>32</b> |
| 5.1 APPLIED PROCEDURES / LIMIT                   | 32        |
| 5.2 TEST RESULTS                                 | 33        |
| <b>6. AVERAGE TIME OF OCCUPANCY</b>              | <b>34</b> |
| 6.1 APPLIED PROCEDURES / LIMIT                   | 34        |
| 6.2 TEST RESULTS                                 | 36        |
| <b>6. HOPPING CHANNEL SEPARATION MEASUREMENT</b> | <b>42</b> |
| 6.1 APPLIED PROCEDURES / LIMIT                   | 42        |
| 6.2 TEST RESULTS                                 | 43        |
| <b>7. BANDWIDTH TEST</b>                         | <b>52</b> |
| 7.1 APPLIED PROCEDURES / LIMIT                   | 52        |
| 7.2 TEST RESULTS                                 | 53        |
| <b>8. PEAK OUTPUT POWER TEST</b>                 | <b>62</b> |
| 8.1 APPLIED PROCEDURES / LIMIT                   | 62        |
| 8.2 TEST RESULTS                                 | 63        |
| <b>9. 100KHZ BAND EDGES MEASUREMENT</b>          | <b>68</b> |
| 9.1 APPLIED PROCEDURES / LIMIT                   | 68        |
| <b>10. ANTENNA APPLICATION</b>                   | <b>79</b> |
| 10.1 ANTENNA REQUIREMENT                         | 79        |





For Question,  
Please Contact with WSCT  
www.wsct-cert.com

## 1. GENERAL INFORMATION

|                              |                                                                                                                                         |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product:</b>              | Mobile phone                                                                                                                            |
| <b>Model No.:</b>            | X609B                                                                                                                                   |
| <b>Additional Model:</b>     | N/A                                                                                                                                     |
| <b>Applicant:</b>            | INFINIX MOBILITY LIMITED                                                                                                                |
| <b>Address:</b>              | RMS 05-15, 13A/F SOUTH TOWER WORLD FINANCE CTR HARBOUR CITY 17 CANTON RD TST KLN HONG KONG                                              |
| <b>Manufacturer:</b>         | SHENZHEN TECNO TECHNOLOGY CO.,LTD.                                                                                                      |
| <b>Address:</b>              | 1/F-4/F,7/F, BUILDING 3, TAIPINGYANG INDUSTRIAL ZONE, NO.2088, SHENYAN ROAD, YANTIAN DISTRICT, SHENZHEN CITY, GUANGDONG PROVINCE, P.R.C |
| <b>Data of receipt:</b>      | Sep. 26, 2018                                                                                                                           |
| <b>Date of Test:</b>         | Sep. 26, 2018 to Oct. 15, 2018                                                                                                          |
| <b>Applicable Standards:</b> | FCC CFR Title 47 Part 15 Subpart C Section 15.247                                                                                       |

The above equipment has been tested by World Standardization Certification & Testing Group Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: Pu Shixi  
( Pu Shixi)

Date: Oct. 16, 2018

Check By: Qin Shuiquan  
( Qin Shuiquan)

Date: Oct. 16, 2018

Approved By: Wang Fengbing  
(Wang Fengbing)

Date: Oct. 16, 2018







For Question,  
Please Contact with WSCT  
www.wsct-cert.com

## 1.1 GENERAL DESCRIPTION OF EUT

|                          |                                                                                                                                                        |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment Type:          | Mobile Phone                                                                                                                                           |
| Test Model:              | X609B                                                                                                                                                  |
| Additional Model:        | N/A                                                                                                                                                    |
| Trade Mark:              | Infinix                                                                                                                                                |
| Applicant:               | INFINIX MOBILITY LIMITED                                                                                                                               |
| Address:                 | RMS 05-15, 13A/F SOUTH TOWER WORLD FINANCE CTR HARBOUR CITY<br>17 CANTON RD TST KLN HONG KONG                                                          |
| Manufacturer:            | SHENZHEN TECNO TECHNOLOGY CO.,LTD.                                                                                                                     |
| Address:                 | 1/F-4/F,7/F, BUILDING 3, TAIPINGYANG INDUSTRIAL ZONE, NO.2088,<br>SHENYAN ROAD, YANTIAN DISTRICT, SHENZHEN CITY, GUANGDONG<br>PROVINCE, P.R.C          |
| Hardware version:        | V1.1                                                                                                                                                   |
| Software version:        | X609B-H8025C-GO-180911V46                                                                                                                              |
| Extreme Temp. Tolerance: | -10°C to +65°C                                                                                                                                         |
| Battery information:     | Li-Polymer Battery : BL-34BX<br>Voltage: 3.8V<br>Rated Capacity: 3400mAh/12.92Wh<br>Typical Capacity: 3500mAh/13.30Wh<br>Limited Charge Voltage: 4.35V |
| Adapter Information:     | Adapter: CU-52JT<br>Input: AC 100-240V 50/60Hz 200mA<br>Output: DC 5V 1.2A                                                                             |
| Operating Frequency      | 2402-2480MHZ                                                                                                                                           |
| Channels                 | 79                                                                                                                                                     |
| Channel Spacing          | 1MHz                                                                                                                                                   |
| Modulation Type          | GFSK, $\pi/4$ -DQPSK, 8-DPSK                                                                                                                           |
| Version                  | 3.0                                                                                                                                                    |
| Antenna Type:            | Integral Antenna                                                                                                                                       |
| Antenna gain:            | 1.26dBi                                                                                                                                                |







## 1.2 FACILITIES AND ACCREDITATIONS

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China of the World Standardization Certification & Testing Group Co., Ltd.**

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

**Registration Number: 366353**

### 1.2.1 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

**USA**

**NVLAP** (The certificate registration number is NVLAP LAB CODE:600142-0)

**Japan**

**VCCI** (The certificate registration number is C-4790, R-3684, G-837)

**Canada**

**INDUSTRY CANADA**

(The certificated registration number is 7700A-1)

**China**

**CNAS** (The certificated registration number is L3732)

Copies of granted accreditation certificates are available for downloading from our web site,  
<http://www.wsct-cert.com>

### 1.2.2 TEST DESCRIPTION

#### 1.2.2.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

| No. | Item                          | Uncertainty             |
|-----|-------------------------------|-------------------------|
| 1   | Conducted Emission Test       | $\pm 3.2\text{dB}$      |
| 2   | RF power, conducted           | $\pm 0.16\text{dB}$     |
| 3   | Spurious emissions, conducted | $\pm 0.21\text{dB}$     |
| 4   | All emissions, radiated (<1G) | $\pm 4.7\text{dB}$      |
| 5   | All emissions, radiated (>1G) | $\pm 4.7\text{dB}$      |
| 6   | Temperature                   | $\pm 0.5^\circ\text{C}$ |
| 7   | Humidity                      | $\pm 2\%$               |







### 1.3 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Modulation type | Mode                              |
|-----------------|-----------------------------------|
| 1Mbps           | Mode 1 、 Mode 2 、 Mode 3 、 Mode 4 |
| 2Mbps           |                                   |
| 3Mbps           |                                   |

| Pretest Mode | Description    |
|--------------|----------------|
| Mode 1       | CH00           |
| Mode 2       | CH39           |
| Mode 3       | CH78           |
| Mode 4       | Normal Hopping |

| For Conducted Emission |                |
|------------------------|----------------|
| Final Test Mode        | Description    |
| Mode 4                 | Normal Hopping |

| For Radiated Emission |                |
|-----------------------|----------------|
| Final Test Mode       | Description    |
| Mode 1                | CH00           |
| Mode 2                | CH39           |
| Mode 3                | CH78           |
| Mode 4                | Normal Hopping |

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The data rate was set in 1Mbps, 2 Mbps, 3 Mbps for radiated emission due to the highest RF output power.
- (3) Record the worst case of each test item in this report.







#### 1.4 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

| Test software Version | N/A      |          |          |
|-----------------------|----------|----------|----------|
| Frequency             | 2402 MHz | 2441 MHz | 2480 MHz |
| Parameters(1Mbps)     | DEF      | DEF      | DEF      |
| Parameters(2Mbps)     | DEF      | DEF      | DEF      |
| Parameters(3Mbps)     | DEF      | DEF      | DEF      |

##### 1.4.1 CONFIGURATION OF SYSTEM UNDER TEST



(EUT: Mobile Phone)





## 1.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Note |
|------|-----------|-----------|----------------|------------|------|
| 1    | Adapter   | /         | CU-52JT        | /          | /    |
| 2    | Earphone  | /         | N/A            | /          | /    |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.







## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part15 (15.247) , Subpart C |                             |          |        |
|---------------------------------|-----------------------------|----------|--------|
| Standard Section                | Test Item                   | Judgment | Remark |
| 15.207                          | Conducted Emission          | PASS     |        |
| 15.247(a)(1)                    | Hopping Channel Separation  | PASS     |        |
| 15.247(b)(1)                    | Peak Output Power           | PASS     |        |
| 15.247(c)                       | Radiated Spurious Emission  | PASS     |        |
| 15.247(a)(iii)                  | Number of Hopping Frequency | PASS     |        |
| 15.247(a)(iii)                  | Dwell Time                  | PASS     |        |
| 15.247(a)(1)                    | Bandwidth                   | PASS     |        |
| 15.247(d)                       | 100kHz Band Edges           | PASS     |        |
| 15.205                          | Band Edge Emission          | PASS     |        |
| 15.203                          | Antenna Requirement         | PASS     |        |

NOTE:

(1) "N/A" denotes test is not applicable in this test report.





### 3. MEASUREMENT INSTRUMENTS

| NAME OF EQUIPMENT                    | MANUFACTURER           | MODEL        | SERIAL NUMBER | Calibration Date | Calibration Due. |
|--------------------------------------|------------------------|--------------|---------------|------------------|------------------|
| EMI Test Receiver                    | R&S                    | ESCI         | 100005        | 08/19/2018       | 08/18/2019       |
| LISN                                 | AFJ                    | LS16         | 16010222119   | 08/19/2018       | 08/18/2019       |
| LISN(EUT)                            | Mestec                 | AN3016       | 04/10040      | 08/19/2018       | 08/18/2019       |
| Universal Radio Communication Tester | R&S                    | CMU 200      | 1100.0008.02  | 08/19/2018       | 08/18/2019       |
| Coaxial cable                        | Megalon                | LMR400       | N/A           | 08/12/2018       | 08/11/2019       |
| GPIB cable                           | Megalon                | GPIB         | N/A           | 08/12/2018       | 08/11/2019       |
| Spectrum Analyzer                    | R&S                    | FSU          | 100114        | 08/19/2018       | 08/18/2019       |
| Pre Amplifier                        | H.P.                   | HP8447E      | 2945A02715    | 10/13/2018       | 10/12/2019       |
| Pre-Amplifier                        | CDSI                   | PAP-1G18-38  | --            | 10/13/2018       | 10/12/2019       |
| Bi-log Antenna                       | SUNOL Sciences         | JB3          | A021907       | 09/13/2018       | 09/12/2019       |
| 9*6*6 Anechoic                       | --                     | --           | --            | 08/21/2018       | 08/20/2019       |
| Horn Antenna                         | COMPLIANCE ENGINEERING | CE18000      | --            | 09/13/2018       | 09/12/2019       |
| Horn Antenna                         | SCHWARZBECK            | BBHA9120D    | 9120D-631     | 08/23/2018       | 08/22/2019       |
| Cable                                | TIME MICROWAVE         | LMR-400      | N-TYPE04      | 04/25/2018       | 04/24/2019       |
| System-Controller                    | CCS                    | N/A          | N/A           | N.C.R            | N.C.R            |
| Turn Table                           | CCS                    | N/A          | N/A           | N.C.R            | N.C.R            |
| Antenna Tower                        | CCS                    | N/A          | N/A           | N.C.R            | N.C.R            |
| RF cable                             | Murata                 | MXHQ87WA3000 | -             | 08/21/2018       | 08/20/2019       |
| Loop Antenna                         | EMCO                   | 6502         | 00042960      | 08/22/2018       | 08/21/2019       |
| Horn Antenna                         | SCHWARZBECK            | BBHA 9170    | 1123          | 08/19/2018       | 08/18/2019       |
| Power meter                          | Anritsu                | ML2487A      | 6K00003613    | 08/23/2018       | 08/22/2019       |
| Power sensor                         | Anritsu                | MX248XD      | --            | 08/19/2018       | 08/18/2019       |







## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

| FREQUENCY (MHz) | Conducted limit (dBμV) |            | Conducted limit (dBμV) |
|-----------------|------------------------|------------|------------------------|
|                 | Quasi-peak             | Quasi-peak |                        |
| 0.15 -0.5       | 66 - 56 *              | 56 - 46 *  | FCC                    |
| 0.50 -5.0       | 56.00                  | 46.00      | FCC                    |
| 5.0 -30.0       | 60.00                  | 50.00      | FCC                    |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |






#### 4.1.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

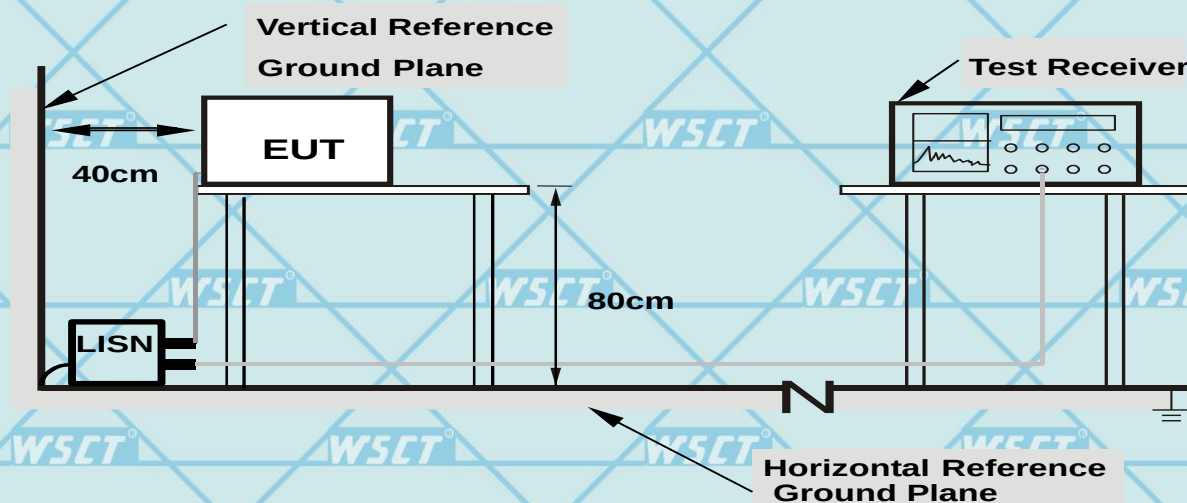

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

#### 4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.





#### 4.1.6 TEST RESULTS

|             |         |                   |           |
|-------------|---------|-------------------|-----------|
| Temperature | 26 °C   | Relative Humidity | 54%       |
| Pressure    | 1010hPa | Phase             | L         |
| Test Mode   | Mode 4  | Voltage           | 120V/60Hz |

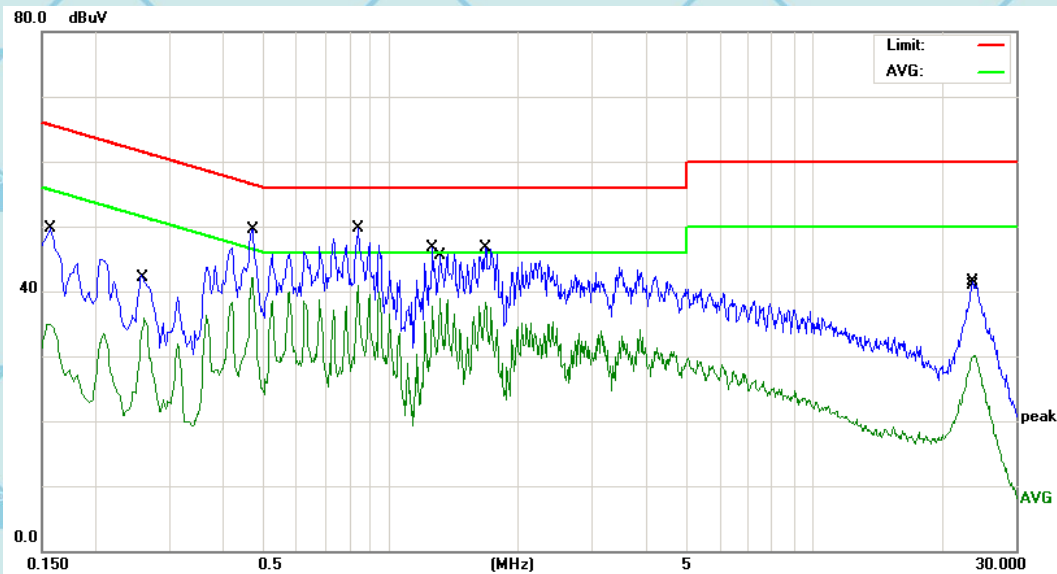


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   |     | 0.1580       | 43.24                    | 10.44                   | 53.68                    | 65.56         | -11.88     | QP       |
| 2   |     | 0.2620       | 25.48                    | 10.43                   | 35.91                    | 51.36         | -15.45     | AVG      |
| 3   | *   | 0.4700       | 31.76                    | 10.40                   | 42.16                    | 46.51         | -4.35      | AVG      |
| 4   |     | 0.4740       | 36.74                    | 10.40                   | 47.14                    | 56.44         | -9.30      | QP       |
| 5   |     | 0.8380       | 37.06                    | 10.36                   | 47.42                    | 56.00         | -8.58      | QP       |
| 6   |     | 0.8380       | 30.54                    | 10.36                   | 40.90                    | 46.00         | -5.10      | AVG      |
| 7   |     | 1.2579       | 33.73                    | 10.33                   | 44.06                    | 56.00         | -11.94     | QP       |
| 8   |     | 1.3099       | 28.62                    | 10.32                   | 38.94                    | 46.00         | -7.06      | AVG      |
| 9   |     | 1.6740       | 32.14                    | 10.31                   | 42.45                    | 56.00         | -13.55     | QP       |
| 10  |     | 1.6740       | 27.96                    | 10.31                   | 38.27                    | 46.00         | -7.73      | AVG      |
| 11  |     | 23.7540      | 25.27                    | 10.10                   | 35.37                    | 60.00         | -24.63     | QP       |
| 12  |     | 24.0500      | 19.95                    | 10.10                   | 30.05                    | 50.00         | -19.95     | AVG      |

Remark: All the modes have been investigated, and only worst mode is presented in this report.





|             |         |                   |           |
|-------------|---------|-------------------|-----------|
| Temperature | 26 °C   | Relative Humidity | 54%       |
| Pressure    | 1010hPa | Phase             | N         |
| Test Mode   | Mode 4  | Voltage           | 120V/60Hz |

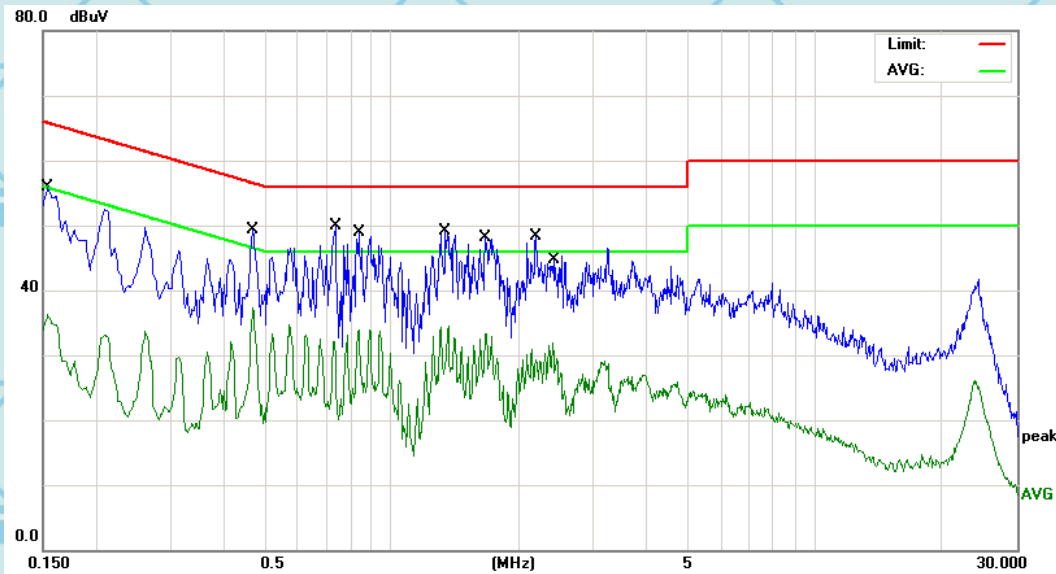

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   |     | 0.1539       | 36.10                    | 10.44                   | 46.54                    | 65.78         | -19.24     | QP       |
| 2   |     | 0.1539       | 25.84                    | 10.44                   | 36.28                    | 55.78         | -19.50     | AVG      |
| 3   |     | 0.4700       | 33.73                    | 10.40                   | 44.13                    | 56.51         | -12.38     | QP       |
| 4   | *   | 0.4700       | 26.84                    | 10.40                   | 37.24                    | 46.51         | -9.27      | AVG      |
| 5   |     | 0.7380       | 31.77                    | 10.37                   | 42.14                    | 56.00         | -13.86     | QP       |
| 6   |     | 0.8380       | 23.62                    | 10.36                   | 33.98                    | 46.00         | -12.02     | AVG      |
| 7   |     | 1.3420       | 29.23                    | 10.32                   | 39.55                    | 56.00         | -16.45     | QP       |
| 8   |     | 1.3619       | 24.11                    | 10.32                   | 34.43                    | 46.00         | -11.57     | AVG      |
| 9   |     | 1.6700       | 31.26                    | 10.31                   | 41.57                    | 56.00         | -14.43     | QP       |
| 10  |     | 1.6740       | 22.99                    | 10.31                   | 33.30                    | 46.00         | -12.70     | AVG      |
| 11  |     | 2.1980       | 27.65                    | 10.29                   | 37.94                    | 56.00         | -18.06     | QP       |
| 12  |     | 2.4060       | 21.55                    | 10.28                   | 31.83                    | 46.00         | -14.17     | AVG      |

Remark: All the modes have been investigated, and only worst mode is presented in this report.







## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 Radiated Emission Limits (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(KHz)                       | 300                           |
| 0.490~1.705       | 24000/F(KHz)                      | 30                            |
| 1.705~30.0        | 30                                | 30                            |
| 30~88             | 100                               | 3                             |
| 88~216            | 150                               | 3                             |
| 216~960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | PEAK                   | AVERAGE |
| Above 1000      | 74                     | 54      |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

| Spectrum Parameter                    | Setting                                       |
|---------------------------------------|-----------------------------------------------|
| Attenuation                           | Auto                                          |
| Start Frequency                       | 1000 MHz                                      |
| Stop Frequency                        | 10th carrier harmonic                         |
| RB / VB (emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |





#### 4.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

***Both horizontal and vertical antenna polarities were tested  
and performed pretest to three orthogonal axis. The worst case emissions were reported***

#### 4.2.3 DEVIATION FROM TEST STANDARD

No deviation









#### 4.2.4 TEST SETUP

##### (A) Radiated Emission Test-Up Frequency Below 30MHz

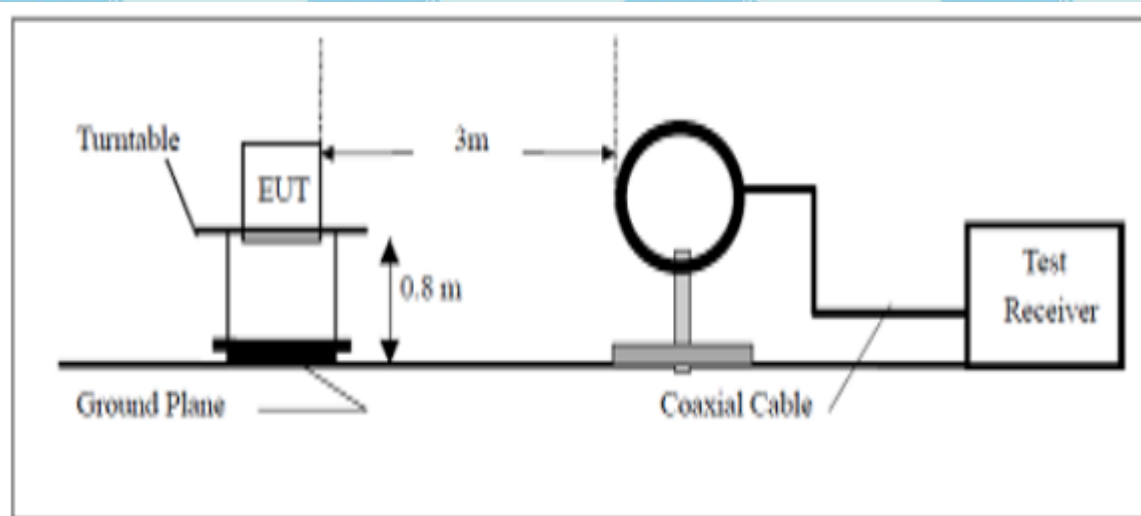


##### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

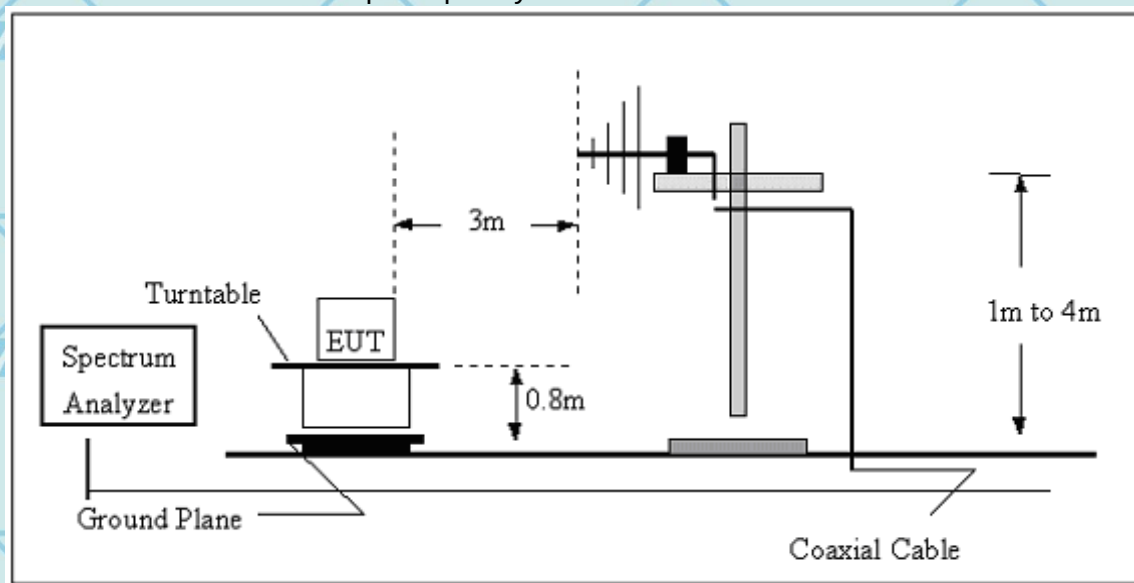





(C) Radiated Emission Test-Up Frequency Above 1GHz

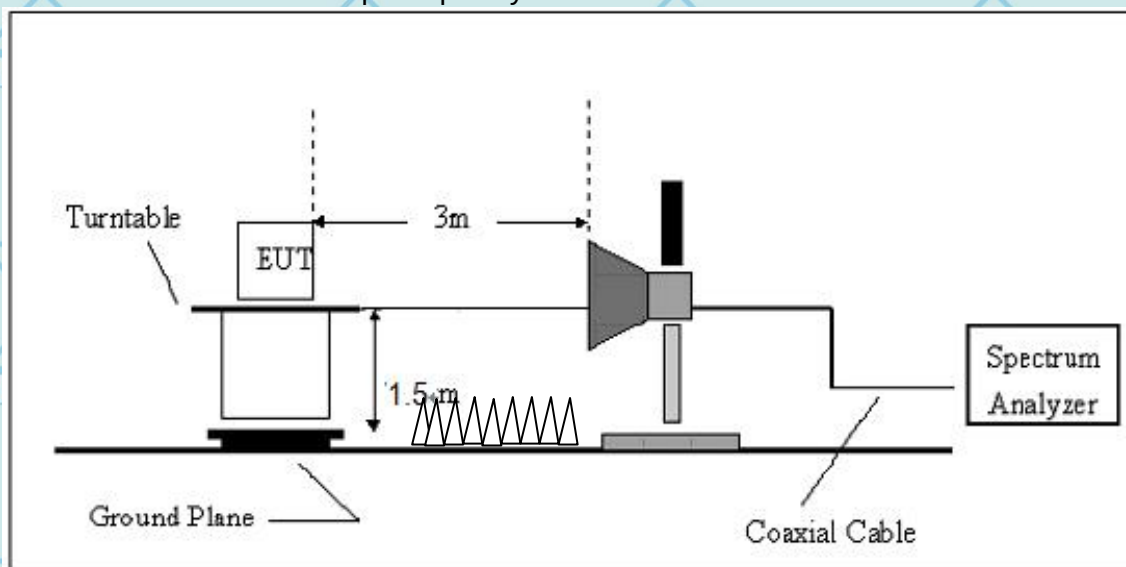

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





For Question,  
Please Contact with WSCT  
www.wsct-cert.com

#### 4.2.5.1 RESULTS (Below 30 MHz)

|             |                        |                   |                       |
|-------------|------------------------|-------------------|-----------------------|
| Test Mode   | Mode 1/ Mode 2/ Mode 3 | Polarization      | Horizontal / Vertical |
| Temperature | 20 °C                  | Relative Humidity | 48%                   |
| Pressure    | 1010 hPa               |                   |                       |

| Freq.<br>(MHz) | Reading<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | State<br>P/F |
|----------------|---------------------|-------------------|----------------|--------------|
| --             | --                  | --                | --             | P            |
| --             | --                  | --                | --             | P            |

#### NOTE:

No result in this part for margin above 20dB.

Distance extrapolation factor = 40 log (specific distance/test distance)(dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.








#### 4.2.5.2 TEST RESULTS (Between 30M – 1000 MHz)

|             |                             |                   |            |
|-------------|-----------------------------|-------------------|------------|
| Test Mode   | Mode 1 with GFSK modulation | Polarization :    | Horizontal |
| Temperature | 20 °C                       | Relative Humidity | 48%        |
| Pressure    | 1010 hPa                    |                   |            |

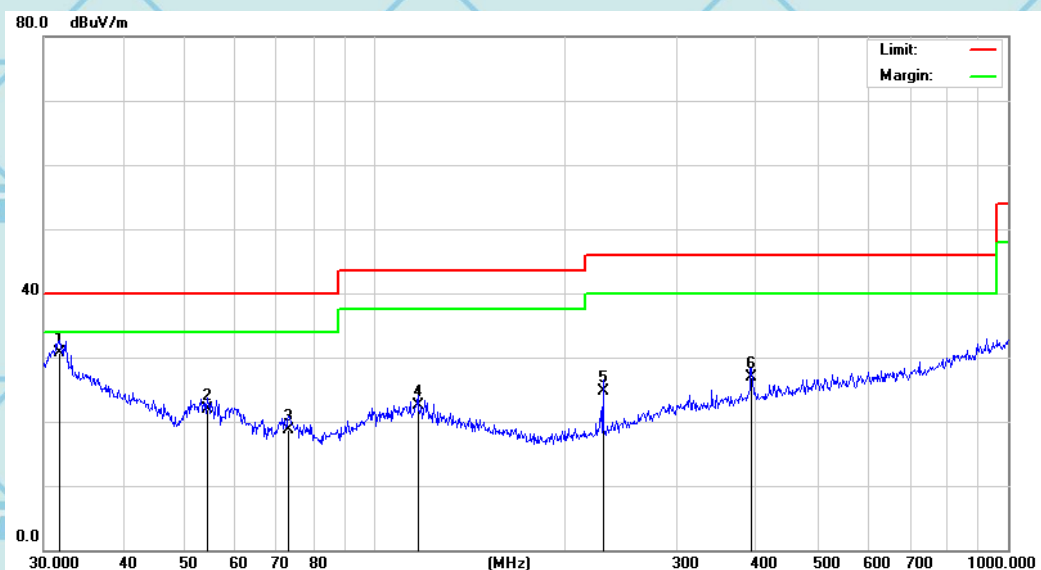

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1   | *   | 31.8427      | 26.70                    | 4.08                    | 30.78                      | 40.00           | -9.22      | QP       |
| 2   |     | 54.4516      | 27.44                    | -5.55                   | 21.89                      | 40.00           | -18.11     | QP       |
| 3   |     | 73.1025      | 25.82                    | -7.06                   | 18.76                      | 40.00           | -21.24     | QP       |
| 4   |     | 116.9495     | 25.07                    | -2.54                   | 22.53                      | 43.50           | -20.97     | QP       |
| 5   |     | 229.2931     | 30.42                    | -5.67                   | 24.75                      | 46.00           | -21.25     | QP       |
| 6   |     | 393.4723     | 28.41                    | -1.56                   | 26.85                      | 46.00           | -19.15     | QP       |


Remark: All the modes have been investigated, and only worst mode is presented in this report.







|             |                             |                   |          |
|-------------|-----------------------------|-------------------|----------|
| Test Mode   | Mode 1 with GFSK modulation | Polarization :    | Vertical |
| Temperature | 20 °C                       | Relative Humidity | 48%      |
| Pressure    | 1010 hPa                    |                   |          |

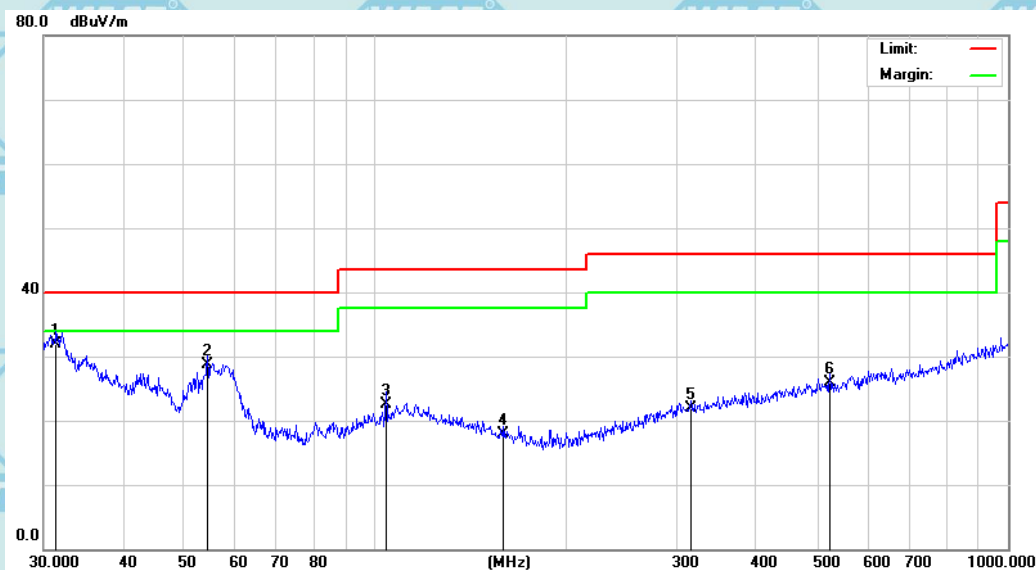

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1   | *   | 31.3992      | 27.69                    | 4.26                    | 31.95                      | 40.00           | -8.05      | QP       |
| 2   |     | 54.4516      | 34.31                    | -5.55                   | 28.76                      | 40.00           | -11.24     | QP       |
| 3   |     | 104.1701     | 25.49                    | -3.01                   | 22.48                      | 43.50           | -21.02     | QP       |
| 4   |     | 159.7844     | 23.60                    | -5.77                   | 17.83                      | 43.50           | -25.67     | QP       |
| 5   |     | 315.4808     | 23.89                    | -2.06                   | 21.83                      | 46.00           | -24.17     | QP       |
| 6   |     | 522.7180     | 25.16                    | 0.68                    | 25.84                      | 46.00           | -20.16     | QP       |

Remark: All the modes have been investigated, and only worst mode is presented in this report.







For Question,  
Please Contact with WSCT  
www.wsct-cert.com

#### 4.2.5.3 TEST RESULTS(1GHz to 25GHz)

|             |          |                   |                  |
|-------------|----------|-------------------|------------------|
| Pressure    | 1010 hPa | Test Mode         | Mode 1 TX(1Mbps) |
| Temperature | 20 °C    | Relative Humidity | 48%              |

| Freq.<br>(MHz) | Ant.Pol. | Emission<br>Level(dBuV) |       | Limit<br>3m(dBuV/m) |    | Over(dB) |        |
|----------------|----------|-------------------------|-------|---------------------|----|----------|--------|
|                |          | PK                      | AV    | PK                  | AV | PK       | AV     |
| 4804           | V        | 59.69                   | 40.71 | 74                  | 54 | -14.31   | -13.29 |
| 7206           | V        | 58.73                   | 40.53 | 74                  | 54 | -15.27   | -13.47 |
| 4804           | H        | 59.73                   | 39.67 | 74                  | 54 | -14.27   | -14.33 |
| 7206           | H        | 59.53                   | 40.53 | 74                  | 54 | -14.47   | -13.47 |

#### Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.







|             |          |                   |                  |
|-------------|----------|-------------------|------------------|
| Pressure    | 1010 hPa | Test Mode         | Mode 2 TX(2Mbps) |
| Temperature | 20 °C    | Relative Humidity | 48%              |

| Freq.<br>(MHz) | Ant.Pol. | Emission Level(dBuV) |       | Limit<br>3m(dBuV/m) |    | Over(dB) |        |
|----------------|----------|----------------------|-------|---------------------|----|----------|--------|
|                |          | PK                   | AV    | PK                  | AV | PK       | AV     |
| 4882           | V        | 58.57                | 41.46 | 74                  | 54 | -15.43   | -12.54 |
| 7323           | V        | 59.34                | 40.31 | 74                  | 54 | -14.66   | -13.69 |
| 4882           | H        | 58.09                | 39.53 | 74                  | 54 | -15.91   | -14.47 |
| 7323           | H        | 59.83                | 40.83 | 74                  | 54 | -14.17   | -13.17 |

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

|             |          |                   |                  |
|-------------|----------|-------------------|------------------|
| Pressure    | 1010 hPa | Test Mode         | Mode 3 TX(3Mbps) |
| Temperature | 20 °C    | Relative Humidity | 48%              |

| Freq.<br>(MHz) | Ant.Pol. | Emission Level(dBuV) |       | Limit<br>3m(dBuV/m) |    | Over(dB) |        |
|----------------|----------|----------------------|-------|---------------------|----|----------|--------|
|                |          | PK                   | AV    | PK                  | AV | PK       | AV     |
| 4960           | V        | 59.34                | 40.86 | 74                  | 54 | -14.66   | -13.14 |
| 7440           | V        | 58.37                | 39.89 | 74                  | 54 | -15.63   | -14.11 |
| 4960           | H        | 59.95                | 39.73 | 74                  | 54 | -14.05   | -14.27 |
| 7440           | H        | 58.29                | 39.29 | 74                  | 54 | -15.71   | -14.71 |

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.





#### 4.2.5.4 TEST RESULTS (Restricted Bands Requirements)

##### Test result for 1Mbps Mode:

|              |          |                   |                      |
|--------------|----------|-------------------|----------------------|
| Polarization | Vertical | Test Mode         | TX /Mode1-1Mbps(CH0) |
| Temperature  | 20 °C    | Relative Humidity | 48%                  |
| Pressure     | 1010 hPa |                   |                      |

| Frequency<br>(MHz) | Meter<br>Reading<br>(dBμV) | Factor<br>(dB) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|----------------------------|----------------|-------------------------------|--------------------|----------------|------------------|
| 2387               | 63.22                      | -8.76          | 54.46                         | 74                 | 19.54          | peak             |
| 2387               | 54.57                      | -8.76          | 45.81                         | 54                 | 8.19           | AVG              |
| 2390               | 63.65                      | -8.73          | 54.92                         | 74                 | 19.08          | peak             |
| 2390               | 54.05                      | -8.73          | 45.32                         | 54                 | 8.68           | AVG              |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

|              |            |                   |                      |
|--------------|------------|-------------------|----------------------|
| Polarization | Horizontal | Test Mode         | TX /Mode1-1Mbps(CH0) |
| Temperature  | 20 °C      | Relative Humidity | 48%                  |
| Pressure     | 1010 hPa   |                   |                      |

| Frequency<br>(MHz) | Meter<br>Reading<br>(dBμV) | Factor<br>(dB) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|----------------------------|----------------|-------------------------------|--------------------|----------------|------------------|
| 2384               | 60.61                      | -8.76          | 51.85                         | 74                 | 22.15          | peak             |
| 2384               | 55.93                      | -8.76          | 47.17                         | 54                 | 6.83           | AVG              |
| 2390               | 63.03                      | -8.73          | 54.30                         | 74                 | 19.70          | peak             |
| 2390               | 57.52                      | -8.73          | 48.79                         | 54                 | 5.21           | AVG              |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.





|              |          |                   |                        |
|--------------|----------|-------------------|------------------------|
| Polarization | Vertical | Test Mode         | TX /Mode 3-1Mbps(CH78) |
| Temperature  | 20 °C    | Relative Humidity | 48%                    |
| Pressure     | 1010 hPa |                   |                        |

| Frequency<br>(MHz) | Meter<br>Reading<br>(dBμV) | Factor<br>(dB) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|----------------------------|----------------|-------------------------------|--------------------|----------------|---------------|
| 2483.5             | 61.57                      | -8.17          | 53.40                         | 74                 | 20.60          | peak          |
| 2483.5             | 53.41                      | -8.17          | 45.24                         | 54                 | 8.76           | AVG           |
|                    |                            |                |                               |                    |                |               |
|                    |                            |                |                               |                    |                |               |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

|              |            |                   |                        |
|--------------|------------|-------------------|------------------------|
| Polarization | Horizontal | Test Mode         | TX /Mode 3-1Mbps(CH78) |
| Temperature  | 20 °C      | Relative Humidity | 48%                    |
| Pressure     | 1010 hPa   |                   |                        |

| Frequency<br>(MHz) | Meter<br>Reading<br>(dBμV) | Factor<br>(dB) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|----------------------------|----------------|-------------------------------|--------------------|----------------|---------------|
| 2483.5             | 60.09                      | -8.17          | 51.92                         | 74                 | 22.08          | peak          |
| 2483.5             | 54.46                      | -8.17          | 46.29                         | 54                 | 7.71           | AVG           |
|                    |                            |                |                               |                    |                |               |
|                    |                            |                |                               |                    |                |               |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.






**Test result for 2Mbps Mode:**

|              |          |                   |                      |
|--------------|----------|-------------------|----------------------|
| Polarization | Vertical | Test Mode         | TX /Mode1-2Mbps(CH0) |
| Temperature  | 20 °C    | Relative Humidity | 48%                  |
| Pressure     | 1010 hPa |                   |                      |

| Frequency<br>(MHz) | Meter<br>Reading<br>(dBμV) | Factor<br>(dB) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|----------------------------|----------------|-------------------------------|--------------------|----------------|------------------|
| 2387               | 61.07                      | -8.76          | 52.31                         | 74                 | 21.69          | peak             |
| 2387               | 55.64                      | -8.76          | 46.88                         | 54                 | 7.12           | AVG              |
| 2390               | 63.13                      | -8.73          | 54.40                         | 74                 | 19.60          | peak             |
| 2390               | 57.17                      | -8.73          | 48.44                         | 54                 | 5.56           | AVG              |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

|              |            |                   |                      |
|--------------|------------|-------------------|----------------------|
| Polarization | Horizontal | Test Mode         | TX /Mode1-2Mbps(CH0) |
| Temperature  | 20 °C      | Relative Humidity | 48%                  |
| Pressure     | 1010 hPa   |                   |                      |

| Frequency<br>(MHz) | Meter<br>Reading<br>(dBμV) | Factor<br>(dB) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|----------------------------|----------------|-------------------------------|--------------------|----------------|------------------|
| 2384               | 61.89                      | -8.76          | 53.13                         | 74                 | 20.87          | peak             |
| 2384               | 56.27                      | -8.76          | 47.51                         | 54                 | 6.49           | AVG              |
| 2390               | 62.35                      | -8.73          | 53.62                         | 74                 | 20.38          | peak             |
| 2390               | 56.66                      | -8.73          | 47.93                         | 54                 | 6.07           | AVG              |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.





|              |          |                   |                       |
|--------------|----------|-------------------|-----------------------|
| Polarization | Vertical | Test Mode         | TX /Mode3-2Mbps(CH78) |
| Temperature  | 20 °C    | Relative Humidity | 48%                   |
| Pressure     | 1010 hPa |                   |                       |

| Frequency<br>(MHz) | Meter<br>Reading<br>(dBμV) | Factor<br>(dB) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|----------------------------|----------------|-------------------------------|--------------------|----------------|---------------|
| 2483.5             | 60.01                      | -8.17          | 51.84                         | 74                 | 22.16          | peak          |
| 2483.5             | 53.82                      | -8.17          | 45.65                         | 54                 | 8.35           | AVG           |
|                    |                            |                |                               |                    |                |               |
|                    |                            |                |                               |                    |                |               |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

|              |            |                   |                       |
|--------------|------------|-------------------|-----------------------|
| Polarization | Horizontal | Test Mode         | TX /Mode3-2Mbps(CH78) |
| Temperature  | 20 °C      | Relative Humidity | 48%                   |
| Pressure     | 1010 hPa   |                   |                       |

| Frequency<br>(MHz) | Meter<br>Reading<br>(dBμV) | Factor<br>(dB) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|----------------------------|----------------|-------------------------------|--------------------|----------------|---------------|
| 2483.5             | 60.09                      | -8.17          | 51.92                         | 74                 | 22.08          | peak          |
| 2483.5             | 54.45                      | -8.17          | 46.28                         | 54                 | 7.72           | AVG           |
|                    |                            |                |                               |                    |                |               |
|                    |                            |                |                               |                    |                |               |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.







For Question,  
Please Contact with WSCT  
www.wsct-cert.com

### Test result for 3Mbps Mode:

|              |          |                   |                        |
|--------------|----------|-------------------|------------------------|
| Polarization | Vertical | Test Mode         | TX /Model 1-3Mbps(CH0) |
| Temperature  | 20 °C    | Relative Humidity | 48%                    |
| Pressure     | 1010 hPa |                   |                        |

| Frequency<br>(MHz) | Meter<br>Reading<br>(dBμV) | Factor<br>(dB) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|----------------------------|----------------|-------------------------------|--------------------|----------------|------------------|
| 2387               | 61.45                      | -8.76          | 52.69                         | 74                 | 21.31          | peak             |
| 2387               | 53.67                      | -8.76          | 44.91                         | 54                 | 9.09           | AVG              |
| 2390               | 62.38                      | -8.73          | 53.65                         | 74                 | 20.35          | peak             |
| 2390               | 56.76                      | -8.73          | 48.03                         | 54                 | 5.97           | AVG              |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

|              |            |                   |                       |
|--------------|------------|-------------------|-----------------------|
| Polarization | Horizontal | Test Mode         | TX /Mode 1-3Mbps(CH0) |
| Temperature  | 20 °C      | Relative Humidity | 48%                   |
| Pressure     | 1010 hPa   |                   |                       |

| Frequency<br>(MHz) | Meter<br>Reading<br>(dBμV) | Factor<br>(dB) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|----------------------------|----------------|-------------------------------|--------------------|----------------|------------------|
| 2384               | 63.73                      | -8.76          | 54.97                         | 74                 | 19.03          | peak             |
| 2384               | 54.07                      | -8.76          | 45.31                         | 54                 | 8.69           | AVG              |
| 2390               | 62.60                      | -8.73          | 53.87                         | 74                 | 20.13          | peak             |
| 2390               | 57.94                      | -8.73          | 49.21                         | 54                 | 4.79           | AVG              |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.







|              |          |                   |                         |
|--------------|----------|-------------------|-------------------------|
| Polarization | Vertical | Test Mode         | TX /Model 3-3Mbps(CH78) |
| Temperature  | 20 °C    | Relative Humidity | 48%                     |
| Pressure     | 1010 hPa |                   |                         |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 62.07         | -8.17  | 53.90          | 74       | 20.10  | peak          |
| 2483.5    | 54.04         | -8.17  | 45.87          | 54       | 8.13   | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

|              |            |                   |                         |
|--------------|------------|-------------------|-------------------------|
| Polarization | Horizontal | Test Mode         | TX /Model 3-3Mbps(CH78) |
| Temperature  | 20 °C      | Relative Humidity | 48%                     |
| Pressure     | 1010 hPa   |                   |                         |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 63.22         | -8.17  | 55.05          | 74       | 18.95  | peak          |
| 2483.5    | 54.99         | -8.17  | 46.82          | 54       | 7.18   | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.




**Test result for hopping mode:**

|              |          |                   |                    |
|--------------|----------|-------------------|--------------------|
| Polarization | Vertical | Test Mode         | hopping mode-1Mbps |
| Temperature  | 20 °C    | Relative Humidity | 48%                |
| Pressure     | 1010 hPa |                   |                    |

| Frequency<br>(MHz) | Meter<br>Reading<br>(dBμV) | Factor<br>(dB) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|----------------------------|----------------|-------------------------------|--------------------|----------------|------------------|
| 2387               | 60.59                      | -8.76          | 51.83                         | 74                 | 22.17          | peak             |
| 2387               | 55.67                      | -8.76          | 46.91                         | 54                 | 7.09           | AVG              |
| 2390               | 63.32                      | -8.73          | 54.59                         | 74                 | 19.41          | peak             |
| 2390               | 57.53                      | -8.73          | 48.80                         | 54                 | 5.20           | AVG              |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

|              |            |                   |                    |
|--------------|------------|-------------------|--------------------|
| Polarization | Horizontal | Test Mode         | Hopping mode-1Mbps |
| Temperature  | 20 °C      | Relative Humidity | 48%                |
| Pressure     | 1010 hPa   |                   |                    |

| Frequency<br>(MHz) | Meter<br>Reading<br>(dBμV) | Factor<br>(dB) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|----------------------------|----------------|-------------------------------|--------------------|----------------|------------------|
| 2387               | 62.23                      | -8.76          | 53.47                         | 74                 | 20.53          | peak             |
| 2387               | 53.54                      | -8.76          | 44.78                         | 54                 | 9.22           | AVG              |
| 2390               | 63.70                      | -8.73          | 54.97                         | 74                 | 19.03          | peak             |
| 2390               | 57.72                      | -8.73          | 48.99                         | 54                 | 5.01           | AVG              |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.





|              |          |                   |                    |
|--------------|----------|-------------------|--------------------|
| Polarization | Vertical | Test Mode         | Hopping mode-1Mbps |
| Temperature  | 20 °C    | Relative Humidity | 48%                |
| Pressure     | 1010 hPa |                   |                    |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 60.65         | -8.17  | 52.48          | 74       | 21.52  | peak          |
| 2483.5    | 53.44         | -8.17  | 45.27          | 54       | 8.73   | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

|              |            |                   |                    |
|--------------|------------|-------------------|--------------------|
| Polarization | Horizontal | Test Mode         | Hopping mode-1Mbps |
| Temperature  | 20 °C      | Relative Humidity | 48%                |
| Pressure     | 1010 hPa   |                   |                    |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 64.30         | -8.17  | 56.13          | 74       | 17.87  | peak          |
| 2483.5    | 54.01         | -8.17  | 45.84          | 54       | 8.16   | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.





## 5. NUMBER OF HOPPING CHANNEL

### 5.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |                           |       |                       |        |
|---------------------------------|---------------------------|-------|-----------------------|--------|
| Section                         | Test Item                 | Limit | Frequency Range (MHz) | Result |
| 15.247<br>(a)(1)(iii)           | Number of Hopping Channel | ≥15   | 2400-2483.5           | PASS   |

| Spectrum Parameters | Setting                     |
|---------------------|-----------------------------|
| Attenuation         | Auto                        |
| Span Frequency      | > Operating Frequency Range |
| RB                  | 1MHz                        |
| VB                  | 3MHz                        |
| Detector            | Peak                        |
| Trace               | Max Hold                    |
| Sweep Time          | Auto                        |


#### 5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 1MHz, VBW=3MHz, Sweep time = Auto.

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

#### 5.1.3 TEST SETUP

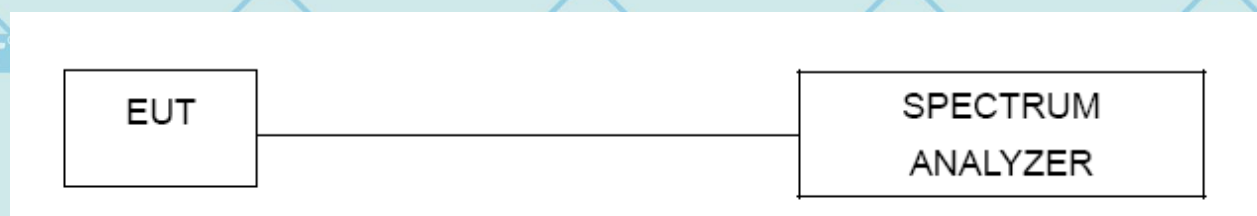

#### 5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





## 5.2 TEST RESULTS

|                           |          |                   |              |
|---------------------------|----------|-------------------|--------------|
| Number of Hopping Channel | 79       | Test Mode         | Hopping Mode |
| Temperature               | 25°C     | Relative Humidity | 60%          |
| Pressure                  | 1015 hPa |                   |              |

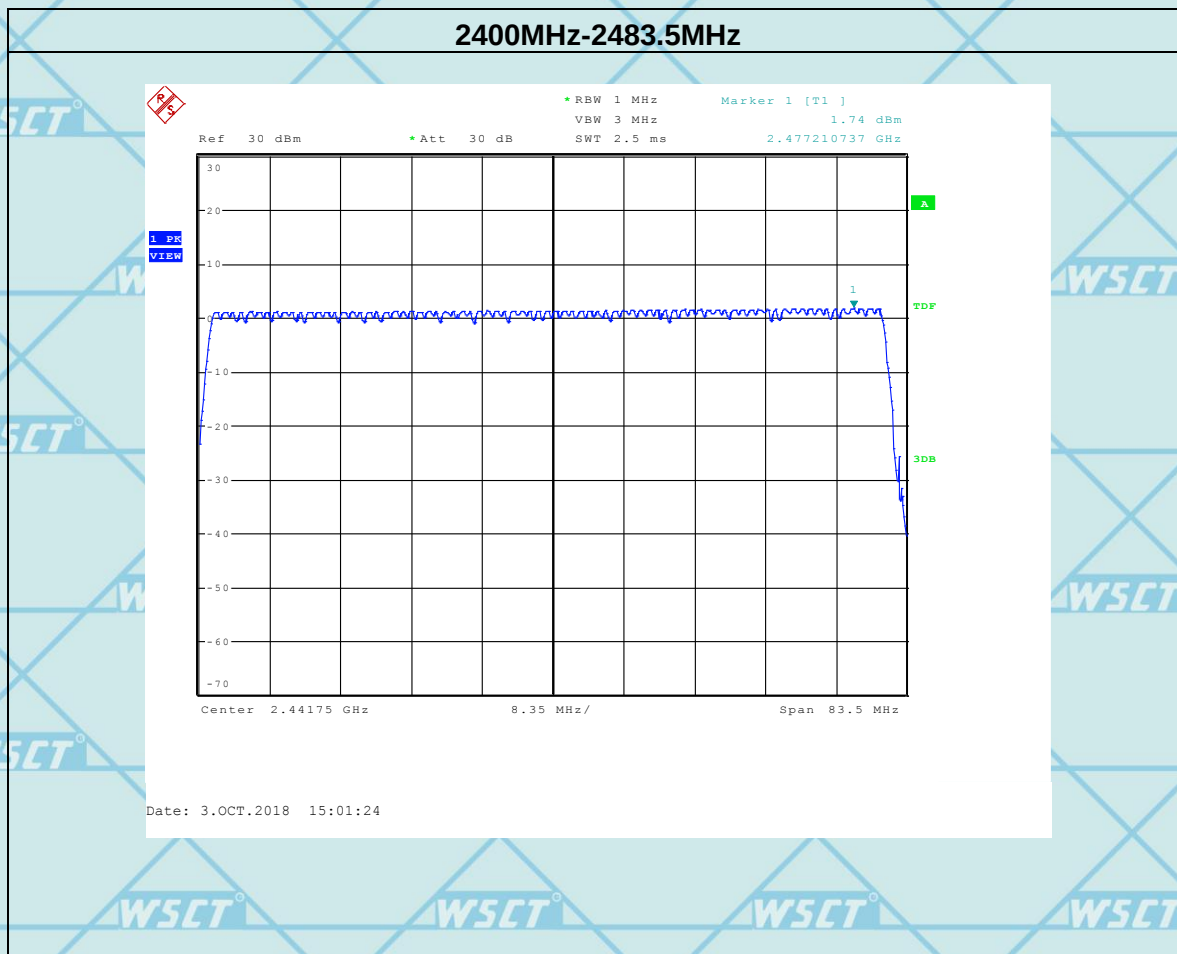





## 6. AVERAGE TIME OF OCCUPANCY

### 6.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |                              |        |                          |        |
|---------------------------------|------------------------------|--------|--------------------------|--------|
| Section                         | Test Item                    | Limit  | Frequency Range<br>(MHz) | Result |
| 15.247<br>(a)(1)(iii)           | Average Time<br>of Occupancy | 0.4sec | 2400-2483.5              | PASS   |

### 6.1.2 TEST PROCEDURE

- The EUT test port was connected to the spectrum analyzer with RF cable and antenna connector.
- Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Set the EUT for DH5, DH3 and DH1 packet transmitting.
- Measure the maximum time duration of one single pulse.
- $DH1 \text{ Dwell time} = \text{Pulse time} \times (1600/2/79) \times 31.6S$   
 $DH3 \text{ Dwell time} = \text{Pulse time} \times (1600/4/79) \times 31.6S$   
 $DH5 \text{ Dwell time} = \text{Pulse time} \times (1600/6/79) \times 31.6S$

### 6.1.3 DEVIATION FROM STANDARD


No deviation.







## 6.1.4 TEST SETUP

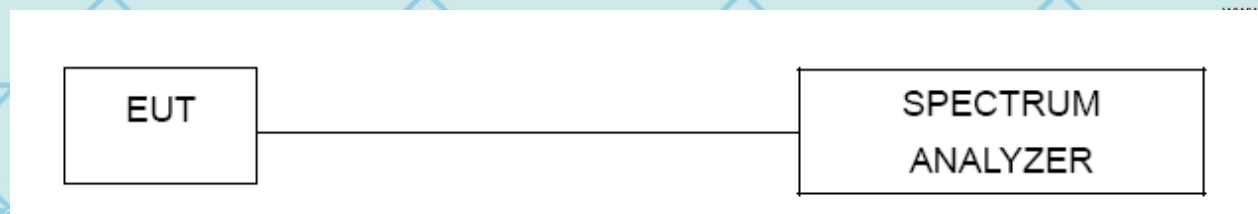

## 6.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.








## 6.2 TEST RESULTS


Note: *the worst case is 1Mbps as result in this part.*

|             |          |                   |           |
|-------------|----------|-------------------|-----------|
| Pressure    | 1012 hPa | Test Mode         | DH1-1Mbps |
| Temperature | 25°C     | Relative Humidity | 60%       |

| Data Packet | Frequency | Pulse time(ms) | Dwell Time(S) | Limits (S) |
|-------------|-----------|----------------|---------------|------------|
| DH1         | 2402MHz   | 0.563          | 0.180         | 0.4        |
| DH1         | 2441MHz   | 0.563          | 0.180         | 0.4        |
| DH1         | 2480MHz   | 0.563          | 0.180         | 0.4        |

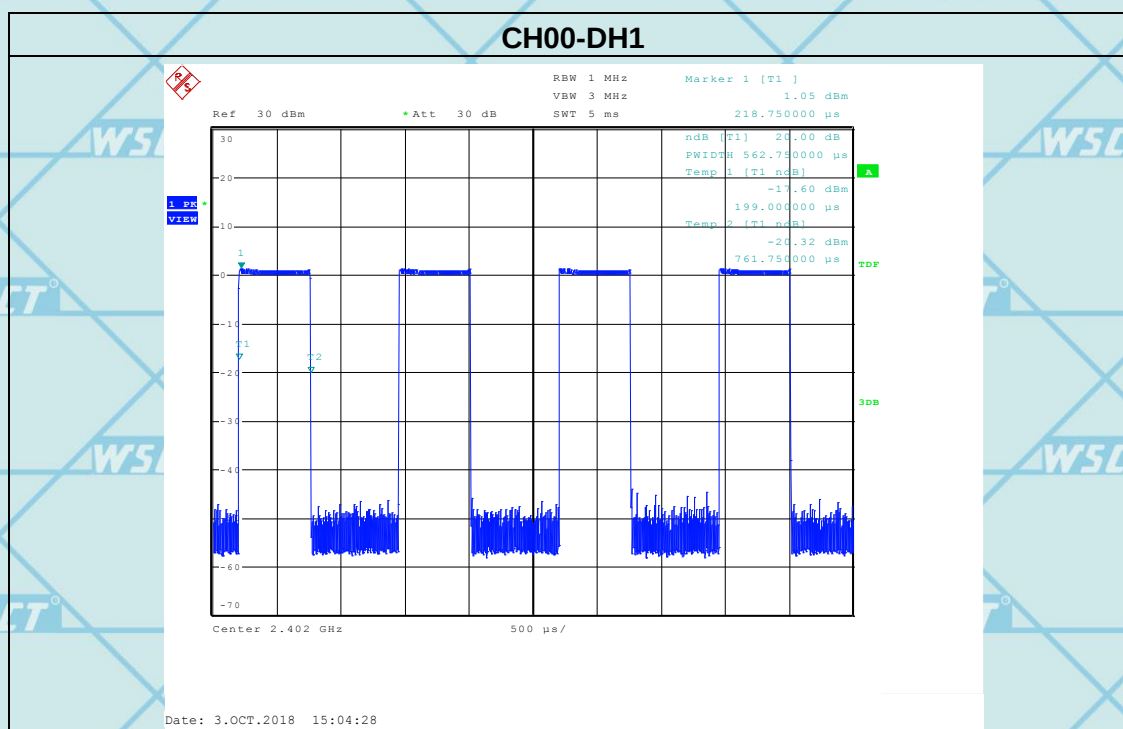



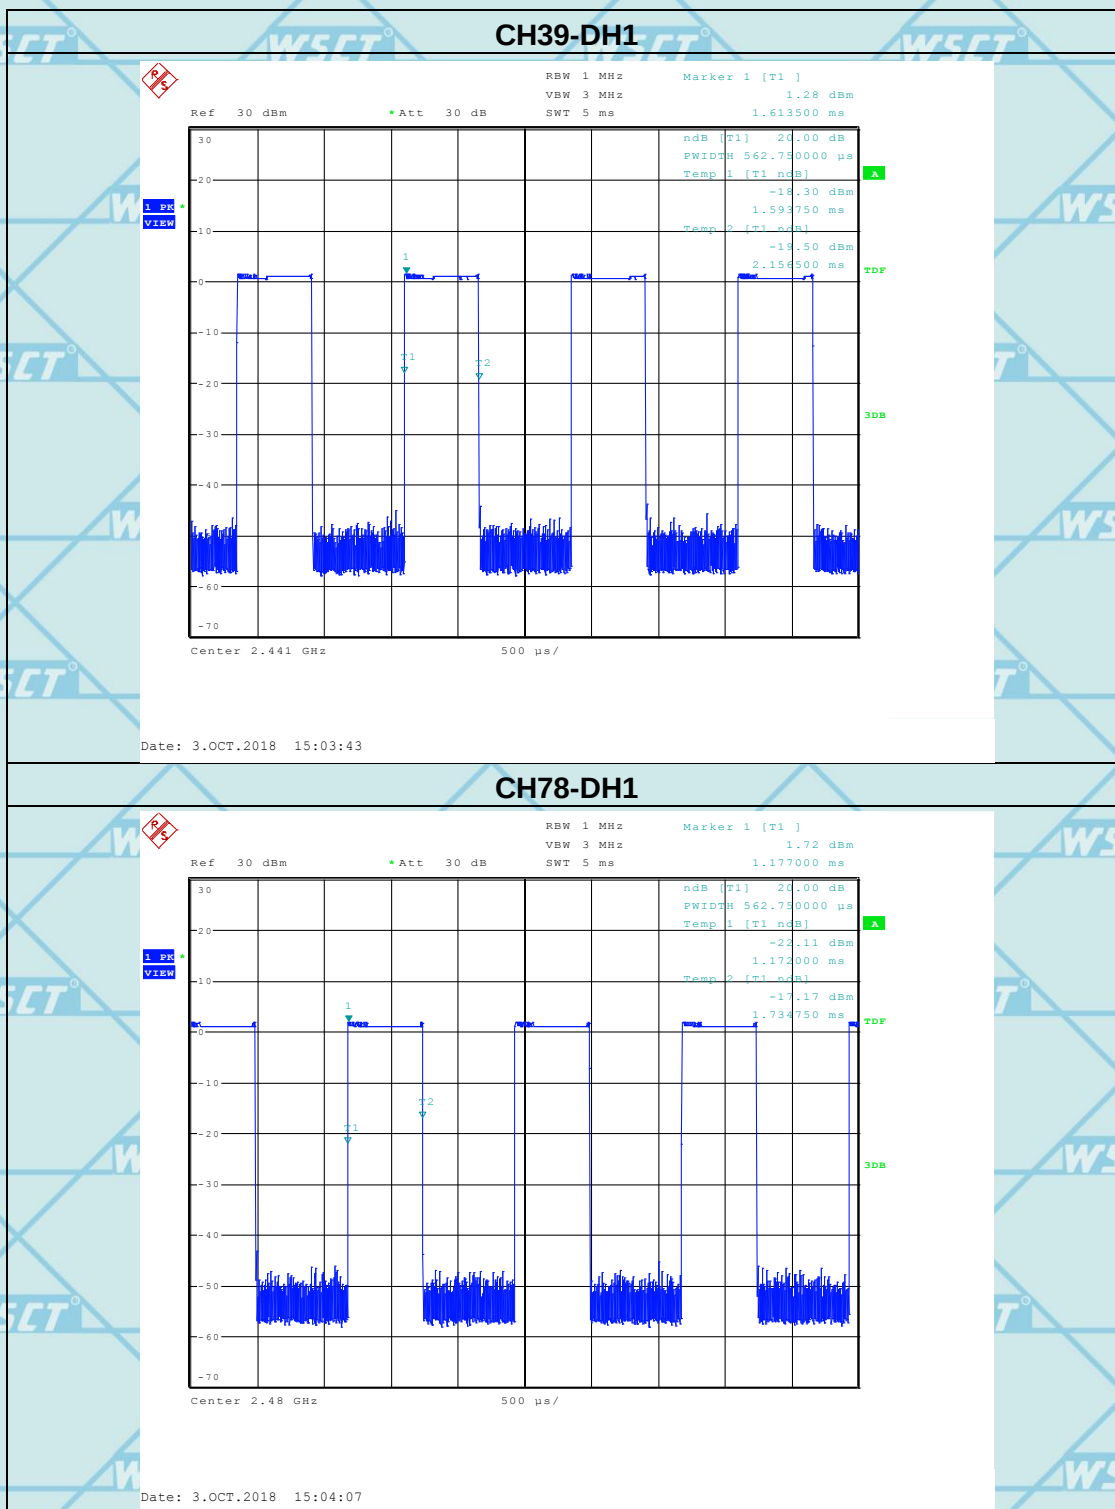






|             |          |                   |           |
|-------------|----------|-------------------|-----------|
| Pressure    | 1012 hPa | Test Mode         | DH3-1Mbps |
| Temperature | 25°C     | Relative Humidity | 60%       |

| Data Packet | Frequency | Pulse time(ms) | Dwell Time(S) | Limits (S) |
|-------------|-----------|----------------|---------------|------------|
| DH3         | 2402MHz   | 1.771          | 0.283         | 0.4        |
| DH3         | 2441MHz   | 1.771          | 0.283         | 0.4        |
| DH3         | 2480MHz   | 1.771          | 0.283         | 0.4        |

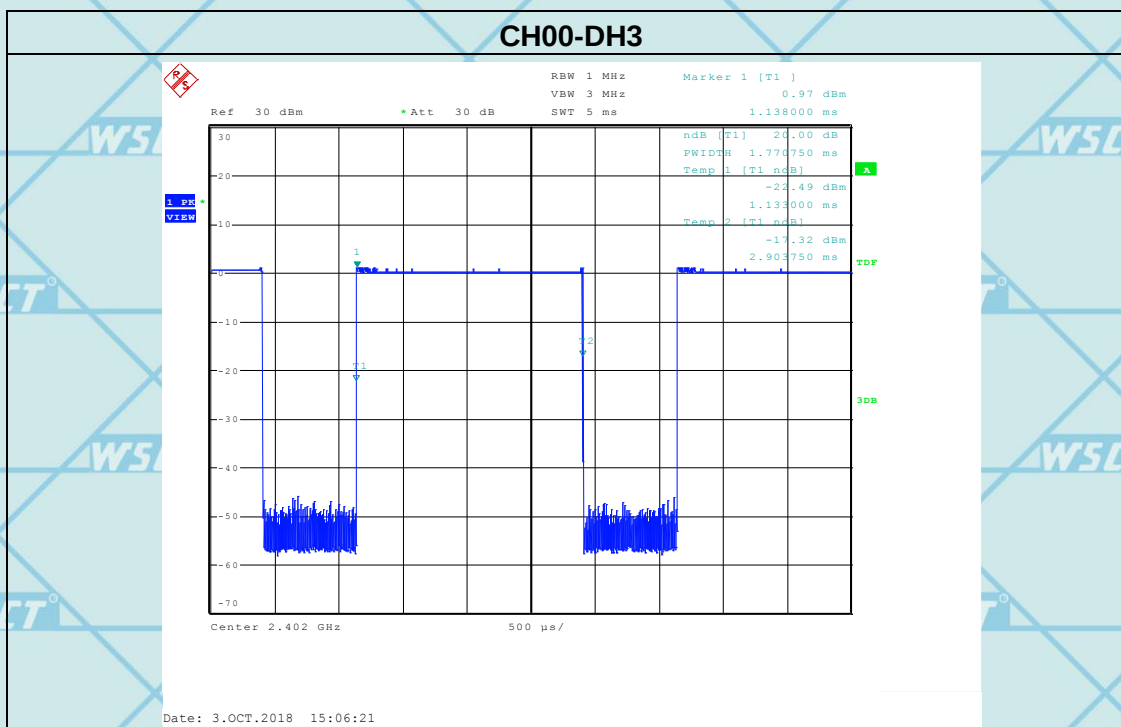







For Question,  
Please Contact with WSCT  
www.wsct-cert.com

### CH39-DH3

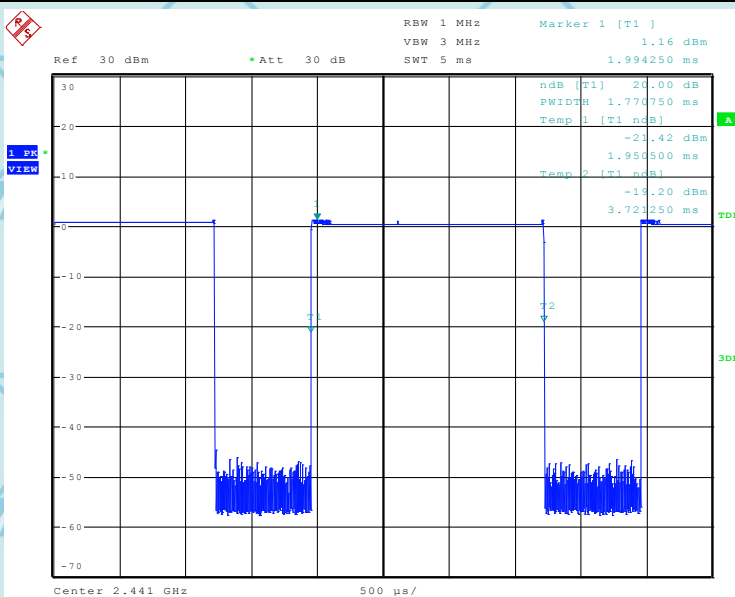

Date: 3.OCT.2018 15:05:29

### CH78-DH3

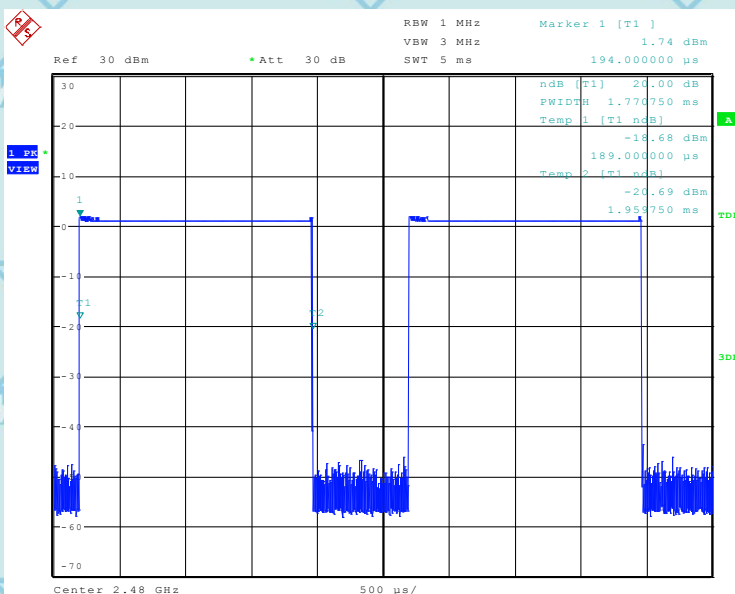

Date: 3.OCT.2018 15:05:55



世标检测认证股份  
World Standardization Certification & Testing Group Co., Ltd.

ADD: Building A-B Baoshi Science & technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China  
TEL: 86-755-26996143/26996144/26996145/26996192 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com


Member of the WSCT INC.





|             |          |                   |           |
|-------------|----------|-------------------|-----------|
| Pressure    | 1012 hPa | Test Mode         | DH5-1Mbps |
| Temperature | 25°C     | Relative Humidity | 60%       |

| Data Packet | Frequency | Pulse time(ms) | Dwell Time(S) | Limits (S) |
|-------------|-----------|----------------|---------------|------------|
| DH5         | 2402MHz   | 2.883          | 0.308         | 0.4        |
| DH5         | 2441MHz   | 2.883          | 0.308         | 0.4        |
| DH5         | 2480MHz   | 2.883          | 0.308         | 0.4        |

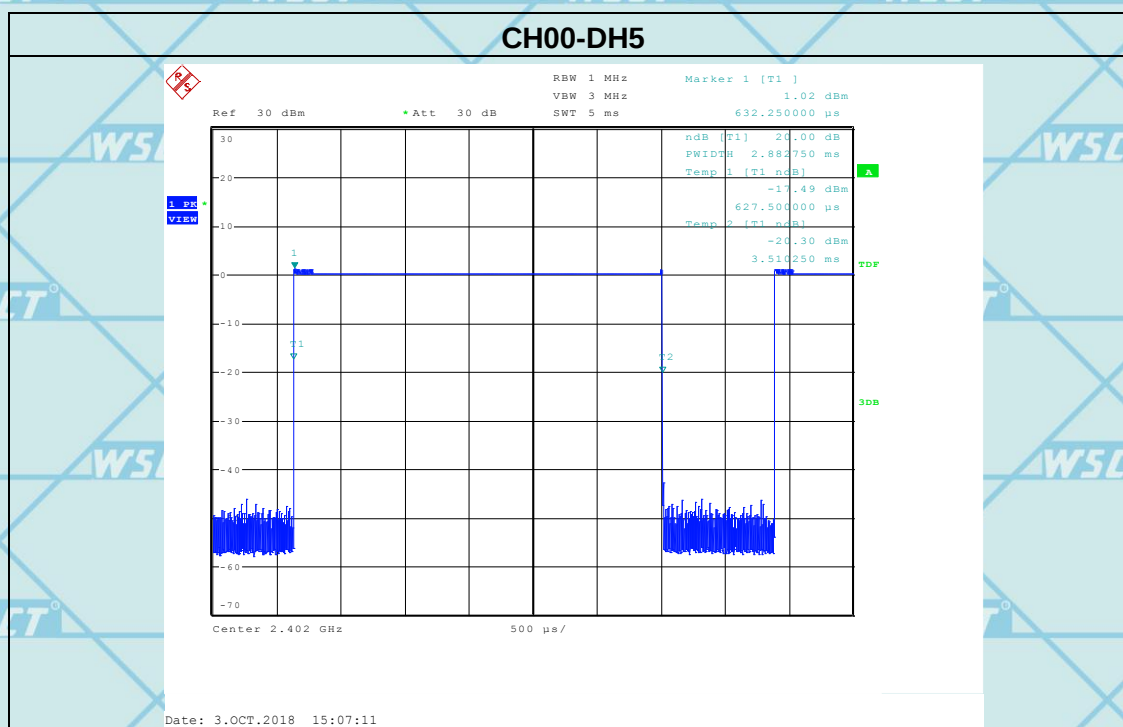







For Question,  
Please Contact with WSCT  
www.wsct-cert.com

### CH39-DH5

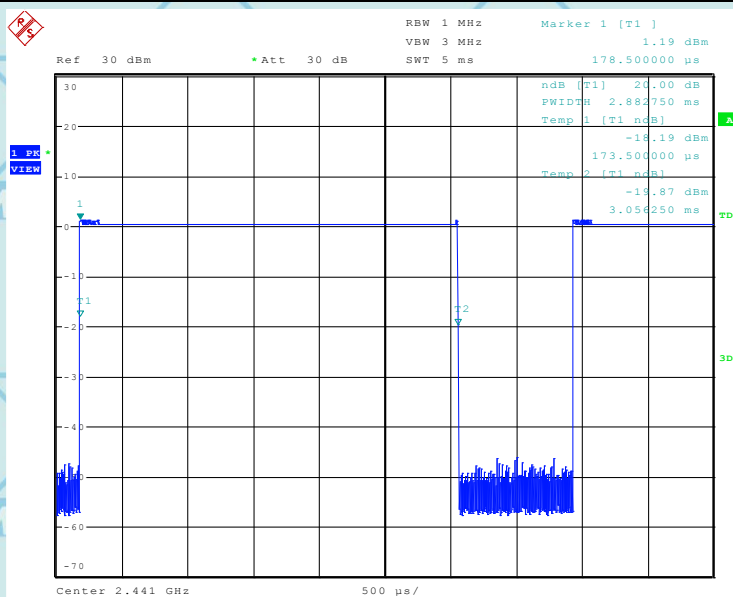

Date: 3.OCT.2018 15:07:47

### CH78-DH5

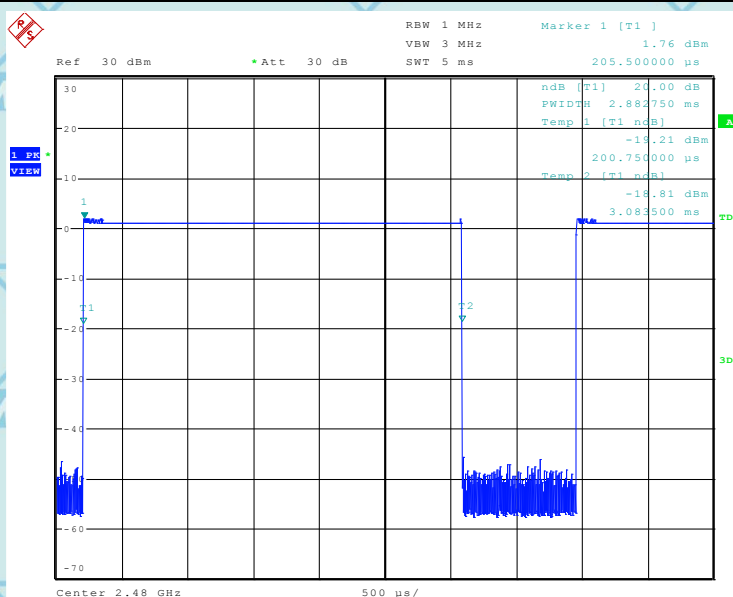

Date: 3.OCT.2018 15:08:28







## 6. HOPPING CHANNEL SEPARATION MEASUREMENT

### 6.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

| Spectrum Parameter | Setting                                                  |
|--------------------|----------------------------------------------------------|
| Attenuation        | Auto                                                     |
| Span Frequency     | > Measurement Bandwidth or Channel Separation            |
| RB                 | Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span |
| VB                 | Video (or Average) Bandwidth (VBW) $\geq$ RBW            |
| Detector           | Peak                                                     |
| Trace              | Max hold                                                 |
| Sweep Time         | Auto                                                     |


### 6.1.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels; Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span; Video (or Average) Bandwidth (VBW)  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold
3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
4. Repeat above procedures until all frequencies measured were complete.

### 6.1.3 DEVIATION FROM STANDARD

No deviation.

### 6.1.4 TEST SETUP

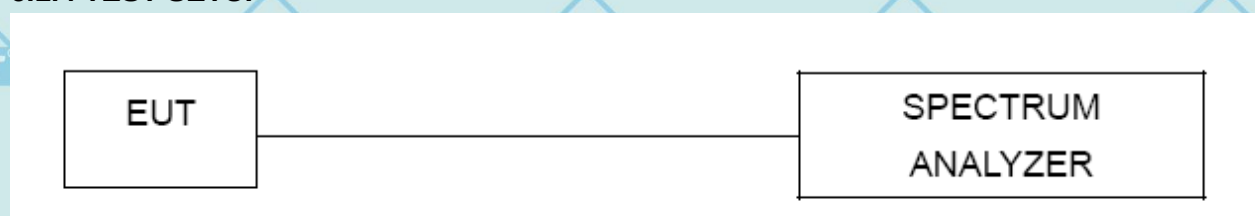

### 6.1.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.





## 6.2 TEST RESULTS


|             |          |                   |                                    |
|-------------|----------|-------------------|------------------------------------|
| Pressure    | 1012 hPa | Test Mode         | CH00 / CH39 / CH78<br>(1Mbps Mode) |
| Temperature | 25°C     | Relative Humidity | 60%                                |
| Test Result | Pass     |                   |                                    |

| Channel number | Channel frequency<br>(MHz) | Separation Read value<br>(KHz) | Separation limit<br>(KHz) |
|----------------|----------------------------|--------------------------------|---------------------------|
| 00             | 2402                       | 1000                           | 20dB BW                   |
| 39             | 2441                       | 1000                           | 20dB BW                   |
| 78             | 2480                       | 1000                           | 20dB BW                   |

Note: 20db bandwidth refer to section9.6






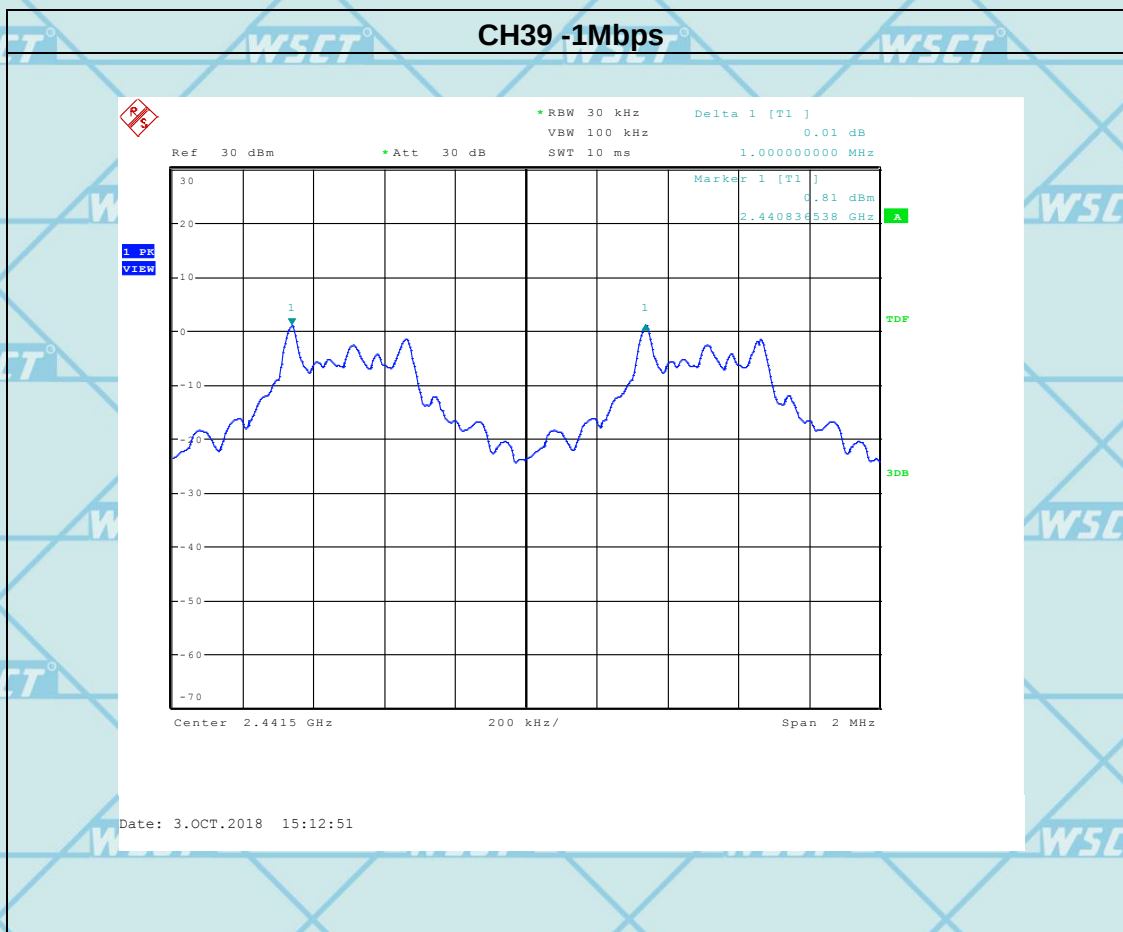





### CH78 -1Mbps

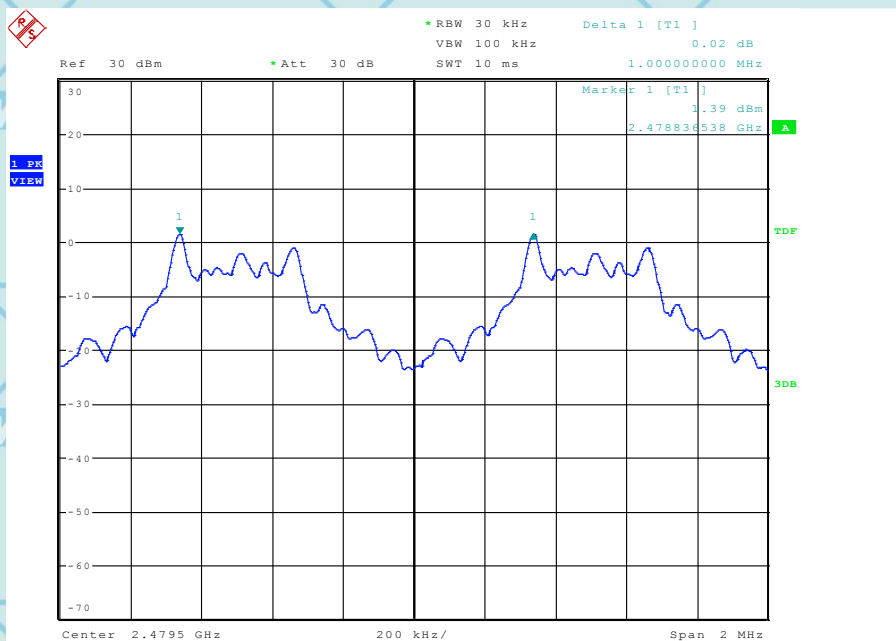

Date: 3.OCT.2018 15:14:41









|             |          |                   |                                    |
|-------------|----------|-------------------|------------------------------------|
| Pressure    | 1012 hPa | Test Mode         | CH00 / CH39 / CH78<br>(2Mbps Mode) |
| Temperature | 25°C     | Relative Humidity | 60%                                |
| Test Result | Pass     |                   |                                    |

| Channel number | Channel frequency<br>(MHz) | Separation Read value<br>(KHz) | Separation limit<br>(KHz) |
|----------------|----------------------------|--------------------------------|---------------------------|
| 00             | 2402                       | 1000                           | 2/3 *20dB BW              |
| 39             | 2441                       | 1000                           | 2/3 *20dB BW              |
| 78             | 2480                       | 1000                           | 2/3 *20dB BW              |

Note: 20db bandwidth refer to section 9.6

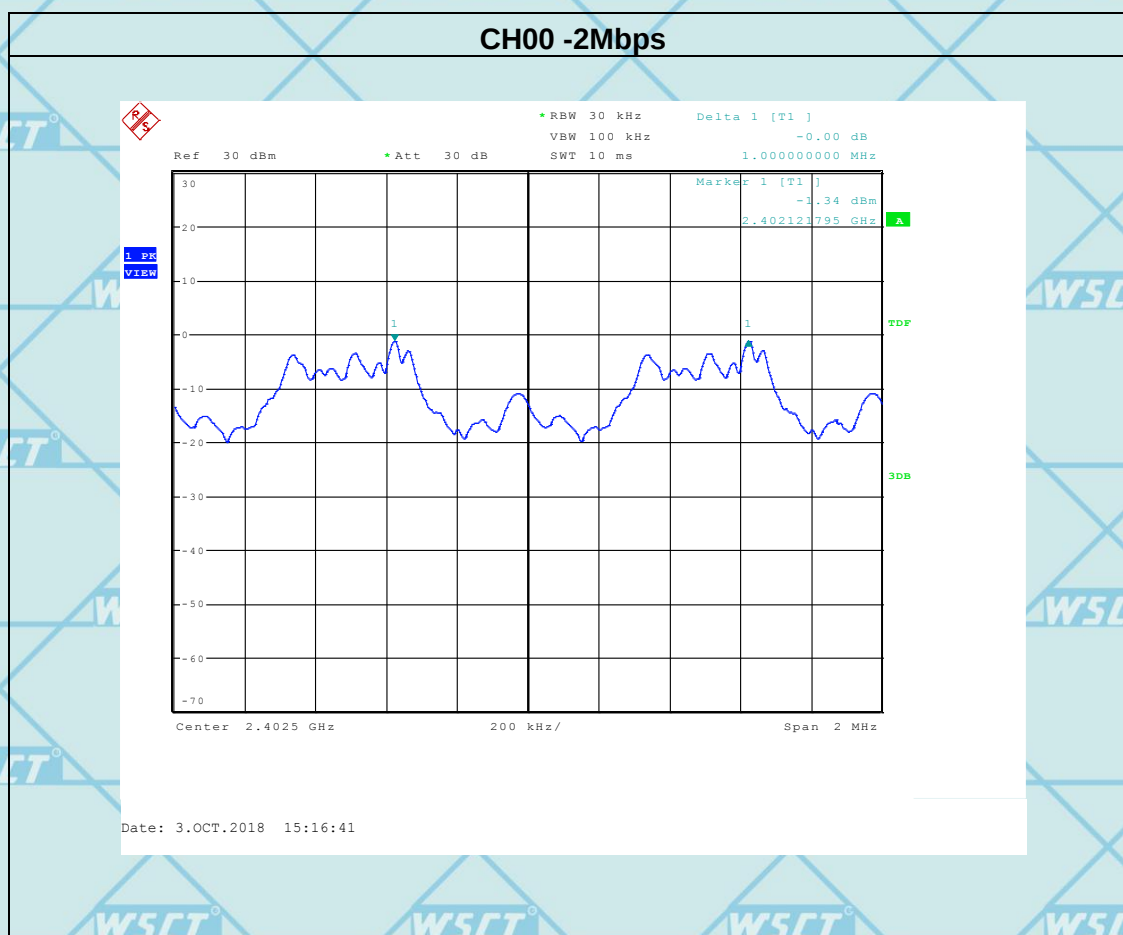


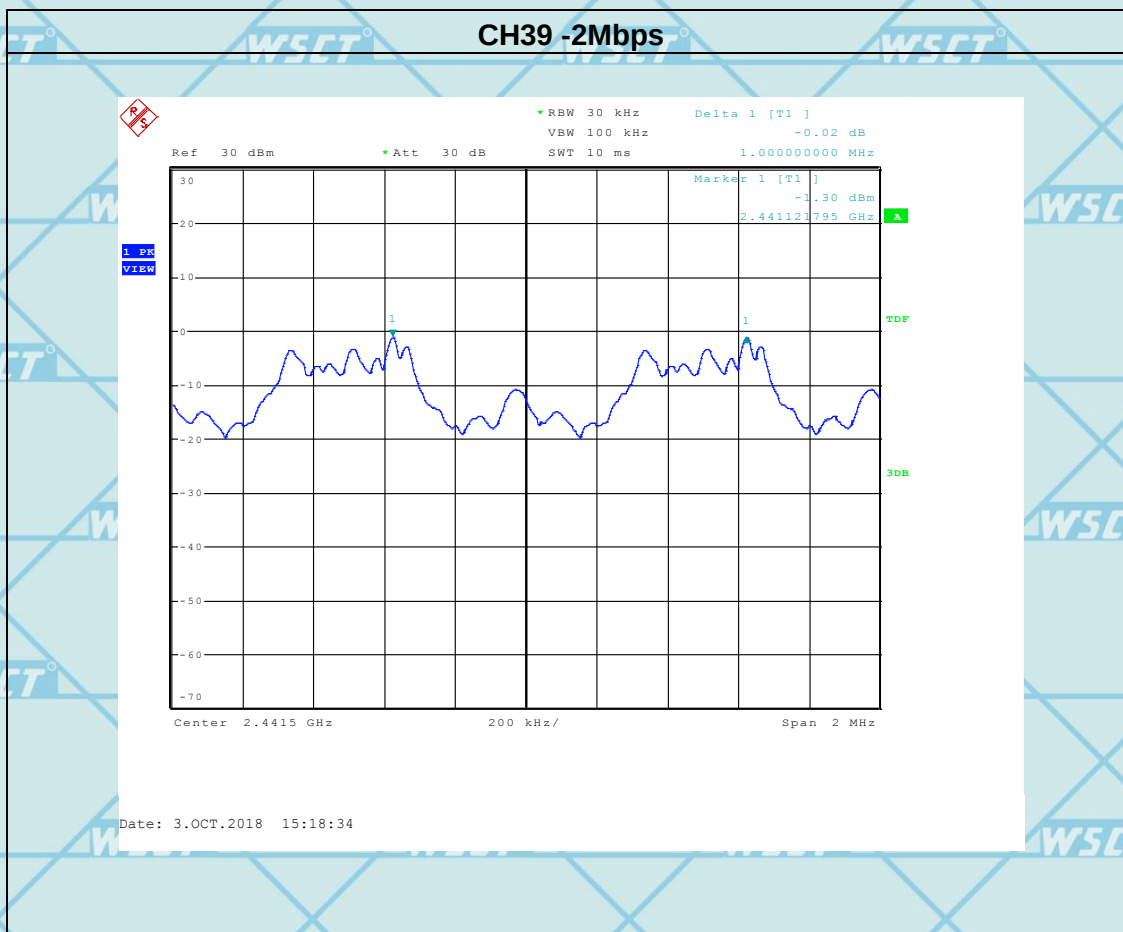





### CH78 -2Mbps

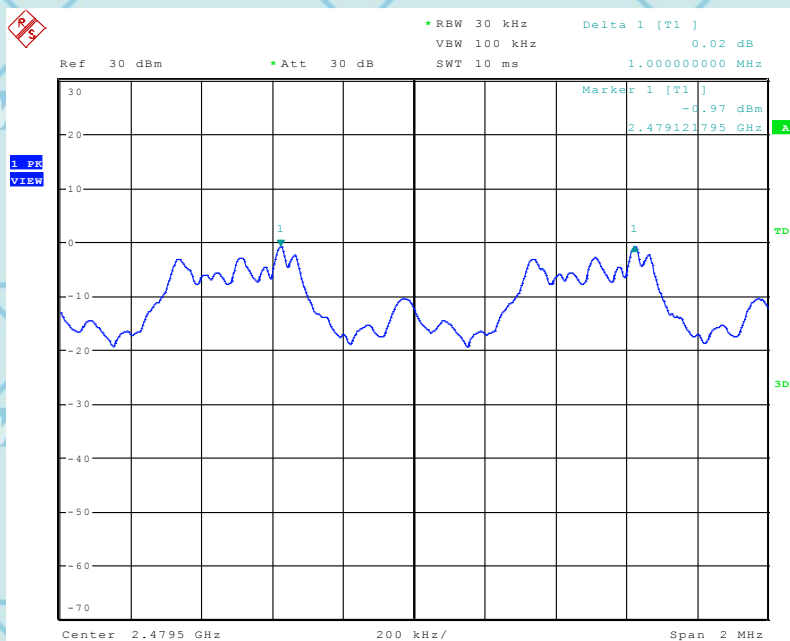

Date: 3.OCT.2018 15:20:23







|             |          |                   |                                   |
|-------------|----------|-------------------|-----------------------------------|
| Pressure    | 1012 hPa | Test Mode         | CH00 / CH39 /CH78<br>(3Mbps Mode) |
| Temperature | 25°C     | Relative Humidity | 60%                               |
| Test Result | Pass     |                   |                                   |

| Channel number | Channel frequency<br>(MHz) | Separation Read value<br>(KHz) | Separation limit<br>(KHz) |
|----------------|----------------------------|--------------------------------|---------------------------|
| 00             | 2402                       | 1000                           | 2/3 *20dB BW              |
| 39             | 2441                       | 1000                           | 2/3 *20dB BW              |
| 78             | 2480                       | 1000                           | 2/3 *20dB BW              |

Note: 20db bandwidth refer to section 9.6

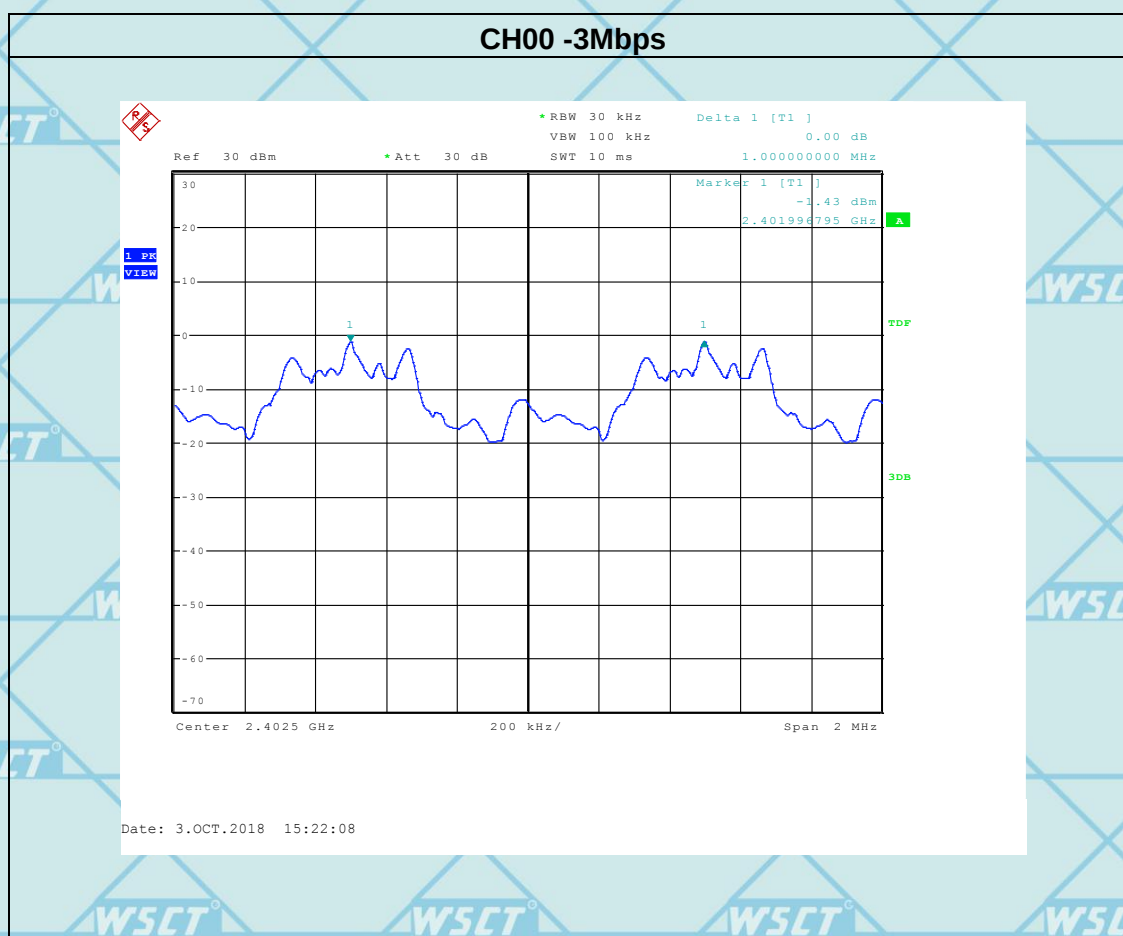




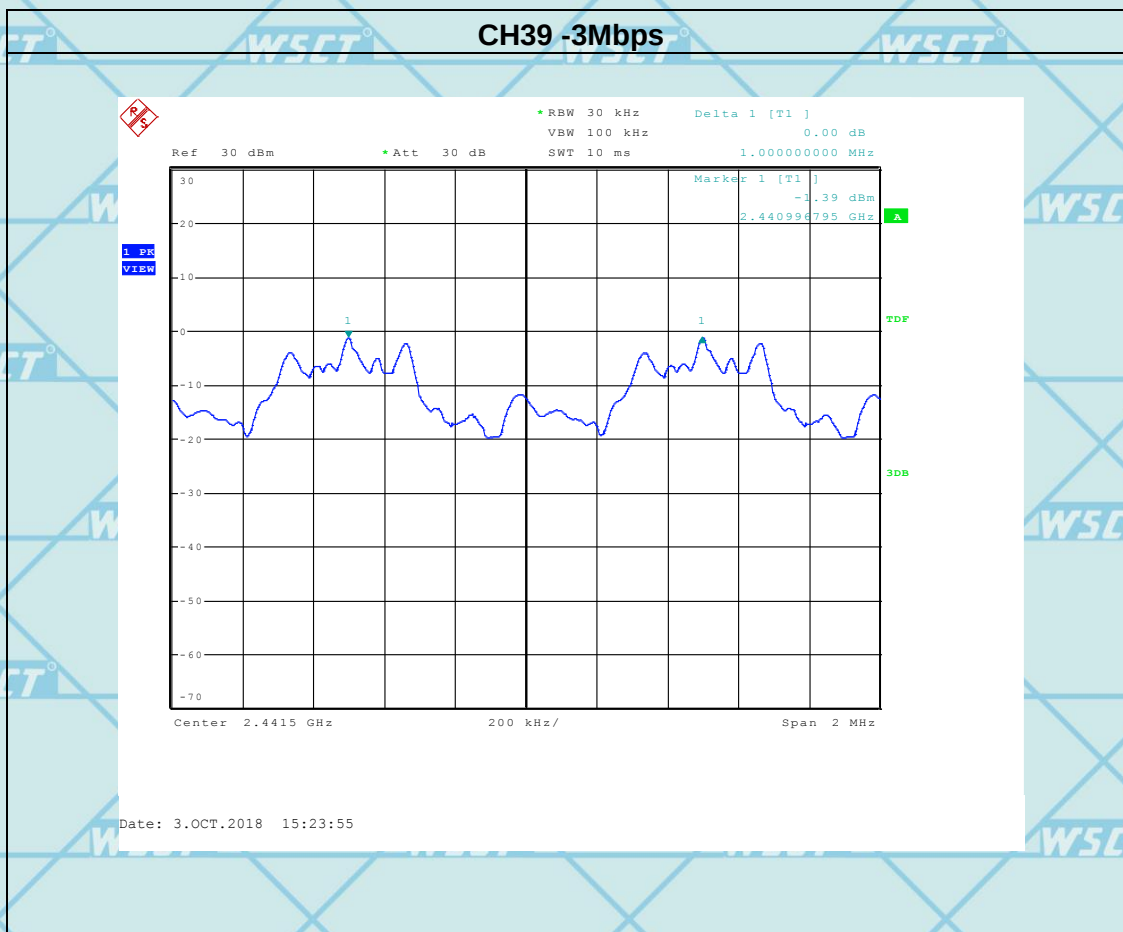



### CH78 -3Mbps

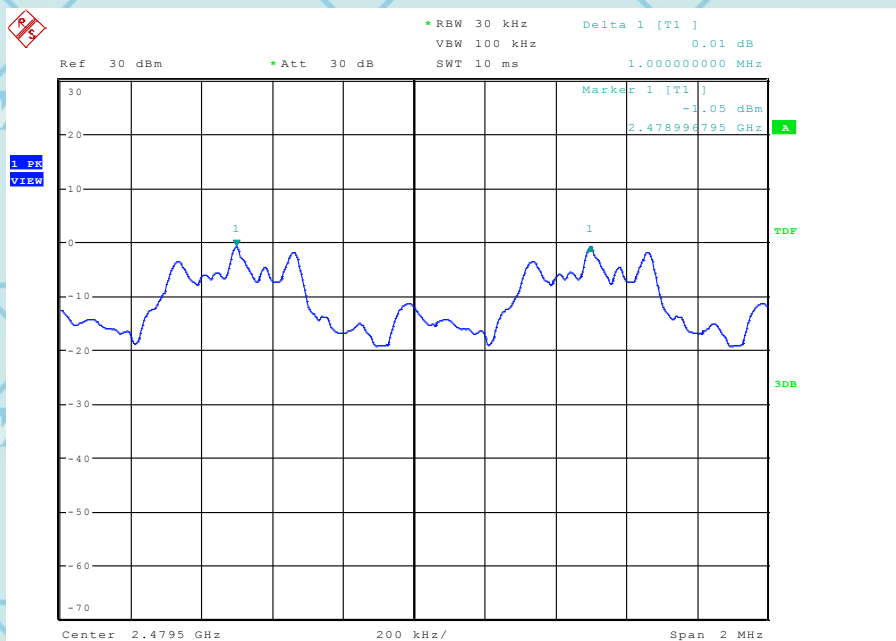

Date: 3.OCT.2018 15:26:13







## 7. BANDWIDTH TEST

### 7.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |           |                  |                       |        |
|---------------------------------|-----------|------------------|-----------------------|--------|
| Section                         | Test Item | Limit            | Frequency Range (MHz) | Result |
| 15.247<br>(a)(1)                | Bandwidth | (20dB bandwidth) | 2400-2483.5           | PASS   |

| Spectrum Parameter | Setting                                       |
|--------------------|-----------------------------------------------|
| Attenuation        | Auto                                          |
| Span Frequency     | > Measurement Bandwidth or Channel Separation |
| RB                 | 30kHz                                         |
| VB                 | 100 kHz                                       |
| Detector           | Peak                                          |
| Trace              | Max hold                                      |
| Sweep Time         | Auto                                          |


#### 7.1.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
2. Set the spectrum analyzer as follows: VBW =30kHz, RBW=100kHz, Sweep = auto Detector function = peak ,Trace = max hold
3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
4. Repeat above procedures until all frequencies measured were complete.

#### 7.1.3 DEVIATION FROM STANDARD

No deviation.

#### 7.1.4 TEST SETUP

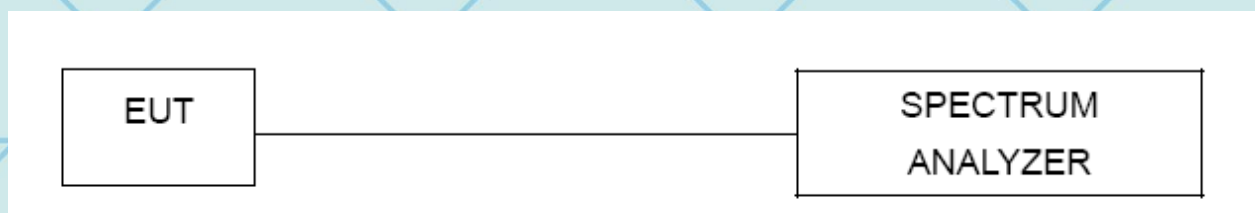

#### 7.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




## 7.2 TEST RESULTS

Note: *the worst case is DH5 as result in this part.*

|             |          |                   |                      |
|-------------|----------|-------------------|----------------------|
| Pressure    | 1012 hPa | Test Mode         | CH00/CH39/C78(1Mbps) |
| Temperature | 25°C     | Relative Humidity | 60%                  |

| Frequency | 20dB Bandwidth (kHz) | Result |
|-----------|----------------------|--------|
| 2402 MHz  | 837                  | PASS   |
| 2441 MHz  | 841                  | PASS   |
| 2480 MHz  | 827                  | PASS   |


### CH00 -1Mbps

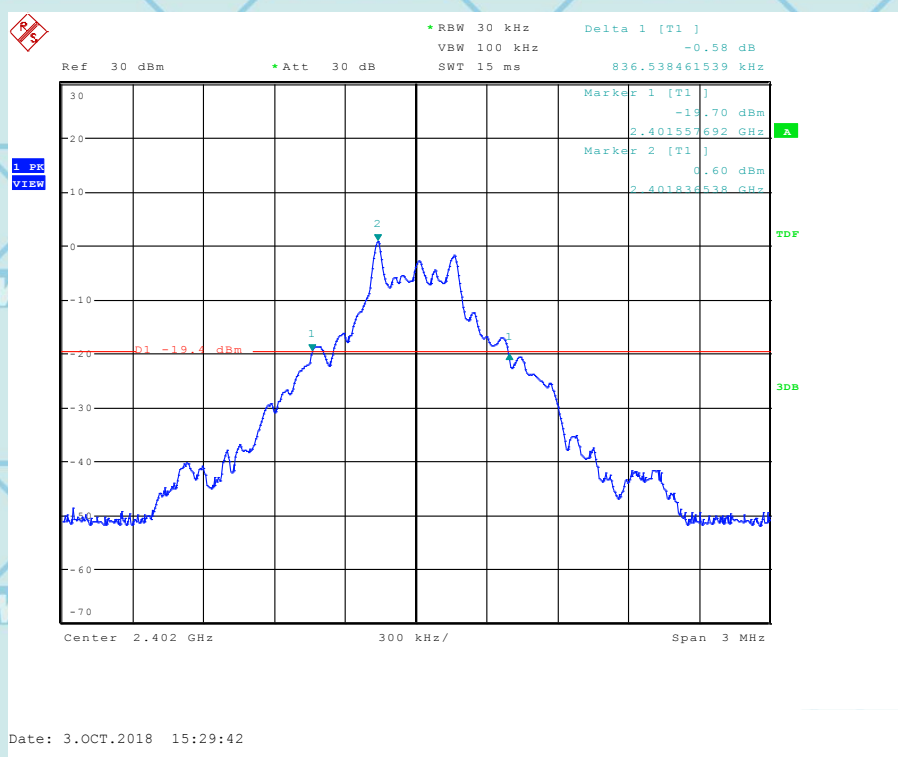





### CH39 -1Mbps

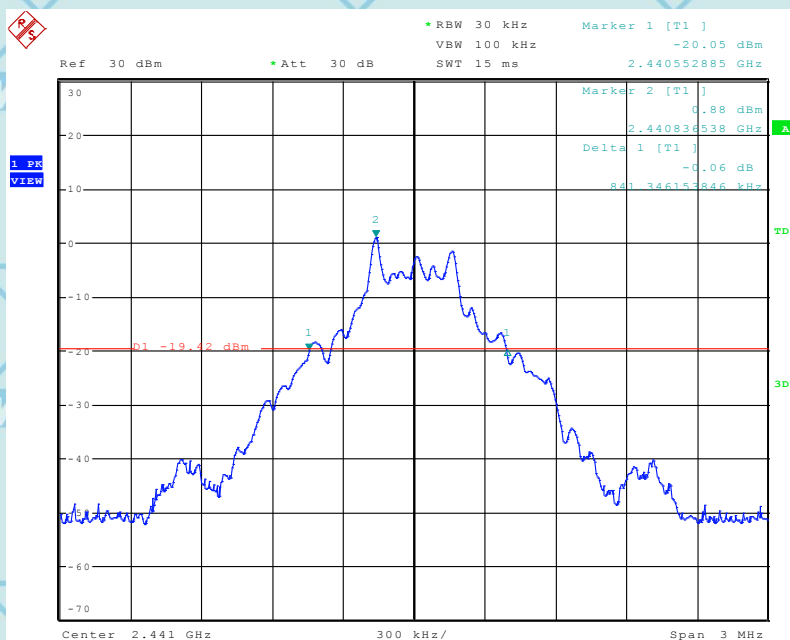


Date: 3.OCT.2018 15:31:10





For Question,  
Please Contact with WSCT  
www.wsct-cert.com

### CH78 -1Mbps

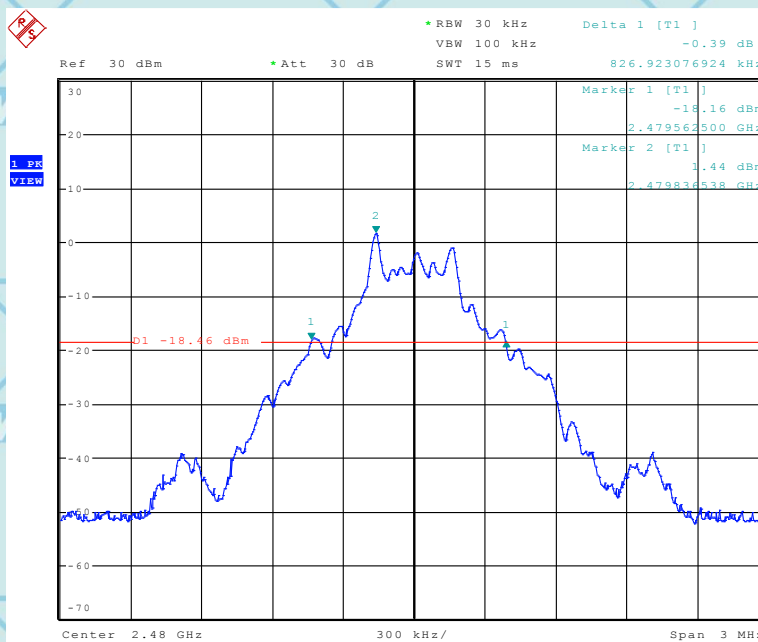

Date: 3.OCT.2018 15:32:43



世标检测认证股份  
World Standardization Certification & Testing Group Co., Ltd.

ADD: Building A-B Baoshi Science & technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China  
TEL: 86-755-26996143/26996144/26996145/26996192 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com

Member of the WSCT INC.






For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Note: *the worst case is DH5as result in this part.*

|             |          |                   |                      |
|-------------|----------|-------------------|----------------------|
| Pressure    | 1012 hPa | Test Mode         | CH00/CH39/C78(2Mbps) |
| Temperature | 25°C     | Relative Humidity | 60%                  |


| Frequency | 20dB Bandwidth (kHz) | Result |
|-----------|----------------------|--------|
| 2402 MHz  | 1135                 | PASS   |
| 2441 MHz  | 1149                 | PASS   |
| 2480 MHz  | 1149                 | PASS   |

### CH00 -2Mbps

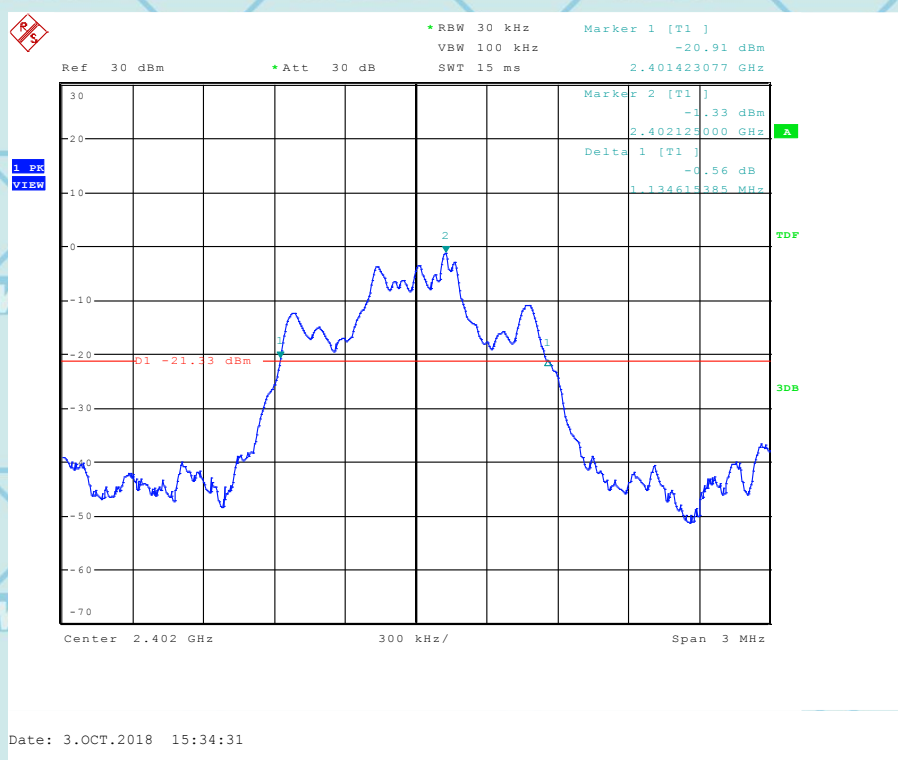



# CH39 -2Mbps

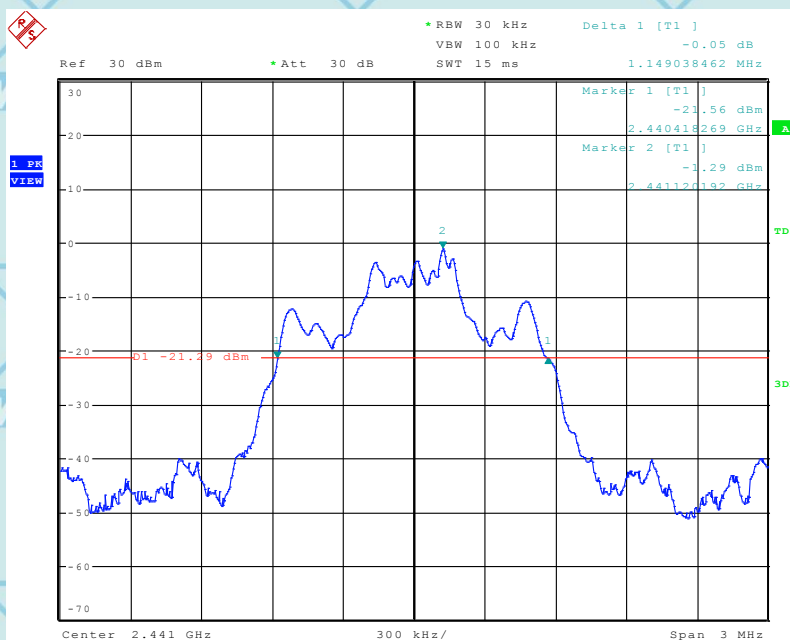


Date: 3.OCT.2018 15:36:28







### CH78 -2Mbps

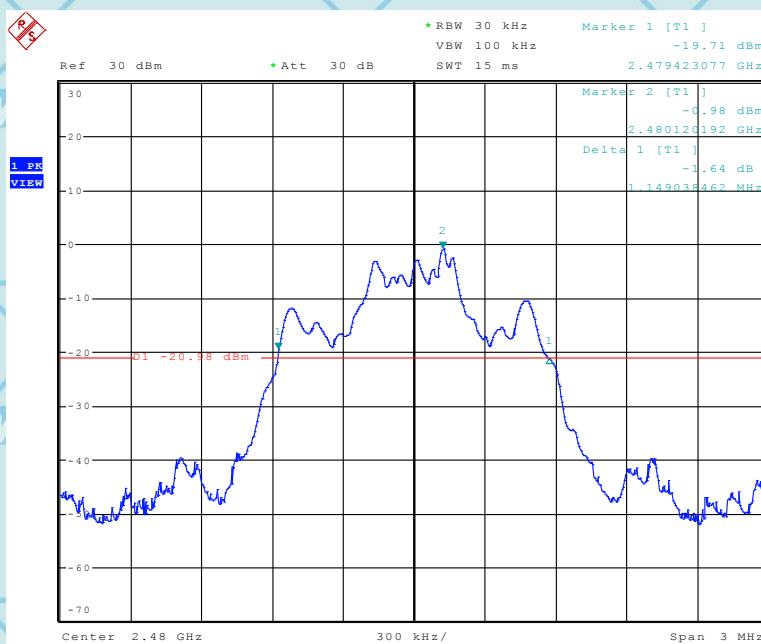

Date: 3.OCT.2018 15:38:09






Note: *the worst case is DH5as result in this part.*

|             |          |                   |                      |
|-------------|----------|-------------------|----------------------|
| Pressure    | 1012 hPa | Test Mode         | CH00/CH39/C78(3Mbps) |
| Temperature | 25°C     | Relative Humidity | 60%                  |

| Frequency | 20dB Bandwidth (kHz) | Result |
|-----------|----------------------|--------|
| 2402 MHz  | 1144                 | PASS   |
| 2441 MHz  | 1149                 | PASS   |
| 2480 MHz  | 1154                 | PASS   |


### CH00 -3Mbps

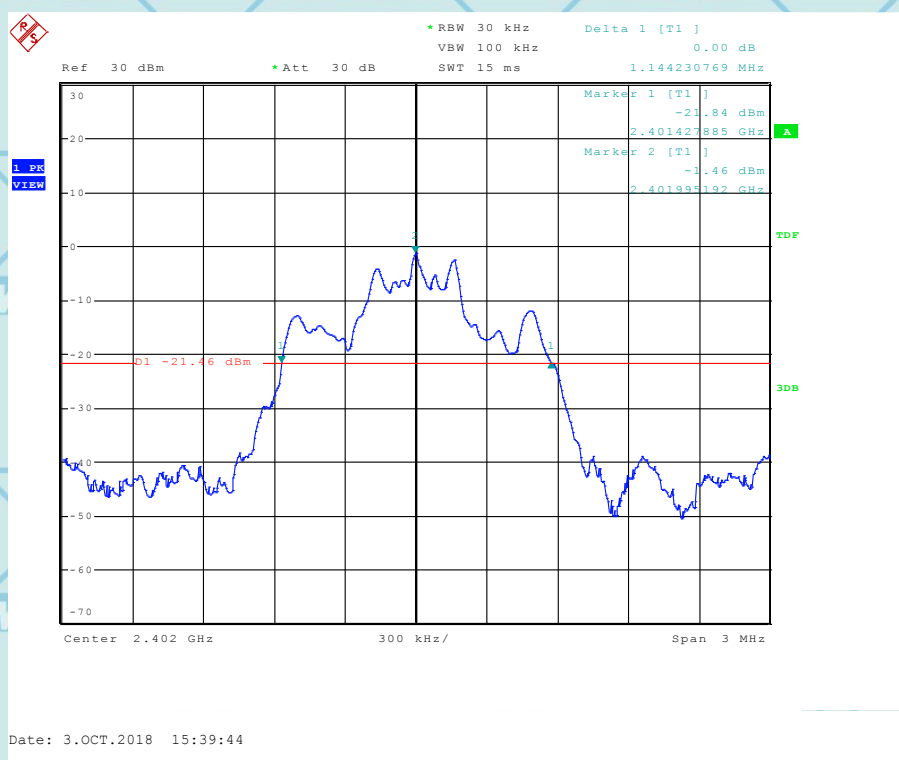





### CH39 -3Mbps

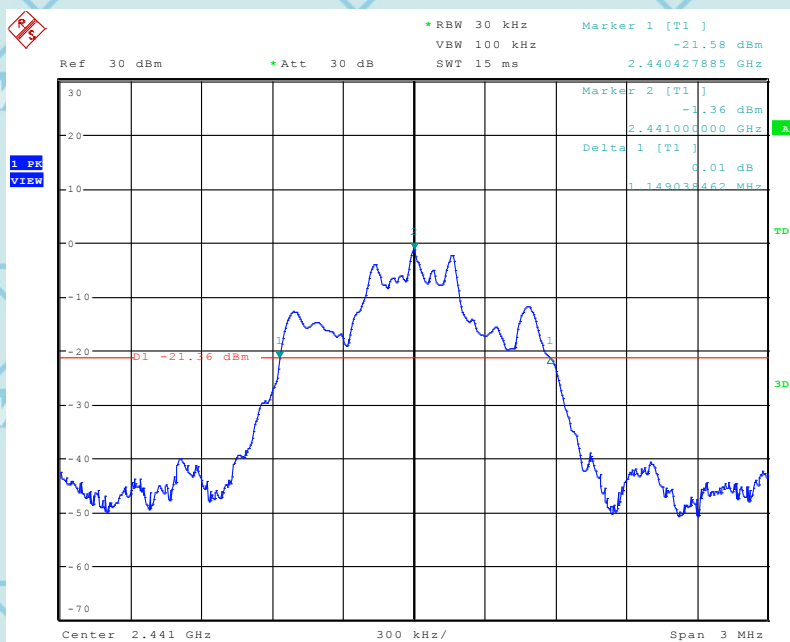


Date: 3.OCT.2018 15:41:14





### CH78 -3Mbps

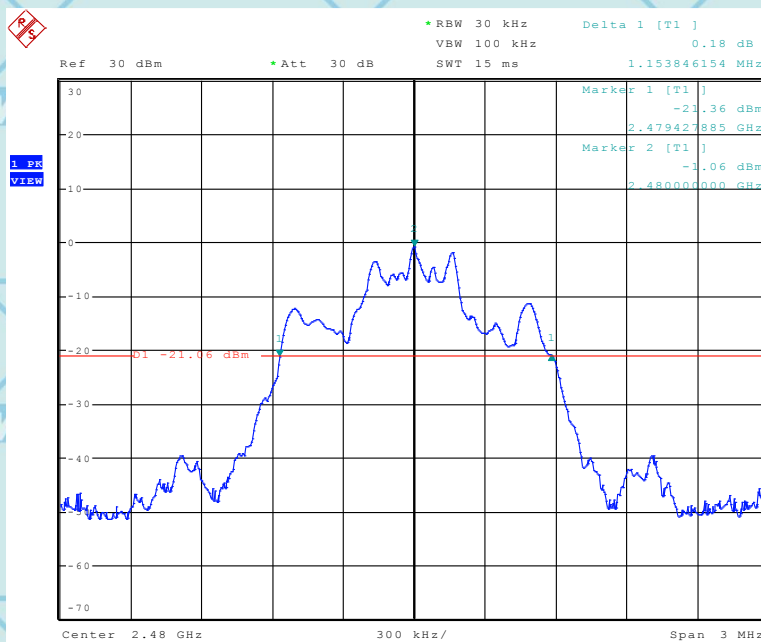

Date: 3.OCT.2018 15:43:04







## 8. PEAK OUTPUT POWER TEST

### 8.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |                   |                                    |                       |        |
|---------------------------------|-------------------|------------------------------------|-----------------------|--------|
| Section                         | Test Item         | Limit                              | Frequency Range (MHz) | Result |
| 15.247 (b)(i)                   | Peak Output Power | 1W for 1Mbps<br>0.125W for 2/3Mbps | 2400-2483.5           | PASS   |

### 8.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer antenna output port as show in the block diagram below,
- Setting : RBW  $\geq$  the 20 dB bandwidth of the emission being measured  
 Span  $\geq$  approximately 3 times the 20 dB bandwidth, centered on a hop ping channel  
 VBW  $\geq$  RBW  
 Sweep = auto  
 Detector function = peak  
 Trace = max hold

### 8.1.3 DEVIATION FROM STANDARD

No deviation.

### 8.1.4 TEST SETUP



### 8.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




## 8.2 TEST RESULTS

|             |          |                   |                                        |
|-------------|----------|-------------------|----------------------------------------|
| Pressure    | 1012 hPa | Test Mode         | CH00/ CH39 /CH78<br>(1M/2M/3Mbps Mode) |
| Temperature | 25°C     | Relative Humidity | 60%                                    |

| Test Channel | Frequency<br>(MHz) | Peak Output Power<br>(dBm) | LIMIT(dBm) | Result |
|--------------|--------------------|----------------------------|------------|--------|
| <b>1Mbps</b> |                    |                            |            |        |
| CH00         | 2402               | 1.03                       | 30         | Pass   |
| CH39         | 2441               | 1.29                       | 30         | Pass   |
| CH78         | 2480               | <b>1.94</b>                | 30         | Pass   |
| <b>2Mbps</b> |                    |                            |            |        |
| CH00         | 2402               | 0.34                       | 20.97      | Pass   |
| CH39         | 2441               | 0.51                       | 20.97      | Pass   |
| CH78         | 2480               | 0.99                       | 20.97      | Pass   |
| <b>3Mbps</b> |                    |                            |            |        |
| CH00         | 2402               | 0.36                       | 20.97      | Pass   |
| CH39         | 2441               | 0.51                       | 20.97      | Pass   |
| CH78         | 2480               | 1.01                       | 20.97      | Pass   |

1Mbps  
Channel: Low

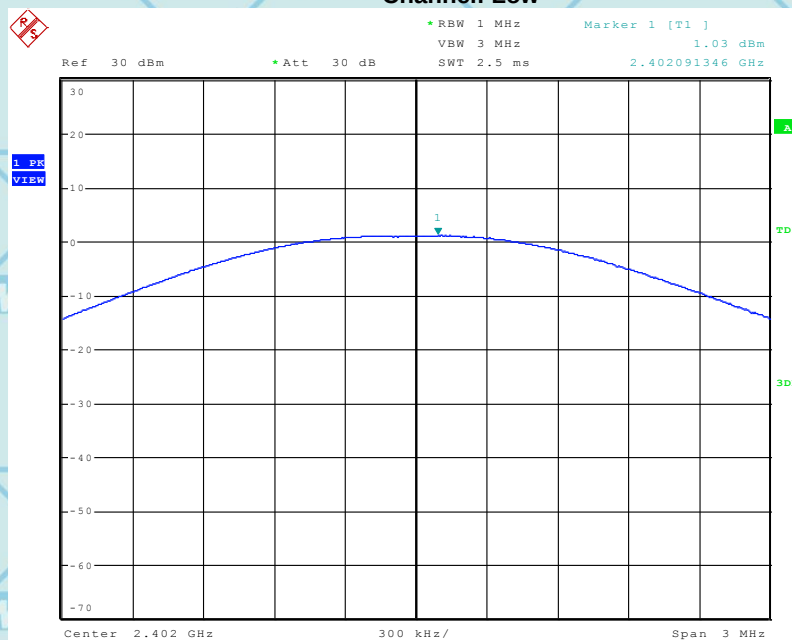

Date: 3.OCT.2018 15:44:18









For Question,  
Please Contact with WSCT  
www.wsct-cert.com

### Channel: Middle

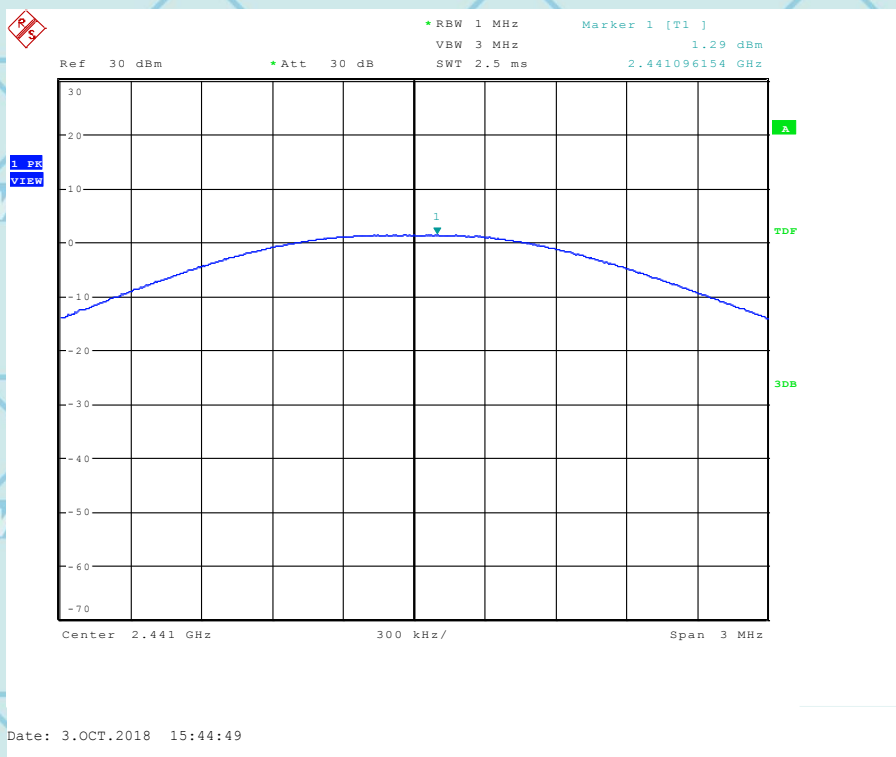


### Channel: High

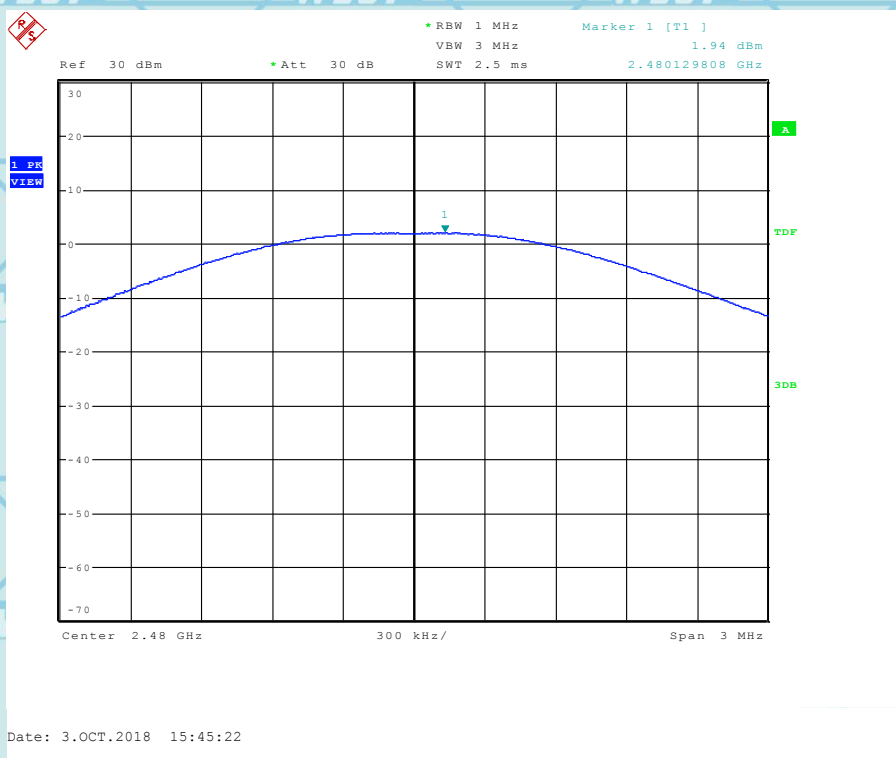




For Question,  
Please Contact with WSCT  
www.wsct-cert.com

**2Mbps  
Channel: Low**

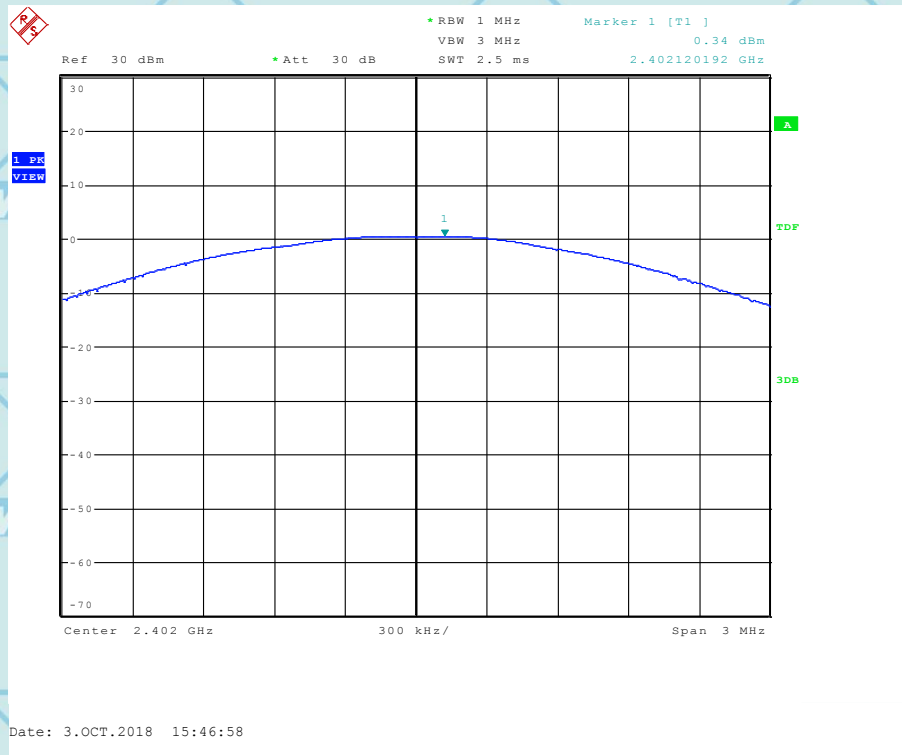

**Channel: Middle**

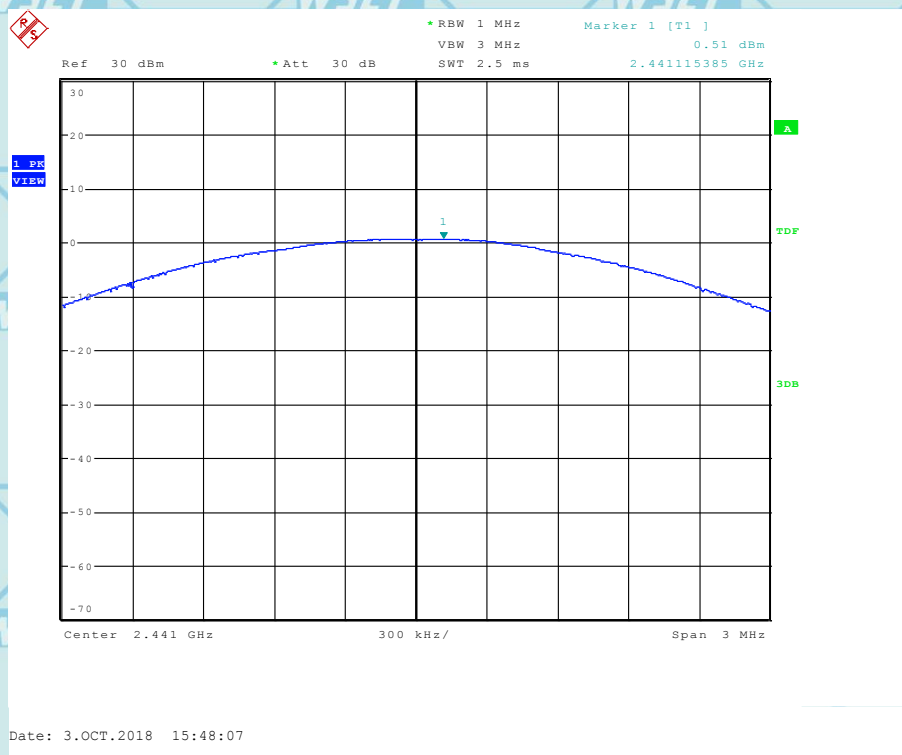







For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Channel: High

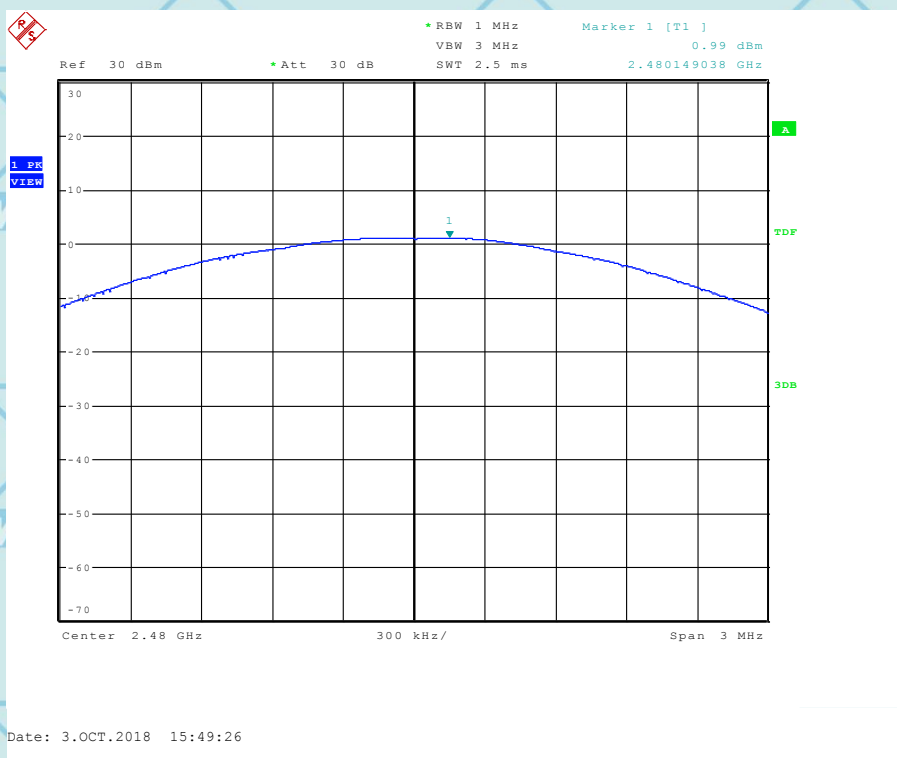


3Mbps  
Channel: Low

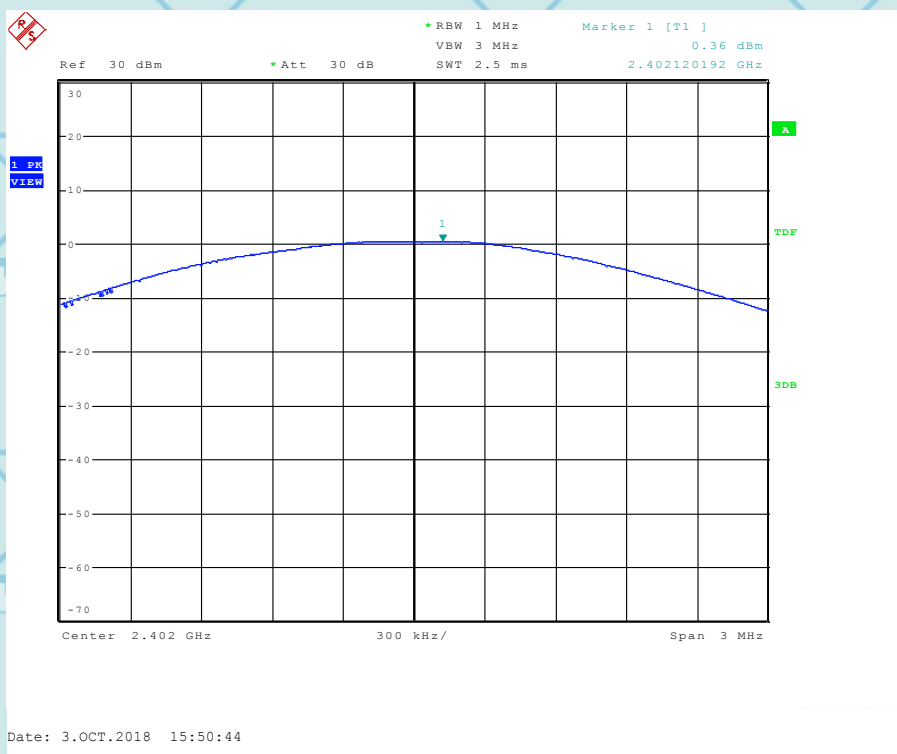




For Question,  
Please Contact with WSCT  
www.wsct-cert.com

**Channel: Middle**

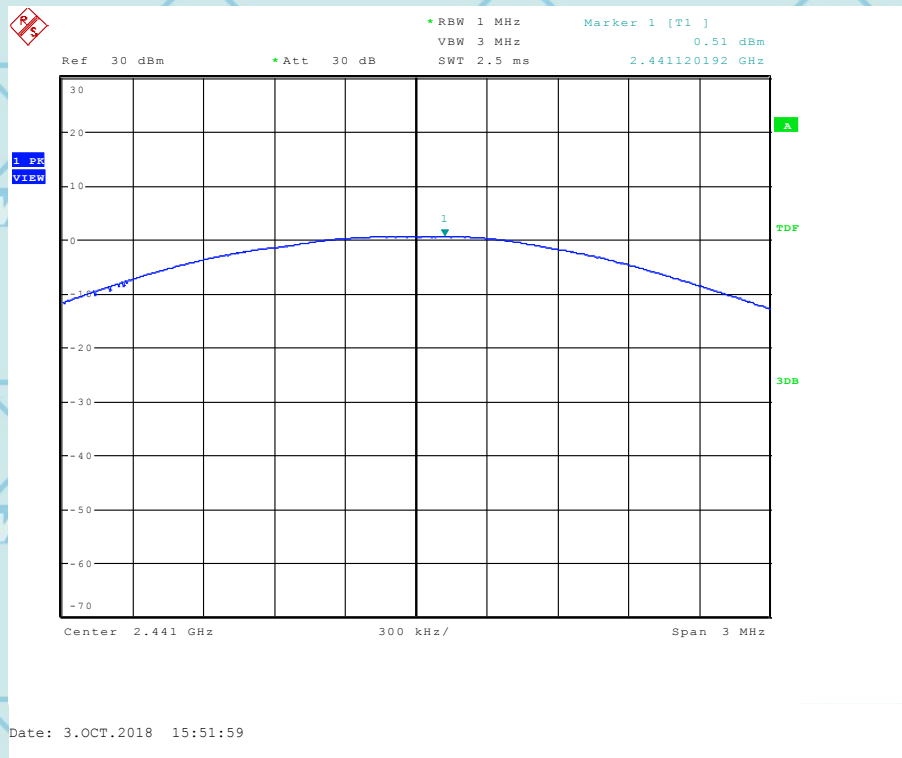

**Channel: High**

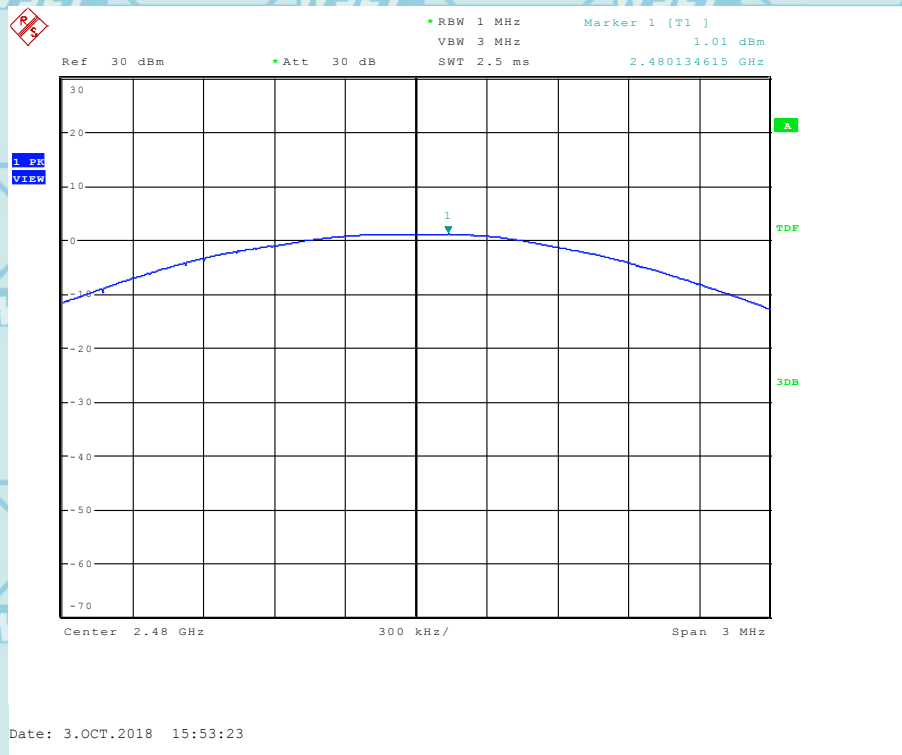






## 9. 100KHZ BAND EDGES MEASUREMENT

### 9.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |                        |                  |                       |        |
|---------------------------------|------------------------|------------------|-----------------------|--------|
| Section                         | Test Item              | Limit            | Frequency Range (MHz) | Result |
| 15.247(d)                       | Band Edges Measurement | (20dB bandwidth) | 2400-2483.5           | PASS   |

1Mbps  
Channel: Low

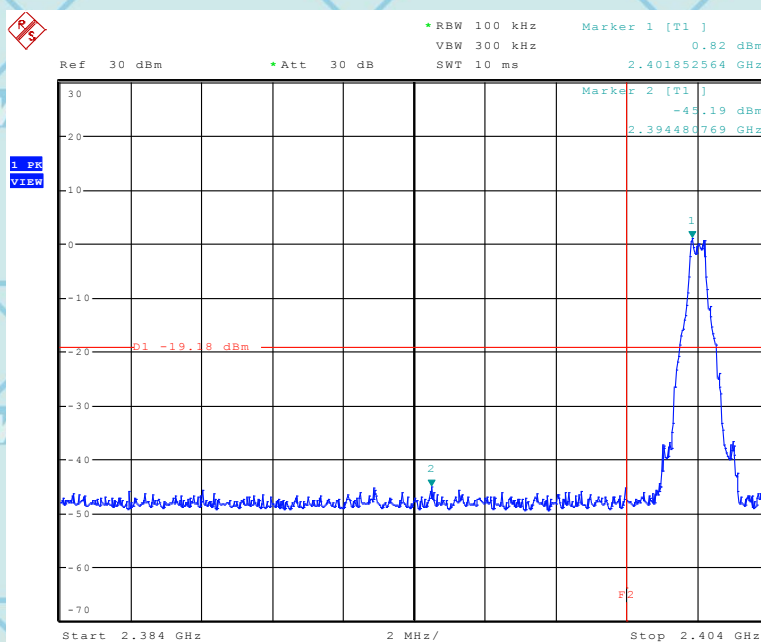


Date: 3.OCT.2018 17:03:20






For Question,  
Please Contact with WSCT  
www.wsct-cert.com

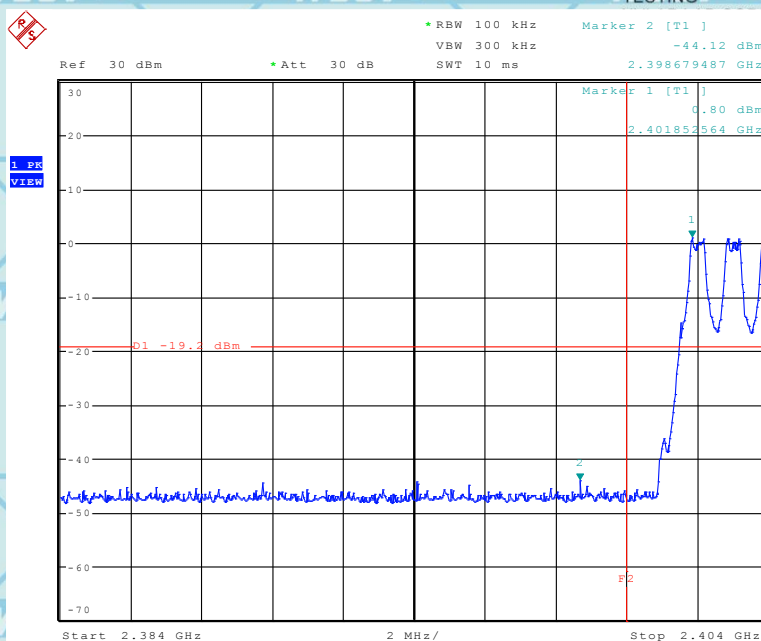

Date: 3.OCT.2018 17:04:57

Channel: High

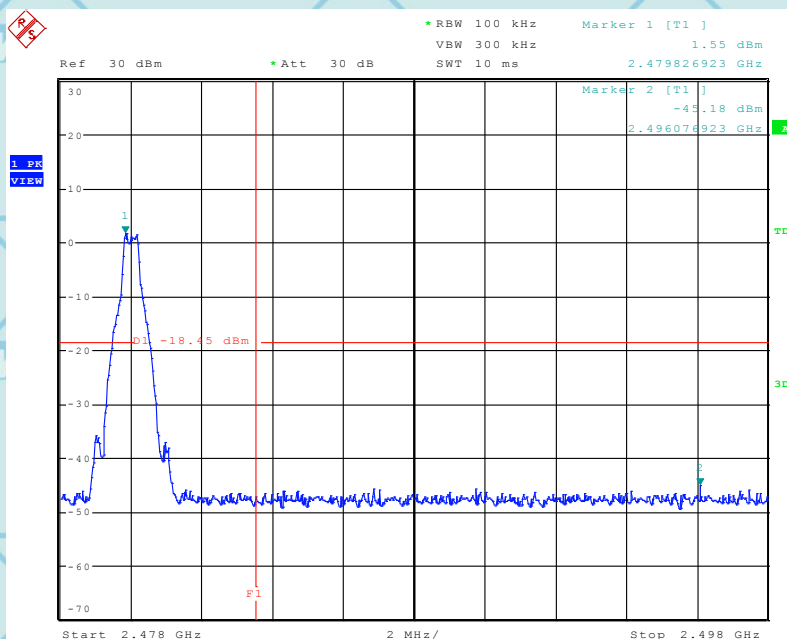

Date: 3.OCT.2018 17:06:01



世标检测认证股份  
World Standardization Certification & Testing Group Co., Ltd.


ADD: Building A-B Baoshi Science & technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China  
TEL: 86-755-26996143/26996144/26996145/26996192 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com

Member of the WSCT INC.






For Question,  
Please Contact with WSCT  
www.wsct-cert.com

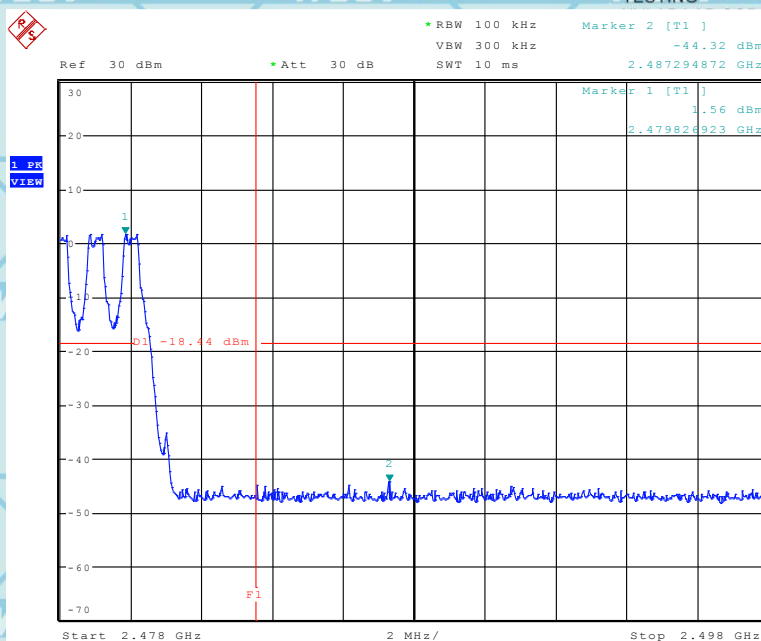

Date: 3.OCT.2018 17:07:39

### 2Mbps Channel: Low

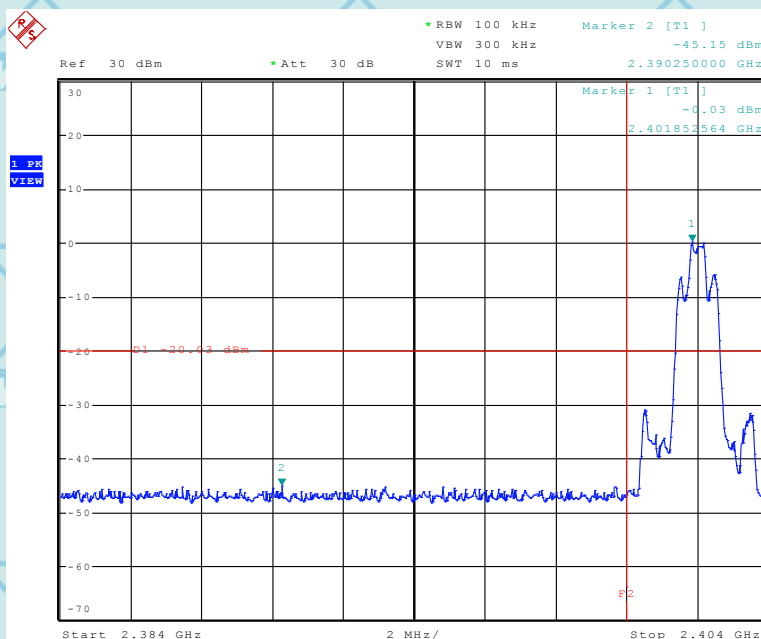

Date: 3.OCT.2018 17:09:32




世标检测认证股份  
World Standardization Certification & Testing Group Co., Ltd.

ADD: Building A-B Baoshi Science & technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China  
TEL: 86-755-26996143/26996144/26996145/26996192 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com

Member of the WSCT INC.




For Question,  
Please Contact with WSCT  
www.wsct-cert.com

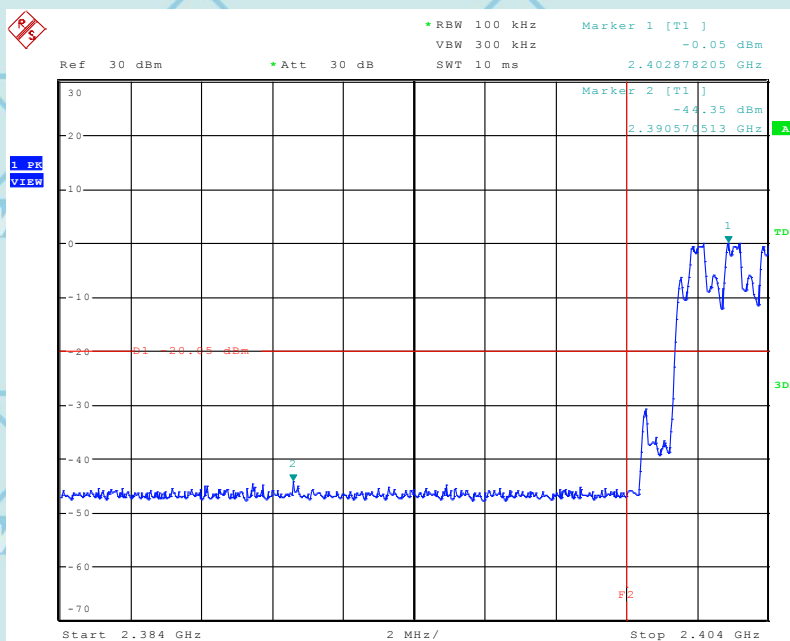

Date: 3.OCT.2018 17:11:38

Channel: High

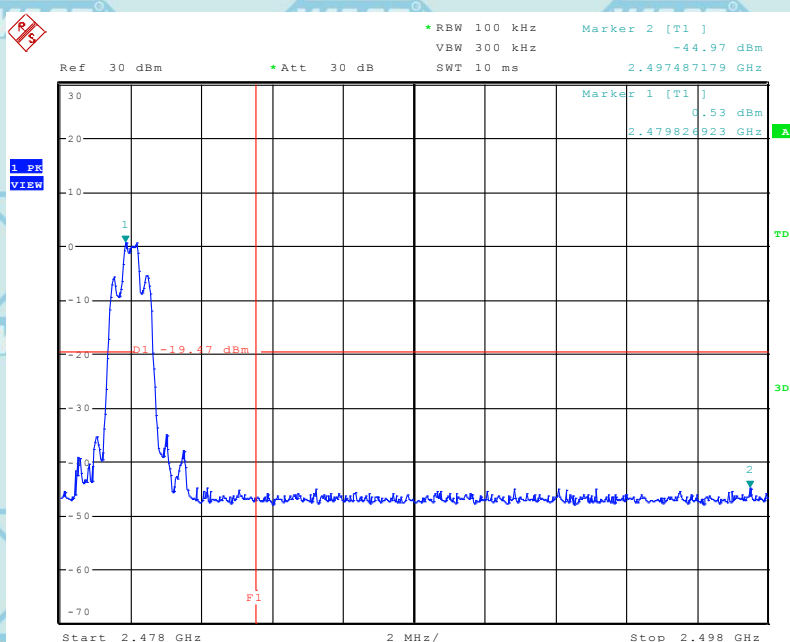

Date: 3.OCT.2018 17:13:27



世标检测认证股份  
World Standardization Certification & Testing Group Co., Ltd.


ADD: Building A-B Baoshi Science & technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China  
TEL: 86-755-26996143/26996144/26996145/26996192 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com

Member of the WSCT INC.






For Question,  
Please Contact with WSCT  
www.wsct-cert.com

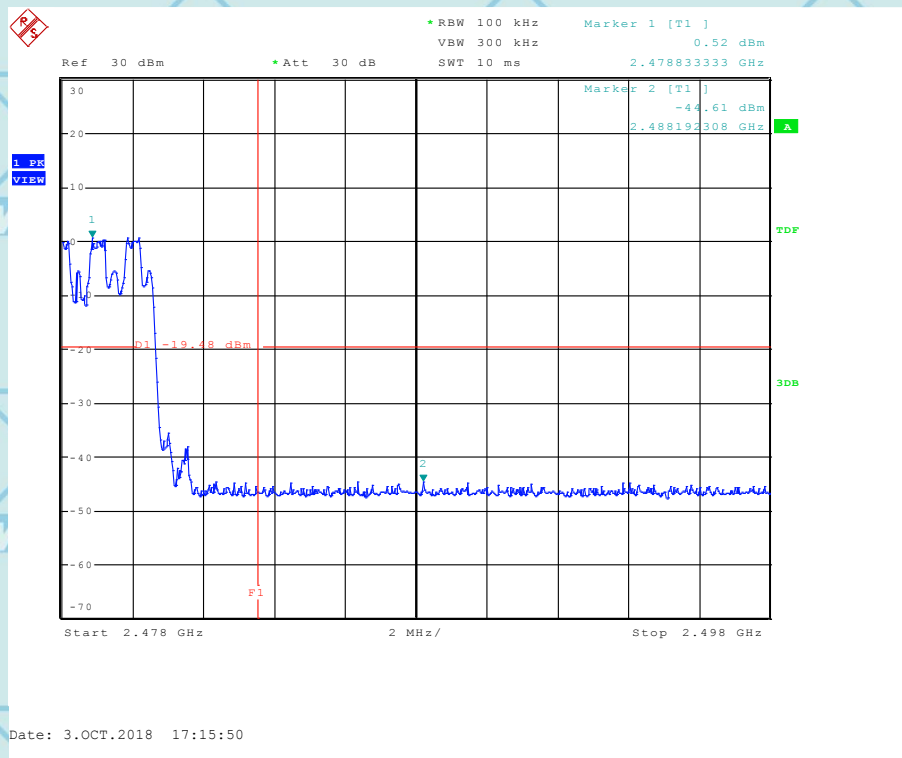


### 3Mbps Channel: Low

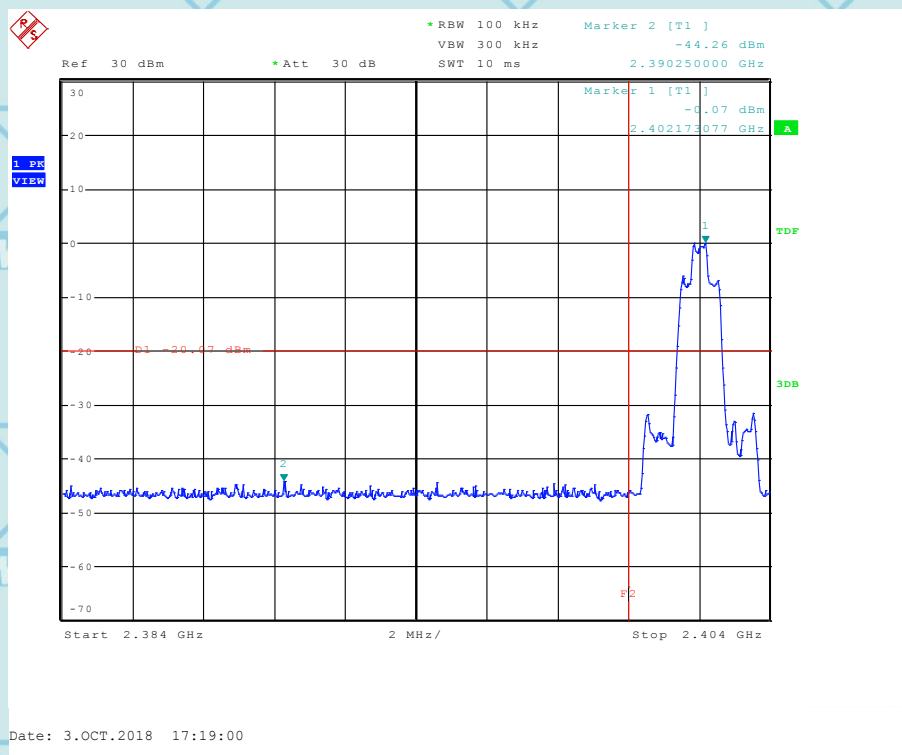




For Question,  
Please Contact with WSCT  
www.wsct-cert.com

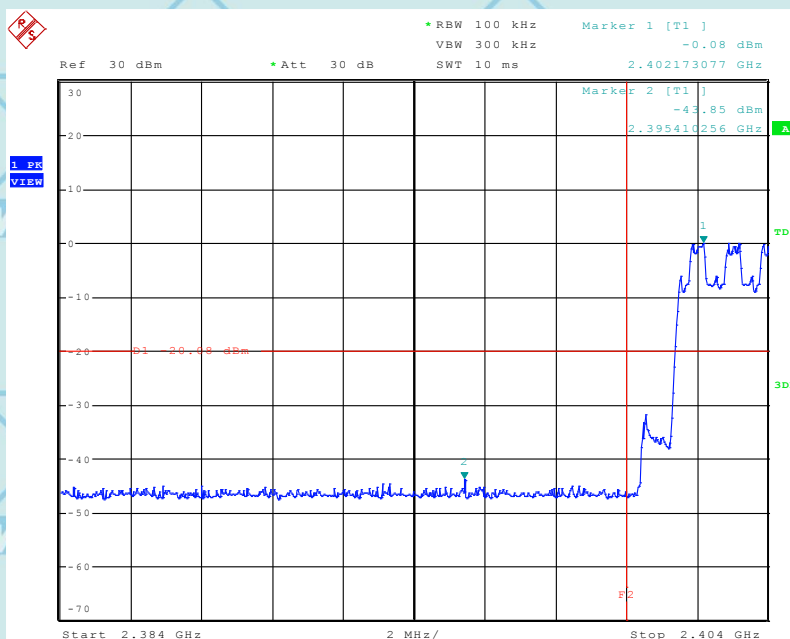

Date: 3.OCT.2018 17:21:35

Channel: High

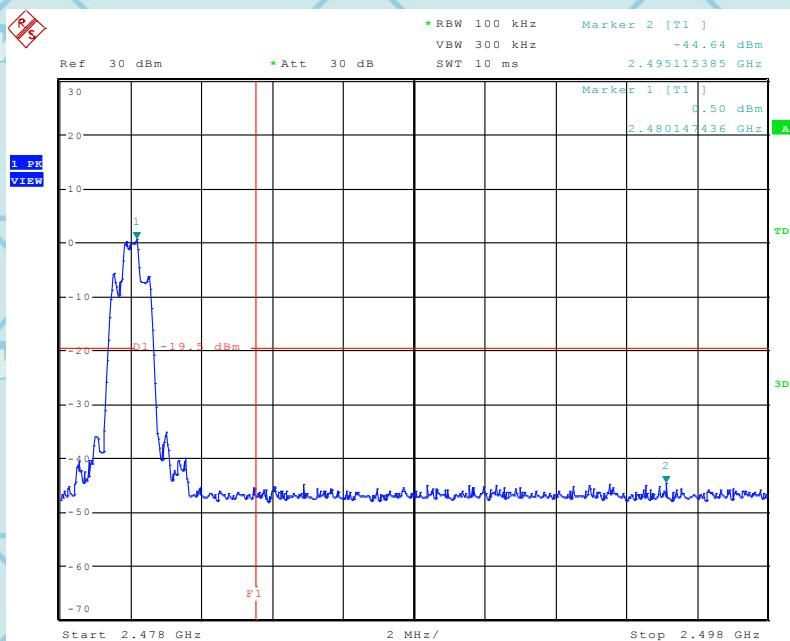

Date: 3.OCT.2018 17:23:27



世标检测认证股份  
World Standardization Certification & Testing Group Co., Ltd.


ADD: Building A-B Baoshi Science & technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China  
TEL: 86-755-26996143/26996144/26996145/26996192 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com

Member of the WSCT INC.






For Question,  
Please Contact with WSCT  
www.wsct-cert.com

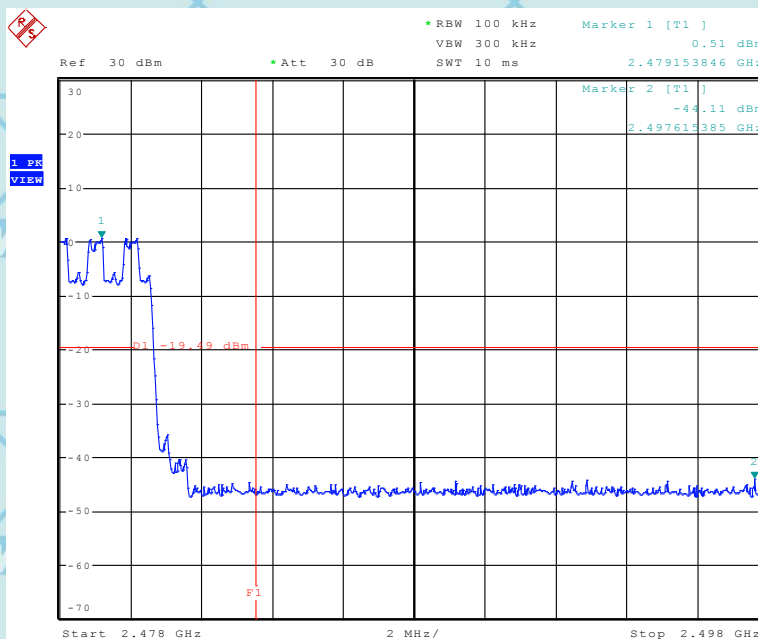

Date: 3.OCT.2018 17:26:51

1Mbps

Channel: Low

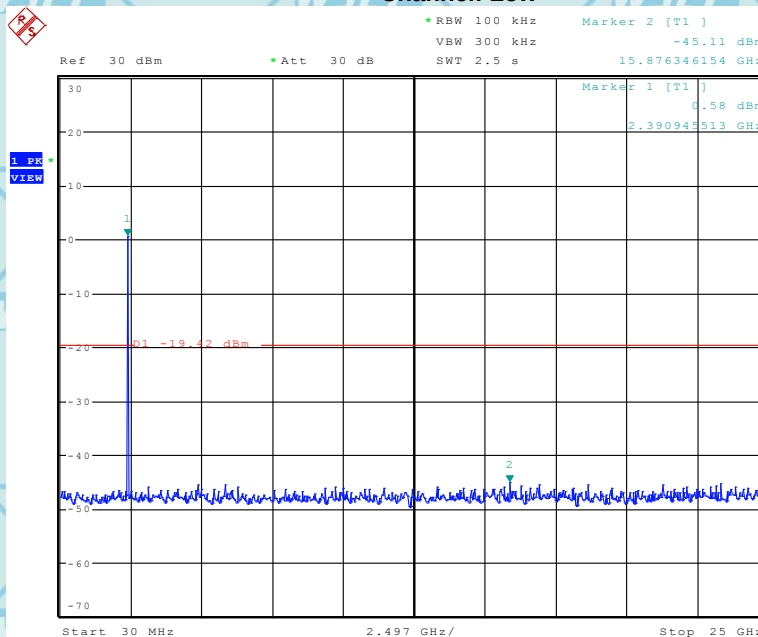

Date: 3.OCT.2018 17:28:07



世标检测认证股份

World Standardization Certification & Testing Group Co., Ltd.


ADD: Building A-B Baoshi Science & technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China  
TEL: 86-755-26996143/26996144/26996145/26996192 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com

Member of the WSCT INC.




For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Channel: Middle

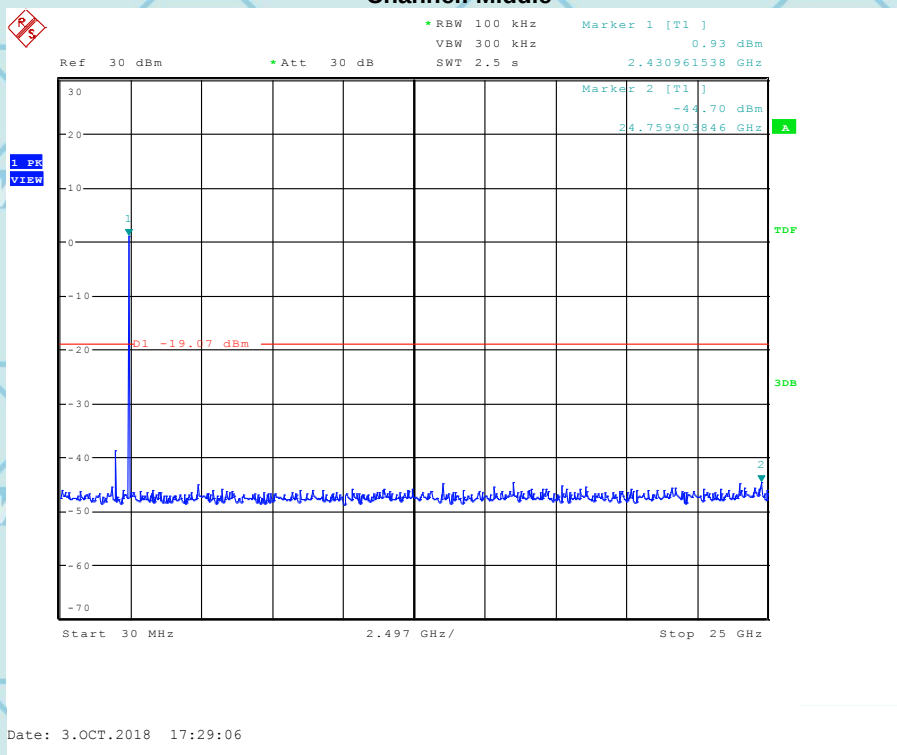

Channel: High

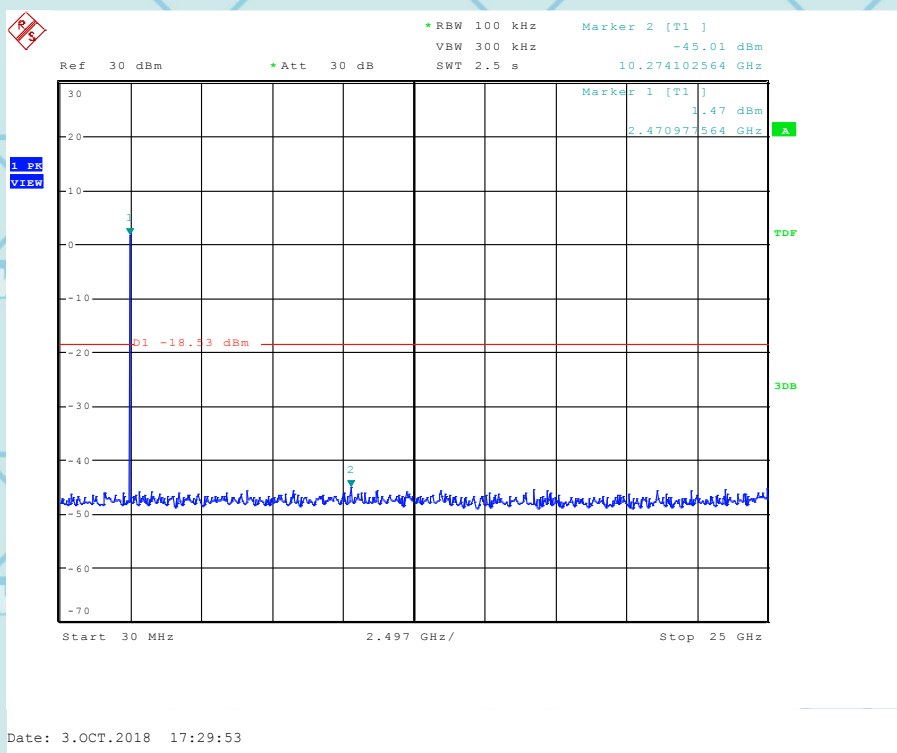







2Mbps

Channel: Low

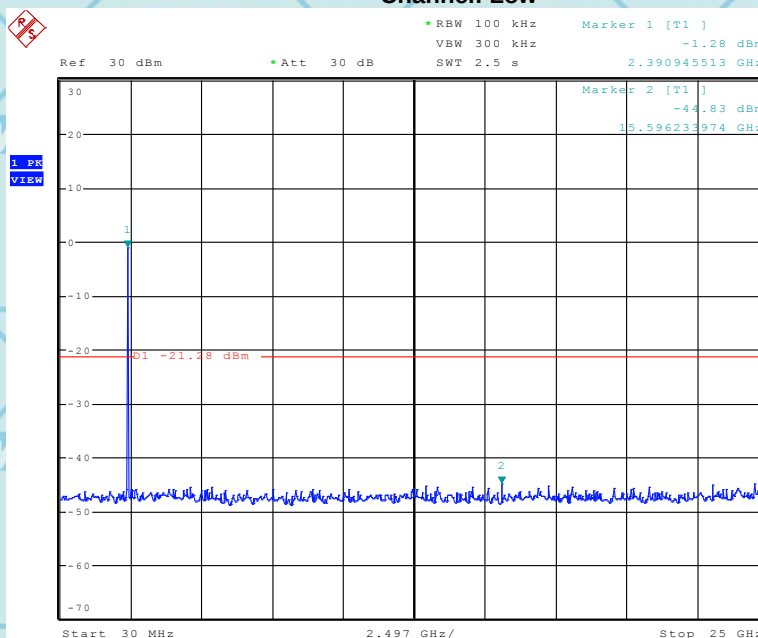

Date: 3.OCT.2018 17:30:51

Channel: Middle

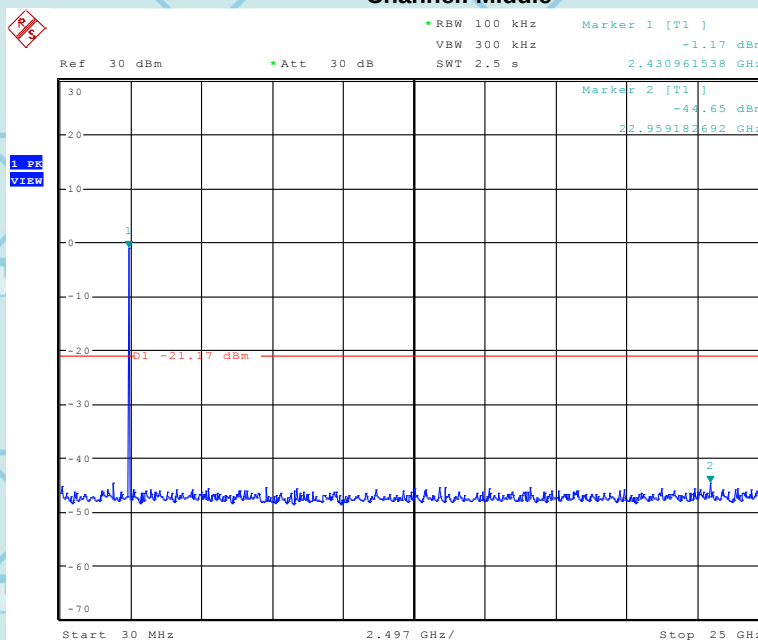


Date: 3.OCT.2018 17:31:44





For Question,  
Please Contact with WSCT  
www.wsct-cert.com


**Channel: High**

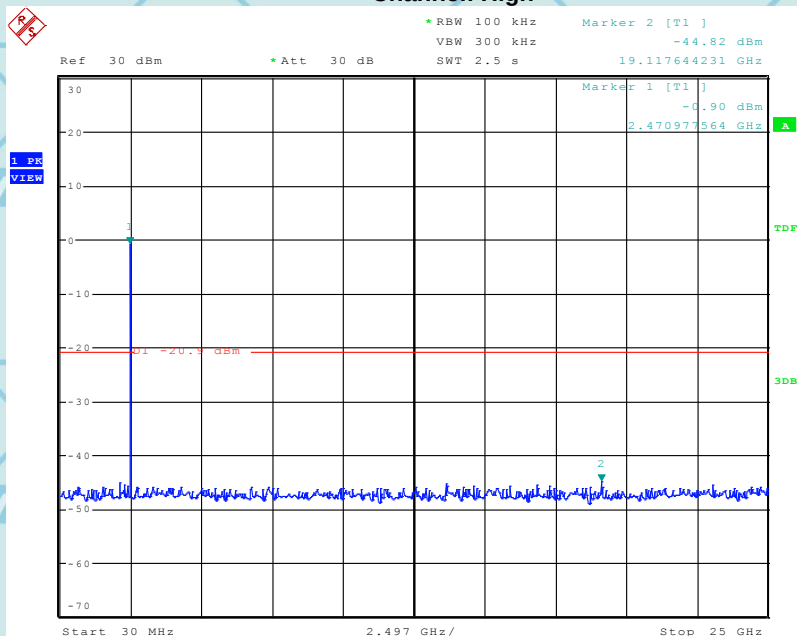

Date: 3.OCT.2018 17:32:29

**3Mbps**

**Channel: Low**

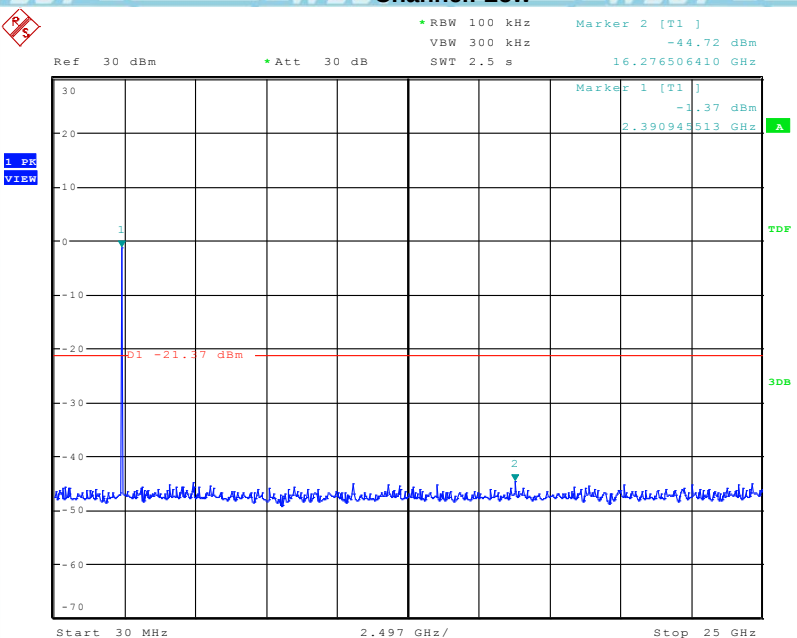

Date: 3.OCT.2018 17:33:33



世标检测认证股份  
World Standardization Certification & Testing Group Co., Ltd.

ADD: Building A-B Baoshi Science & technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China  
TEL: 86-755-26996143/26996144/26996145/26996192 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com


Member of the WSCT INC.






For Question,  
Please Contact with WSCT  
www.wsct-cert.com

### Channel: Middle

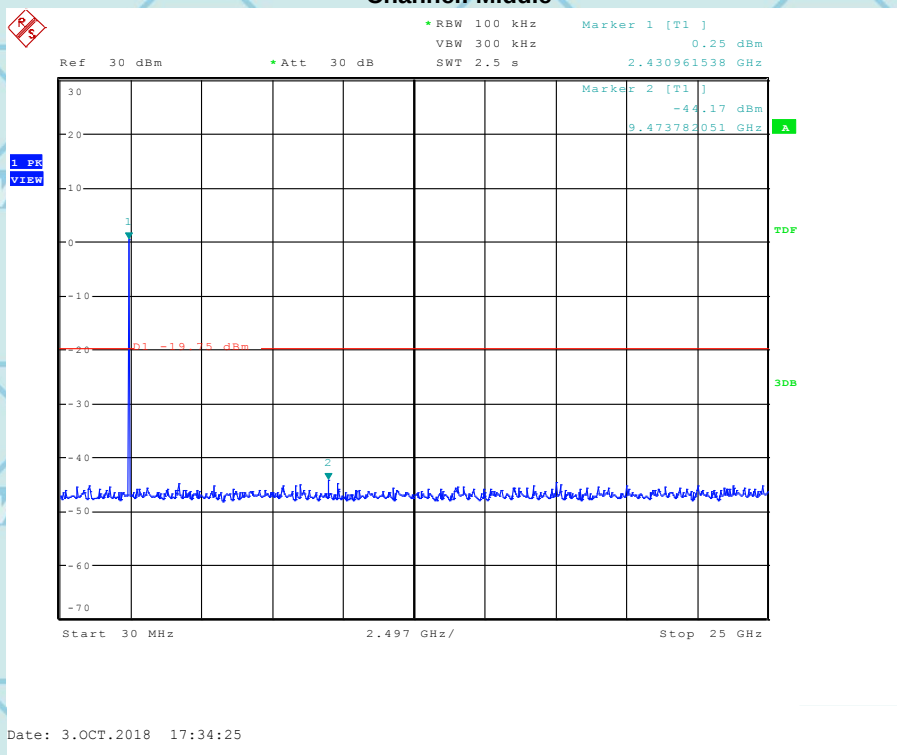

### Channel: High

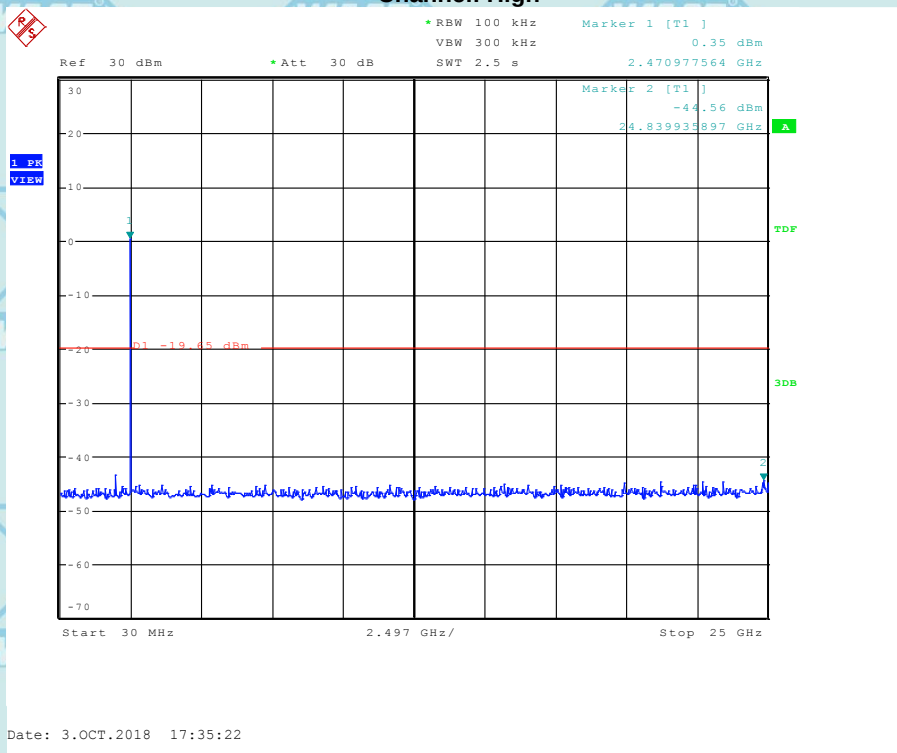

世标检测认证股份  
World Standardization Certification & Testing Group Co., Ltd.

ADD: Building A-B Baoshi Science & technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China  
TEL: 86-755-26996143/26996144/26996145/26996192 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com

Member of the WSCT INC.



## 10. ANTENNA APPLICATION

### 10.1 ANTENNA REQUIREMENT

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247

FCC part 15C section 15.247 requirements: Systems operating in the 2402-2480MHz band that are used exclusively for fixed.

#### 10.1.2 Result

The EUT's antenna integrated on PCB, The antenna's gain is 1.26dBi and meets the requirement.

---END OF REPORT---

