

Report No.: ZR/2020/2003101-01 Page: 1 of 33

	FCC TEST REPORT
Application No:	ZR/2020/20031
Applicant:	Fibocom Wireless Inc.
Address of Applicant	5/F,Tower A,Technology Building ${ m II}$ ,1057# Nanhai Blvd,Shenzhen,China
Manufacturer:	Fibocom Wireless Inc.
Address of Manufacturer:	5/F,Tower A,Technology Building $ { m II}$ ,1057# Nanhai Blvd,Shenzhen,China
Factory:	BYD Precision Manufacture Co.,Ltd
Address of Factory:	No. 3001, Baohe Road, Baolong Industrial City, Longgang street, Longgang District, Shenzhen
EUT Description:	LTE Module
Model No.:	SS808-NA
Trade Mark:	Fibocom
FCC ID:	ZMOSS808NA
Standards:	47 CFR Part 2
	47 CFR Part 22 subpart H
	47 CFR Part 24 subpart E
	47 CFR Part 27 subpart C
	47 CFR Part 90 subpart S
Test Method:	FCC KDB 971168 D01 Power Meas License Digital Systems V03r01
Data of Passint:	C63.26 (2015)
Date of Receipt:	2020/2/26
Date of Test:	2020/2/27 to 2020/3/25
Date of Issue:	2021/5/27
Test Result:	PASS *

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Derde yang

Derek Yang Wireless Laboratory Manager





Report No.: ZR/2020/2003101-01 Page: 2 of 33

# 1 Version

	Revision Record					
Version	Chapter	Date	Modifier	Remark		
00		2020/3/26		Original		
01		2021/5/27	Sherlock Fang	<ol> <li>Add test site Information</li> <li>Updated equipment list</li> </ol>		

Authorized for issue by:	
Prepared By	Sherlock Fanz
	(Sherlock Fang) / Engineer
Checked By	David Chen
	(David Chen) /Reviewer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to therms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this last report refer only to the sample(s) tested and such sample(s) are relatined for 30 days only. Attention: To check the authenticity of testing imspection report a certificate, please contact us at telephone: (86-755) 83071443.



Report No.: ZR/2020/2003101-01 Page: 3 of 33

Content

1	VERSION	2
2	TEST SUMMARY	4
_	2.1       UMTS BAND 5 & LTE BAND 5 / 26         2.2       UMTS BAND 2 /LTE BAND 2 /25         2.3       UMTS BAND 4 /LTE BAND 4 /66         2.4       LTE BAND 7/41         2.5       LTE BAND 12/17         2.6       LTE BAND 13         2.7       LTE BAND 26	4 5 5 6 7
3	GENERAL INFORMATION	9
	<ul> <li>3.1 CLIENT INFORMATION</li></ul>	9 10 11 12 12
4	DESCRIPTION OF TESTS	21
5	<ul> <li>4.1 CONDUCTED OUTPUT POWER</li></ul>	21 22 22 23 24 25 26 26 26 27 27 28
6	MEASUREMENT UNCERTAINTY	
7	APPENDIXES	33



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to therms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this last report refer only to the sample(s) tested and such sample(s) are relatined for 30 days only. Attention: To check the authenticity of testing imspection report a certificate, please contact us at telephone: (86-755) 83071443, or email: (AL-Doccheck@egs.com)

> Report No.: ZR/2020/2003101-01 Page: 4 of 33

# 2 Test Summary

S

## 2.1 UMTS Band 5 & LTE Band 5 / 26 (824-849 MHZ)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913	FCC: ERP ≤ 7 W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B	Pass	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	А
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	А
Band Edges Compliance	§2.1051, §22.917	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §22.917	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	А
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §22.355	≤ ±2.5ppm.	Section 8 of Appendix B	Pass	А
Remark: For the verd	lict, the "N/A" denot	es "not applicable", the "N/T" denotes "not tes	sted".		

## 2.2 UMTS Band 2 /LTE Band 2 /25

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232	EIRP ≤ 2 W	Section 1 of Appendix B	Pass	А
Peak-Average Ratio	§2.1046, §24.232	Limit≤13 dB	Section 2 of Appendix B	Pass	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	А
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	А
Band Edges Compliance	§2.1051, §24.238	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	А
Spurious Emission at Antenna Terminals	§2.1051, §24.238	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	А
Field Strength of Spurious Radiation	§2.1053, §24.238	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass	В



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation on liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and sub sample(s) are retained for 30 days only. Attention is sted and such sample(s) are retained for 30 days only.



Report No.: ZR/2020/2003101-01 Page: 5 of 33

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Frequency Stability	§2.1055, §24.235	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass	А
Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".					

## 2.3 UMTS Band 4 /LTE Band 4 /66

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)	EIRP ≤ 1 W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§2.1046, §27.50(d)	Limit≤13 dB	Section 2 of Appendix B	Pass	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	А
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	А
Band Edges Compliance	§2.1051, §27.53(h)	<ul> <li>≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.</li> </ul>	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	<ul> <li>≤ -13 dBm/1 MHz, from 9 kHz to 10<sup>th</sup> harmonics but outside authorized operating frequency ranges.</li> </ul>	Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §27.54	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass	А
Remark: For the verd	lict, the "N/A" denote	es "not applicable", the "N/T" denotes "not	tested".		

# 2.4 LTE Band 7/41

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)	EIRP ≤ 2W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§27.50(a)	≤13 dB	Section 2 of Appendix B	Pass	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	А
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	А
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies	Section 5 of Appendix B	Pass	A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document to refer only to the sample(s) tested and such sample(s) are relained for 30 days only. Attention: To check the authenticity of testing inspection report a certificate, please contact us at telephone: (86-755) 83071443. or email: CAL Doccheck@csg.com



Report No.: ZR/2020/2003101-01 Page: 6 of 33

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
		between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.			
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge -25dBm/ 1 MHz 9 kHz 9 kHz X=Max {6MHz, EBW}	Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge -25dBm/ 1 MHz 9 kHz \$5 MHz XMHz 10 <sup>th</sup> harmonics X=Max {6MHz, EBW}	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B	Pass	A
	§27.54		Appendix B	Pass	A

## 2.5 LTE Band 12

Test Item	FCC Rule No	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§27.50(c)	FCC: ERP ≤ 3 W.	Section 1 of Appendix B	Pass	А
Peak-Average Ratio	§2.1046, §27.50(c)	Limit≤13 dB	Section 2 of Appendix B	Pass	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	А
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	А
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	А
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	А
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass	В



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to therms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx and, for electronic format document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this last report refer only to the sample(s) tested and such sample(s) are relatined for 30 days only. Attention: To check the authenticity of testing imspection report a certificate, please contact us at telephone: (86-755) 83071443.

of email: CM Doccheck@segs.com No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 tt (86-755) 26012053 ft (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・科技图中区M-10栋一号厂房 邮编: 518057 tt (86-755) 26012053 ft (86-755) 26710594 sgs.china@sgs.com

> Report No.: ZR/2020/2003101-01 Page: 7 of 33

Test Item	FCC Rule No	Requirements	Test Result	Verdict	Test Lab*
Frequency Stability	§2.1055, §27.54	≤ ±2.5ppm.	Section 8 of Appendix B	Pass	А
Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".					

## 2.6 LTE Band 13

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(b)	FCC: ERP ≤ 3 W.	Section 1 of Appendix B	Pass	А
Peak-Average Ratio	§27.50	Limit≤13 dB	Section 2 of Appendix B	N/T	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	А
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	А
Band Edges Compliance	§2.1051, §27.53(c)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §27.53(c) §27.53(f)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges. On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(c) §27.53(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B	Pass	А
Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extend of the 103 days only. Attention: To check the suthenticity of testing imspection report a certificate, please contact us at telephone: (86-755) 83071443, or sonal (04) Descheckfieus comp

Report No.: ZR/2020/2003101-01 Page: 8 of 33

# 2.7 LTE Band 26(814-824MHZ)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Transmitter Conducted Power Output	§2.1046, §90.635	< 100 W.	Section 1 of Appendix B	PASS	А
Peak-Average Ratio		FCC: Limit≤13 dB	Section 2 of Appendix B	N/T	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	PASS	А
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	PASS	А
Emission Mask	§2.1051 § 90.691	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log10(f/6.1) decibels or 50+10Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.	Section 5 of Appendix B	PASS	A
Spurious Emission at Antenna Terminals	§2.1051, §90.691	< 43 + 10Log10(P[Watts]) for all out- of-band emissions	Section 6 of Appendix B	PASS	A
Field Strength of Spurious Radiation	§2.1053, §90.691	< 43 + 10Log10(P[Watts]) for all out- of-band emissions	Section 7 of Appendix B	PASS	А
Frequency Stability	§2.1055, §90.213	< ±2.5ppm.	Section 8 of Appendix B	PASS	А
Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".					

Remark:

All test were performed by Lab A and B.

Parts of test items above were subcontracted to Lab B.

Lab A SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Lab B SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of ilability, indemnification and juriadiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing linepection report a certificate, please contact us at telephone: (86-755) 8307 1443, or smail: CN-Dochack@sgs.com



Report No.: ZR/2020/2003101-01 Page: 9 of 33

# 3 General Information

## 3.1 Client Information

Applicant:	Fibocom Wireless Inc.
Address of Applicant:	5/F,Tower A,Technology Building ${ m II}$ ,1057# NanhaiBlvd,Shenzhen,China
Manufacturer:	Fibocom Wireless Inc.
Address of Manufacturer:	5/F,Tower A,Technology Building ${\rm II}$ ,1057# NanhaiBlvd,Shenzhen,China
Factory:	BYD Precision Manufacture Co.,Ltd
Address of Factory:	No. 3001, Baohe Road, Baolong Industrial City, Longgang street, Longgang District, Shenzhen

# 3.2 Test Location

### Lab A:

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057
Test engineer:	Adam Liang,Mike Hu

#### Lab B:

Company:	SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD.
Address:	1/F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, Xi'an, Shaanxi China
Post code:	710086
Test engineer:	Ben Huang, Leah Chen



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-enDocument.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this last report refer only to the sample(s) tested and such sample(s) are relatined for 30 days only. Attention. To check the authenticity of testing (inspection report a certificate, please contact us at telephone: (86-755) 83071443.



Report No.: ZR/2020/2003101-01 Page: 10 of 33

## 3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Lab A:

### • A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

### • VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

### • FCC – Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

### Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

Lab B:

### • A2LA (Certificate No. 4854.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4854.01.

• FCC –Designation Number: CN1271.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and sub aspmele(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contactus at telephone: (86-755) 83071443, or email: CN.Doccheck@sgs.com



Report No.: ZR/2020/2003101-01 Page: 11 of 33

# 3.4 General Description of EUT

EUT Description:	LTE Module
Model No.:	SS808-NA
Trade Mark:	Fibocom
Hardware Version:	V1.0.1
Software Version:	SS808_NA_00_00-20200102-1
Sample Type:	☐ Portable Device, ⊠Module
Antenna Type:	External, 🗌 Integrated
	WCDMA Band II: 5.0dBi
	WCDMA Band IV: 4.6dBi
	WCDMA Band V: 2.9dBi
	LTE Band 2: 5.0dBi;
	LTE Band 4: 4.6dBi;
	LTE Band 5: 2.9dBi;
Antenna Gain:	LTE Band 7: 4.07dBi;
	LTE Band 12: 2.6dBi;
	LTE Band 13: 2.6dBi;
	LTE Band 25: 5.0dBi;
	LTE Band 26: 2.9dBi;
	LTE Band 41: 4.07dBi;
	LTE Band 66:4.6dBi;

## 3.5 Test Mode

Test Mode	Test Modes Description
UMTS/TM1	UMTS system, WCDMA, QPSK modulation
UMTS/TM2	UMTS system, WCDMA, 16QAM modulation
LTE/TM1	LTE system, QPSK modulation
LTE/TM2	LTE system, 16QAM modulation

Remark: The test mode(s) are selected according to relevant radio technology specifications.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T



Report No.: ZR/2020/2003101-01 Page: 12 of 33

## 3.6 Test Environment

Environment Parameter	Selected V	/alues During Tests
Relative Humidity		52%
Atmospheric Pressure:	1	01.32 KPa
Temperature	NT	25 °C
	LV	3.5V
Voltage:	NV	3.8V
	HV	4.2V

Remark: LV= lower extreme test voltage; NV= nominal voltage

HV= upper extreme test voltage; NT= normal temperature

## 3.7 Technical Specification

Characteristics	Description				
Padia System Type	] UMTS				
Radio System Type	🖾 LTE				
	Band	ТХ	RX		
	UMTS Band II	1850 to 1910 MHz	1930 to 1990 MHz		
	UMTS Band IV	1710 to 1755 MHz	2110 to 2155 MHz		
	UMTS Band V	824 to 849 MHz	869 to 894 MHz		
	LTE Band 2	1850 to 1910 MHz	1930 to 1990 MHz		
	LTE Band 4	1710 to 1755 MHz	2110 to 2155 MHz		
0	LTE Band 5	824 to 849 MHz	869 to 894 MHz		
Supported Frequency Range	LTE Band 7	2500 to 2570 MHz	2620 to 2690 MHz		
	LTE Band 12	699 to 716 MHz	729 to 746 MHz		
	LTE Band 13	777 to 787 MHz	746 to 756 MHz		
	LTE Band 25	1850 to 1915MHz	1930 to 1995 MHz		
	LTE Band 26 (814 to 824 MHz )	814 to 824MHz	859 to 869 MHz		
	LTE Band 26 (824 to 849 MHz )	824 to 849 MHz	869 to 894 MHz		
	LTE Band 41	2496 to 2690MHz	2496 to 2690MHz		
	LTE Band 66	1710 to 1780 MHz	2110 to 2200 MHz		
Target TX Output Power	UMTS Band II: 24.5dBm UMTS Band IV: 24.5dBm UMTS Band V: 24.5dBm LTE Band 2: 24.0dBm LTE Band 4: 24.0dBm LTE Band 5: 24.0dBm LTE Band 7: 24.0dBm				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T



Report No.: ZR/2020/2003101-01 Page: 13 of 33

	LTE Band 12: 24.0dBm	
	LTE Band 13: 24.0dBm	
	LTE Band 25: 24.0dBm	
	LTE Band 26: 24.0dBm	
	LTE Band 41: 24.0dBm	
	LTE Band 66: 24.0dBm	
	UMTS system:	⊠5 MHz
	LTE Band 2	⊠1.4 MHz;⊠3 MHz; ⊠5 MHz; ⊠10 MHz; ⊠15 MHz, ⊠20 MHz
	LTE Band 4	☐ 1.4 MHz; 3 MHz; 5 MHz; 10 MHz; 15 MHz, 20 MHz
	LTE Band 5	$\boxtimes$ 1.4 MHz; $\boxtimes$ 3 MHz; $\boxtimes$ 5 MHz; $\boxtimes$ 10 MHz
	LTE Band 7	$\boxtimes$ 5 MHz; $\boxtimes$ 10 MHz; $\boxtimes$ 15 MHz, $\boxtimes$ 20 MHz
	LTE Band 12	$\boxtimes$ 1.4 MHz; $\boxtimes$ 3 MHz; $\boxtimes$ 5 MHz; $\boxtimes$ 10 MHz
Supported Channel	LTE Band 13	$\boxtimes$ 5 MHz; $\boxtimes$ 10 MHz
Bandwidth	LTE Band 25	$\square$ 1.4 MHz; $\square$ 3 MHz; $\square$ 5 MHz; $\square$ 10 MHz; $\square$ 15 MHz, $\square$ 20 MHz
	LTE David 26(014,024)	$\square$ 13 MHz; $\square$ 3 MHz; $\square$ 5 MHz; $\square$ 10 MHz;
	LTE Band 26(814-824)	
	LTE Band 26(824-849)	⊠1.4 MHz;⊠3 MHz; ⊠5 MHz; ⊠10 MHz;
	LTE Dand 20(024-049)	⊠15 MHz
	LTE Band41	⊠5 MHz; ⊠10 MHz; ⊠15 MHz, ⊠20 MHz
		X 1.4 MHz; X 3 MHz; X 5 MHz; X 10 MHz;
	LTE Band66	$\boxtimes$ 15 MHz, $\boxtimes$ 20 MHz
Characteristics	Description	
Characteristics	Description	
	UMTS Band II	4M12F9W;
	UMTS Band IV	4M12F9W;
	UMTS Band V	4M13F9W;
		1M09G7D;1M09W7D;
		2M70G7D;2M69W7D;
	LTE Band 2	4M47G7D;4M49W7D;
		8M93G7D;8M93W7D;
		13M4G7D;13M4W7D;
Designation of		17M9G7D;17M9W7D;
Emissions		1M09G7D;1M09W7D;
		2M70G7D;2M69W7D;
(Remark: the necessary	LTE Band 4	4M47G7D;4M49W7D;
bandwidth of which is		8M93G7D;8M93W7D;
the worst value from		13M4G7D;13M4W7D;
the measured occupied		
bandwidths for each		17M9G7D;17M9W7D;
		1M09G7D;1M09W7D;
type of channel	LTE Band 5	2M70G7D;2M69W7D;
bandwidth		4M48G7D;4M50W7D;
configuration.)		8M93G7D;8M93W7D;
		4M48G7D;4M49W7D;
	LTE Band 7	8M93G7D;8M93W7D;
		13M4G7D;13M4W7D;
		17M9G7D;17M9W7D;
		1M09G7D;1M10W7D;
	LTE Band 12	2M70G7D;2M69W7D;
	LTE Band 12	4M48G7D;4M49W7D;
		8M95G7D;8M95W7D;



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents,
subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is
advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of
Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a
transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced
except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or
appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the
results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,
or email: CN.Doccheck@sqs.com
11 AW 11 - W 10 W18 0 E - 0

 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057
 t (86-755) 26012053 f (86-755) 26710594
 www.sgsgroup.com.cn

 中国 · 深圳 · 科技园中区M-10栋一号厂房
 邮编: 518057
 t (86-755) 26012053 f (86-755) 26710594
 sgs.china@sgs.com



> Report No.: ZR/2020/2003101-01 Page: 14 of 33

LTE Band13 4M48G7D;4M49W7D;	
8M89G7D;8M89W7D;	
1M09G7D;1M09W7D;	
2M70G7D;2M69W7D;	
4M48G7D;4M48W7D;	
LTE Band 25 8M93G7D;8M91W7D;	
13M4G7D;13M4W7D;	
17M9G7D;17M9W7D;	
1M09G7D;1M09W7D;	
LTE Band 26 (814 824) 2M70G7D;2M69W7D;	
LTE Band 26 (814-824) 4M47G7D;4M49W7D;	
8M91G7D;8M93W7D;	
1M10G7D;1M10W7D;	
2M70G7D;2M70W7D;	
LTE Band 26 (824-849) 4M48G7D;4M48W7D;	
8M95G7D;8M97W7D;	
13M5G7D;13M5W7D;	
4M48G7D;4M49W7D;	
LTE Band 41 8M91G7D;8M91W7D;	
13M5G7D;13M4W7D;	
17M9G7D;17M9W7D;	
1M09G7D;1M09W7D;	
2M70G7D;2M69W7D;	
LTE Band 66 4M47G7D;4M49W7D;	
8M93G7D;8M93W7D;	
13M4G7D;13M4W7D;	
17M9G7D;17M8W7D;	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T



Report No.: ZR/2020/2003101-01 Page: 15 of 33

# 3.8 Test Frequencies

Test Mode	TX / RX	RF Channel				
Test Mode		Low (L)	Middle (M)	High (H)		
	ТХ	Channel 9262	Channel 9400	Channel 9538		
WCDMA		1852.4 MHz	1880.0 MHz	1907.6 MHz		
Band II	RX	Channel 9662	Channel 9800	Channel 9938		
		1932.4 MHz	1960.0 MHz	1987.6 MHz		

Test Mode	TX / RX	RF Channel			
Test Mode		Low (L)	Middle (M)	High (H)	
	ТХ	Channel 1312	Channel 1413	Channel 1513	
WCDMA		1712.4MHz	1732.6 MHz	1752.6 MHz	
Band IV	RX	Channel 1537	Channel 1638	Channel 1738	
		2112.4 MHz	2132.6 MHz	2152.6 MHz	

Test Mode	TX / RX	RF Channel				
Test Mode		Low (L)	Middle (M)	High (H)		
	ТΧ	Channel 4132	Channel 4182	Channel 4233		
WCDMA		826.4MHz	836.4 MHz	846.6 MHz		
Band V	RX	Channel 4357	Channel 4407	Channel 4458		
		871.4 MHz	881.4 MHz	891.6 MHz		

Test Mode	Bandwidth	TX / RX		RF Channel	
Test Mode	Danuwiuun		Low (L)	Middle (M)	High (H)
		ТХ	Channel 18607	Channel 18900	Channel 19193
	1.4MHz		1850.7 MHz	1880 MHz	1909.3 MHz
		RX	Channel 607	Channel 900	Channel 1193
		ΓΛ	1930.7 MHz	1960 MHz	1989.3 MHz
		ТХ	Channel 18615	Channel 18900	Channel 19185
	3MHz		1851.5 MHz	1880 MHz	1908.5 MHz
	SIVITIZ	RX	Channel 615	Channel 900	Channel 1185
		ΓΛ	1931.5 MHz	1960 MHz	1988.5 MHz
		ТХ	Channel 18625	Channel 18900	Channel 19175
	5MHz		1852.5 MHz	1880 MHz	1907.5 MHz
		RX	Channel 625	Channel 900	Channel1175
LTE Band 2			1932.5 MHz	1960 MHz	1987.5 MHz
LTE Danu Z		ТХ	Channel 18650	Channel 18900	Channel 19150
	10MHz		1855 MHz	1880 MHz	1905 MHz
	TOIVINZ	RX	Channel 650	Channel 900	Channel 1150
		ΓΛ	1935 MHz	1960 MHz	1985 MHz
		ТΧ	Channel 18675	Channel 18900	Channel 19125
	15MHz		1857.5 MHz	1880 MHz	1902.5 MHz
	1 SIVILIZ	RX	Channel 675	Channel 900	Channel 1125
		ΓA	1937.5 MHz	1960 MHz	1982.5 MHz
		ТХ	Channel 18700	Channel 18900	Channel 19100
	20MHz		1860 MHz	1880 MHz	1900 MHz
	2011112	RX	Channel 700	Channel 900	Channel 1100
			1940 MHz	1960 MHz	1980 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to therms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/



Report No.: ZR/2020/2003101-01 Page: 16 of 33

Test Mode	Bandwidth	TX / RX		RF Channel	
Test Mode	Danuwiuth		Low (L)	Middle (M)	High (H)
		τv	Channel 19957	Channel 20175	Channel 20393
	1.4MHz	TX	1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4IVI⊓Z	RX	Channel 1975	Channel 2175	Channel 2375
		КЛ	2112.5 MHz	2132.5MHz	2152.5 MHz
		ТХ	Channel 19965	Channel 20175	Channel 20385
	3MHz		1711.5 MHz	1732.5 MHz	1753.5 MHz
	SIVIEZ	RX	Channel 2000	Channel 2175	Channel 2350
		КЛ	2115 MHz	2132.5MHz	2150 MHz
		ΤХ	Channel 19975	Channel 20175	Channel 20375
	5MHz		1712.5 MHz	1732.5 MHz	1752.5 MHz
		RX	Channel 1975	Channel 2175	Channel 2375
LTE Band 4			2112.5 MHz	2132.5MHz	2152.5 MHz
LIE Dallu 4		тх	Channel 20000	Channel 20175	Channel 20350
	10MHz		1715 MHz	1732.5 MHz	1750 MHz
		DV	Channel 2000	Channel 2175	Channel 2350
		RX	2115 MHz	2132.5MHz	2150 MHz
		ту	Channel 20025	Channel 20175	Channel 20325
		ΤX	1717.5 MHz	1732.5 MHz	1747.5 MHz
	15MHz	RX	Channel 2025	Channel 2175	Channel 2325
		ΓΛ.	2117.5 MHz	2132.5MHz	2147.5 MHz
		ТХ	Channel 20050	Channel 20175	Channel 20300
	20MHz		1720 MHz	1732.5 MHz	1745 MHz
		RX	Channel 2050	Channel 2175	Channel 2300
		ſΛ	2120 MHz	2132.5MHz	2145 MHz

Test Mode	Bandwidth			RF Channel	
Test Mode	Danuwiuth	TX / RX	Low (L)	Middle (M)	High (H)
		ТХ	Channel 20407	Channel 20525	Channel 20643
	1.4MHz		824.7 MHz	836.5 MHz	848.3 MHz
		RX	Channel 2407	Channel 2525	Channel 2643
		ΓΛ	869.7 MHz	881.5 MHz	893.3 MHz
		τv	Channel 20415	Channel 20525	Channel 20635
	3MHz	ТΧ	825.5 MHz	836.5 MHz	847.5 MHz
		RX	Channel 2415	Channel 2525	Channel 2635
LTE Band 5			870.5 MHz	881.5 MHz	892.5 MHz
LIE Dallu 5		тх	Channel 20425	Channel 20525	Channel 20625
	5MHz		826.5 MHz	836.5 MHz	846.5 MHz
		RX	Channel 2425	Channel 2525	Channel 2625
		κλ	871.5 MHz	881.5 MHz	891.5 MHz
		ТХ	Channel 20450	Channel 20525	Channel 20600
	10MHz		829 MHz	836.5 MHz	844 MHz
		RX	Channel 2450	Channel 2525	Channel 2600
		ΓΛ	874 MHz	881.5 MHz	889 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-enDocument.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this last report refer only to the sample(s) tested and such sample(s) are relatined for 30 days only. Attention. To check the authenticity of testing (inspection report a certificate, please contact us at telephone: (86-755) 83071443.



Report No.: ZR/2020/2003101-01 Page: 17 of 33

Test Mode	Bandwidth	TX / RX		RF Channel	
Test Mode	Danuwiutii		Low (L)	Middle (M)	High (H)
		тх	Channel 20775	Channel 21100	Channel 21425
	5MHz		2502.5 MHz	2535 MHz	2567.5 MHz
	SIVIEZ	RX	Channel 2775	Channel 3100	Channel 5825
		ΓΛ.	2622.5 MHz	2655 MHz	2687.5 MHz
		ΤХ	Channel 20800	Channel 21100	Channel 21400
	10MHz		2505 MHz	2535 MHz	2565 MHz
	TOIMITZ	RX	Channel 2800	Channel 3100	Channel 3400
LTE Band 7			2625 MHz	2655 MHz	2685 MHz
		тх	Channel 20825	Channel 21100	Channel 21375
	15MHz		2507.5 MHz	2535 MHz	2562.5 MHz
		RX	Channel 2825	Channel 3100	Channel 3375
		κλ	2627.5 MHz	2655 MHz	2682.5 MHz
		ТХ	Channel 20850	Channel 21100	Channel 21350
	20MHz		2510 MHz	2535 MHz	2560 MHz
		RX	Channel 2850	Channel 3100	Channel 3350
			2630 MHz	2655 MHz	2680 MHz

Test Made	Dondwidth			RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
		ТХ	Channel 23017	Channel 23095	Channel 23173
	1.4MHz		699.7 MHz	707.5 MHz	715.3 MHz
	1.4IVITZ	RX	Channel 5017	Channel 5095	Channel 5173
		RA.	729.7 MHz	737.5 MHz	745.3 MHz
		ΤХ	Channel 23025	Channel 23095	Channel 23165
	3MHz		700.5 MHz	707.5 MHz	714.5 MHz
		RX	Channel 5025	Channel 5095	Channel 5165
LTE Band12			730.5 MHz	737.5 MHz	744.5 MHz
LTE Danutz		ТХ	Channel 23035	Channel 23095	Channel 23155
	5MHz		701.5 MHz	707.5 MHz	713.5 MHz
		ΒV	Channel 5035	Channel 5095	Channel 5155
		RX	731.5 MHz	737.5 MHz	743.5 MHz
		тх	Channel 23060	Channel 23095	Channel 23130
l I	10MHz		704 MHz	707.5 MHz	711 MHz
		RX	Channel 5060	Channel 5095	Channel 5130
		ΓΛ	734 MHz	737.5 MHz	741 MHz

Test Mode	Bandwidth	TX / RX	RF Channel		
Test Mode	Danuwiuun		Low (L)	Middle (M)	High (H)
		ΤХ	Channel 23025	Channel 23230	Channel 23255
	5MHz		779.5 MHz	782 MHz	784.5 MHz
	JINITZ	RX	Channel 5205	Channel 5230	Channel 5255
LTE Band 13			748.5 MHz	751 MHz	753.5 MHz
LIE Dallu 15	10MHz	ТХ	Channel 23230	Channel 23230	Channel 23230
			782 MHz	782 MHz	782 MHz
		BV	Channel 5230	Channel 5230	Channel 5230
		RX	751 MHz	751 MHz	751 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T



Report No.: ZR/2020/2003101-01 Page: 18 of 33

Test Mode	Bandwidth	TX / RX		RF Channel	
Test Mode	Danuwiuun		Low (L)	Middle (M)	High (H)
		τv	Channel 26047	Channel 26365	Channel 26683
	1.4MHz	TX	1850.7 MHz	1882.5 MHz	1914.3 MHz
	1.4IVI⊓Z	RX	Channel 8047	Channel 8365	Channel 8683
		КЛ	1930.7 MHz	1962.5 MHz	1994.3 MHz
		ТХ	Channel 26055	Channel 26365	Channel 26675
	2141-		1851.5 MHz	1882.5 MHz	1913.5 MHz
	3MHz	RX	Channel 8055	Channel 8365	Channel 8675
		КЛ	1931.5 MHz	1962.5 MHz	1993.5 MHz
		τv	Channel 26065	Channel 26365	Channel 26665
		TX	1852.5 MHz	1882.5 MHz	1912.5 MHz
	5MHz	RX	Channel 8065	Channel 8365	Channel 8665
LTE Band 25			1932.5 MHz	1962.5 MHz	1992.5 MHz
LIE Danu 25		тх	Channel 26090	Channel 26365	Channel 26640
	10MHz		1855 MHz	1882.5 MHz	1910 MHz
		υV	Channel 8090	Channel 8365	Channel 8640
		RX	1935 MHz	1962.5 MHz	1990 MHz
		ΤХ	Channel 26115	Channel 26365	Channel 26615
			1857.5 MHz	1882.5 MHz	1907.5 MHz
	15MHz	RX	Channel 8115	Channel 8365	Channel 8615
		КЛ	1937.5 MHz	1962.5 MHz	1987.5 MHz
		ТХ	Channel 26140	Channel 26365	Channel 26590
	20MHz		1860 MHz	1882.5 MHz	1905 MHz
		RX	Channel 8140	Channel 8365	Channel 8590
		ΓΛ	1940 MHz	1962.5 MHz	1985 MHz

Test Made	Dandwidth	TX / RX		RF Channel		
Test Mode	Bandwidth		Low (L)	Middle (M)	High (H)	
		ТΧ	Channel 26697	Channel 26740	Channel 26783	
	1.4MHz		814.7 MHz	819 MHz	823.3 MHz	
		RX	Channel 8697	Channel 8740	Channel 8783	
			859.7 MHz	864MHz	868.3 MHz	
		ΤХ	Channel 26705	Channel 26740	Channel 26775	
	3MHz		815.5 MHz	819 MHz	822.5 MHz	
		RX	Channel 8705	Channel 8740	Channel 8775	
LTE Band26			860.5 MHz	864MHz	867.5 MHz	
(814-824)		ТХ	Channel 26715	Channel 26740	Channel 26765	
	5MHz		816.5 MHz	819 MHz	821.5 MHz	
	SIVIEZ	RX	Channel 8715	Channel 8740	Channel 8755	
			861.5 MHz	864MHz	866.5 MHz	
		ΤХ	Channel 26740	Channel 26740	Channel 26740	
	10141-		819 MHz	819 MHz	819 MHz	
		10MHz RX	Channel 8740	Channel 8740	Channel 8740	
			864MHz	864MHz	864MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-enDocument.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this last report refer only to the sample(s) tested and such sample(s) are relatined for 30 days only. Attention. To check the authenticity of testing (inspection report a certificate, please contact us at telephone: (86-755) 83071443.



Report No.: ZR/2020/2003101-01 Page: 19 of 33

Test Made	Dondwidth		RF Channel		
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
		ТХ	Channel 26797	Channel 26915	Channel 27033
	1.4MHz		824.7 MHz	836.5 MHz	848.3 MHz
	1.4IVI⊓Z	RX	Channel 8697	Channel 8915	Channel 9033
			859.7 MHz	881.5 MHz	893.3 MHz
		ΤХ	Channel 26805	Channel 26915	Channel 27025
	3MHz		825.5 MHz	836.5 MHz	847.5 MHz
	SIVIEZ	RX	Channel 8805	Channel 8915	Channel 9025
		RA.	860.5 MHz	881.5 MHz	892.5 MHz
		TX	Channel 26815	Channel 26915	Channel 27015
LTE Band26	5MHz		826.5 MHz	836.5 MHz	846.5 MHz
(824-849)		RX	Channel 8815	Channel 8915	Channel 9015
			871.5 MHz	881.5 MHz	891.5 MHz
		ΤХ	Channel 26840	Channel 26915	Channel 26990
	10MHz		829 MHz	836.5 MHz	844 MHz
	TOIVINZ	RX	Channel 8840	Channel 8915	Channel 8990
			874 MHz	881.5 MHz	889 MHz
		ΤХ	Channel 26865	Channel 26915	Channel 26965
	15111-		831.5 MHz	836.5 MHz	841.5 MHz
	15MHz	PY	Channel 8865	Channel 8915	Channel 8965
		RX	876.5 MHz	881.5 MHz	886.5 MHz

Test Mode	Bandwidth	TX / RX	RF Channel				
Test Mode	Danuwiuun		Low (L)	Middle (M)	High (H)		
			Channel 39675	Channel40620	Channel 41565		
	5MHz	TX/RX	2498.5 MHz	2593 MHz	2687.5 MHz		
	10MHz 15MHz	0MHz TX/RX	Channel 39700	Channel40620	Channel 41540		
LTE Band 41			2501 MHz	2593 MHz	2685 MHz		
LIE Dallu 41			Channel 39725	Channel40620	Channel 41515		
		15MHz TX/RX	2503.5 MHz	2593 MHz	2682.5 MHz		
	001411-	20MHz TX/RX	Channel 39750	Channel40620	Channel 41490		
	ZUMHZ		2506 MHz	2593 MHz	2680 MHz		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-enDocument.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this last report refer only to the sample(s) tested and such sample(s) are relatined for 30 days only. Attention. To check the authenticity of testing (inspection report a certificate, please contact us at telephone: (86-755) 83071443.



Report No.: ZR/2020/2003101-01 Page: 20 of 33

Test Mode	Bandwidth	TX / RX		RF Channel		
Test Mode	Danuwium		Low (L)	Middle (M)	High (H)	
		ТХ	Channel 131979	Channel 132322	Channel 132665	
	1.4MHz		1710.7 MHz	1745 MHz	1779.3 MHz	
	1.4IVI⊓Z	DV	Channel 66443	Channel 66786	Channel 67329	
		RX	2110.7 MHz	2145MHz	2199.3 MHz	
		ТХ	Channel 131987	Channel 132322	Channel 132657	
	3MHz		1711.5 MHz	1745 MHz	1778.5MHz	
	SIVIEZ	RX	Channel 66451	Channel 66786	Channel 67121	
		КЛ	2111.5 MHz	2145MHz	2198.5MHz	
		ТΧ	Channel 131997	Channel 132322	Channel 132647	
			1712.5 MHz	1745 MHz	1777.5 MHz	
	5MHz	RX	Channel 66461	Channel 66786	Channel 67311	
LTE Band 66			2112.5 MHz	2145MHz	2197.5 MHz	
LIE Danu oo		10MHz TX RX	Channel 132022	Channel 132322	Channel 132622	
			1715 MHz	1745 MHz	1775 MHz	
			Channel 66486	Channel 66786	Channel 67286	
			2115 MHz	2145MHz	2195 MHz	
			ТΧ	Channel 132047	Channel 132322	Channel 132597
			1717.5 MHz	1745 MHz	1772.5 MHz	
	15MHz	RX	Channel 66511	Channel 66786	Channel 67261	
		КЛ	2117.5 MHz	2145MHz	2192.5 MHz	
		τv	Channel 132072	Channel 132322	Channel 132572	
	20MHz	ΤX	1720 MHz	1745 MHz	1770 MHz	
	ZUIVIHZ	DV	Channel 66536	Channel 66786	Channel 67236	
		RX	2120 MHz	2145MHz	2190 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-enDocument.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this last report refer only to the sample(s) tested and such sample(s) are relatined for 30 days only. Attention. To check the authenticity of testing (inspection report a certificate, please contact us at telephone: (86-755) 83071443.

Report No.: ZR/2020/2003101-01 Page: 21 of 33

# 4 Description of Tests

## 4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1

## 4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 ; C63.26 (2015) Calculate power in dBm by the following formula: ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd) EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi) EIRP=ERP+2.15dB

## 4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

### Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.faspx and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/



Report No.: ZR/2020/2003101-01 Page: 22 of 33

#### Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within

1 - 5% of the 99% occupied bandwidth observed in Step 7

### 4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

#### Remark: Reference test setup 1

#### Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW ≥ 1% of the emission bandwidth
- 4.  $VBW \ge 3 \times RBW$
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize


## 4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation or liability, indemnification and jurrisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) itest and such sample(s) iter retained for 30 days only. Attention: To check the authenticity of testing inspection report a certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN\_Doccheck@sgs.com

中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

#### **Remark: Reference test setup 1**

#### Test Settings

- Start frequency was set to 30MHz and stop frequency was set to at least 10 \* the fundamental frequency (separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings

### 4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.1

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

#### **Remark: Reference test setup 1**



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention, To check the authenticity of lesting inspection report a certificate, please contact us at telephone: (86-755) 8307 1443,

Report No.: ZR/2020/2003101-01 Page: 24 of 33

#### Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

## 4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01

#### Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.
- 8) Calculate power in dBm by the following formula:

ERP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBd)

#### Where:

Pd is the dipole equivalent power, Pg is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to Pg [dBm] – cable loss [dB]. The calculated Pd levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of 43 + 10log10(Power [Watts]).

### Above 1GHz test procedure as below:

1) Different between above is the test site, change from Semi- Anechoic

Chamber to fully Anechoic Chamber



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.format documents, subject to therms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Ter



Report No.: ZR/2020/2003101-01 Page: 25 of 33

2) Calculate power in dBm by the following formula:

EIRP(dBm) = Pg(dBm) – cable loss (dB) + antenna gain (dBi)

EIRP=ERP+2.15dB

Where:

Pg is the generator output power into the substitution antenna.

- 3. Test the EUT in the lowest channel, the middle channel the Highest channel
- 4. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5. Repeat above procedures until all frequencies measured was complete

Remark: Reference test setup 3

## 4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; ANSI/C63.26 (2015)

- . The frequency stability of the transmitter is measured by:
- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm ) of the center frequency.

### Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Remark: Reference test setup 4




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cillent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) isted and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@egs.com



Report No.: ZR/2020/2003101-01 Page: 26 of 33

## 4.9 Test Setups

### 4.9.1 Test Setup 1

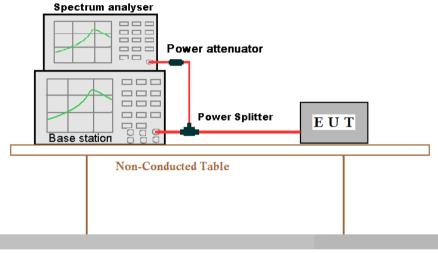

Ground Reference Plane

### 4.9.2 Test Setup 2


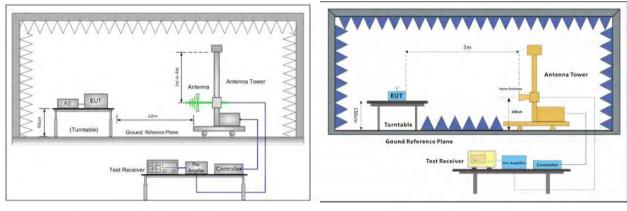


Figure 1. 30MHz to 1GHz





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offender may be prosecuted to the fullest extent of the law. Unless otherwises stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone::(86-755)8071443, or email: CR\_Doccheck@sas.com

中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/2003101-01 Page: 27 of 33

### 4.9.3 Test Setup 3




Figure 1. Below 30MHz


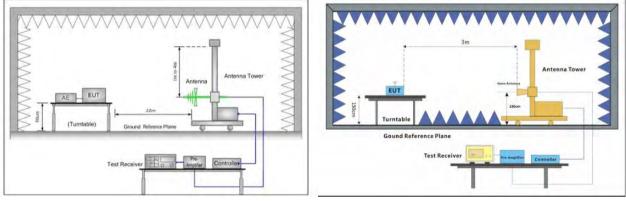


Figure 2. 30MHz to 1GHz

Figure 3. above 1GHz



Ground Reference Plane

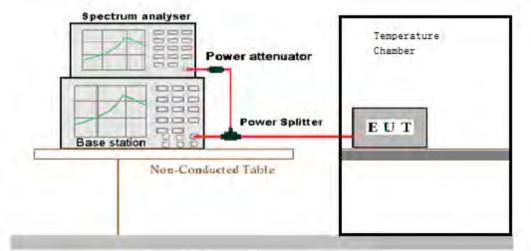

4.9.4 Test Setup 4

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation or liability, indeeminification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is used then avecual to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing linepection report a certificate, please contact us at telephone: (86-755) 8307 1443, or email: Ch.Doccheck@sgs.com

> Report No.: ZR/2020/2003101-01 Page: 28 of 33

# 4.10 Test Conditions

S

Test Case		Test Conditions	
		Test Environment	Ambient Climate & Rated Voltage
	Average	Test Setup	Test Setup 1
Transmit	Power, Total	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )
Output		Test Mode	UMTS/TM1; UMTS/TM2;LTE/TM1;LTE/TM2
Power	Average	Test Environment	Ambient Climate & Rated Voltage
Data	Power,	Test Setup	Test Setup 1
	Spectral Density (if	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )
	required)	Test Mode	UMTS/TM1; UMTS/TM2;LTE/TM1;LTE/TM2
		Test Environment	Ambient Climate & Rated Voltage
Peak-to-Ave	erage Ratio	Test Setup	Test Setup 1
(if required)	•	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )
		Test Mode	UMTS/TM1; UMTS/TM2;LTE/TM1;LTE/TM2
		Test Environment	Ambient Climate & Rated Voltage
Modulation		Test Setup	Test Setup 1
Characteris	tics	RF Channels (TX)	M (M= middle channel )
		Test Mode	UMTS/TM1; UMTS/TM2;LTE/TM1;LTE/TM2
		Test Environment	Ambient Climate & Rated Voltage
	Occupied	Test Setup	Test Setup 1
	Bandwidth	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )
Bandwidth		Test Mode	UMTS/TM1; UMTS/TM2;LTE/TM1;LTE/TM2
Danuwiuun	Emission	Test Environment	Ambient Climate & Rated Voltage
	Bandwidth	Test Setup	Test Setup 1
	(if required)	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )
(cquired)		Test Mode	UMTS/TM1; UMTS/TM2;LTE/TM1;LTE/TM2
		Test Environment	Ambient Climate & Rated Voltage
Band Edges	3	Test Setup	Test Setup 1
Compliance	•	RF Channels (TX)	L, H (L= low channel, H= high channel )
		Test Mode	UMTS/TM1; UMTS/TM2;LTE/TM1;LTE/TM2
Spurious Er	nission at	Test Environment	Ambient Climate & Rated Voltage



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report accertificate, please contacture at telephone: (86-755) 83071443, or email: CN-Doccheck@sgs.com



Report No.: ZR/2020/2003101-01 Page: 29 of 33

Antenna Terminals	Test Setup	Test Setup 1		
		L,M, H		
	RF Channels (TX)	(L= low channel, M= middle channel, H= high channel)		
	Test Mode	UMTS/TM1; LTE/TM1		
	Test Environment	Ambient Climate & Rated Voltage		
	Test Setup	Test Setup 2		
Field Strength of		UMTS/TM1;UMTS/TM2; LTE/TM1;LTE/TM2;		
Field Strength of Spurious Radiation	Test Mode	Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.		
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= hig channel )		
		(1) -30 °C to +50 °C with step 10 °C at Rated Voltage;		
	Test Environment	(2) VL, VN and VH of Rated Voltage at Ambient Climate.		
Frequency Stability	Test Setup	Test Setup 4		
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )		
	Test Mode	UMTS/TM1; UMTS/TM2;LTE/TM1;LTE/TM2		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-enDocument.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this last report refer only to the sample(s) tested and such sample(s) are relatined for 30 days only. Attention. To check the authenticity of testing (inspection report a certificate, please contact us at telephone: (86-755) 83071443.



Report No.: ZR/2020/2003101-01 Page: 30 of 33

# 5 Main Test Instruments

	RF conducted test						
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Due date (yyyy-mm-		
				dd)	dd)		
Dual Output Mobile Communication DC Source	Agilent Technologies Inc	66311B	W009-09	2019/10/22	2020/10/21		
Signal Analyzer	Rohde & Schwarz	FSV	W005-02	2020/3/2	2021/3/1		
Coaxial Cable	SGS	N/A	SEM031-01	2019/6/12	2020/6/11		
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A		
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2019/10/22	2020/10/21		
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	HTC-1	W006-17	2019/10/22	2020/10/21		
Temperature Chamber	GIANT FORCE	ICT-150- 40-CP-AR	W027-03	2019/10/22	2020/10/21		
Wideband Radio CommunicationTeste	Anristu	MT8821C	6201462742	2020/3/2	2021/3/1		
Wideband Radio CommunicationTester	Rohde & Schwarz	CMW500	W005-02	2019/10/22	2020/10/21		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-enDocument.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this last report refer only to the sample(s) tested and such sample(s) are relatined for 30 days only. Attention. To check the authenticity of testing (inspection report a certificate, please contact us at telephone: (86-755) 83071443.

SGS S

SGS-CSTC Standards Technical Services Co., Ltd.Shenzhen Branch

Report No.: ZR/2020/2003101-01 Page: 31 of 33

RE in Chamber (Below 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2017-08-05	2020-08-04
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2019-12-16	2020-12-15
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-02	2019-05-24	2022-05-23
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2019-04-01	2020-03-31
Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2019-07-12	2020-07-11
Wideband Radio CommunicationTester	Rohde & Schwarz	CMW500	W005-02	2019/10/22	2020/10/21

RE in Chamber (Above 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
EXA Signal Analyzer	Agilent Technologies Inc	N9010A	SEM004-12	2019-04-12	2020-04-11
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Pre-Amplifier	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2019-09-24	2020-09-23
Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2019-07-12	2020-07-11
Wideband Radio CommunicationTester	Rohde & Schwarz	CMW500	W005-02	2019/10/22	2020/10/21

General used equipment					
Equipment	Equipment Manufacturer Model No Inventory No Cal Date Cal Due Da				
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2019-09-26	2020-09-25
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2019-09-26	2020-09-25
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2019-04-04	2020-04-03



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-enDocument.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this last report refer only to the sample(s) tested and such sample(s) are relatined for 30 days only. Attention. To check the authenticity of testing (inspection report a certificate, please contact us at telephone: (86-755) 83071443.

Report No.: ZR/2020/2003101-01 Page: 32 of 33

	RSE Test System					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date	
Semi-Anechoic Chamber	Brilliant-emc	N/A	XAW03-35-01	2019-09-11	2022-09-10	
MXA signal analyzer	Keysight	N9020A	XAW01-06-01	2019-06-27	2020-06-26	
Test receiver	ROHDE&SCHWARZ	ESR	XAW01-08-01	2019-09-07	2020-09-06	
Receiving antenna (30MHz-3GHz)	Schwarzbeck	VULB 9163	XAW01-09-01	2019-10-13	2021-10-12	
Receiving antenna (1GHz~18GHz)	Schwarzbeck	BBHA 9120D	XAW01-09-02	2019-10-13	2021-10-12	
Receiving antenna (15GHz~40GHz)	Schwarzbeck	BBHA 9170	XAW01-09-03	2019-10-13	2021-10-12	
Directional antenna rack controller	Max-Full	MF-7802BS	XAW03-03-01	NCR	NCR	
High-speed antenna rack controller	Max-Full	MF-7802	XAW03-04-01	NCR	NCR	
Filter bank	Tonscend	JS0806-F	XAW03-05-01	NCR	NCR	
Filter bank	Tonscend	JS0806s	XAW03-05-02	NCR	NCR	
Amplifier	Tonscend	TAP00903040	XAW01-41-01	2019-11-18	2020-11-17	
Amplifier	Tonscend	TAP01018048	XAW01-41-02	2019-11-18	2020-11-17	
Amplifier	Tonscend	TAP18040048	XAW01-41-03	2019-12-03	2020-12-02	
Amplifier	Shanghai Steed	YX28980930	XAW01-41-06	2019-11-18	2020-11-17	
Temperature and humidity meter	MingGao	TH101B	XAW01-01-01	2019-12-06	2020-12-05	
Measurement Software	Tonscend	TS+ RSE V3.0.0.2	XAW02-05-01	NCR	NCR	
Radio communication analyzer	ROHDE&SCHWARZ	CMW 500	XAW01-03-02	2019-06-27	2020-06-26	



5

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to therms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/



Report No.: ZR/2020/2003101-01 Page: 33 of 33

# 6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Lab A:		
Test Item	Extended Uncertainty	Data
Transmit Output Power Data	Power [dBm]	U =±0.37 dB
Bandwidth	Magnitude [%]	U =± 0.2%
Band Edge Compliance	Disturbance Power [dBm]	U = ±2.0 dB
Spurious Emissions, Conducted	Disturbance Power [dBm]	U = ±2.0 dB
Frequency Stability	Frequency Accuracy [ppm]	U = ±0.24 ppm

Radiated Spurious Emissions Below 1GHz	$\pm$ 4.5dB
Radiated Spurious Emissions Above 1GHz	$\pm$ 4.8dB

Lab B:

No.	Item	Measurement Uncertainty
1		± 4.8dB (Below 1GHz)
	Radiated Emission	± 4.8dB (1GHz to 6GHz)
		± 4.5dB (6GHz to 18GHz)
		± 5.02dB (Above 18GHz)

# 7 Appendixes

Appendix A	Photographs of Set-Up for ZR/2020/20031	
Appendix B.1	WCDMA Band II & IV & V	
Appendix B.2	LTE Band 2	
Appendix B.3	LTE Band 4	
Appendix B.4	LTE Band 5	
Appendix B.5	LTE Band 7	
Appendix B.6	LTE Band 12	
Appendix B.7	LTE Band 13	
Appendix B.8	LTE Band 25	
Appendix B.9	LTE Band 26 (814-824)	
Appendix B.10	LTE Band 26 (824-849)	
Appendix B.11	LTE Band 41	
Appendix B.12	LTE Band 66	

#### The End



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T