

1		2		3		4		5	
A	Scale/1:1 Unit/mm DO NOT SCALE DRAWING					R1	Initial Release		20191227
						R2	Add:Sercomm P/N		20200224
						R3	Add:FCC logo and 警語		20200319
						R4	Update:“Sercomm P/N” for“P/N”		20200323
						R5	Adjust details according to factory requirements		20200427
						R6	Update: Login: http://192.168.1.1		20200511
						R7	Add“FCC ID: P27IP3442M”		20200514
						R8	Update Model: IP3442M-L/XX		20200529
						R9	Adjust safty logo location		20200615


59.5±0.2

3-R1.75

34.5±0.2

C1.85

刀模线不印刷 (DIM LINE NO PRINT)

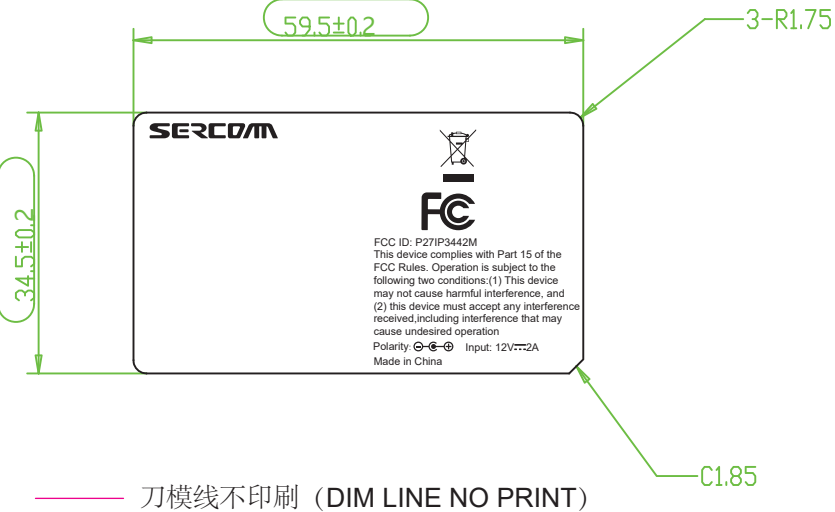


Model: IP3442M-L/XX
P/N: XXXXXXXXXX
WIFI SSID: LIB-1234567
WIFI Password: 1234567890AB
Serial: yymmcccnnnnnn
MAC: 1234567890AB
WPS PIN: 12345678
Login: http://192.168.1.1
Username: admin
Password: 12345678

30*30mm

TEXT SIZE:Arial/6Pt
Barcode: Code 128

SN: yymmcccnnnnnn (13 digits Sercomm SN??)
yy : last two digit (19 for 2019)
mm : 01-12
ccc : product code
nnnnnn : serial number

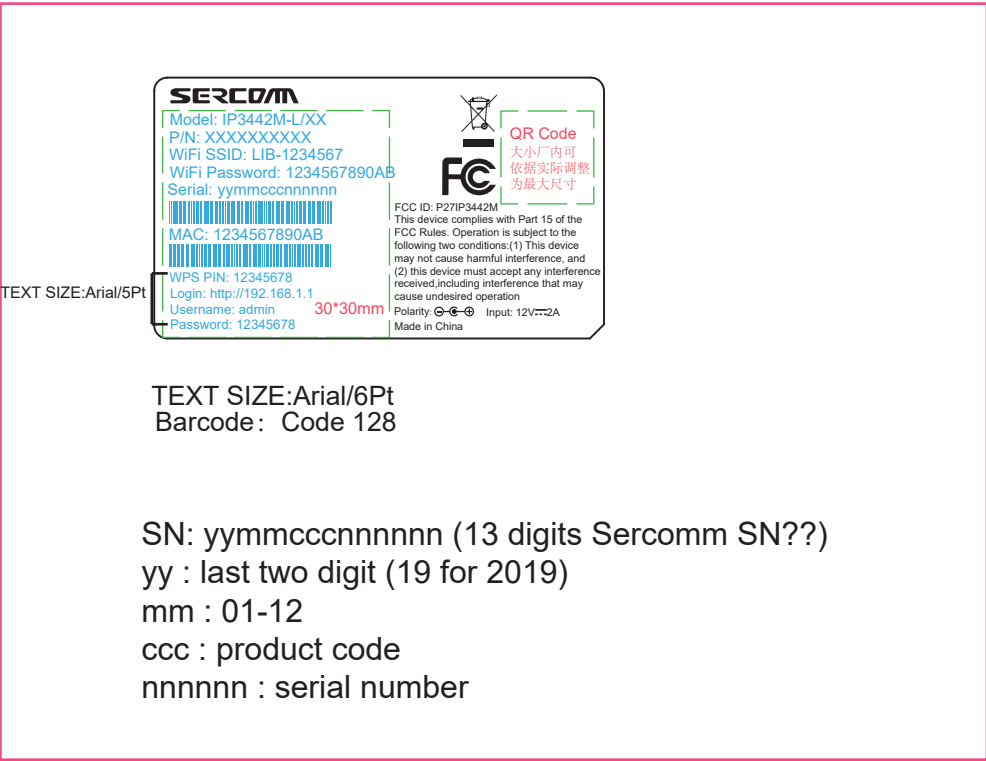


60.0

35.0

C2

depth 0.3mm

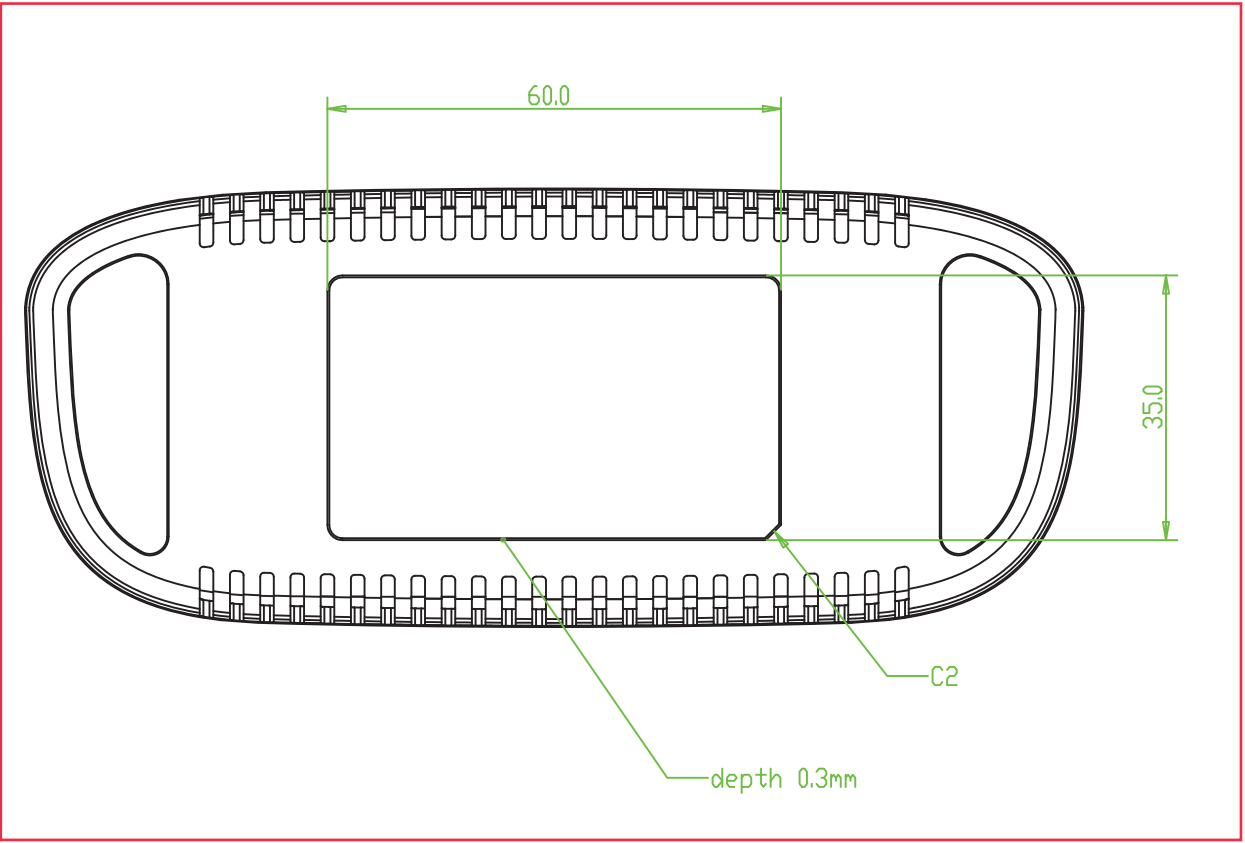

厂内列印示意，具体依实际需求为准
(The factory Print example)

label与机构件匹配尺寸图
<Scale: 1:1>

Notes:

1. 材質：50#白色Mylar,
上打字用雾面PET


2. 背压花胶

3. 尺寸/印刷:如图

4. 公差:0. - 0.2mm

5. 本料件使用之材料須符合RoHS & UL
Wetting tension（表面张力）>=32dyne/cm

此处轧齿刀线, 方便撕开, label与label间距, 边距3mm

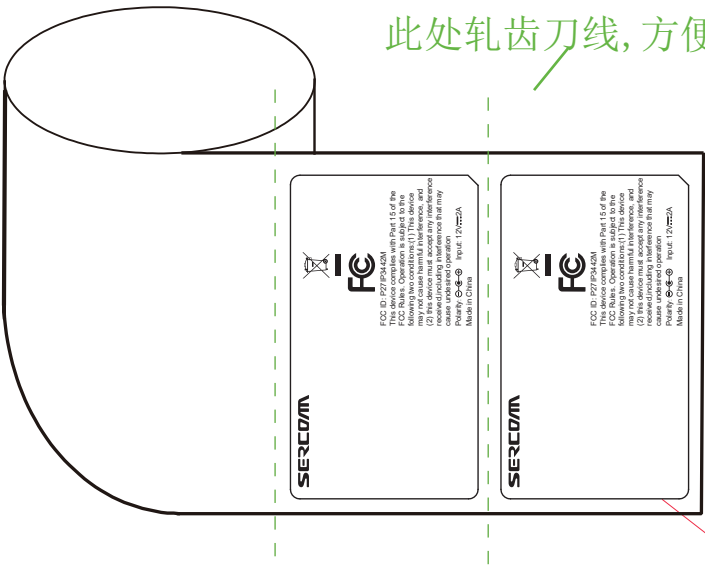

單位用量1

Notes:

1.MATERIAL: #50 white Mylar,
Can type with matt PET

2.ADHESIVE:Embossed Adhesive

3.SIZE:as drawing


4.PRINTING COLOR:as note

5.TOLERANCES :0,- 0.2mm

6.The material must comply with RoHS & UL
Wetting tension（表面张力）>=32dyne/cm

D		DONOTSCALEDRAWING		
USED	MODEL	IP3442M-L/XX	NAME Product label/Liberty Latin America	SCALE 1 / 1
	DSN	Judy Du	PART. No 932DFR01E5	SHEET 1 OF 1
	CHK	Fanking Fan	MATERIAL #50 white Mylar	Q' TY 1 PC
	APV	Fanking Fan		REV. 9
	FILE			REV. DATE 2020.06.15

Bottom

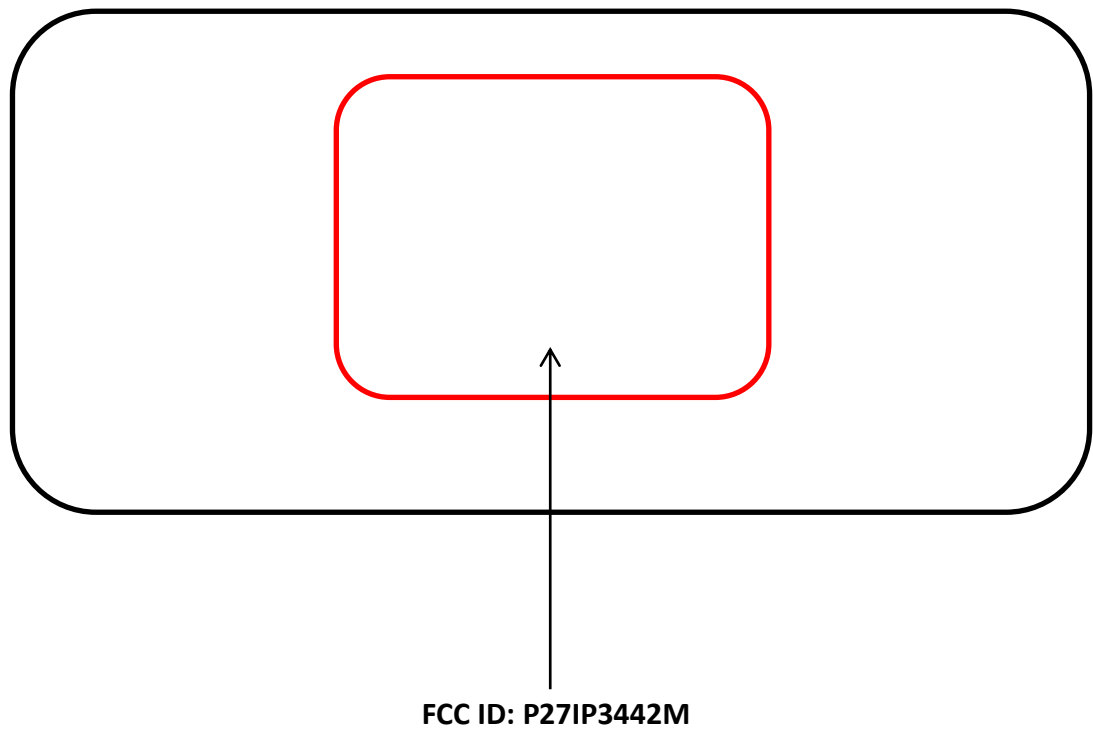

FCC ID: P27IP3442M