




Test Plots:

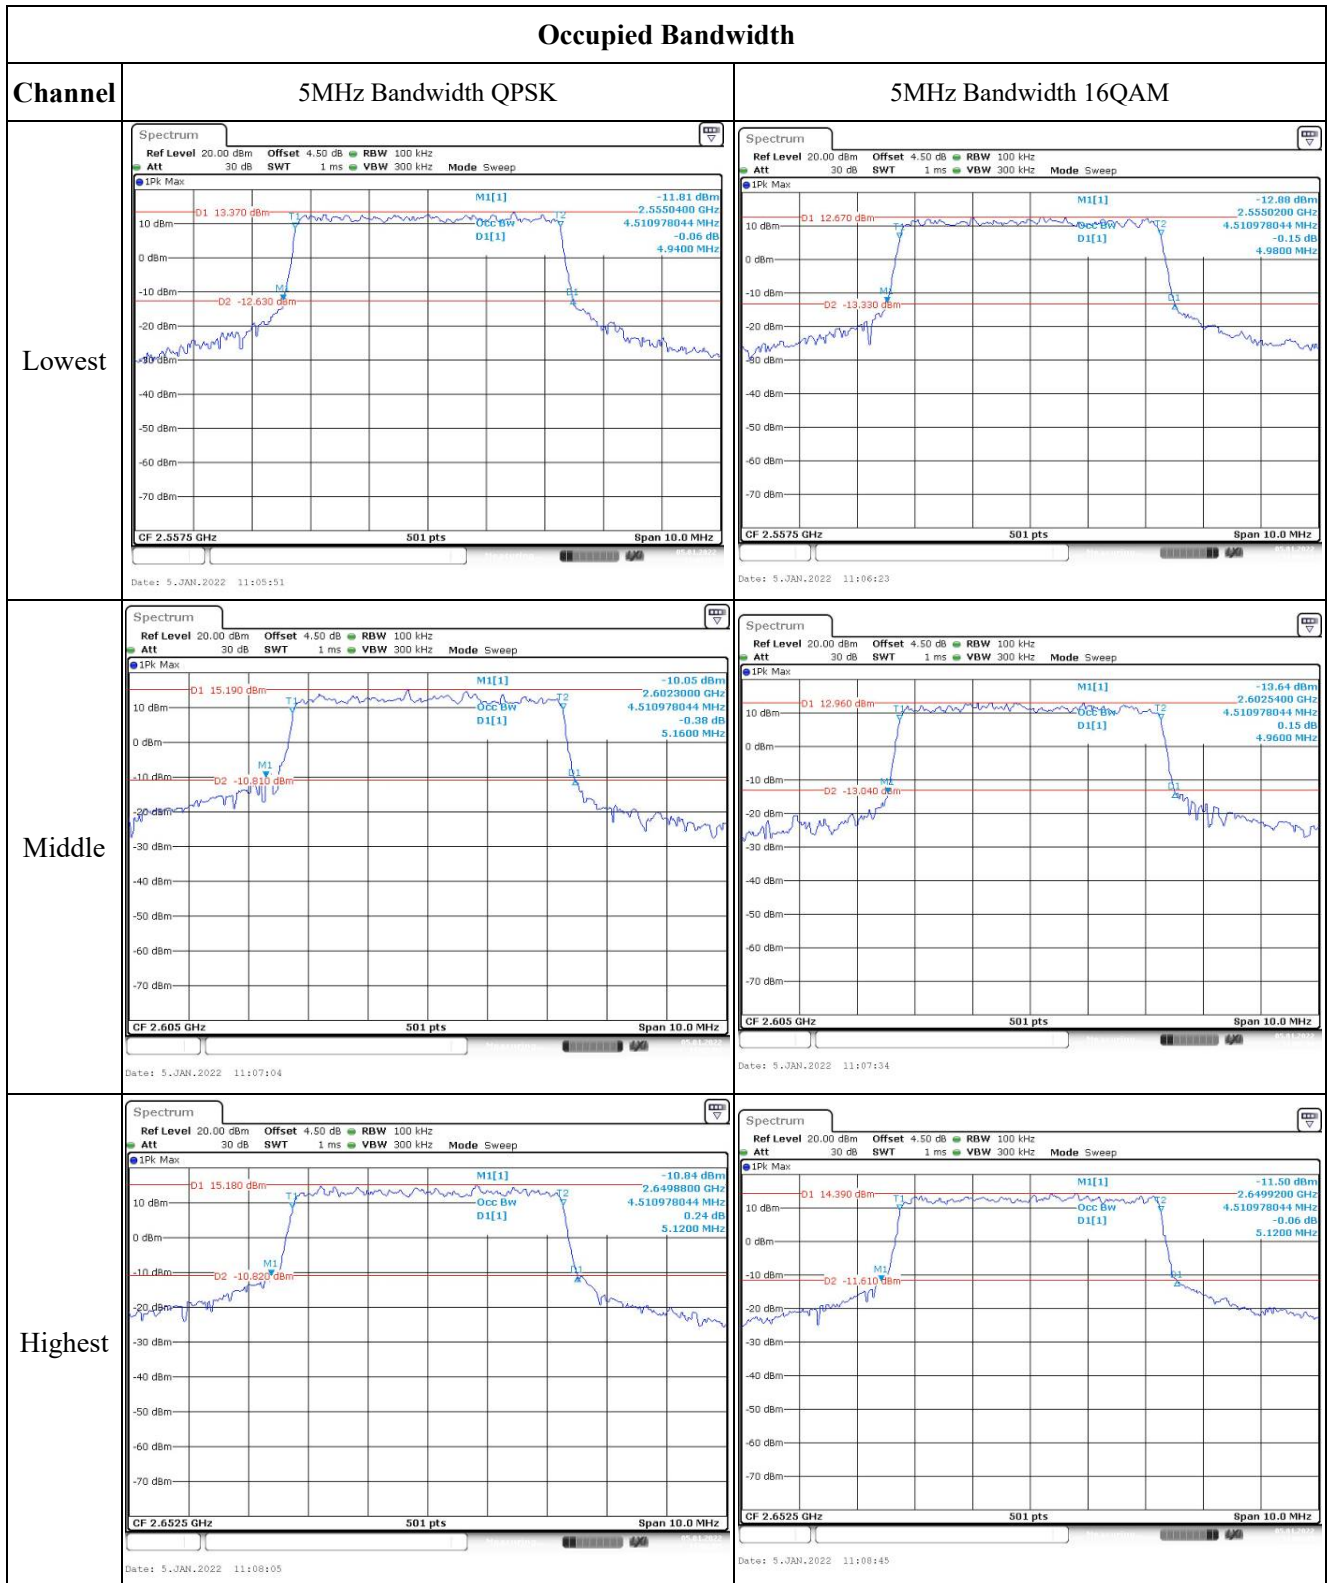


Occupied Bandwidth

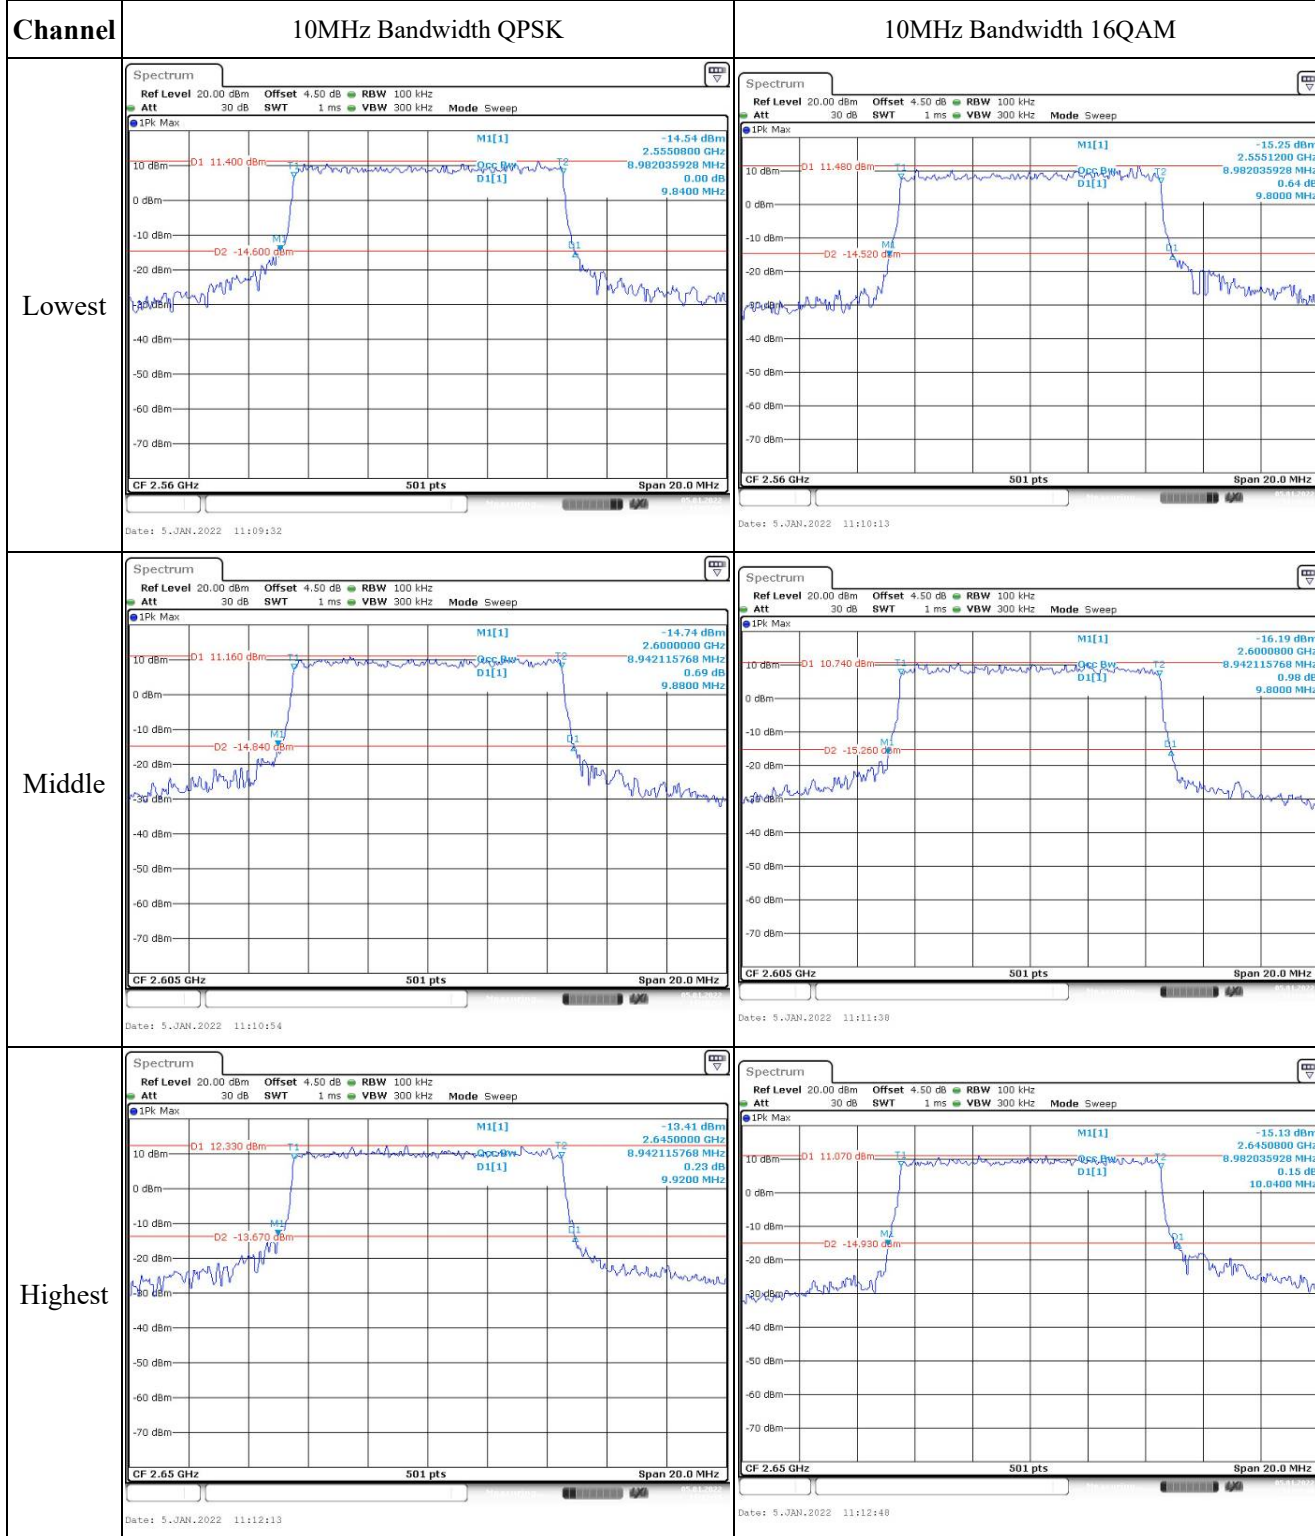

Occupied Bandwidth

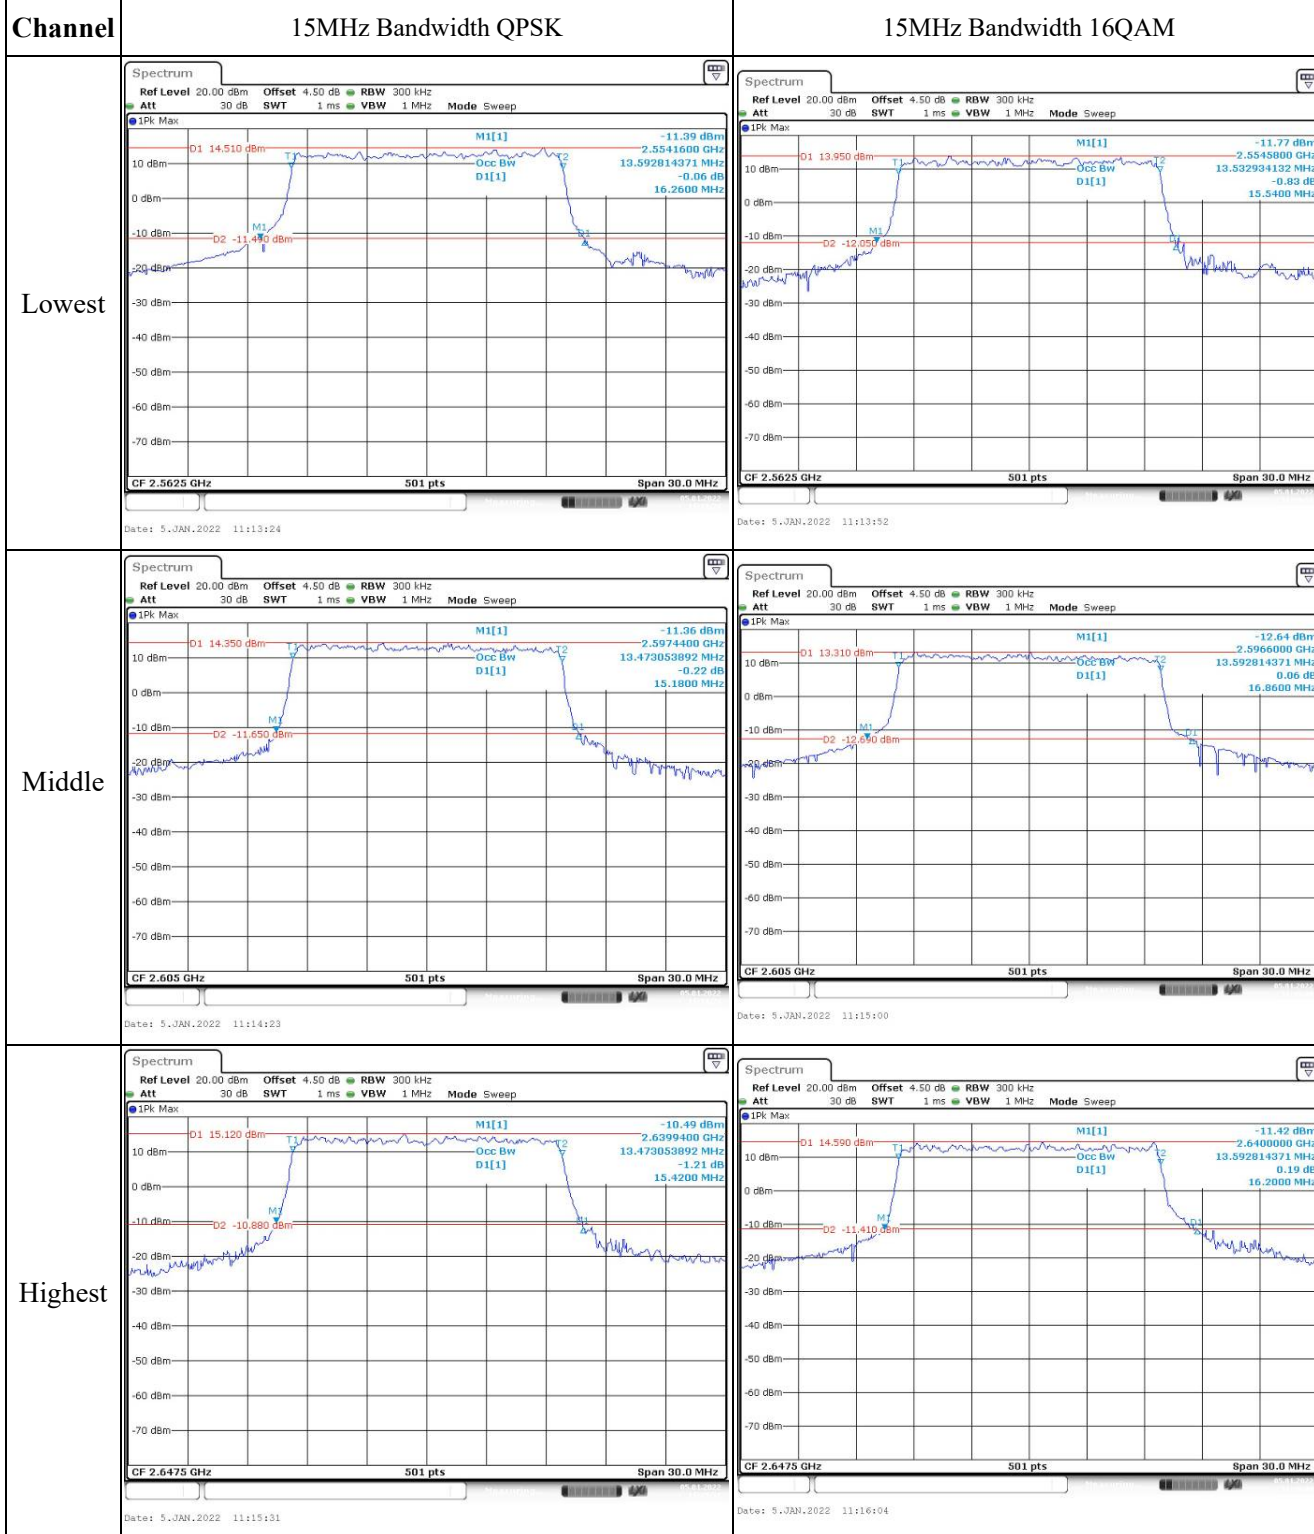

Occupied Bandwidth


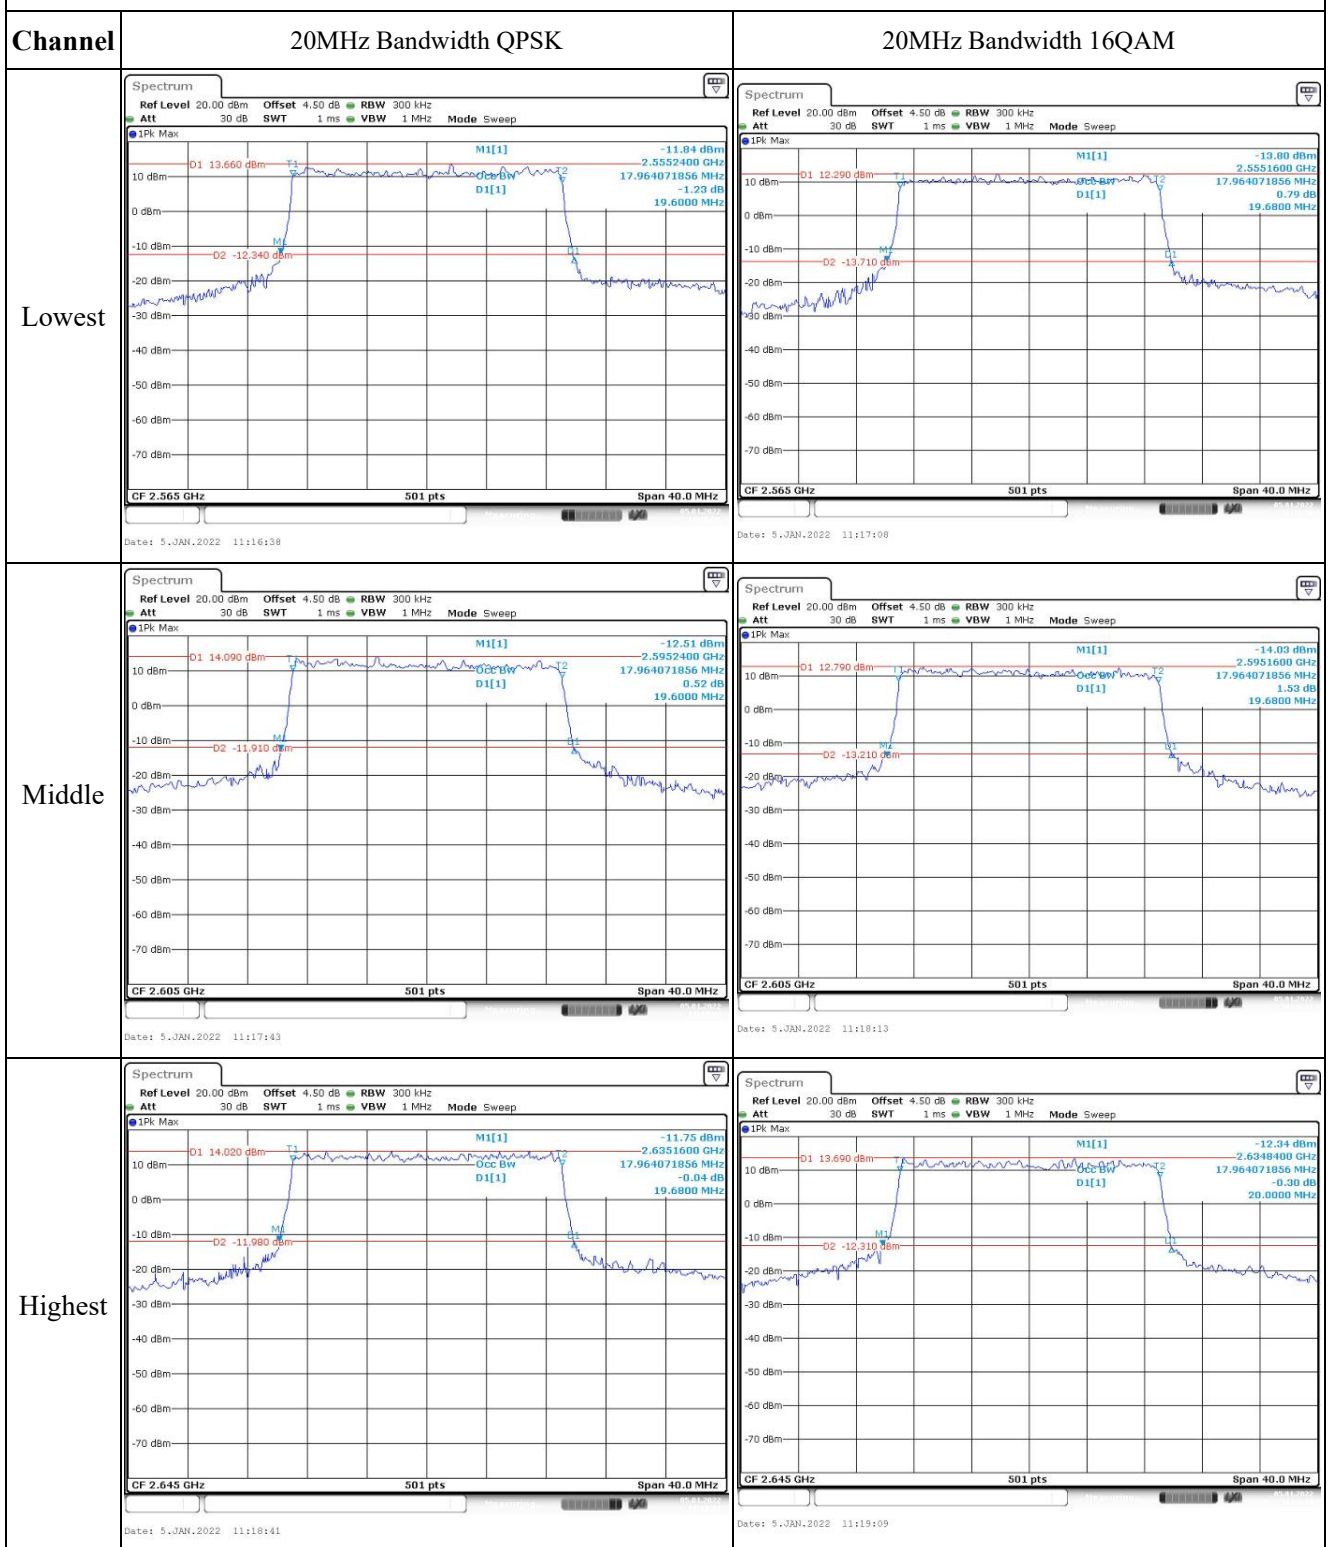


Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

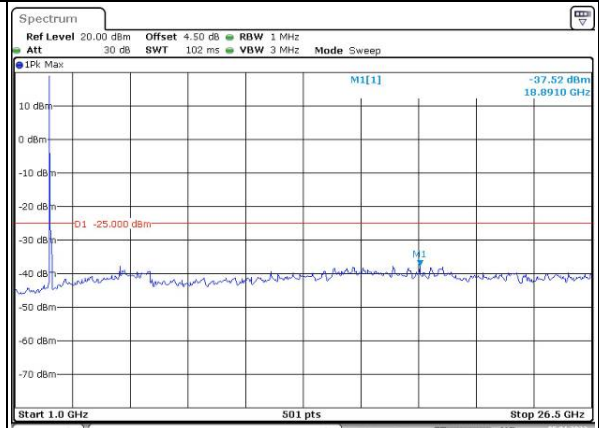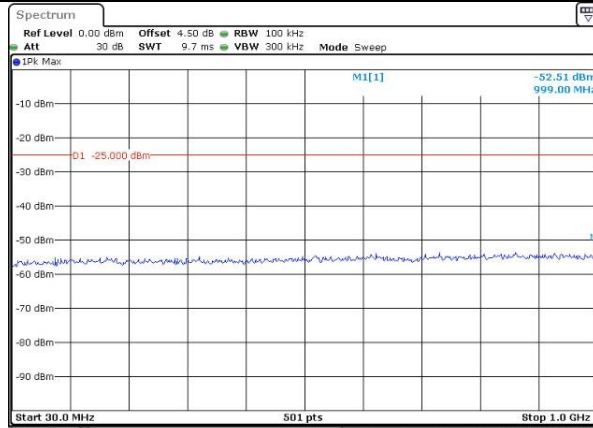

Middle

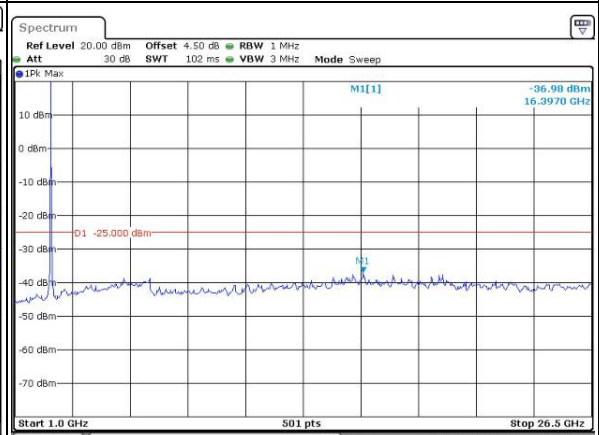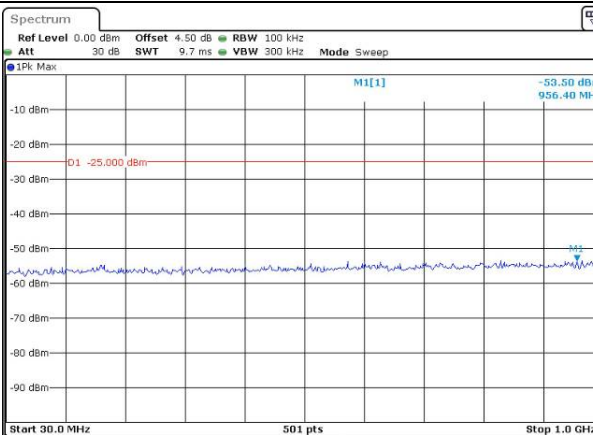

Highest

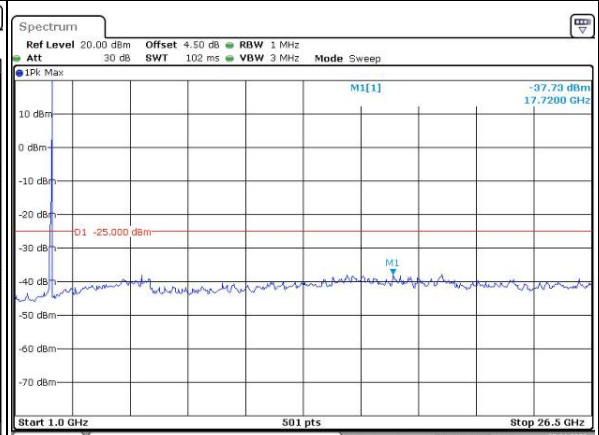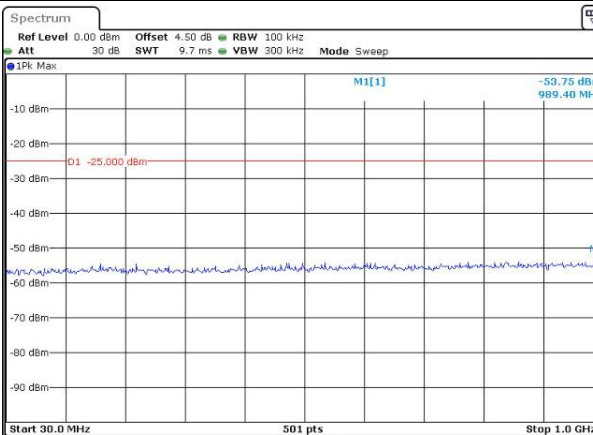


Spurious Emissions at Antenna Terminal


Channel

10MHz Bandwidth QPSK

Lowest

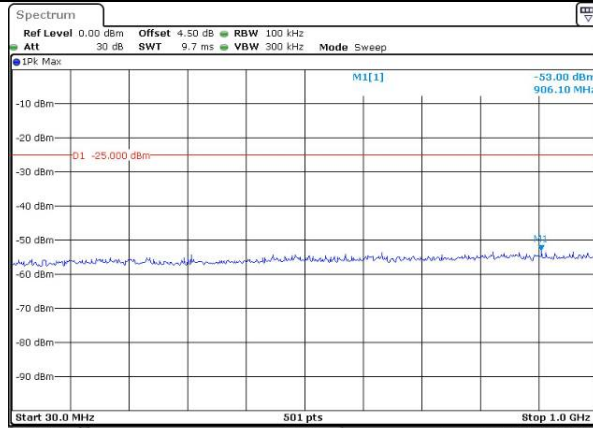


Date: 5.JAN.2022 11:35:06

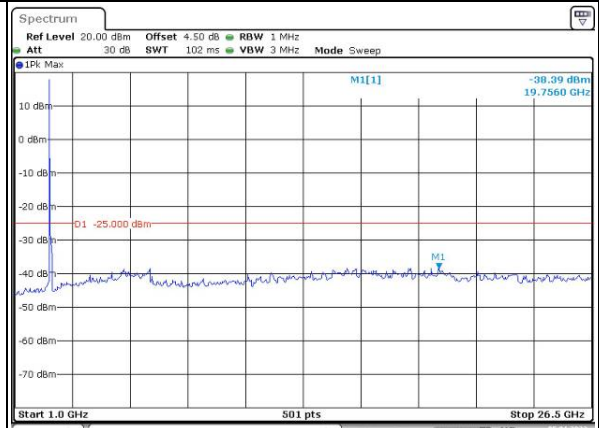


Date: 5.JAN.2022 11:35:25

Middle

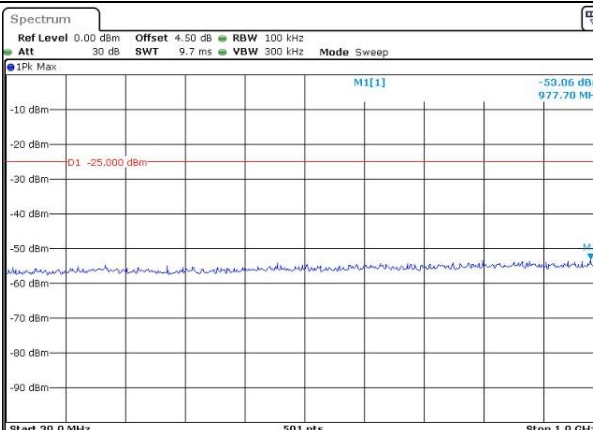


Date: 5.JAN.2022 11:35:52

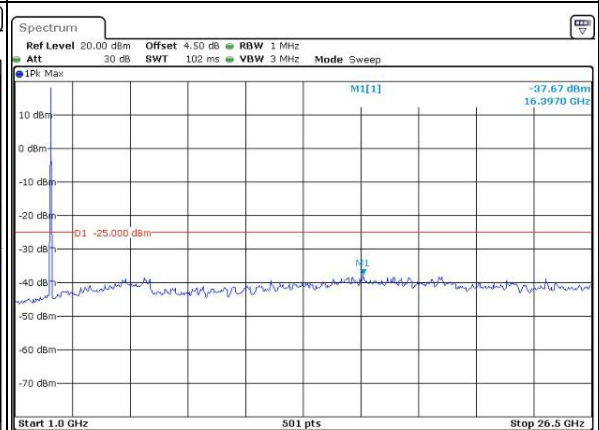


Date: 5.JAN.2022 11:36:18

Highest

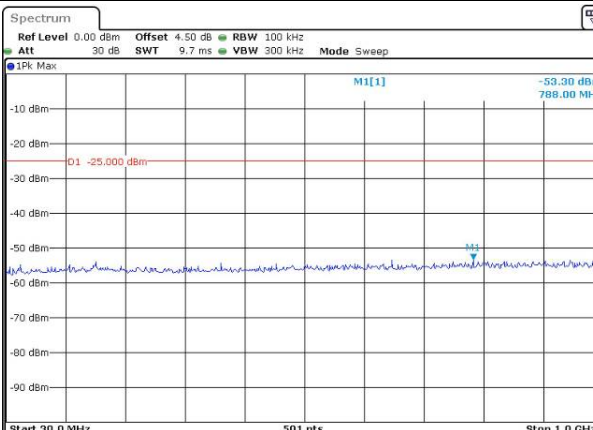

Date: 5.JAN.2022 11:36:48

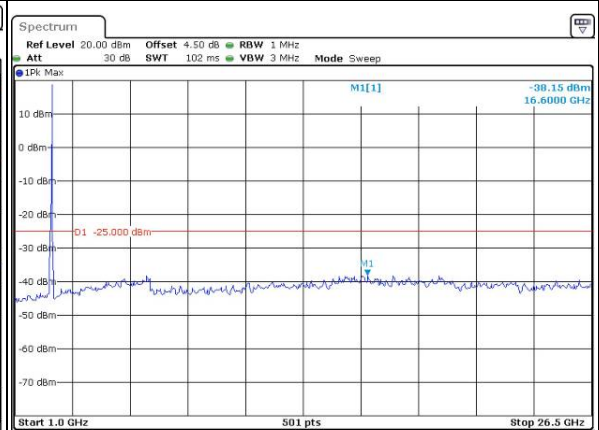



Date: 5.JAN.2022 11:37:11

Spurious Emissions at Antenna Terminal



Channel

15MHz Bandwidth QPSK



Lowest

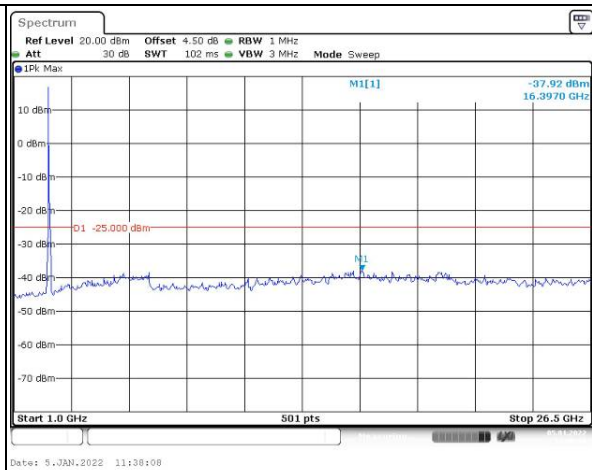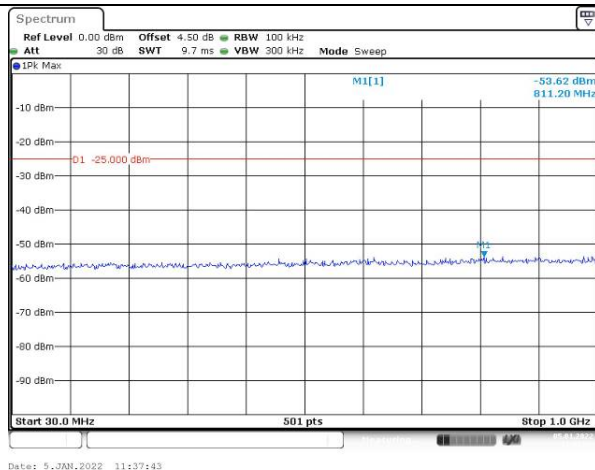


Middle

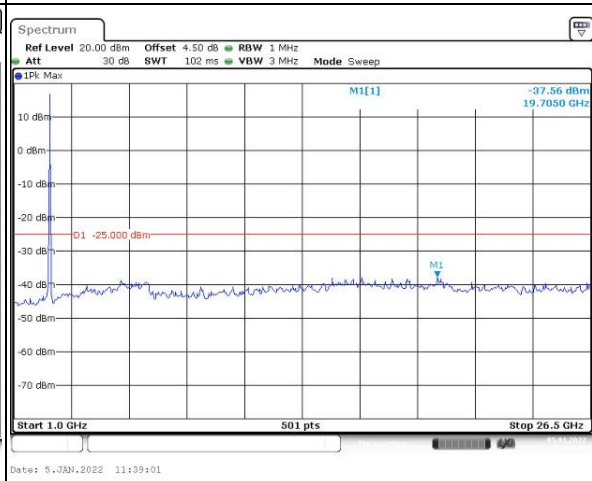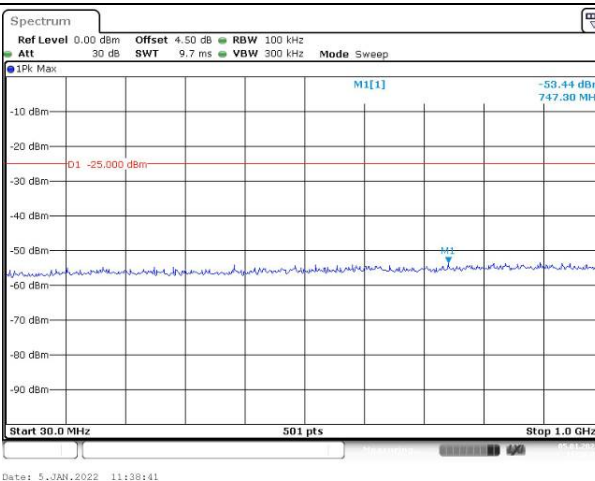


Highest

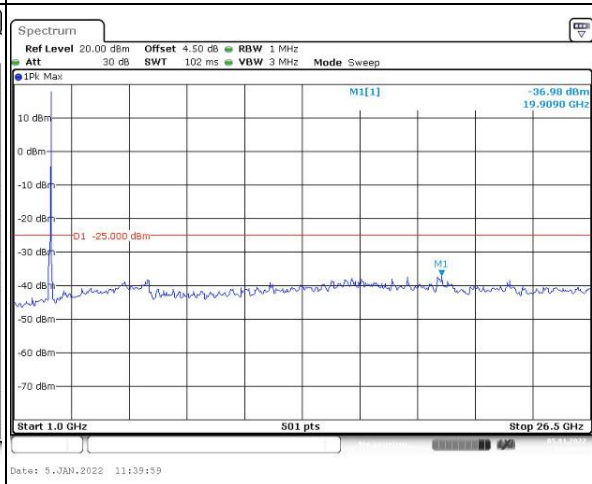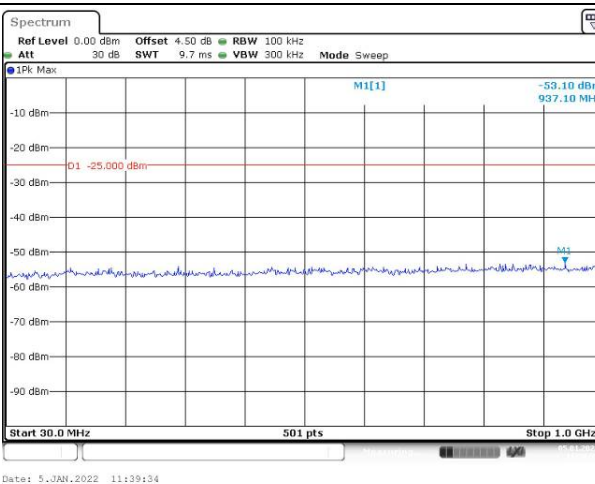


Spurious Emissions at Antenna Terminal

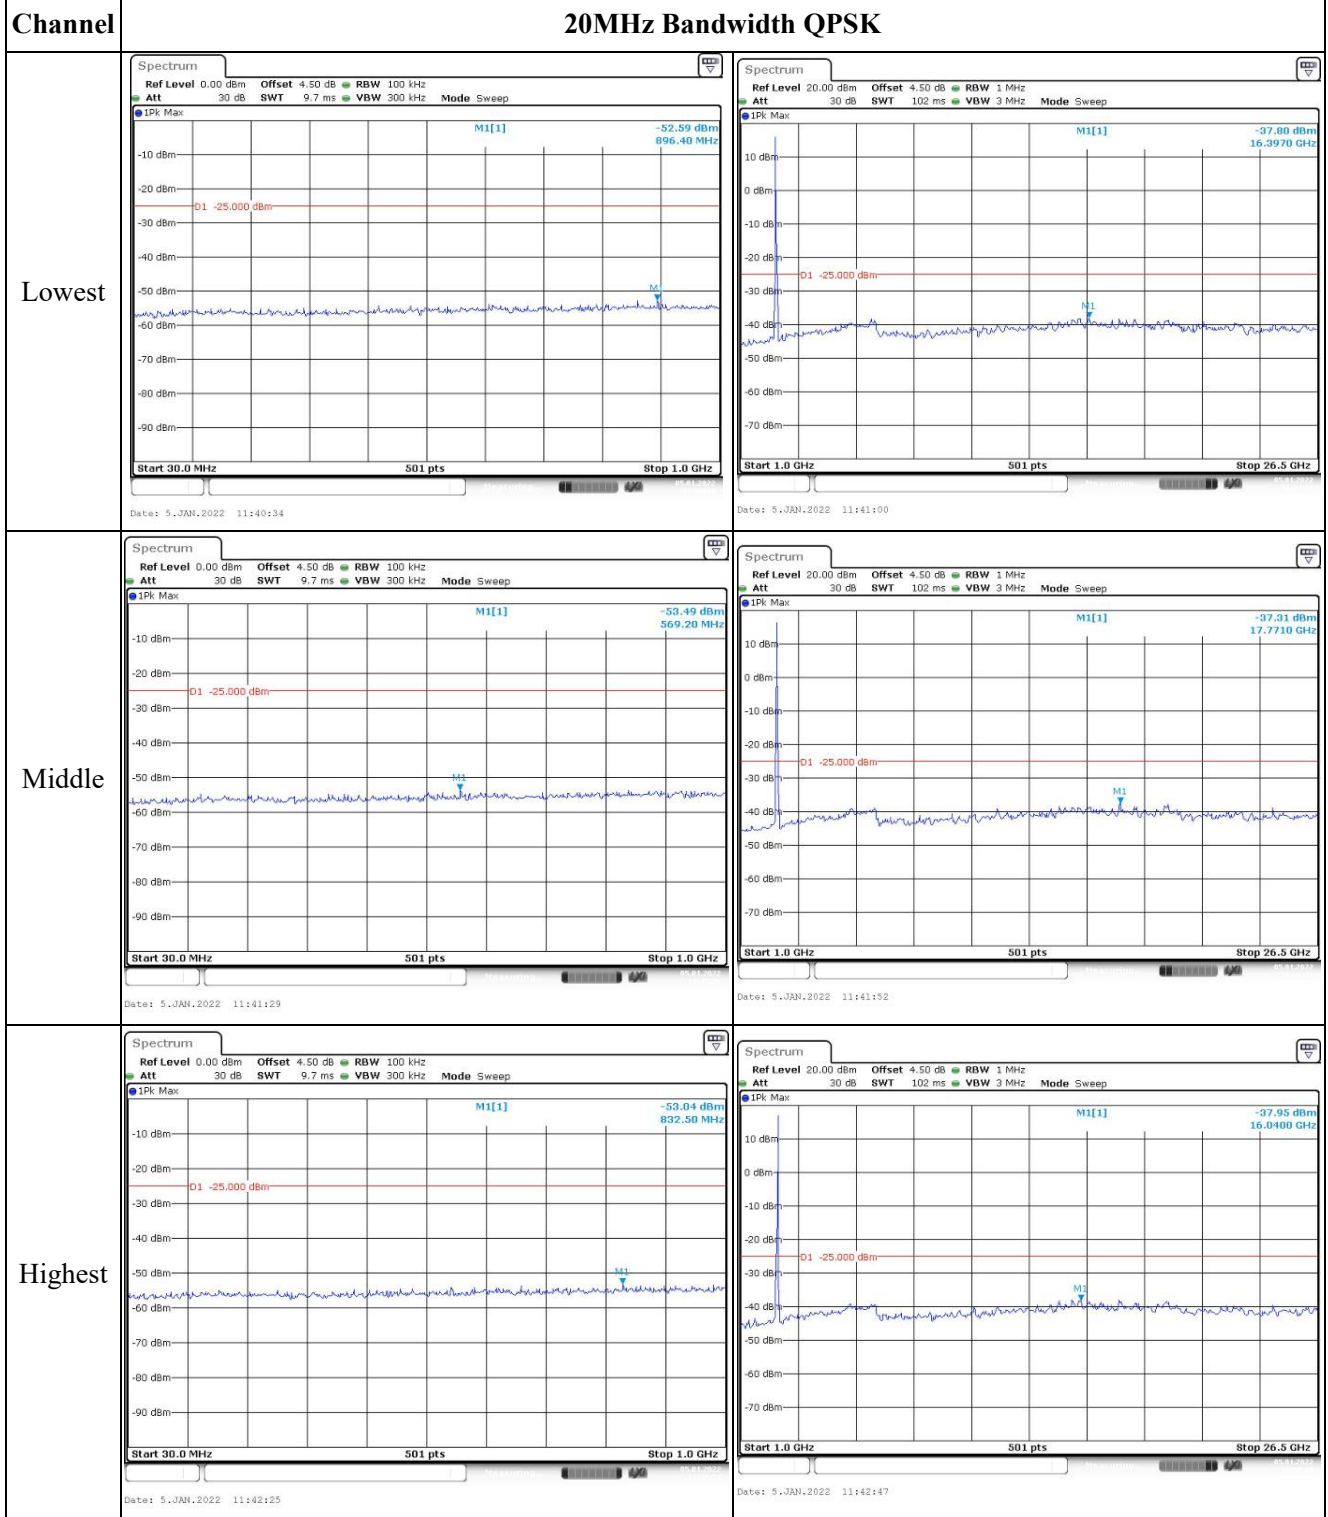


Out of band emission, Band Edge

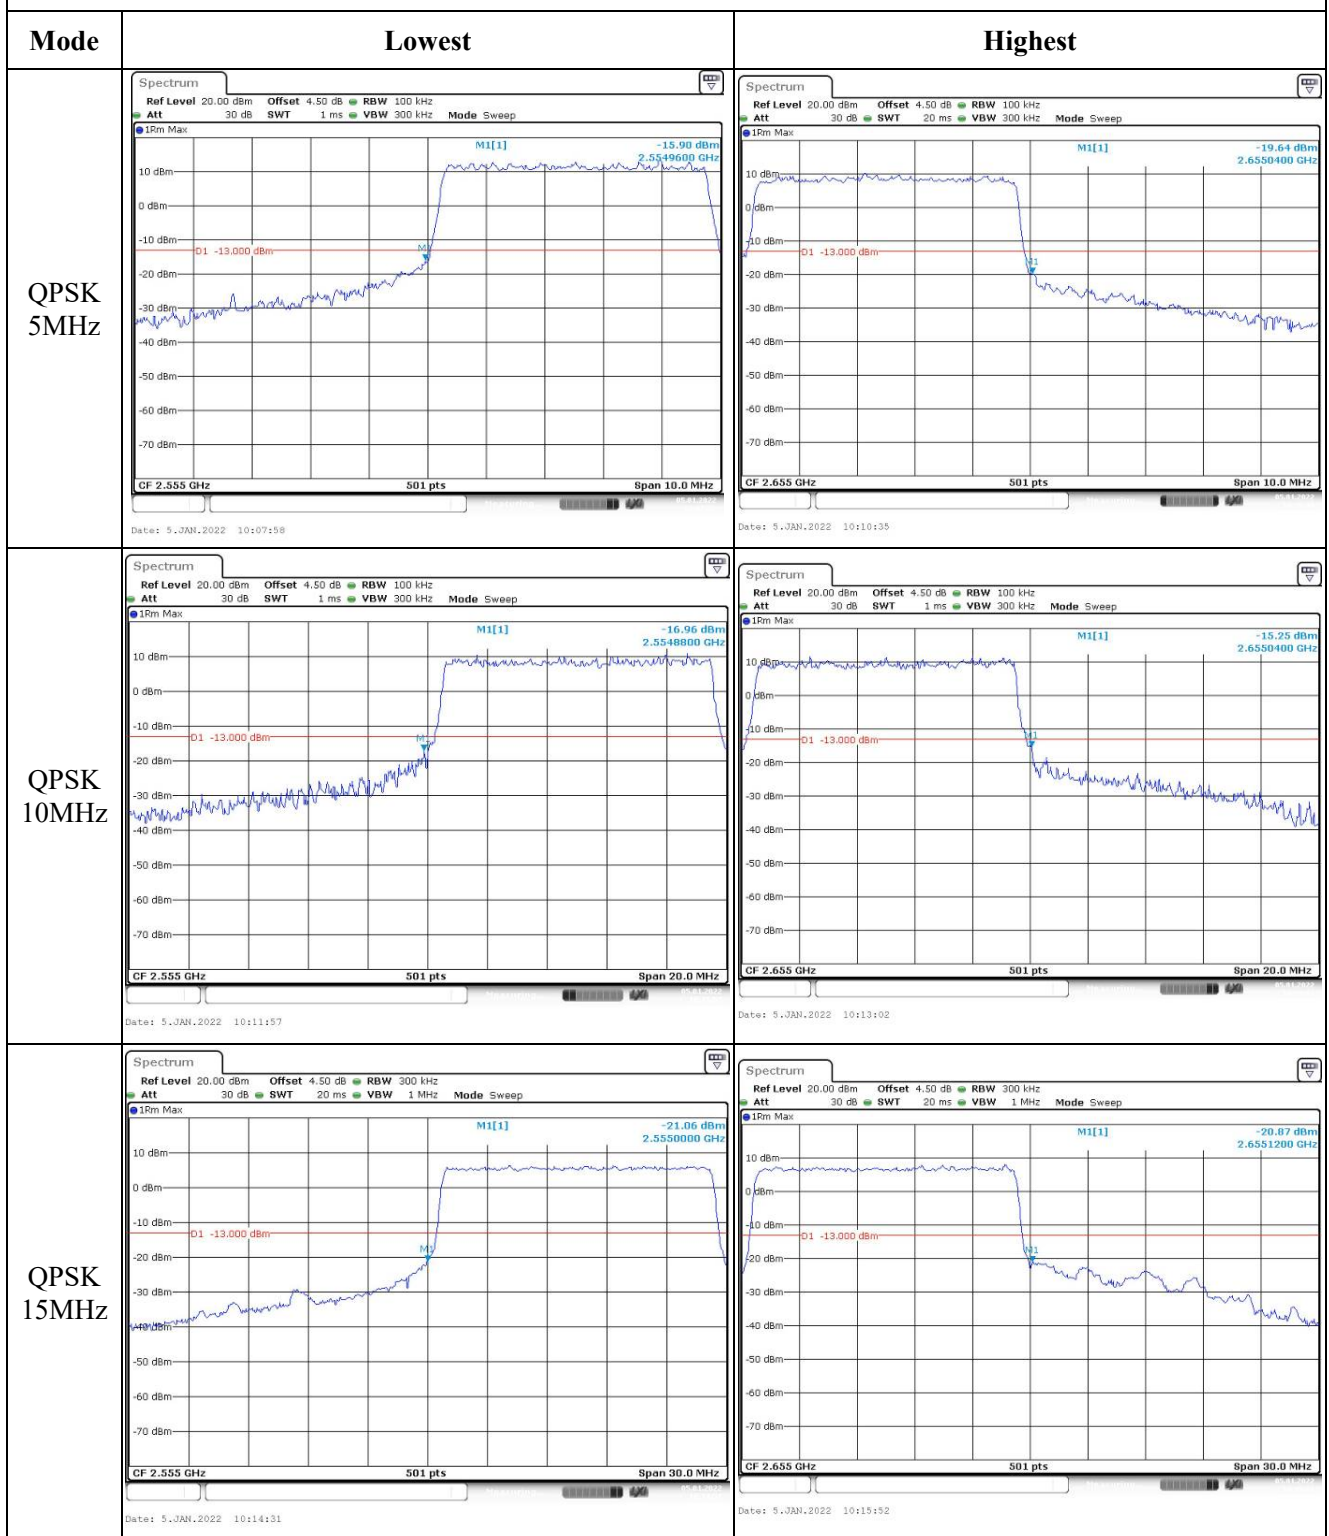


Out of band emission, Band Edge

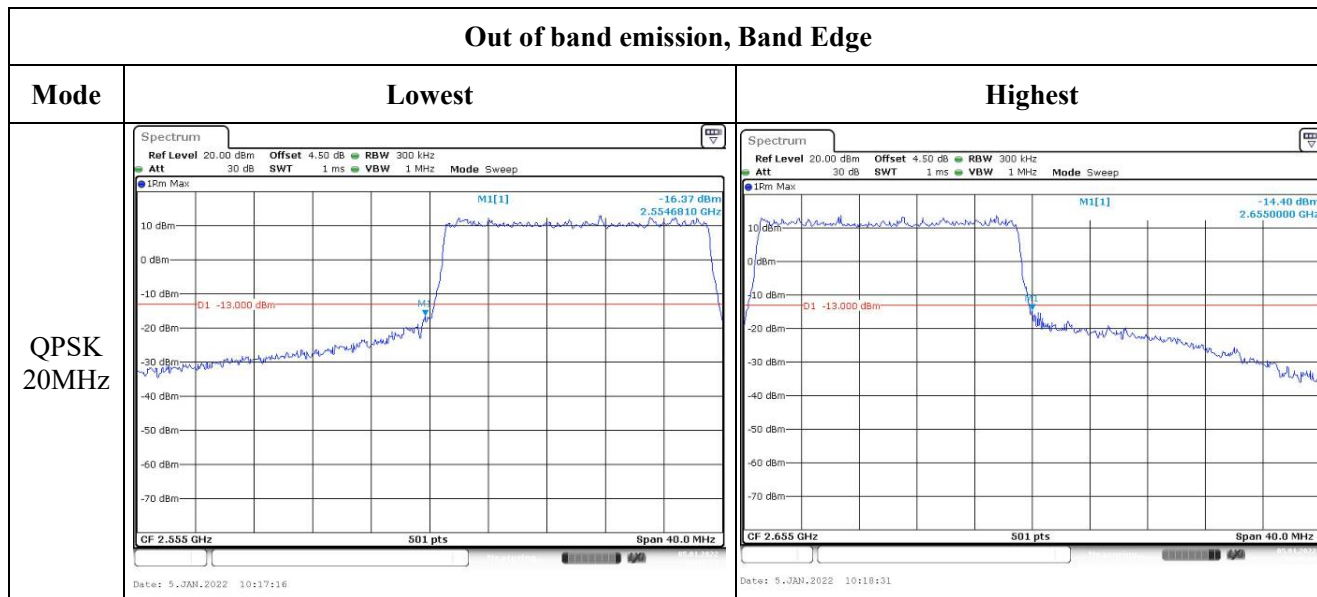

Out of band emission, Band Edge

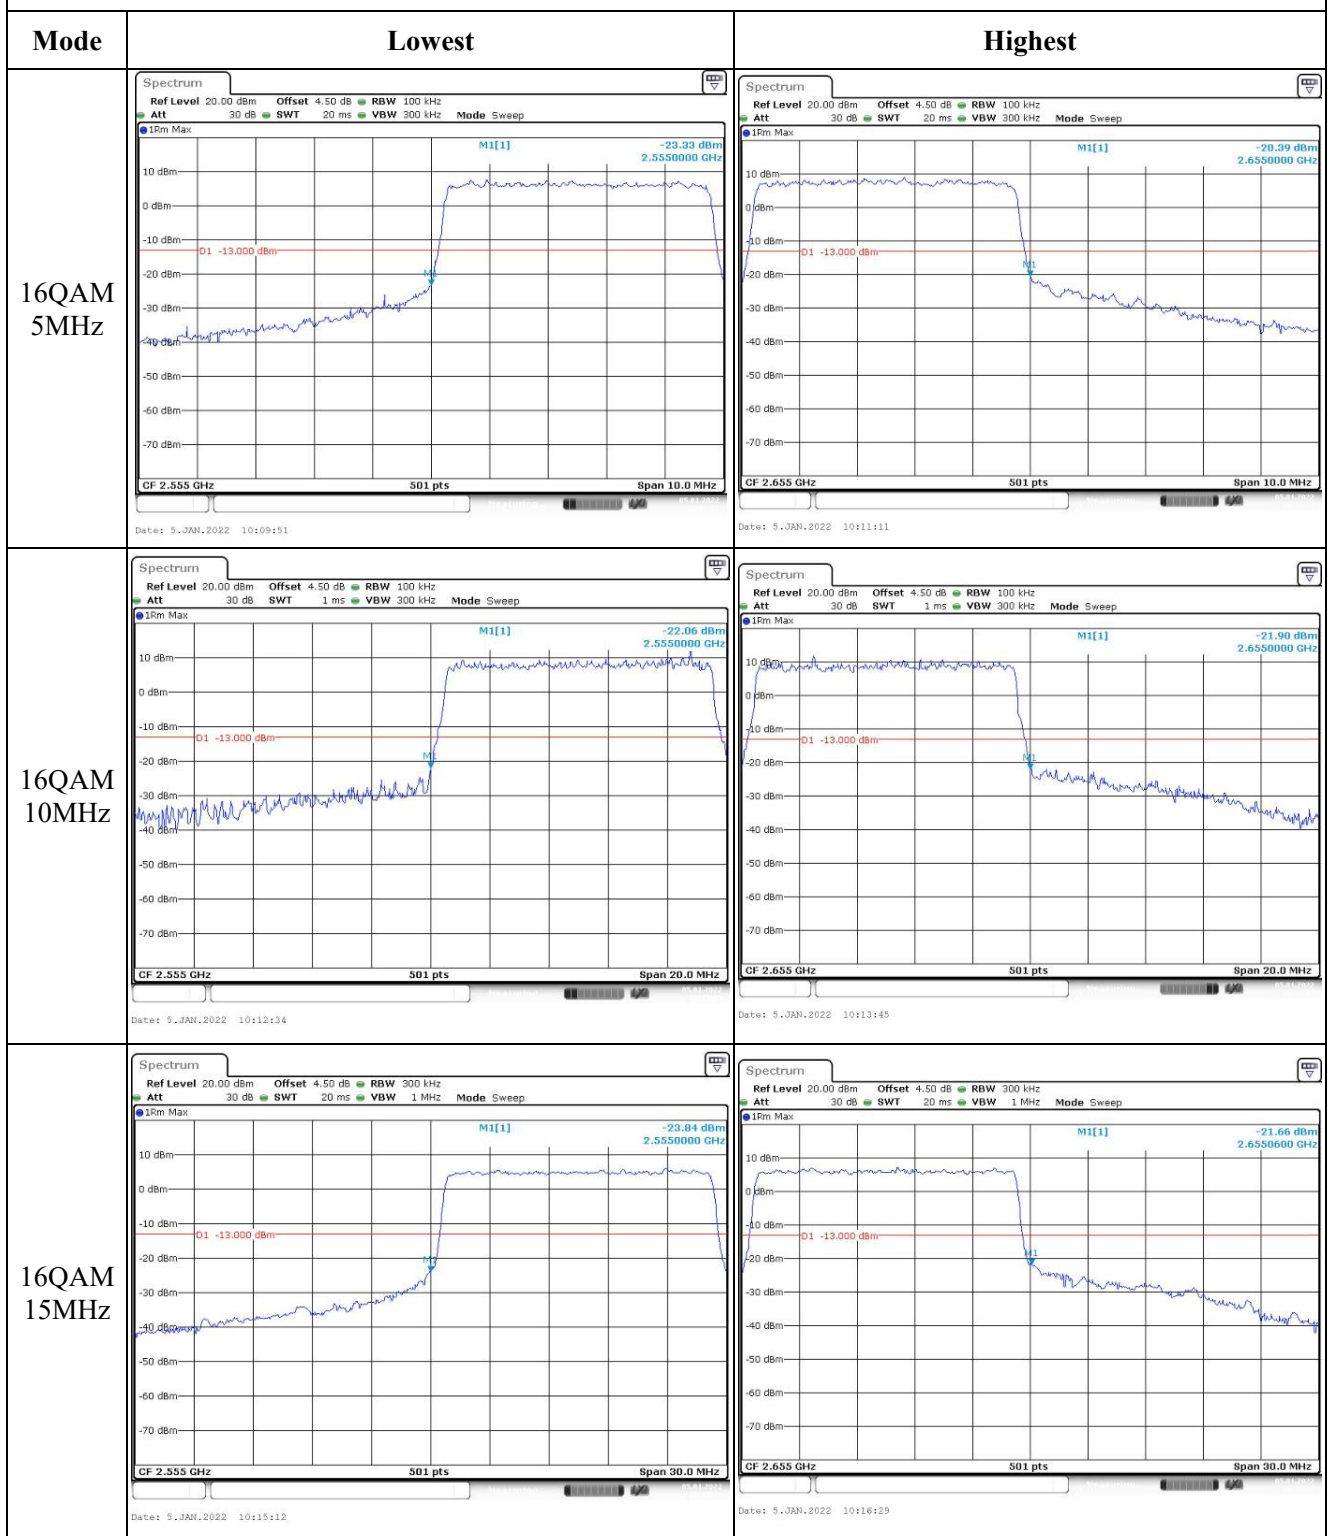

Out of band emission, Band Edge

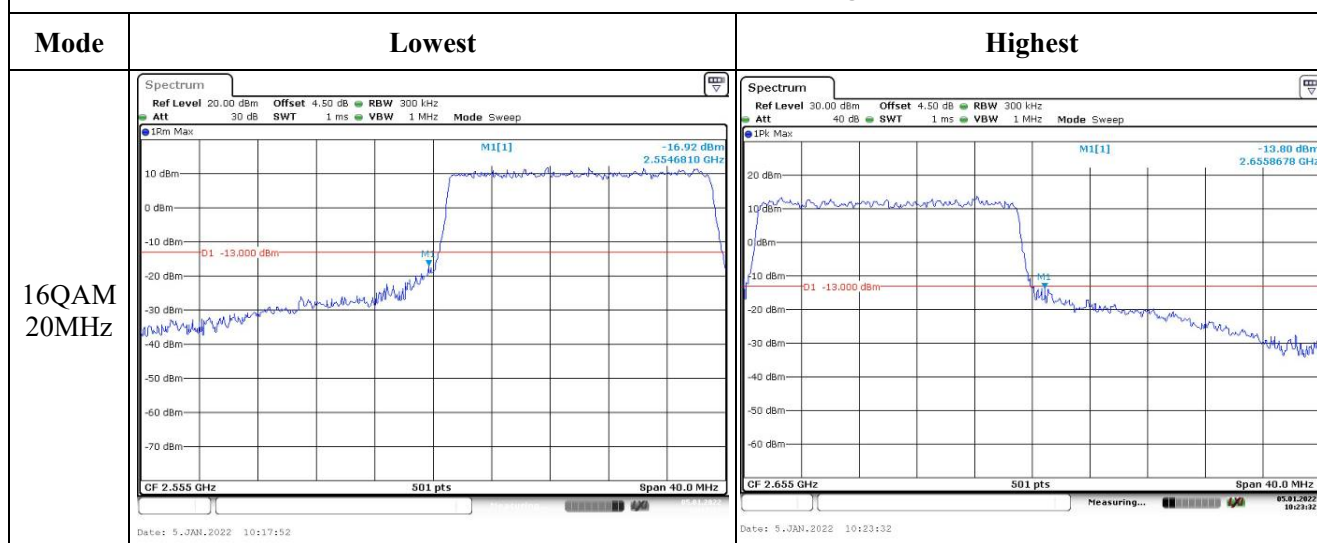

4.11 Antenna Port Test Data and Results for LTE Band 66

Serial Number:	CR21110024-RF-S4	Test Date:	2021-11-27~2022-01-06
Test Site:	RF	Test Mode:	Transmitting
Tester:	Le Qiao	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.1~22.9	Relative Humidity: (%)	40~66	ATM Pressure: (kPa)	101.4~101.7
----------------------	-----------	------------------------------	-------	---------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	Spectrum Analyzer	101474	2021/7/22	2022/7/21
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2021/7/22	2022/7/21
BACL	TEMP&HUMI Test Chamber	BTH-150	30026	2021/7/22	2022/7/22
UNI-T	Multimeter	UT39A+	C210582554	2021/9/30	2022/9/30
E-Microwave	Two-way Splitter	ODP-1-6	OE0120176	Each Time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

EUT Information@ LTE Band 66▲:

Antenna Gain (dBi):	-1	Cable Loss (dB):	0.2
Operation Voltage(V _{DC}):			
Lowest:	3.5	Normal:	3.8
Highest:	4.35		

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1710.7	1745	1779.3
3MHz	1711.5	1745	1778.5
5MHz	1712.5	1745	1777.5
10MHz	1715	1745	1775
15MHz	1717.5	1745	1772.5
20MHz	1720	1745	1770

Test Data:**FCC§2.1046;§ 27.50(d)(4)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	22.22	22.19	22.15	21.09	30
	RB1#3	22.23	22.17	22.10		
	RB1#5	22.29	22.13	22.19		
	RB3#0	21.31	21.28	21.19		
	RB3#3	21.28	21.29	21.17		
	RB6#0	21.39	21.28	21.24		
1.4MHz 16QAM	RB1#0	21.55	22.14	21.00	20.94	30
	RB1#3	21.61	22.10	21.05		
	RB1#5	21.61	22.10	21.03		
	RB3#0	20.65	20.29	20.40		
	RB3#3	20.56	20.35	20.43		
	RB6#0	20.47	20.47	20.32		
3MHz QPSK	RB1#0	22.21	22.35	22.14	21.21	30
	RB1#8	22.18	22.41	22.14		
	RB1#14	22.15	22.33	22.16		
	RB6#0	21.33	21.18	21.16		
	RB6#9	21.33	21.13	21.23		
	RB15#0	21.29	21.16	21.19		
3MHz 16QAM	RB1#0	20.73	21.45	20.84	20.27	30
	RB1#8	20.68	21.38	20.96		
	RB1#14	20.72	21.47	20.93		
	RB6#0	20.48	20.28	20.37		
	RB6#9	20.57	20.24	20.30		
	RB15#0	20.51	20.31	20.26		
5MHz QPSK	RB1#0	22.21	22.35	22.14	21.21	30
	RB1#13	22.18	22.41	22.14		
	RB1#24	22.15	22.33	22.16		
	RB15#0	21.33	21.18	21.16		
	RB15#10	21.33	21.13	21.23		
	RB25#0	21.29	21.16	21.19		
5MHz 16QAM	RB1#0	20.73	21.45	20.84	20.27	30
	RB1#13	20.68	21.38	20.96		
	RB1#24	20.72	21.47	20.93		
	RB15#0	20.48	20.28	20.37		
	RB15#10	20.57	20.24	20.30		
	RB25#0	20.51	20.31	20.26		
10MHz QPSK	RB1#0	22.19	22.23	22.17	21.1	30

	RB1#25	22.30	22.20	22.15		
	RB1#49	22.19	22.22	22.18		
	RB25#0	21.35	21.28	21.15		
	RB25#25	21.24	21.19	21.10		
	RB50#0	21.34	21.20	21.15		
10MHz 16QAM	RB1#0	21.82	21.86	20.63	20.75	30
	RB1#25	21.85	21.87	20.61		
	RB1#49	21.84	21.95	20.68		
	RB25#0	20.61	20.41	20.40		
	RB25#25	20.44	20.38	20.44		
	RB50#0	20.40	20.38	20.29		
15MHz QPSK	RB1#0	22.35	22.22	22.11	21.15	30
	RB1#38	22.25	22.25	22.14		
	RB1#74	22.22	22.25	22.15		
	RB36#0	21.39	21.24	21.15		
	RB36#39	21.35	21.25	21.21		
	RB75#0	21.29	21.18	21.19		
15MHz 16QAM	RB1#0	21.77	21.91	21.63	20.73	30
	RB1#38	21.73	21.87	21.64		
	RB1#74	21.85	21.93	21.66		
	RB36#0	20.38	20.38	20.35		
	RB36#39	20.45	20.46	20.36		
	RB75#0	20.24	20.37	20.51		
20MHz QPSK	RB1#0	21.69	22.27	21.48	21.32	30
	RB1#50	22.47	21.09	22.30		
	RB1#99	22.52	21.40	22.31		
	RB50#0	21.32	21.15	21.25		
	RB50#50	21.46	21.11	21.24		
	RB100#0	21.33	21.22	21.20		
20MHz 16QAM	RB1#0	21.38	21.93	21.88	20.73	30
	RB1#50	21.41	21.19	21.88		
	RB1#99	21.43	21.54	21.91		
	RB50#0	20.42	20.52	20.30		
	RB50#50	20.54	20.57	20.27		
	RB100#0	20.49	20.36	20.46		

Note: EIRP=Conducted Power(dBm) - Cable loss(dB) + Antenna Gain(dBi)

Result:

Pass

Peak-to-average Ratio(PAR)					
Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	5.01	4.87	4.87	13
	RB100#0	5.30	5.39	5.22	13
20MHz 16QAM	RB1#0	5.77	5.30	5.77	13
	RB100#0	6.12	6.38	6.23	13
Result:					Pass

FCC §2.1049, §27.53:Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.096	1.102	1.102	1.260	1.260	1.260
1.4MHz 16QAM	1.108	1.096	1.102	1.266	1.254	1.254
3MHz QPSK	2.707	2.695	2.695	3.000	3.000	2.988
3MHz 16QAM	2.707	2.695	2.695	3.036	3.000	3.012
5MHz QPSK	4.531	4.511	4.511	4.980	5.000	4.980
5MHz 16QAM	4.511	4.531	4.551	5.000	5.020	5.000
10MHz QPSK	8.981	8.942	8.942	9.760	9.760	9.800
10MHz 16QAM	8.942	8.981	8.942	9.680	9.800	9.800
15MHz QPSK	13.473	13.473	13.533	14.940	15.060	15.060
15MHz 16QAM	13.533	13.533	13.533	15.000	15.120	15.120
20MHz QPSK	17.964	17.964	17.964	19.440	19.760	19.840
20MHz 16QAM	17.964	18.044	17.964	19.680	19.920	19.680
Note: The test plots please refer to the Plots of Occupied Bandwidth						

FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.


FCC §2.1051, § 27.53:Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §27.54: Frequency Stability						
Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1710.566	1710.00	1779.471	1780
	-20	3.8	1710.561	1710.00	1779.472	1780
	-10	3.8	1710.563	1710.00	1779.473	1780
	0	3.8	1710.567	1710.00	1779.474	1780
	10	3.8	1710.566	1710.00	1779.475	1780
	20	3.8	1710.569	1710.00	1779.471	1780
	30	3.8	1710.571	1710.00	1779.476	1780
	40	3.8	1710.553	1710.00	1779.477	1780
	50	3.8	1710.574	1710.00	1779.478	1780
Frequency Stability vs. Voltage	20	3.5	1710.537	1710.00	1779.476	1780
	20	4.35	1710.577	1710.00	1779.471	1780
					Result:	Pass


Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1710.522	1710.00	1779.515	1780
	-20	3.8	1710.523	1710.00	1779.516	1780
	-10	3.8	1710.525	1710.00	1779.513	1780
	0	3.8	1710.525	1710.00	1779.513	1780
	10	3.8	1710.523	1710.00	1779.514	1780
	20	3.8	1710.529	1710.00	1779.511	1780
	30	3.8	1710.523	1710.00	1779.515	1780
	40	3.8	1710.525	1710.00	1779.516	1780
	50	3.8	1710.526	1710.00	1779.517	1780
Frequency Stability vs. Voltage	20	3.5	1710.527	1710.00	1779.518	1780
	20	4.35	1710.529	1710.00	1779.511	1780
					Result:	Pass

Test Plots:

Occupied Bandwidth

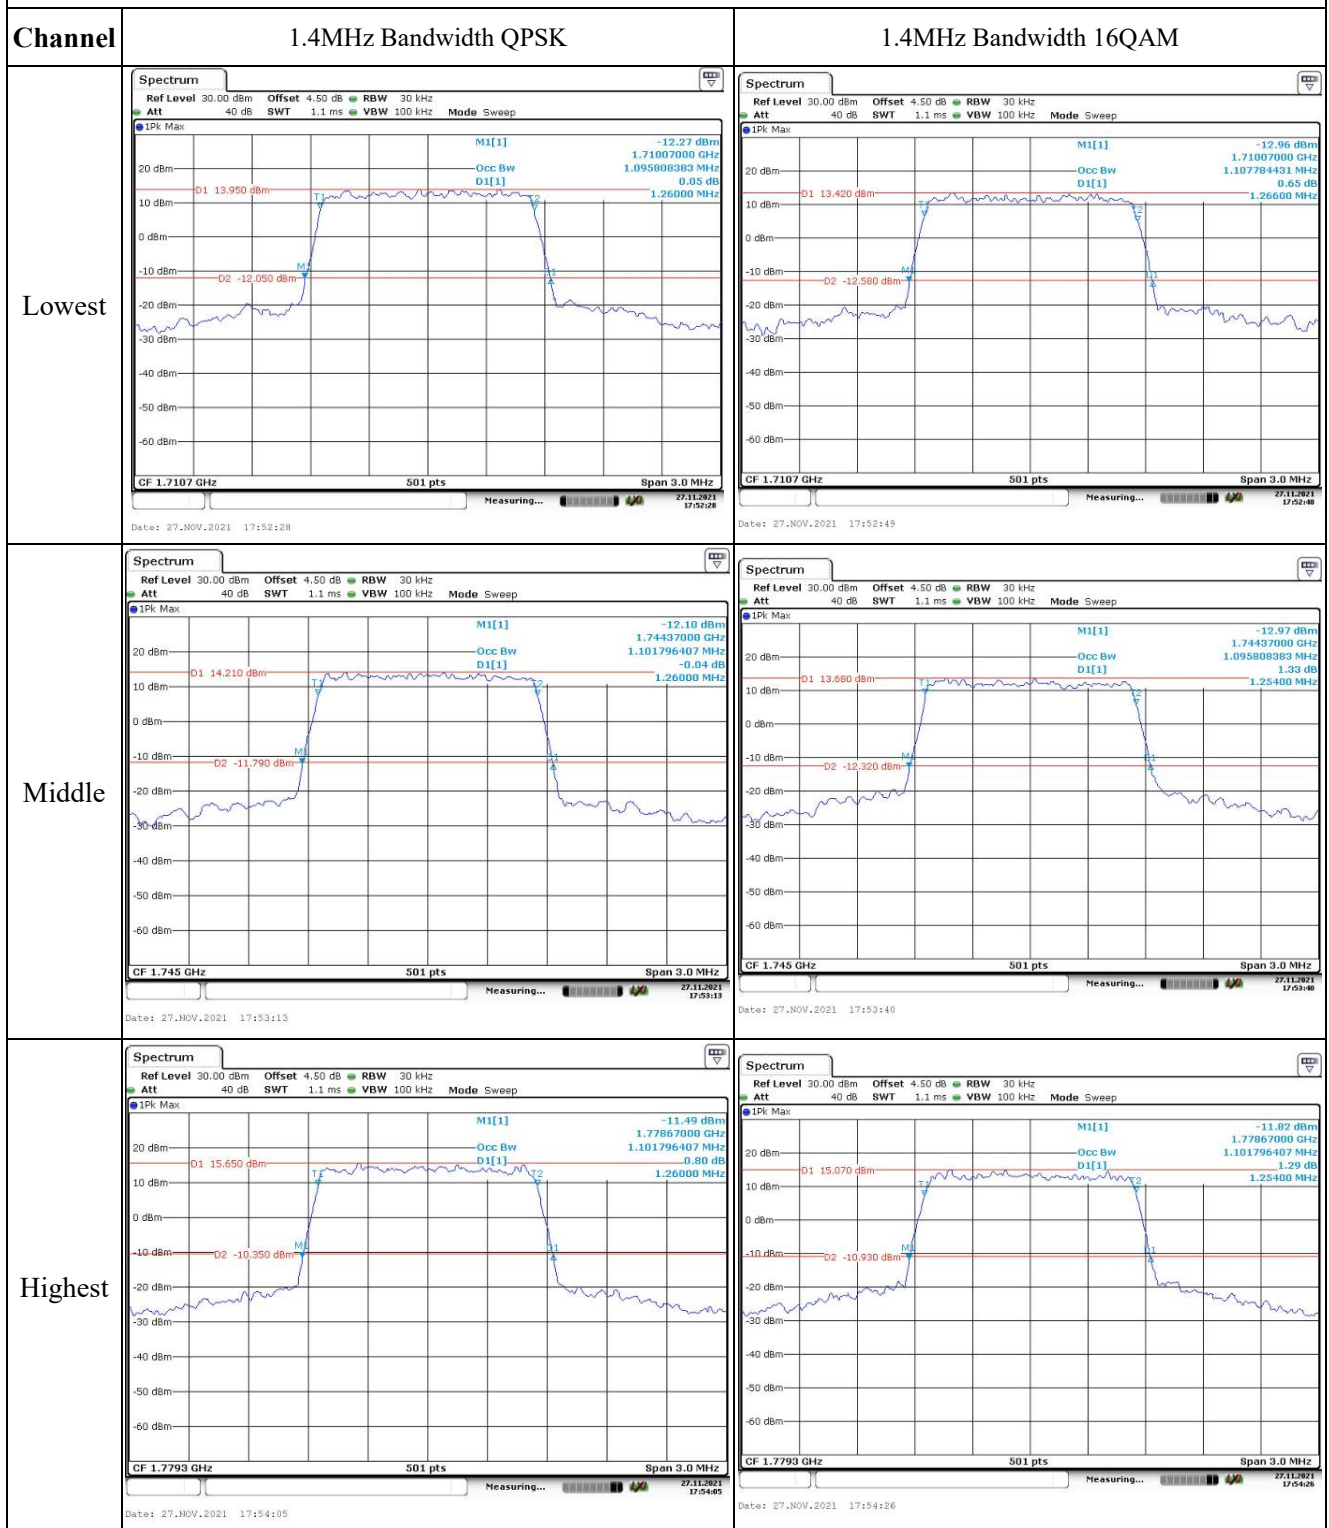

Occupied Bandwidth

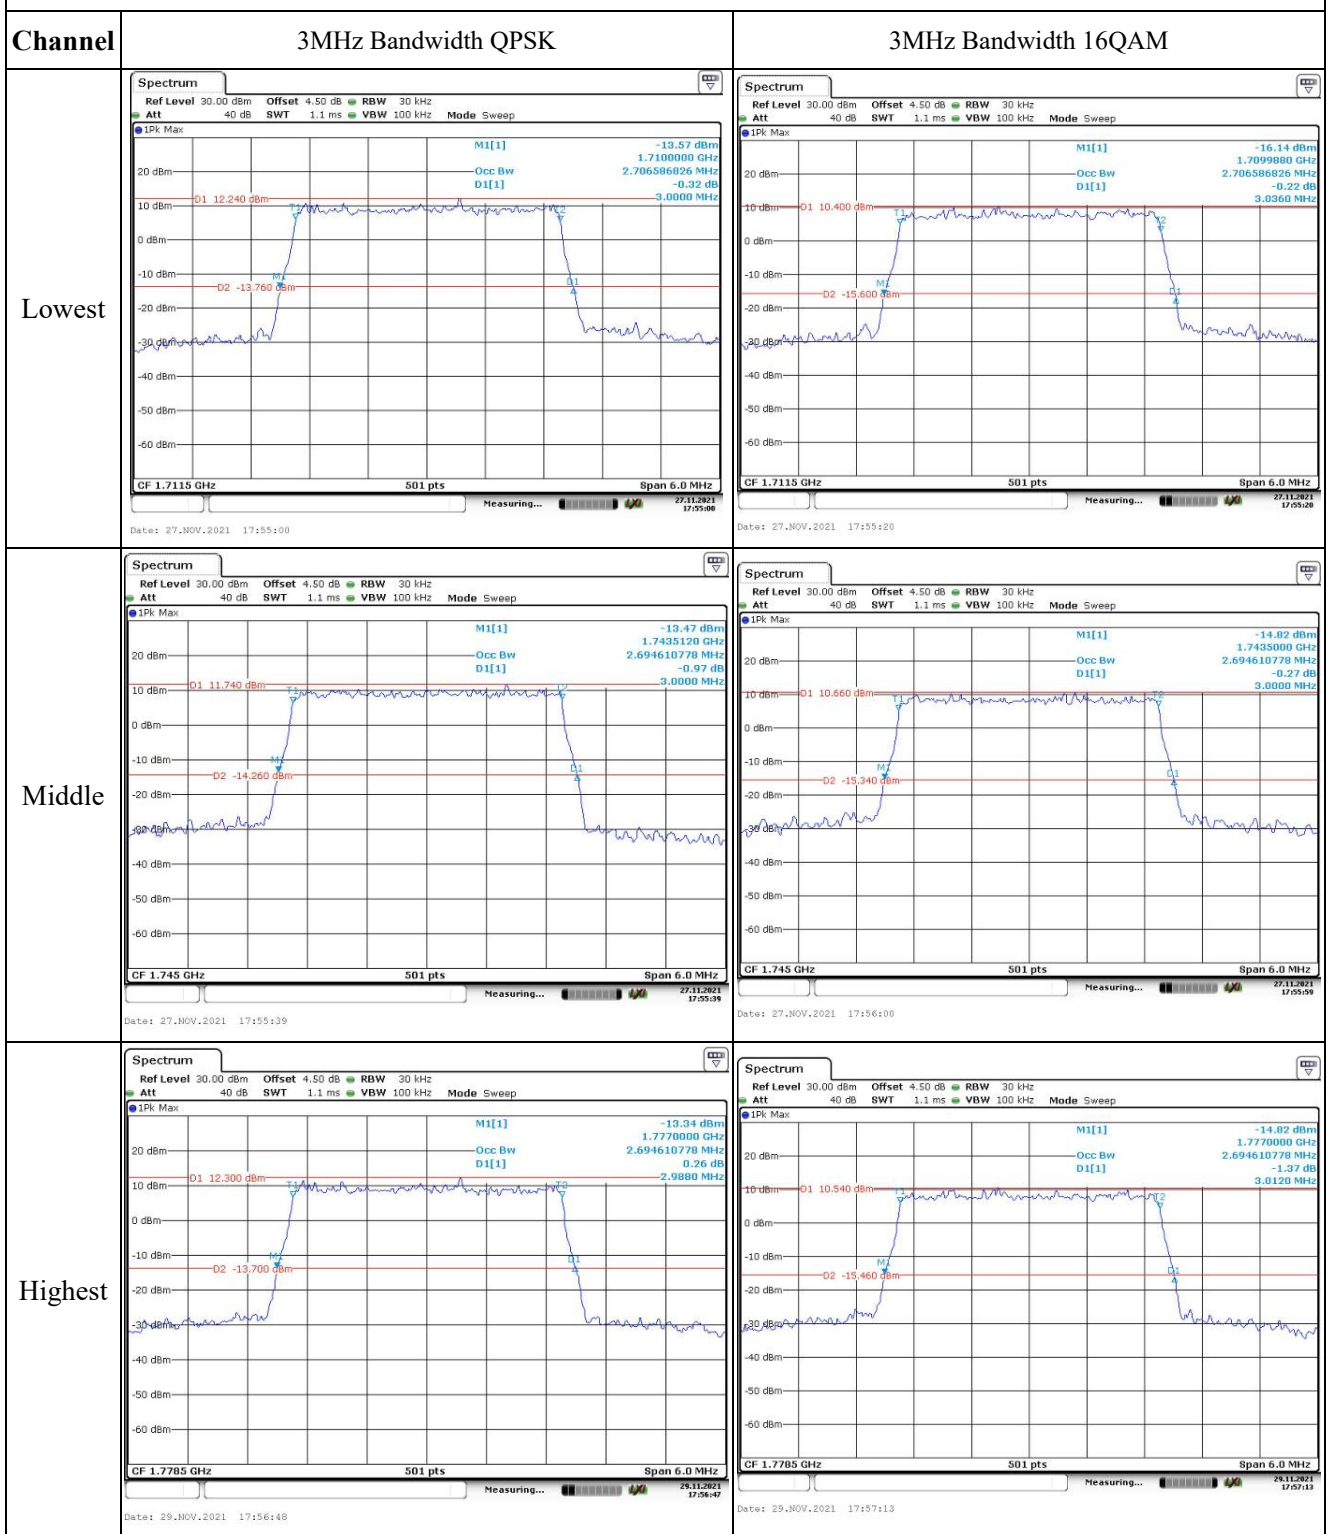



Occupied Bandwidth

Channel



5MHz Bandwidth QPSK

5MHz Bandwidth 16QAM



Lowest

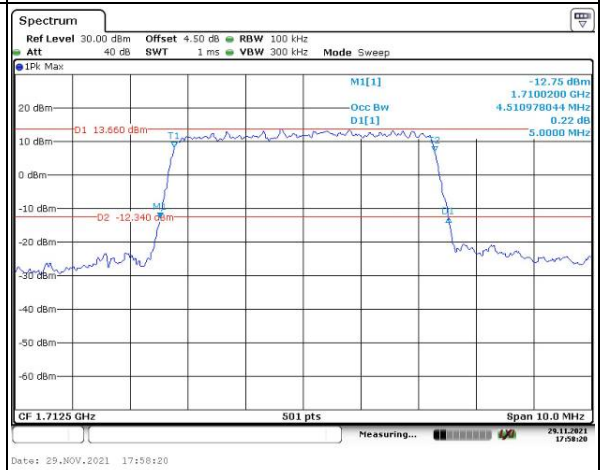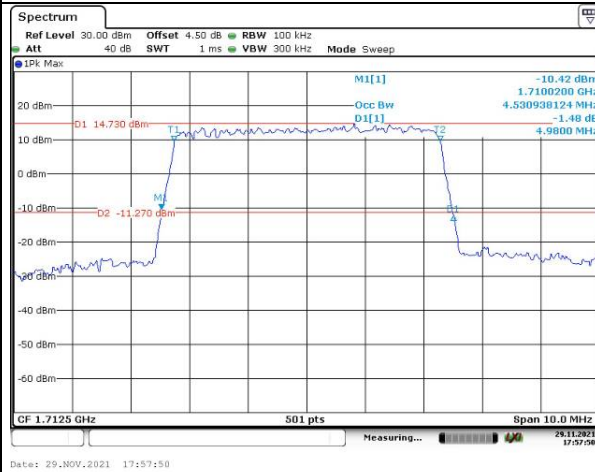


Middle

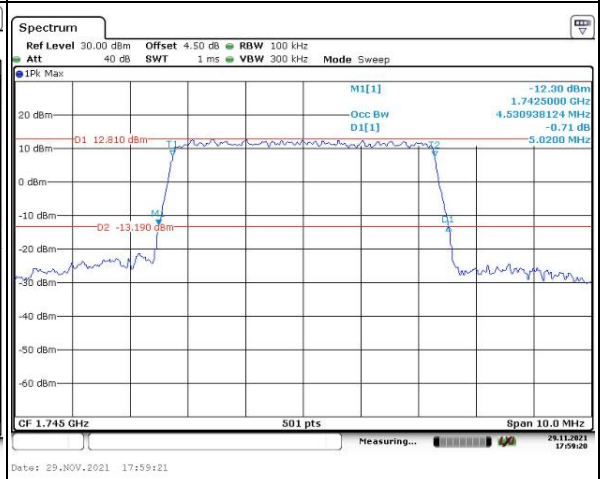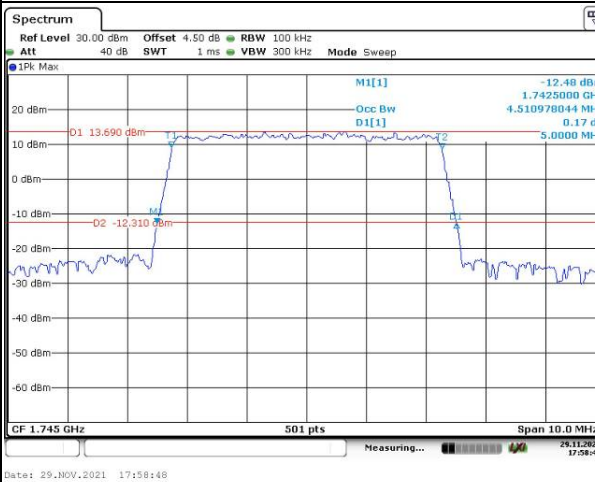

Highest

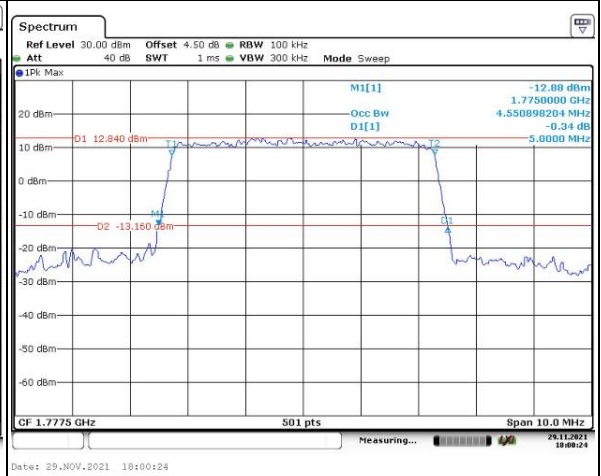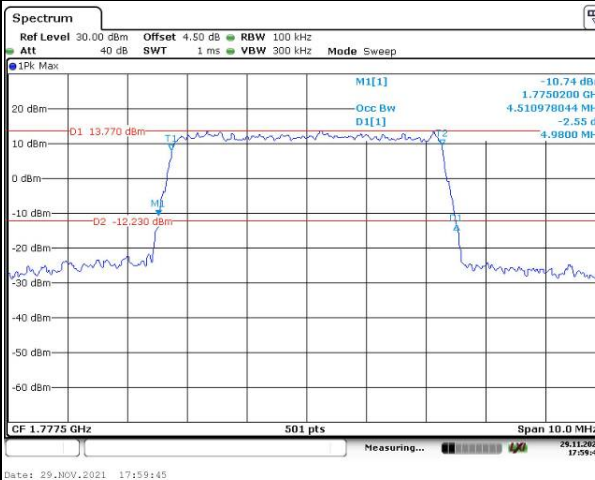

Occupied Bandwidth

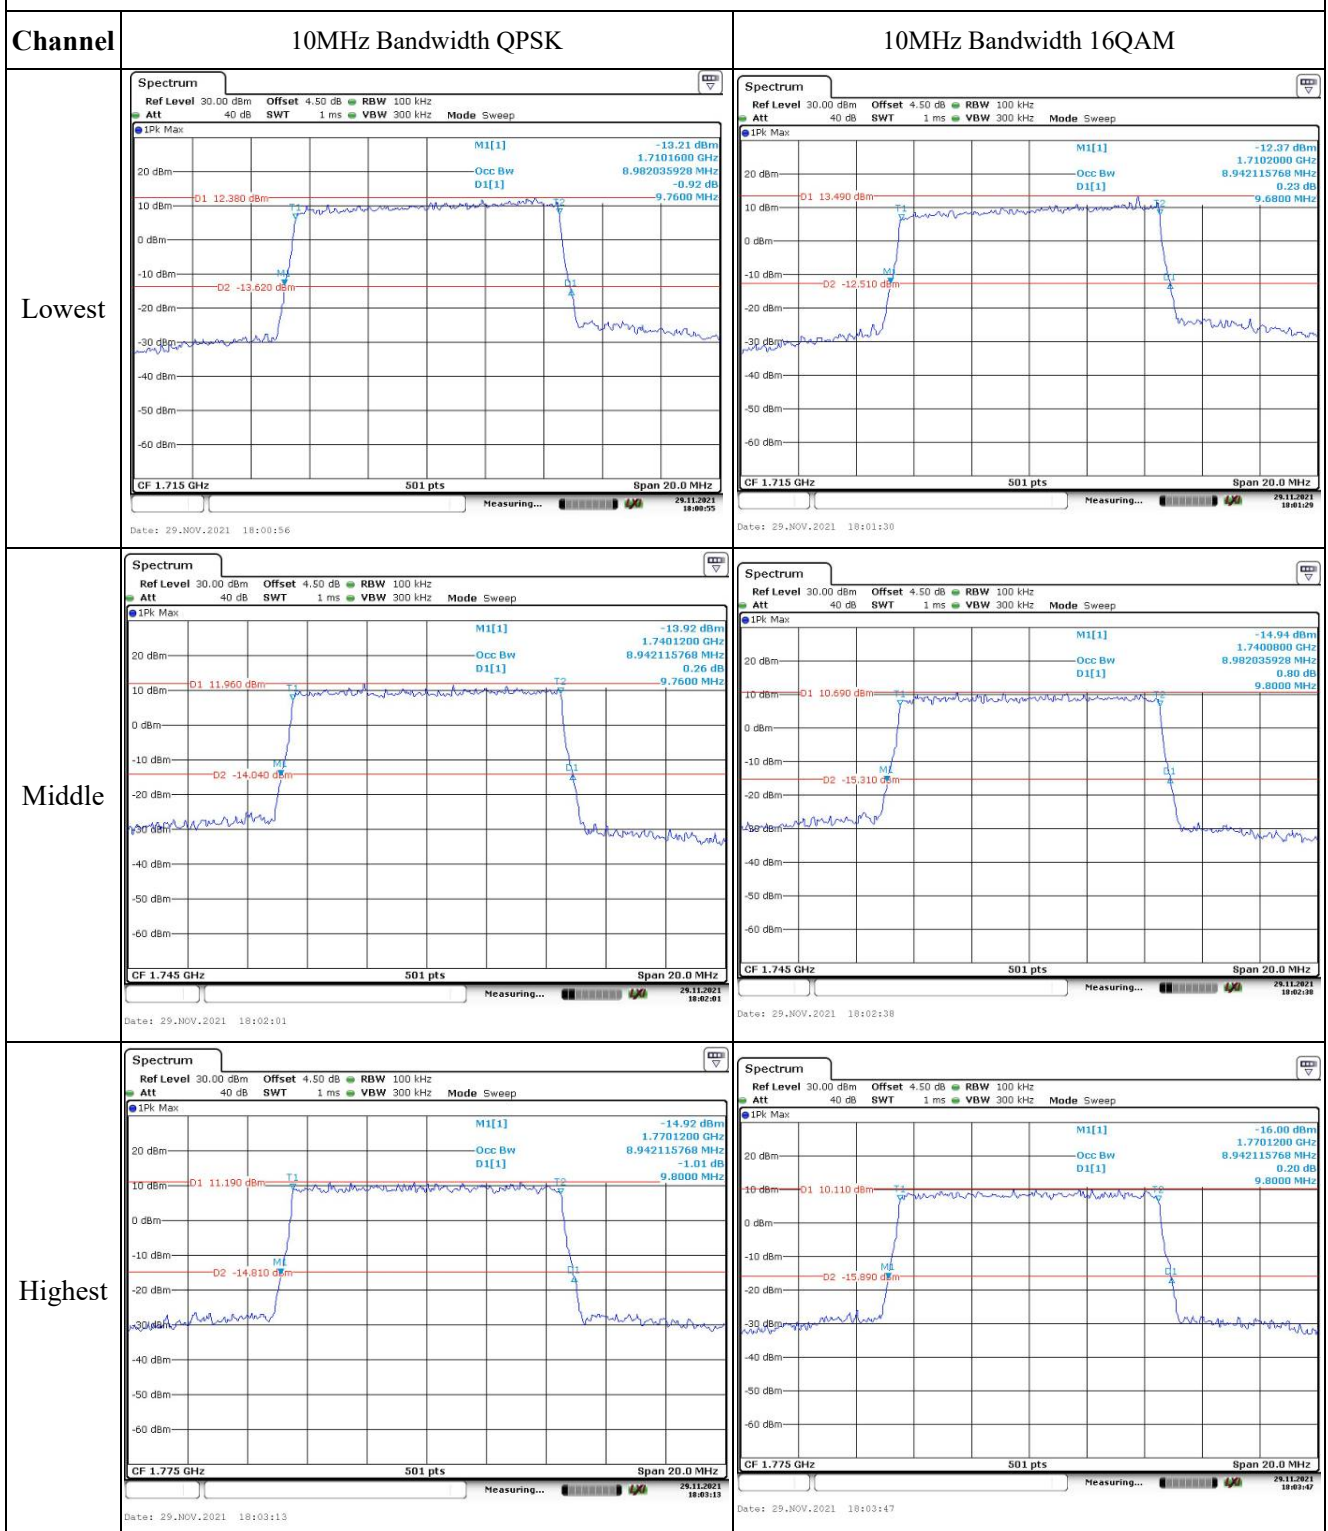


Occupied Bandwidth

Channel



15MHz Bandwidth QPSK

15MHz Bandwidth 16QAM



Lowest

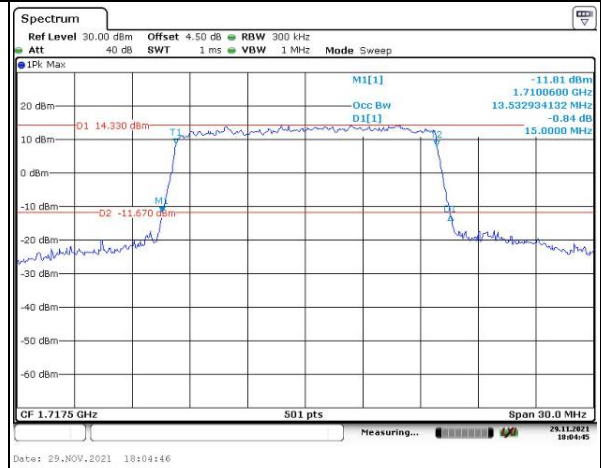


Middle

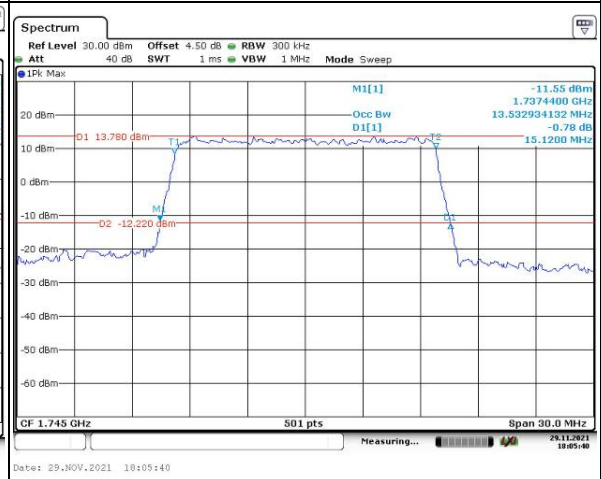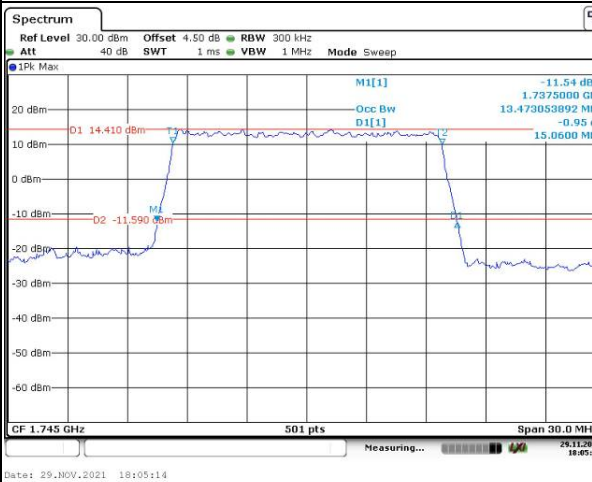

Highest

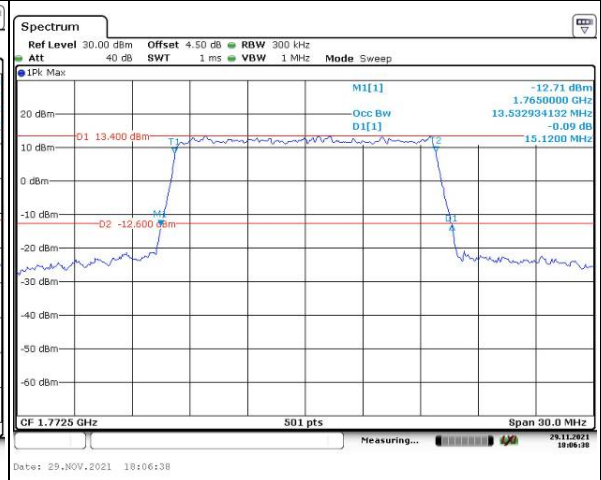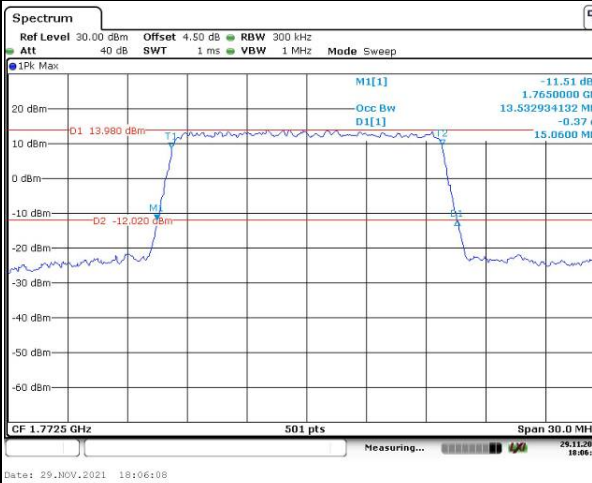

Occupied Bandwidth


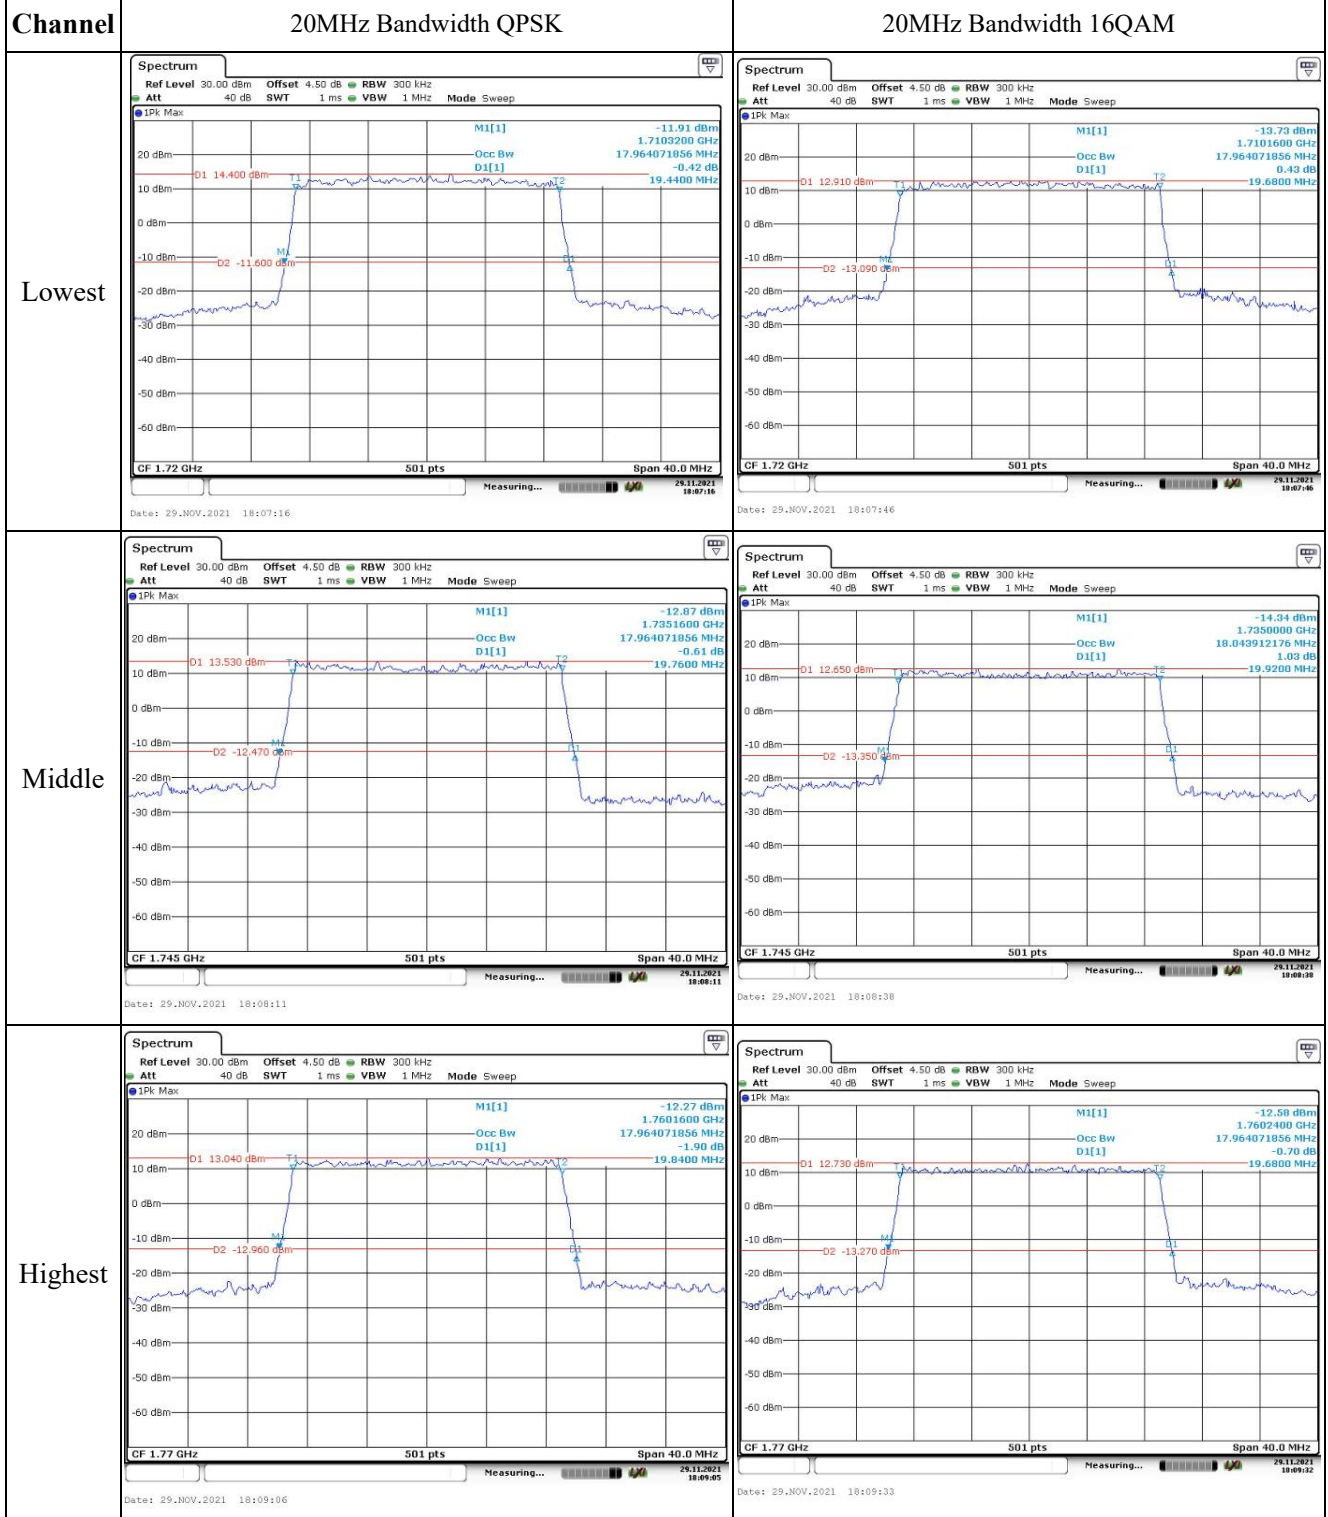


Spurious Emissions at Antenna Terminal



Channel

1.4MHz Bandwidth QPSK



Lowest

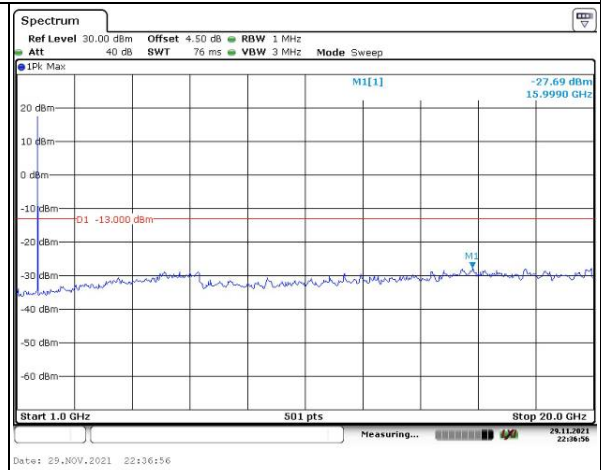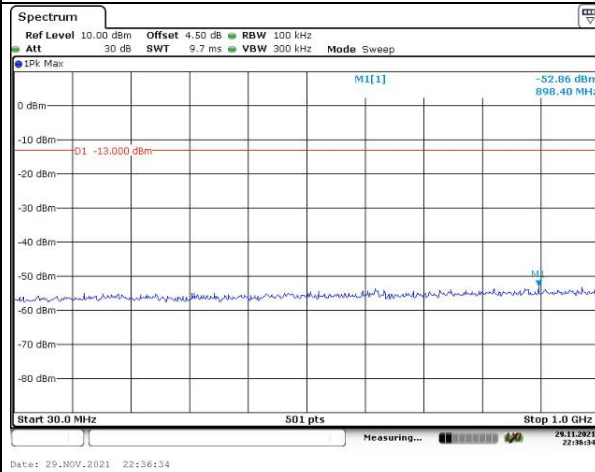

Middle

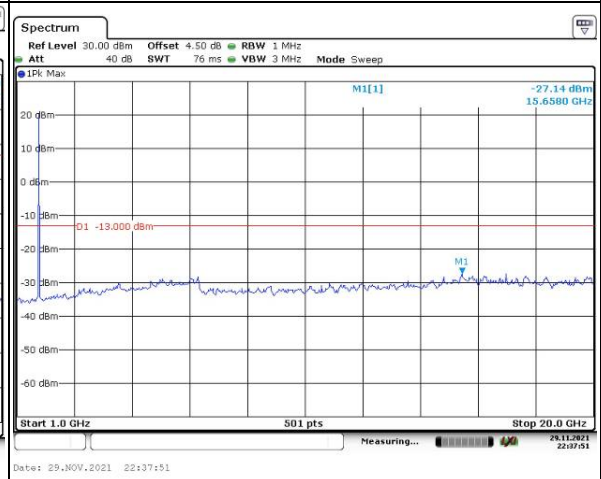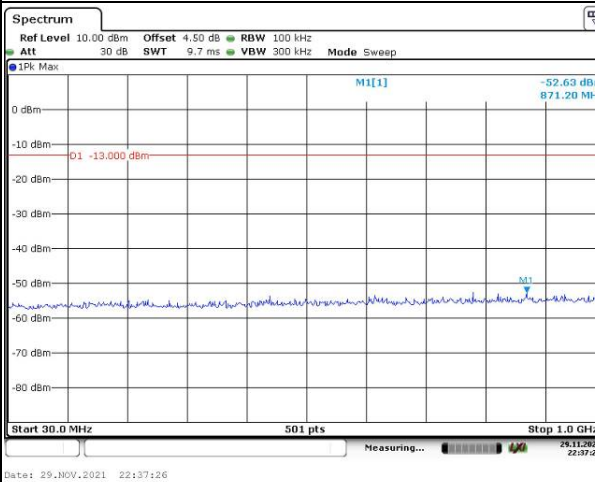

Highest

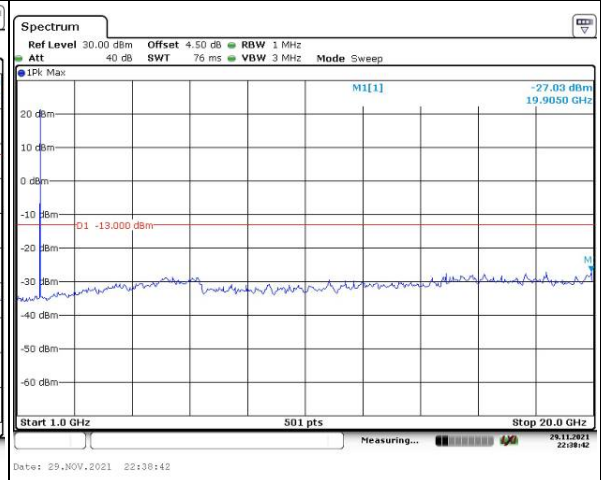
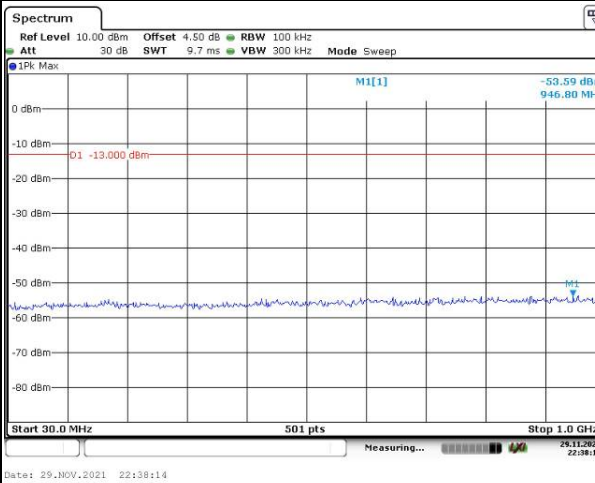


Spurious Emissions at Antenna Terminal



Channel

3MHz Bandwidth QPSK

Lowest

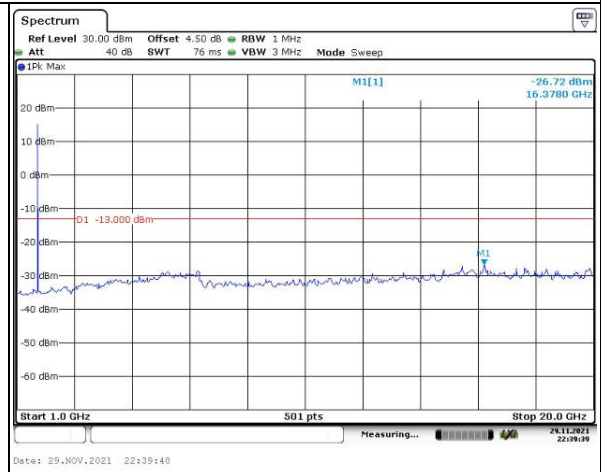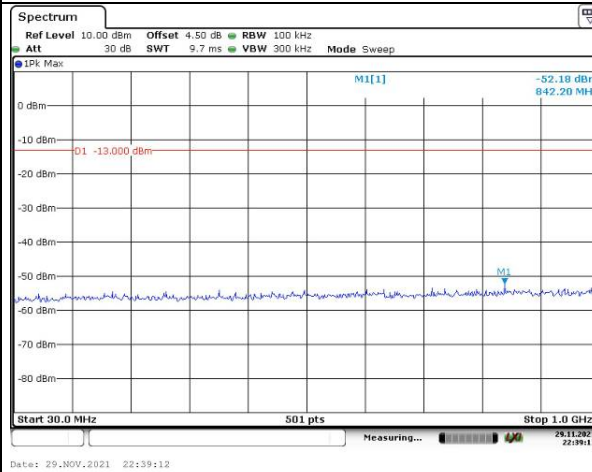

Middle

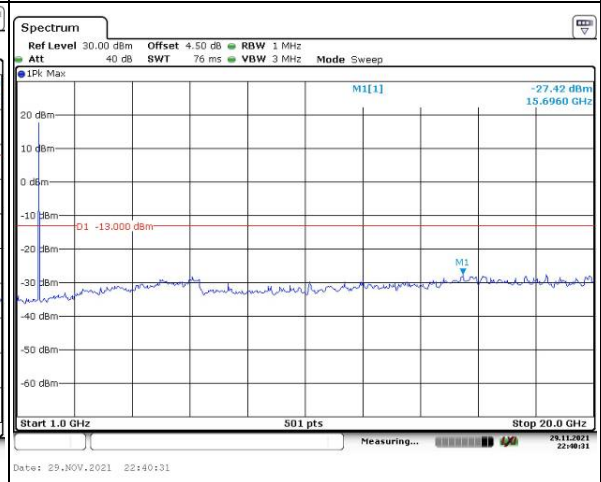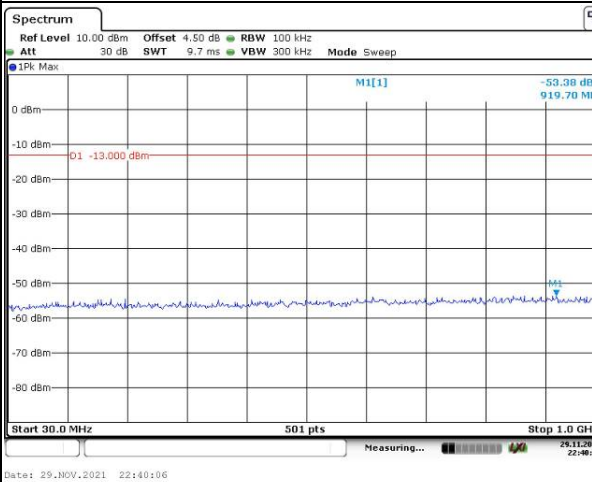

Highest

