



# PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA  
Tel. 410.290.6652 / Fax 410.290.6554  
<http://www.pctestlab.com>



## CERTIFICATE OF COMPLIANCE FCC PART 15.247 Certification

**Applicant Name:**

Panasonic Corporation of North America  
One Panasonic Way, 4B-8  
Secaucus, NJ 07094  
United States

**Date of Testing:**

October 2 - 3, 2006

**Test Site/Location:**

PCTEST Lab., Columbia, MD, USA

**Test Report Serial No.:**

0608220711

**FCC ID:**

ACJ9TGCF-Y51

**APPLICANT:**

Panasonic Corporation of North America

**Model(s):**

CF-Y5

**EUT Type:**

Toughbook Model: CF-Y5

14.25 dBm Conducted (a)

**Max. RF Output Power:**

14.68 dBm Conducted (b)

14.24 dBm Conducted (g)

**Frequency Range:**

2412 - 2462 MHz (DSSS/OFDM)

5745 - 5825 MHz (OFDM)

**FCC Classification:**

Digital Transmission System (DTS)

**FCC Rule Part(s):**

Part 15.247

**Test Device Serial No.:**

6GKSA00231R

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C-63.4-2003.



I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

*Grant Conditions: Listed output power is conducted.*

*PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.*



  
Randy Ortanez  
President



|                                       |   |  |   |  |
|---------------------------------------|---|--|---|--|
| <b>FCC ID:</b> ACJ9TGCF-Y51           |  | <b>FCC Pt. 15.247 CERTIFICATION TEST REPORT<br/>(WLAN 802.11a/b/g)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0608220711 | <b>Test Dates:</b><br>October 2 - 3, 2006   | <b>EUT Type:</b><br>Toughbook Model: CF-Y5                             |   | Page 1 of 49                           |

# TABLE OF CONTENTS

|  |    |
|--|----|
| FCC PART 15.247 MEASUREMENT REPORT .....               | 3  |
| 1.0 INTRODUCTION .....                                 | 4  |
| 1.1 EVALUATION PROCEDURE .....                         | 4  |
| 1.2 SCOPE .....  | 4  |
| 1.3 PCTEST TEST LOCATION .....                         | 4  |
| 2.0 PRODUCT INFORMATION .....                          | 5  |
| 2.1 EQUIPMENT DESCRIPTION .....                        | 5  |
| 2.2 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS .....      | 5  |
| 3.0 DESCRIPTION OF TEST .....                          | 6  |
| 3.1 CONDUCTED EMISSIONS .....                          | 6  |
| 3.2 RADIATED EMISSIONS .....                           | 7  |
| 4.0 ANTENNA REQUIREMENTS .....                         | 8  |
| 5.0 TEST EQUIPMENT CALIBRATION DATA .....              | 9  |
| 6.0 TEST RESULTS .....                                 | 10 |
| 6.1 6DB BANDWIDTH MEASUREMENT – 802.11B/G .....        | 11 |
| 6.2 6DB BANDWIDTH MEASUREMENT – 802.11A (5.8GHZ) ..... | 15 |
| 6.3 OUTPUT POWER MEASUREMENT – 802.11B .....           | 18 |
| 6.4 OUTPUT POWER MEASUREMENT – 802.11G .....           | 19 |
| 6.5 OUTPUT POWER MEASUREMENT – 802.11A (5.8GHZ) .....  | 20 |
| 6.6 POWER SPECTRAL DENSITY (802.11A/B/G) .....         | 21 |
| 6.7 OUT OF BAND EMISSIONS (BAND EDGE) .....            | 27 |
| 6.8 RADIATED MEASUREMENTS .....                        | 30 |
| 6.9 RADIATED RESTRICTED BAND MEASUREMENTS .....        | 37 |
| 6.10 LINE-CONDUCTED TEST DATA .....                    | 38 |
| 6.11 RECEIVER SPURIOUS MEASUREMENTS .....              | 44 |
| 7.0 CONCLUSION .....                                   | 45 |
| EXHIBIT A – LABELING REQUIREMENTS .....                | 46 |
| SAMPLE LABEL & LOCATION .....                          | 46 |
| EXHIBIT B – TEST SETUP PHOTOGRAPHS .....               | 47 |
| EXHIBIT C – EUT EXTERNAL/INTERNAL PHOTOGRAPHS .....    | 48 |
| EXHIBIT D – USER’S MANUAL .....                        | 49 |

|                                       |   |  |   |  |
|---------------------------------------|---|--|---|--|
| <b>FCC ID:</b> ACJ9TGCF-Y51           |  | <b>FCC Pt. 15.247 CERTIFICATION TEST REPORT<br/>(WLAN 802.11a/b/g)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0608220711 | <b>Test Dates:</b><br>October 2 - 3, 2006   | <b>EUT Type:</b><br>Toughbook Model: CF-Y5                             |   | Page 2 of 49                           |



# MEASUREMENT REPORT



## FCC Part 15.247

### A. § 2.1033 General Information

**APPLICANT:** Panasonic Corporation of North America  
**APPLICANT ADDRESS:** One Panasonic Way, 4B-8  
 Secaucus, NJ 07094  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 6660-B Dobbin Road, Columbia, MD 21045 USA  
**FCC RULE PART(S):** Part 15.247  
**MODEL NAME:** CF-Y5  
**FCC ID:** ACJ9TGCF-Y51  
**Test Device Serial No.:** 6GKSA00231R ☐ Production ☒ Pre-Production ☐ Engineering  
**FCC CLASSIFICATION:** Digital Transmission System (DTS)  
**DATE(S) OF TEST:** October 2 - 3, 2006  
**TEST REPORT S/N:** 0608220711



### A.1 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



|                                       |   |   |   |  |
|---------------------------------------|---|---|---|--|
| <b>FCC ID:</b> ACJ9TGCF-Y51           |  | <b>FCC Pt. 15.247 CERTIFICATION TEST REPORT</b><br>(WLAN 802.11a/b/g) |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0608220711 | <b>Test Dates:</b><br>October 2 - 3, 2006   | <b>EUT Type:</b><br>Toughbook Model: CF-Y5                            |   | Page 3 of 49                           |

## 1.0 INTRODUCTION

### 1.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) and FCC Public Notice dated July 12, 1995 entitled "Guidance on Measurement for Direct Sequence Spread Spectrum System" were used in the measurement of **Panasonic Toughbook Model: CF-Y5 FCC ID: ACJ9TGCF-Y51**.

Deviation from measurement procedure.....None

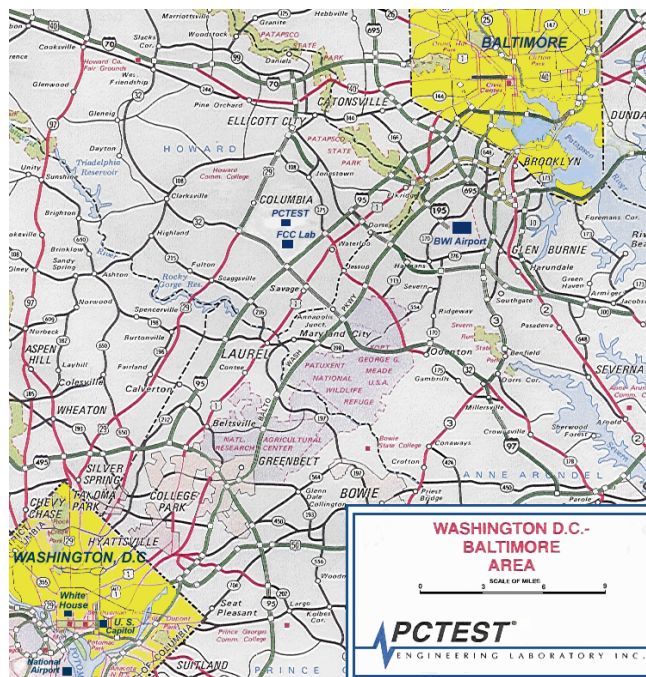
### 1.2 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.



### 1.3 PCTEST Test Location

The map at the right shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity are, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1.3-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006 and Industry Canada.



**Figure 1.3-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area**

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 4 of 49                    |

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Panasonic Toughbook Model: CF-Y5 FCC ID: ACJ9TGCF-Y51**. The EUT consisted of the following components(s):



| Manufacturer / Description                         | FCC ID       | Model     |
|--|--------------|-----------|
| Panasonic Toughbook Model: CF-Y5                   | ACJ9TGCF-Y51 | CF-Y5     |
| Intel PRO/Wireless Network Module                  | PD9WM3945ABG | WM3945ABG |
| Taiyo Yuden Bluetooth Module                       | N/A          | EYSF1CSMX |
| Express Mini-PCI USB Wireless CDMA 1x EV-DO Module | N7N-MC5720   | MC5720    |

Table 2-1. EUT Equipment Description

### 2.2 EMI Suppression Device(s)/Modifications

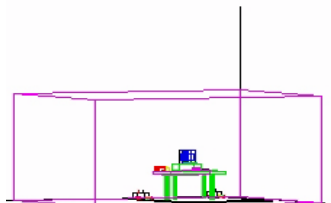
EMI suppression device(s) added and/or modifications made during testing.

- None

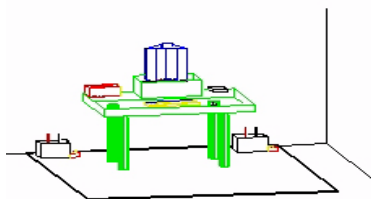
|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 5 of 49                    |

## 3.0 DESCRIPTION OF TEST

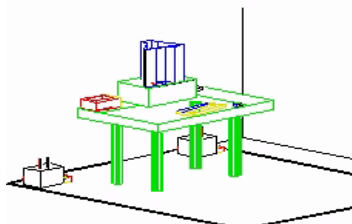
### 3.1 Conducted Emissions



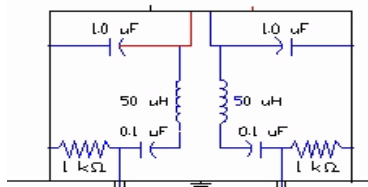
**Figure 3.1-1. Shielded Enclosure Line-Conducted Test Facility**



**Figure 3.1-2. Line Conducted Emission Test Set-Up**





**Figure 3.1-3. Wooden Table & Bonded LISNs**



**Figure 3.1-4. LISN Schematic Diagram**

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see Figure 3.1-1). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see Figure 3.1-2). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (See Figure 3.1-3). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of ½". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (See Figure 3.1-4). All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The frequencies producing the maximum level were re-examined using an EMI/Field Intensity Meter and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Exhibit B. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator.

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 6 of 49                    |



## 3.2 Radiated Emissions

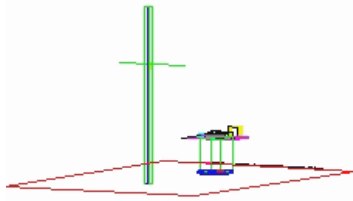


Figure 3.2-1. 3-Meter Test Site

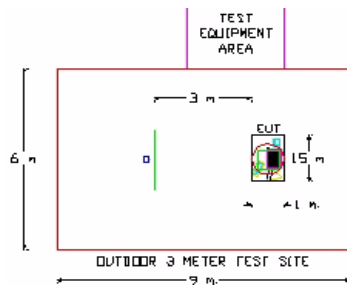


Figure 3.2-2. Dimensions of Outdoor Test Site

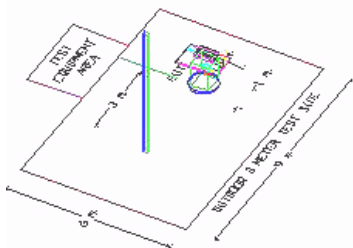


Figure 3.2-3. Turntable and System Setup

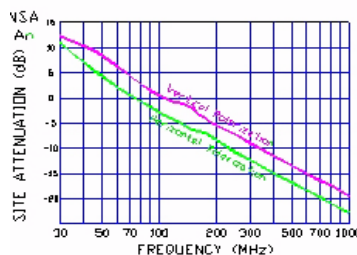




Figure 3.2-4. Normalized Site Attenuation Curves (H&V)

Preliminary measurements were made indoors at 1-meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, and turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using a bi-conical antenna and from 200 to 1000 MHz using a log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using Roberts™ Dipole antennas or horn antennas (see Figure 3.2-1). The test equipment was placed on a wooden and plastic bench situated on a 1.5m x 2m area adjacent to the measurement area (see Figure 3.2-2). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1MHz depending on the frequency or type of signal. Above 1GHz the detector function was set to CISPR average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3.2-3). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Exhibit B. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3.2-4.

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 7 of 49                    |

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Toughbook Model: CF-Y5 are **permanently attached**.
- There are provisions for connection to an external antenna. Please refer to Panasonic's application cover letter for details.



### Conclusion:

The **Panasonic Toughbook Model: CF-Y5 FCC ID: ACJ9TGCF-Y51** unit complies with the requirement of §15.203.

| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
|-----|-----------------|-----|-----------------|
| 1   | 2412            | 7   | 2442            |
| 2   | 2417            | 8   | 2447            |
| 3   | 2422            | 9   | 2452            |
| 4   | 2427            | 10  | 2457            |
| 5   | 2432            | 11  | 2462            |
| 6   | 2437            |     |                 |

| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
|-----|-----------------|-----|-----------------|
| -   | :               | 157 | 5785            |
| -   | :               | -   | :               |
| -   | :               | -   | :               |
| -   | :               | -   | :               |
| -   | :               | -   | :               |
| 149 | 5745            | 165 | 5825            |

Table 4.1 Frequency/ Channel Operations

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 8 of 49                    |





## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

| TYPE   | MODEL                           | CAL. DUE DATE | CAL. INTERVAL | SERIAL No.       |
|--|---------------------------------|---------------|---------------|------------------|
| Microwave Spectrum Analyzer                        | Agilent E4448A (3Hz-50GHz)      | 09/22/07      | Annual        | US42510244       |
| Spectrum Analyzer                                  | HP 8566B (100Hz-22GHz)          | 12/22/06      | Annual        | 3638A08713       |
| PSG Signal Generator                               | Agilent E8257D (250kHz-20GHz)   | 02/11/07      | Annual        | MY45470194       |
| Universal Power Meter                              | Gigatronics 8651A (50MHz-18GHz) | 07/28/07      | Annual        | 1834052          |
| Power Sensor                                       | Gigatronics 80701A              | 04/11/07      | Annual        | 1833460          |
| Quasi-Peak Adapter                                 | HP 85650A                       | 12/22/06      | Annual        | 2043A00301       |
| Preamplifier                                       | HP 8449B (1-26.5GHz)            | 12/22/06      | Annual        | 3008A00985       |
| Attenuation/Switch Driver                          | HP 11713A                       | 12/22/06      | Annual        | N/A              |
| Preselector  | HP 85685A (20Hz-2GHz)           | 12/22/06      | Annual        | N/A              |
| 6dB Resolution Bandwidth Spectrum Analyzer Display | OPT 462                         | 12/22/06      | Annual        | 3701A22204       |
| Ailtech/Eaton Adapter                              | CCA-7 CISPR/ANSI QP Adapter     | 12/19/06      | Annual        | 0194-04082       |
| Ailtech/Eaton Receiver                             | NM 37/57A (30MHz – 1GHz)        | 06/07/07      | Annual        | 0805-03334       |
| Horn Antenna                                       | EMCO Model 3115 (1-18GHz)       | 08/25/07      | Bi-Annual     | 9704-5182        |
| Horn Antenna                                       | EMCO Model 3116 (18-40GHz)      | 08/25/07      | Bi-Annual     | 9203-2178        |
| Roberts Dipoles                                    | Compliance Design (1 set) A100  | 08/31/07      | Bi-Annual     | 5118             |
| EMCO Dipoles (2)                                   | N/A                             | 05/08/08      | Bi-Annual     | 00023951         |
| SOLAR LISN (2)                                     | 8012-50                         | 11/18/07      | Bi-Annual     | 0313233, 0310234 |
| Microwave Cables                                   | MicroCoax (1.0-26.5GHz)         | 02/26/07      | Annual        | N/A              |

**Table 5-1. Annual Test Equipment Calibration Schedule**

|                                       |   |  |   |  |
|---------------------------------------|---|--|---|--|
| <b>FCC ID:</b> ACJ9TGCF-Y51           |  | <b>FCC Pt. 15.247 CERTIFICATION TEST REPORT<br/>(WLAN 802.11a/b/g)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0608220711 | <b>Test Dates:</b><br>October 2 - 3, 2006   | <b>EUT Type:</b><br>Toughbook Model: CF-Y5                             |   | Page 9 of 49                           |

## 6.0 TEST RESULTS

### Summary

The intentional radiator has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards. The radio was transmitting at full power on the specified channels and at a data rate(s) specified above. The channels tested are high, middle and low of the allocated bands. Final system data was gathered in a mode that tended to maximize emissions by varying the orientation of the EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization. This unit was tested with all possible data rate and transmission mode combinations and the worst case is reported with the unit transmitting at 1 Mbps in "b" mode.



Method/System: Digital Transmission System (DTS)

Data Rate(s) Tested: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)

6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (a/g)

| FCC Part Section(s)             | RSS 210 Section    | Test Description  | Test Limit   | Test Condition                         | Test Result |
|---------------------------------|--------------------|---|--|--|-------------|
| <b>TRANSMITTER MODE (TX)</b>    |                    |   |  |  |             |
| 15.247(a)(2)                    | RSS-210 [A8.2 (1)] | 6dB Bandwidth   | > 500kHz   | Conducted                              | PASS        |
| 15.247(b)(3)                    | RSS-210 [A8.4 (4)] | Transmitter Output Power  | < 1 Watt   |  | PASS        |
| 15.247(e)                       | RSS-210 [A8.2 (2)] | Transmitter Power Spectral Density  | < 8dBm / 3kHz Band   |  | PASS        |
| 15.247(d)                       | RSS-210 [A8.5]     | Occupied Band Width<br>Out-of-Band Emissions (Band Width at 20dB below)           | Radiated <20dBc. Emissions in restricted bands must meet the radiated limits detailed in 15.209                                      | Radiated<br>(30MHz-1GHz)<br>(1-25 GHz) | PASS        |
| 15.205<br>15.209                | RSS-210 [A8.5]     | General Field Strength Limits<br>(Restricted Bands and Radiated Emission Limits)  | < FCC 15.209 limits or<br>< RSS-210 table 3 limits<br>Emissions in restricted bands must meet the radiated limits detailed in 15.209 |  | PASS        |
| 15.207                          | RSS-Gen [7.2.2]    | AC Conducted Emissions<br>150kHz – 30MHz  | EN55022  | Line Conducted                         | PASS        |
| <b>RECEIVER MODE (RX)</b>       |                    |   |  |  |             |
| 15.207                          | RSS-Gen [7.2.2]    | AC Conducted Emissions<br>150kHz – 30MHz  | Class B = 250µV  | Line Conducted                         | PASS        |
| 15.209                          | RSS-Gen [7.2.3.2]  | General Field Strength Limits<br>(Restricted Bands and Radiated Emissions Limits) | < FCC 15.209 limits or<br>< RSS-210 table 3 limits   | Radiated<br>(30MHz-1GHz)<br>(1-25 GHz) | PASS        |
| <b>RF EXPOSURE (SAR or MPE)</b> |                    |   |  |  |             |
| 2.1093/2.1091                   | RSS-102            | SAR Test or MPE   | 1.6 W/kg (SAR)<br>1 mW/cm <sup>2</sup> (MPE)   | 3 Channels                             | PASS        |

Table 6-1. Summary of Test Results

|                                |  |                                     |   |                                 |
|--------------------------------|--|-------------------------------------|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  <b>FCC Pt. 15.247 CERTIFICATION TEST REPORT<br/>(WLAN 802.11a/b/g)</b> |                                     |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006   | EUT Type:<br>Toughbook Model: CF-Y5 |   | Page 10 of 49                   |

## 6.1 6dB Bandwidth Measurement – 802.11b/g

### §15.247(a)(2); RSS-210(A8.2 (1))

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies. **The minimum permissible 6dB bandwidth is 500 kHz.**

The spectrum analyzer is set to:

RBW = 100 kHz (7 dB/div – 802.11b; 10 dB/div – 802.11g)  
 VBW = 100 kHz  
 Span = 40 MHz (802.11b/g)  
 Ref. Level = Please See Plots  
 Sweep = 4.84 ms (802.11b/g)

| Frequency [MHz] | Channel No. | Modulation | 6dB Bandwidth Test Results |           |
|-----------------|-------------|------------|----------------------------|-----------|
|                 |             |            | [MHz]                      | Pass/Fail |
| 2412            | 1           | 802.11b    | 10.00                      | Pass      |
| 2437            | 6           | 802.11b    | 9.00                       | Pass      |
| 2462            | 11          | 802.11b    | 9.20                       | Pass      |
| 2412            | 1           | 802.11g    | 16.43                      | Pass      |
| 2437            | 6           | 802.11g    | 16.47                      | Pass      |
| 2462            | 11          | 802.11g    | 16.47                      | Pass      |

Table 6-2. Conducted Bandwidth Measurements

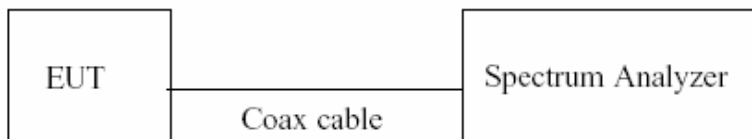


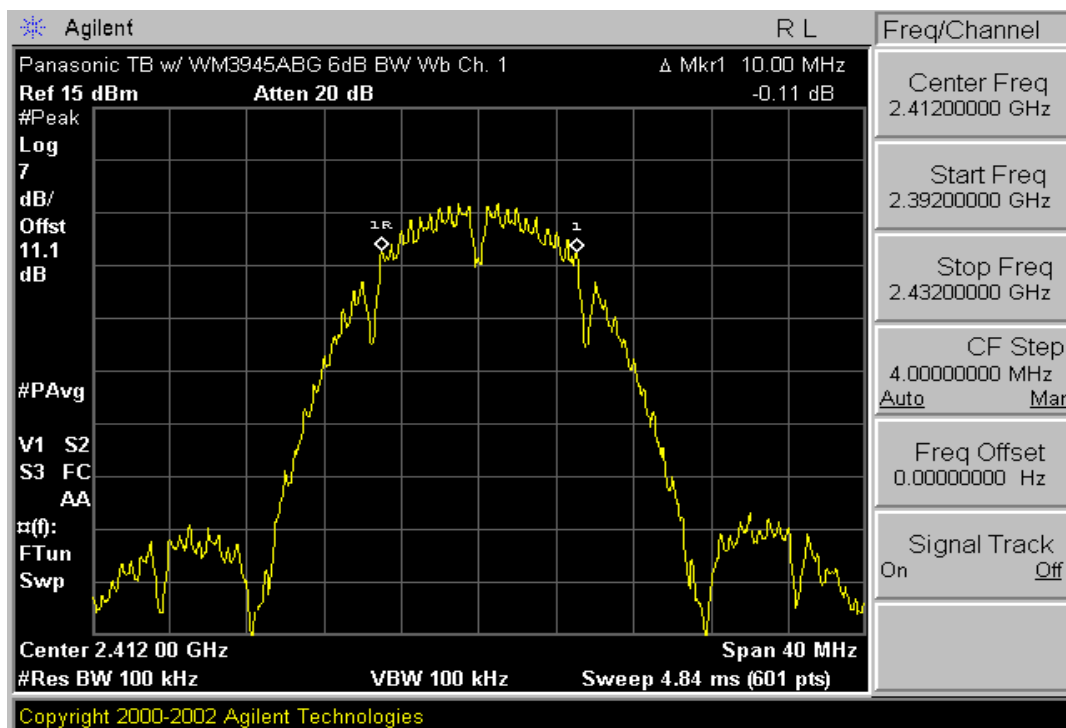
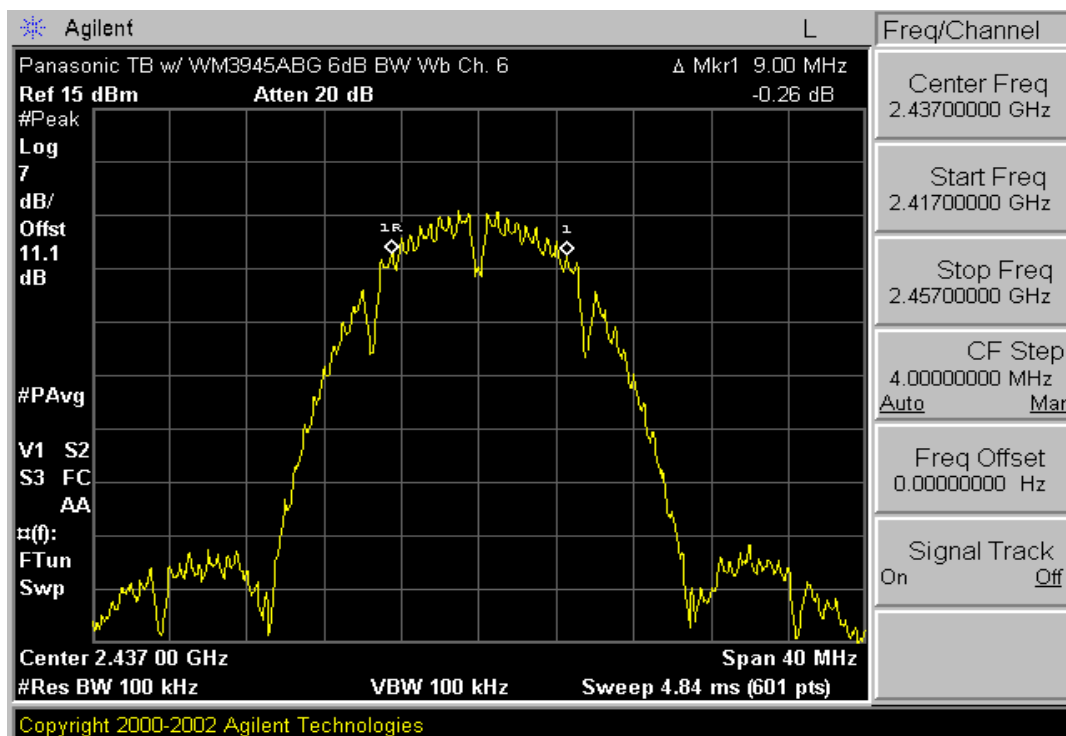


Figure 6-1. Test Instrument & Measurement Setup



|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 11 of 49                   |

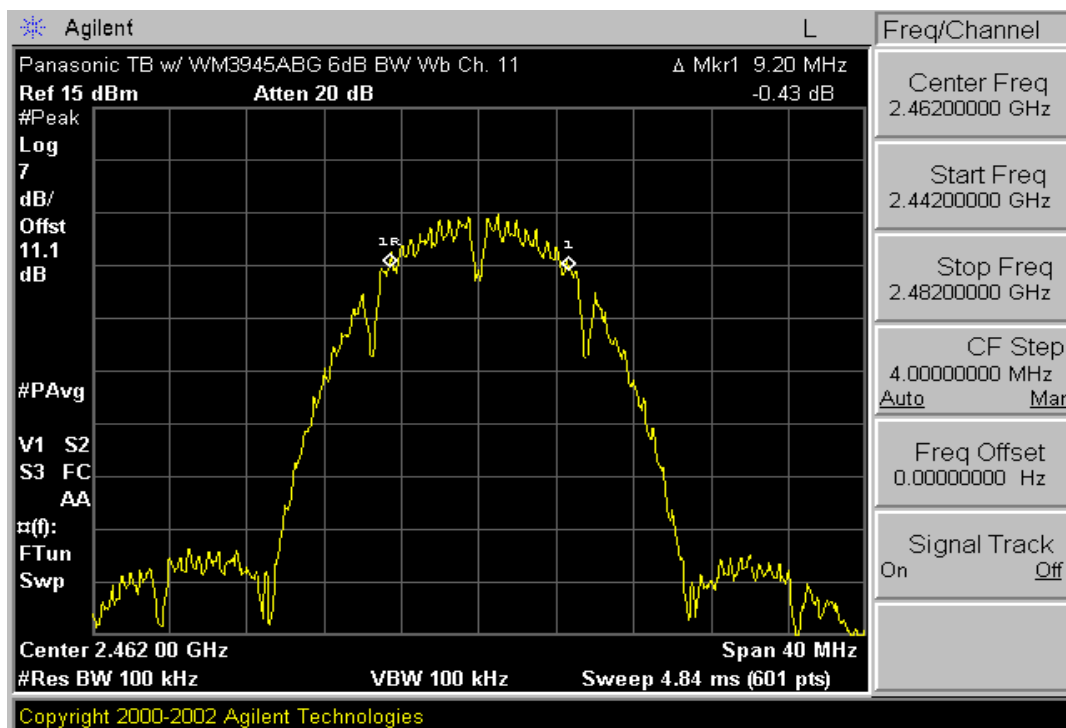


Plot 6-1. 6dB Bandwidth Plot (802.11b – Ch. 1)

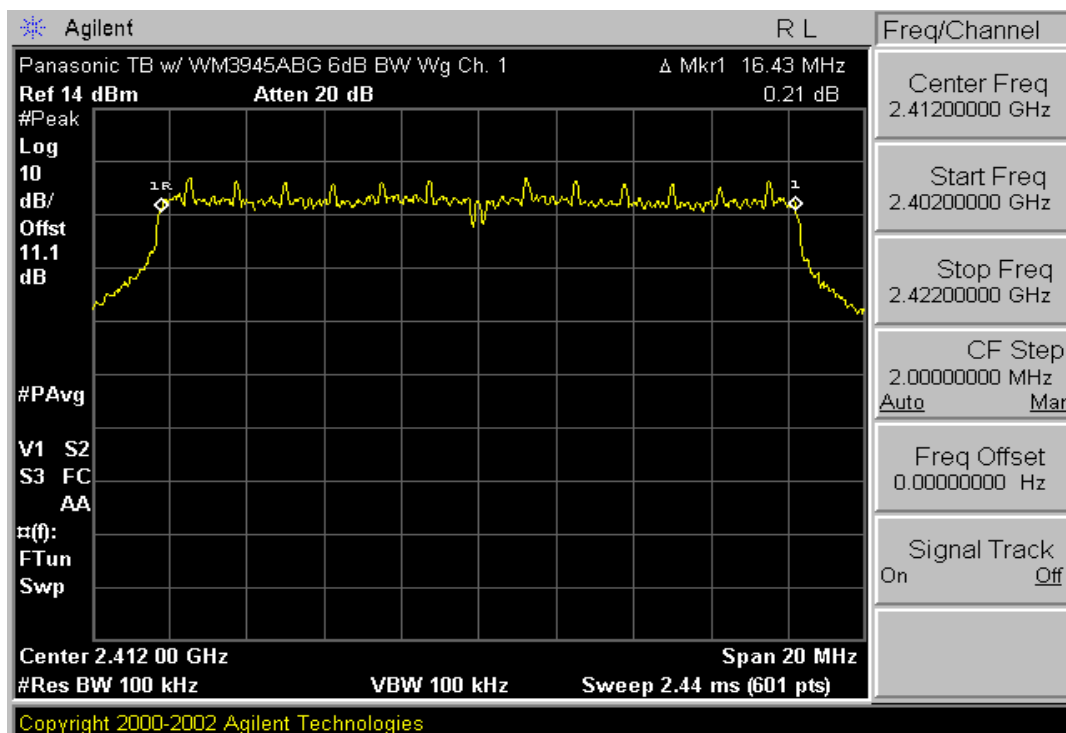


Plot 6-2. 6dB Bandwidth Plot (802.11b – Ch. 6)



|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 12 of 49                   |

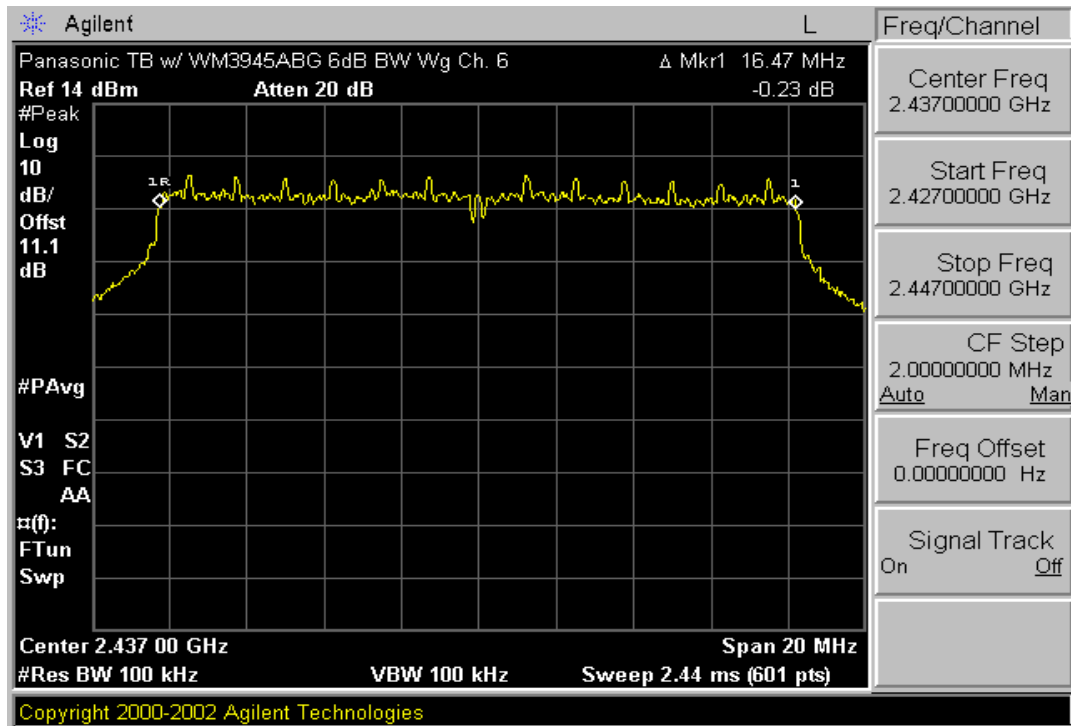


Plot 6-3. 6dB Bandwidth Plot (802.11b – Ch. 11)

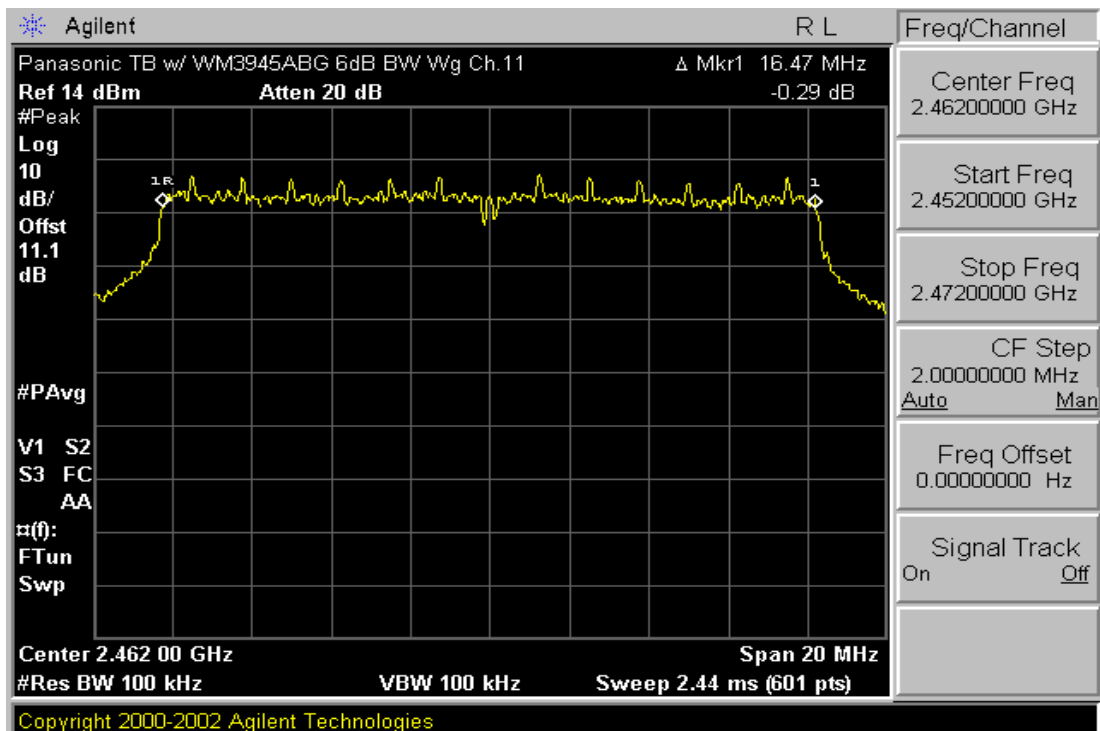


Plot 6-4. 6dB Bandwidth Plot (802.11g – Ch. 1)

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 13 of 49                   |



Plot 6-5. 6dB Bandwidth Plot (802.11g – Ch. 6)



Plot 6-6. 6dB Bandwidth Plot (802.11g – Ch. 11)

|                                |                                    |  |                  |                                 |
|--------------------------------|------------------------------------|--|------------------|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           | <b>PCTEST</b><br>wireless          | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) | <b>Panasonic</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006 | EUT Type:<br>Toughbook Model: CF-Y5                            |                  | Page 14 of 49                   |



## 6.2 6dB Bandwidth Measurement – 802.11a (5.8GHz)

### §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies. **The minimum permissible 6dB bandwidth is 500 kHz.**

The spectrum analyzer is set to:

RBW = 100 kHz (10 dB/div)  
 VBW = 100 kHz  
 Span = 20 MHz  
 Ref. Level = Please See Plots  
 Sweep = 2.44 ms

| Frequency<br>[MHz] | Channel No. | Modulation | 6dB Bandwidth Test Results |           |
|--------------------|-------------|------------|----------------------------|-----------|
|                    |             |            | [MHz]                      | Pass/Fail |
| 5745               | 149         | 802.11a    | 16.43                      | Pass      |
| 5785               | 157         | 802.11a    | 16.40                      | Pass      |
| 5825               | 165         | 802.11a    | 16.40                      | Pass      |

Table 6-3. Conducted Bandwidth Measurements

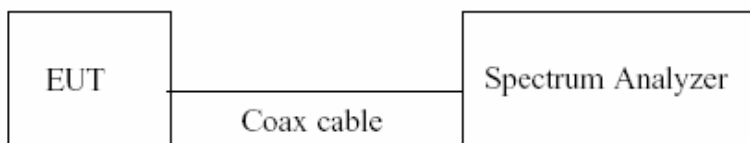


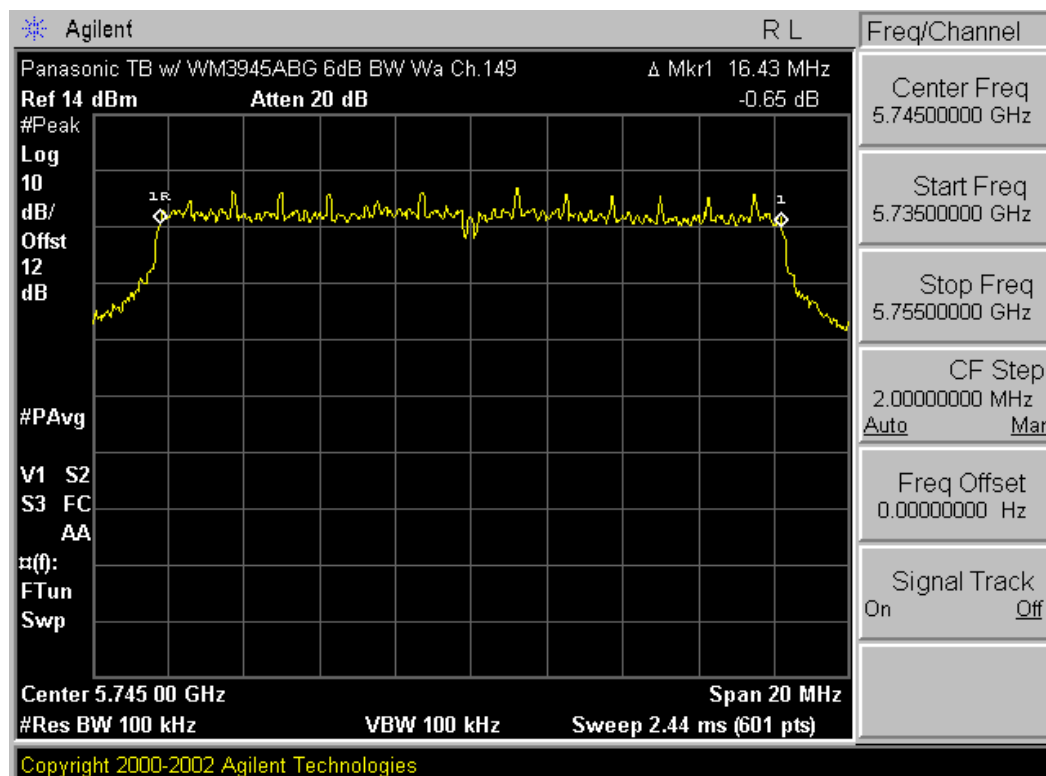
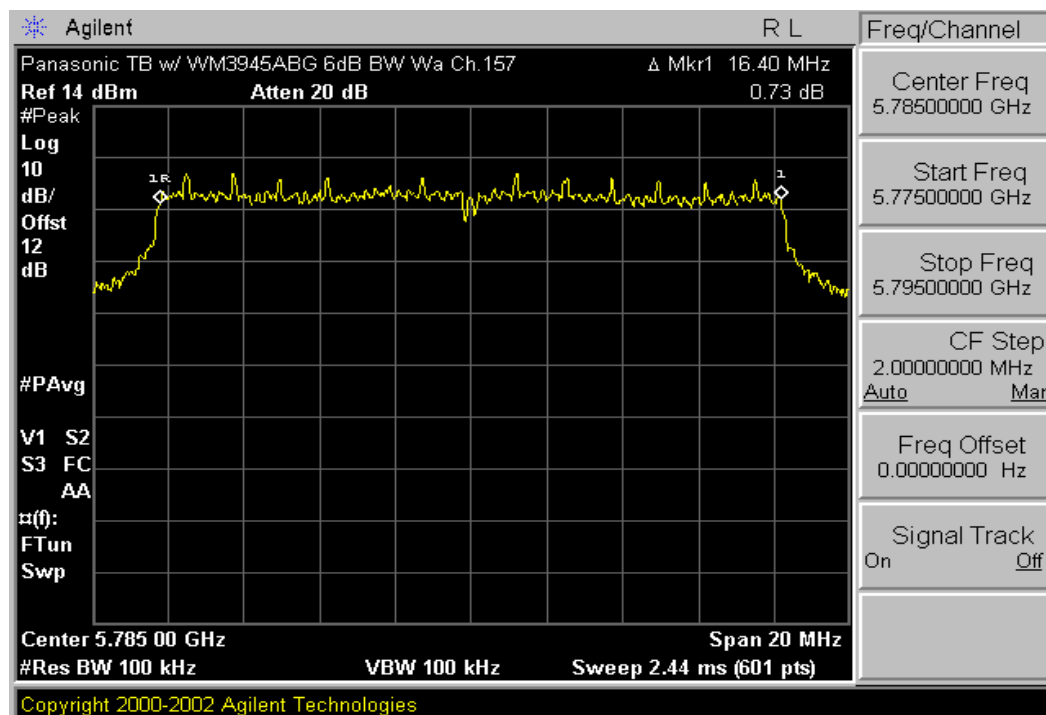


Figure 6-2. Test Instrument & Measurement Setup



|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            | Page 15 of 49   |                                 |

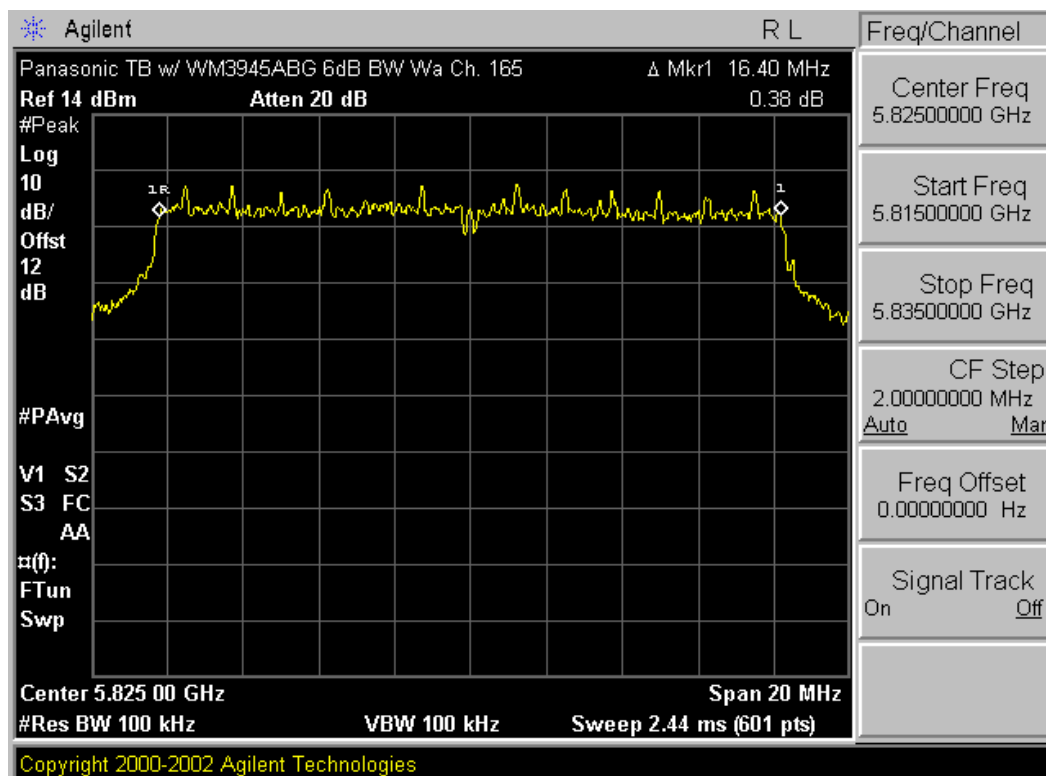


Plot 6-7. 6dB Bandwidth Plot (802.11a – Ch. 149)





Plot 6-8. 6dB Bandwidth Plot (802.11a – Ch. 157)

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 16 of 49                   |



Plot 6-9. 6dB Bandwidth Plot (802.11a – Ch. 165)

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 17 of 49                   |

### 6.3 Output Power Measurement – 802.11b

#### §15.247(b)(3); RSS-210(A8.4 (4))

A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible conducted output power is 1 Watt.**

| Freq [MHz] | Channel | Data Rate [Mbps] | Main Ant. Measured Power [dBm] | Aux Ant. Measured Power [dBm] |
|------------|---------|------------------|--------------------------------|-------------------------------|
| 2412       | 1       | 1                | 14.16                          | 13.95                         |
|            |         | 2                | 14.41                          | 14.16                         |
|            |         | 5.5              | 14.31                          | 14.12                         |
|            |         | 11               | 14.26                          | 13.90                         |
| 2437       | 6       | 1                | 14.47                          | 14.01                         |
|            |         | 2                | <b>14.68</b>                   | 14.35                         |
|            |         | 5.5              | 14.49                          | 14.16                         |
|            |         | 11               | 14.32                          | 13.94                         |
| 2462       | 11      | 1                | 14.11                          | 13.84                         |
|            |         | 2                | 14.16                          | 13.86                         |
|            |         | 5.5              | 13.89                          | 13.54                         |
|            |         | 11               | 13.92                          | 13.49                         |

Table 6-4. Output Power Measurements

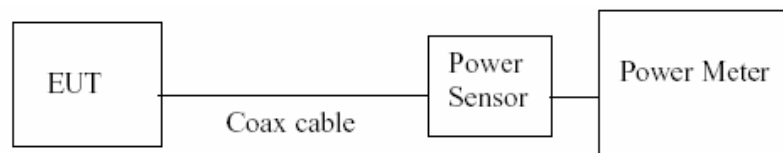




Figure 6-3. Test Instrument & Measurement Setup

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 18 of 49                   |

## 6.4 Output Power Measurement – 802.11g

### §15.247(b)(3); RSS-210(A8.4 (4))

A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible conducted output power is 1 Watt.**

| Freq [MHz] | Channel | Data Rate [Mbps] | Main Ant. Measured Power [dBm] | Aux Ant. Measured Power [dBm] |
|------------|---------|------------------|--------------------------------|-------------------------------|
| 2412       | 1       | 6                | 14.14                          | 13.89                         |
|            |         | 9                | 13.92                          | 13.78                         |
|            |         | 12               | 13.78                          | 13.69                         |
|            |         | 18               | 13.61                          | 13.12                         |
|            |         | 24               | 13.43                          | 13.02                         |
|            |         | 36               | 13.08                          | 12.41                         |
|            |         | 48               | 12.28                          | 11.83                         |
|            |         | 54               | 11.72                          | 11.49                         |
| 2437       | 6       | 6                | 14.21                          | 13.97                         |
|            |         | 9                | <b>14.24</b>                   | 14.03                         |
|            |         | 12               | 14.09                          | 13.93                         |
|            |         | 18               | 13.71                          | 13.34                         |
|            |         | 24               | 13.49                          | 13.12                         |
|            |         | 36               | 13.12                          | 12.76                         |
|            |         | 48               | 12.42                          | 12.02                         |
|            |         | 54               | 11.98                          | 11.77                         |

| Freq [MHz] | Channel | Data Rate [Mbps] | Main Ant. Measured Power [dBm] | Aux Ant. Measured Power [dBm] |
|------------|---------|------------------|--------------------------------|-------------------------------|
| 2462       | 11      | 6                | 14.17                          | 13.88                         |
|            |         | 9                | 13.96                          | 13.81                         |
|            |         | 12               | 13.81                          | 13.63                         |
|            |         | 18               | 13.65                          | 13.07                         |
|            |         | 24               | 13.42                          | 12.88                         |
|            |         | 36               | 13.04                          | 12.43                         |
|            |         | 48               | 12.19                          | 11.81                         |
|            |         | 54               | 11.70                          | 11.38                         |

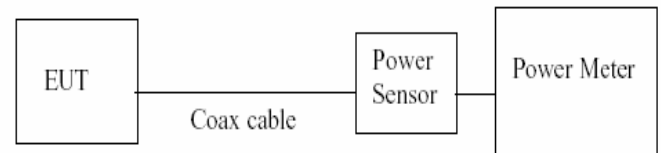




Figure 6-4. Test Instrument & Measurement Setup

Table 6-5. Test Instrument & Measurement Setup

|                                |  |                                     |   |                                 |
|--------------------------------|--|-------------------------------------|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |                                     |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006   | EUT Type:<br>Toughbook Model: CF-Y5 |   | Page 19 of 49                   |

## 6.5 Output Power Measurement – 802.11a (5.8GHz)

### §15.247(b)(3); RSS-210(A8.4 (4))

A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible conducted output power is 1 Watt.**

| Freq [MHz] | Channel | Data Rate [Mbps] | Main Ant. Measured Power [dBm] | Aux Ant. Measured Power [dBm] |
|------------|---------|------------------|--------------------------------|-------------------------------|
| 5745       | 149     | 6                | 14.14                          | 12.87                         |
|            |         | 9                | 14.21                          | 12.69                         |
|            |         | 12               | 14.05                          | 12.81                         |
|            |         | 18               | 14.00                          | 12.44                         |
|            |         | 24               | 13.83                          | 12.38                         |
|            |         | 36               | 11.84                          | 11.71                         |
|            |         | 48               | 8.92                           | 8.63                          |
|            |         | 54               | 6.77                           | 6.75                          |
| 5785       | 157     | 6                | 14.21                          | 12.94                         |
|            |         | 9                | <b>14.25</b>                   | 12.82                         |
|            |         | 12               | 14.14                          | 12.83                         |
|            |         | 18               | 14.07                          | 12.58                         |
|            |         | 24               | 13.86                          | 12.43                         |
|            |         | 36               | 11.93                          | 11.77                         |
|            |         | 48               | 9.05                           | 8.71                          |
|            |         | 54               | 6.96                           | 6.93                          |

| Freq [MHz] | Channel | Data Rate [Mbps] | Main Ant. Measured Power [dBm] | Aux Ant. Measured Power [dBm] |
|------------|---------|------------------|--------------------------------|-------------------------------|
| 5825       | 165     | 6                | 14.16                          | 12.83                         |
|            |         | 9                | 14.20                          | 12.77                         |
|            |         | 12               | 14.09                          | 12.80                         |
|            |         | 18               | 14.05                          | 12.51                         |
|            |         | 24               | 13.81                          | 12.36                         |
|            |         | 36               | 11.87                          | 11.71                         |
|            |         | 48               | 9.01                           | 8.63                          |
|            |         | 54               | 6.90                           | 6.85                          |

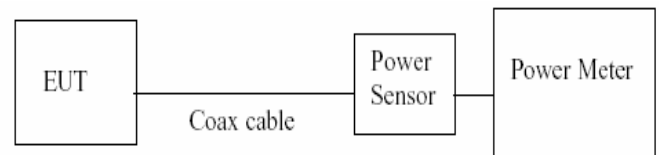




Figure 6-5. Test Instrument & Measurement Setup

Table 6-6. Test Instrument & Measurement Setup

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 20 of 49                   |



## 6.6 Power Spectral Density (802.11a/b/g)

### §15.247(e); RSS-210(A8.2 (2))

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. ***The maximum permissible power spectral density is 8 dBm in any 3 kHz band.***

The spectrum analyzer is set to:

RBW = 3 kHz (10 dB/div)  
 VBW = 3 kHz  
 Span = 300 kHz  
 Ref. Level = Please See Plots  
 Sweep = 100 s

| Frequency [MHz] | Channel No. | Modulation | Power Density Test Results |           |
|-----------------|-------------|------------|----------------------------|-----------|
|                 |             |            | [dBm]                      | Pass/Fail |
| 2412            | 1           | 802.11b    | -14.32                     | Pass      |
| 2437            | 6           | 802.11b    | -16.02                     | Pass      |
| 2462            | 11          | 802.11b    | -15.51                     | Pass      |
| 2412            | 1           | 802.11g    | -15.12                     | Pass      |
| 2437            | 6           | 802.11g    | -16.78                     | Pass      |
| 2462            | 11          | 802.11g    | -15.74                     | Pass      |
| 5745            | 149         | 802.11a    | -15.02                     | Pass      |
| 5785            | 157         | 802.11a    | -15.15                     | Pass      |
| 5825            | 165         | 802.11a    | -14.44                     | Pass      |

Table 6-7. Conducted Power Density Measurements

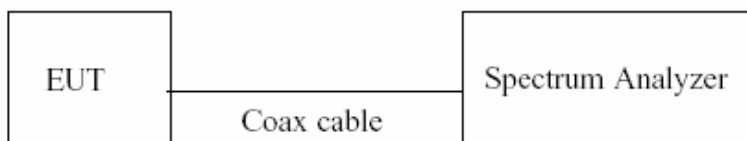


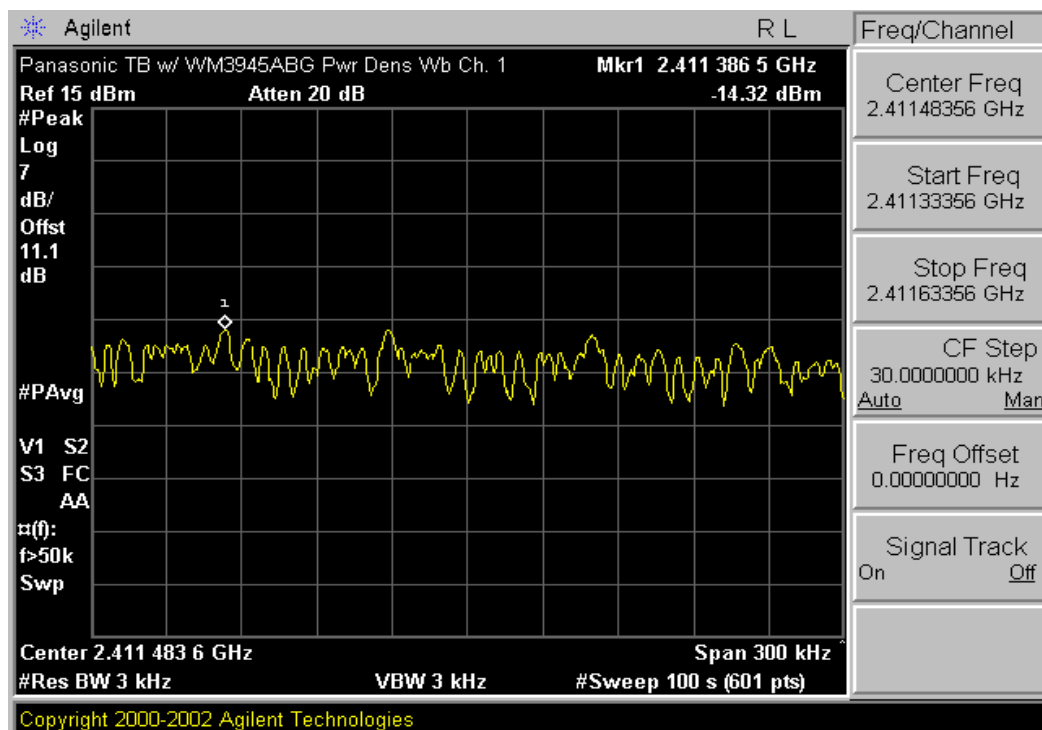
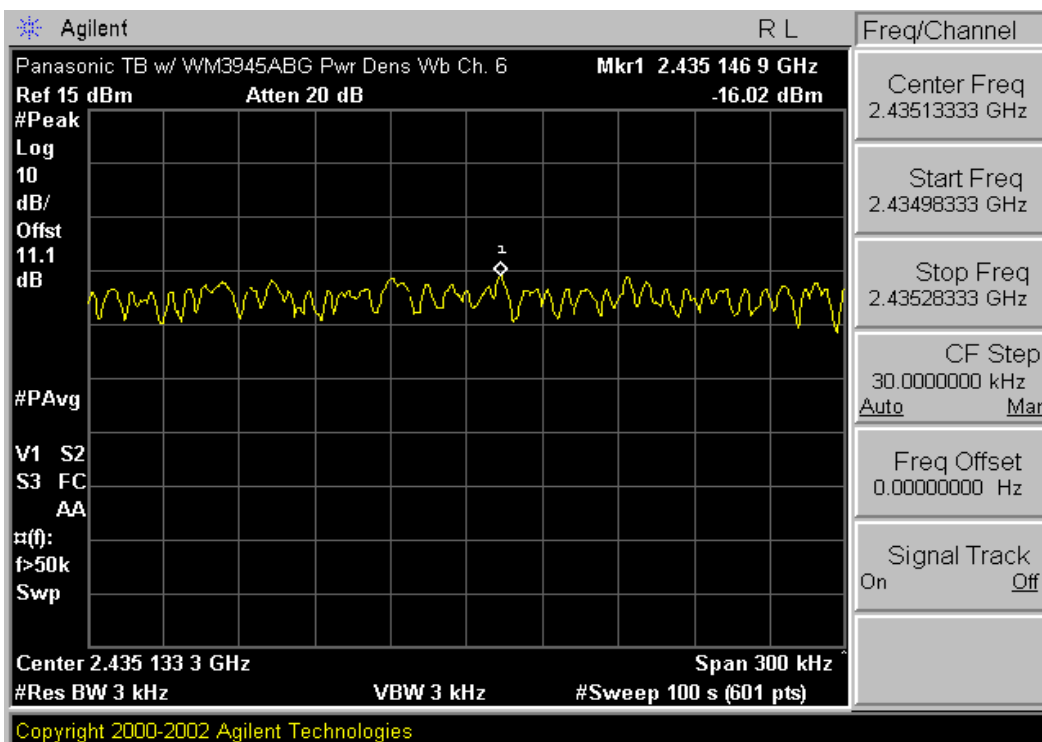


Figure 6-6. Test Instrument & Measurement Setup



|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 21 of 49                   |

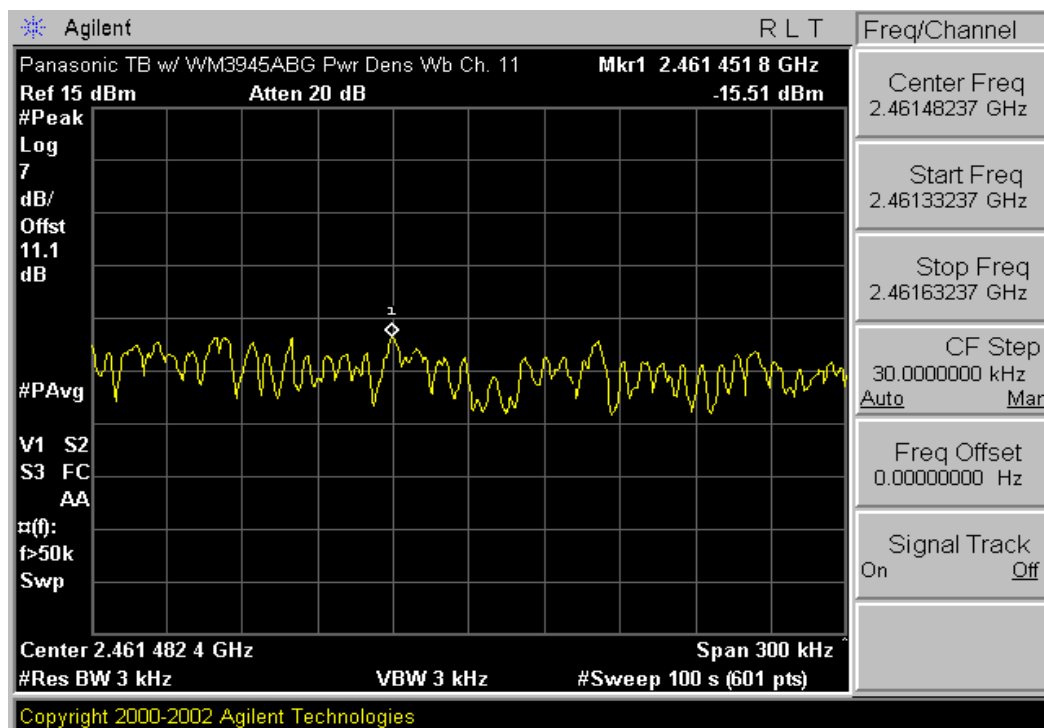


Plot 6-10. Power Spectral Density Plot (802.11b – Ch. 1)

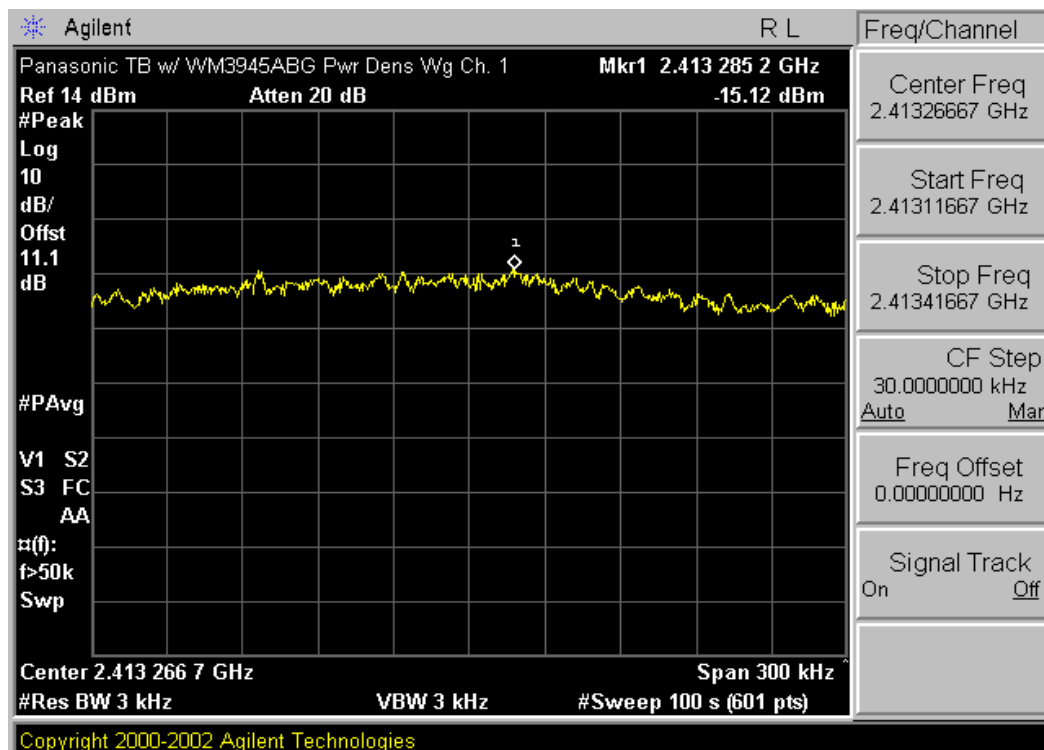


Plot 6-11 Power Spectral Density Plot (802.11b – Ch. 6)



|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 22 of 49                   |

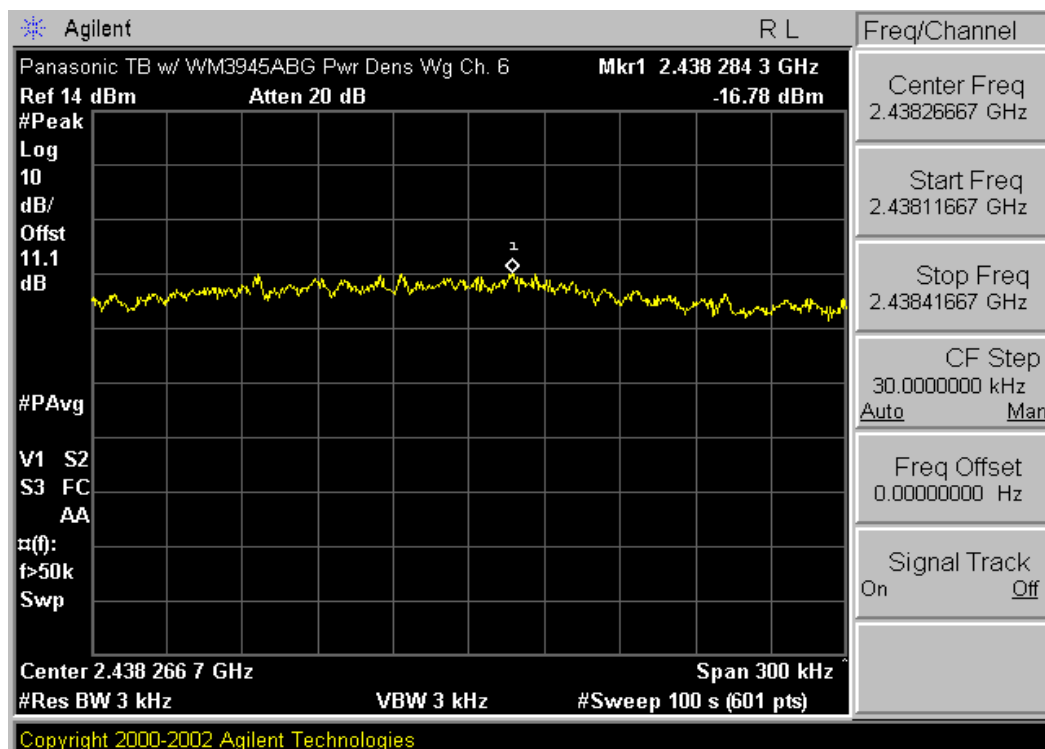


Plot 6-12. Power Spectral Density Plot (802.11b – Ch. 11)

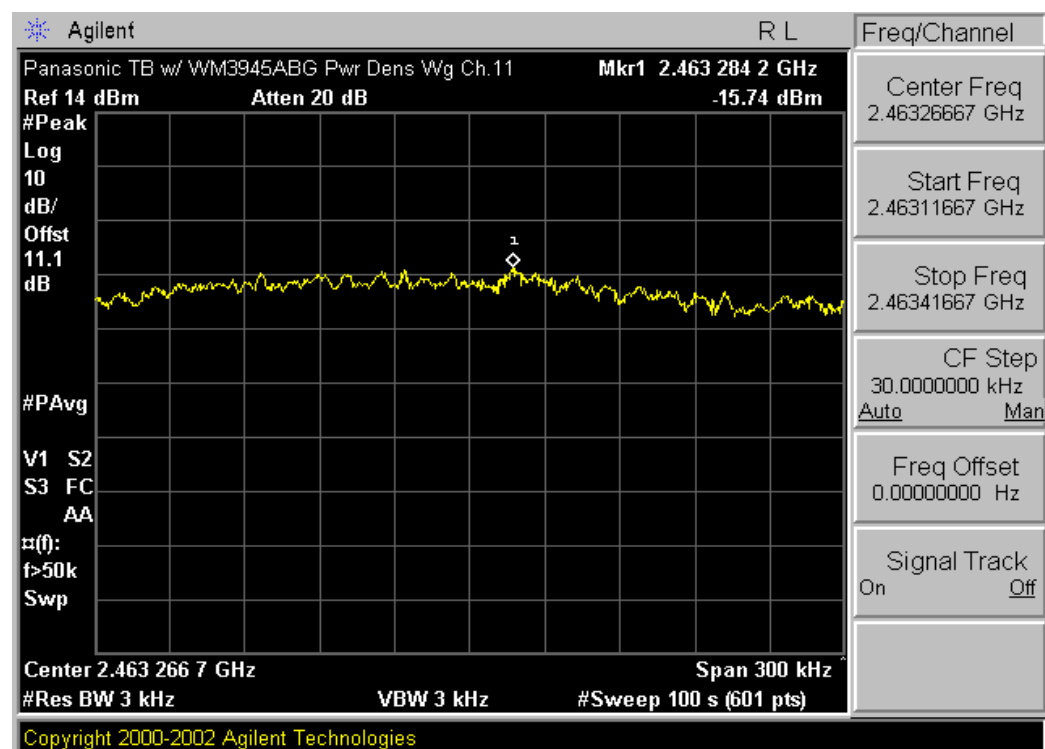


Plot 6-13. Power Spectral Density Plot (802.11g – Ch. 1)



|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 23 of 49                   |

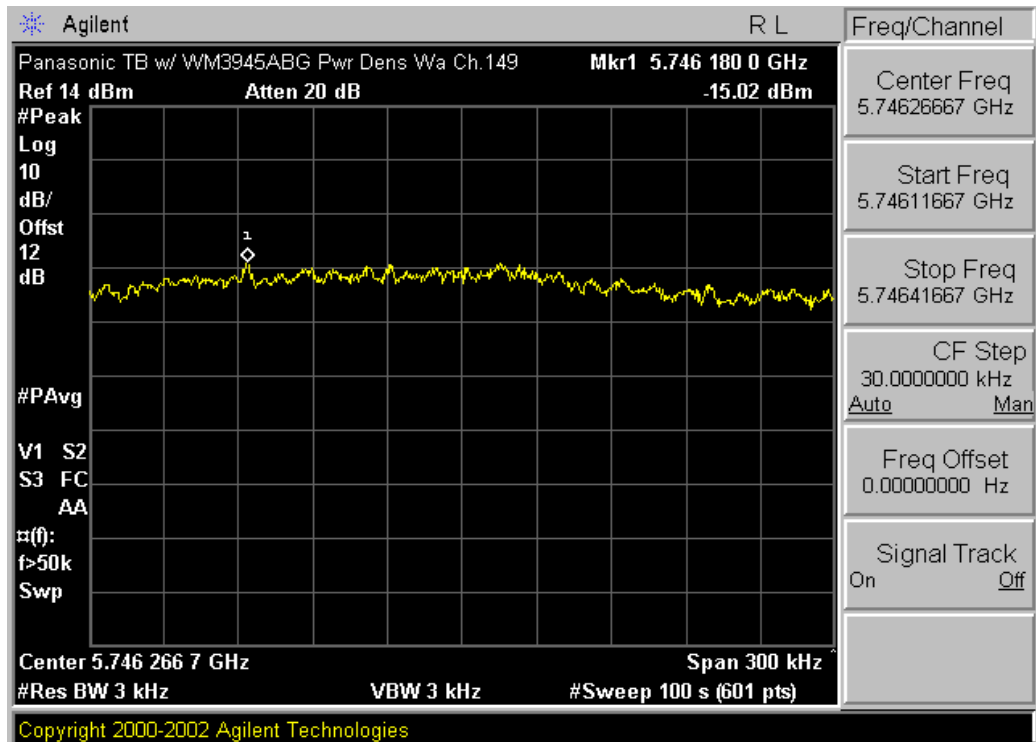


Plot 6-14. Power Spectral Density Plot (802.11g – Ch. 6)

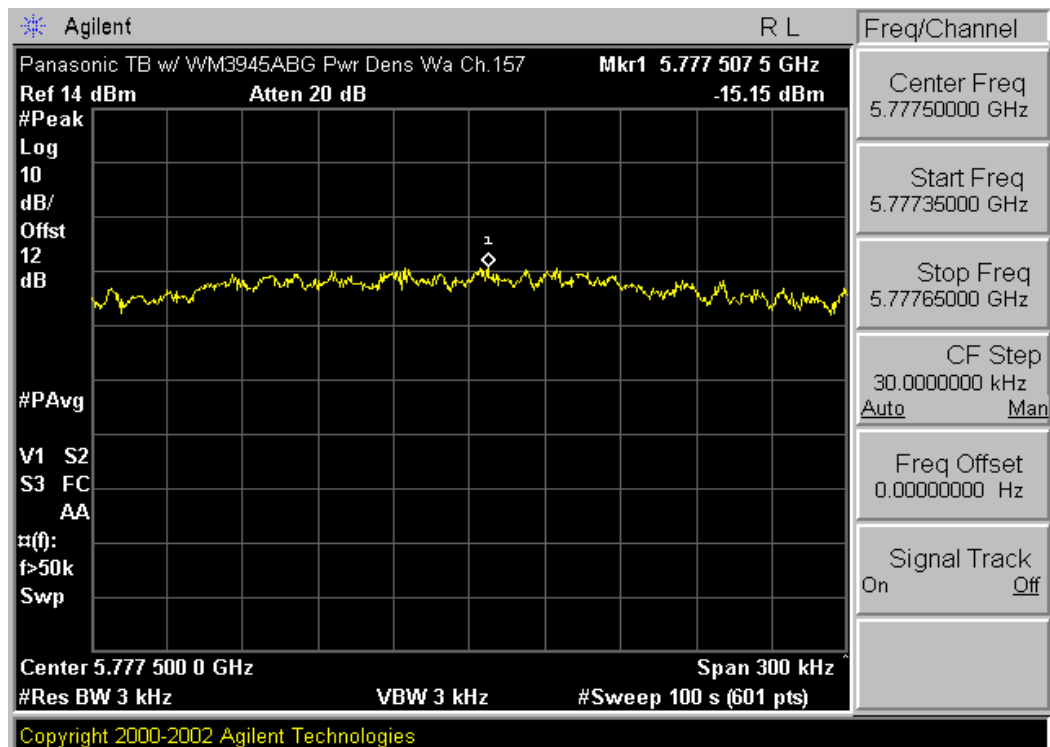


Plot 6-15. Power Spectral Density Plot (802.11g – Ch. 11)



|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 24 of 49                   |

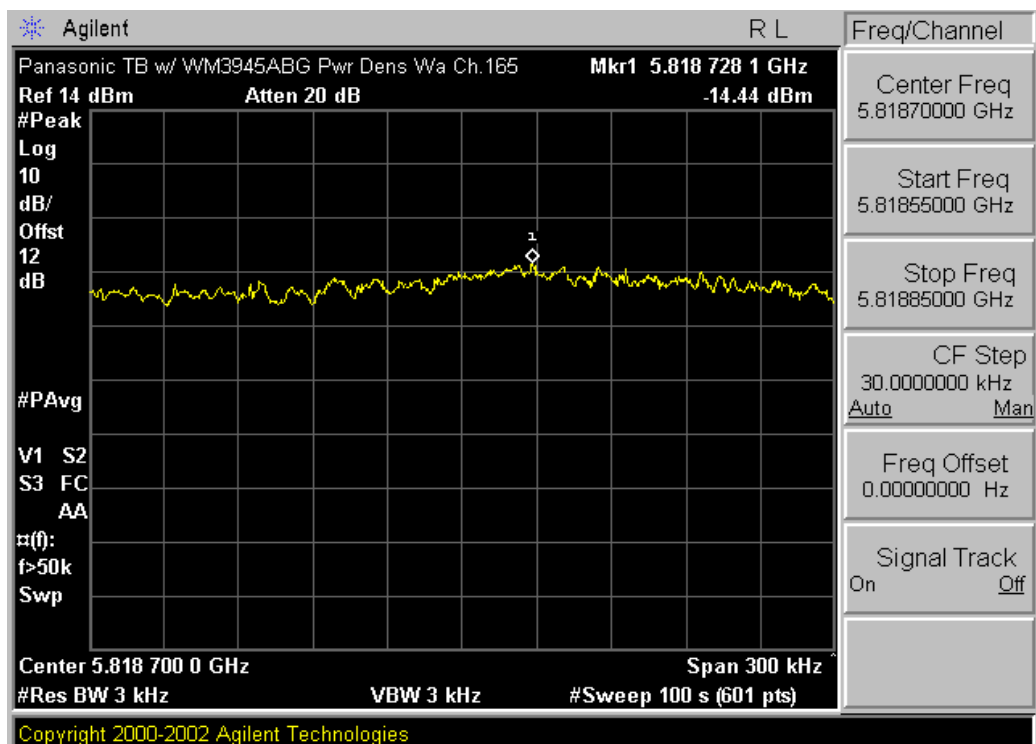


Plot 6-16. Power Spectral Density Plot (802.11a – Ch. 149)





Plot 6-17. Power Spectral Density Plot (802.11a – Ch. 157)

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 25 of 49                   |



Plot 6-18. Power Spectral Density Plot (802.11a – Ch. 165)

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 26 of 49                   |

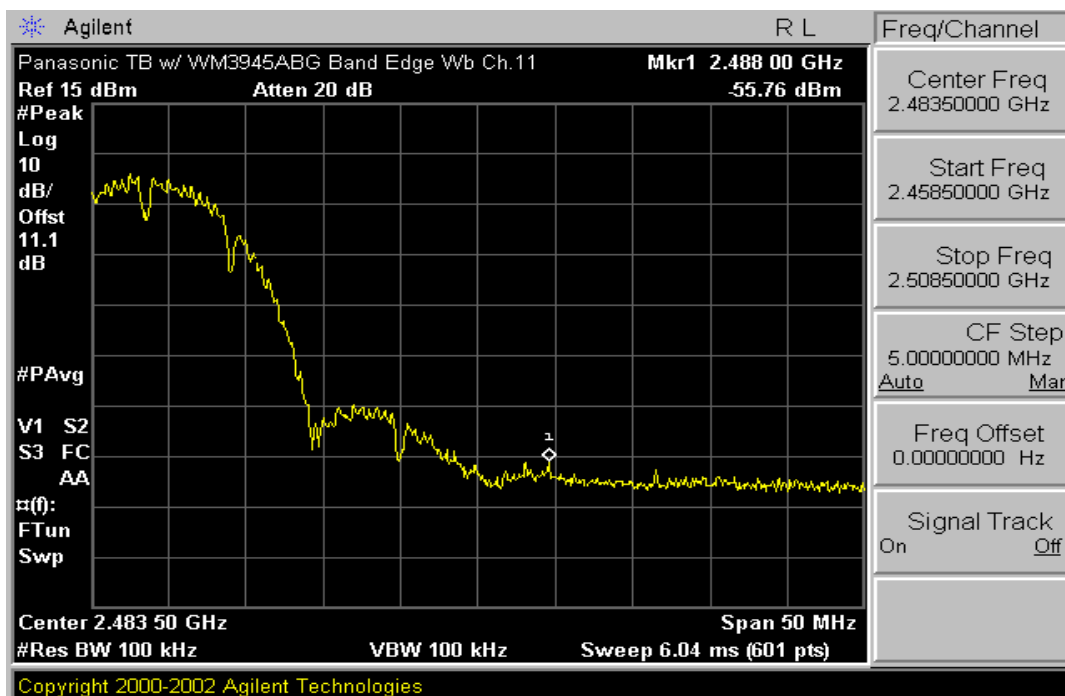


## 6.7 Out of Band Emissions (Band Edge)



§15.247(d): RSS-210(A8.5)

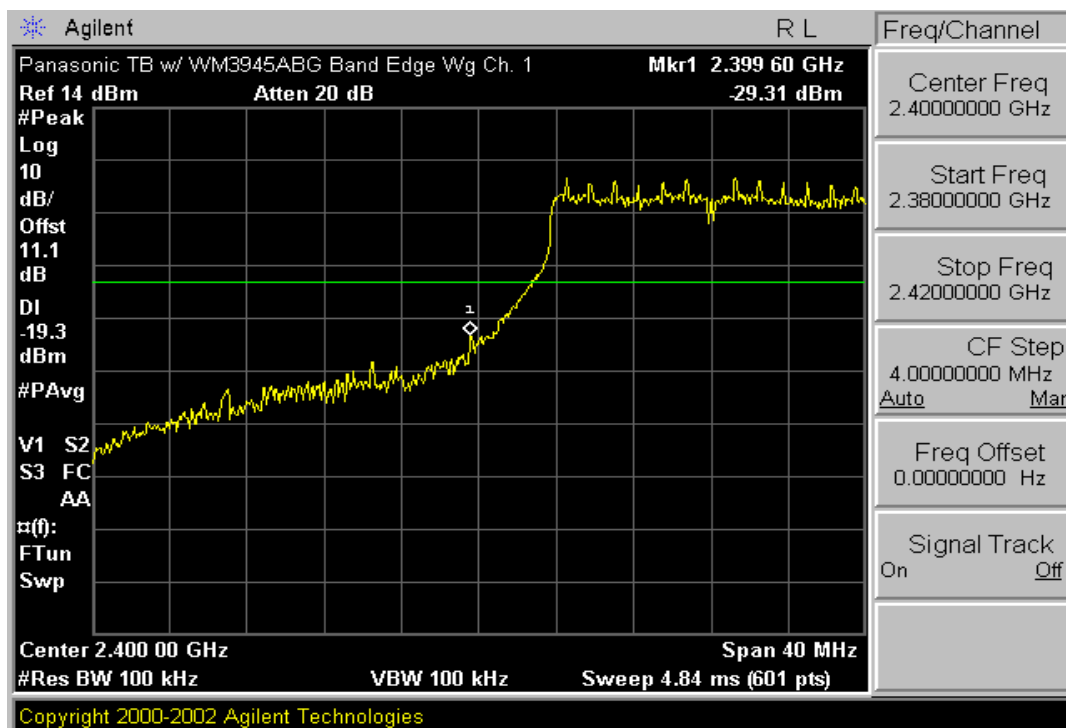


Plot 6-19. Band Edge Plot (802.11b – Ch. 1)

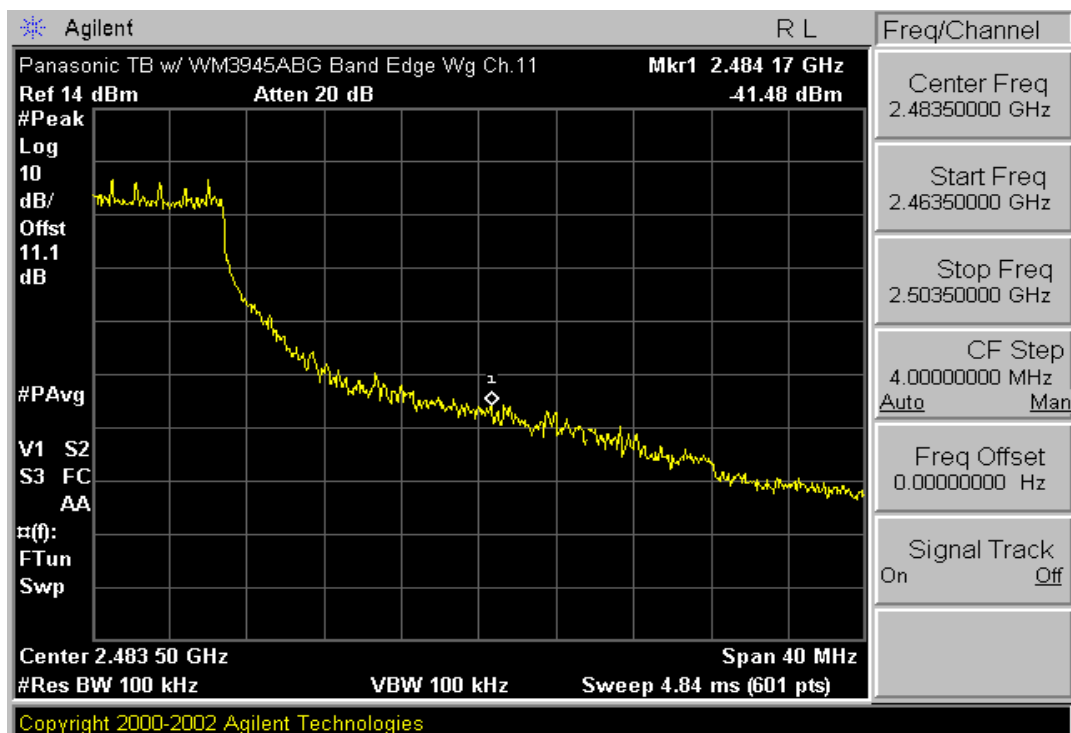


Plot 6-20. Band Edge Plot (802.11b – Ch. 11)



|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 27 of 49                   |

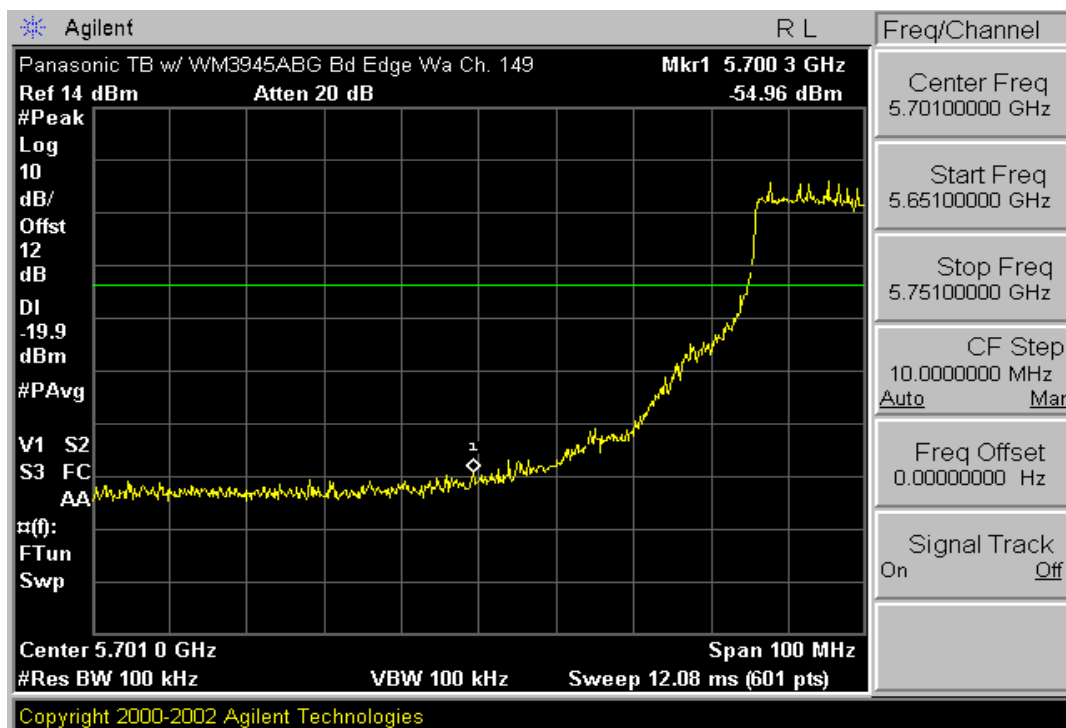


Plot 6-21. Band Edge Plot (802.11g– Ch. 1)

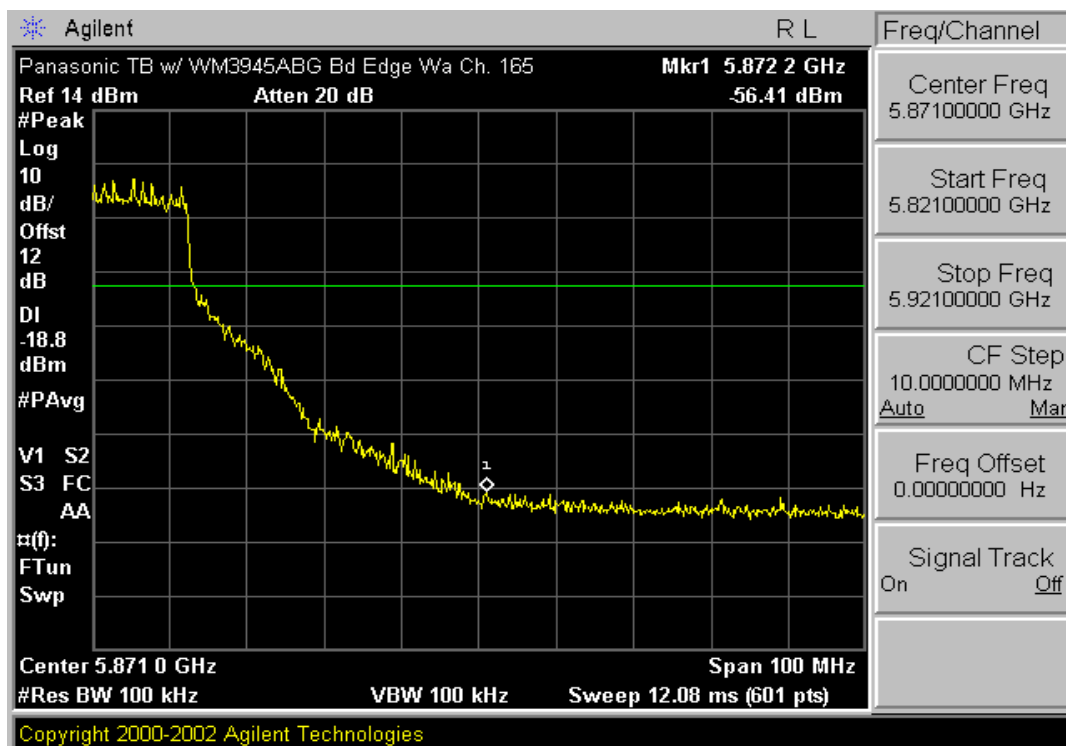


Plot 6-22. Band Edge Plot (802.11g – Ch. 11)



|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 28 of 49                   |



Plot 6-23. Band Edge Plot (802.11a – Ch. 149)



Plot 6-24. Band Edge Plot (802.11a – Ch. 165)

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 29 of 49                   |



## 6.8 Radiated Measurements

### §15.247(d) / §15.205 & §15.209

The EUT was tested from 9kHz to the tenth harmonic of the fundamental frequency of the transmitter. Below 1GHz a CISPR quasi peak detector was used. Above 1 GHz average measurements were taken, using RBW= 1MHz, VBW= 10Hz, and linearly polarized horn antennas. In addition, peak measurements (RBW= 1MHz, VBW= 1MHz) were taken to ensure that the peak levels are not more than 20dB above the average limit. No harmonics/spurs peak emissions are more than 20dB above the average limit. Special attention is taken for the EUT's harmonic and spurious radiated emissions in the restricted bands of operations, as defined in Section 15.205.

| Frequency         | Field Strength<br>[ $\mu$ V/m] | Measured Distance<br>[Meters] |
|-------------------|--------------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz)                   | 300                           |
| 0.490 – 1.705 MHz | 24000/F (kHz)                  | 30                            |
| 1.705 – 30.00 MHz | 30                             | 30                            |
| 30.00 – 88.00 MHz | 100                            | 3                             |
| 88.00 – 216.0 MHz | 150                            | 3                             |
| 216.0 – 960.0 MHz | 200                            | 3                             |
| Above 960.0 MHz   | 500                            | 3                             |

**Table 6-8. Radiated Limits**

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 30 of 49                   |

# Radiated Measurements (Cont.) §15.247(d) / §15.205 & §15.209; RSS-210(A8.5)

Mode: 802.11b

Transfer Rate: 1 Mbps

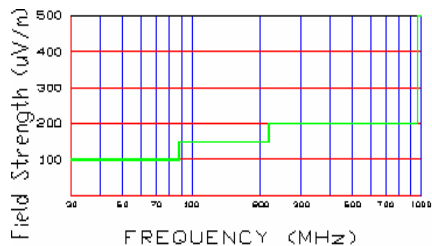
Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz

Channel: 01

|   | Frequency [MHz] | Level [dBm] | AFCL [dB] | Pol. [H/V] | Field Strength [dBμV/m] | Field Strength [μV/m] | Margin [dB] |
|---|-----------------|-------------|-----------|------------|-------------------------|-----------------------|-------------|
| * | 4824.00         | -105.18     | 40.6      | H          | 42.42                   | 132.13                | -11.58      |
|   | 7236.00         | -106.45     | 45.8      | H          | 46.35                   | 207.73                | -39.25      |
|   | 9648.00         | -103.57     | 49.6      | H          | 53.03                   | 448.23                | -32.57      |
| * | 12060.00        | -135.00     | 52.1      | H          | 24.10                   | 16.03                 | -29.90      |



**Table 6-9. Radiated Measurements @ 3 meters**



**Figure 6-7. Radiated limits at 3 meters.**

## NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table 6-8. (Note: \* = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μV/m (54dBμV/m) at 3 meters radiated.

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 31 of 49                   |

## Radiated Measurements (Cont.)

§15.247(d) / §15.205 & §15.209; RSS-210(A8.5)

Mode: 802.11b

Transfer Rate: 1 Mbps

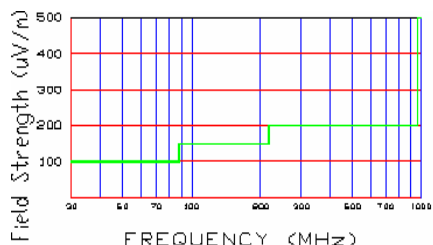
Distance of Measurements: 3 Meters

Operating Frequency: 2437MHz

Channel: 06

|   | Frequency [MHz] | Level [dBm] | AFCL [dB] | Pol. [H/V] | Field Strength [dBμV/m] | Field Strength [μV/m] | Margin [dB] |
|---|-----------------|-------------|-----------|------------|-------------------------|-----------------------|-------------|
| * | 4874.00         | -101.48     | 40.50     | H          | 46.02                   | 199.99                | -7.98       |
| * | 7311.00         | -103.80     | 47.30     | H          | 50.50                   | 334.97                | -3.50       |
|   | 9748.00         | -104.99     | 50.05     | H          | 52.06                   | 400.87                | -35.59      |
| * | 12185.00        | -135.00     | 52.50     | H          | 24.50                   | 16.79                 | -29.50      |



**Table 6-10. Radiated Measurements @ 3 meters**



**Figure 6-8. Radiated limits at 3 meters.**

### NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table 6-8. (Note: \* = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μV/m (54dBμV/m) at 3 meters radiated.

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 32 of 49                   |



## Radiated Measurements (Cont.)

§15.247(d) / §15.205 & §15.209; RSS-210(A8.5)

Mode: 802.11b

Transfer Rate: 1 Mbps

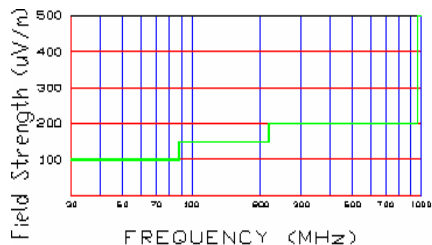
Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

|   | Frequency [MHz] | Level [dBm] | AFCL [dB] | Pol. [H/V] | Field Strength [dB $\mu$ V/m] | Field Strength [ $\mu$ V/m] | Margin [dB] |
|---|-----------------|-------------|-----------|------------|-------------------------------|-----------------------------|-------------|
| * | 4924.00         | -101.15     | 40.95     | H          | 46.80                         | 218.78                      | -7.20       |
| * | 7386.00         | -102.77     | 46.25     | H          | 50.48                         | 334.20                      | -3.52       |
|   | 9848.00         | -104.92     | 49.90     | H          | 51.98                         | 397.19                      | -31.62      |
| * | 12310.00        | -135.00     | 52.10     | H          | 24.10                         | 16.03                       | -29.90      |



**Table 6-11. Radiated Measurements @ 3 meters**



**Figure 6-9. Radiated limits at 3 meters.**

### NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table 6-8. (Note: \* = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500  $\mu$ V/m (54dB $\mu$ V/m) at 3 meters radiated.

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 33 of 49                   |

# **Radiated Measurements (Cont.)** **§15.247(d) / §15.205 & §15.209; RSS-210(A8.5)**

Mode: 802.11a

Transfer Rate: 9 Mbps

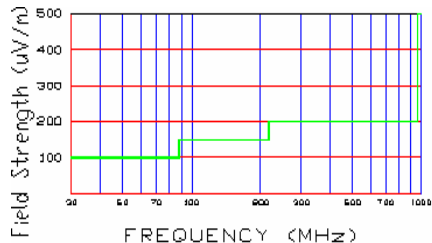
Distance of Measurements: 3 Meters

Operating Frequency: 5745MHz

Channel: 149

|   | Frequency [MHz] | Level [dBm] | AFCL [dB] | Pol. [H/V] | Field Strength [dBμV/m] | Field Strength [μV/m] | Margin [dB] |
|---|-----------------|-------------|-----------|------------|-------------------------|-----------------------|-------------|
| * | 11490.00        | -105.60     | 40.6      | H          | 47.8                    | 245.5                 | -6.18       |
|   | 17235.00        | -111.80     | 45.8      | H          | 54.5                    | 529.1                 | -13.76      |
| * | 22980.00        | -135.00     | 49.6      | H          | 38.9                    | 88.3                  | -15.06      |
|   | 28725.00        | -135.00     | 52.1      | H          | 54.0                    | 498.3                 | -14.28      |



**Table 6-12. Radiated Measurements @ 3 meters**



**Figure 6-10. Radiated limits at 3 meters.**

## **NOTES:**

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table 6-8. (Note: \* = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μV/m (54dBμV/m) at 3 meters radiated.

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 34 of 49                   |

# **Radiated Measurements (Cont.)** **§15.247(d) / §15.205 & §15.209; RSS-210(A8.5)**

Mode: 802.11a

Transfer Rate: 9 Mbps

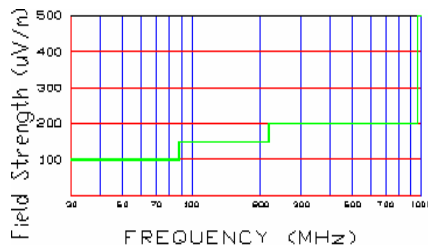
Distance of Measurements: 3 Meters

Operating Frequency: 5785MHz

Channel: 157

| Frequency [MHz] | Level [dBm] | AFCL [dB] | Pol. [H/V] | Field Strength [dBμV/m] | Field Strength [μV/m] | Margin [dB] |
|-----------------|-------------|-----------|------------|-------------------------|-----------------------|-------------|
| * 11570.00      | -105.10     | 40.5      | H          | 48.3                    | 260.6                 | -5.66       |
| 17355.00        | -107.30     | 47.3      | H          | 60.7                    | 1088.9                | -7.49       |
| 23140.00        | -135.00     | 50.1      | H          | 40.1                    | 101.3                 | -28.12      |
| 28925.00        | -135.00     | 52.5      | H          | 55.3                    | 580.8                 | -12.95      |



**Table 6-13. Radiated Measurements @ 3 meters**



**Figure 6-11. Radiated limits at 3 meters.**

## **NOTES:**

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table 6-8. (Note: \* = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μV/m (54dBμV/m) at 3 meters radiated.

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 35 of 49                   |

## Radiated Measurements (Cont.)

§15.247(d) / §15.205 & §15.209; RSS-210(A8.5)

Mode: 802.11a

Transfer Rate: 9 Mbps

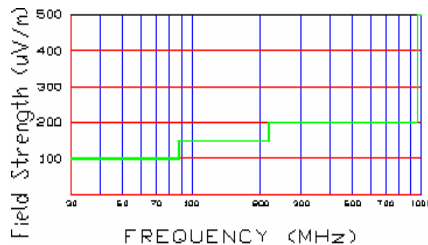
Distance of Measurements: 3 Meters

Operating Frequency: 5825MHz

Channel: 165

| Frequency [MHz] | Level [dBm] | AFCL [dB] | Pol. [H/V] | Field Strength [dBμV/m] | Field Strength [μV/m] | Margin [dB] |
|-----------------|-------------|-----------|------------|-------------------------|-----------------------|-------------|
| * 11650.00      | -105.70     | 40.6      | H          | 48.1                    | 252.6                 | -5.93       |
| 17475.00        | -112.40     | 45.9      | H          | 54.5                    | 529.1                 | -13.76      |
| 23300.00        | -135.00     | 49.4      | H          | 40.5                    | 106.0                 | -27.72      |
| 29125.00        | -135.00     | 53.4      | H          | 57.5                    | 749.9                 | -10.73      |



**Table 6-14. Radiated Measurements @ 3 meters**



**Figure 6-12. Radiated limits at 3 meters.**

### NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table 6-8. (Note: \* = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μV/m (54dBμV/m) at 3 meters radiated.

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 36 of 49                   |

## 6.9 Radiated Restricted Band Measurements

§15.205 / §15.209; RSS-210(A8.5)

- Special attention is made for the EUT's harmonic and spurious radiated emission in the restricted bands of operations.

Mode: 802.11g

Transfer Rate: 9 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz



Channel: 11

| Frequency [MHz] | Level [dBm] | AFCL [dB] | Pol. [H/V] | Field Strength [dBμV/m] | Field Strength [μV/m] | Margin [dB] |
|-----------------|-------------|-----------|------------|-------------------------|-----------------------|-------------|
| 2484.16         | -109.5      | 31.80     | H          | 29.27                   | 29.07                 | -24.71      |
| 2486.17         | -104.7      | 31.80     | H          | 34.07                   | 50.52                 | -19.91      |
| 2489.31         | -110.7      | 31.80     | H          | 28.07                   | 25.32                 | -25.91      |
| 2492.14         | -110.2      | 31.80     | H          | 28.57                   | 26.82                 | -25.41      |
| 2493.89         | -111.4      | 31.80     | H          | 27.37                   | 23.36                 | -26.61      |
| 2495.47         | -110.1      | 31.80     | H          | 28.67                   | 27.13                 | -25.31      |

**Table 6-15. Radiated Restricted Band Measurements at 3-meters**

### NOTES:

- The antenna is manipulated through typical positions, polarity and length during the testing.
- The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
- The spectrum is measured from 9 kHz up to the 10th harmonic and the worst-case emissions are reported.
- Above 1 GHz the limit is 500μV/m.
- < -135 dBm is below the analyzer measurement floor level.
- The data in the table are Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
- The peak emissions above 1 GHz are not more than 20 dB above the average limit.

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 37 of 49                   |

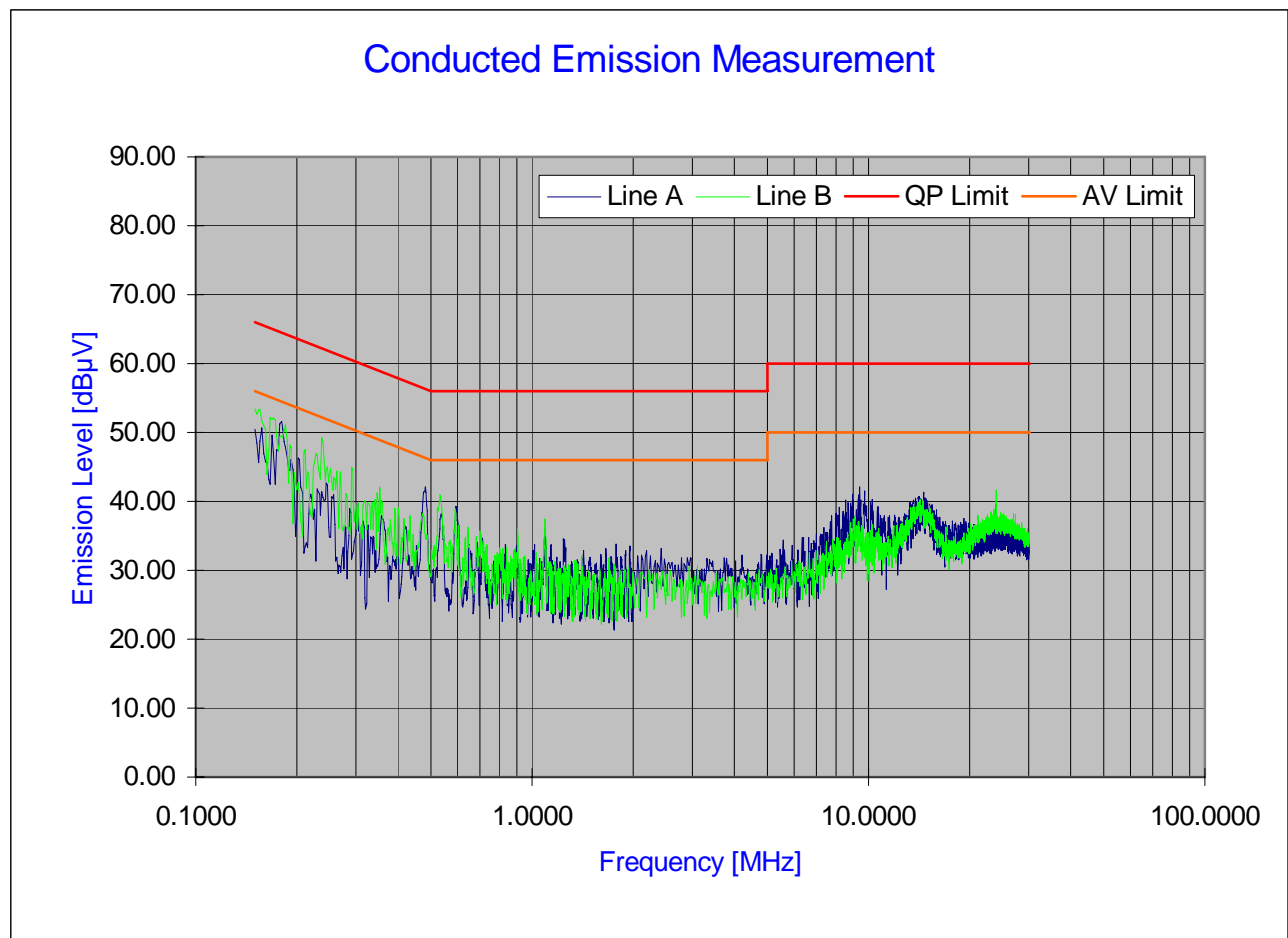
## 6.10 Line-Conducted Test Data

§15.207; RSS-Gen(7.2.2)

# PCTEST Engineering Laboratory Inc.

Company : Panasonic Corporation  
 Model Number : CF-Y5  
 FCC ID Code : ACJ9TGCF-Y51  
 Standard : FCC Part 15B class B

Power Source : AC120V/60Hz  
 Tested Date : 10/03/2006  
 Note : w/ WLAN b ON





Ver.1.1 ©PCTEST 2006.08

**Plot 6-25. Line Conducted Plot with 802.11b**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: None.

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 38 of 49                   |

## Line-Conducted Test Data (Cont'd)



§15.207; RSS-Gen(7.2.2)

| Nb. | Line | Frequency<br>[MHz] | Factor<br>[dB] | QP<br>[dBμV] | Limit<br>[dBμV] | Margin<br>[dB] | Average<br>[dBμV] | Limit<br>[dBμV] | Margin<br>[dB] |
|-----|------|--------------------|----------------|--------------|-----------------|----------------|-------------------|-----------------|----------------|
| 1   | A    | 0.150              | 8.20           | 52.07        | 66.00           | -13.93         | 36.59             | 56.00           | -19.41         |
| 2   | A    | 0.150              | 8.20           | 53.15        | 66.00           | -12.85         | 37.60             | 56.00           | -18.40         |
| 3   | A    | 0.152              | 8.19           | 50.50        | 65.91           | -15.41         | 35.26             | 55.91           | -20.65         |
| 4   | A    | 0.162              | 8.13           | 49.02        | 65.35           | -16.33         | 33.76             | 55.35           | -21.59         |
| 5   | A    | 0.185              | 8.00           | 46.77        | 64.26           | -17.49         | 30.98             | 54.26           | -23.28         |
| 6   | A    | 0.480              | 7.44           | 39.79        | 56.33           | -16.54         | 37.50             | 46.33           | -8.83          |
| 7   | A    | 0.535              | 7.42           | 36.07        | 56.00           | -19.93         | 33.53             | 46.00           | -12.47         |
| 8   | A    | 0.602              | 7.40           | 37.07        | 56.00           | -18.93         | 34.74             | 46.00           | -11.26         |
| 9   | A    | 9.402              | 7.59           | 36.37        | 60.00           | -23.63         | 22.89             | 50.00           | -27.11         |
| 10  | A    | 9.761              | 7.60           | 36.63        | 60.00           | -23.37         | 23.31             | 50.00           | -26.69         |
| 11  | B    | 0.150              | 8.20           | 54.75        | 66.00           | -11.25         | 47.57             | 56.00           | -8.43          |
| 12  | B    | 0.154              | 8.18           | 52.98        | 65.78           | -12.80         | 45.58             | 55.78           | -10.20         |
| 13  | B    | 0.168              | 8.10           | 51.25        | 65.08           | -13.83         | 45.36             | 55.08           | -9.72          |
| 14  | B    | 0.194              | 7.96           | 48.05        | 63.87           | -15.82         | 40.49             | 53.87           | -13.38         |
| 15  | B    | 0.211              | 7.89           | 45.29        | 63.16           | -17.87         | 38.26             | 53.16           | -14.90         |
| 16  | B    | 0.222              | 7.85           | 44.01        | 62.75           | -18.74         | 37.62             | 52.75           | -15.13         |
| 17  | B    | 0.253              | 7.74           | 40.73        | 61.67           | -20.94         | 34.08             | 51.67           | -17.59         |
| 18  | B    | 0.273              | 7.66           | 38.72        | 61.01           | -22.29         | 32.03             | 51.01           | -18.98         |
| 19  | B    | 0.353              | 7.53           | 34.54        | 58.88           | -24.34         | 29.80             | 48.88           | -19.08         |
| 20  | B    | 0.529              | 7.42           | 38.41        | 56.00           | -17.59         | 37.19             | 46.00           | -8.81          |

Table 6-16. Line Conducted Data with 802.11b

### Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: None.

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 39 of 49                   |

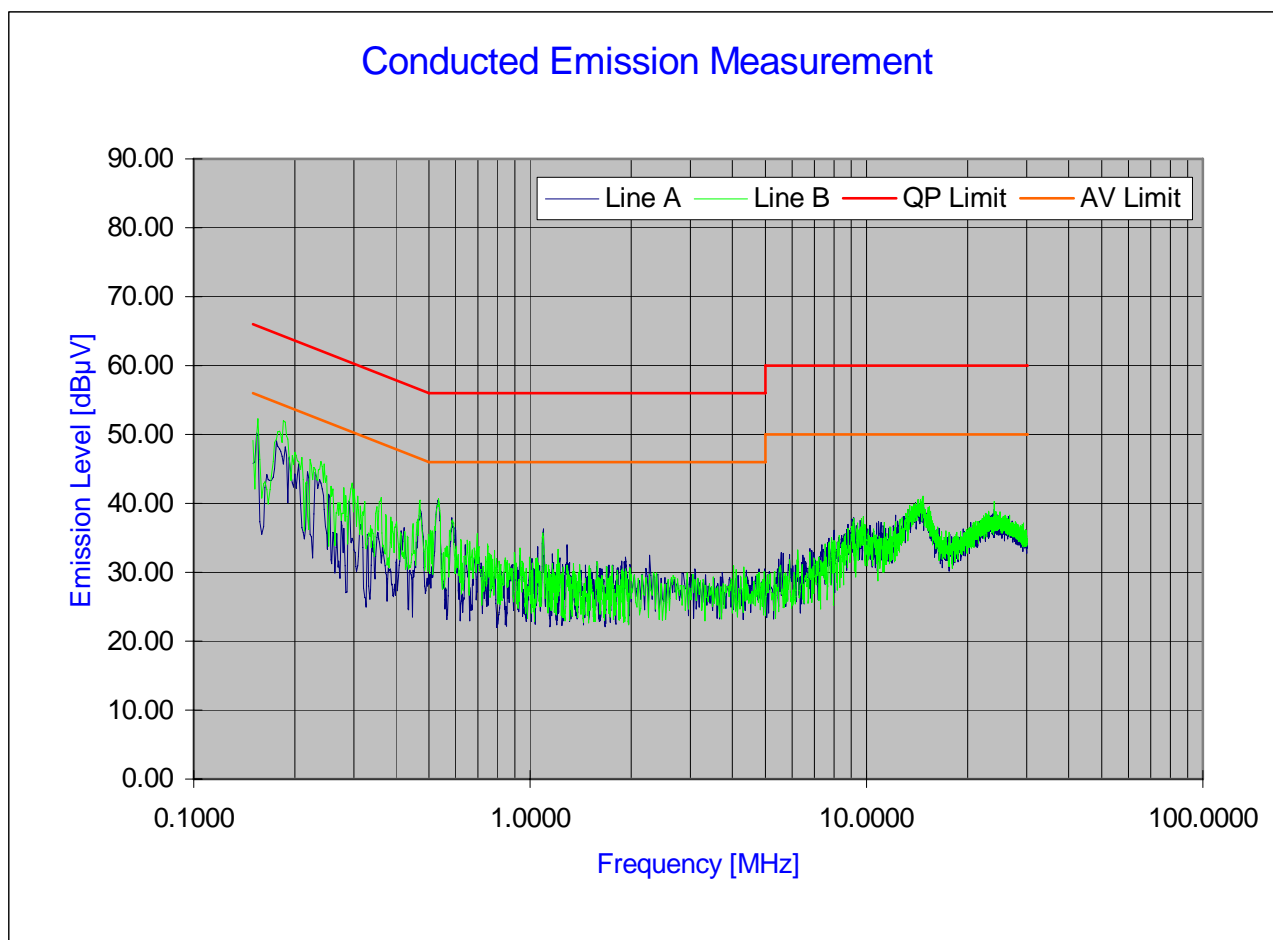
## Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen(7.2.2)

# PCTEST Engineering Laboratory Inc.

Company : Panasonic Corporation  
 Model Number : CF-Y5  
 FCC ID Code : ACJ9TGCF-Y51  
 Standard : FCC Part 15B class B

Power Source : AC120V/60Hz  
 Tested Date : 10/03/2006  
 Note : w/ WLAN g ON





Ver.1.1 ©PCTEST 2006.08

**Plot 6-26. Line Conducted Plot with 802.11g**

### Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: None.

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 40 of 49                   |



## Line-Conducted Test Data (Cont'd)



§15.207; RSS-Gen(7.2.2)

| Nb. | Line | Frequency<br>[MHz] | Factor<br>[dB] | QP<br>[dBμV] | Limit<br>[dBμV] | Margin<br>[dB] | Average<br>[dBμV] | Limit<br>[dBμV] | Margin<br>[dB] |
|-----|------|--------------------|----------------|--------------|-----------------|----------------|-------------------|-----------------|----------------|
| 1   | A    | 0.150              | 8.20           | 52.06        | 66.00           | -13.94         | 37.03             | 56.00           | -18.97         |
| 2   | A    | 0.159              | 8.15           | 49.08        | 65.54           | -16.46         | 34.29             | 55.54           | -21.25         |
| 3   | A    | 0.201              | 7.93           | 43.31        | 63.57           | -20.26         | 28.69             | 53.57           | -24.88         |
| 4   | A    | 0.215              | 7.87           | 41.48        | 63.00           | -21.52         | 27.65             | 53.00           | -25.35         |
| 5   | A    | 0.470              | 7.44           | 37.67        | 56.51           | -18.84         | 35.88             | 46.51           | -10.63         |
| 6   | A    | 0.529              | 7.42           | 38.74        | 56.00           | -17.26         | 35.40             | 46.00           | -10.60         |
| 7   | A    | 0.586              | 7.40           | 36.07        | 56.00           | -19.93         | 28.36             | 46.00           | -17.64         |
| 8   | A    | 0.586              | 7.40           | 36.07        | 56.00           | -19.93         | 32.53             | 46.00           | -13.47         |
| 9   | A    | 1.093              | 7.31           | 33.83        | 56.00           | -22.17         | 31.13             | 46.00           | -14.87         |
| 10  | A    | 13.971             | 7.83           | 35.80        | 60.00           | -24.20         | 28.58             | 50.00           | -21.42         |
| 11  | B    | 0.150              | 8.20           | 54.76        | 66.00           | -11.24         | 47.73             | 56.00           | -8.27          |
| 12  | B    | 0.168              | 8.10           | 51.32        | 65.08           | -13.76         | 45.45             | 55.08           | -9.63          |
| 13  | B    | 0.227              | 7.83           | 43.58        | 62.58           | -19.00         | 37.62             | 52.58           | -14.96         |
| 14  | B    | 0.262              | 7.71           | 39.93        | 61.38           | -21.45         | 33.34             | 51.38           | -18.04         |
| 15  | B    | 0.278              | 7.65           | 38.45        | 60.87           | -22.42         | 31.99             | 50.87           | -18.88         |
| 16  | B    | 0.343              | 7.53           | 34.87        | 59.12           | -24.25         | 29.98             | 49.12           | -19.14         |
| 17  | B    | 0.471              | 7.44           | 36.92        | 56.50           | -19.58         | 34.20             | 46.50           | -12.30         |
| 18  | B    | 0.530              | 7.42           | 38.45        | 56.00           | -17.55         | 36.24             | 46.00           | -9.76          |
| 19  | B    | 0.586              | 7.40           | 34.93        | 56.00           | -21.07         | 33.08             | 46.00           | -12.92         |
| 20  | B    | 14.703             | 7.86           | 37.92        | 60.00           | -22.08         | 29.66             | 50.00           | -20.34         |

Table 6-17. Line Conducted Data with 802.11g

### Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: None.

|                                |   |                                     |   |                                 |
|--------------------------------|---|-------------------------------------|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  <b>FCC Pt. 15.247 CERTIFICATION TEST REPORT</b><br>(WLAN 802.11a/b/g) |                                     |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5 |   | Page 41 of 49                   |



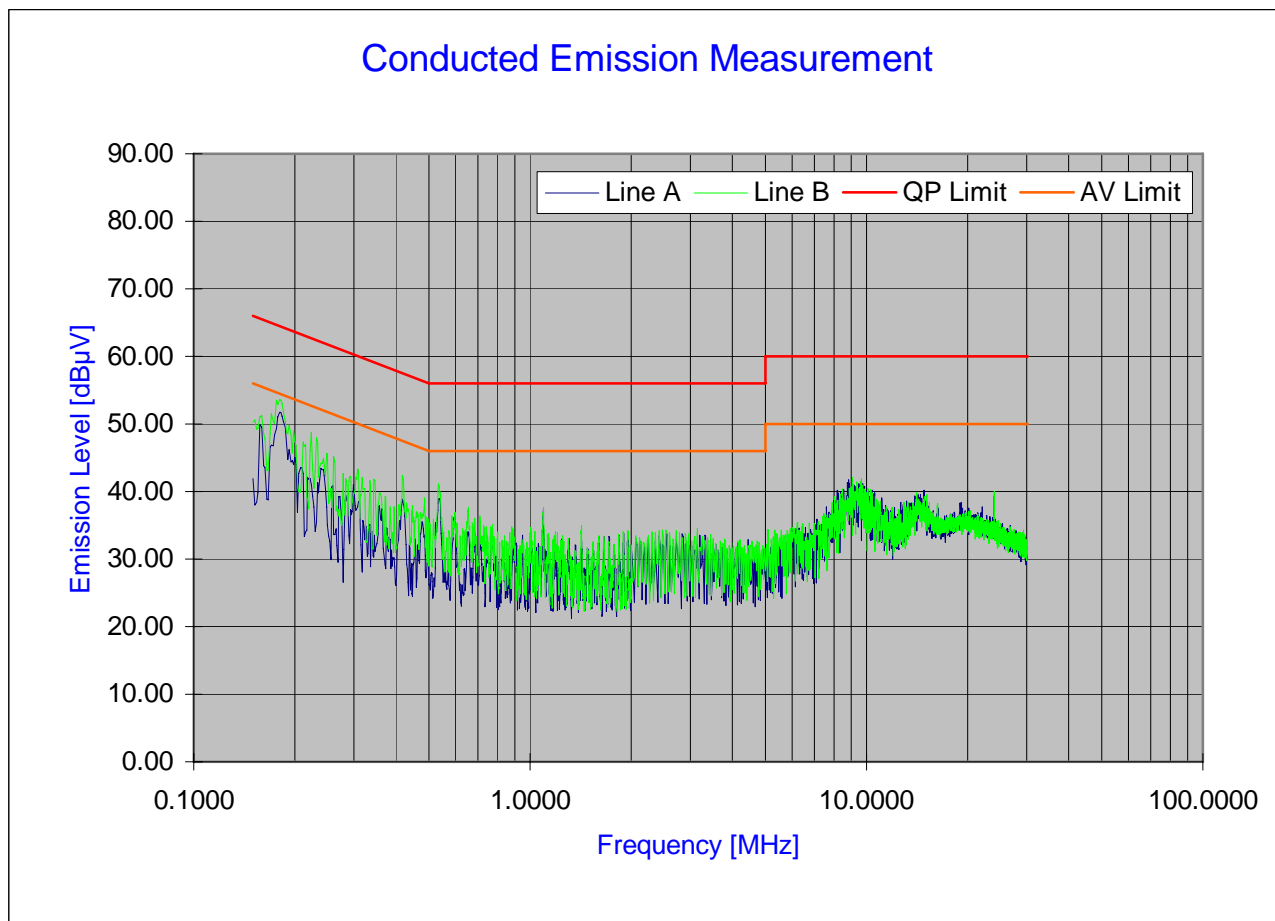
## Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen(7.2.2)

# PCTEST Engineering Laboratory Inc.

Company : Panasonic Corporation  
Model Number : CF-Y5  
FCC ID Code : ACJ9TGCF-Y51  
Standard : FCC Part 15B class B

Power Source : AC120V/60Hz  
Tested Date : 10/03/2006  
Note : w/ WLAN a ON





Ver.1.1 ©PCTEST 2006.08

**Plot 6-27. Line Conducted Plot with 802.11a**

### Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: None.

|                                |   |  |  |
|--------------------------------|---|--|--|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) | <br>Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            | Page 42 of 49  |

## Line-Conducted Test Data (Cont'd)



§15.207; RSS-Gen(7.2.2)

| No. | Line | Frequency<br>[MHz] | Factor<br>[dB] | QP<br>[dBµV] | Limit<br>[dBµV] | Margin<br>[dB] | Average<br>[dBµV] | Limit<br>[dBµV] | Margin<br>[dB] |
|-----|------|--------------------|----------------|--------------|-----------------|----------------|-------------------|-----------------|----------------|
| 1   | A    | 0.150              | 8.20           | 51.90        | 66.00           | -14.10         | 36.78             | 56.00           | -19.22         |
| 2   | A    | 0.181              | 8.03           | 49.72        | 64.46           | -14.74         | 33.98             | 54.46           | -20.48         |
| 3   | A    | 0.240              | 7.79           | 40.55        | 62.11           | -21.56         | 32.43             | 52.11           | -19.68         |
| 4   | A    | 0.418              | 7.48           | 38.02        | 57.49           | -19.47         | 36.66             | 47.49           | -10.83         |
| 5   | A    | 0.536              | 7.42           | 38.03        | 56.00           | -17.97         | 36.95             | 46.00           | -9.05          |
| 6   | A    | 1.093              | 7.31           | 33.55        | 56.00           | -22.45         | 31.24             | 46.00           | -14.76         |
| 7   | A    | 8.823              | 7.58           | 38.10        | 60.00           | -21.90         | 23.27             | 50.00           | -26.73         |
| 8   | A    | 9.489              | 7.59           | 37.54        | 60.00           | -22.46         | 26.32             | 50.00           | -23.68         |
| 9   | A    | 9.720              | 7.60           | 37.85        | 60.00           | -22.15         | 26.24             | 50.00           | -23.76         |
| 10  | A    | 9.721              | 7.60           | 38.15        | 60.00           | -21.85         | 25.93             | 50.00           | -24.07         |
| 11  | B    | 0.150              | 8.20           | 54.98        | 66.00           | -11.02         | 46.68             | 56.00           | -9.32          |
| 12  | B    | 0.162              | 8.13           | 52.31        | 65.35           | -13.04         | 44.63             | 55.35           | -10.72         |
| 13  | B    | 0.199              | 7.94           | 47.80        | 63.67           | -15.87         | 40.53             | 53.67           | -13.14         |
| 14  | B    | 0.208              | 7.90           | 46.00        | 63.27           | -17.27         | 38.77             | 53.27           | -14.50         |
| 15  | B    | 0.214              | 7.88           | 45.38        | 63.04           | -17.66         | 37.66             | 53.04           | -15.38         |
| 16  | B    | 0.231              | 7.82           | 43.42        | 62.40           | -18.98         | 38.27             | 52.40           | -14.13         |
| 17  | B    | 0.243              | 7.78           | 42.68        | 61.98           | -19.30         | 34.69             | 51.98           | -17.29         |
| 18  | B    | 0.299              | 7.58           | 38.96        | 60.28           | -21.32         | 33.66             | 50.28           | -16.62         |
| 19  | B    | 0.417              | 7.48           | 38.05        | 57.51           | -19.46         | 24.44             | 47.51           | -23.07         |
| 20  | B    | 0.535              | 7.42           | 38.21        | 56.00           | -17.79         | 35.39             | 46.00           | -10.61         |

Table 6-18. Line Conducted Data with 802.11a

### Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: None.

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 43 of 49                   |

## 6.11 Receiver Spurious Measurements

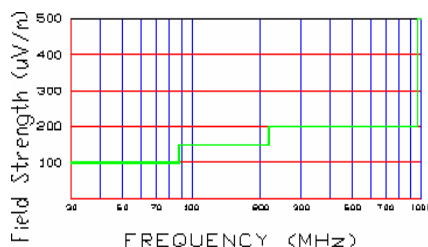
§15.205, §15.209; RSS-Gen(7.2.3.2)

Mode: Receiver

Distance of Measurements: 3 Meters

| FREQ<br>(MHz) | Level<br>(dBm) | AFCL<br>(dB/m) | POL<br>(H/V) | Height<br>(m) | Azimuth<br>(° angle) | F/S<br>(uV/M) | Margin<br>(dB) |
|---------------|----------------|----------------|--------------|---------------|----------------------|---------------|----------------|
| 74.13         | -84.59         | 6.80           | H            | 1.5           | 250                  | 28.89         | -10.8          |
| 95.16         | -81.81         | 9.12           | H            | 1.1           | 330                  | 51.93         | -9.2           |
| 113.58        | -86.82         | 10.92          | H            | 1.3           | 150                  | 35.94         | -12.4          |
| 137.26        | -91.58         | 12.78          | H            | 1.4           | 225                  | 25.75         | -15.3          |
| 311.02        | -90.09         | 21.00          | H            | 1.0           | 330                  | 78.57         | -8.1           |
| 401.67        | -94.34         | 23.74          | H            | 1.4           | 135                  | 66.12         | -9.6           |



**Table 6-19. Radiated Measurements at 3-meters**



**Figure A-13. Radiated limits at 3 meters.**



### NOTES:

1. All emissions were investigated and the worst-case emissions are reported.
2. For hand-held devices, the EUT is rotated through three orthogonal axes to determine which configuration produces the maximum emissions.
3. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
4. The EUT was tested up to the 10<sup>th</sup> harmonic (25GHz) and no significant emission was found.
5. Above 1 GHz the limit is 500µV/m at 3 meters radiated.

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 44 of 49                   |

## 7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Panasonic Toughbook Model: CF-Y5** **FCC ID: ACJ9TGCF-Y51** is in compliance with Part 15C of the FCC Rules. Measurement uncertainty was not taken into account in this determination.

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 45 of 49                   |

## EXHIBIT A – LABELING REQUIREMENTS

### Sample Label & Location

New Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The sample label shown below shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name, FCC ID, and the FCC logo must be displayed on the device per Section 15.19(b)(2).

**Note:** The FCC ID shown will be readily visible at the time of purchase.

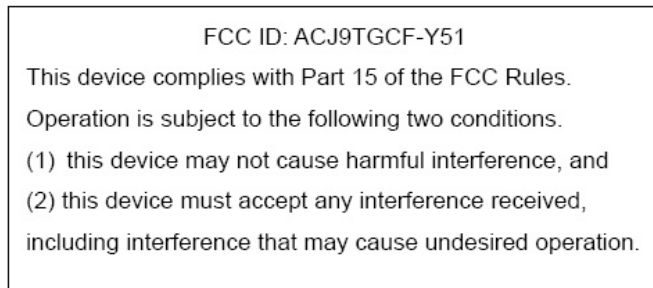


Figure A-1. FCC ID Label

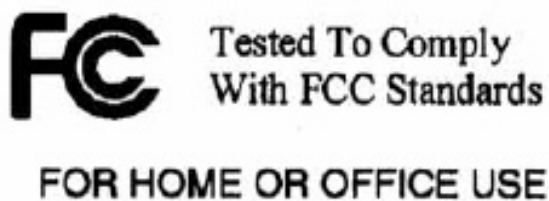


Figure A-2. FCC DoC Label

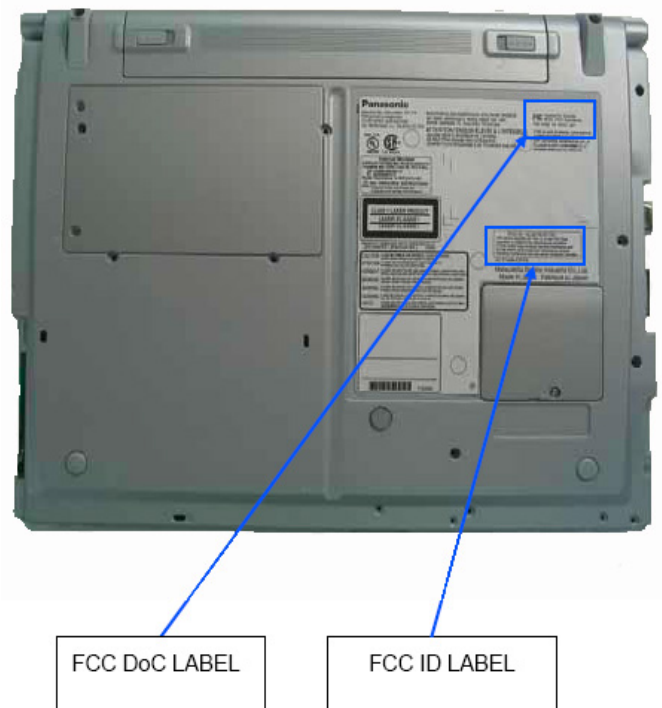






Figure A-3. FCC ID Label Location

|                                |   |  |   |                                 |
|--------------------------------|---|--|---|---------------------------------|
| FCC ID: ACJ9TGCF-Y51           |  | FCC Pt. 15.247 CERTIFICATION TEST REPORT<br>(WLAN 802.11a/b/g) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0608220711 | Test Dates:<br>October 2 - 3, 2006  | EUT Type:<br>Toughbook Model: CF-Y5                            |   | Page 46 of 49                   |



## EXHIBIT B – TEST SETUP PHOTOGRAPHS

The Line-Conducted and Radiated Test Pictures show the worst-case configuration and cable placement with a minimum margin to the specifications.

|                                       |   |   |   |  |
|---------------------------------------|---|---|---|--|
| <b>FCC ID:</b> ACJ9TGCF-Y51           |  | <b>FCC Pt. 15.247 CERTIFICATION TEST REPORT</b><br>(WLAN 802.11a/b/g) |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0608220711 | <b>Test Dates:</b><br>October 2 - 3, 2006   | <b>EUT Type:</b><br>Toughbook Model: CF-Y5                            | Page 47 of 49   |  |





## EXHIBIT C – EUT EXTERNAL/INTERNAL PHOTOGRAPHS

|                                       |   |   |   |  |
|---------------------------------------|---|---|---|--|
| <b>FCC ID:</b> ACJ9TGCY-Y51           |  | <b>FCC Pt. 15.247 CERTIFICATION TEST REPORT</b><br>(WLAN 802.11a/b/g) |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0608220711 | <b>Test Dates:</b><br>October 2 - 3, 2006   | <b>EUT Type:</b><br>Toughbook Model: CF-Y5                            |   | Page 48 of 49                          |





## EXHIBIT D – USER’S MANUAL

|                                       |   |   |   |  |
|---------------------------------------|---|---|---|--|
| <b>FCC ID:</b> ACJ9TGCF-Y51           |  | <b>FCC Pt. 15.247 CERTIFICATION TEST REPORT</b><br>(WLAN 802.11a/b/g) |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0608220711 | <b>Test Dates:</b><br>October 2 - 3, 2006   | <b>EUT Type:</b><br>Toughbook Model: CF-Y5                            |   | Page 49 of 49                          |