

FCC TEST REPORT FCC 47 CFR Part 15C Industry Canada RSS-247 Frequency hopping systems operating within the 2400 – 2483.5 MHz band	
Report Reference No.	G0M-1409-4119-TIC247BT-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	  A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC OATS Filing assigned code: 3470A
Applicant's name	Leica Geosystems AG
Address	Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND
Test specification:	
Standard	47 CFR Part 15C RSS-247, Issue 1, 2015-05 ANSI C63.10:2013
Test scope	complete Radio compliance test
Equipment under test (EUT):	
Product description	GNSS Receiver for Machine Control
Model No.	iCG80
Additional Model(s)	None
Brand Name(s)	ICON
Hardware version	Pantani PROTO1
Firmware / Software version	None
	FCC-ID: N/A IC: 3177A-ICG8XNG
Test result	Passed

Possible test case verdicts:

- neither assessed nor tested: N/N
- required by standard but not appl. to test object.....: N/A
- required by standard but not tested.....: N/T
- not required by standard for the test object: N/R
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Test Lab Temperature.....: 20 – 23 °C

Test Lab Humidity: 32 – 38 %

Date of receipt of test item: 2014-09-04

Date (s) of performance of tests: 2015-02-19 - 2015-02-23

Compiled by: Wilfried Treffke

Tested by (+ signature): Wilfried Treffke

(Responsible for Test)

Approved by (+ signature): Christian Weber

Date of issue: 2016-03-10

Total number of pages: 129



General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Version History

Version	Issue Date	Remarks	Revised by
01	2016-03-10	Initial Release	

REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1	Photos – Equipment External	6
1.2	Photos – Equipment internal	9
1.3	Photos – Test setup	11
1.4	Supporting Equipment Used During Testing	12
1.5	Test Modes	13
1.6	Test Equipment Used During Testing	15
1.7	Sample emission level calculation	17
2	RESULT SUMMARY	18
3	TEST CONDITIONS AND RESULTS	19
3.1	Test Conditions and Results – Occupied Bandwidth	19
3.2	Test Conditions and Results – 20 dB Bandwidth	29
3.3	Test Conditions and Results – Number of hopping frequencies	39
3.4	Test Conditions and Results – Frequency hopping channel separation	43
3.5	Test Conditions and Results – Time of occupancy (Dwell Time)	45
3.6	Test Conditions and Results – Maximum peak conducted power	47
3.7	Test Conditions and Results – AC power line conducted emissions	49
3.8	Test Conditions and Results – Band edge compliance	54
3.9	Test Conditions and Results – Conducted spurious emissions	63
3.10	Test Conditions and Results – Transmitter radiated emissions	70
3.11	Test Conditions and Results – Receiver radiated emissions	72
ANNEX A	Transmitter radiated spurious emissions	74
ANNEX B	Receiver radiated spurious emissions	122

1 Equipment (Test item) Description

Description	GNSS Receiver for Machine Control	
Model	ICG80	
Additional Model(s)	None	
Brand Name(s)	ICON	
Serial number	2920018 (conducted) / 2920021(radiated)	
Hardware version	Pantani PROTO1	
Software / Firmware version	None	
FCC-ID	N/A	
IC	3177A-ICG8XNG	
Equipment type	End product	
Radio type	Transceiver	
Radio technology	Bluetooth	
Operating frequency range	2402 - 2480 MHz	
Assigned frequency band	2400 - 2483.5 MHz	
Main test frequencies	F _{LOW}	2402 MHz
	F _{MID}	2441 MHz
	F _{HIGH}	2480 MHz
Spreading	FHSS	
Modulations	GFSK, PI/4-DQPSK, 8-PSK	
Number of channels	79 hopping channels at all	
Channel spacing	1 MHz	
Number of antennas	1	
Antenna	Type	integrated
	Model	not specified
	Manufacturer	Leica
	Gain	-12 (manufacturer declaration)
Manufacturer	Leica Geosystems AG Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND	
Power supply	V _{NOM}	24.0 VDC
	V _{MIN}	09.0 VDC
	V _{MIN}	36.0 VDC
AC/DC-Adaptor	Model	None
	Vendor	None
	Input	None
	Output	None

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
SIM	Communication tester	Rohde & Schwarz	CBT	
*Note: Use the following abbreviations: AE : Auxiliary/Associated Equipment, or SIM : Simulator (Not Subjected to Test) CABL : Connecting cables				

1.5 Test Modes

Mode #	Description	
DH5-Sngl	General conditions:	EUT powered by laboratory power supply
	Radio conditions:	Mode = standalone transmit Spreading = Hopping stopped (single hopping channel) Modulation = GFSK Packet type = DH5 Data rate = 1 Mbps Duty cycle = 77 % Power level = Maximum
2DH5-Sngl	General conditions:	EUT powered by laboratory power supply
	Radio conditions:	Mode = standalone transmit Spreading = Hopping stopped (single hopping channel) Modulation = $\pi/4$ -DQPSK Packet type = 2DH5 Data rate = 2 Mbps Duty cycle = 77 % Power level = Maximum
3DH5-Sngl	General conditions:	EUT powered by laboratory power supply
	Radio conditions:	Mode = standalone transmit Spreading = Hopping stopped (single hopping channel) Modulation = 8-DPSK Packet type = 3DH5 Data rate = 3 Mbps Duty cycle = 77 % Power level = Maximum
DH5-Hop	General conditions:	EUT powered by laboratory power supply
	Radio conditions:	Mode = standalone transmit Spreading = Hopping Modulation = GFSK Packet type = DH5 Data rate = 1 Mbps Duty cycle = 77 % Power level = Maximum

Receive	General conditions:	EUT powered by laboratory power supply
	Radio conditions:	Mode = standalone receive Spreading = Hopping
AC-Powerline	General conditions:	EUT powered by laboratory power supply
	Radio conditions:	Mode = standalone transmit Spreading = Hopping Power level = Maximum

1.6 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2014.1.15

20dB Bandwidth					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum analyzer	R&S	FSW43	EF00896	2014-02	2015-02

Number of hopping frequencies					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum analyzer	R&S	FSW43	EF00896	2014-02	2015-02

Time of occupancy					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum analyzer	R&S	FSW43	EF00896	2014-02	2015-02

Maximum peak conducted power					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum analyzer	R&S	FSW43	EF00896	2014-02	2015-02

Band edge compliance					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum analyzer	R&S	FSW43	EF00896	2014-02	2015-02

Conducted spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum analyzer	R&S	FSW43	EF00896	2014-02	2015-02

Radiated spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Semi-anechoic chamber	Frankonia	AC 1	EF00062	-	-
Spectrum Analyzer	R&S	FSIQ26	EF00242	2014-03	2015-03
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD Antenna	R&S	HL 223	EF00187	2014-03	2017-03
LPD Antenna	R&S	HL 025	EF00327	2013-02	2016-02

AC powerline conducted emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2014-11	2016-11
EMI Test Receiver	R&S	ESCS 30	EF00295	2014-10	2015-10

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15C, IC RSS-247				
Product Specific Standard Section	Requirement – Test	Reference Method	Result	Remarks
RSS-Gen 6.6	Occupied Bandwidth	ANSI C63.10	N/R	Informational only
FCC § 15.247(a)(1) IC RSS-247 § 5.1	20 dB Bandwidth	ANSI C63.10	PASS	
FCC § 15.247(a)(1)(iii) IC RSS-247 § 5.1	Number of hopping frequencies	ANSI C63.10	PASS	
FCC § 15.247(a)(1) IC RSS-247 § 5.1	Frequency hopping channel separation	ANSI C63.10	PASS	
FCC § 15.247(a)(1)(iii) IC RSS-247 § 5.1	Time of occupancy (Dwell time)	ANSI C63.10	PASS	
FCC § 15.247(b)(1) IC RSS-247 § 5.4	Maximum peak conducted power	ANSI C63.10	PASS	
47 CFR 15.207 IC RSS-247 § 3.1	AC power line conducted emissions	ANSI C63.4	PASS	
FCC § 15.247(d) IC RSS-247 § 5.5	Band edge compliance	ANSI C63.10	PASS	
FCC § 15.247(d) IC RSS-247 § 5.5	Conducted spurious emissions	ANSI C63.10	PASS	
FCC § 15.247(d) FCC § 15.209 IC RSS-247 § 5.5	Transmitter radiated spurious emissions	ANSI C63.10	PASS	
IC RSS-247 § 3.1	Receiver radiated spurious emissions	ANSI C63.10	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Occupied Bandwidth


Occupied Bandwidth acc. to IC RSS-Gen			Verdict: PASS
Test according to measurement reference	Reference Method		
	ANSI C63.10		
Test frequency range	Tested frequencies		
	F _{LOW} / F _{MID} / F _{HIGH}		
Limits			
None (Informational only)			
Test setup			
Spectrum Analyzer EUT			
Test procedure			
1. EUT set to test mode (Communication tester is used if needed) 2. Span set to at least twice the emission spectrum 3. Resolution bandwidth set to 1 % of span 4. Occupied Bandwidth (99 %) measurement with spectrum analyzer built in measurement function			
Test results			
Channel	Frequency [MHz]	Mode	Occupied Bandwidth [kHz]
F _{LOW}	2402	DH5-Sngl	1004.7
F _{MID}	2441	DH5-Sngl	1017.2
F _{HIGH}	2480	DH5-Sngl	1007.2
F _{LOW}	2402	2DH5-Sngl	1259.7
F _{MID}	2441	2DH5-Sngl	1264.7
F _{HIGH}	2480	2DH5-Sngl	1274.2
F _{LOW}	2402	3DH5-Sngl	1252.2
F _{MID}	2441	3DH5-Sngl	1279.7
F _{HIGH}	2480	3DH5-Sngl	1259.7
Comments:			

Occupied Bandwidth – DH5-Sngl F_{Low}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
EUT Name: GNSS Receiver for Machine Control
Model: iCG80
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom / Vnom
Mode: Tx, GFSK, 2402 MHz, modulated
Test Date: 2015-02-19
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: conducted measurement

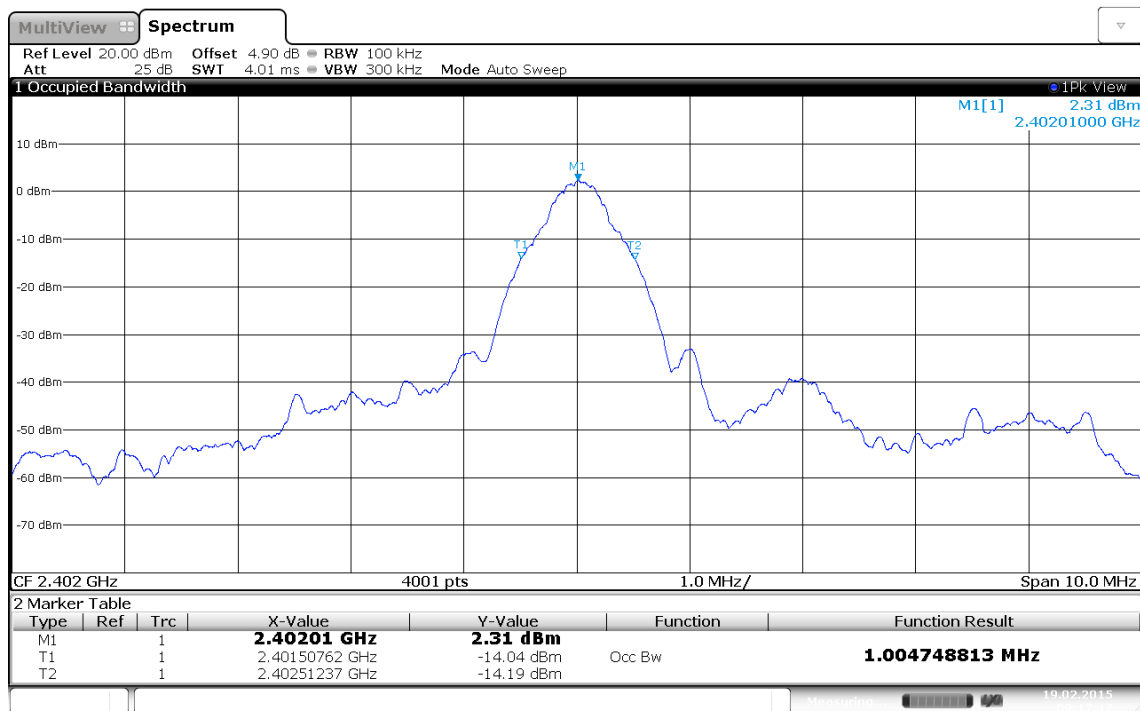

Occupied bandwidth: 1004.7 KHz


Date: 19.FEB.2015 09:17:47

Occupied Bandwidth – DH5-Sngl F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
EUT Name: GNSS Receiver for Machine Control
Model: iCG80
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom / Vnom
Mode: Tx, GFSK, 2441 MHz, modulated
Test Date: 2015-02-19
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: conducted measurement

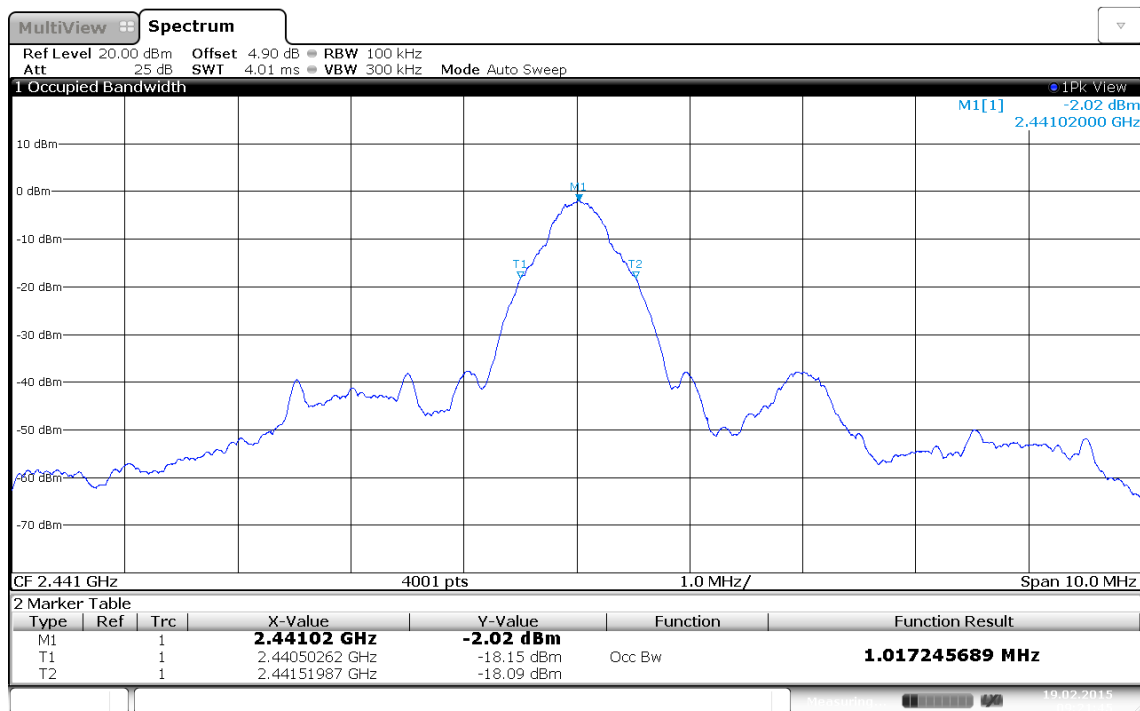

Occupied bandwidth: 1017.2 KHz


Date: 19.FEB.2015 09:21:45

Occupied Bandwidth – DH5-Sngl F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, GFSK, 2480 MHz, modulated
 Test Date: 2015-02-19
 Verdict: NONE (INFORMATION ONLY)
 Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
 Note 2: conducted measurement

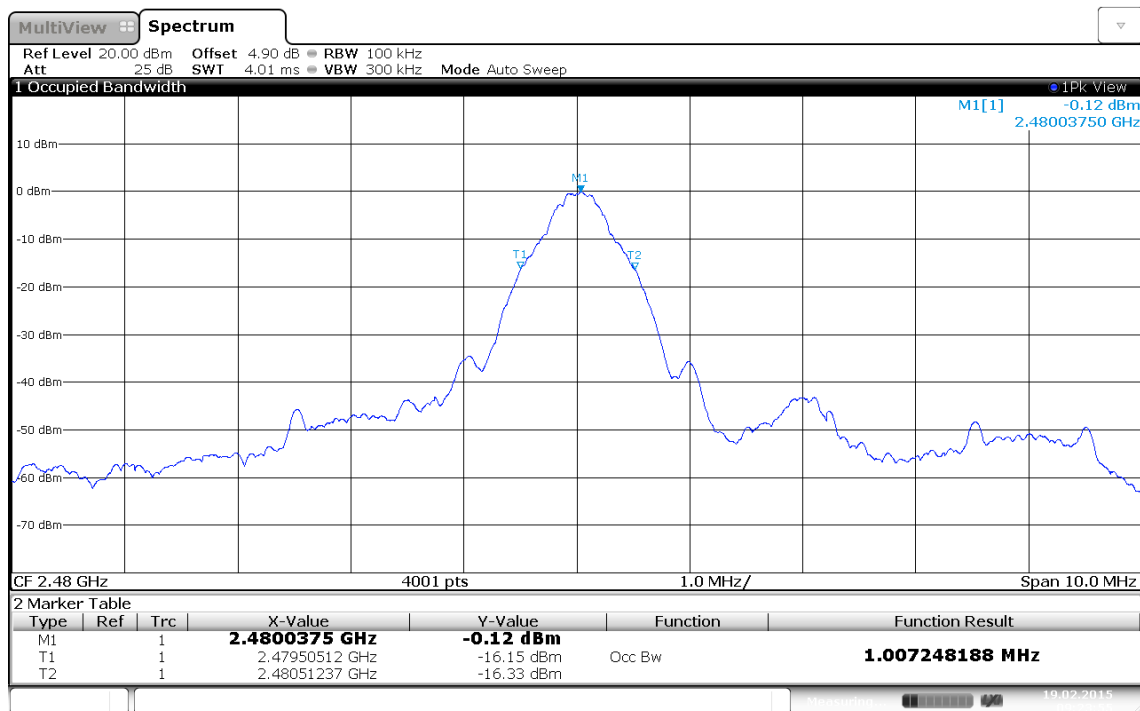

Occupied bandwidth: 1007.2 KHz


Date: 19.FEB.2015 09:23:54

Occupied Bandwidth – 2-DH5-Sngl F_{LOW}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
EUT Name: GNSS Receiver for Machine Control
Model: iCG80
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom / Vnom
Mode: Tx, PI/4-DQPSK, 2402 MHz, modulated
Test Date: 2015-02-19
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: conducted measurement

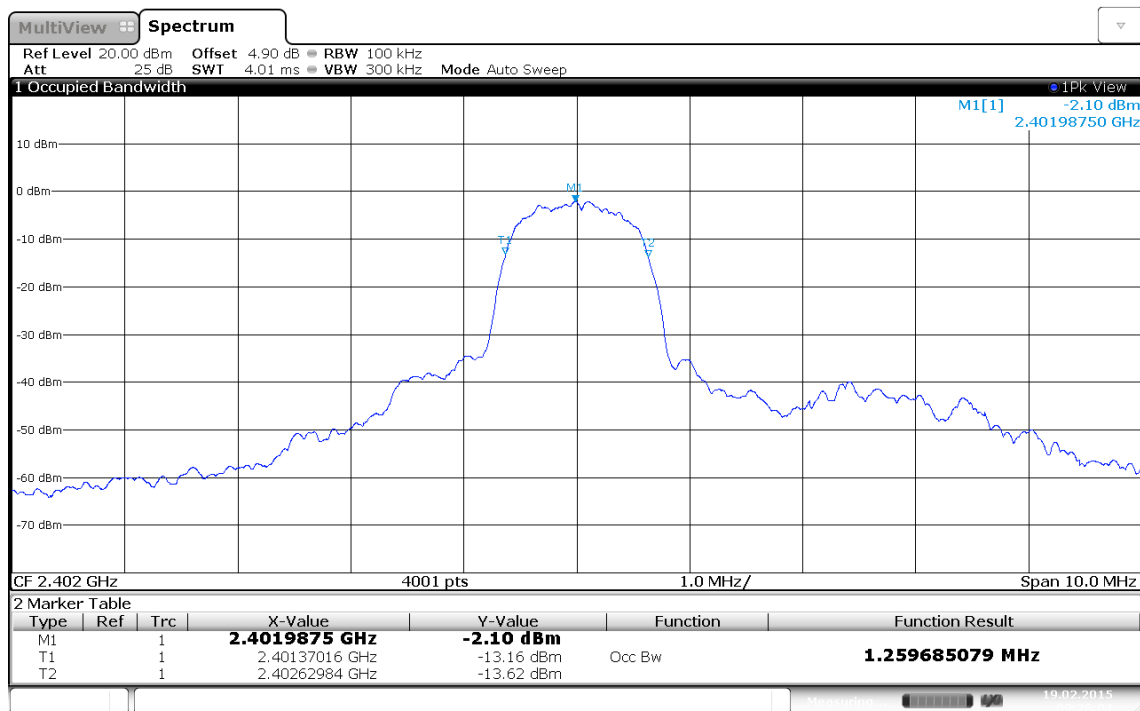

Occupied bandwidth: 1259.7 KHz


Date: 19.FEB.2015 09:26:04

Occupied Bandwidth – 2-DH5-Sngl F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
EUT Name: GNSS Receiver for Machine Control
Model: iCG80
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom / Vnom
Mode: Tx, PI/4-DQPSK, 2441 MHz, modulated
Test Date: 2015-02-19
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: conducted measurement

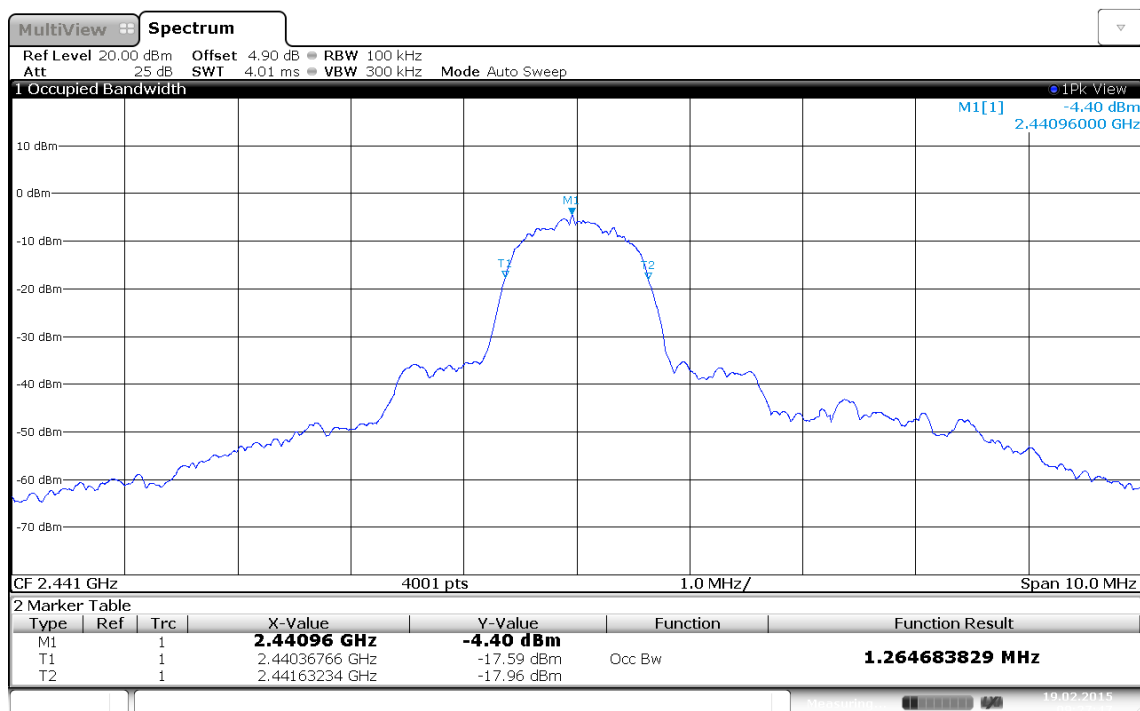

Occupied bandwidth: 1264.7 KHz

Date: 19.FEB.2015 09:27:47

Test Report No.: G0M-1409-4119-TIC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – 2-DH5-Sngl F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
EUT Name: GNSS Receiver for Machine Control
Model: iCG80
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom / Vnom
Mode: Tx, PI/4-DQPSK, 2480 MHz, modulated
Test Date: 2015-02-19
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: conducted measurement

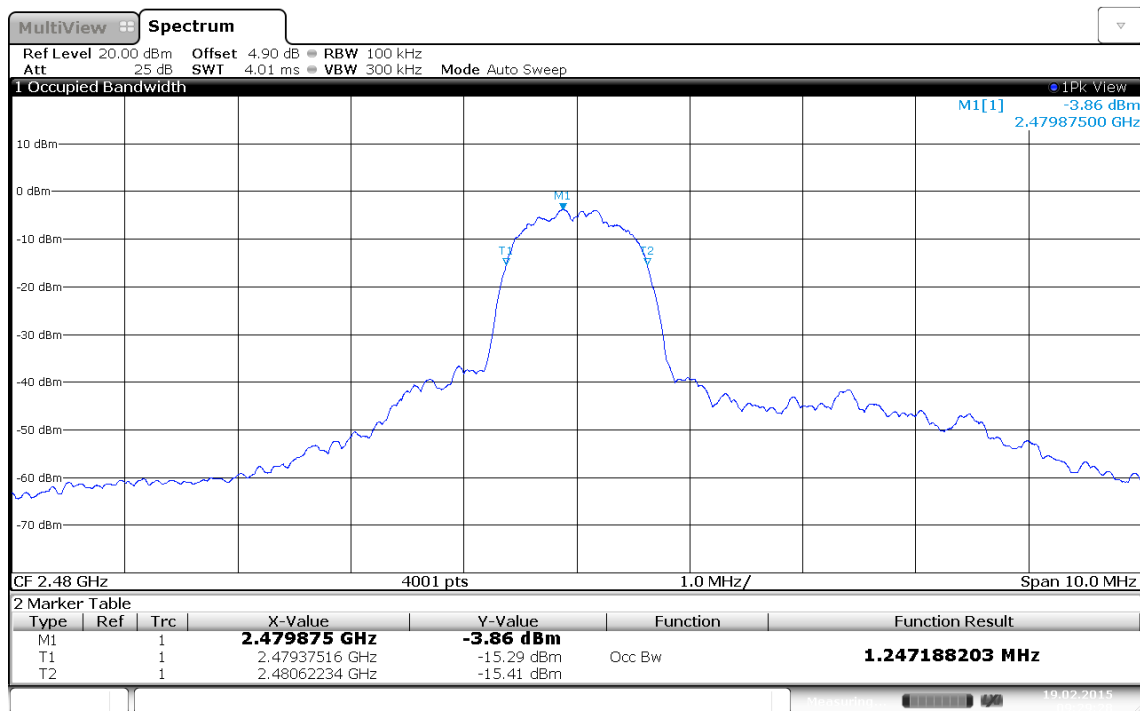

Occupied bandwidth: 1247.2 KHz

Date: 19.FEB.2015 09:29:28

Test Report No.: G0M-1409-4119-TIC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – 3-DH5-Sngl F_{LOW}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
EUT Name: GNSS Receiver for Machine Control
Model: iCG80
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom / Vnom
Mode: Tx, 8DPSK, 2402 MHz, modulated
Test Date: 2015-02-19
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: conducted measurement

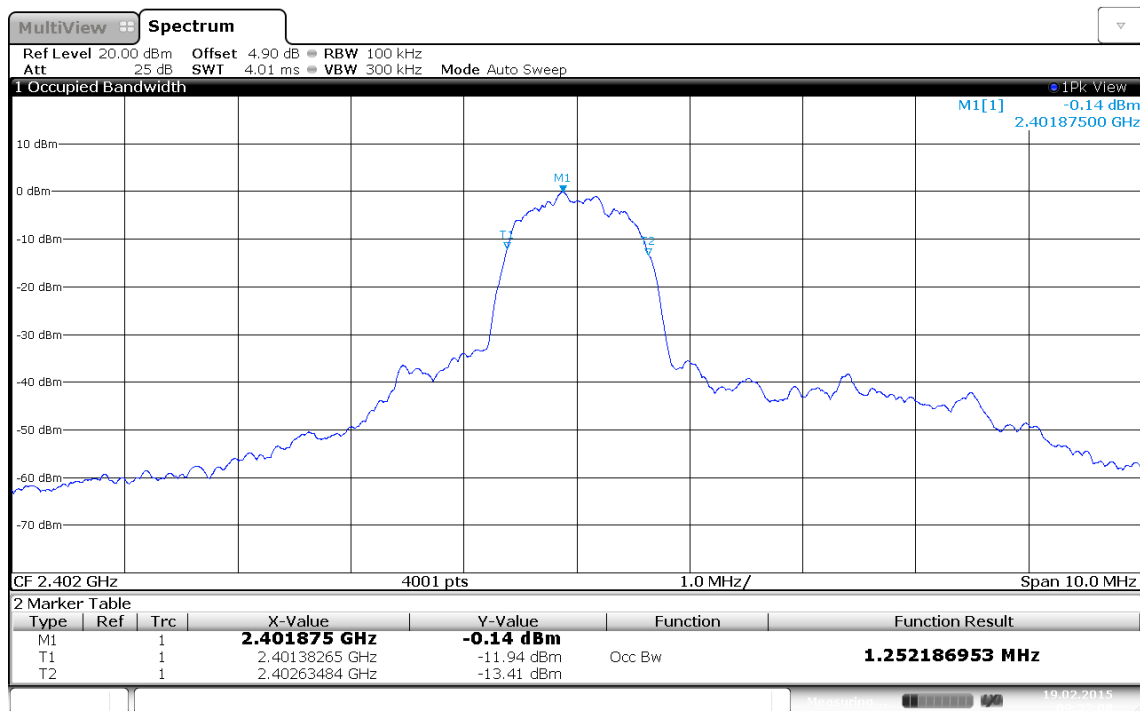

Occupied bandwidth: 1252.2 KHz

Date: 19.FEB.2015 09:32:08

Occupied Bandwidth – 3-DH5-Sngl F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
EUT Name: GNSS Receiver for Machine Control
Model: iCG80
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom / Vnom
Mode: Tx, 8DPSK, 2441 MHz, modulated
Test Date: 2015-02-19
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: conducted measurement



Occupied bandwidth: 1279.7 KHz

Date: 19.FEB.2015 09:33:50

Test Report No.: G0M-1409-4119-TIC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – 3-DH5-Sngl F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
EUT Name: GNSS Receiver for Machine Control
Model: iCG80
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom / Vnom
Mode: Tx, 8DPSK, 2480 MHz, modulated
Test Date: 2015-02-19
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: conducted measurement

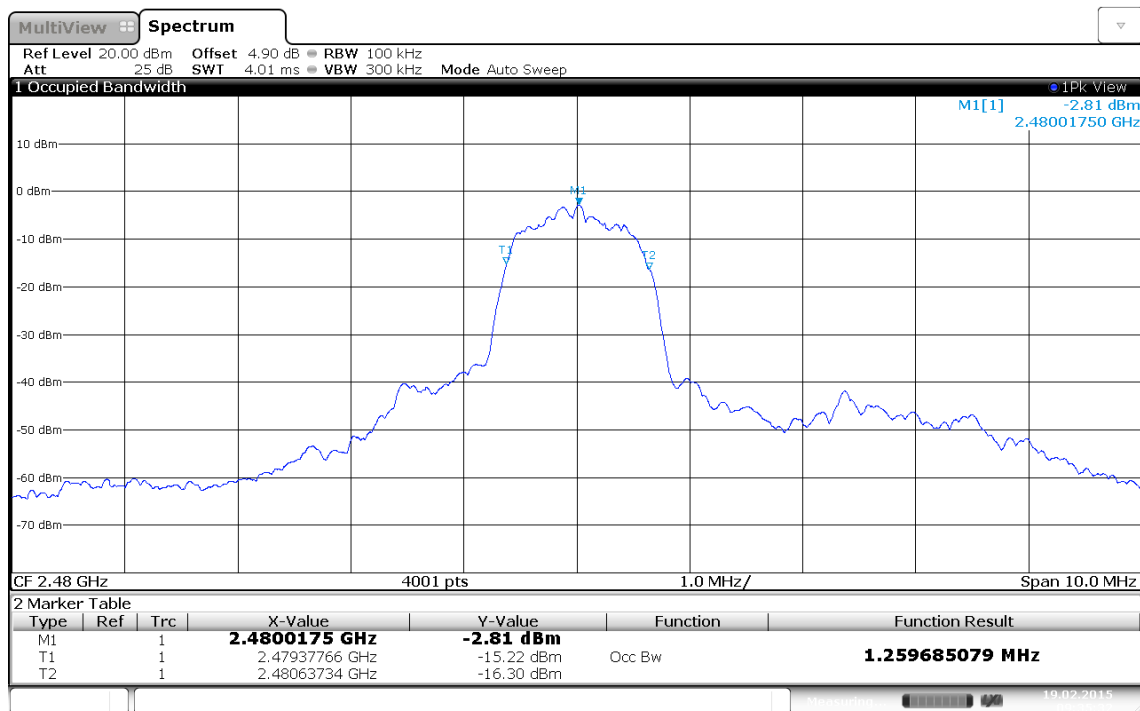

Occupied bandwidth: 1259.7 KHz

Date: 19.FEB.2015 09:35:32

3.2 Test Conditions and Results – 20 dB Bandwidth


20 dB Bandwidth acc. to FCC 15.247 / IC RSS-247				Verdict: PASS	
EUT requirement rule parts and clause	Reference				
	FCC 15.247(a)(1) / IC RSS-247 5.1				
Test according to measurement reference	Reference Method				
	ANSI C63.10				
Test frequency range	Tested frequencies				
	F _{LOW} / F _{MID} / F _{HIGH}				
Limits					
Limit		Condition			
1.5 · Carrier spacing		Output power ≤ 125 mW / 21 dBm			
1.0 · Carrier spacing		125 mW / 21 dBm < Output power ≤ 1 W / 30 dBm			
Test setup					
Spectrum Analyzer EUT					
Test procedure					
1. EUT set to test mode (Communication tester is used if needed) 2. Span set to at least twice the emission spectrum 3. Detector set to peak and max hold 4. Envelope peak value of emission spectrum is selected 5. Marker on envelope of spectrum is set to level of -20 dB to the left of the peak 6. Marker on envelope of spectrum is set to level of -20 dB to the right of the peak 7. 20dB Bandwidth is determined by marker frequency separation					
Test results					
Channel	Frequency [MHz]	Mode	20 dB Bandwidth [MHz]	Limit [MHz]	Result
F _{LOW}	2402	DH5-Sngl	931.9	1.5	PASS
F _{MID}	2441	DH5-Sngl	931.9	1.5	PASS
F _{HIGH}	2480	DH5-Sngl	931.9	1.5	PASS
F _{LOW}	2402	2DH5-Sngl	1270.4	1.5	PASS
F _{MID}	2441	2DH5-Sngl	1272.6	1.5	PASS
F _{HIGH}	2480	2DH5-Sngl	1268.2	1.5	PASS
F _{LOW}	2402	3DH5-Sngl	1261.6	1.5	PASS
F _{MID}	2441	3DH5-Sngl	1261.6	1.5	PASS
F _{HIGH}	2480	3DH5-Sngl	1259.4	1.5	PASS
Comments:					

20 dB Bandwidth – DH5-Sngl F_{LOW}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, GFSK, DH5, 2402 MHz
 Test Date: 2015-02-19
 Verdict: PASS
 Note 1: FCC part 15 section 247 (a)

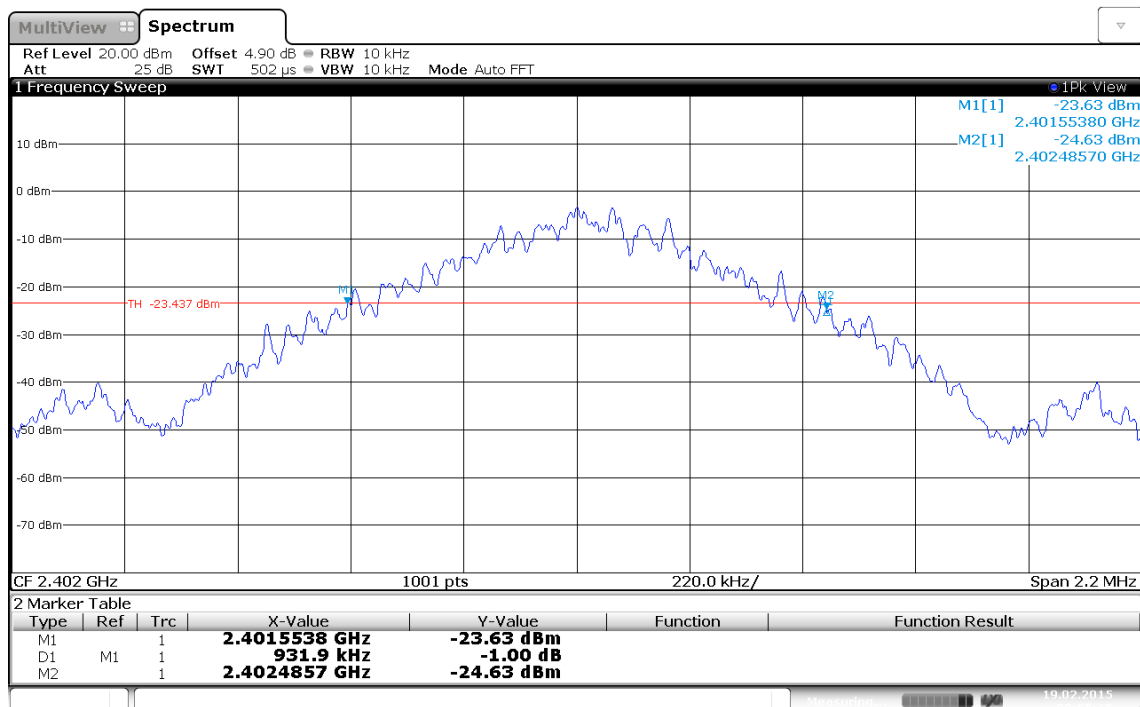


20 dB bandwidth: 931.9 KHz
 Date: 19.FEB.2015 09:55:15

20 dB Bandwidth – DH5-Sngl F_{MID}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, GFSK, DH5, 2441 MHz
 Test Date: 2015-02-19
 Verdict: PASS
 Note 1: FCC part 15 section 247 (a)

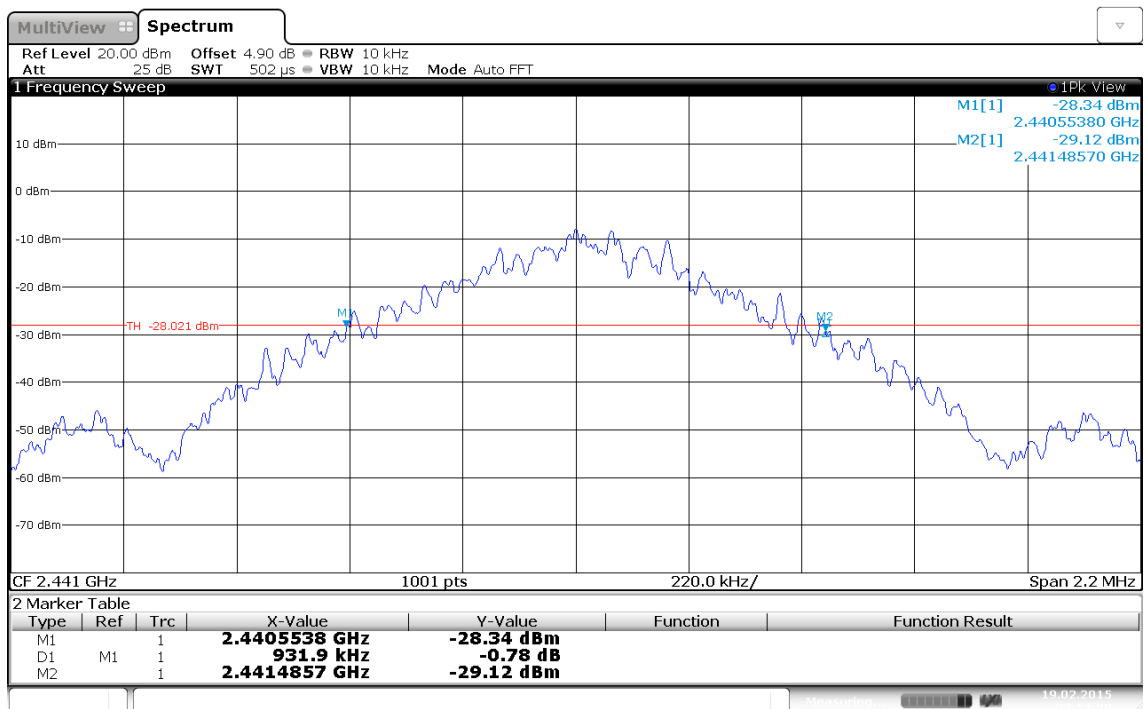


20 dB bandwidth: 931.9 KHz
 Date: 19.FEB.2015 09:57:38

20 dB Bandwidth – DH5-Sngl F_{HIGH}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, GFSK, DH5, 2480 MHz
 Test Date: 2015-02-19
 Verdict: PASS
 Note 1: FCC part 15 section 247 (a)

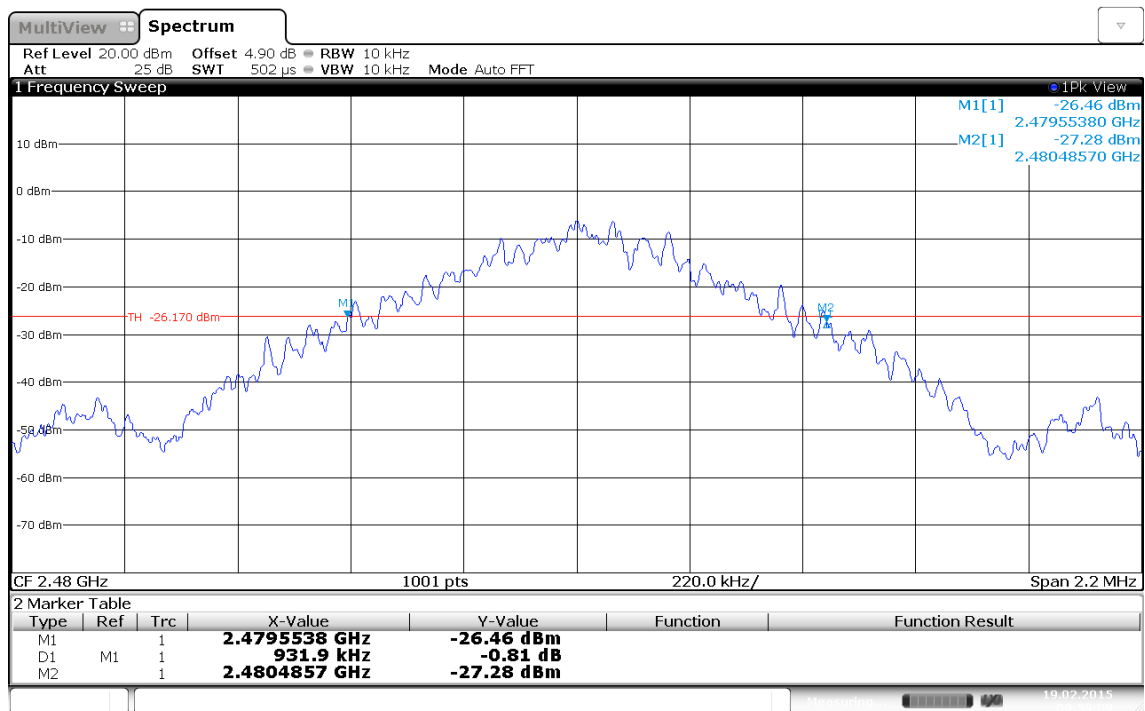


20 dB bandwidth: 931.9 KHz
 Date: 19.FEB.2015 09:59:10

20 dB Bandwidth – 2-DH5-Sngl F_{Low}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, PI/4QPSK, 2DH5, 2402 MHz
 Test Date: 2015-02-19
 Verdict: PASS
 Note 1: FCC part 15 section 247 (a)

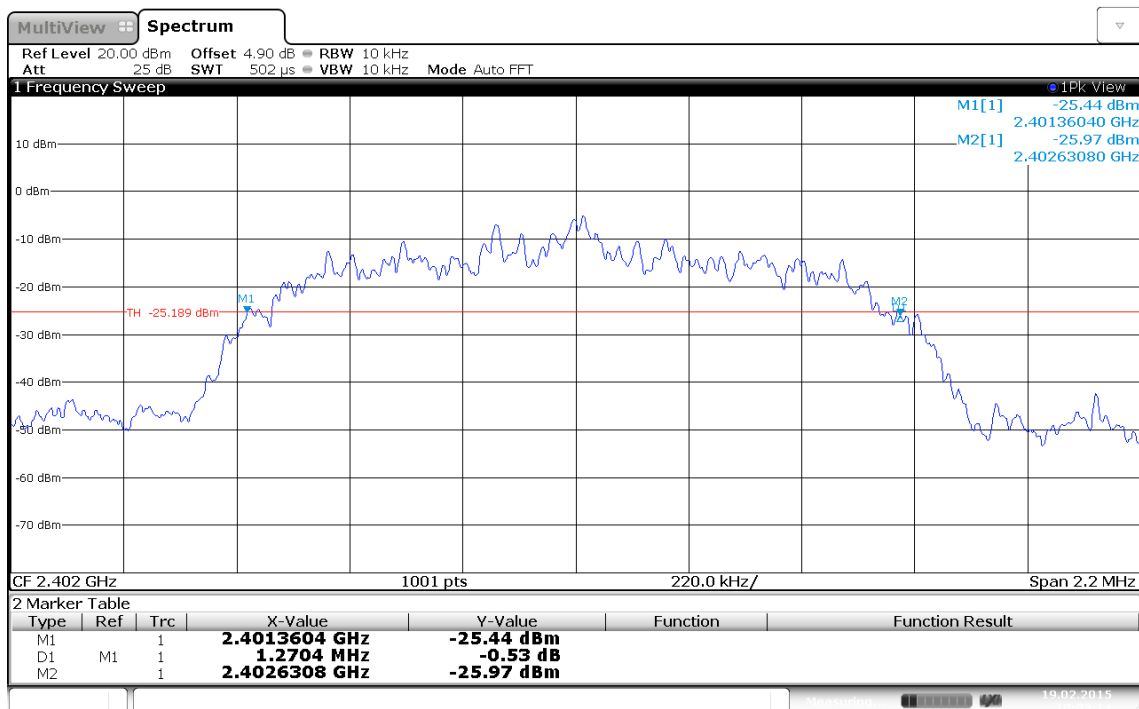

20 dB bandwidth: 1270.4 KHz


Date: 19.FEB.2015 10:03:14

20 dB Bandwidth – 2-DH5-Sngl F_{MID}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, PI/4QPSK, 2DH5, 2441 MHz
 Test Date: 2015-02-19
 Verdict: PASS
 Note 1: FCC part 15 section 247 (a)

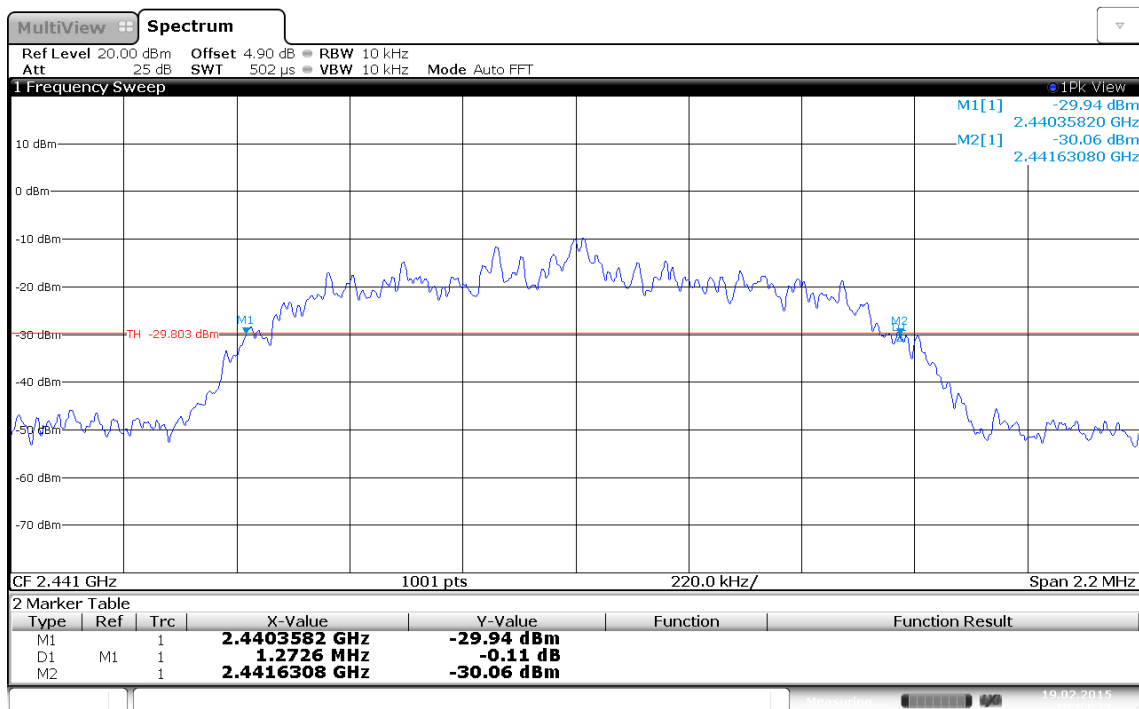

20 dB bandwidth: 1272.6 KHz


Date: 19.FEB.2015 10:04:47

20 dB Bandwidth – 2-DH5-Sngl F_{HIGH}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, PI/4QPSK, 2DH5, 2480 MHz
 Test Date: 2015-02-19
 Verdict: PASS
 Note 1: FCC part 15 section 247 (a)

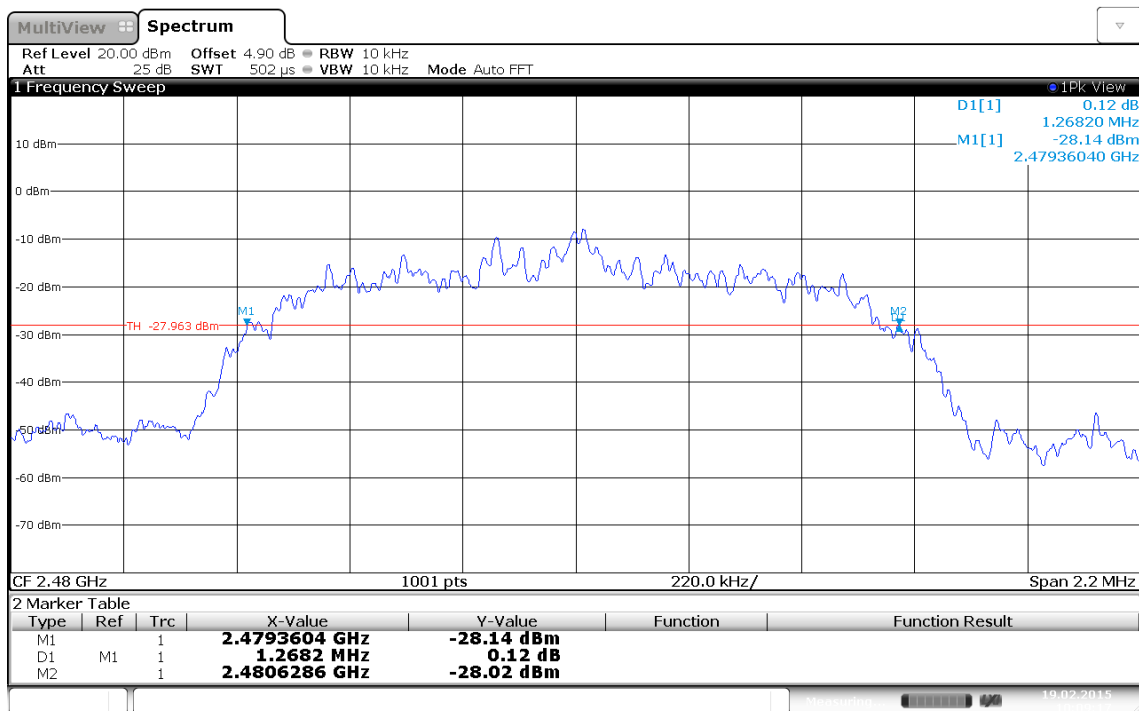

20 dB bandwidth: 1268.2 KHz


Date: 19.FEB.2015 10:09:16

20 dB Bandwidth – 3-DH5-Sngl F_{Low}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, 8DPSK, 3DH5, 2402 MHz
 Test Date: 2015-02-19
 Verdict: PASS
 Note 1: FCC part 15 section 247 (a)

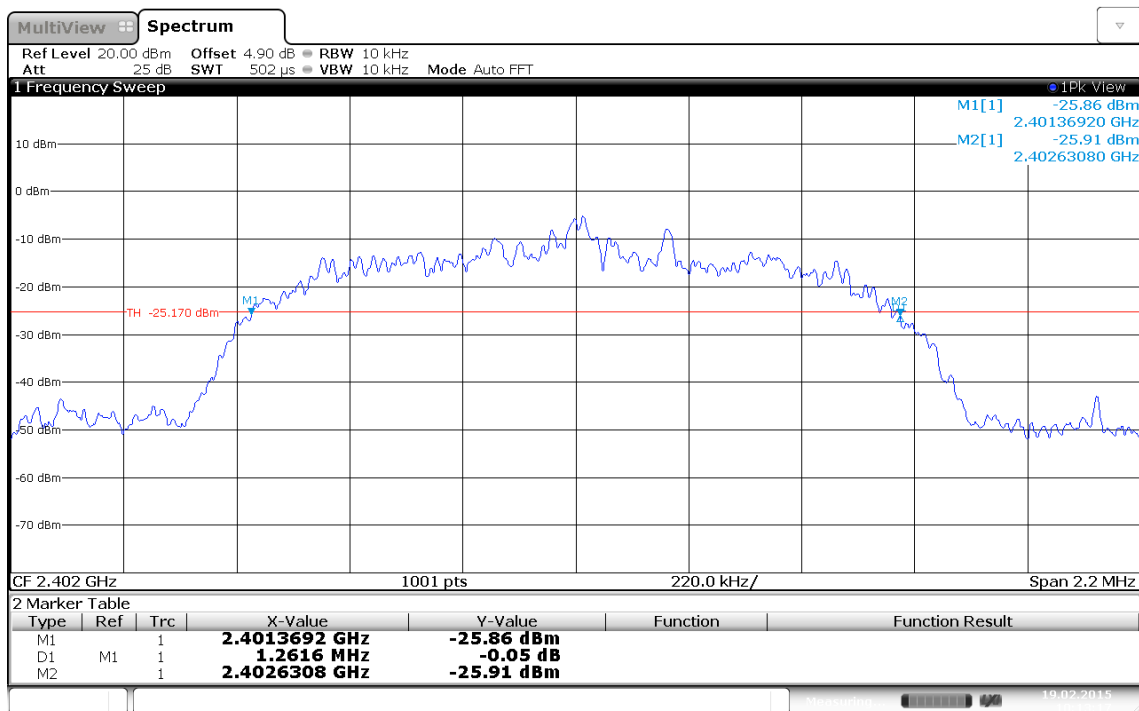

20 dB bandwidth: 1261.6 KHz


Date: 19.FEB.2015 10:13:17

20 dB Bandwidth – 3-DH5-Sngl F_{MID}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, 8DPSK, 3DH5, 2441 MHz
 Test Date: 2015-02-19
 Verdict: PASS
 Note 1: FCC part 15 section 247 (a)

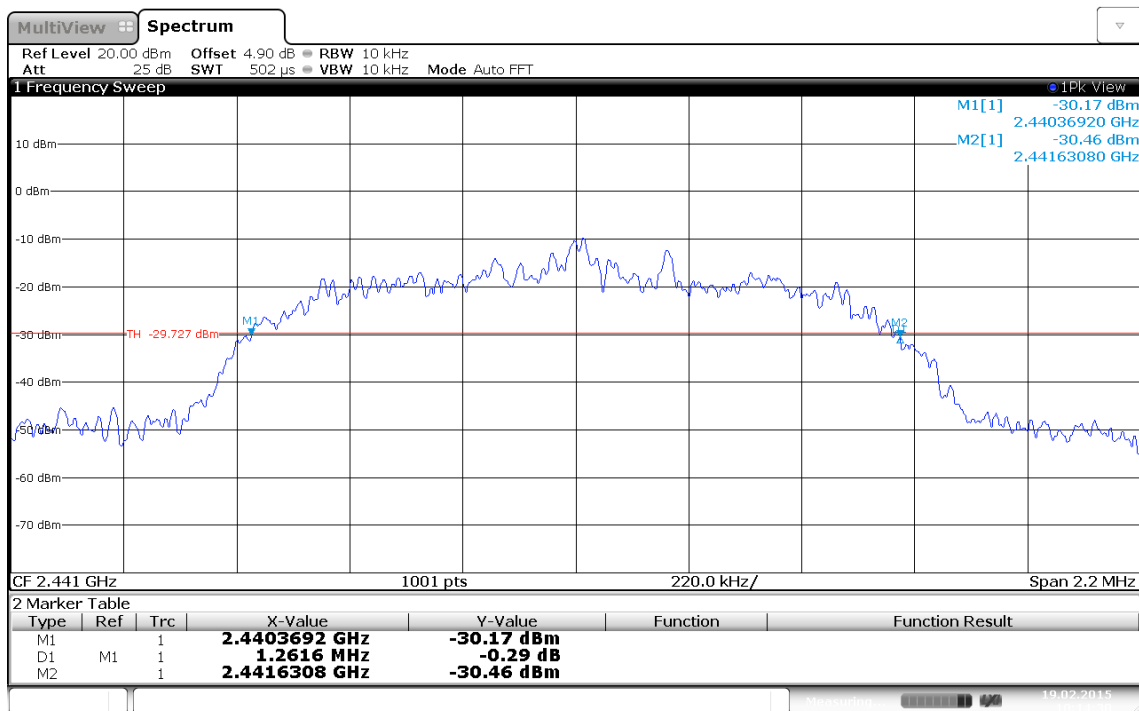

20 dB bandwidth: 1261.6 KHz


Date: 19.FEB.2015 10:14:30

20 dB Bandwidth – 3-DH5-Sngl F_{HIGH}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, 8DPSK, 3DH5, 2480 MHz
 Test Date: 2015-02-19
 Verdict: PASS
 Note 1: FCC part 15 section 247 (a)

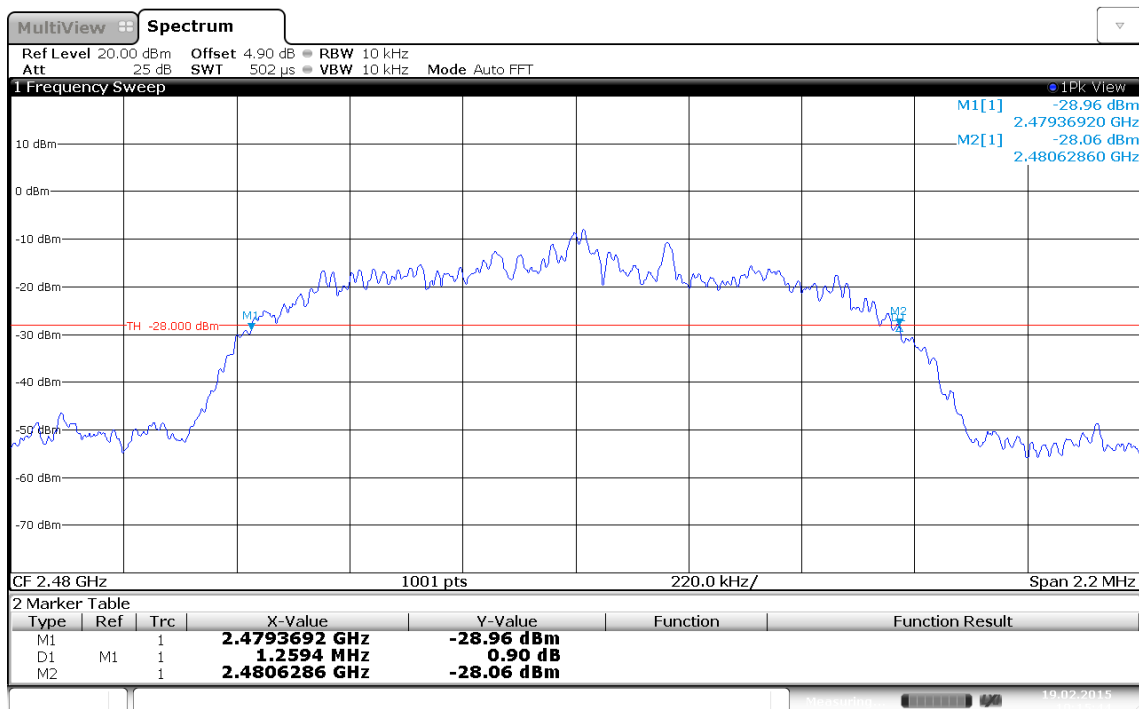

20 dB bandwidth: 1259.4 KHz

Date: 19.FEB.2015 10:15:43

Test Report No.: G0M-1409-4119-TIC247BT-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.3 Test Conditions and Results – Number of hopping frequencies


Number of hopping frequencies acc. to FCC 15.247 / IC RSS-247		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.247(a)(1)(iii) / IC RSS-247 5.1	
Test according to measurement reference	Reference Method	
	ANSI C63.10	
Test frequency range	Tested frequencies	
	F _{LOW} - F _{HIGH}	
EUT test mode	DH5-Hop	
Limits		
Limit	Condition	
Number of hopping channels ≥ 15	Output power ≤ 125 mW / 21 dBm	
Number of hopping channels ≥ 75	125 mW / 21 dBm < Output power ≤ 1 W / 30 dBm	
Test setup		
Spectrum Analyzer EUT		
Test procedure		
1. EUT set to test mode (Communication tester is used if needed) 2. Span set to measurement frequency range 3. Detector set to peak and max hold 4. Resolution bandwidth is set small enough to resolve hopping channel emission spectra 5. The number of peaks is counted to determine number of hopping frequencies		
Test results		
Number of hopping frequencies	Limit	Result
79	≥ 15	PASS
Comments:		

Number of hopping frequencies - Range A

Number of Hopping Frequencies acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, GFSK, hopping mode
 Test Date: 2015-02-19
 Verdict: PASS
 Note 1: Number of Hopping Frequencies (DA 00-705 Meas Guidance)
 Note 2: conducted measurement, channel 0-24

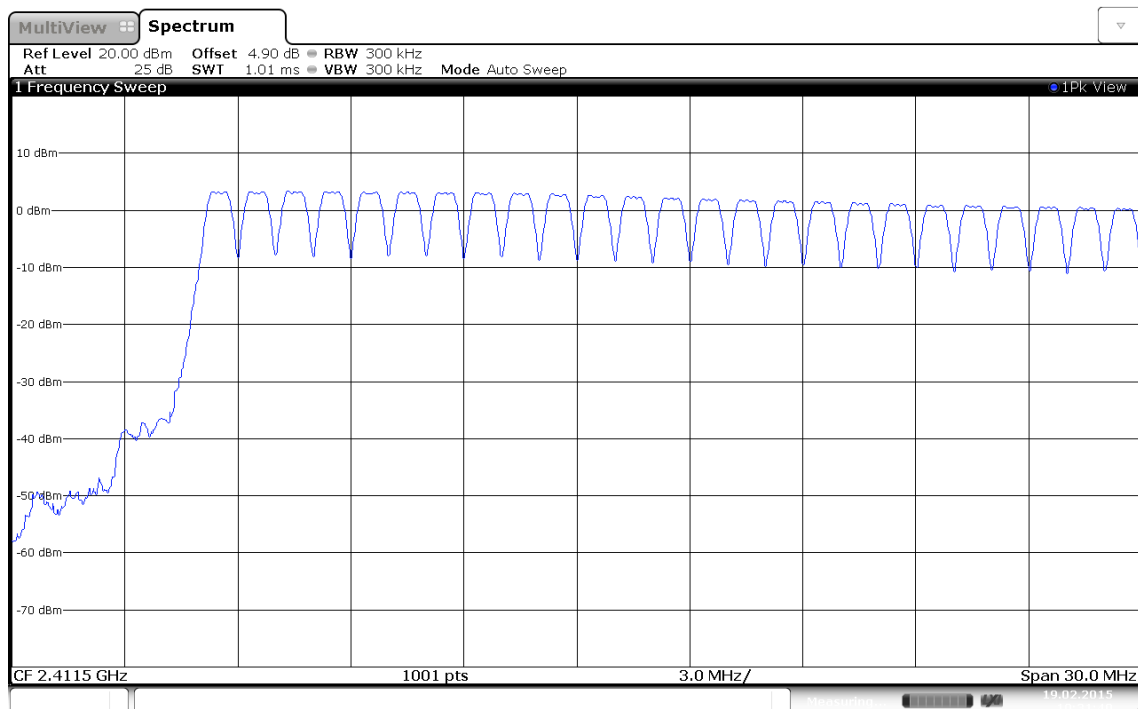


Number of hopping frequencies
 Date: 19.FEB.2015 10:31:40

Number of hopping frequencies - Range B

Number of Hopping Frequencies acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, GFSK, hopping mode
 Test Date: 2015-02-19
 Verdict: PASS
 Note 1: Number of Hopping Frequencies (DA 00-705 Meas Guidance)
 Note 2: conducted measurement, channel 25-53

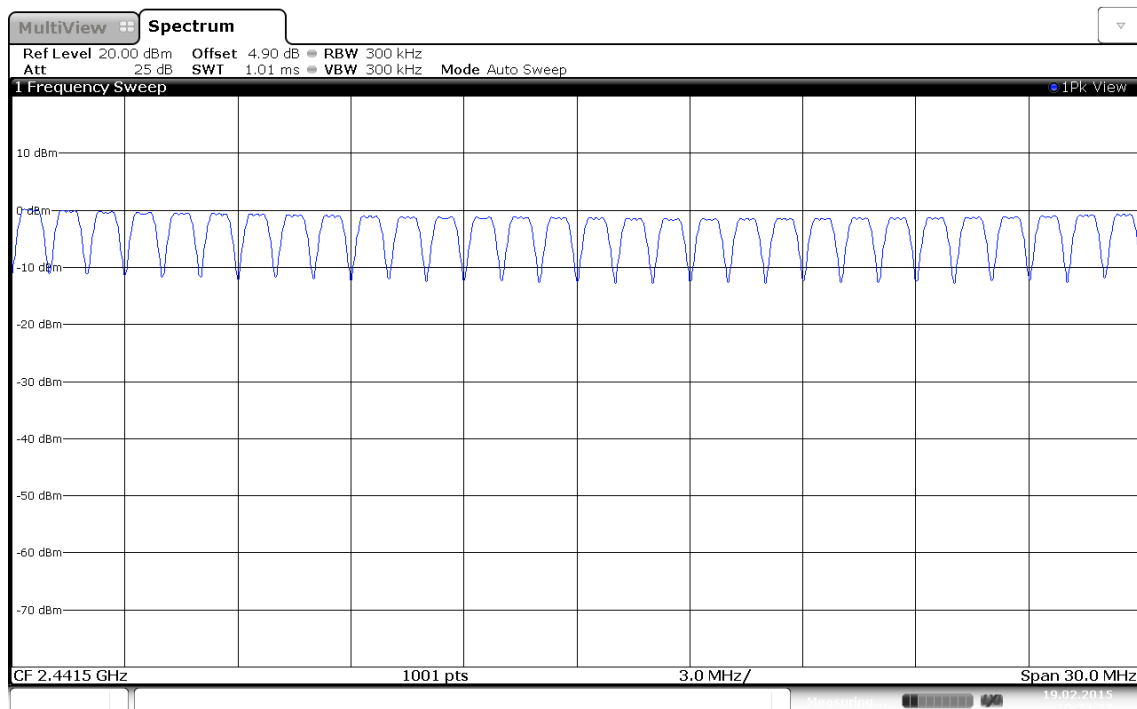


Number of hopping frequencies
 Date: 19.FEB.2015 10:24:37

Number of hopping frequencies - Range C

Number of Hopping Frequencies acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, GFSK, hopping mode
 Test Date: 2015-02-19
 Verdict: PASS
 Note 1: Number of Hopping Frequencies (DA 00-705 Meas Guidance)
 Note 2: conducted measurement, channel 55-78

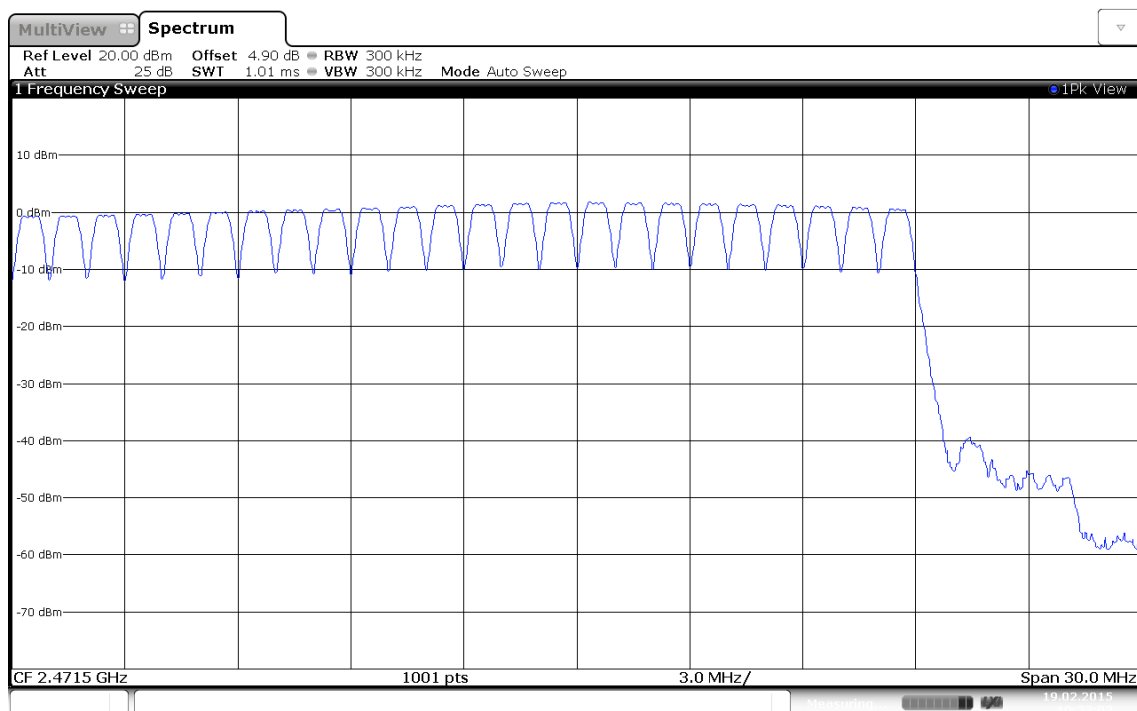

Number of hopping frequencies
 Date: 19.FEB.2015 10:33:02

Test Report No.: G0M-1409-4119-TIC247BT-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.4 Test Conditions and Results – Frequency hopping channel separation


Frequency hopping channel separation acc. FCC 15.247 / IC RSS-247		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.247(a)(1) / IC RSS-247 5.1	
Test according to measurement reference	Reference Method	
	ANSI C63.10	
Test frequency range	Tested frequencies	
	2441 & 2442 MHz	
EUT test mode	DH5-Hop	
Limits		
Limit	Condition	
≥ 25 kHz or ⅔ of 20 dB bandwidth	Output power ≤ 125 mW / 21 dBm	
≥ 25 kHz or 20 dB bandwidth	125 mW / 21 dBm < Output power ≤ 1 W / 30 dBm	
Test setup		
Spectrum Analyzer EUT		
Test procedure		
1. EUT set to test mode (Communication tester is used if needed) 2. Span set to measurement frequency range 3. Detector set to peak and max hold 4. Resolution bandwidth is set small enough to resolve hopping channel emission spectra 5. The two adjacent channel peaks are marked 6. Channel separation is determined from frequency separation of markers		
Test results		
Channel separation [kHz]	Limit [kHz]	Result
1000	≥ ⅔ · 1272.6 = 848.4	PASS
Comments:		

Frequency hopping channel separation

Carrier Frequency Separation acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
EUT Name: GNSS Receiver for Machine Control
Model: iCG80
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom / Vnom
Mode: Tx, GFSK, hopping mode
Test Date: 2015-02-19
Verdict: PASS
Note 1: Carrier Frequency Separation (DA 00-705 Meas Guidance)
Note 2: conducted measurement

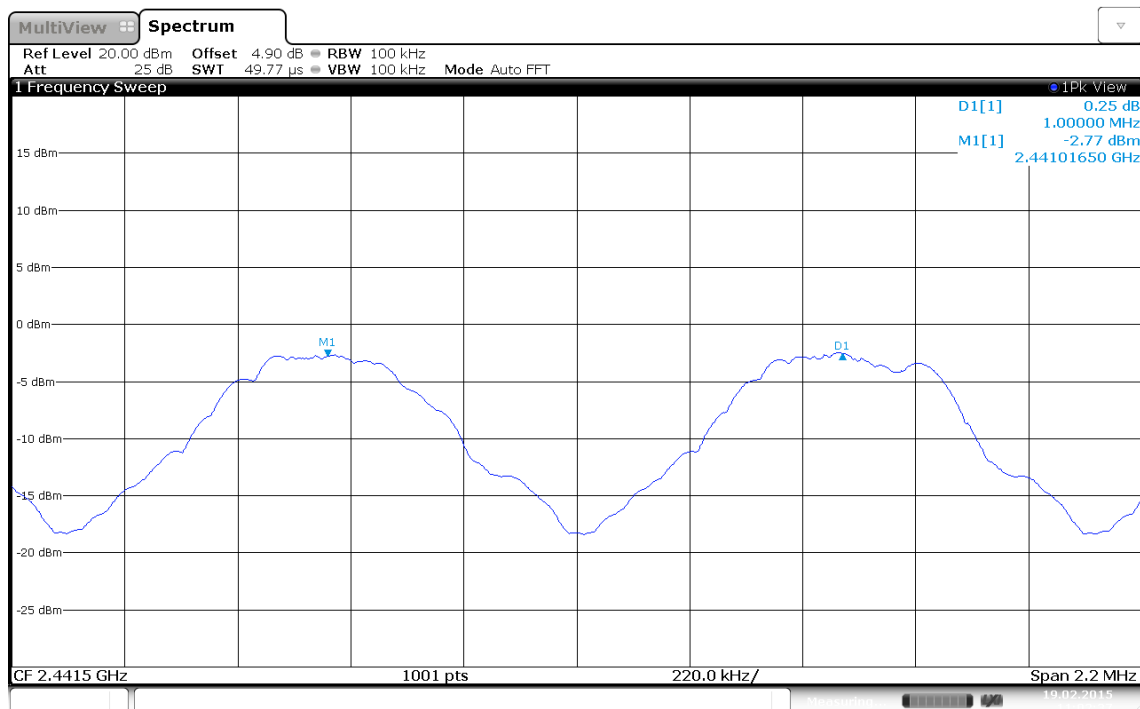

Limit: > two-thirds of the 20 dB bandwidth ; Result: Pass
Date: 19.FEB.2015 11:02:37

3.5 Test Conditions and Results – Time of occupancy (Dwell Time)


Time of occupancy (Dwell time) acc. to FCC 15.247 / IC RSS-247				Verdict: PASS	
EUT requirement rule parts and clause		Reference			
		FCC 15.247(a)(1)(iii) / IC RSS-247 5.1			
Test according to measurement reference		Reference Method			
		ANSI C63.10			
Test frequency range		Tested frequencies			
		2441 MHz			
EUT test mode		DH5-Hop			
Limits					
Limit					
Time of occupancy ≤ 0.4 s within 0.4 s · Number of hopping channels					
Test setup					
Spectrum Analyzer EUT					
Test procedure					
1. EUT set to test mode (Communication tester is used if needed) 2. Center frequency set to test channel center frequency 3. Span set to zero span and detector to peak and max hold 4. Resolution bandwidth is set to 100kHz and sweep time to observation period 5. Time of occupancy determined from number of peaks multiplied by single hop dwell time					
Test results					
Observation period [s]	No. of hops	Dwell time/hop [s]	Time of occupancy [s]	Limit [s]	Result
31.6	92	2.897	0.267	≤ 0.4	PASS
Comments:					

Time of occupancy

Time of Occupancy acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, GFSK, channel 2442MHz, hopping mode
 Test Date: 2015-02-19
 Verdict: PASS
 Note 1: 92 events * 2.897ms; Result: 266.5ms Limit<0.4s
 Note 2: conducted measurement, (DA 00-705 Meas Guidance)

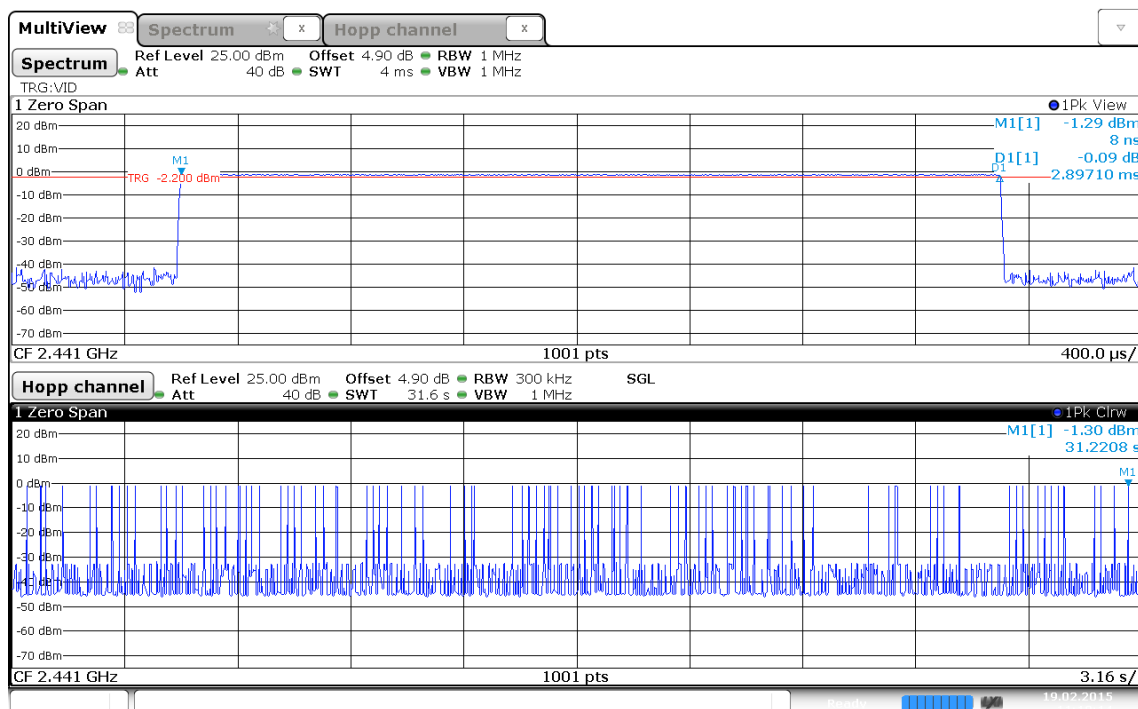

Burst length=2.8971 ms
 Date: 19.FEB.2015 11:10:14

Test Report No.: G0M-1409-4119-TIC247BT-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.6 Test Conditions and Results – Maximum peak conducted power

Maximum peak conducted power acc. to FCC 15.247 / IC RSS-247		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.247(b)(1) / IC RSS-247 5.4	
Test according to measurement reference	Reference Method	
	ANSI C63.10	
Test frequency range	Tested frequencies	
	F _{LOW} / F _{MID} / F _{HIGH}	
Measurement mode	Peak	
Maximum antenna gain	-12 dBi ⇒ Limit correction = 0 dB	
Limits		
Limit	Condition	
1 W (30 dBm)	Number of hopping channels ≥ 75	
0.125 W (21 dBm)	75 > Number of hopping channels ≥ 15	
The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.		
Test setup		
Spectrum Analyzer EUT		
Test procedure		
1. EUT set to test mode (Communication tester is used if needed) 2. Center frequency set to test channel center frequency 3. Span set to twice the 20 dB bandwidth and detector to peak and max hold 4. Resolution bandwidth is set to 3 MHz 5. Peak conducted power is determined from peak of spectrum envelope		

Test results								
Channel	Frequency [MHz]	Voltage	Mode	Peak power [dbm]	Peak power [mW]	Limit [dBm]	Margin [dB]	Result
F _{LOW}	2402	24.0 VDC	DH5-Sngl	3.49	2.234	30	-26.51	PASS
F _{MID}	2441	24.0 VDC	DH5-Sngl	-1.23	0.753	30	-31.23	PASS
F _{HIGH}	2480	24.0 VDC	DH5-Sngl	0.91	1.233	30	-29.09	PASS
F _{LOW}	2402	24.0 VDC	2DH5-Sngl	2.76	1.888	30	-27.24	PASS
F _{MID}	2441	24.0 VDC	2DH5-Sngl	-1.72	0.673	30	-31.72	PASS
F _{HIGH}	2480	24.0 VDC	2DH5-Sngl	0.21	1.050	30	-29.79	PASS
F _{LOW}	2402	24.0 VDC	3DH5-Sngl	2.95	1.972	30	-27.05	PASS
F _{MID}	2441	24.0 VDC	3DH5-Sngl	-1.60	0.692	30	-31.60	PASS
F _{HIGH}	2480	24.0 VDC	3DH5-Sngl	0.22	1.028	30	-29.88	PASS
Comments:								

3.7 Test Conditions and Results – AC power line conducted emissions

Power line conducted emissions acc. FCC 47 CFR 15.207 / IC RSS-Gen				Verdict: PASS	
Test according referenced standards		Reference Method			
		ANSI C63.4			
Fully configured sample scanned over the following frequency range		Frequency range			
		0.15 MHz to 30 MHz			
Points of Application		Application Interface			
AC Mains		LISN			
EUT test mode		AC-Powerline			
Limits and results					
Frequency [MHz]	Quasi-Peak [dBμV]	Result	Average [dBμV]	Result	
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS	
0.5 to 5	56	PASS	46	PASS	
5 to 30	60	PASS	50	PASS	
Comments:					
* Limit decreases linearly with the logarithm of the frequency.					


Conducted Emissions

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1409-4119

Manufacturer: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Klein
 Test Conditions: Tnom: 23°C, Unom: 24 VDC
 LISN: ESH2-Z5 L
 Mode: SRD 900MHz, GSM850, GPS receive, Ethernet link, CAN active, BT active
 Test Date: Mittwoch, 25. Februar 2015
 Note:

Index 20

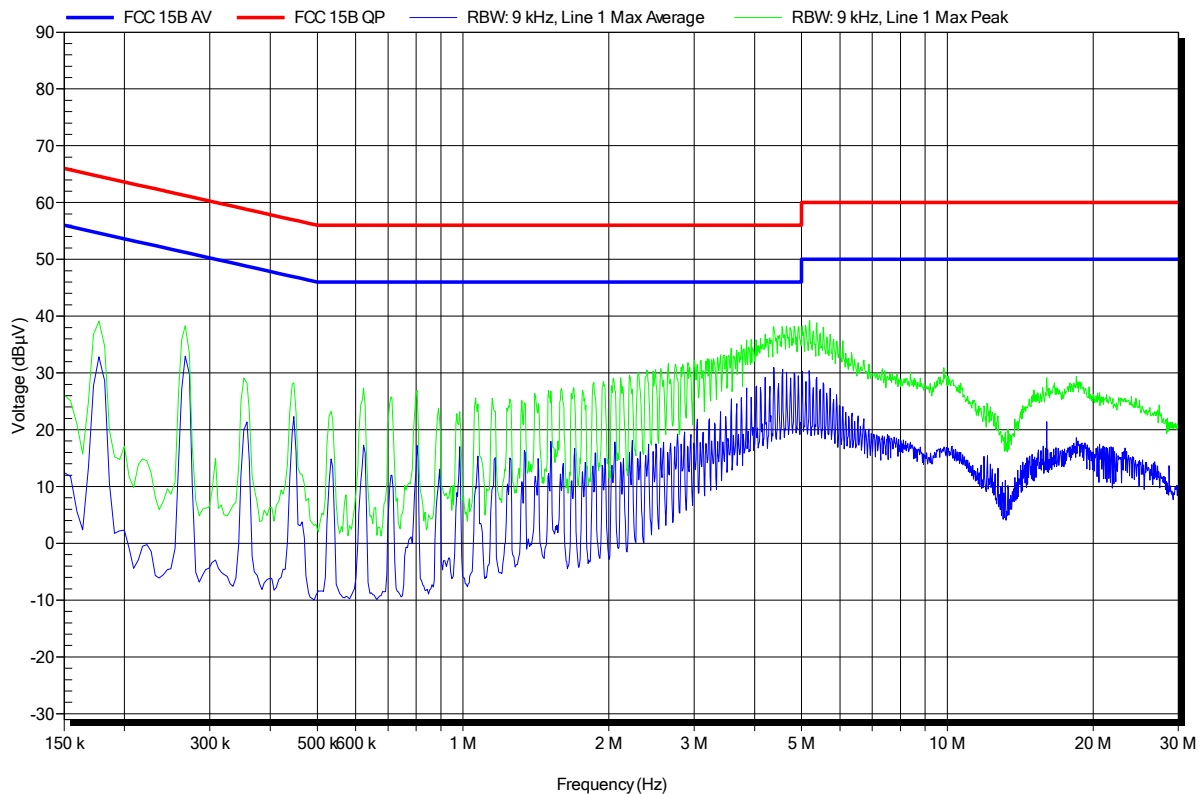


Conducted Emissions

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1409-4119

Manufacturer: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Klein
 Test Conditions: Tnom: 23°C, Unom: 24 VDC
 LISN: ESH2-Z5 N
 Mode: SRD 900MHz, GSM850, GPS receive, Ethernet link, CAN active, BT active
 Test Date: Mittwoch, 25. Februar 2015
 Note:

Index 19

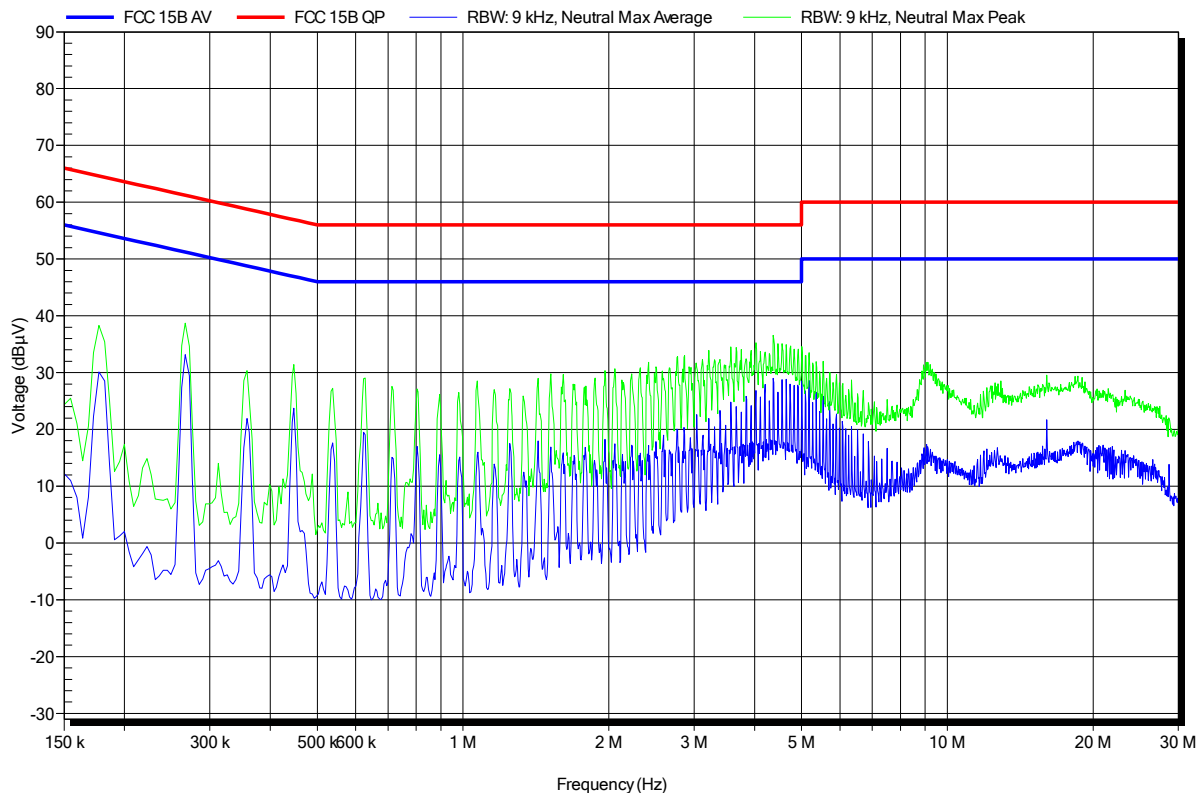


Conducted Emissions

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1409-4119

Manufacturer: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Klein
 Test Conditions: Tnom: 23°C, Unom: 24 VDC
 LISN: ESH2-Z5 L
 Mode: SRD 433MHz, GSM1900, GPS receive, Ethernet link, CAN active, BT active
 Test Date: Mittwoch, 25. Februar 2015
 Note:

Index 21

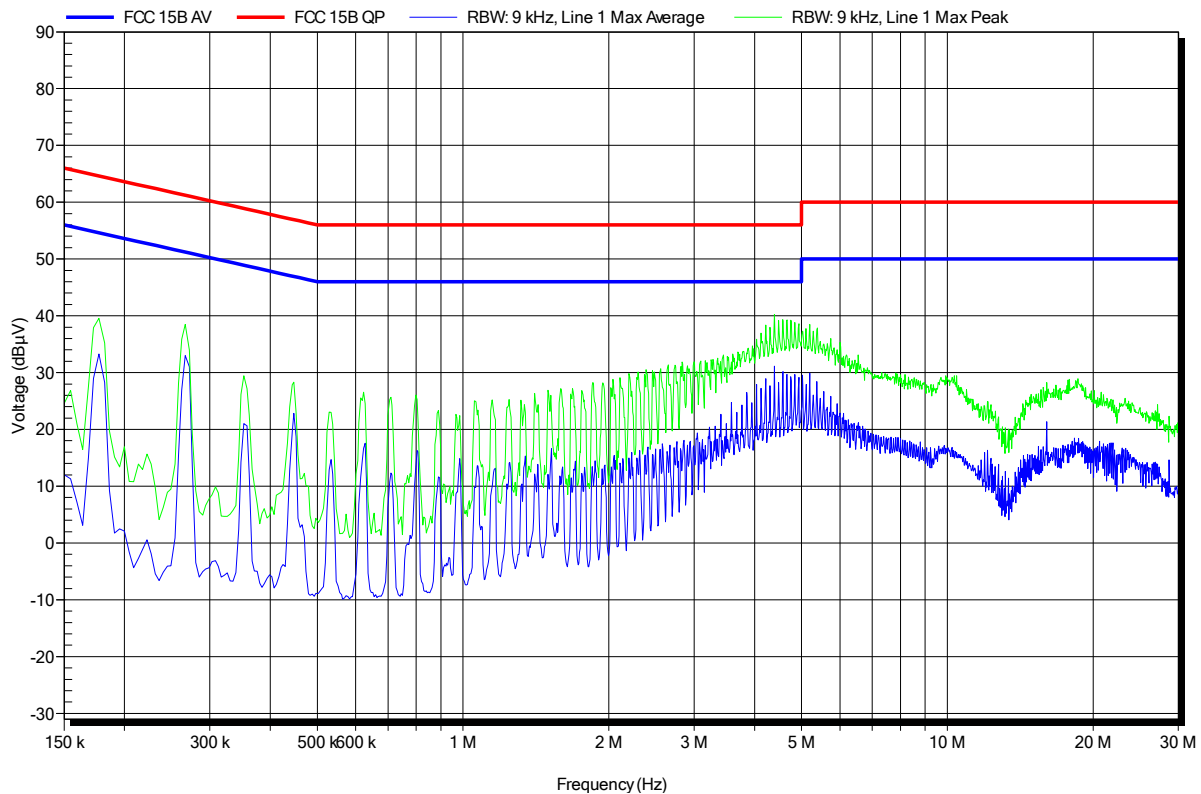


Conducted Emissions

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1409-4119

Manufacturer: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Klein
 Test Conditions: Tnom: 23°C, Unom: 24 VDC
 LISN: ESH2-Z5 N
 Mode: SRD 433MHz, GSM1900, GPS receive, Ethernet link, CAN active, BT active
 Test Date: Mittwoch, 25. Februar 2015
 Note:

Index 22

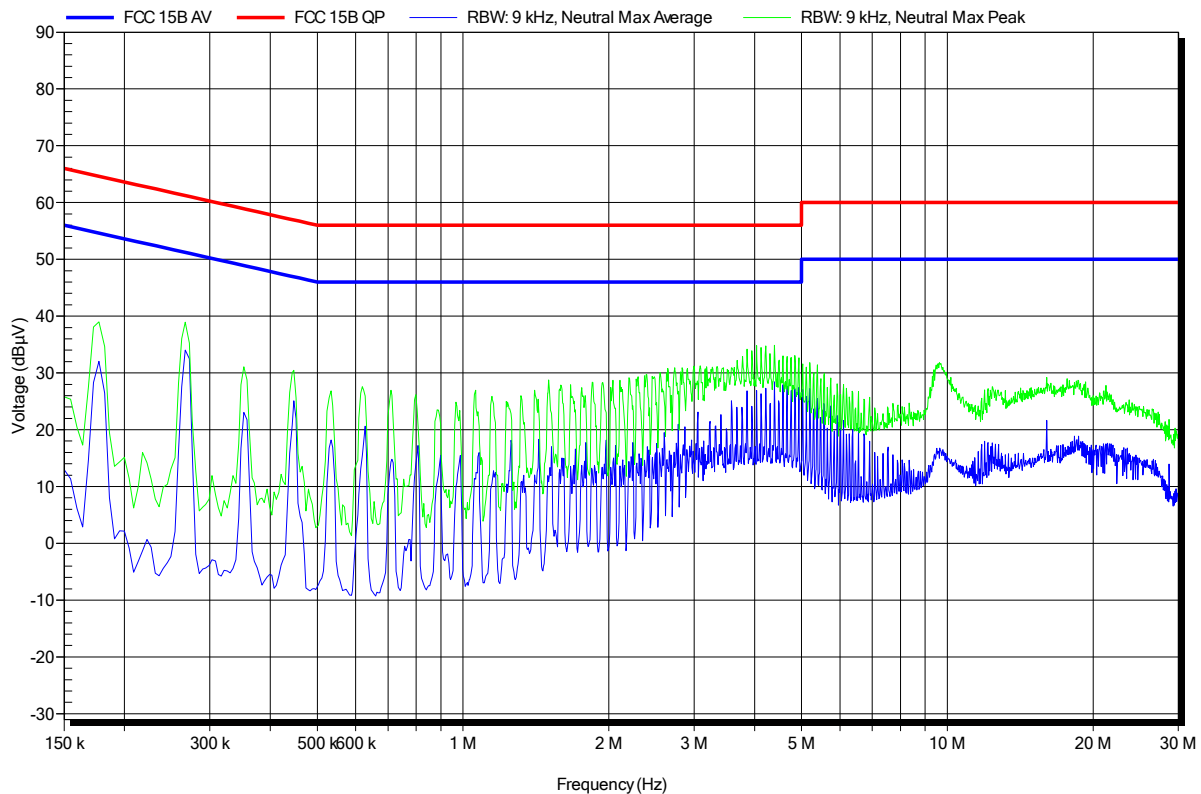

3.8 Test Conditions and Results – Band edge compliance


Band-edge compliance acc. to FCC 15.247 / IC RSS-210					Verdict: PASS	
EUT requirement rule parts and clause		Reference				
		FCC 15.247(d) / IC RSS-247 5.5				
Test according to measurement reference		Reference Method				
		ANSI C63.10				
Test frequency range		Tested frequencies				
		F _{LOW} / F _{HIGH}				
Measurement mode		Peak				
Limits						
Limit			Condition			
≤ -20 dB/100 kHz			Peak power measurement detector = Peak			
≤ -30 dB/100 kHz			Peak power measurement detector = RMS			
Test setup						
Spectrum Analyzer EUT						
Test procedure						
1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference						
Test results						
Channel	Frequency [MHz]	Mode	Level [dBc]	Limit [dBc]	Margin [dB]	Result
F _{LOW}	2402	DH5-Sngl	-44.3	-20	-24.30	PASS
F _{HIGH}	2480	DH5-Sngl	-49.0	-20	-29.00	PASS
F _{LOW}	2402	DH5-Hop	-46.1	-20	-26.10	PASS
F _{HIGH}	2480	DH5-Hop	-49.4	-20	-29.40	PASS
F _{LOW}	2402	3DH5-Sngl	-49.3	-20	-29.30	PASS
F _{HIGH}	2480	3DH5-Sngl	-42.5	-20	-22.50	PASS
F _{LOW}	2402	3DH5-Hop	-50.8	-20	-30.80	PASS
F _{HIGH}	2480	3DH5-Hop	-44.7	-20	-24.70	PASS
Comments:						

Band-edge compliance – DH5-Sngl F_{Low}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
EUT Name: GNSS Receiver for Machine Control
Model: iCG80
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom / Vnom
Mode: Tx, GFSK, 2402 MHz, single frequency
Test Date: 2015-02-20
Verdict: PASS
Note 1: Marker-delta method (DA 00-705 Meas Guidance)
Note 2: lower Band-edge, conducted measurement

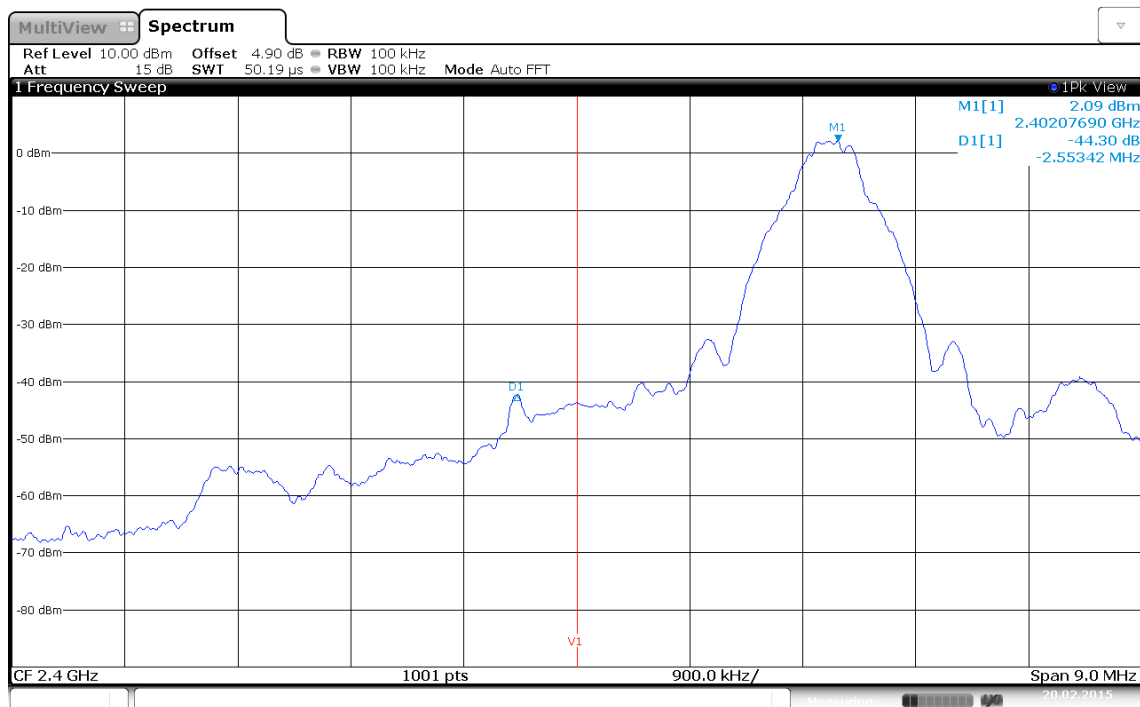

Limit: Marker Delta value >20 dB; Result: PASS

Date: 20.FEB.2015 10:48:10

Test Report No.: G0M-1409-4119-TIC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Band-edge compliance – DH5-Sngl F_{HIGH}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
EUT Name: GNSS Receiver for Machine Control
Model: iCG80
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom / Vnom
Mode: Tx, GFSK, 2480 MHz, single frequency
Test Date: 2015-02-20
Verdict: PASS
Note 1: Marker-delta method (DA 00-705 Meas Guidance)
Note 2: upper Band-edge, conducted measurement

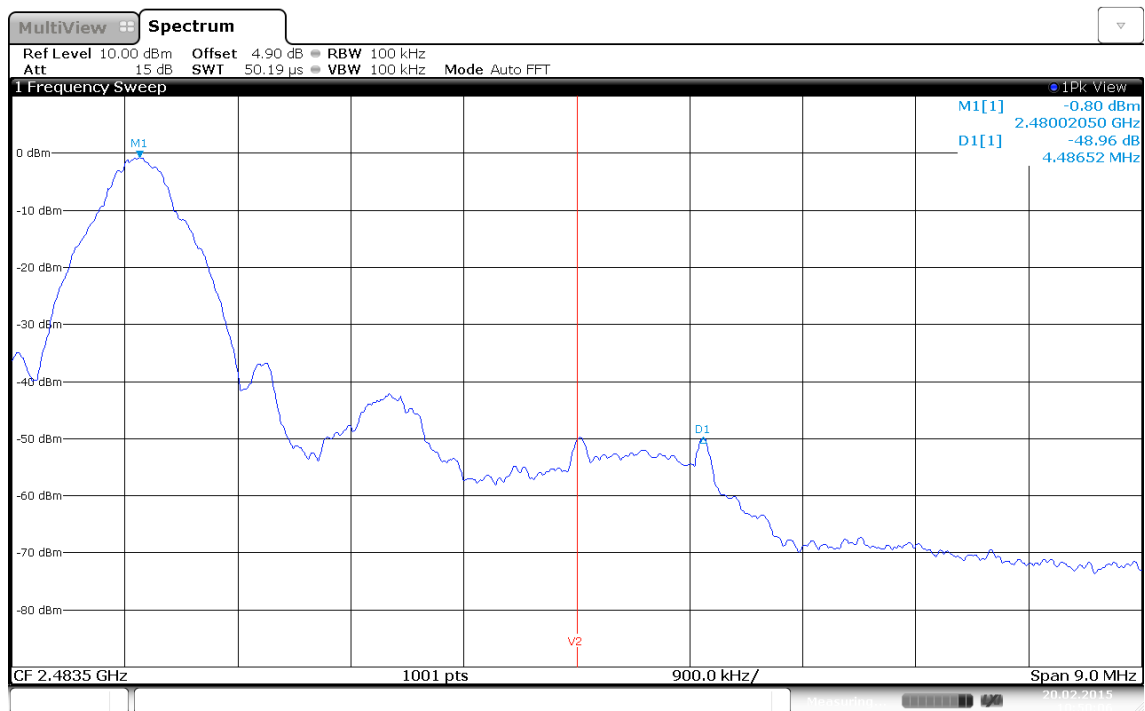


Limit: Marker Delta value >20 dB; Result: PASS
Date: 20.FEB.2015 10:50:06

Band-edge compliance – DH5-Hop F_{Low}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
EUT Name: GNSS Receiver for Machine Control
Model: iCG80
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom / Vnom
Mode: Tx, GFSK, 2402 MHz, hopping mode
Test Date: 2015-02-20
Verdict: PASS
Note 1: Marker-delta method (DA 00-705 Meas Guidance)
Note 2: lower Band-edge, conducted measurement

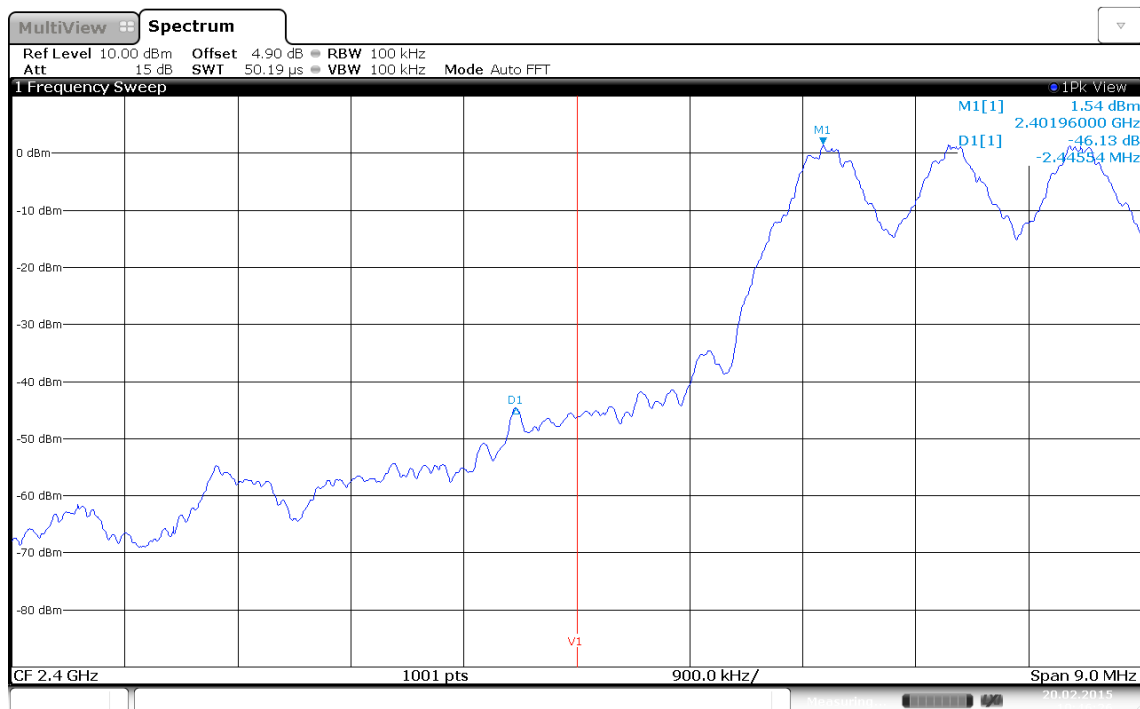


Limit: Marker Delta value >20 dB; Result: PASS
Date: 20.FEB.2015 10:46:26

Band-edge compliance – DH5-Hop F_{HIGH}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
EUT Name: GNSS Receiver for Machine Control
Model: iCG80
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom / Vnom
Mode: Tx, GFSK, 2480 MHz, hopping mode
Test Date: 2015-02-20
Verdict: PASS
Note 1: Marker-delta method (DA 00-705 Meas Guidance)
Note 2: upper Band-edge, conducted measurement

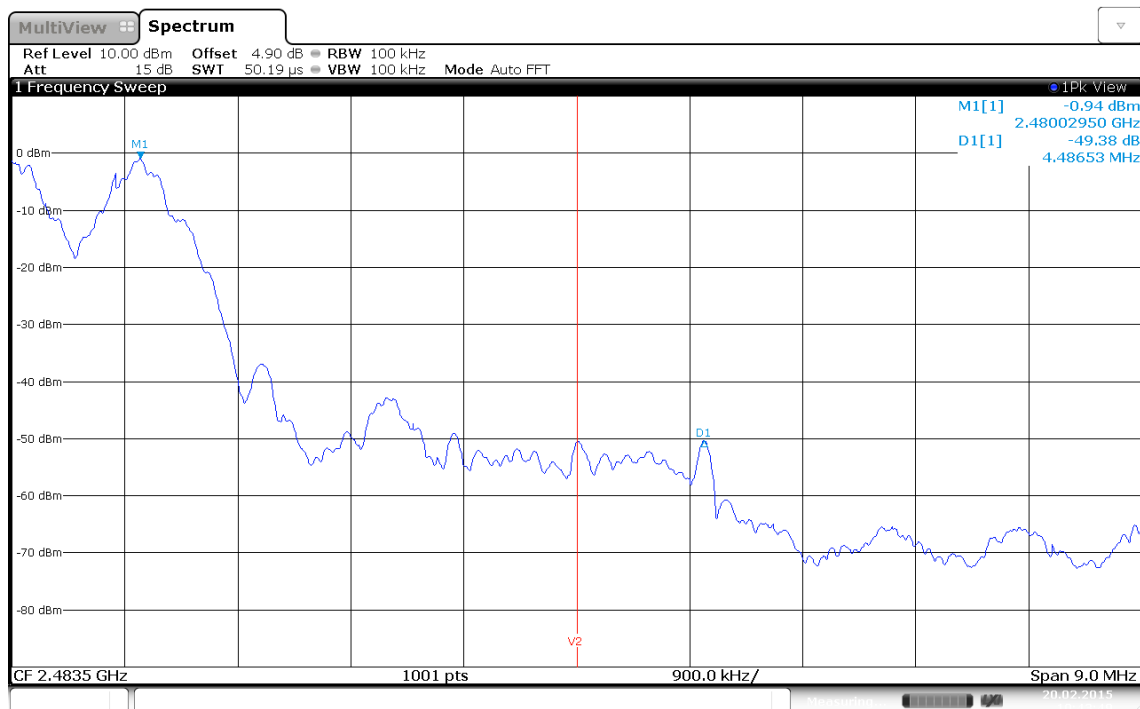


Limit: Marker Delta value >20 dB; Result: PASS
Date: 20.FEB.2015 10:43:50

Band-edge compliance – 3-DH5-Sngl F_{Low}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
EUT Name: GNSS Receiver for Machine Control
Model: iCG80
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom / Vnom
Mode: Tx, 8DPSK, 2402 MHz, single frequency
Test Date: 2015-02-20
Verdict: PASS
Note 1: Marker-delta method (DA 00-705 Meas Guidance)
Note 2: lower Band-edge, conducted measurement

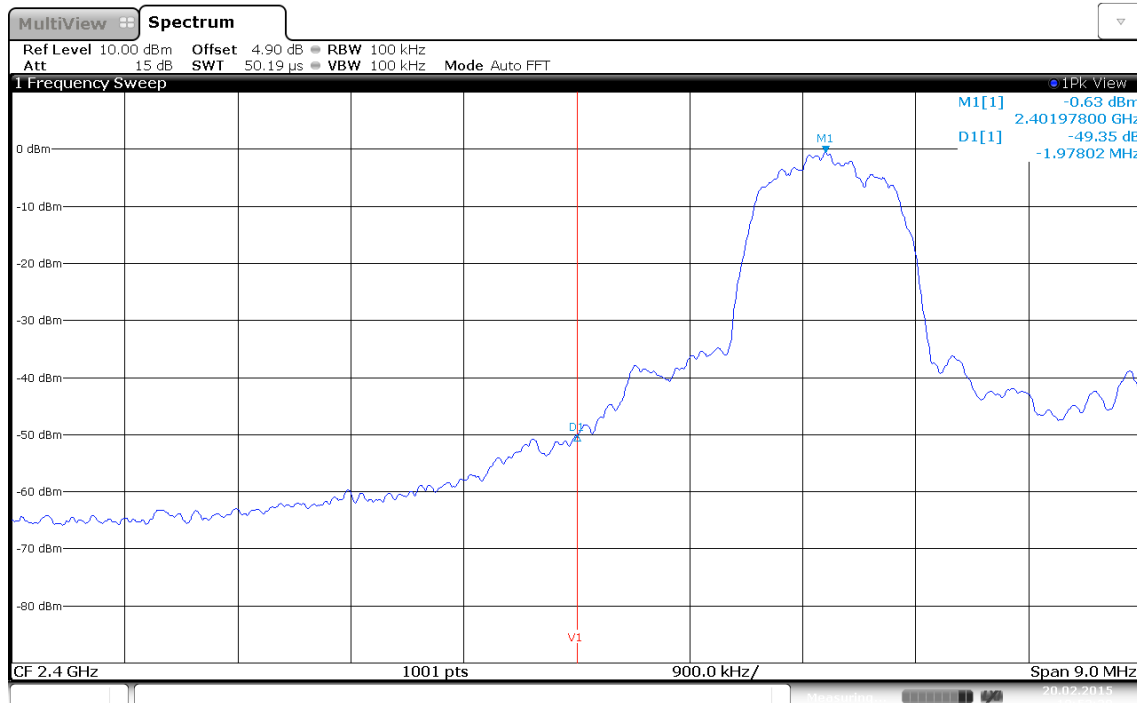

Limit: Marker Delta value >20 dB; Result: PASS
Date: 20.FEB.2015 10:53:20

Test Report No.: G0M-1409-4119-TIC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Band-edge compliance – 3-DH5-Sngl F_{HIGH}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
EUT Name: GNSS Receiver for Machine Control
Model: iCG80
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom / Vnom
Mode: Tx, 8DPSK, 2480 MHz, single frequency
Test Date: 2015-02-20
Verdict: PASS
Note 1: Marker-delta method (DA 00-705 Meas Guidance)
Note 2: upper Band-edge, conducted measurement

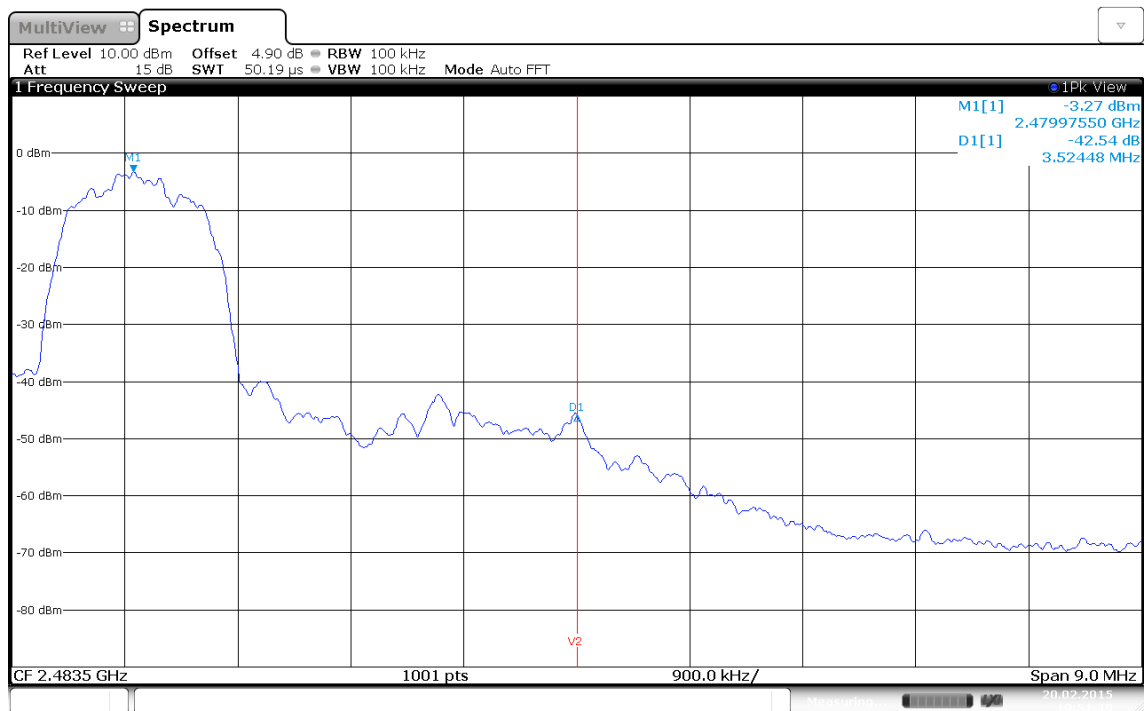


Limit: Marker Delta value >20 dB; Result: PASS
Date: 20.FEB.2015 10:51:49

Band-edge compliance – 3-DH5-Hop F_{LOW}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
EUT Name: GNSS Receiver for Machine Control
Model: iCG80
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom / Vnom
Mode: Tx, 8DPSK, 2402 MHz, hopping mode
Test Date: 2015-02-20
Verdict: PASS
Note 1: Marker-delta method (DA 00-705 Meas Guidance)
Note 2: lower Band-edge, conducted measurement

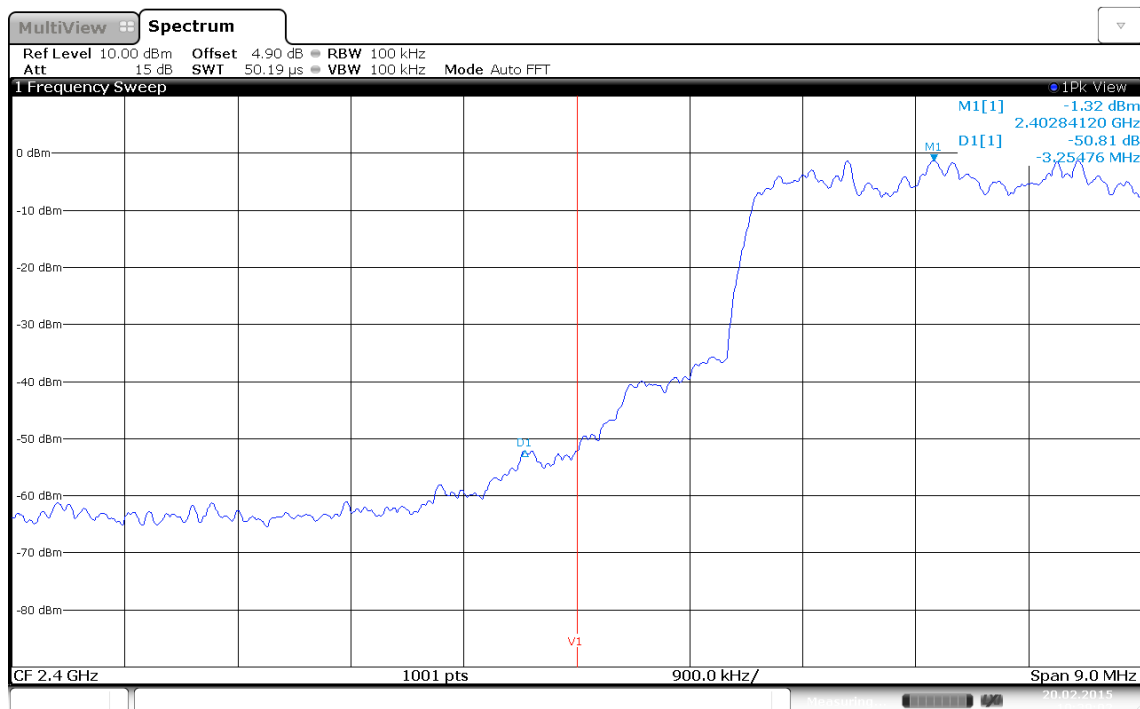


Limit: Marker Delta value >20 dB; Result: PASS
Date: 20.FEB.2015 10:39:03

Band-edge compliance – 3-DH5-Hop F_{HIGH}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
EUT Name: GNSS Receiver for Machine Control
Model: iCG80
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom / Vnom
Mode: Tx, 8DPSK, 2480 MHz, hopping mode
Test Date: 2015-02-20
Verdict: PASS
Note 1: Marker-delta method (DA 00-705 Meas Guidance)
Note 2: upper Band-edge, conducted measurement

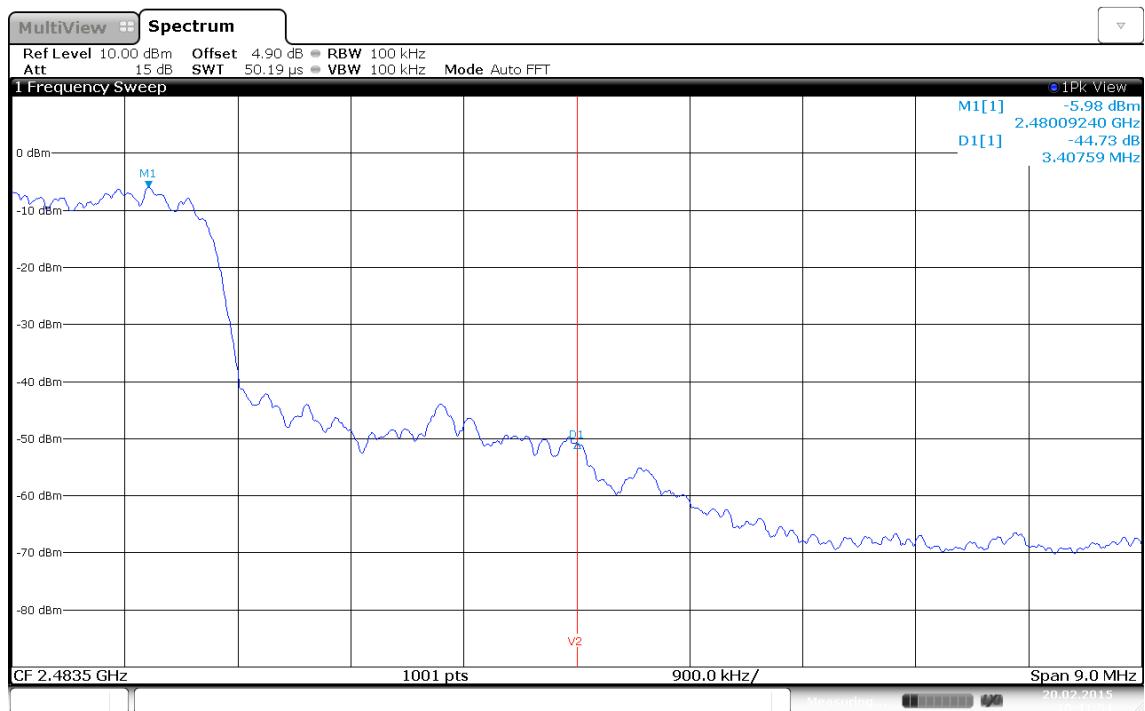

Limit: Marker Delta value >20 dB; Result: PASS
Date: 20.FEB.2015 10:41:54

3.9 Test Conditions and Results – Conducted spurious emissions


Conducted spurious emissions acc. to FCC 15.247 / IC RSS-210							Verdict: PASS	
EUT requirement rule parts and clause			Reference					
			FCC 15.247(d) / IC RSS-247 5.5					
Test according to measurement reference			Reference Method					
			ANSI C63.10					
Test frequency range			Tested frequencies					
			10 MHz – 10 th Harmonic					
Measurement mode			Peak					
Limits								
Limit				Condition				
≤ -20 dB/100 kHz				Peak power measurement detector = Peak				
≤ -30 dB/100 kHz				Peak power measurement detector = RMS				
Test setup								
Spectrum Analyzer EUT								
Test procedure								
1. EUT set to test mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth is set to 100 kHz and detector to peak and max hold 4. Markers are set to peak emission levels within frequency band 5. Emission level is determined by second marker on emission peak 6. Attenuation is determined from level difference								
Test results								
Channel	Frequency [MHz]	Mode	Emission [MHz]	Emission Level [dbm]	Peak power [dBm]	Limit [dBm]	Margin [dB]	Result
F _{LOW}	2402	DH5-Sngl	4804	-64.7	2.5	-17.5	-47.20	PASS
F _{MID}	2441	DH5-Sngl	4882	-60.0	-2.0	-22.0	-38.00	PASS
F _{HIGH}	2480	DH5-Sngl	4960	-55.2	-0.3	-20.3	-34.90	PASS
F _{LOW}	2402	3DH5-Sngl	6806	-66.3	-1.7	-21.7	-44.60	PASS
F _{MID}	2441	3DH5-Sngl	4884	-61.2	-4.2	-24.2	-37.00	PASS
F _{HIGH}	2480	3DH5-Sngl	4960	-65.8	-3.7	-23.7	-42.10	PASS
Comments:								

Conducted spurious emissions – DH5-Sngl F_{Low}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, GFSK, 2402 MHz, modulated
 Test Date: 2015-02-20
 Verdict: PASS
 Note 1: Spurious in non-restricted frequency bands (DA 00-705 Meas Guidance)
 Note 2: conducted measurement

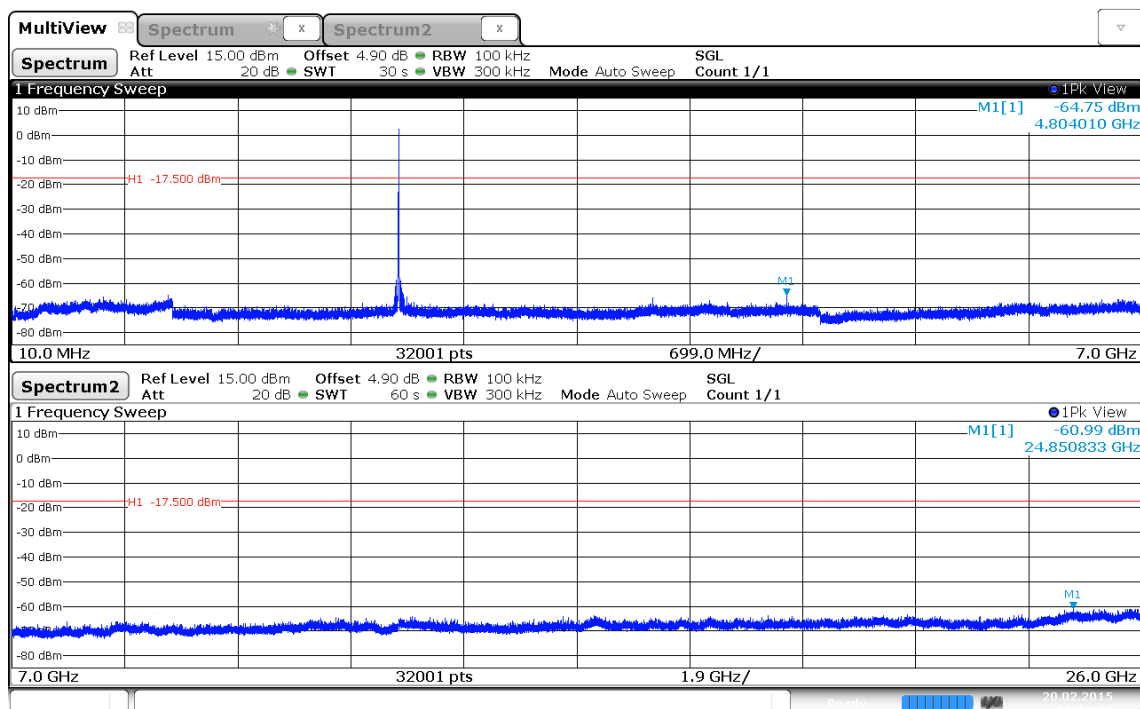

Date: 20.FEB.2015 11:12:27

Test Report No.: G0M-1409-4119-TIC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – DH5-Sngl F_{MID}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, GFSK, 2441 MHz, modulated
 Test Date: 2015-02-20
 Verdict: PASS
 Note 1: Spurious in non-restricted frequency bands (DA 00-705 Meas Guidance)
 Note 2: conducted measurement

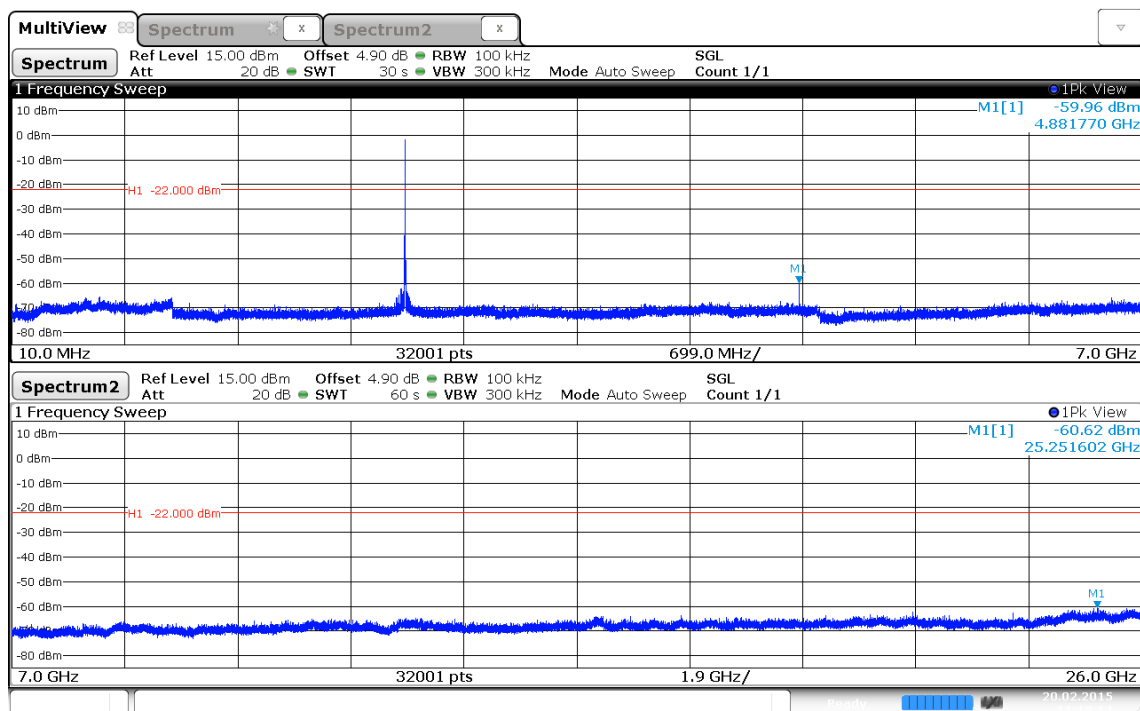


Date: 20.FEB.2015 11:18:14

Conducted spurious emissions – DH5-Sngl F_{HIGH}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, GFSK, 2480 MHz, modulated
 Test Date: 2015-02-20
 Verdict: PASS
 Note 1: Spurious in non-restricted frequency bands (DA 00-705 Meas Guidance)
 Note 2: conducted measurement

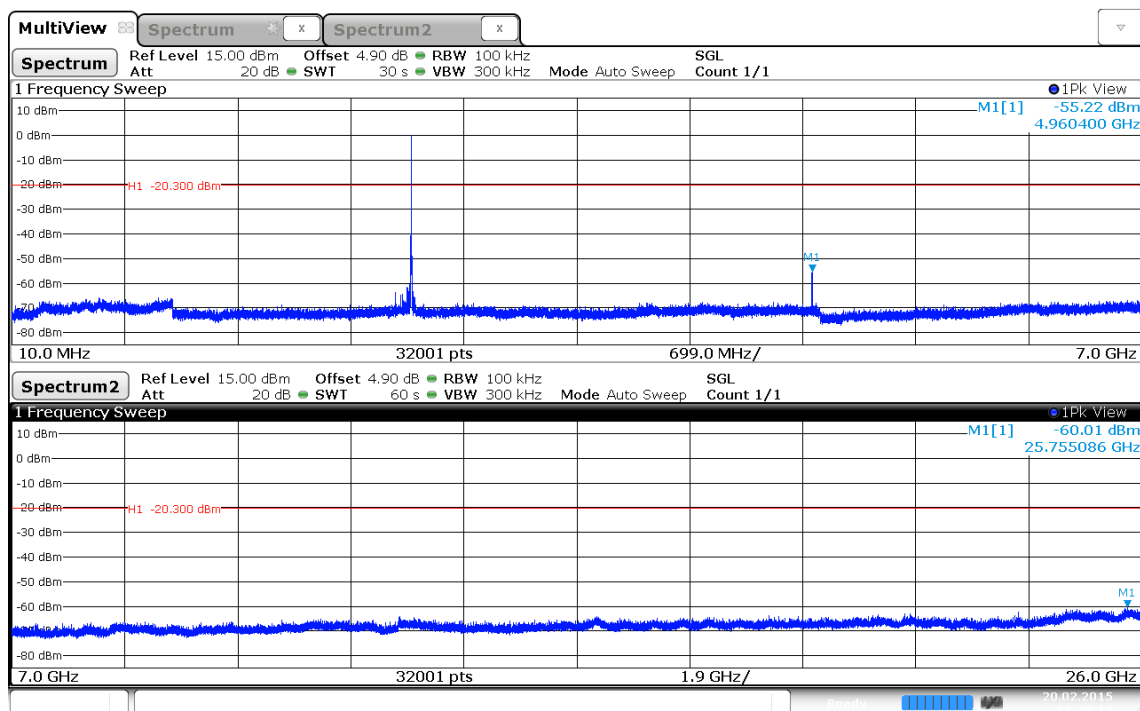


Conducted spurious emissions – 3-DH5-Sngl F_{Low}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, 8DPSK, 2402 MHz, modulated
 Test Date: 2015-02-20
 Verdict: PASS
 Note 1: Spurious in non-restricted frequency bands (DA 00-705 Meas Guidance)
 Note 2: conducted measurement

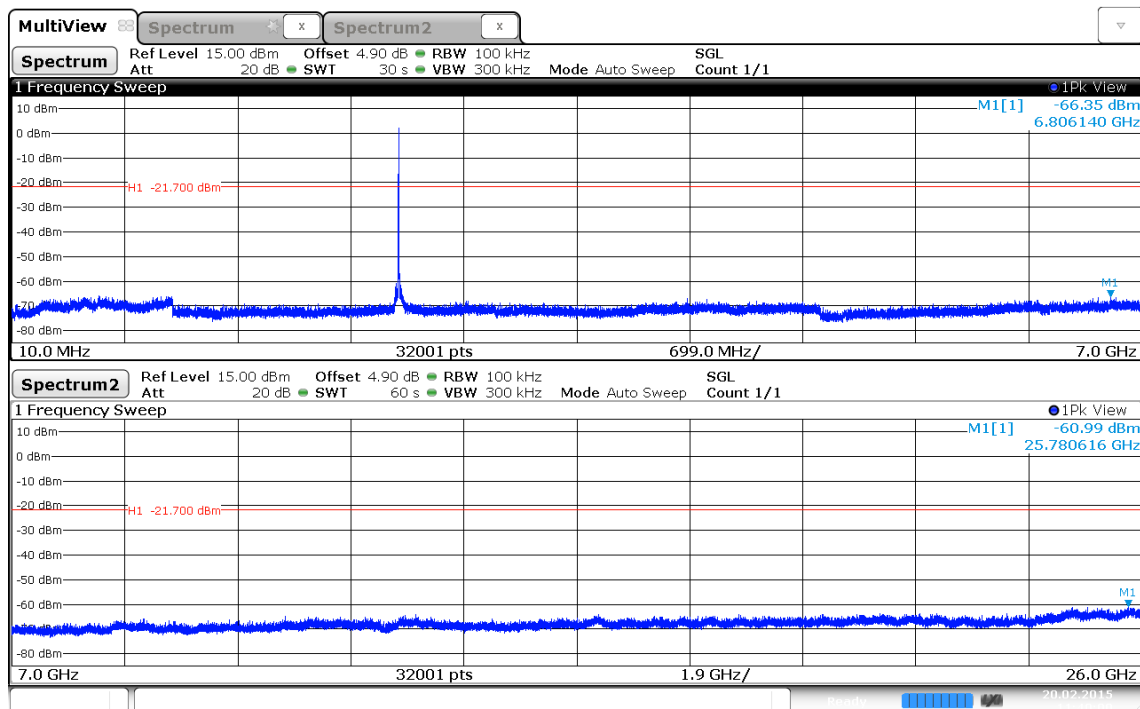


Date: 20.FEB.2015 11:39:59

Conducted spurious emissions – 3-DH5-Sngl F_{MID}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, 8DPSK, 2441 MHz, modulated
 Test Date: 2015-02-20
 Verdict: PASS
 Note 1: Spurious in non-restricted frequency bands (DA 00-705 Meas Guidance)
 Note 2: conducted measurement

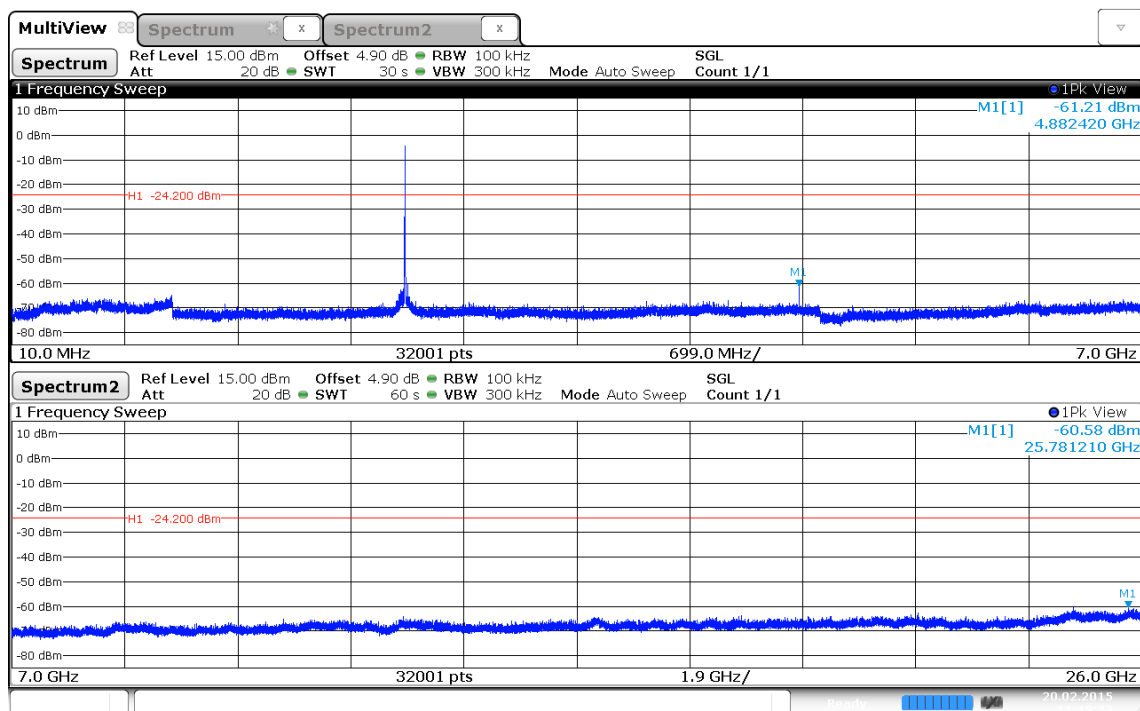

Date: 20.FEB.2015 11:45:24

Test Report No.: G0M-1409-4119-TIC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – 3-DH5-Sngl F_{HIGH}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, 8DPSK, 2480 MHz, modulated
 Test Date: 2015-02-20
 Verdict: PASS
 Note 1: Spurious in non-restricted frequency bands (DA 00-705 Meas Guidance)
 Note 2: conducted measurement

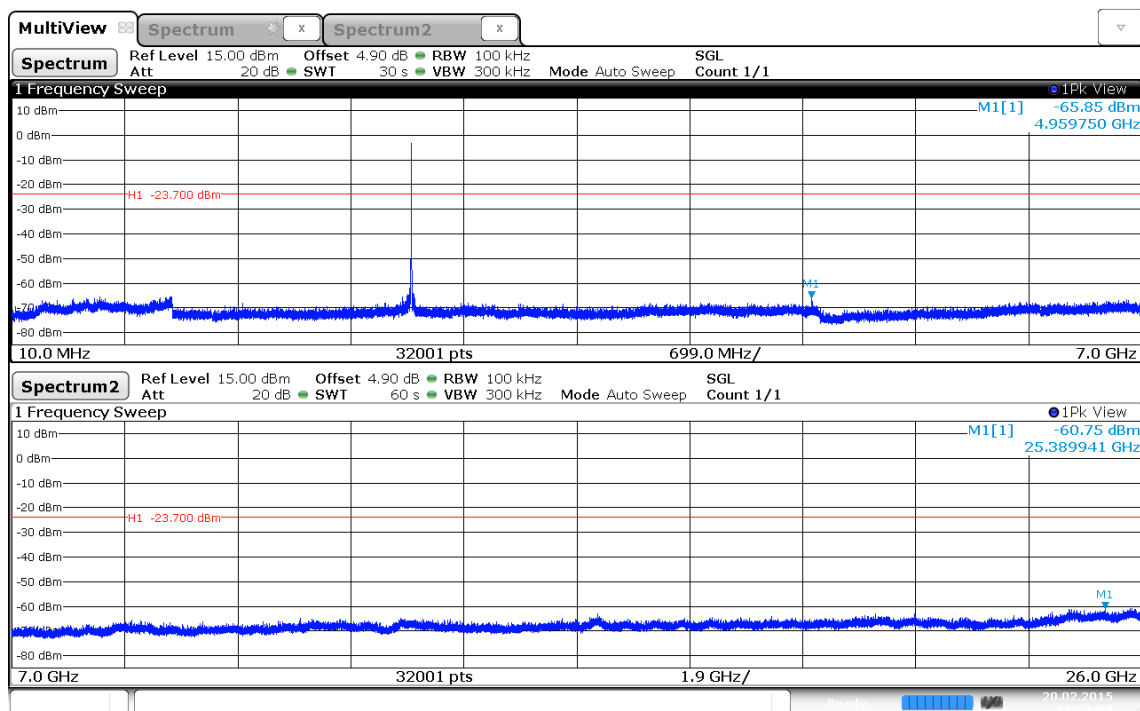


Date: 20.FEB.2015 11:51:09

Test Report No.: G0M-1409-4119-TIC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.10 Test Conditions and Results – Transmitter radiated emissions

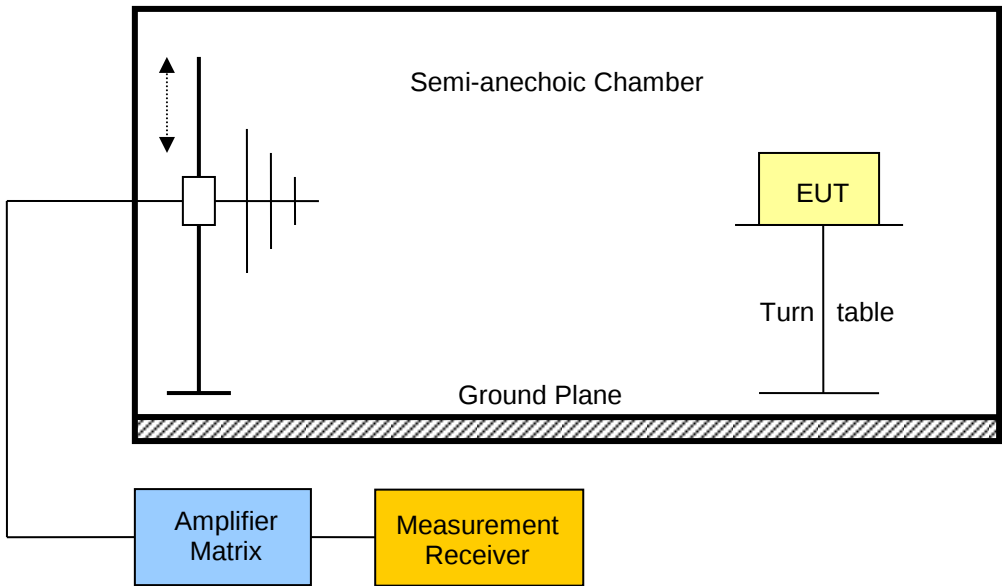Transmitter radiated emissions acc. to FCC 47 CFR 15.247 / IC RSS-210				Verdict: PASS
Test according referenced standards	Reference Method			
	FCC 15.247(d) / IC RSS-247 5.5			
Test according to measurement reference	Reference Method			
	ANSI C63.10			
Test frequency range	Tested frequencies			
	30 MHz – 10 th Harmonic			
Limits				
Frequency range [MHz]	Detector	Limit [μV/m]	Limit [dBμV/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). When average radiated emission measurements are specified, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.				
Test setup				
				

Test procedure									
1. EUT set to test mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz 4. Markers are set to peak emission levels within restricted bands									
Test results									
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Limit dist. [m]*	Margin [dB]
F _{LOW}	2402	3DH5-Sngl	2390	42.74	pk	hor	74.00	3	-31.26
F _{LOW}	2402	3DH5-Sngl	2390	23.46	RMS	hor	54.00	3	-30.54
F _{LOW}	2402	3DH5-Sngl	2390	44.05	pk	ver	74.00	3	-29.95
F _{LOW}	2402	3DH5-Sngl	2390	25.72	RMS	ver	54.00	3	-28.28
F _{HIGH}	2480	3DH5-Sngl	2483.5	55.43	pk	hor	74.00	3	-18.57
F _{HIGH}	2480	3DH5-Sngl	2483.5	27.87	RMS	hor	54.00	3	-26.13
F _{HIGH}	2480	3DH5-Sngl	2483.6	42.86	pk	ver	74.00	3	-31.14
F _{HIGH}	2480	3DH5-Sngl	2483.6	31.43	RMS	ver	54.00	3	-22.57
F _{LOW}	2402	DH5-Sngl	611.2	26.25	pk	ver	46.00	3	-19.75
F _{LOW}	2402	DH5-Sngl	2389	42.93	pk	ver	74.00	3	-31.07
F _{LOW}	2402	DH5-Sngl	2389	25.72	RMS	ver	54.00	3	-28.28
F _{LOW}	2402	DH5-Sngl	2390	46.42	pk	hor	74.00	3	-27.58
F _{LOW}	2402	DH5-Sngl	2390	23.68	RMS	hor	54.00	3	-30.32
F _{HIGH}	2480	DH5-Sngl	4880	38.93	pk	ver	74.00	1	-35.07
F _{HIGH}	2480	DH5-Sngl	2483.5	57.48	pk	hor	74.00	3	-16.52
F _{HIGH}	2480	DH5-Sngl	2483.5	26.47	RMS	hor	54.00	3	-27.53
Comments: * Physical distance between EUT and measurement antenna.									

3.11 Test Conditions and Results – Receiver radiated emissions

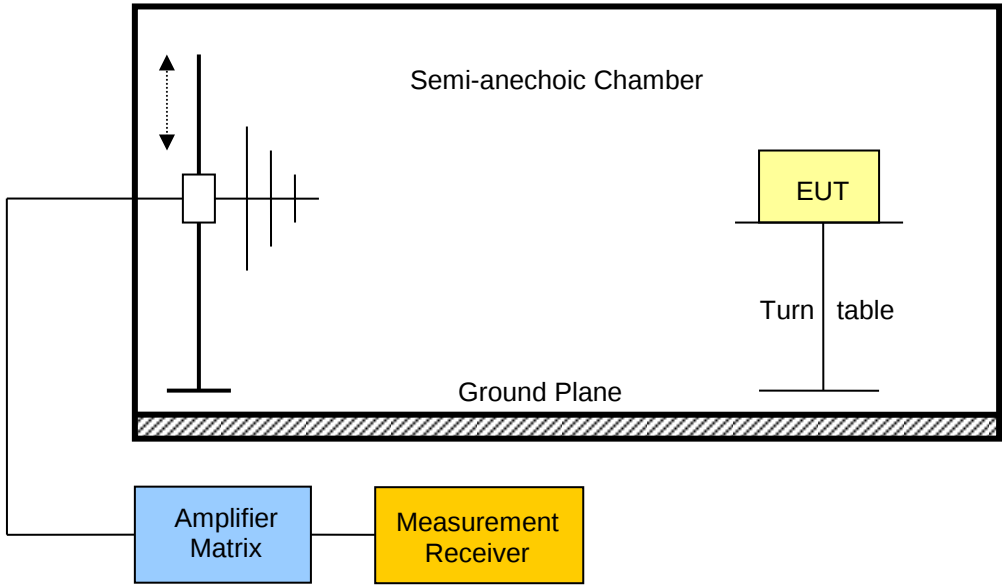Receiver radiated emissions acc. to IC RSS-210				Verdict: PASS
Test according referenced standards	Reference Method			
	IC RSS-247 3.1			
Test according to measurement reference	Reference Method			
	ANSI C63.10			
Test frequency range	Tested frequencies			
	30 MHz – 3 th Harmonic			
EUT test mode	Receive			
Limits				
Frequency range [MHz]	Detector	Limit [μV/m]	Limit [dBμV/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
Test setup				
				

Test procedure							
1. EUT set to receive mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz 4. Markers are set to peak emission levels							
Test results							
Channel	Frequency [MHz]	Emission [MHz]	Emission Level [dBμV/m]	Pol.	Det.	Limit [dBμV/m]	Margin [dBμV/m]
F _{MID}	2441	459.2	29.25	ver	pk	46.00	-16.75 dB
F _{MID}	2441	462.4	28.55	hor	pk	46.00	-17.45 dB
F _{MID}	2441	700.8	32.87	hor	pk	46.00	-13.13 dB
F _{MID}	2441	1162	40.23	hor	pk	53.98	-13.75 dB
F _{MID}	2441	1162	40.94	ver	pk	53.98	-13.04 dB
Comments:							


ANNEX A Transmitter radiated spurious emissions

Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; GFSK; DH5; 2402 MHz
 Test Date: 2015-02-20
 Note:

Index 50

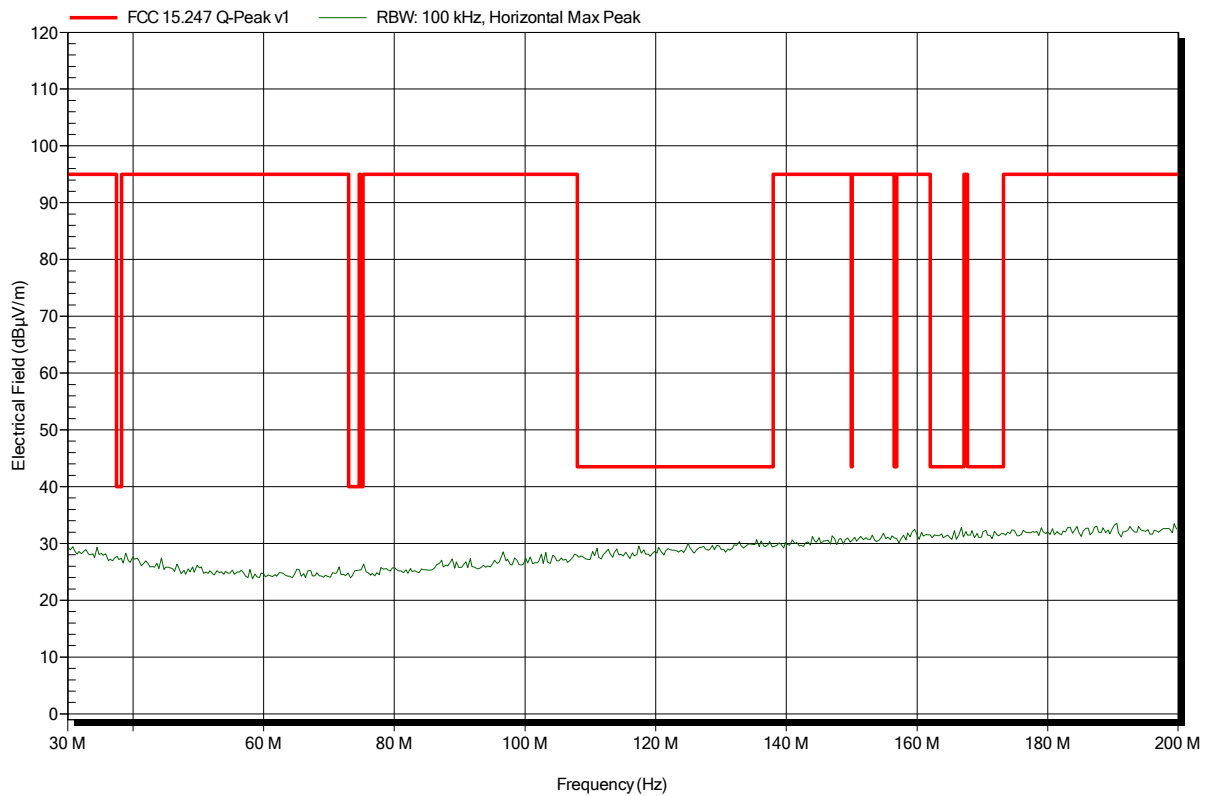


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: TX; GFSK; DH5; 2402 MHz
 Test Date: 2015-02-20
 Note:

Index 51

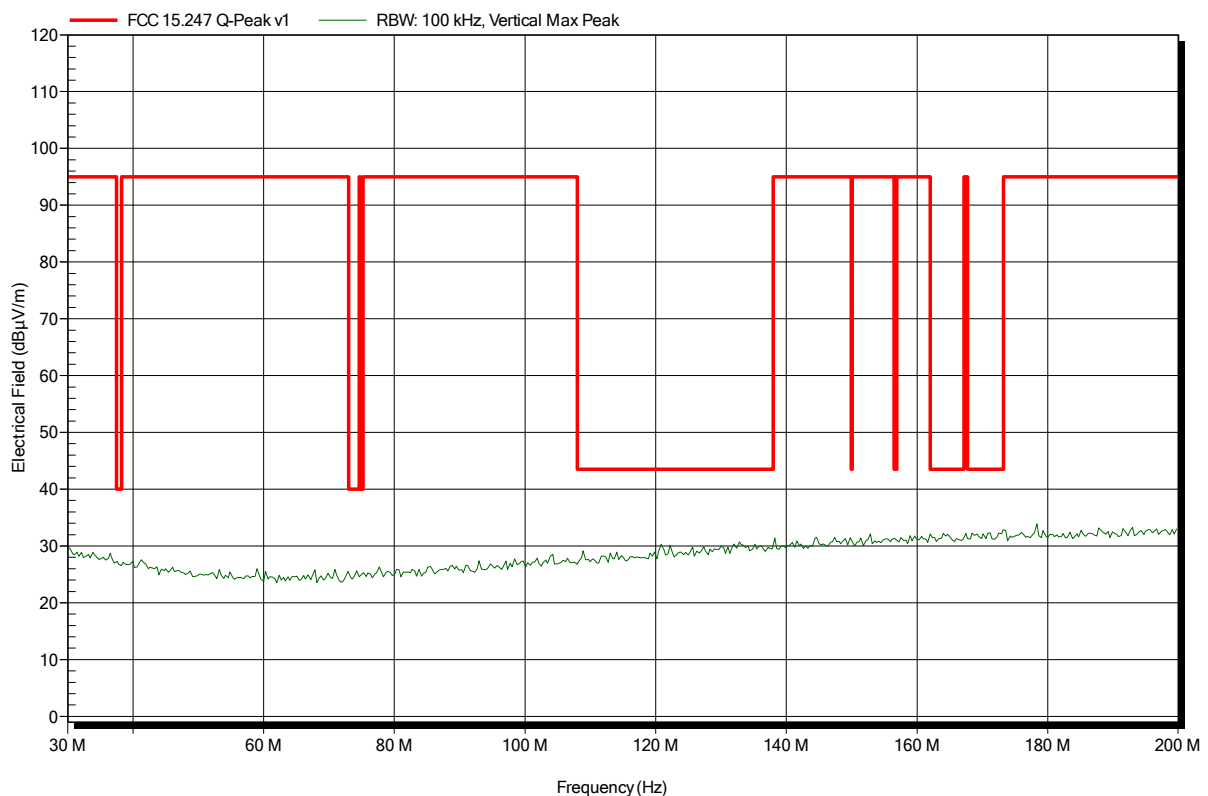


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant:	Leica Geosystems AG
EUT Name:	GNSS Receiver for Machine Control
Model:	iCG80
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 24 VDC
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3 m
Mode:	TX; GFSK; DH5; 2402 MHz
Test Date:	2015-02-20
Note:	

Index 49

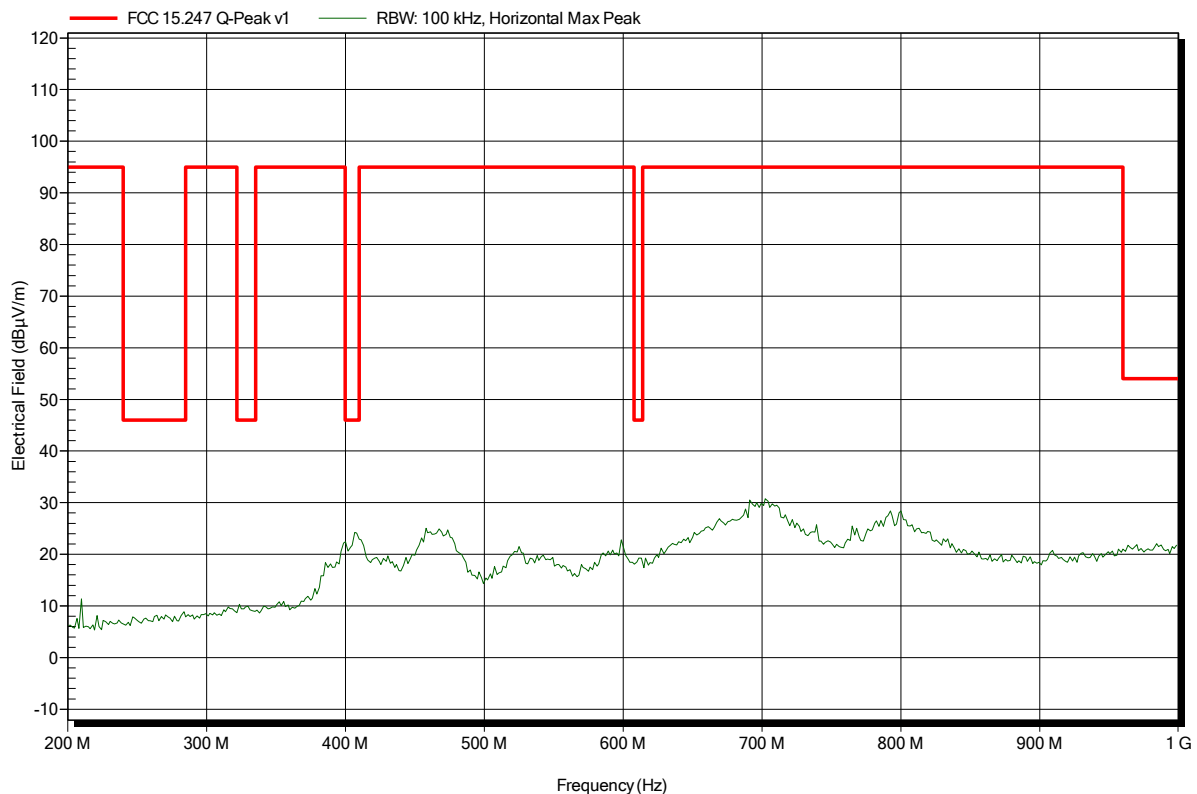


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: TX; GFSK; DH5; 2402 MHz
 Test Date: 2015-02-20
 Note:

Index 52

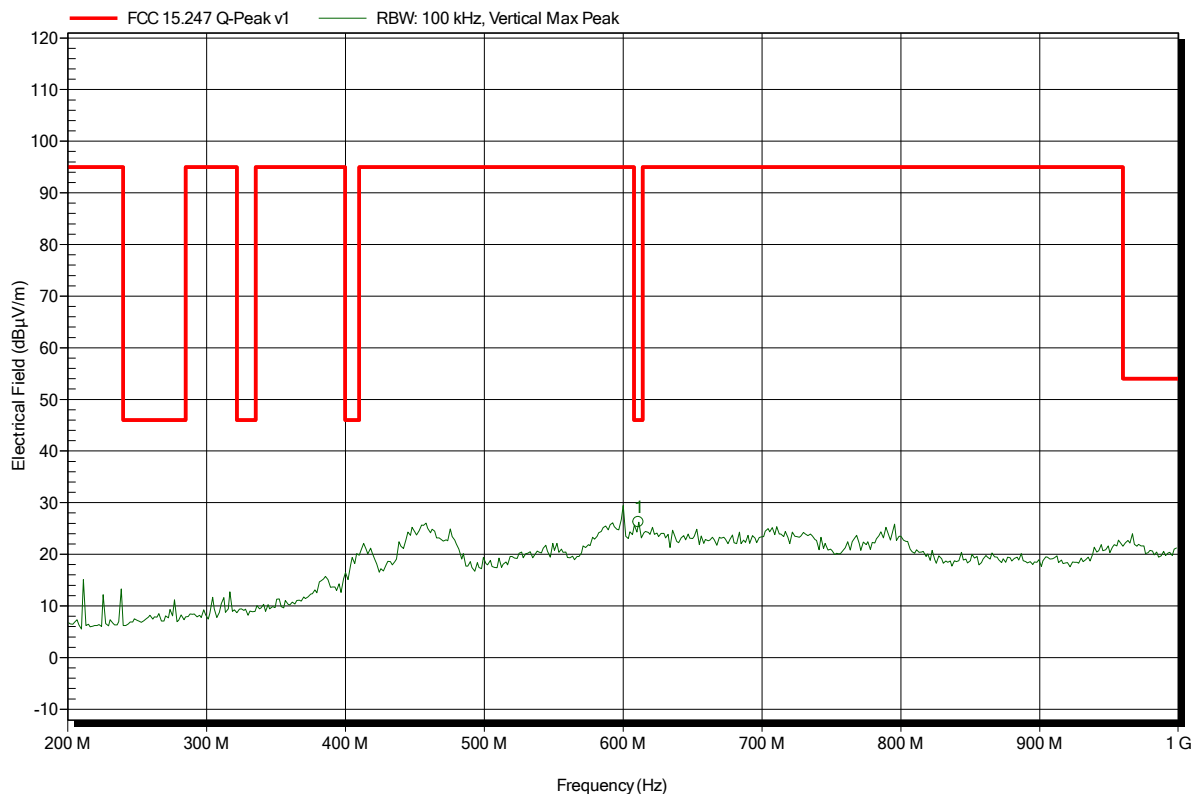


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
611.2 MHz	26.25 dBµV/m	46 dBµV/m	-19.75 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; GFSK; DH5; 2402 MHz
 Test Date: 2015-02-20
 Note:

Index 19

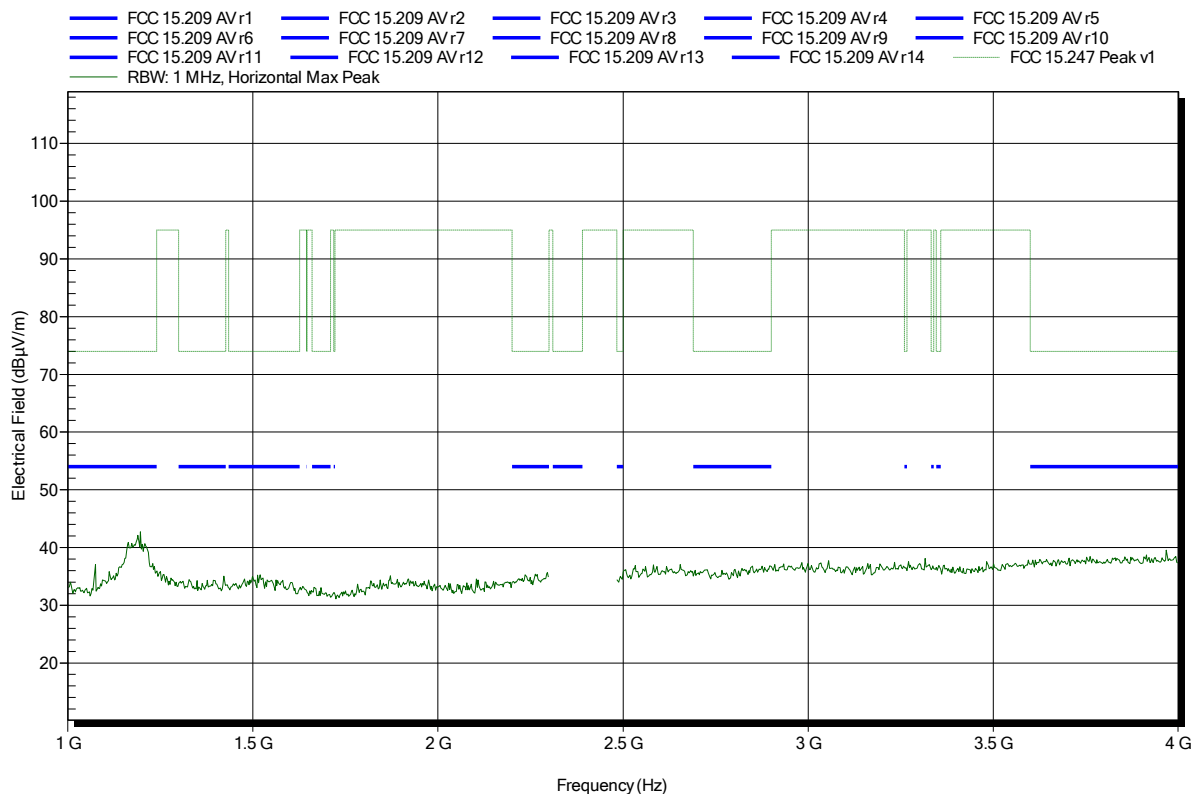


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; GFSK; DH5; 2402 MHz
 Test Date: 2015-02-20
 Note:

Index 21

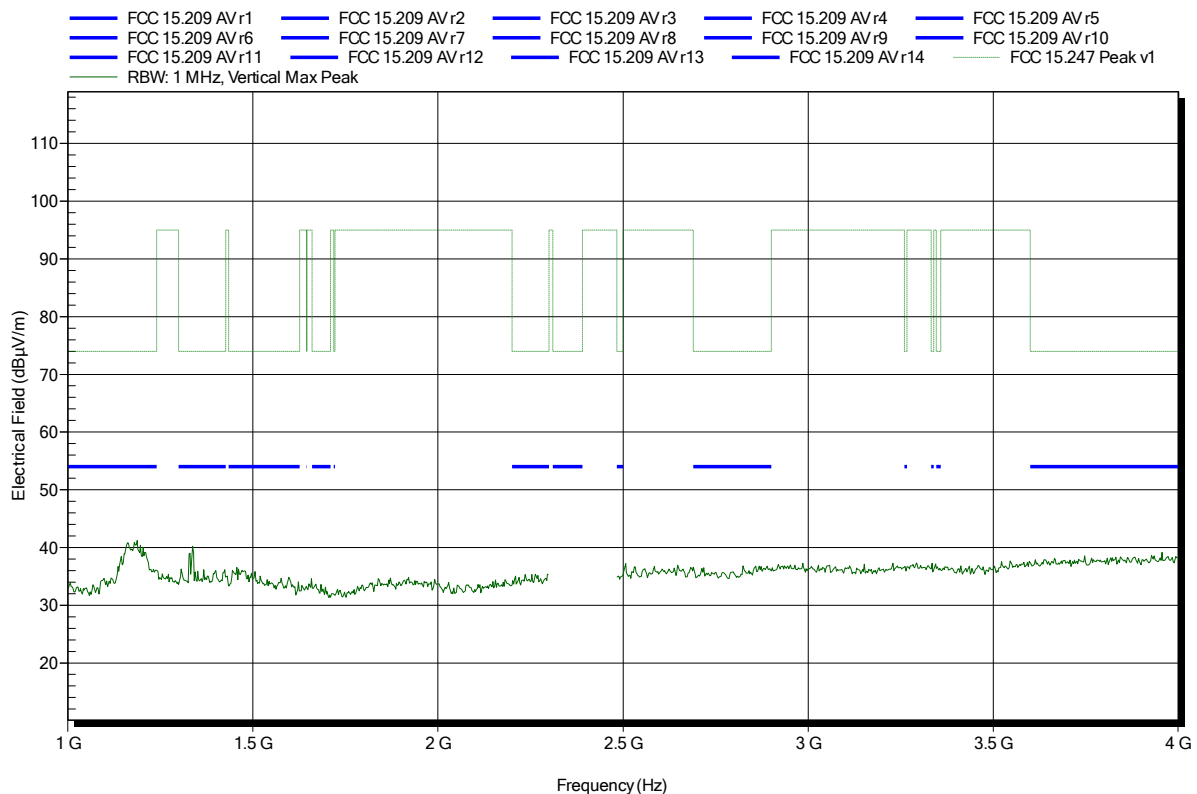


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; GFSK; DH5; 2402 MHz
 Test Date: 2015-02-20
 Note: lower bandedge

Index 20

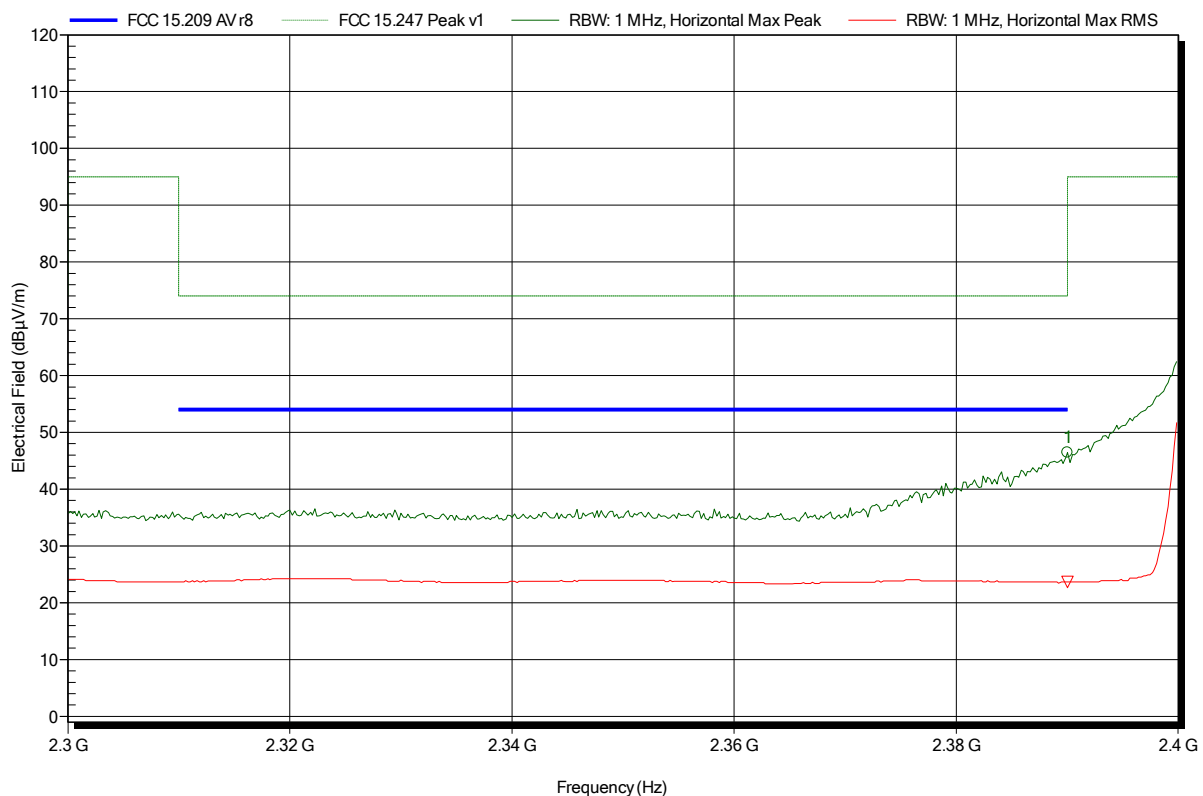


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.39 GHz	46.42 dBµV/m	74 dBµV/m	-27.58 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.39 GHz	23.68 dBµV/m	54 dBµV/m	-30.32 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; GFSK; DH5; 2402 MHz
 Test Date: 2015-02-20
 Note: lower bandedge

Index 22

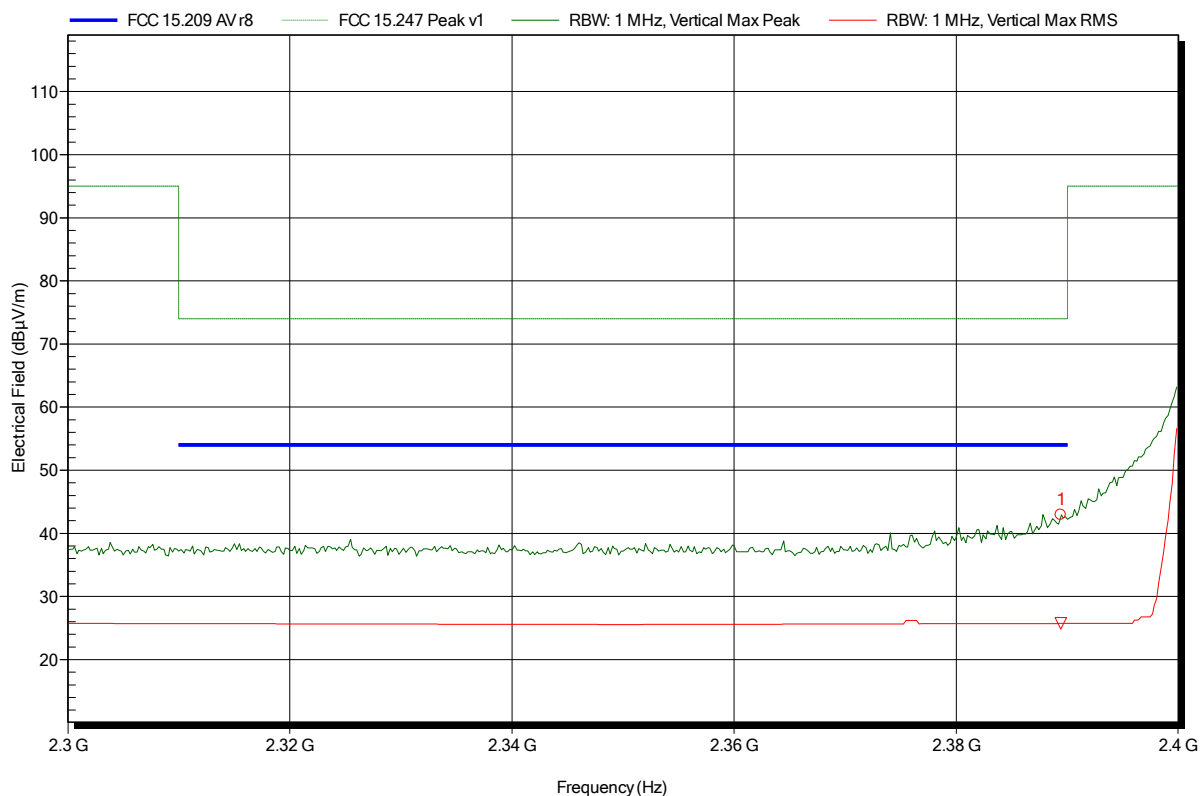

Frequency 2.389 GHz	Peak 42.93 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -31.07 dB	Peak Status Pass
Frequency 2.389 GHz	RMS 25.72 dBµV/m	RMS Limit 54 dBµV/m	RMS Difference -28.28 dB	RMS Status Pass

Test Report No.: G0M-1409-4119-TIC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; GFSK; DH5; 2402 MHz
 Test Date: 2015-02-20
 Note:

Index 29

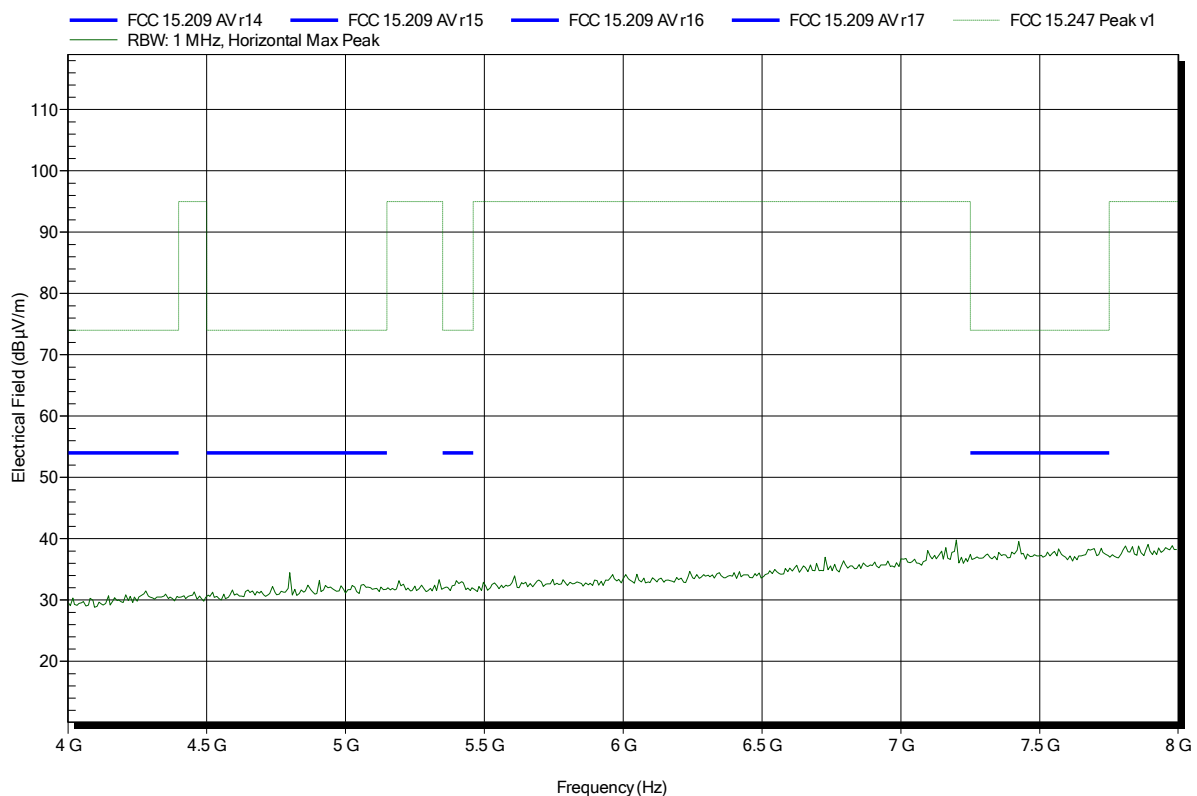


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; GFSK; DH5; 2402 MHz
 Test Date: 2015-02-20
 Note:

Index 32

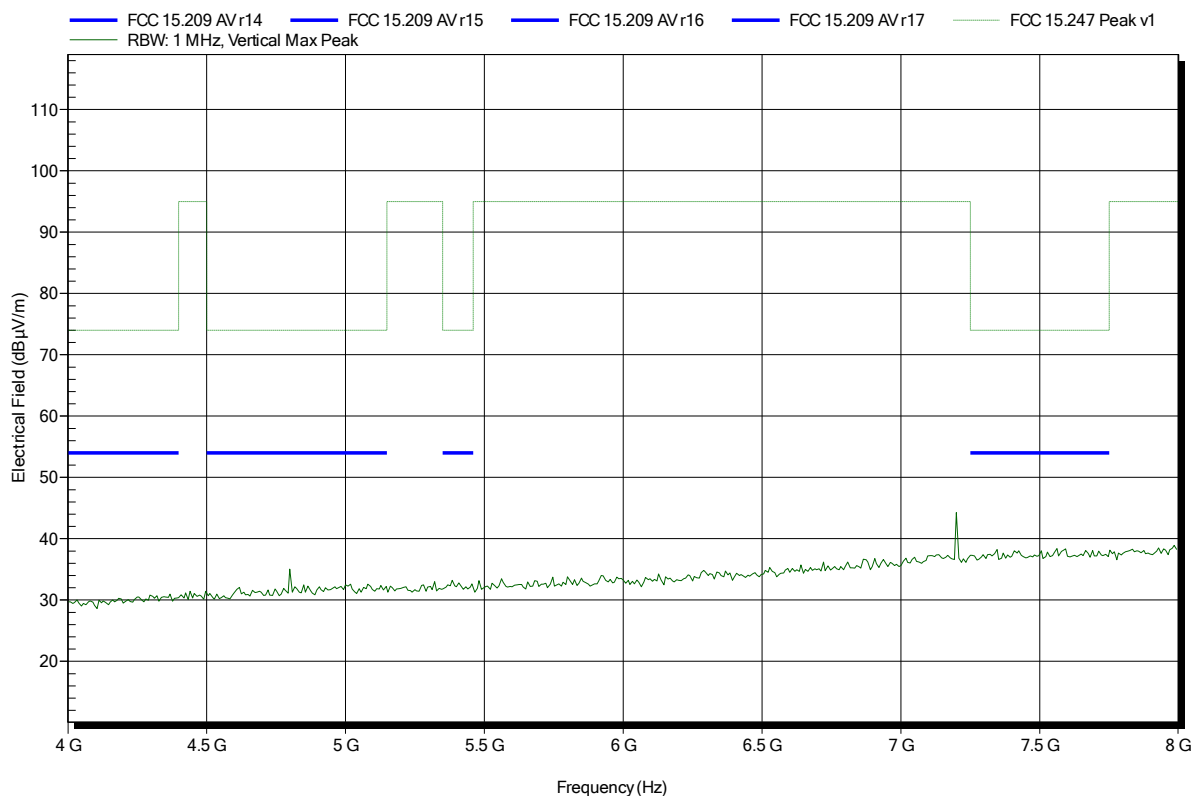


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; GFSK; DH5; 2402 MHz
 Test Date: 2015-02-20
 Note:

Index 30

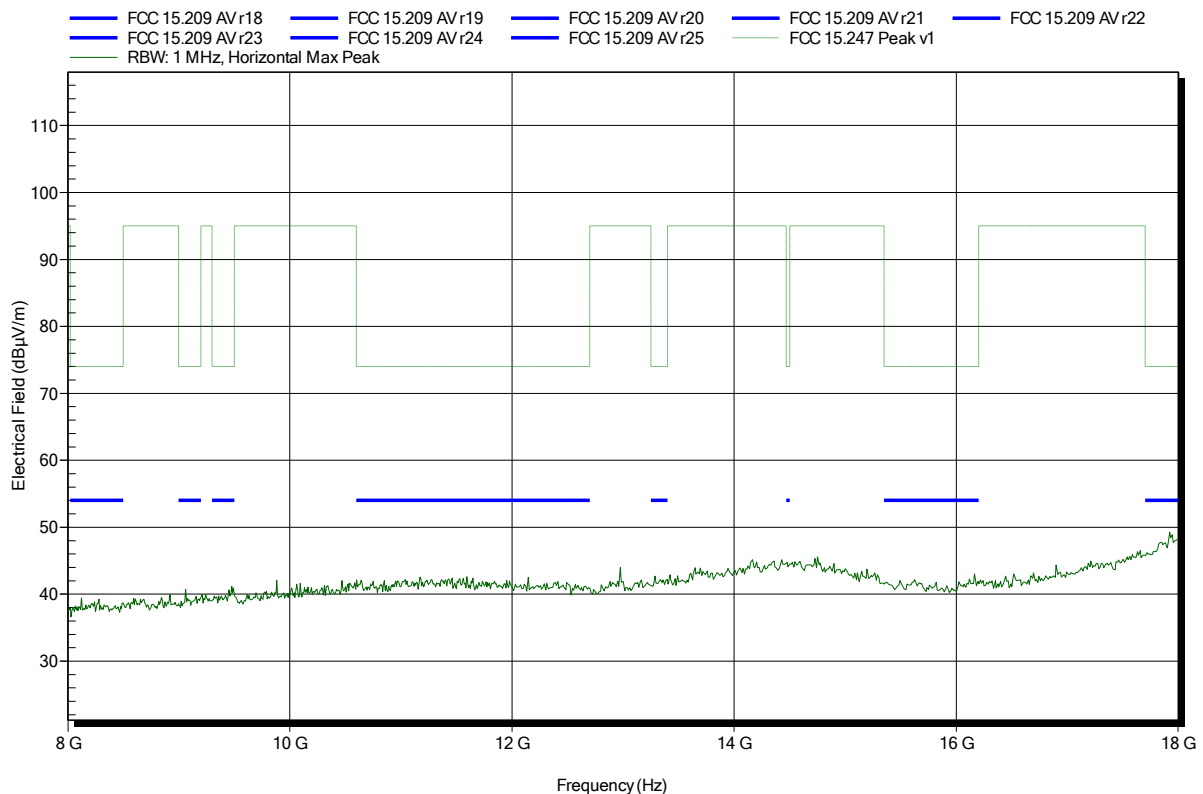


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; GFSK; DH5; 2402 MHz
 Test Date: 2015-02-20
 Note:

Index 33

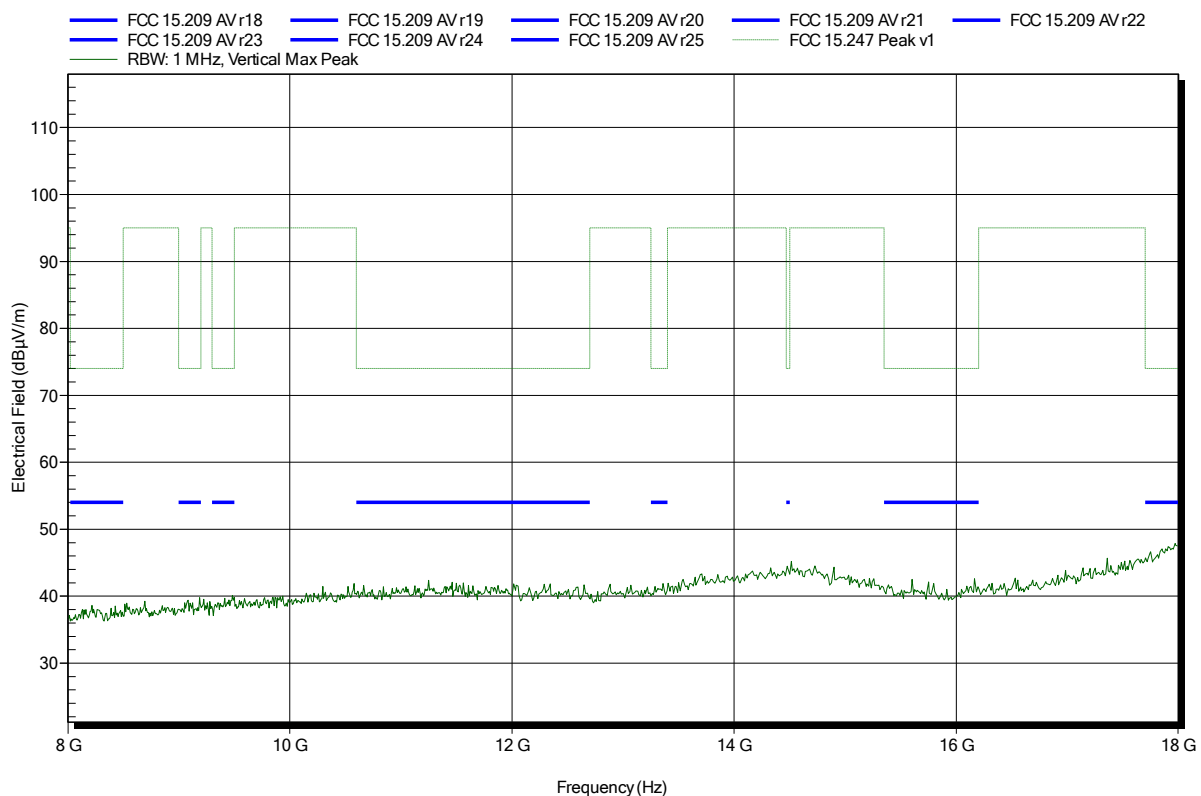


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; GFSK; DH5; 2402 MHz
 Test Date: 2015-02-20
 Note:

Index 31

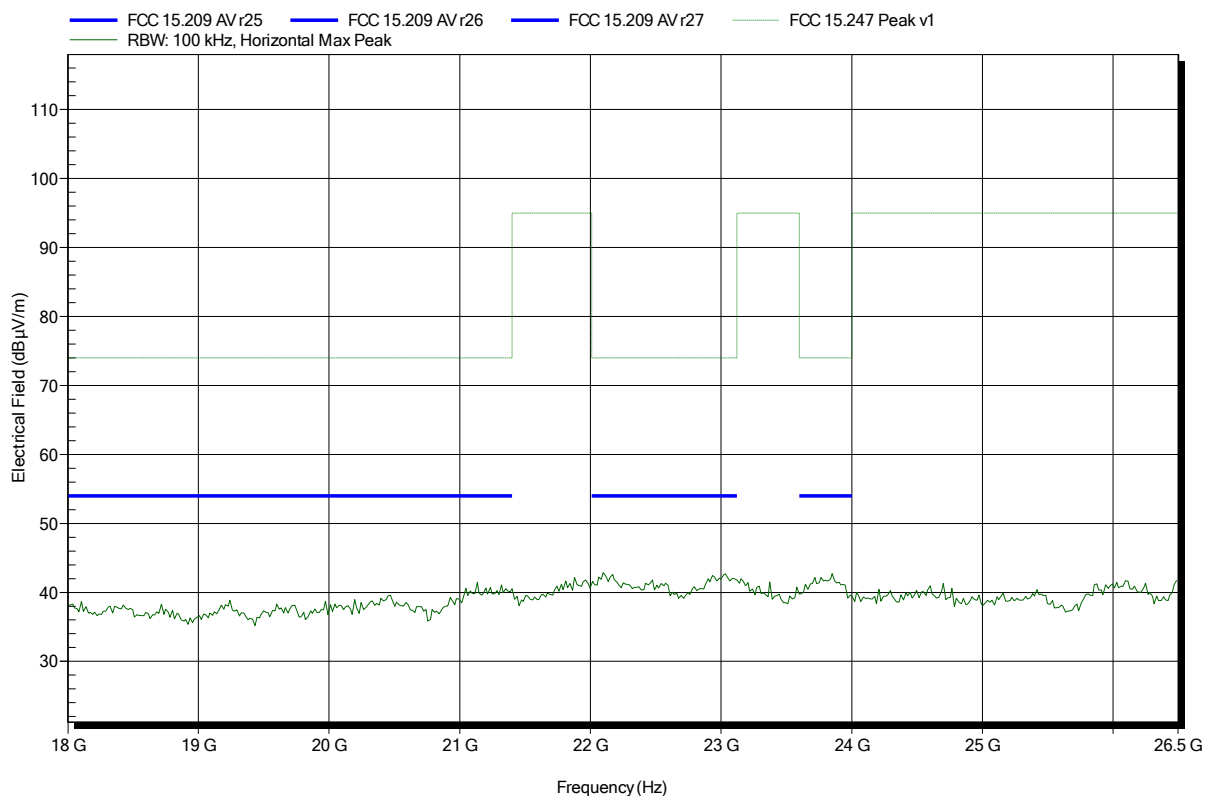


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant:	Leica Geosystems AG
EUT Name:	GNSS Receiver for Machine Control
Model:	iCG80
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 24 VDC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2402 MHz
Test Date:	2015-02-20
Note:	

Index 34

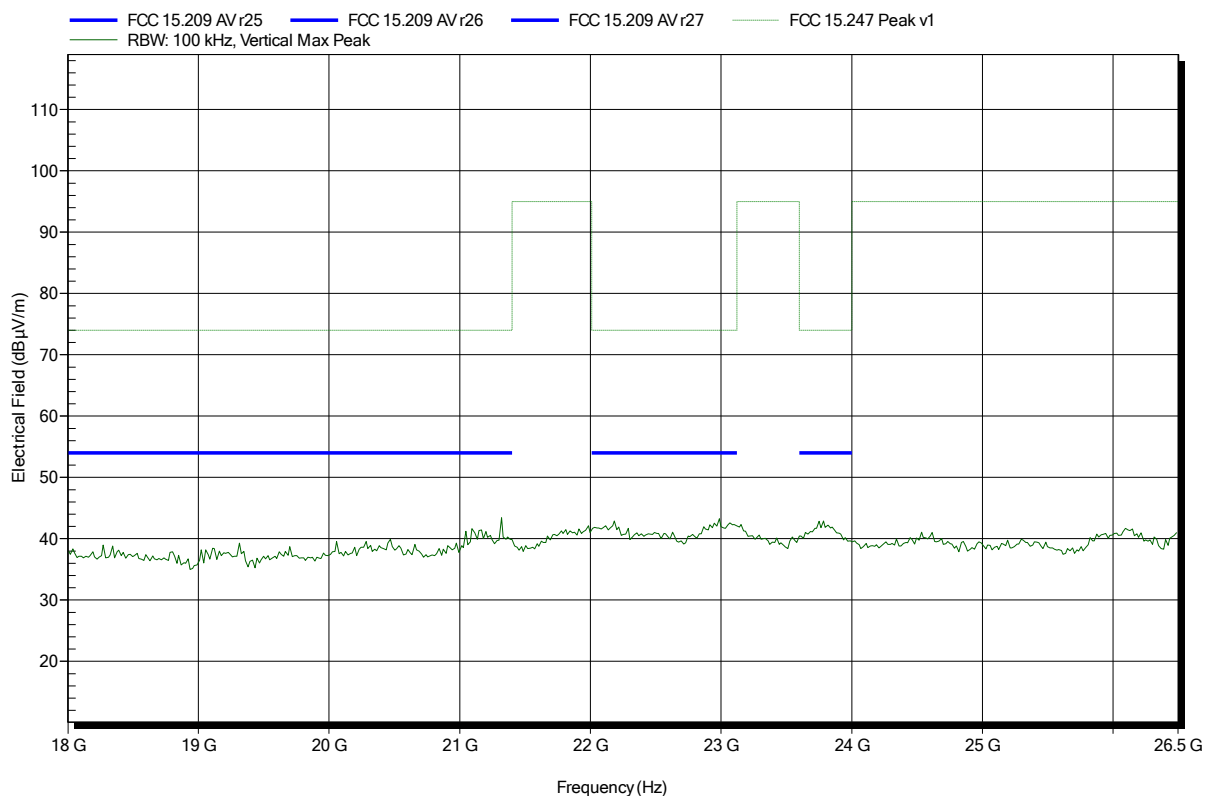


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; GFSK; DH5; 2441 MHz
 Test Date: 2015-02-20
 Note:

Index 24

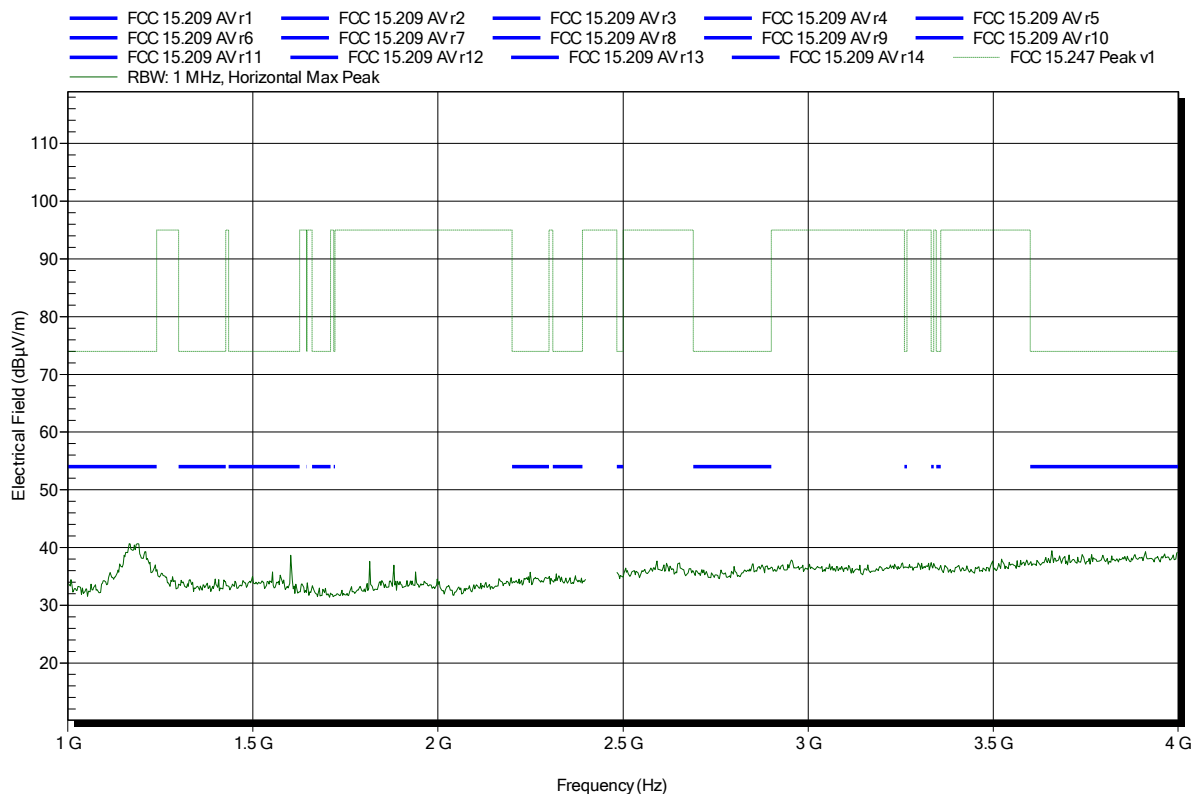


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; GFSK; DH5; 2441 MHz
 Test Date: 2015-02-20
 Note:

Index 23

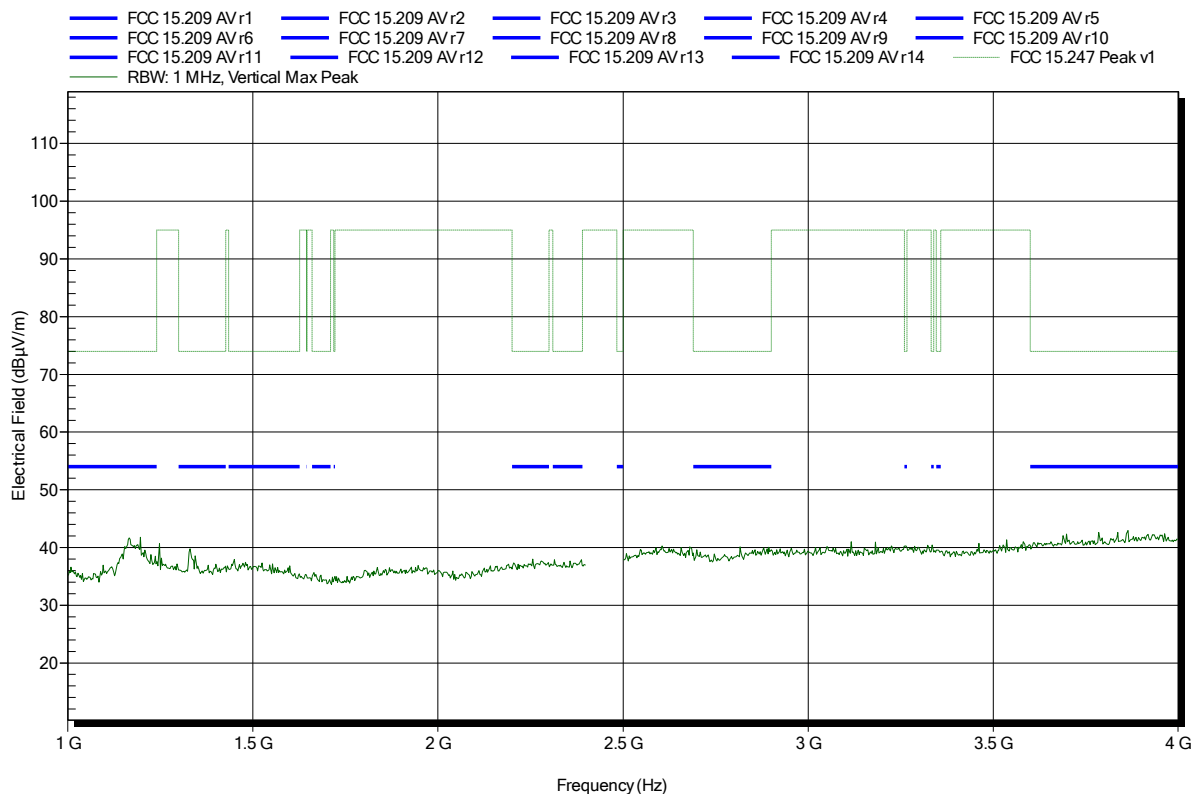


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; GFSK; DH5; 2441 MHz
 Test Date: 2015-02-20
 Note:

Index 38

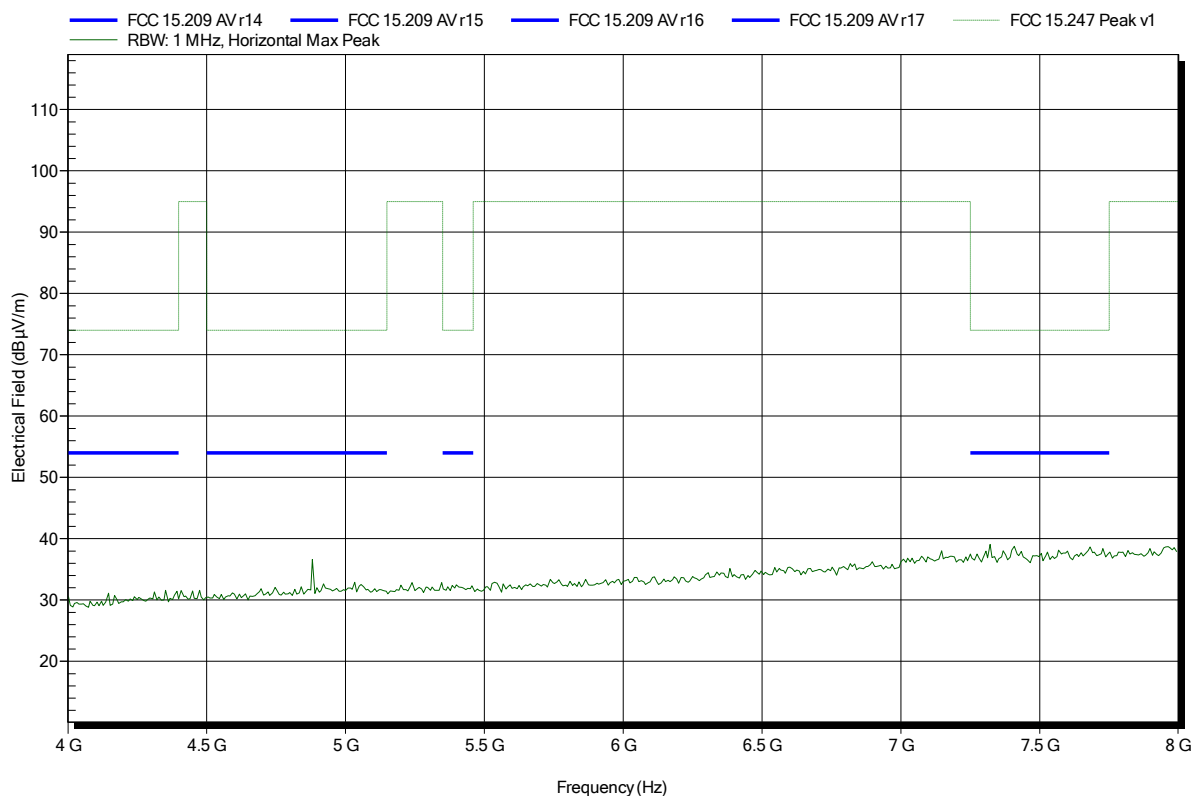


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; GFSK; DH5; 2441 MHz
 Test Date: 2015-02-20
 Note:

Index 35

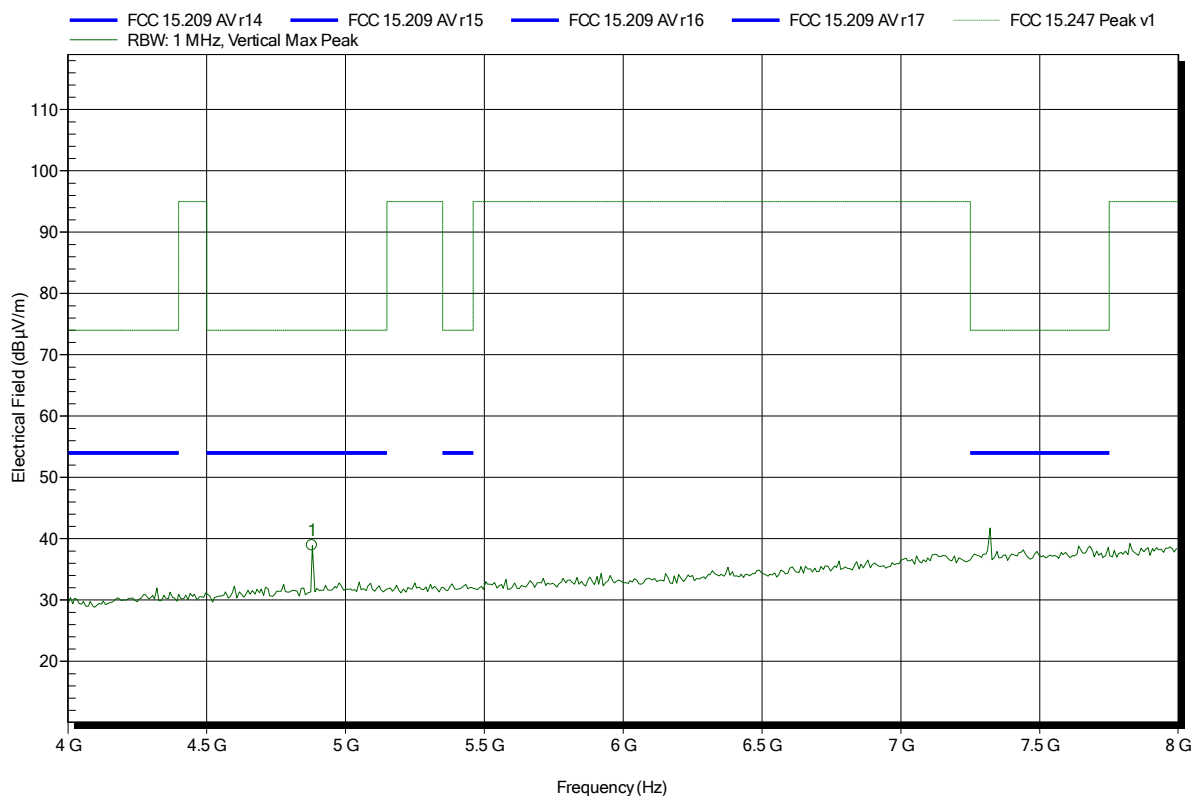

Frequency	Peak	Peak Limit	Peak Difference	Status
4.88 GHz	38.93 dBµV/m	74 dBµV/m	-35.07 dB	Pass


Frequency
4.88 GHz

Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; GFSK; DH5; 2441 MHz
 Test Date: 2015-02-20
 Note:

Index 39

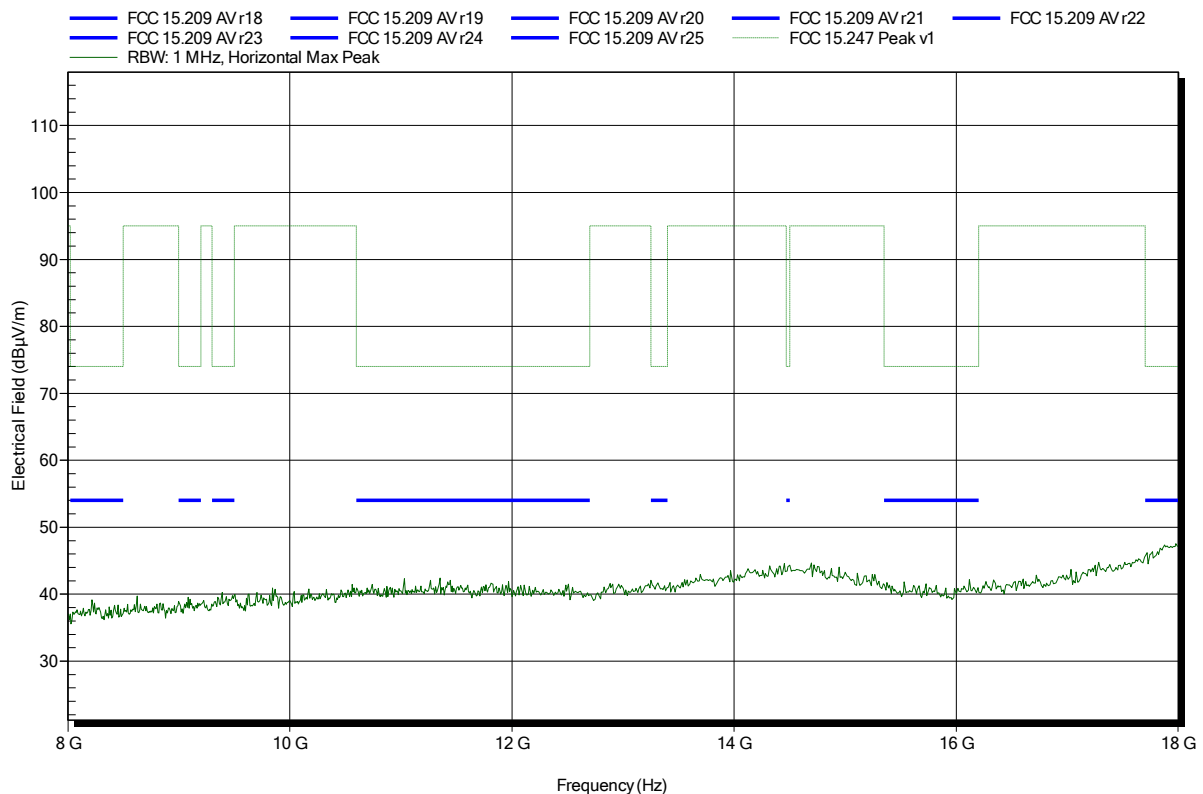


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; GFSK; DH5; 2441 MHz
 Test Date: 2015-02-20
 Note:

Index 36

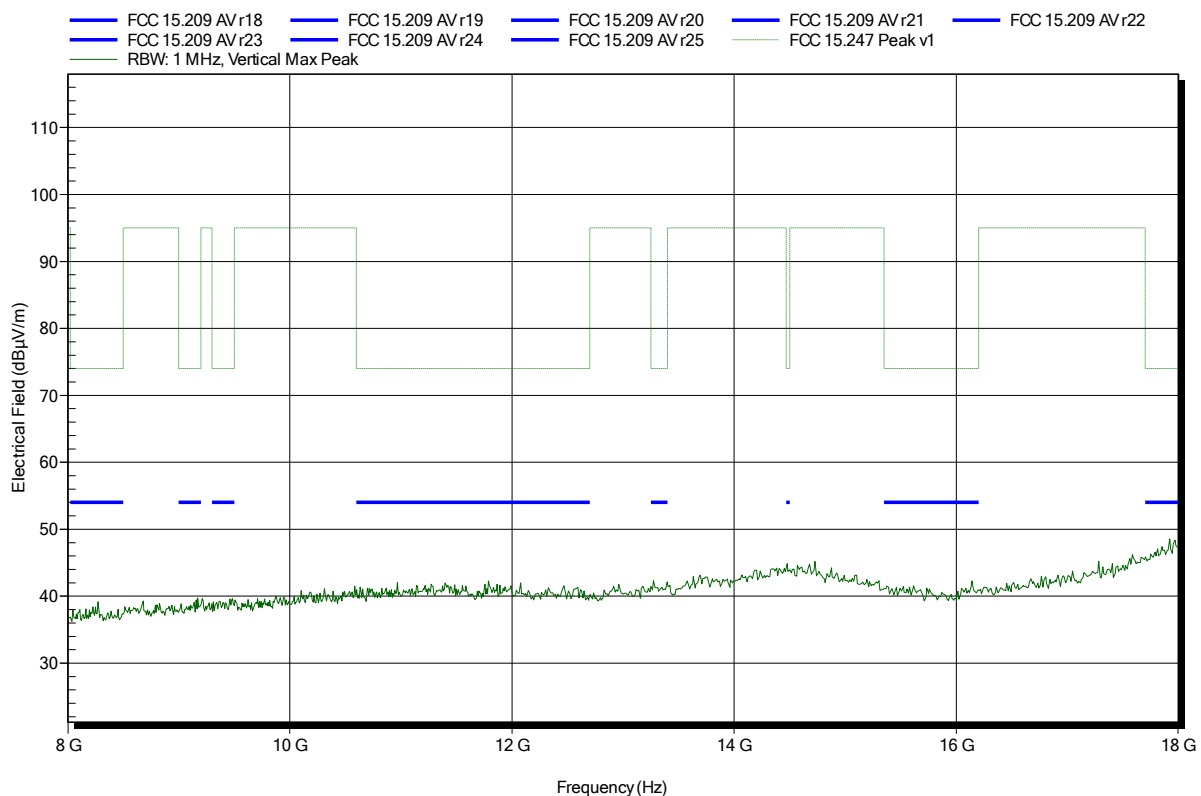


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; GFSK; DH5; 2441 MHz
 Test Date: 2015-02-20
 Note:

Index 40

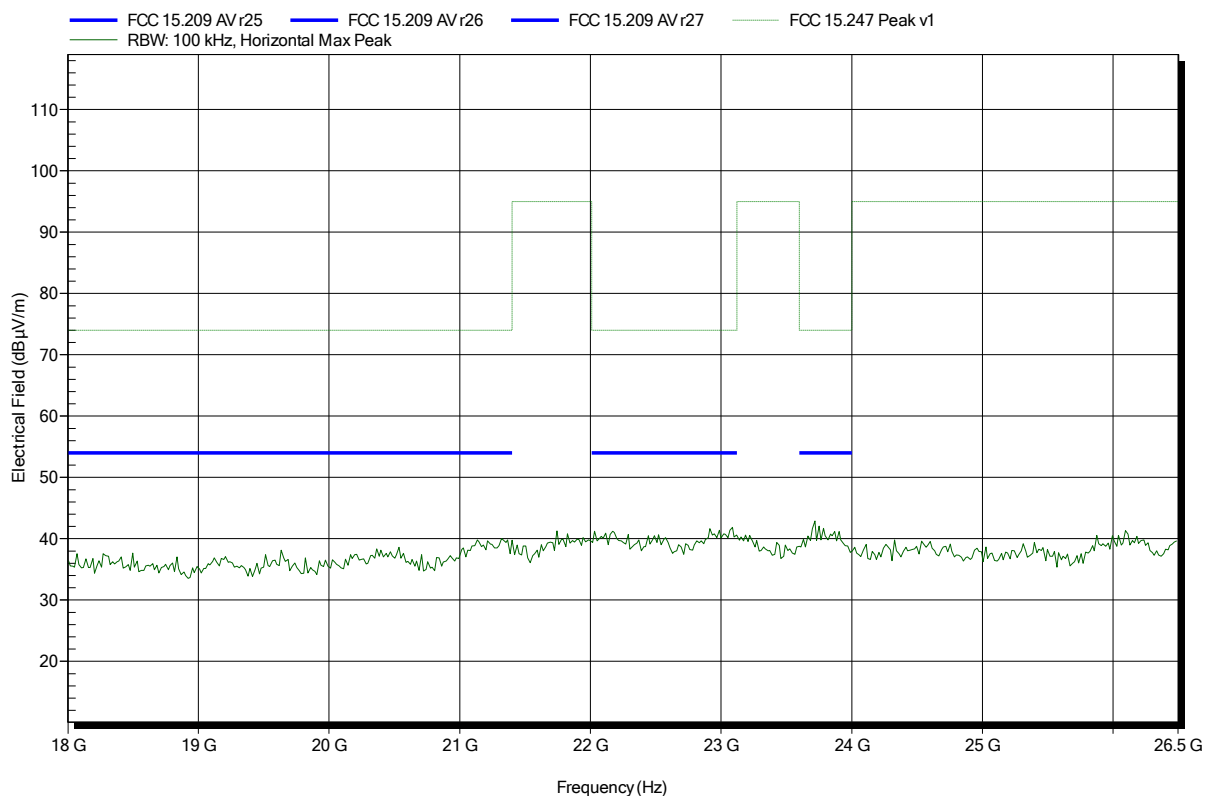


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant:	Leica Geosystems AG
EUT Name:	GNSS Receiver for Machine Control
Model:	iCG80
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 24 VDC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2441 MHz
Test Date:	2015-02-20
Note:	

Index 37

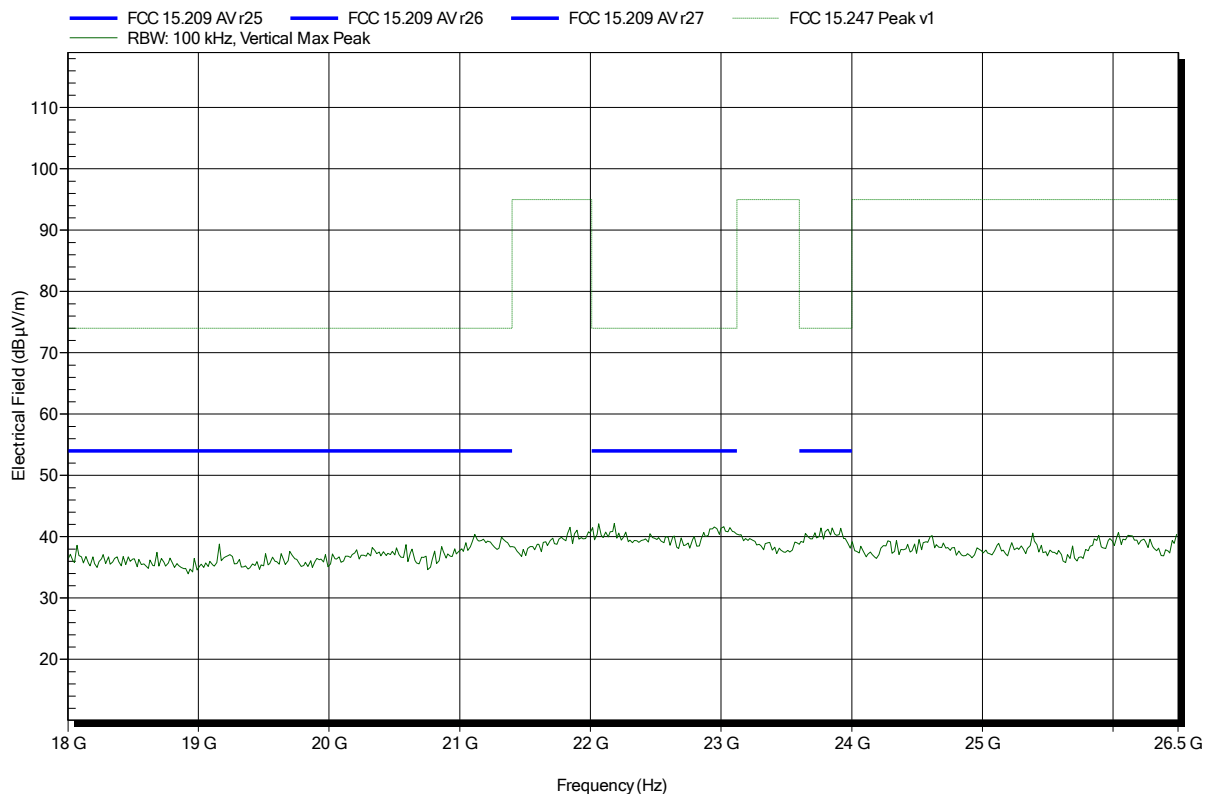


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; GFSK; DH5; 2480 MHz
 Test Date: 2015-02-20
 Note:

Index 25

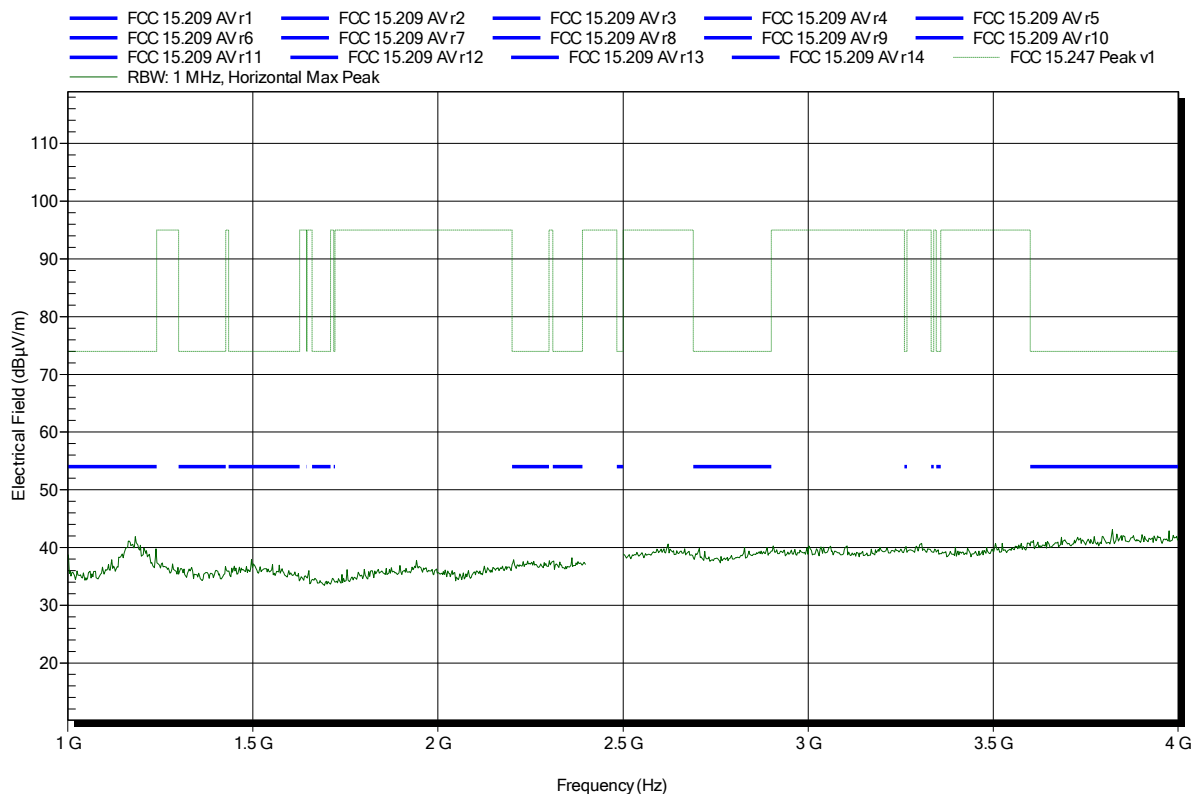


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; GFSK; DH5; 2480 MHz
 Test Date: 2015-02-20
 Note:

Index 28

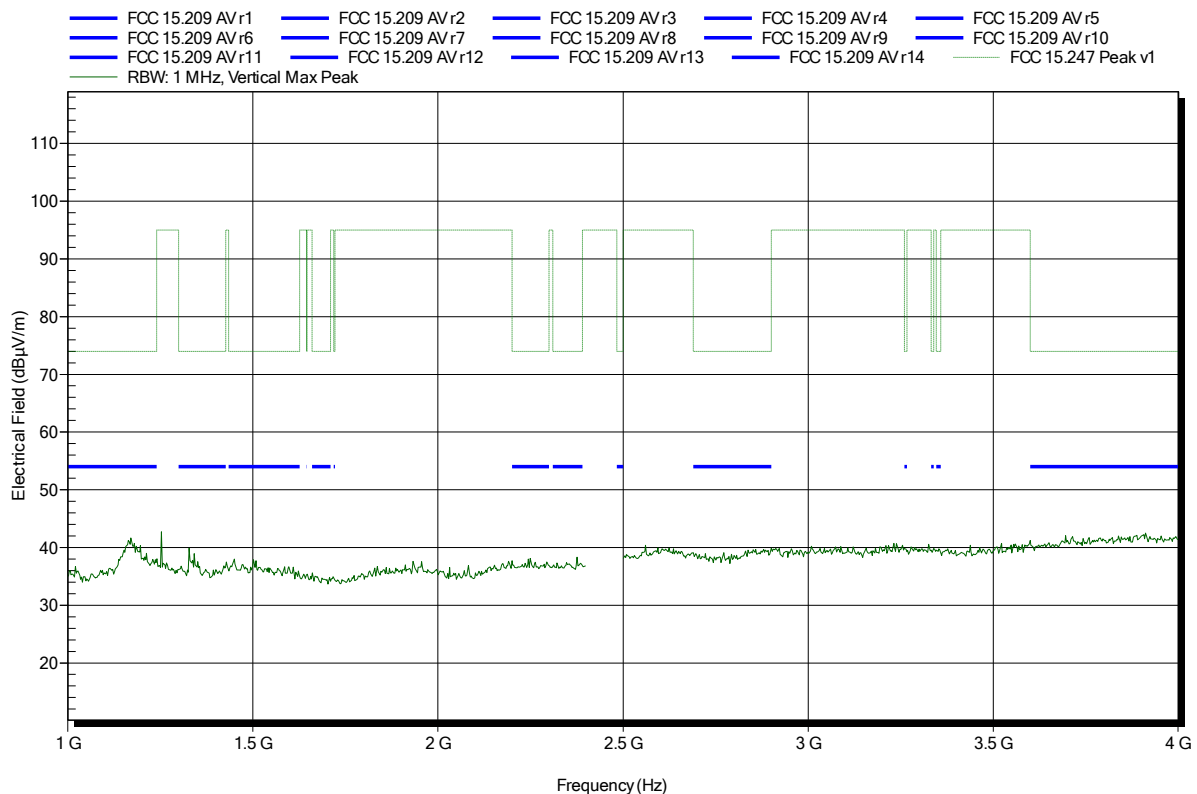


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; GFSK; DH5; 2480 MHz
 Test Date: 2015-02-20
 Note: upper bandedge

Index 26

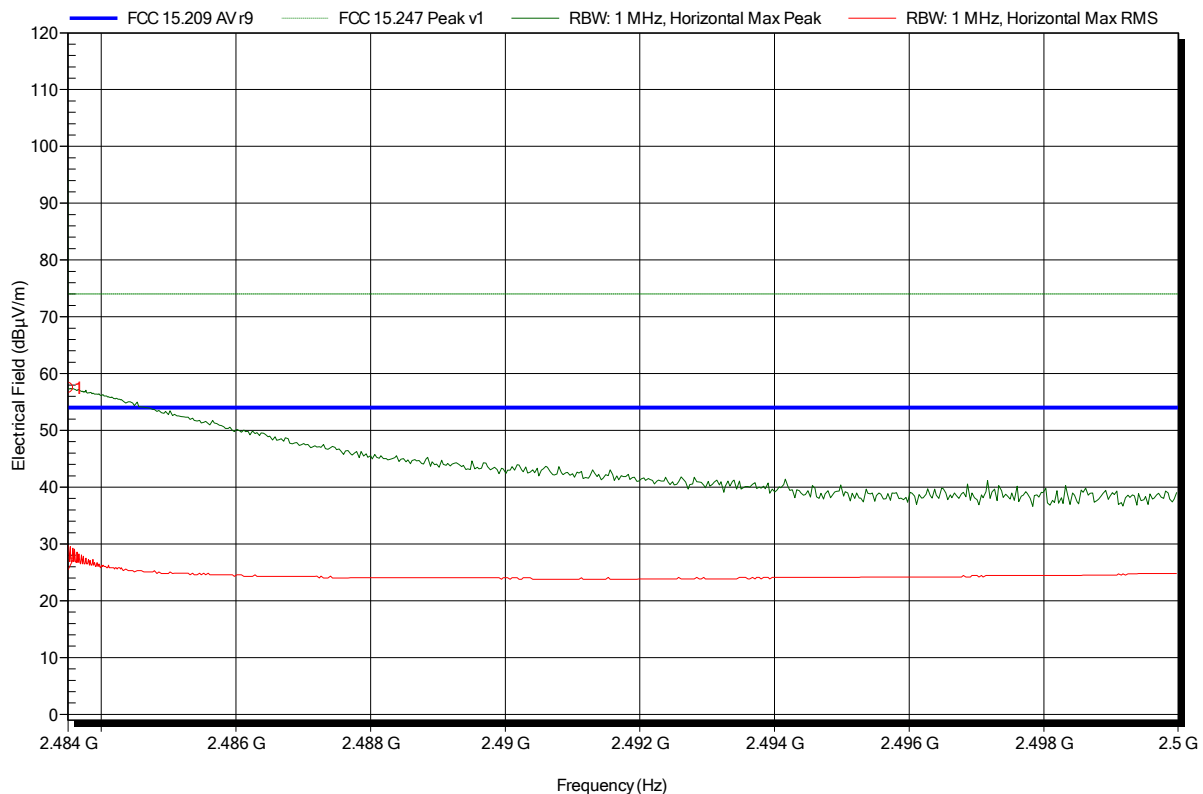


Frequency 2.4835 GHz	Peak 57.48 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -16.52 dB	Peak Status Pass
Frequency 2.4835 GHz	RMS 26.47 dBµV/m	RMS Limit 54 dBµV/m	RMS Difference -27.53 dB	RMS Status Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; GFSK; DH5; 2480 MHz
 Test Date: 2015-02-20
 Note: upper bandedge

Index 27

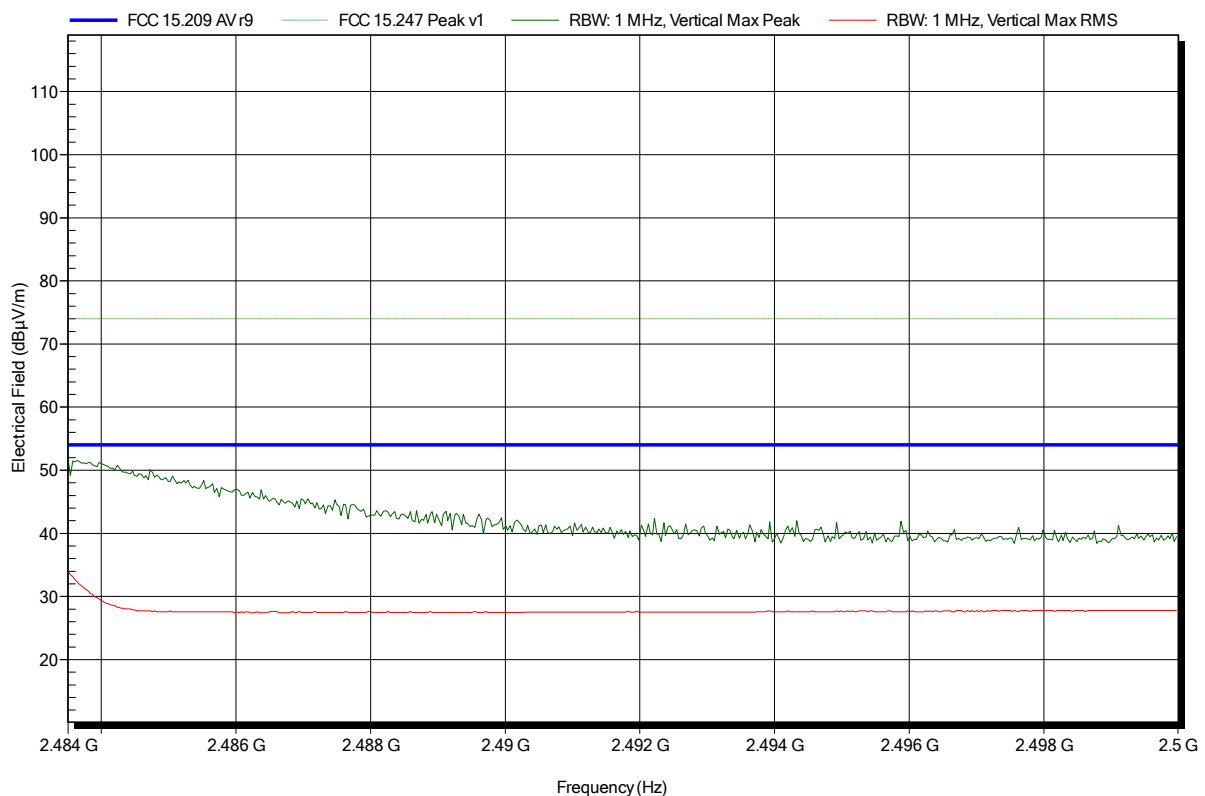


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; GFSK; DH5; 2480 MHz
 Test Date: 2015-02-20
 Note:

Index 41

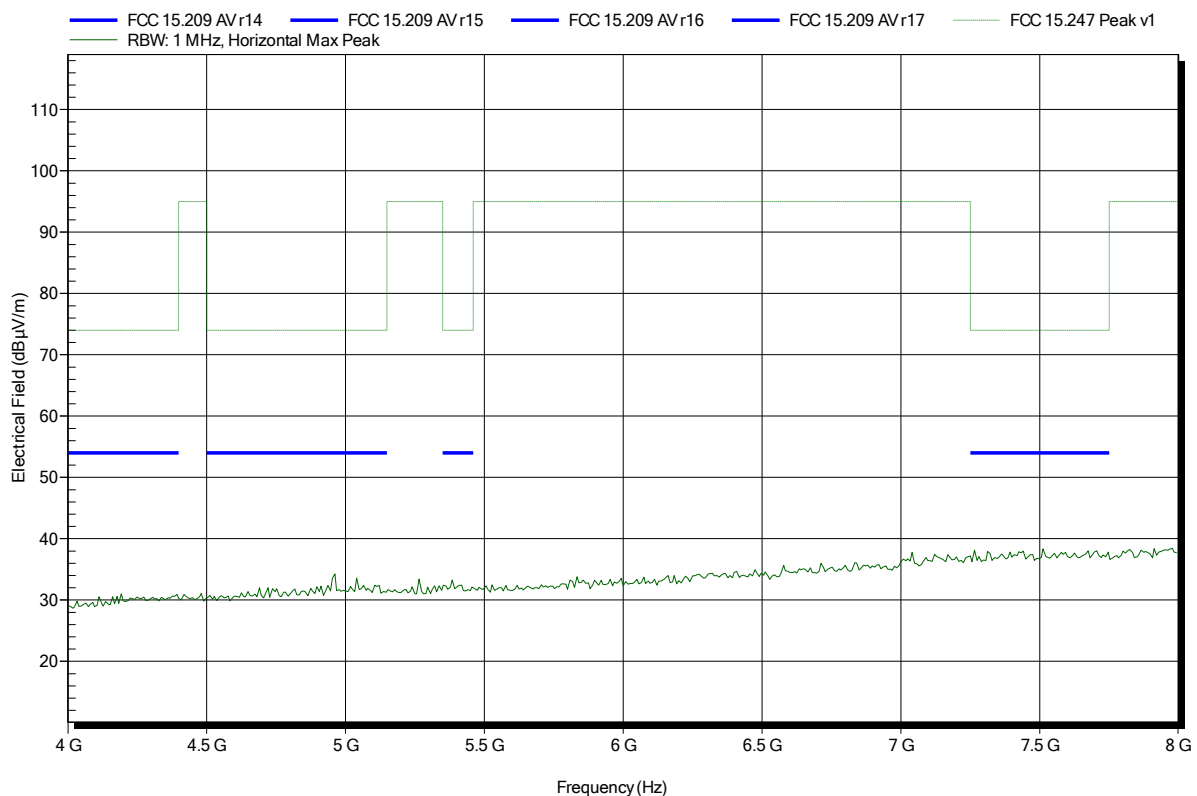


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; GFSK; DH5; 2480 MHz
 Test Date: 2015-02-20
 Note:

Index 44

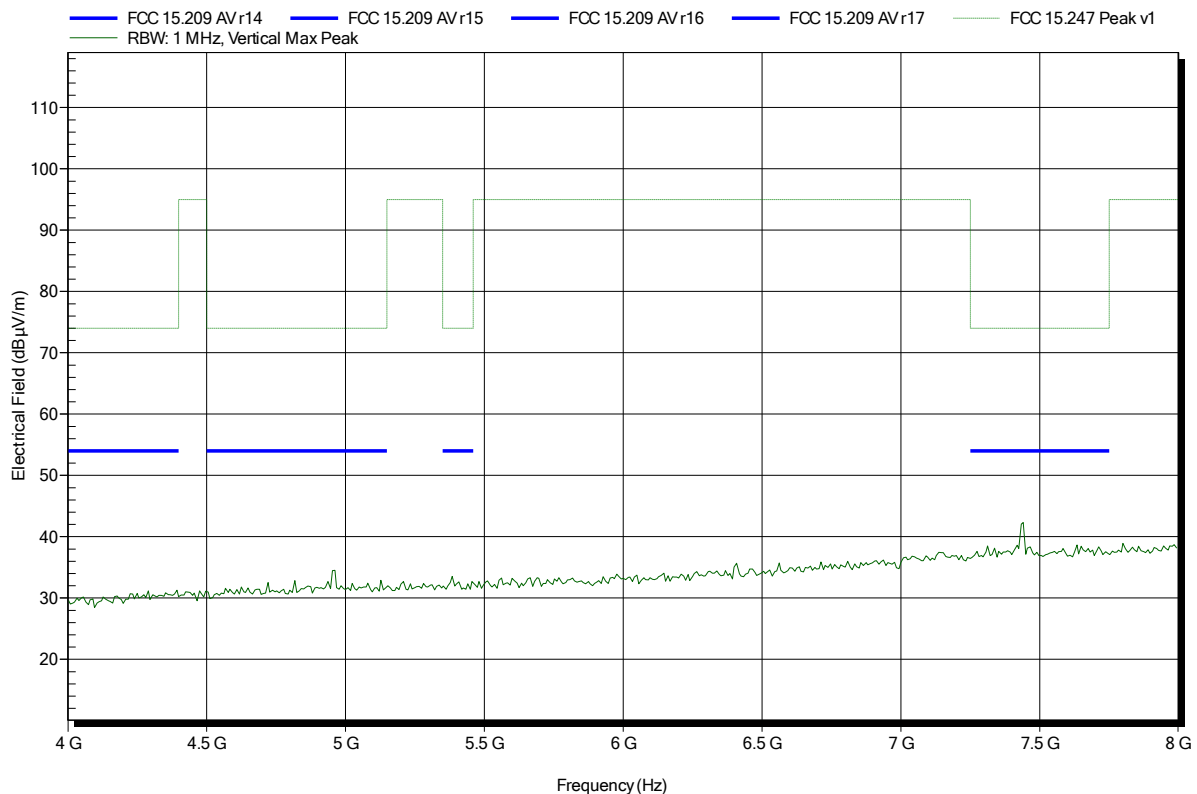


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; GFSK; DH5; 2480 MHz
 Test Date: 2015-02-20
 Note:

Index 42

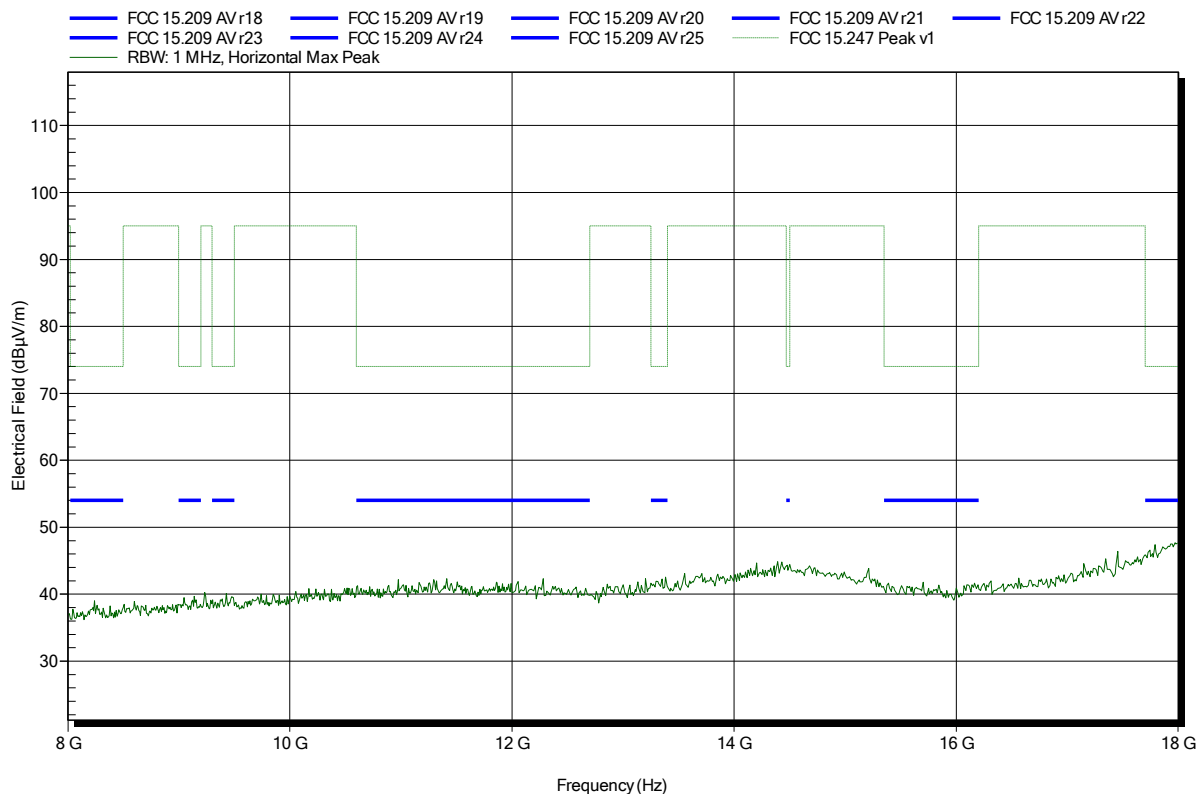


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; GFSK; DH5; 2480 MHz
 Test Date: 2015-02-20
 Note:

Index 45

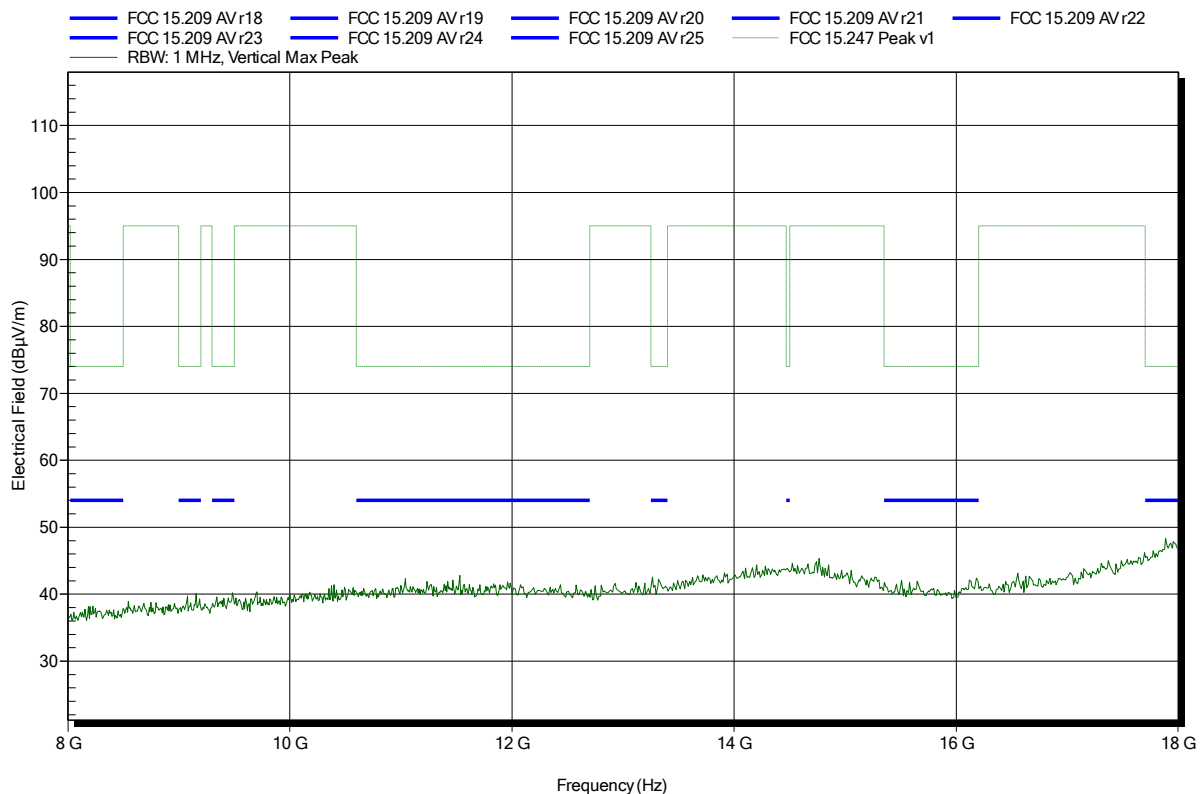


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; GFSK; DH5; 2480 MHz
 Test Date: 2015-02-20
 Note:

Index 43

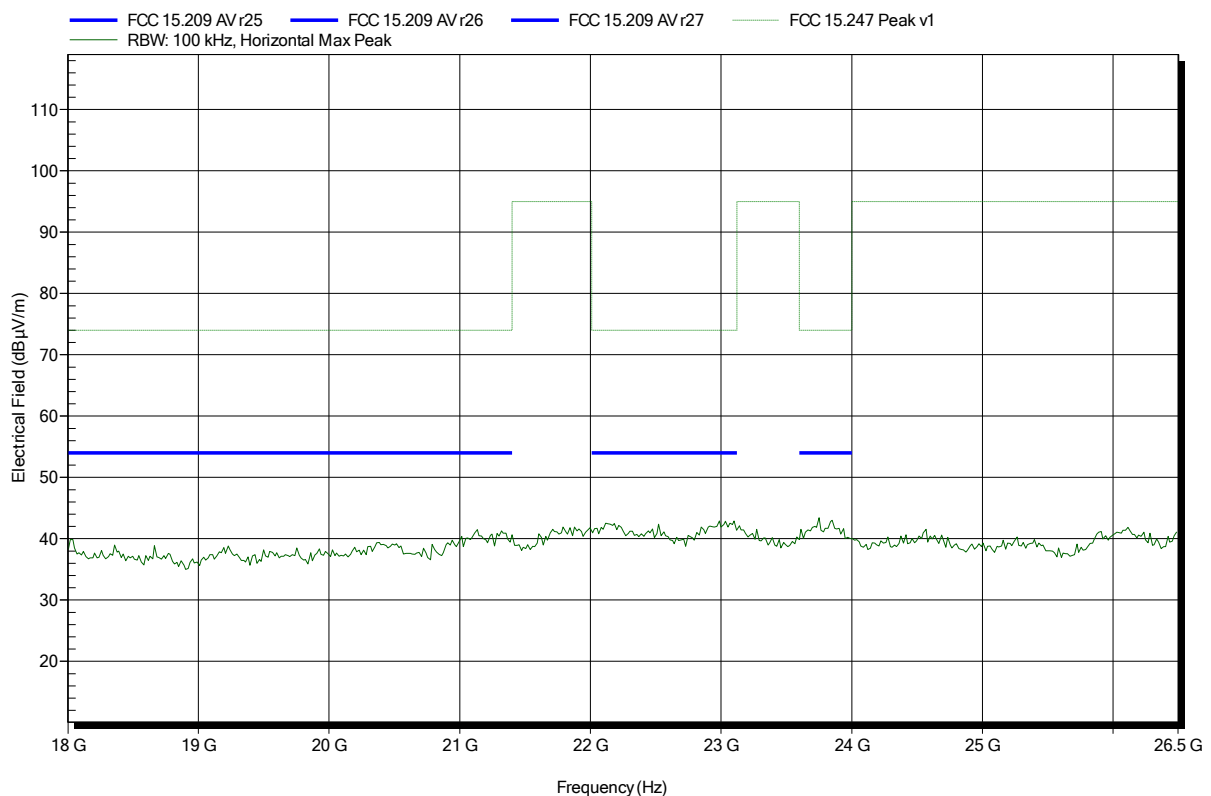


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; GFSK; DH5; 2480 MHz
 Test Date: 2015-02-20
 Note:

Index 46

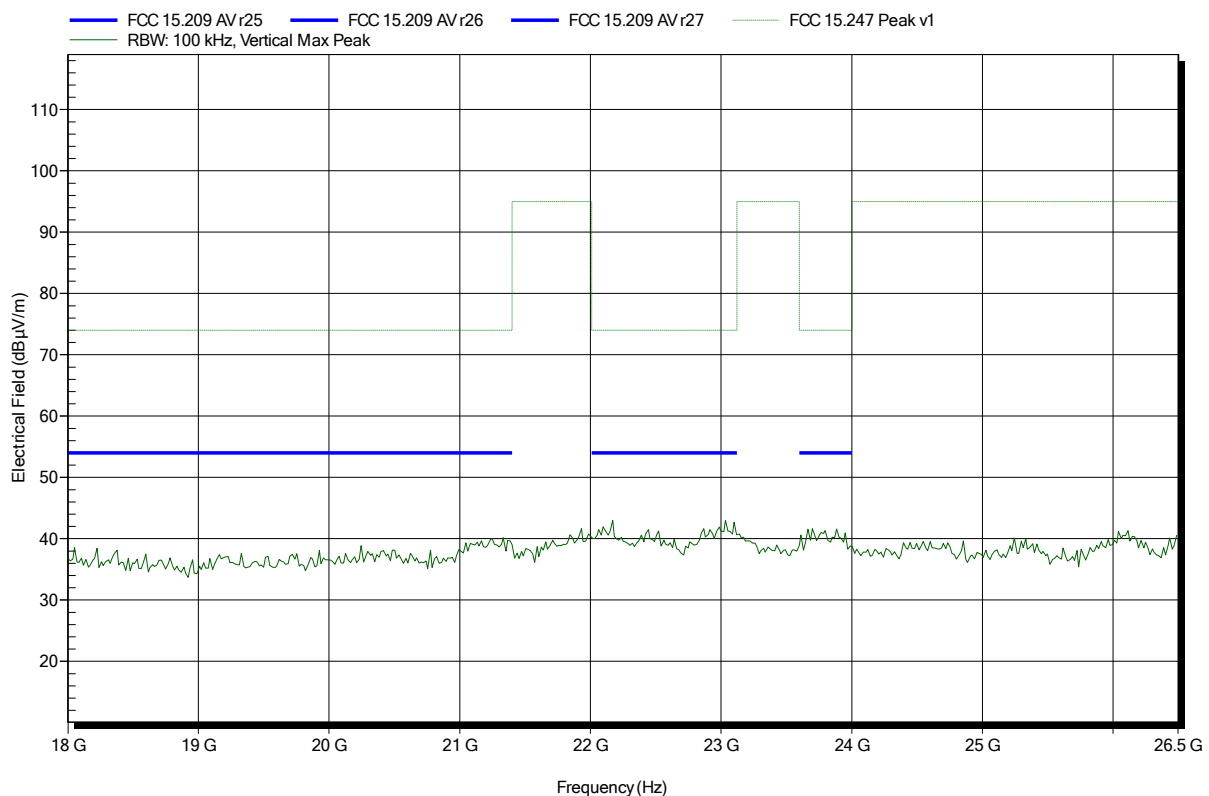


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; 8DPSK; 3DH5; 2402 MHz
 Test Date: 2015-02-20
 Note:

Index 53

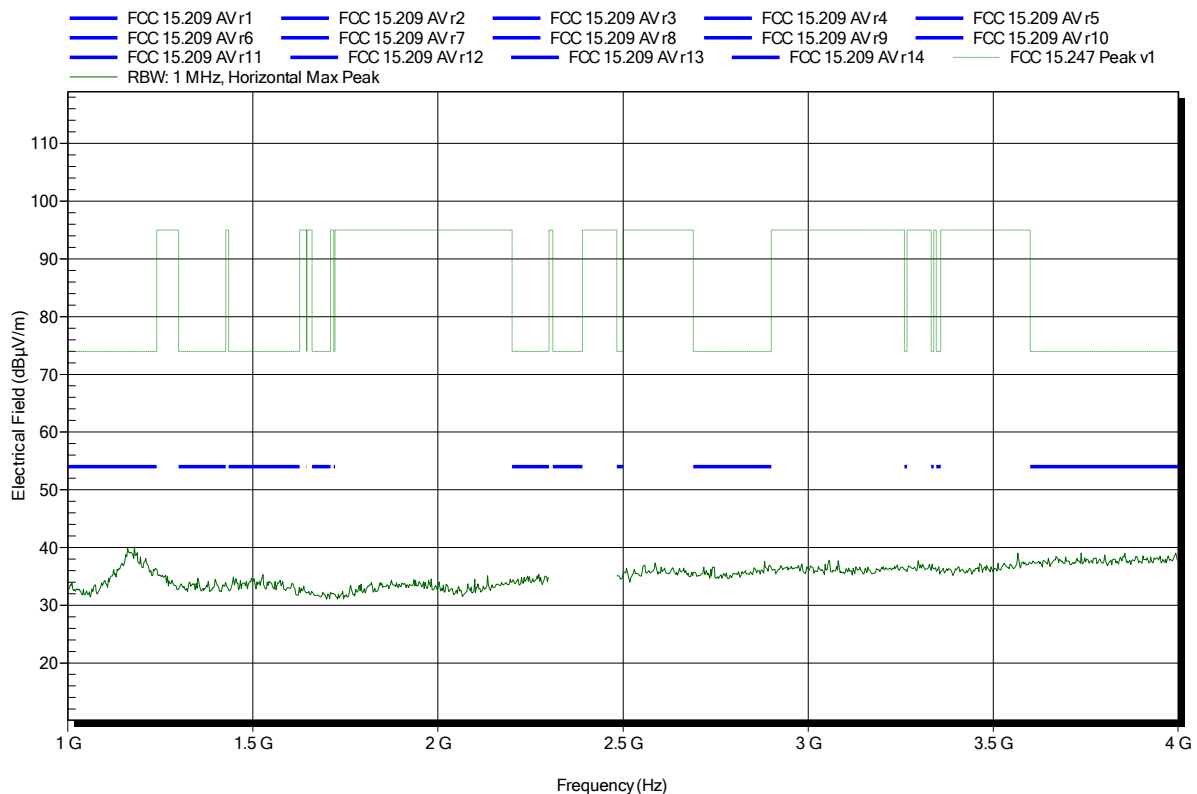


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; 8DPSK; 3DH5; 2402 MHz
 Test Date: 2015-02-20
 Note:

Index 55

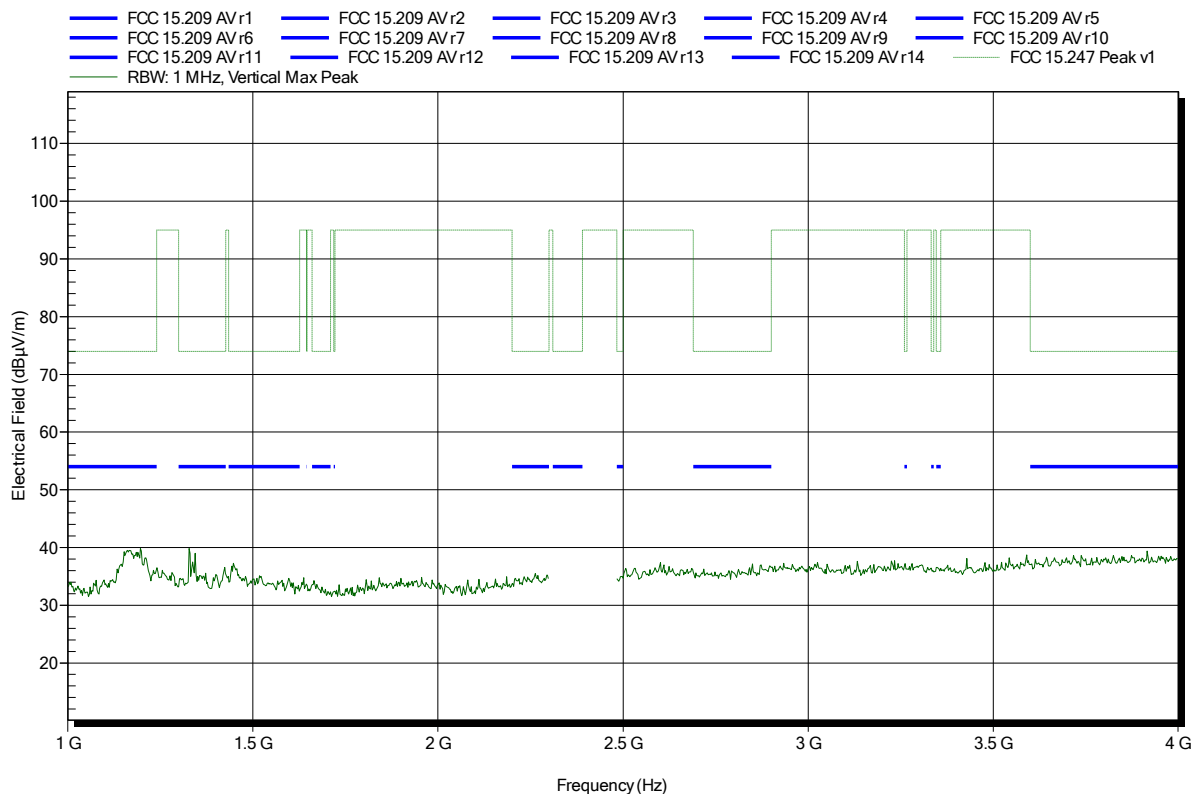


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; 8DPSK; 3DH5; 2402 MHz
 Test Date: 2015-02-20
 Note: lower bandedge

Index 54

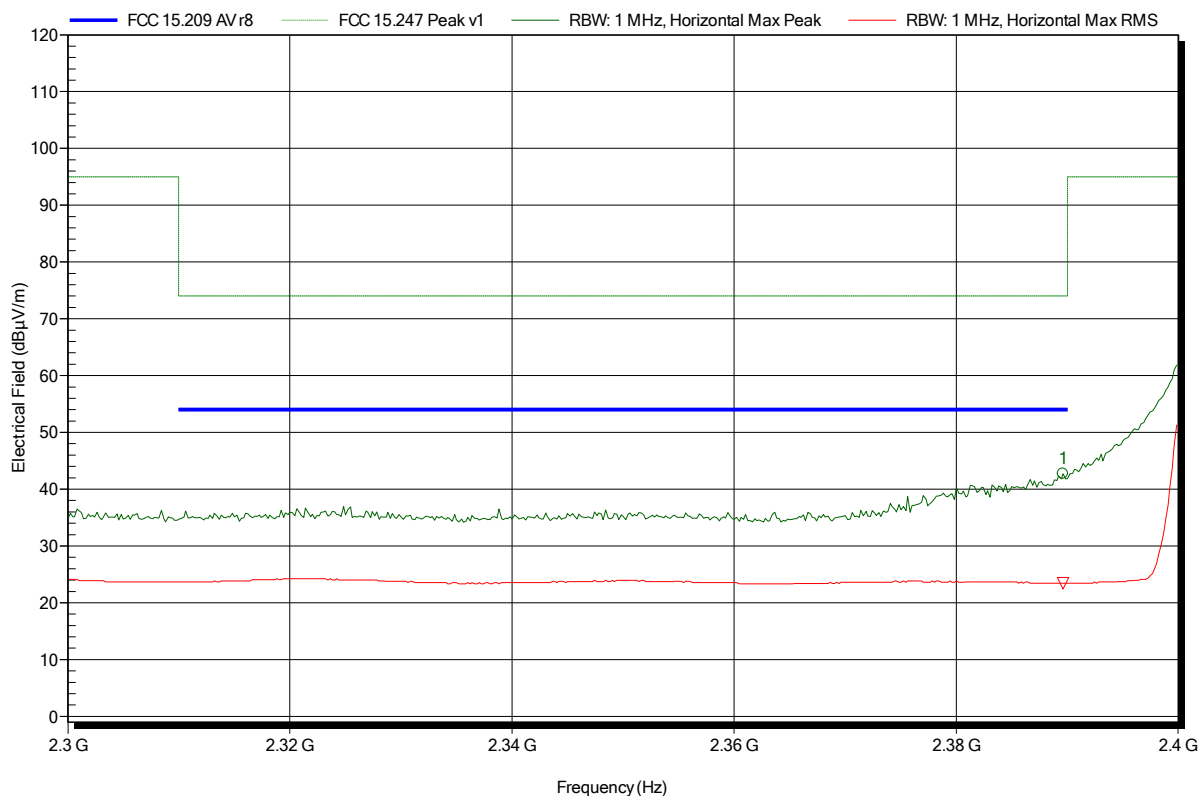


Frequency 2.39 GHz	Peak 42.74 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -31.26 dB	Peak Status Pass
Frequency 2.39 GHz	RMS 23.46 dBµV/m	RMS Limit 54 dBµV/m	RMS Difference -30.54 dB	RMS Status Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; 8DPSK; 3DH5; 2402 MHz
 Test Date: 2015-02-20
 Note: lower bandedge

Index 56

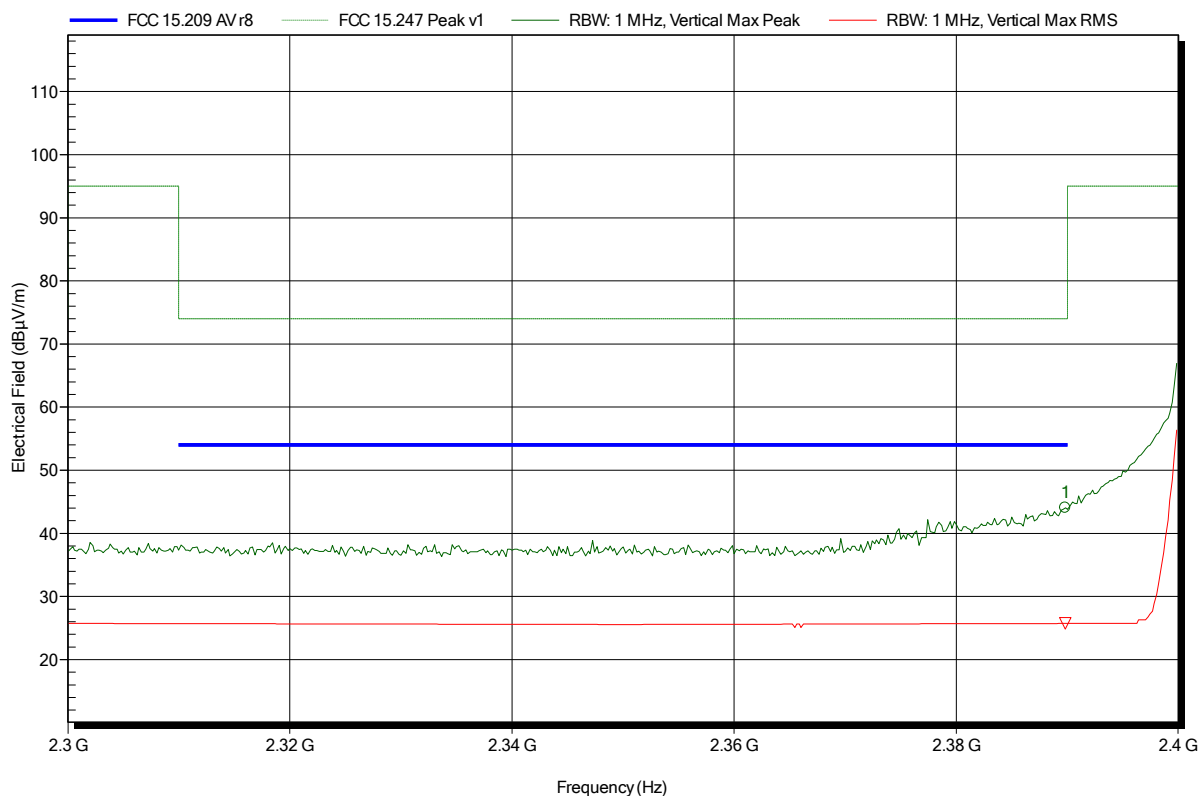


Frequency 2.39 GHz	Peak 44.05 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -29.95 dB	Peak Status Pass
Frequency 2.39 GHz	RMS 25.72 dBµV/m	RMS Limit 54 dBµV/m	RMS Difference -28.28 dB	RMS Status Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant:	Leica Geosystems AG
EUT Name:	GNSS Receiver for Machine Control
Model:	iCG80
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 24 VDC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; 8DPSK; 3DH5; 2402 MHz
Test Date:	2015-02-23
Note:	

Index 67

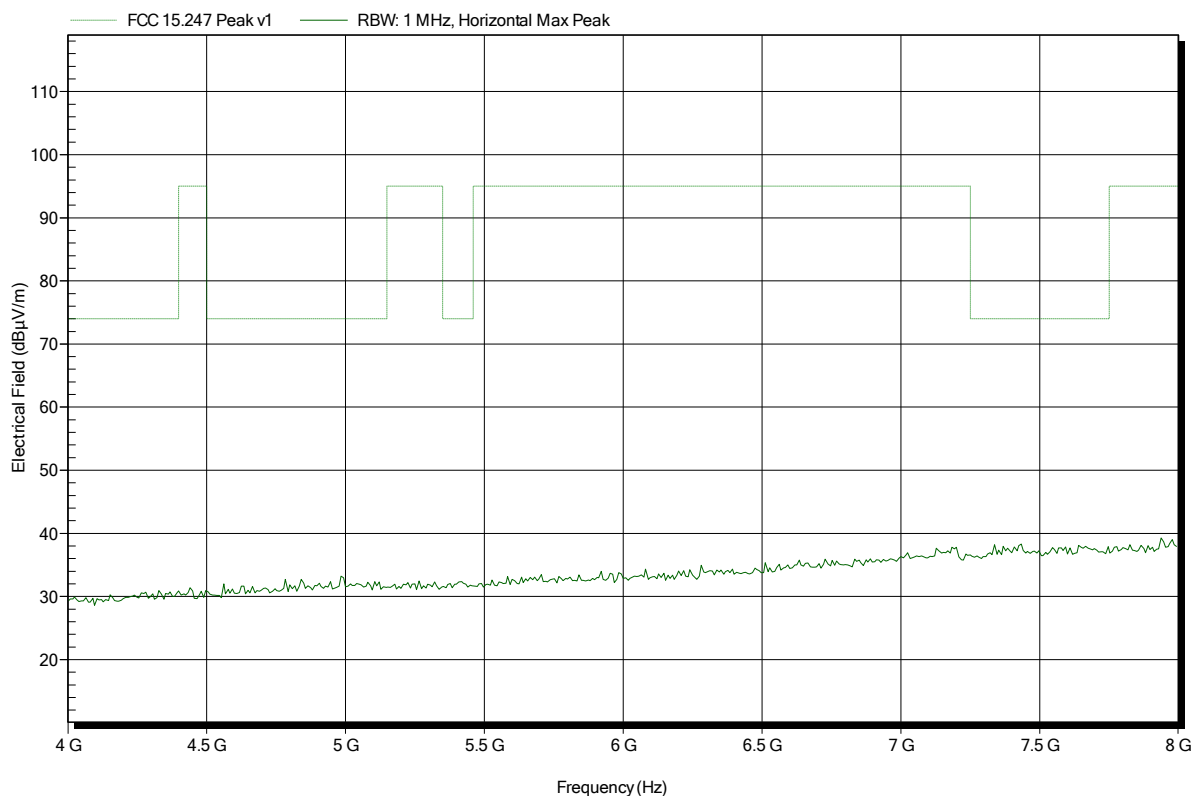


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant:	Leica Geosystems AG
EUT Name:	GNSS Receiver for Machine Control
Model:	iCG80
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 24 VDC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; 8DPSK; 3DH5; 2402 MHz
Test Date:	2015-02-23
Note:	

Index 68

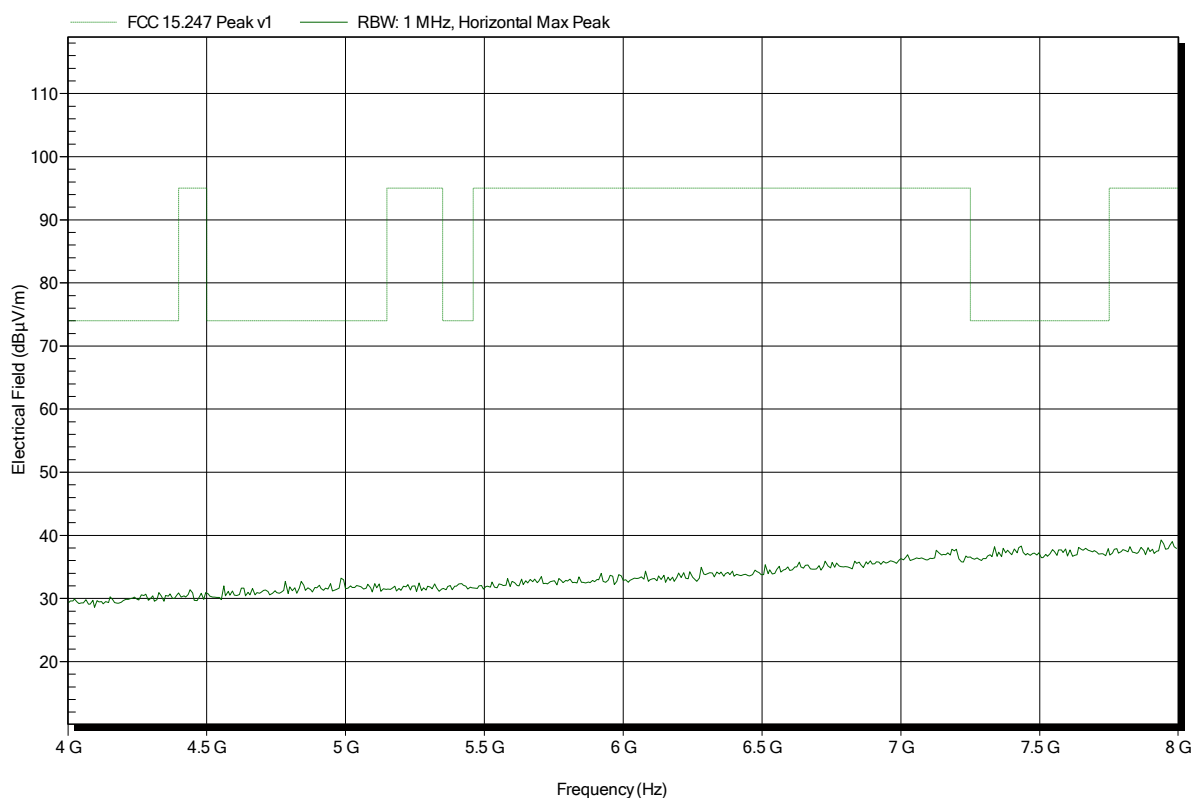

Test Report No.: G0M-1409-4119-TIC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; 8DPSK; 3DH5; 2441 MHz
 Test Date: 2015-02-20
 Note:

Index 57

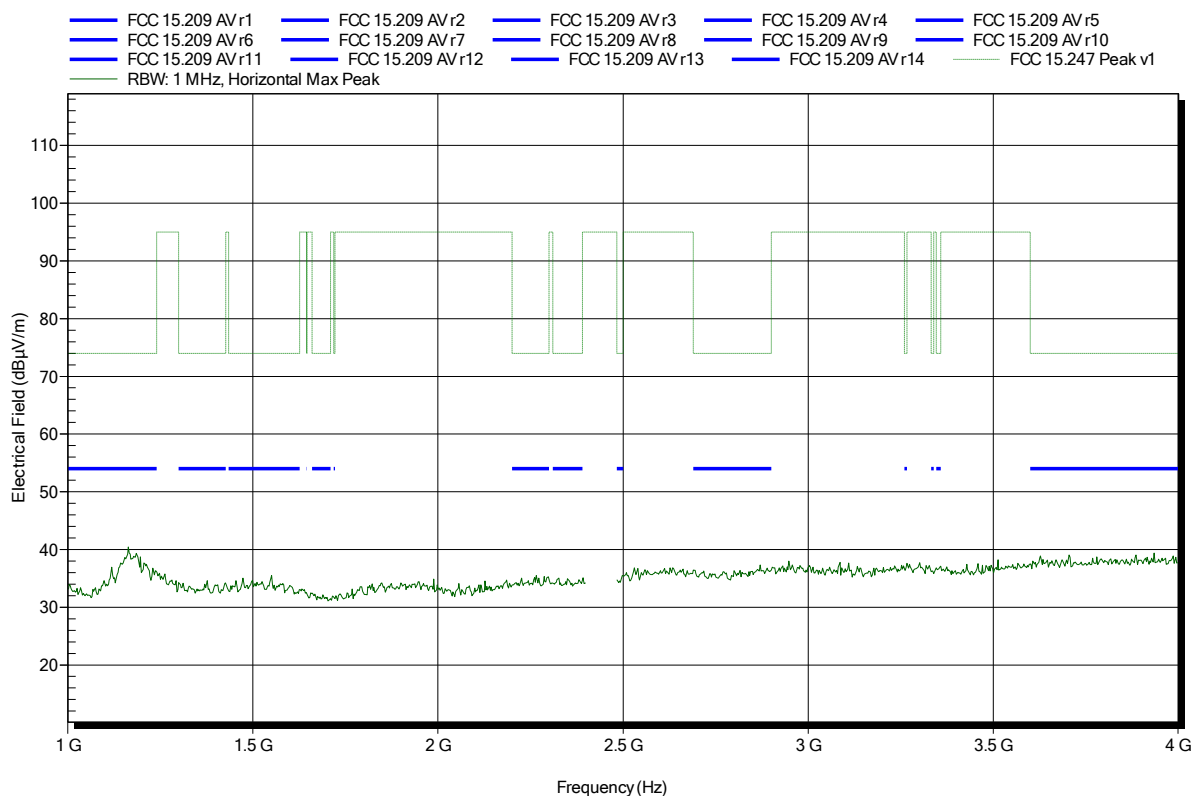


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; 8DPSK; 3DH5; 2441 MHz
 Test Date: 2015-02-20
 Note:

Index 58

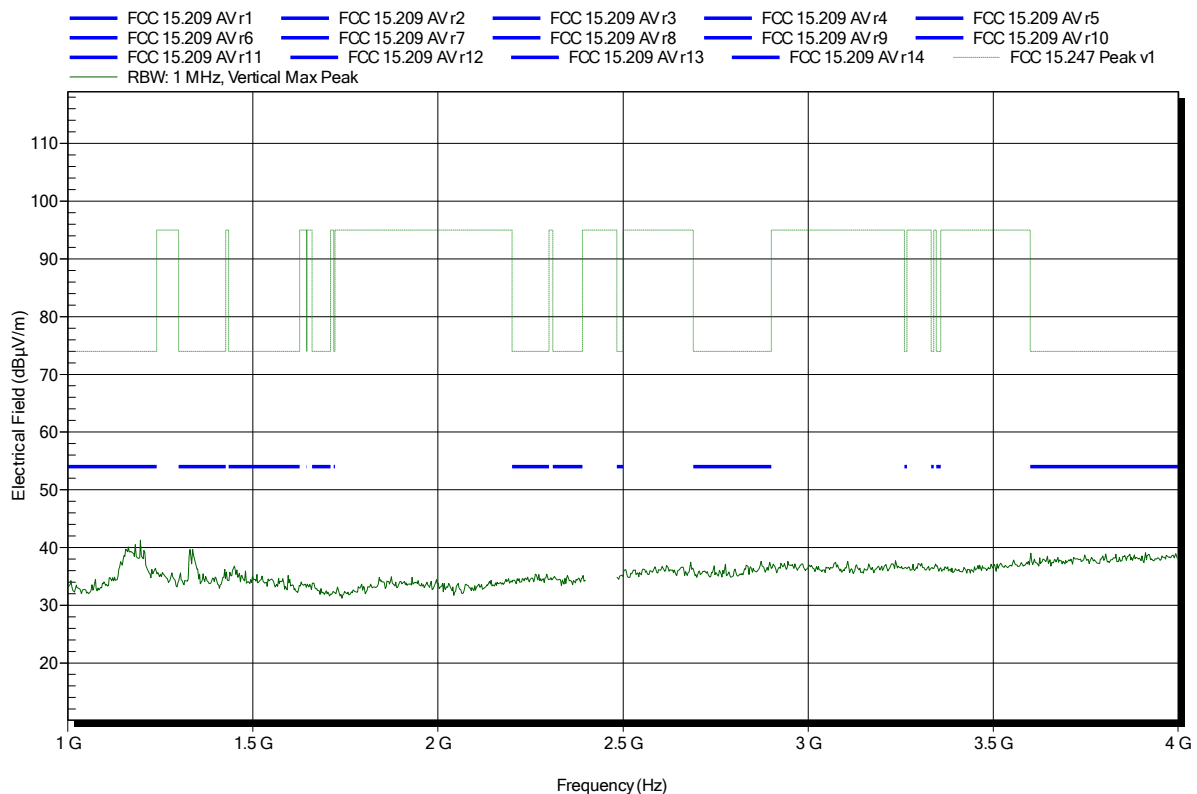


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant:	Leica Geosystems AG
EUT Name:	GNSS Receiver for Machine Control
Model:	iCG80
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 24 VDC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; 8DPSK; 3DH5; 2441 MHz
Test Date:	2015-02-23
Note:	

Index 66

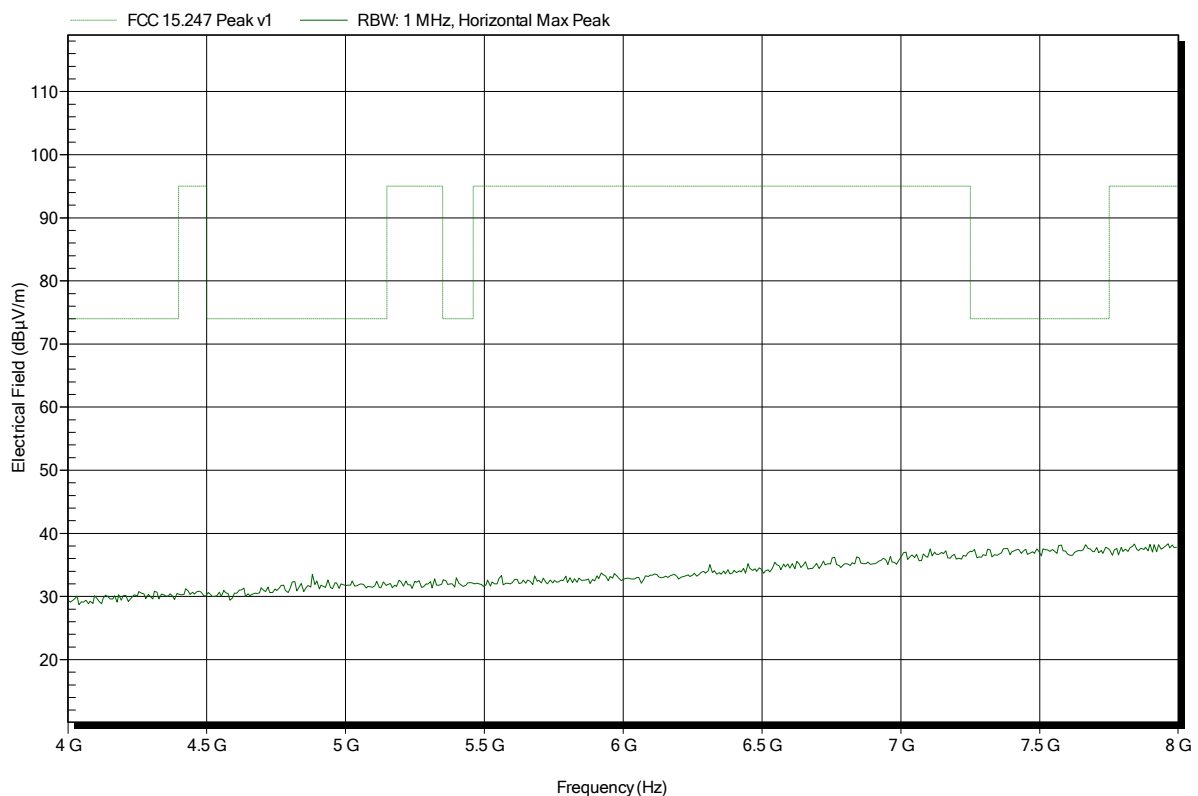


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant:	Leica Geosystems AG
EUT Name:	GNSS Receiver for Machine Control
Model:	iCG80
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 24 VDC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; 8DPSK; 3DH5; 2441 MHz
Test Date:	2015-02-23
Note:	

Index 65

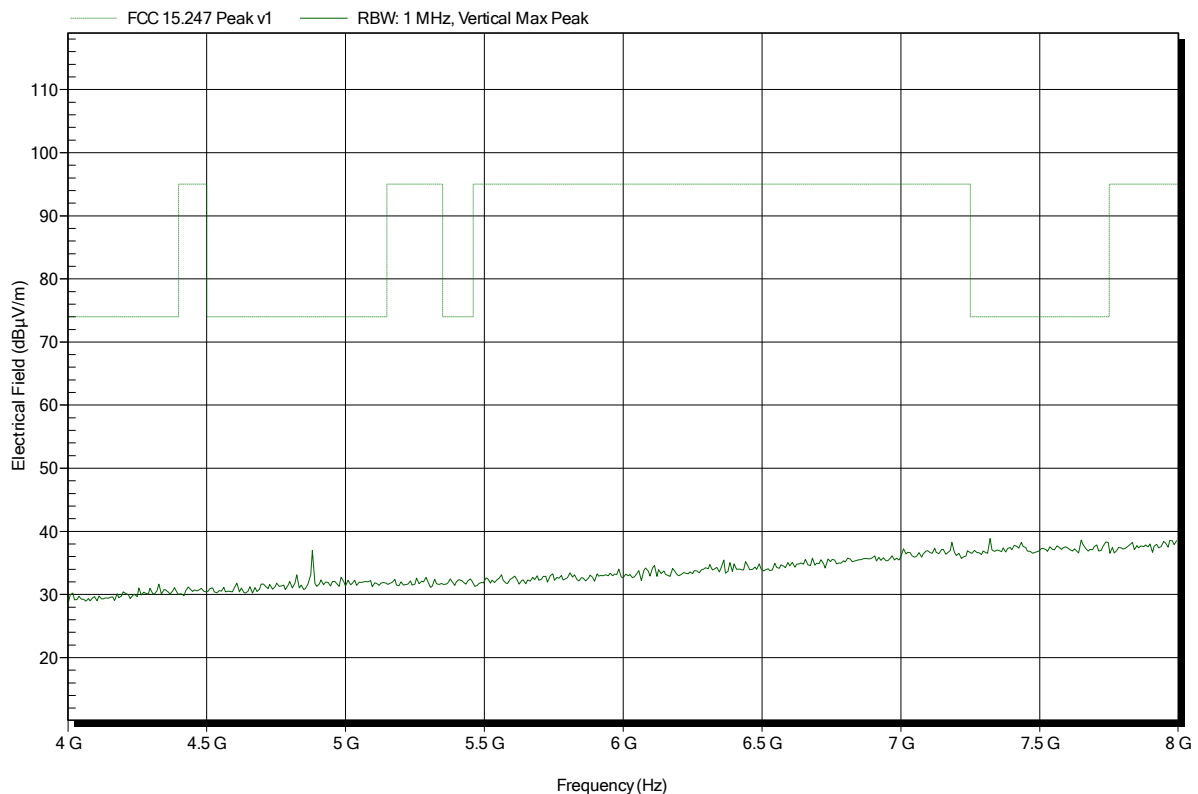


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; 8DPSK; 3DH5; 2480 MHz
 Test Date: 2015-02-20
 Note:

Index 59

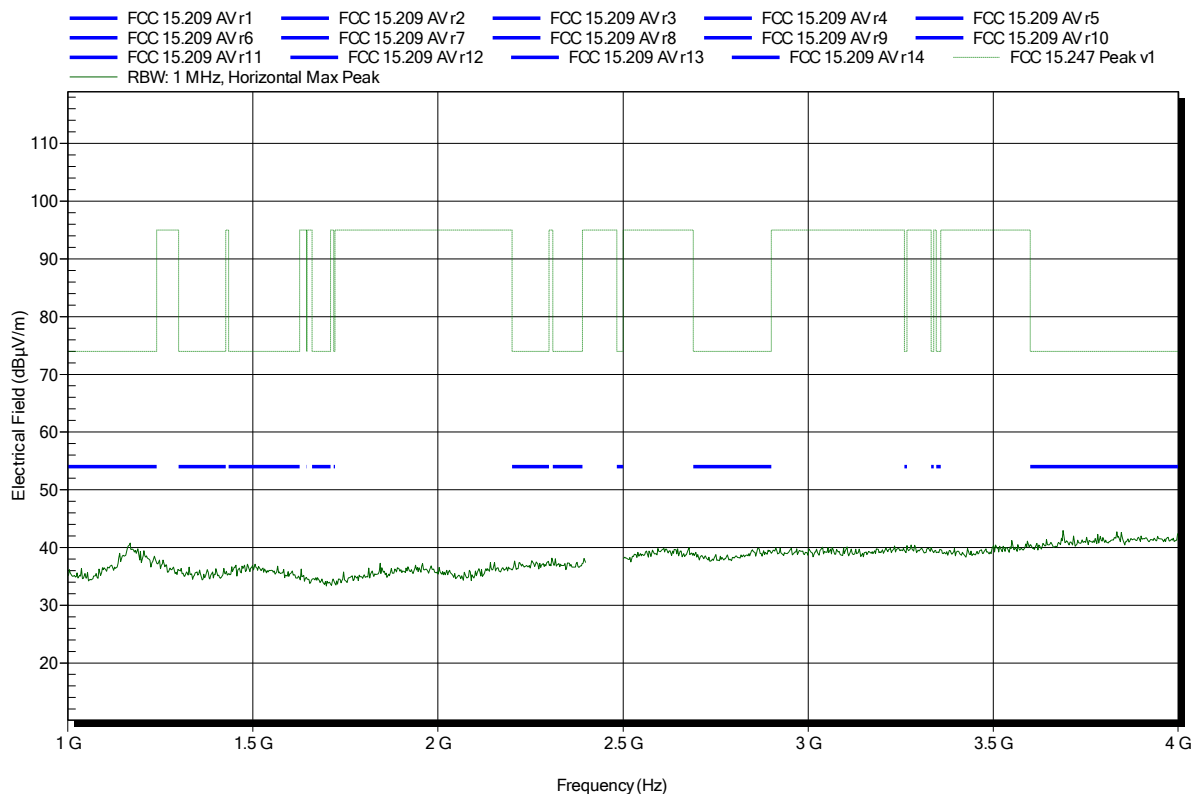


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; 8DPSK; 3DH5; 2480 MHz
 Test Date: 2015-02-20
 Note:

Index 61

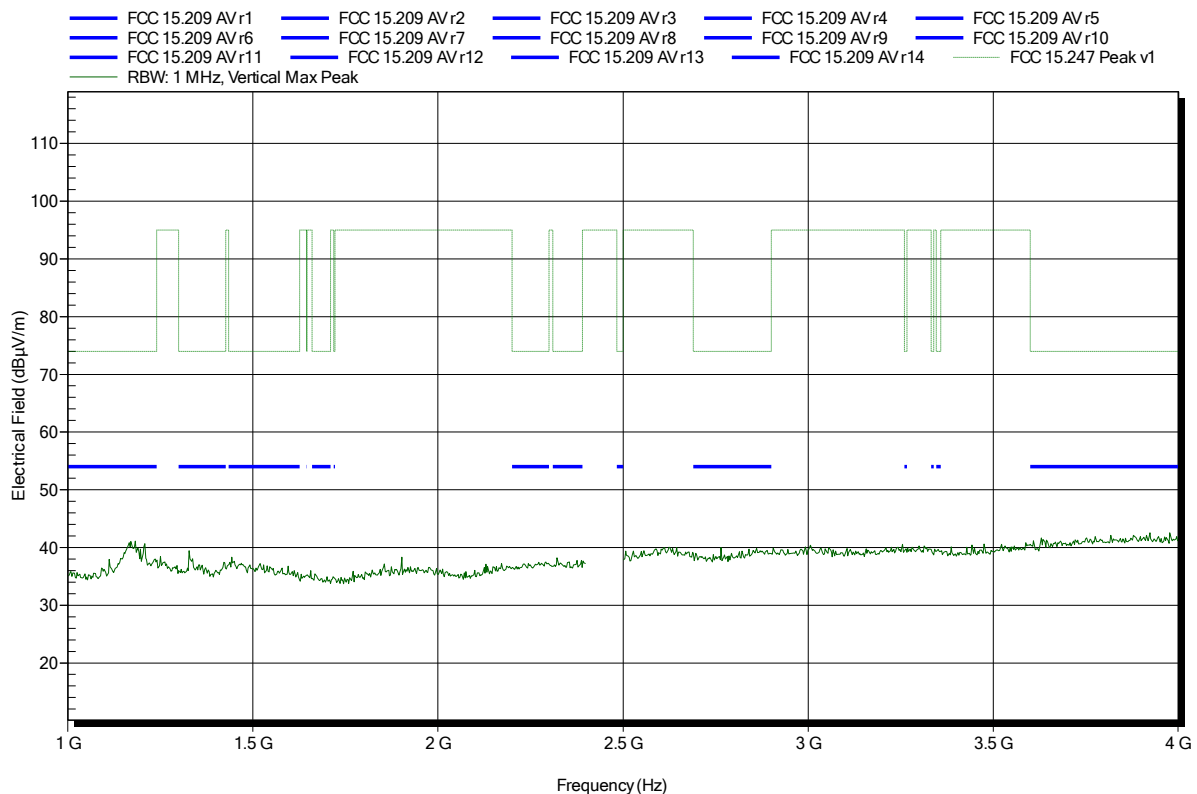


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; 8DPSK; 3DH5; 2480 MHz
 Test Date: 2015-02-20
 Note: upper bandedge

Index 60

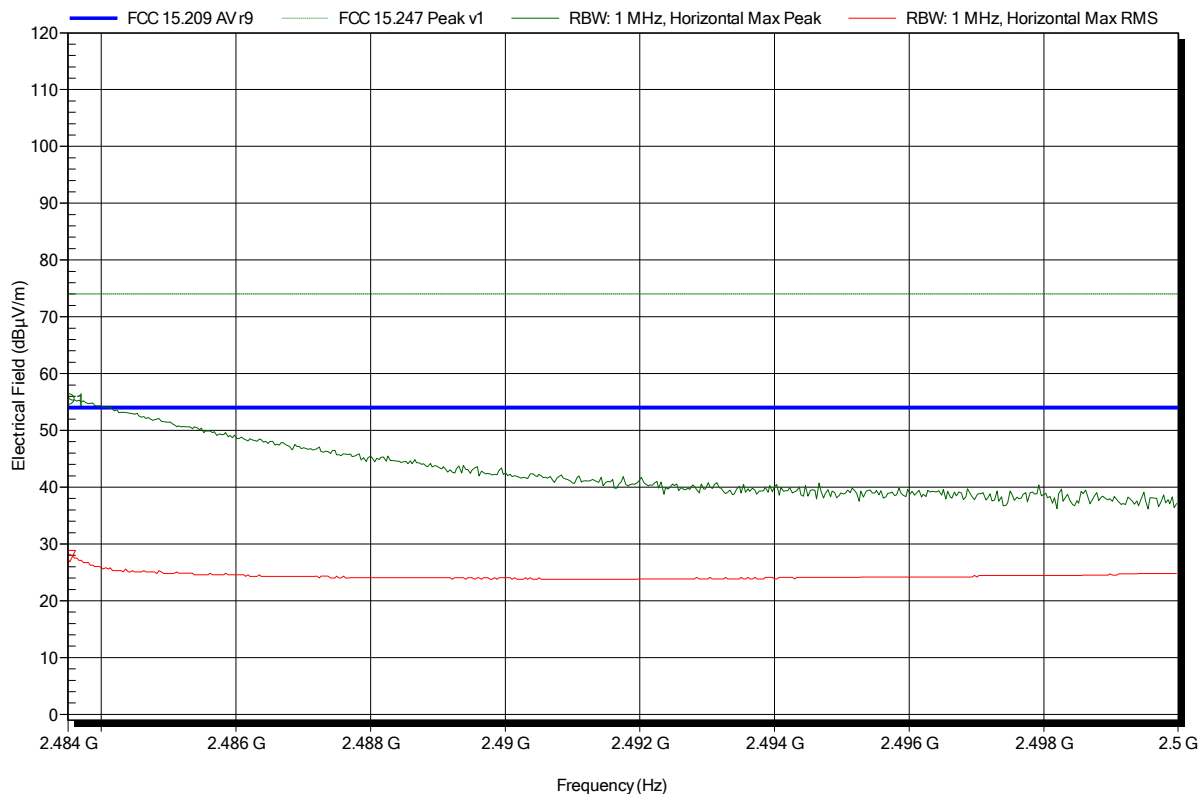


Frequency 2.4835 GHz	Peak 55.43 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -18.57 dB	Peak Status Pass
Frequency 2.4835 GHz	RMS 27.87 dBµV/m	RMS Limit 54 dBµV/m	RMS Difference -26.13 dB	RMS Status Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; 8DPSK; 3DH5; 2480 MHz
 Test Date: 2015-02-20
 Note: upper bandedge

Index 62

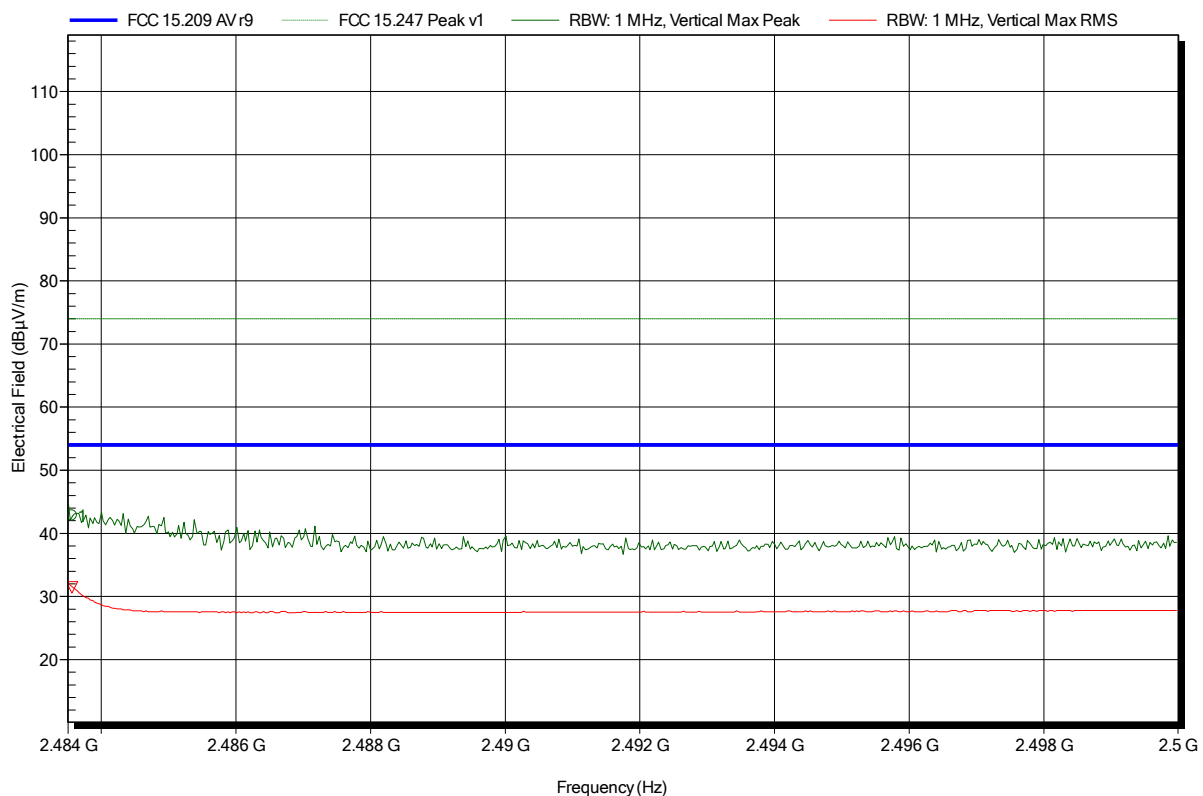

Frequency 2.4836 GHz	Peak 42.86 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -31.14 dB	Peak Status Pass
Frequency 2.4836 GHz	RMS 31.43 dBµV/m	RMS Limit 54 dBµV/m	RMS Difference -22.57 dB	RMS Status Pass

Test Report No.: G0M-1409-4119-TIC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 8DPSK; 3DH5; 2480 MHz
 Test Date: 2015-02-23
 Note:

Index 63

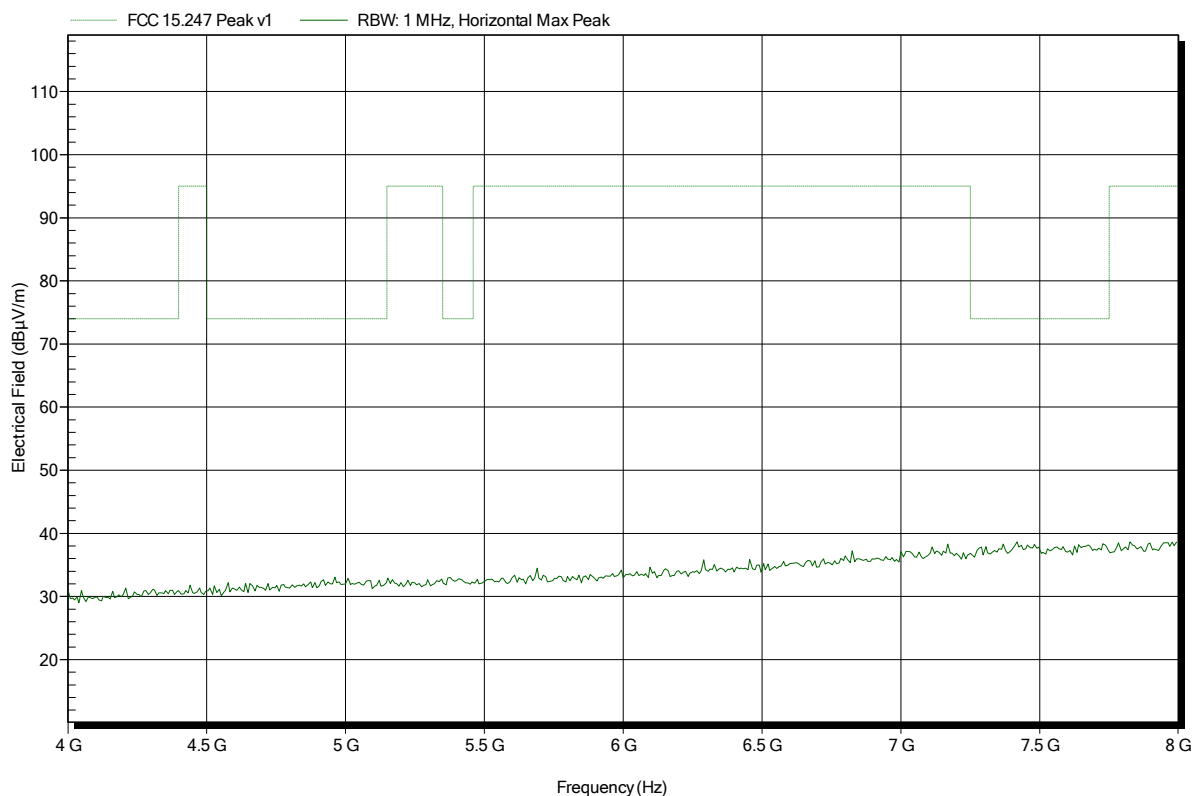


Spurious emissions according to FCC 15.247

Project number: G0M-1409-4119

Applicant:	Leica Geosystems AG
EUT Name:	GNSS Receiver for Machine Control
Model:	iCG80
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 24 VDC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; 8DPSK; 3DH5; 2480 MHz
Test Date:	2015-02-23
Note:	

Index 64

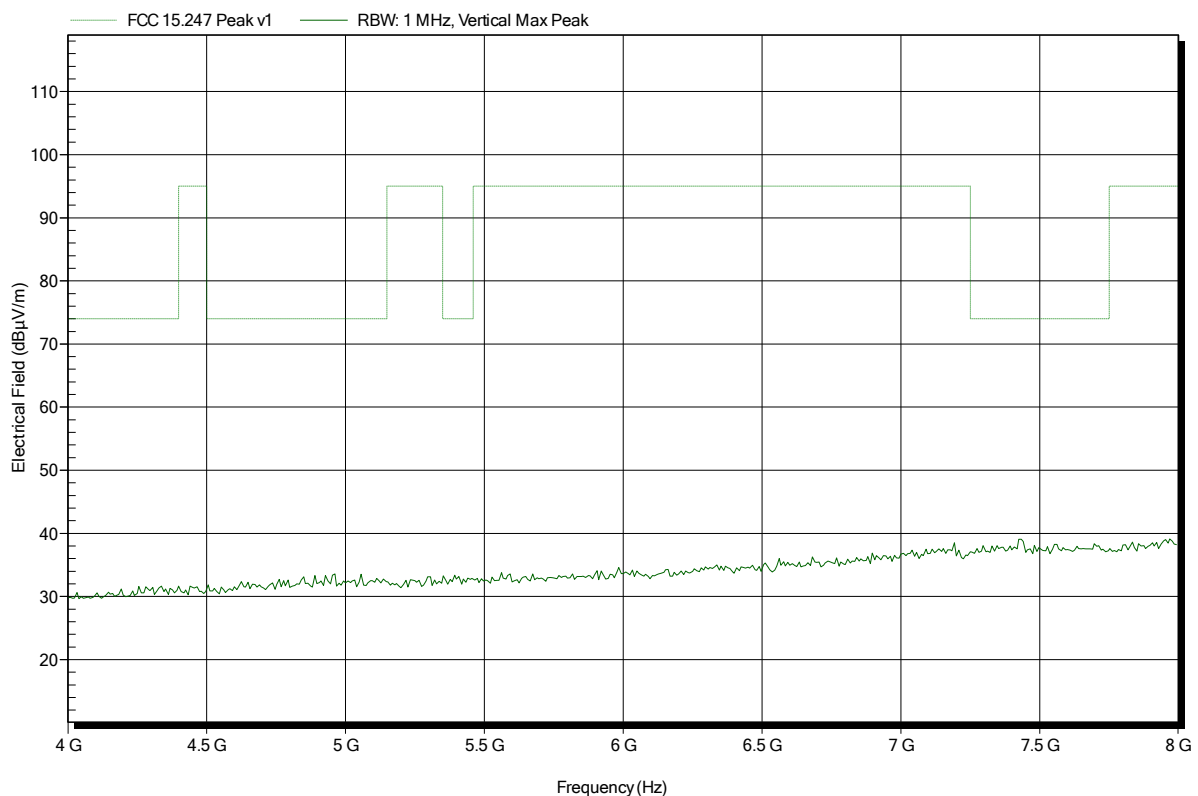


ANNEX B Receiver radiated spurious emissions

Spurious emissions according to RSS-GEN

Project number: G0M-1409-4119

Applicant:	Leica Geosystems AG
EUT Name:	GNSS Receiver for Machine Control
Model:	iCG80
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 24 VDC
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3 m
Mode:	RX; 2441 MHz
Test Date:	2015-02-23
Note:	

Index 75

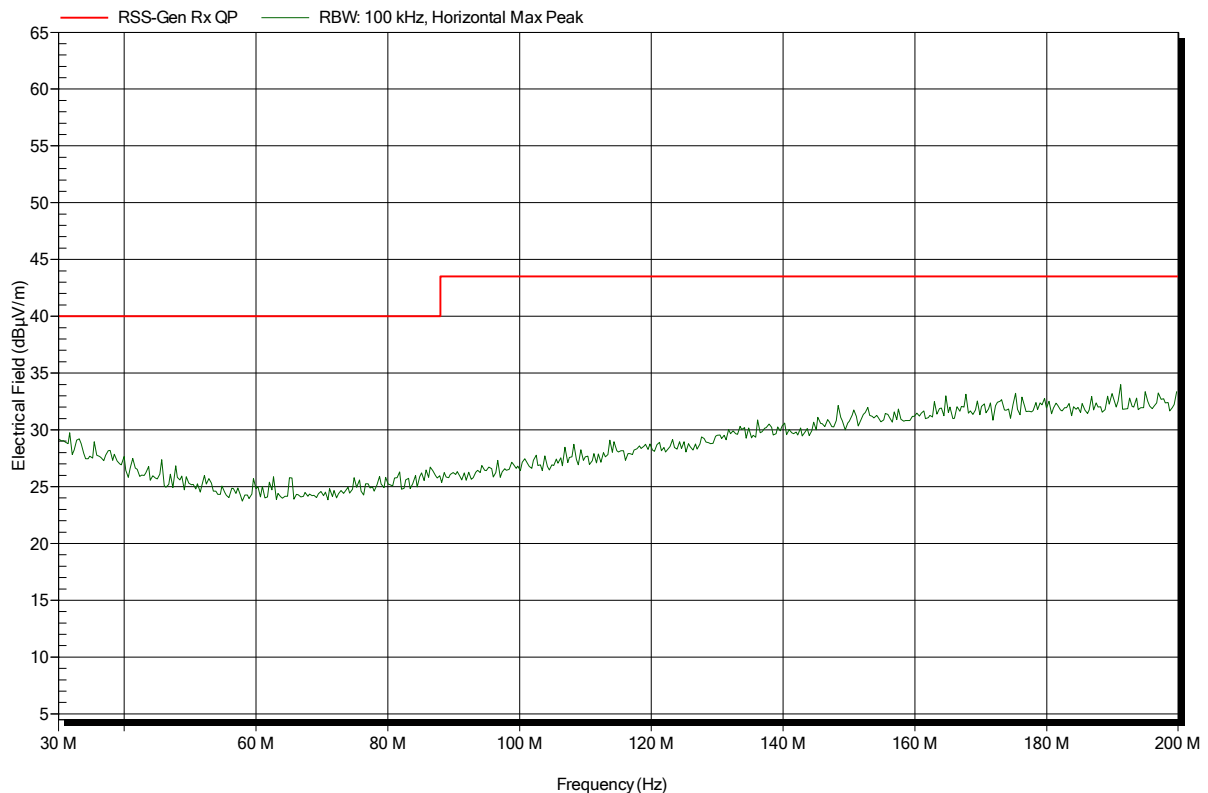


Spurious emissions according to RSS-GEN

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: RX; 2441 MHz
 Test Date: 2015-02-23
 Note:

Index 76

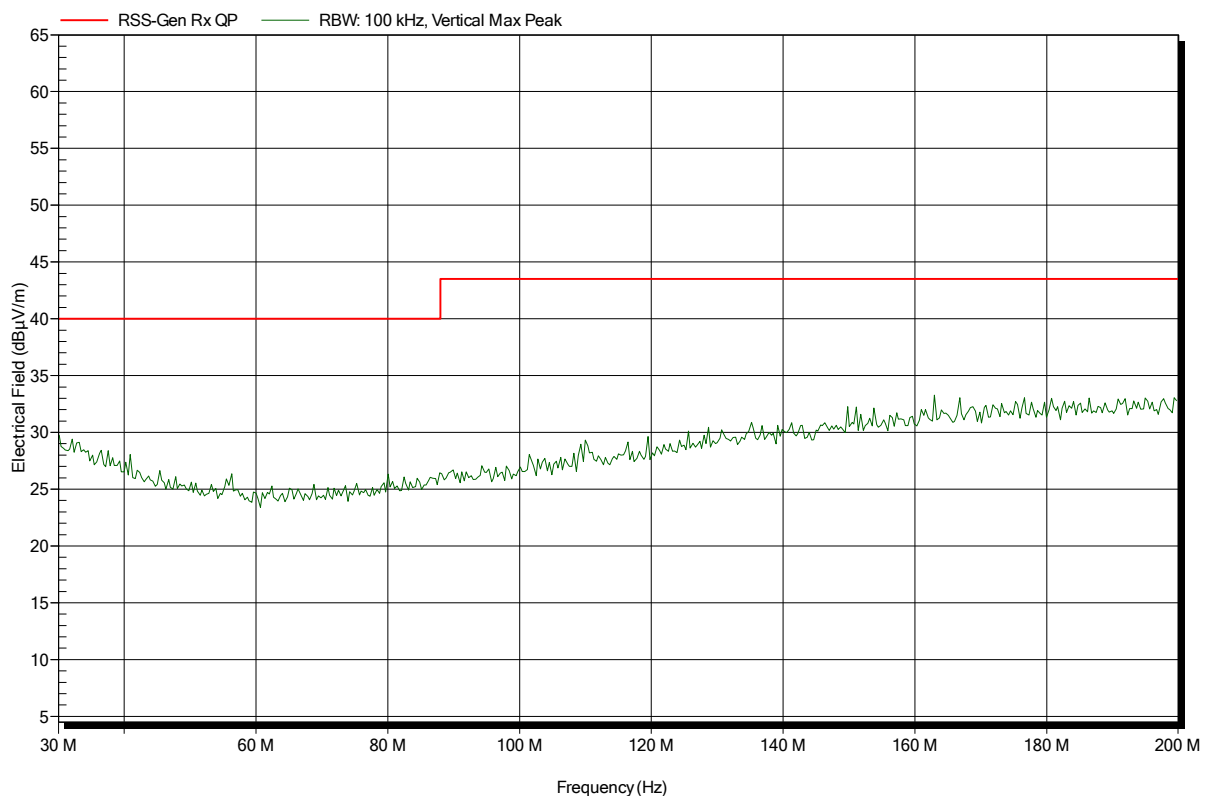


Spurious emissions according to RSS-GEN

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: RX; 2441 MHz
 Test Date: 2015-02-23
 Note:

Index 72

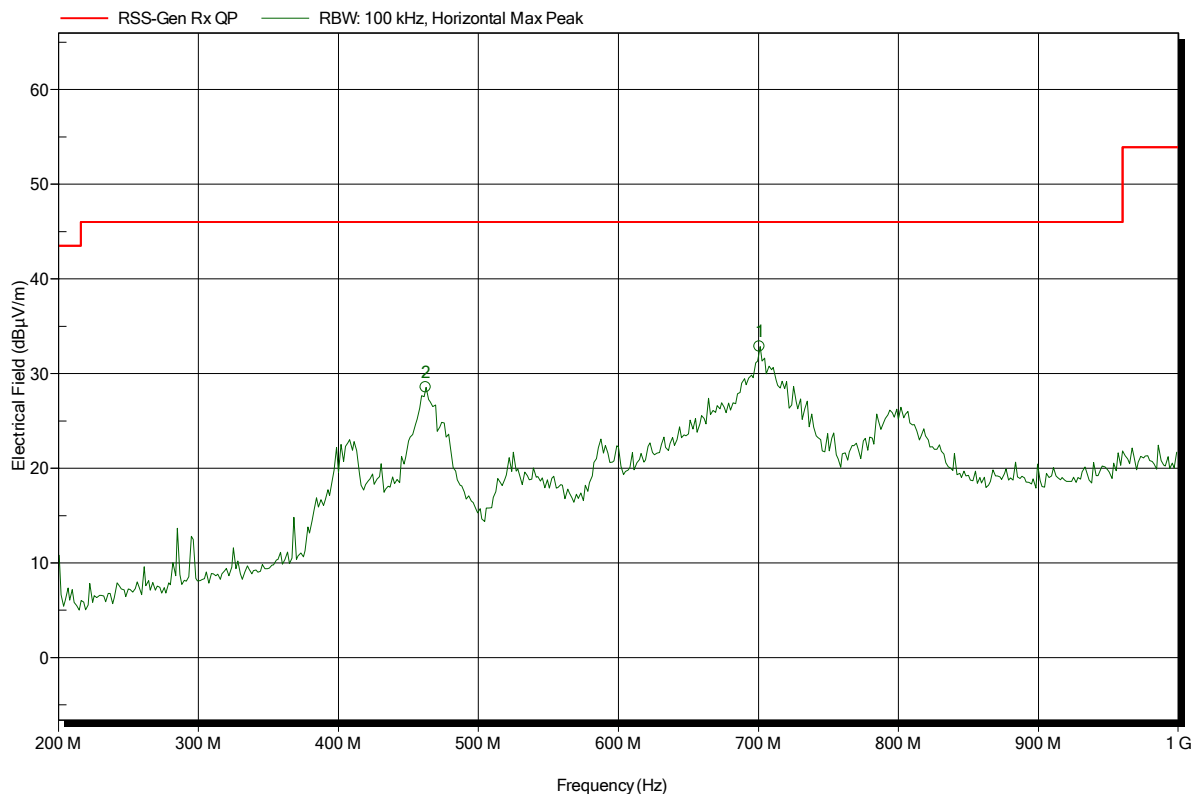


Frequency	Peak	Peak Limit	Peak Difference	Status
462.4 MHz	28.55 dBµV/m	46 dBµV/m	-17.45 dB	Pass
700.8 MHz	32.87 dBµV/m	46 dBµV/m	-13.13 dB	Pass

Spurious emissions according to RSS-GEN

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: RX; 2441 MHz
 Test Date: 2015-02-23
 Note:

Index 74

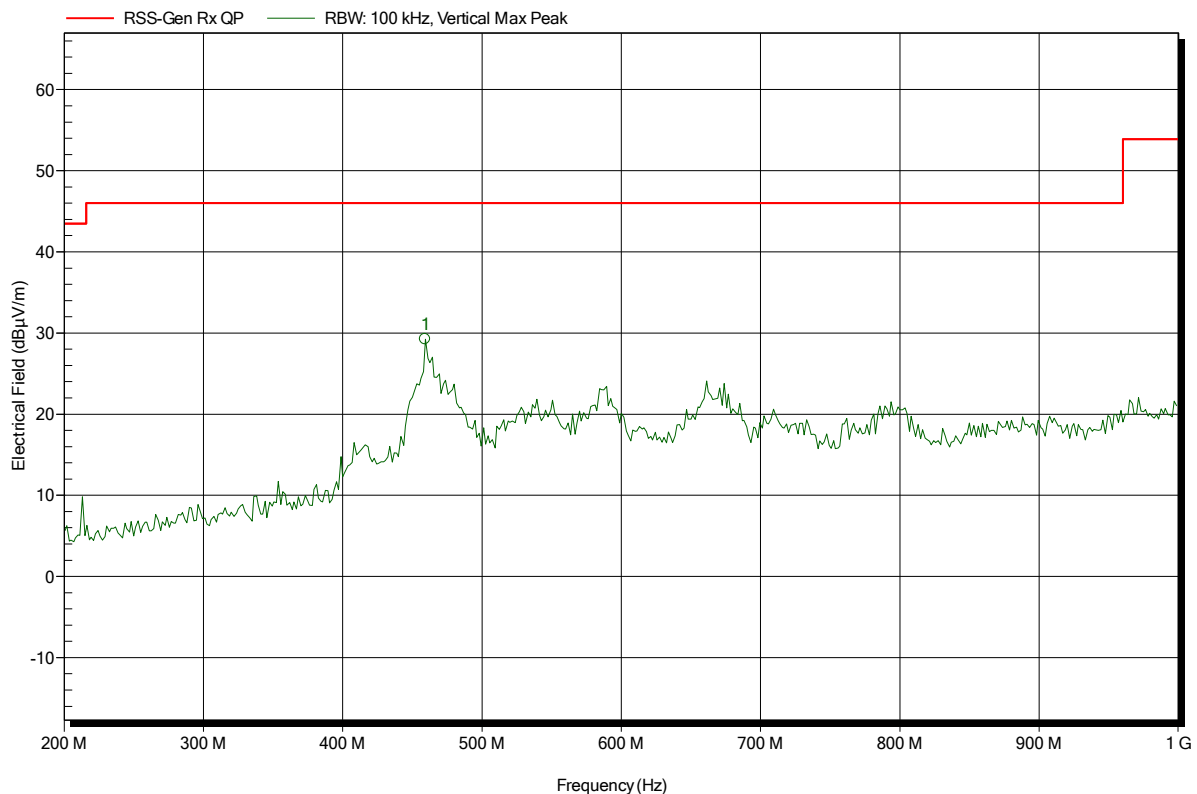

Frequency	Peak	Peak Limit	Peak Difference	Status
459.2 MHz	29.25 dBµV/m	46 dBµV/m	-16.75 dB	Pass

Test Report No.: G0M-1409-4119-TIC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to RSS-GEN

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: RX; 2441 MHz
 Test Date: 2015-02-23
 Note:

Index 68

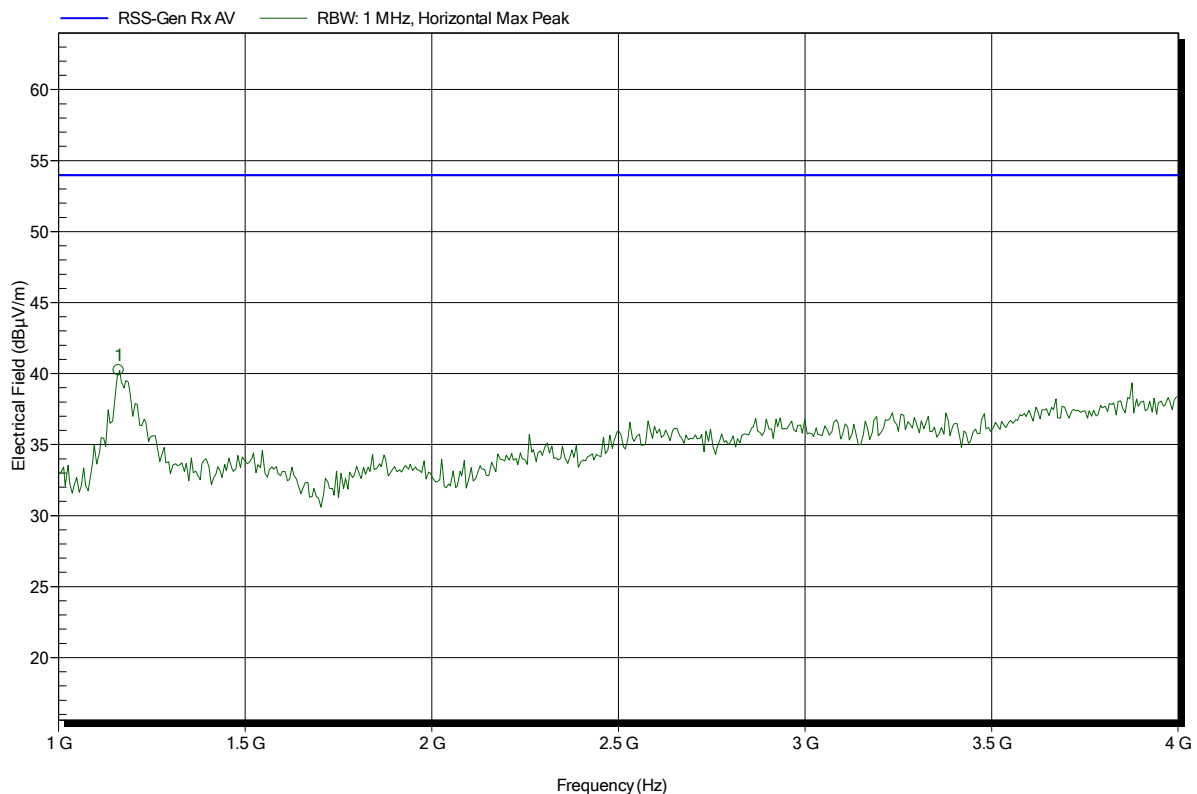


Frequency	Peak	Peak Limit	Peak Difference	Status
1.162 GHz	40.23 dBµV/m	53.98 dBµV/m	-13.75 dB	Pass

Spurious emissions according to RSS-GEN

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: RX; 2441 MHz
 Test Date: 2015-02-23
 Note:

Index 70

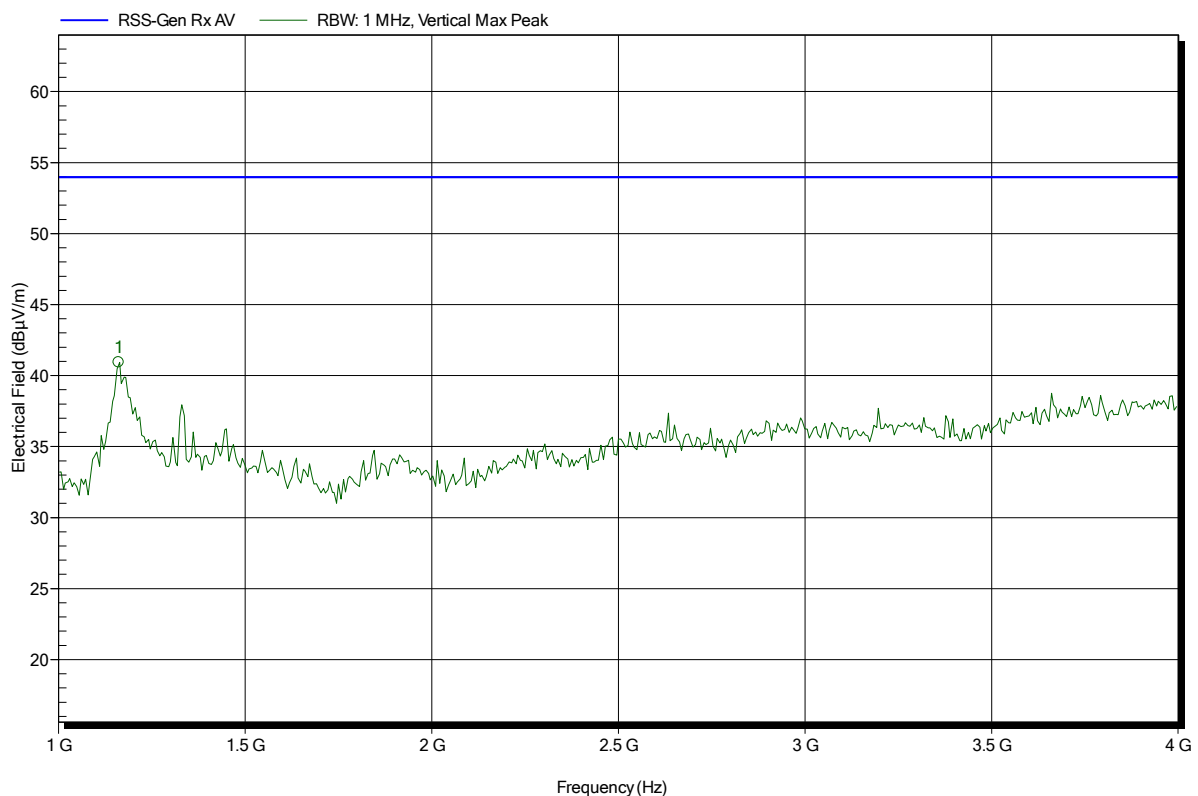


Frequency	Peak	Peak Limit	Peak Difference	Status
1.162 GHz	40.94 dBµV/m	53.98 dBµV/m	-13.04 dB	Pass

Spurious emissions according to RSS-GEN

Project number: G0M-1409-4119

Applicant:	Leica Geosystems AG
EUT Name:	GNSS Receiver for Machine Control
Model:	iCG80
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 24 VDC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	RX; 2441 MHz
Test Date:	2015-02-23
Note:	

Index 69

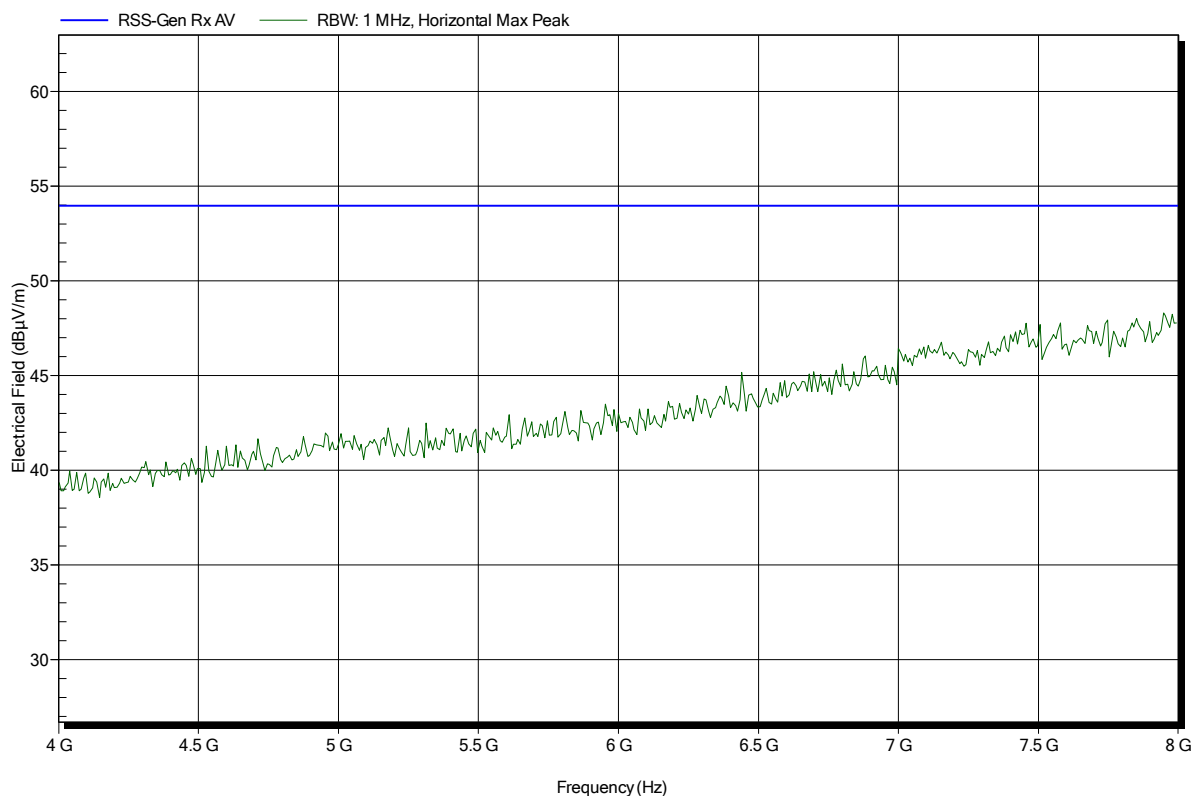

Spurious emissions according to RSS-GEN

Project number: G0M-1409-4119

Applicant: Leica Geosystems AG
 EUT Name: GNSS Receiver for Machine Control
 Model: iCG80
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: Tnom: 25°C, Vnom: 24 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: RX; 2441 MHz
 Test Date: 2015-02-23
 Note:

Index 71

