

TEST REPORT

Test report no.: 1-7616/18-01-02



Testing laboratory

CTC advanced GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.ctcadvanced.com>

e-mail: mail@ctcadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-03

Applicant

Treon Oy

Visiokatu 3

FI-33720 Tampere / FINLAND

Phone: -/-

Contact: Rami Koskinen

e-mail: rami.koskinen@treon.fi

Phone: +358 5 03 08 25 98

Manufacturer

Treon Oy

Visiokatu 3

FI-33720 Tampere / FINLAND

Test standard/s

FCC - Title 47 CFR
Part 15

FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 210 Issue 9

Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment

RSS - Gen Issue 5

Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: IoT device

Model name: Treon Gateway

FCC ID: 2AR86GW11

IC: 24716-GW11

Frequency: DTS band 2400 MHz to 2483.5 MHz

Technology tested: WLAN

Antenna: Integrated antenna

Power supply: 5 V DC / 115 V AC by mains adapter GTM96180-1807-2.0

Temperature range: 0°C to +50°C



This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:



Andreas Luckenbill
Lab Manager
Radio Communications & EMC

Test performed:



Marco Bertolino
Lab Manager
Radio Communications & EMC

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
2.3	Test laboratories sub-contracted	3
3	Test standard/s and references	4
4	Test environment	5
5	Test item	5
5.1	General description	5
5.2	Additional information	5
6	Description of the test setup	6
6.1	Shielded semi anechoic chamber	7
6.2	Shielded fully anechoic chamber	8
6.3	Radiated measurements > 18 GHz	9
6.4	AC conducted	10
6.5	Conducted measurements with peak power meter & spectrum analyzer	11
7	Sequence of testing	12
7.1	Sequence of testing radiated spurious 9 kHz to 30 MHz	12
7.2	Sequence of testing radiated spurious 30 MHz to 1 GHz	13
7.3	Sequence of testing radiated spurious 1 GHz to 18 GHz	14
7.4	Sequence of testing radiated spurious above 18 GHz	15
8	Measurement uncertainty	16
9	Summary of measurement results	17
10	Additional comments	18
11	Additional EUT parameter	19
12	Measurement results	20
12.1	Antenna gain	20
12.2	Identify worst case data rate	23
12.3	Maximum output power	24
12.4	Duty cycle	25
12.5	Peak power spectral density	34
12.6	6 dB DTS bandwidth	43
12.7	Occupied bandwidth – 99% emission bandwidth	52
12.8	Occupied bandwidth – 20 dB bandwidth	61
12.9	Band edge compliance conducted	70
12.10	Spurious emissions conducted	76
12.11	Spurious emissions radiated below 30 MHz	91
12.12	Spurious emissions radiated 30 MHz to 1 GHz	98
12.13	Spurious emissions radiated above 1 GHz	109
12.14	Spurious emissions conducted below 30 MHz (AC conducted)	122
13	Observations	124
Annex A	Glossary	125
Annex B	Document history	126
Annex C	Accreditation Certificate	126

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2018-11-26
Date of receipt of test item:	2019-01-28
Start of test:	2019-01-29
End of test:	2019-02-01
Person(s) present during the test:	-/-

2.3 Test laboratories sub-contracted

None

3 Test standard/s and references

Test standard	Date	Description
FCC - Title 47 CFR Part 15	-/-	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 210 Issue 9	August 2016	Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment
RSS - Gen Issue 5	April 2018	Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus

Guidance	Version	Description
DTS: KDB 558074 D01	v05	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
ANSI C63.4-2014	-/-	American national standard for methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American national standard of procedures for compliance testing of unlicensed wireless devices

4 Test environment

Temperature	:	T_{nom} T_{max} T_{min}	+22 °C during room temperature tests No tests under extreme temperature conditions required. No tests under extreme temperature conditions required.
Relative humidity content	:		38 %
Barometric pressure	:		1008 hpa
Power supply	:	V_{nom} V_{max} V_{min}	5 V DC / 115 V AC by mains adapter GTM96180-1807-2.0 No tests under extreme voltage conditions required. No tests under extreme voltage conditions required.

5 Test item

5.1 General description

Kind of test item	:	IoT device
Type identification	:	Treon Gateway
HMN	:	-/-
PMN	:	Treon Gateway
HVIN	:	1111
FVIN	:	-/-
S/N serial number	:	Radiated unit: 00000000 407c097f Conducted unit: 00000000 ffc0509c
Hardware status	:	-/-
Software status	:	-/-
Firmware status	:	-/-
Frequency band	:	DTS band 2400 MHz to 2483.5 MHz
Type of radio transmission	:	DSSS, OFDM
Use of frequency spectrum	:	
Type of modulation	:	(D)BPSK, (D)QPSK, 16 – QAM, 64 – QAM
Number of channels	:	11 with 20 MHz 9 with 40 MHz
Antenna	:	Integrated antenna
Power supply	:	5 V DC / 115 V AC by mains adapter GTM96180-1807-2.0
Temperature range	:	0°C to +50°C

5.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

- 1-7616/18-01-02_AnnexA
- 1-7616/18-01-02_AnnexB
- 1-7616/18-01-02_AnnexD

6 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

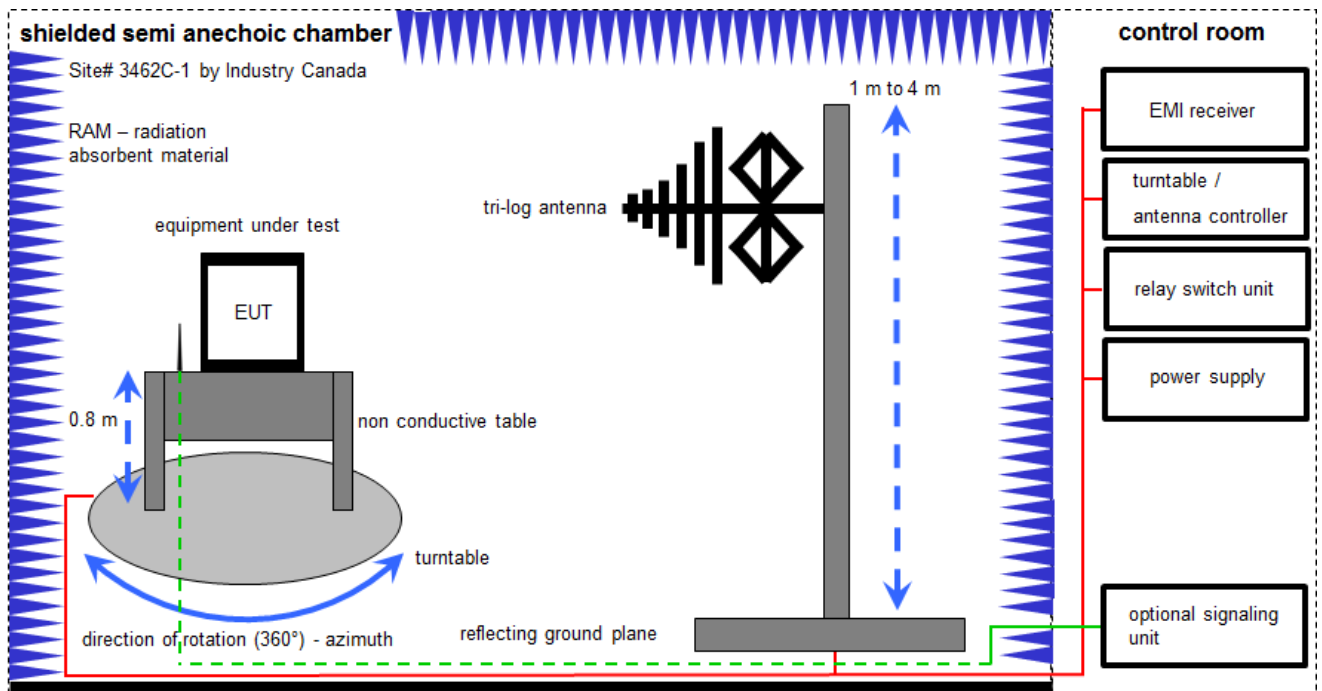
In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

6.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.



Measurement distance: tri-log antenna 10 meter
 EMC32 software version: 10.30.0

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

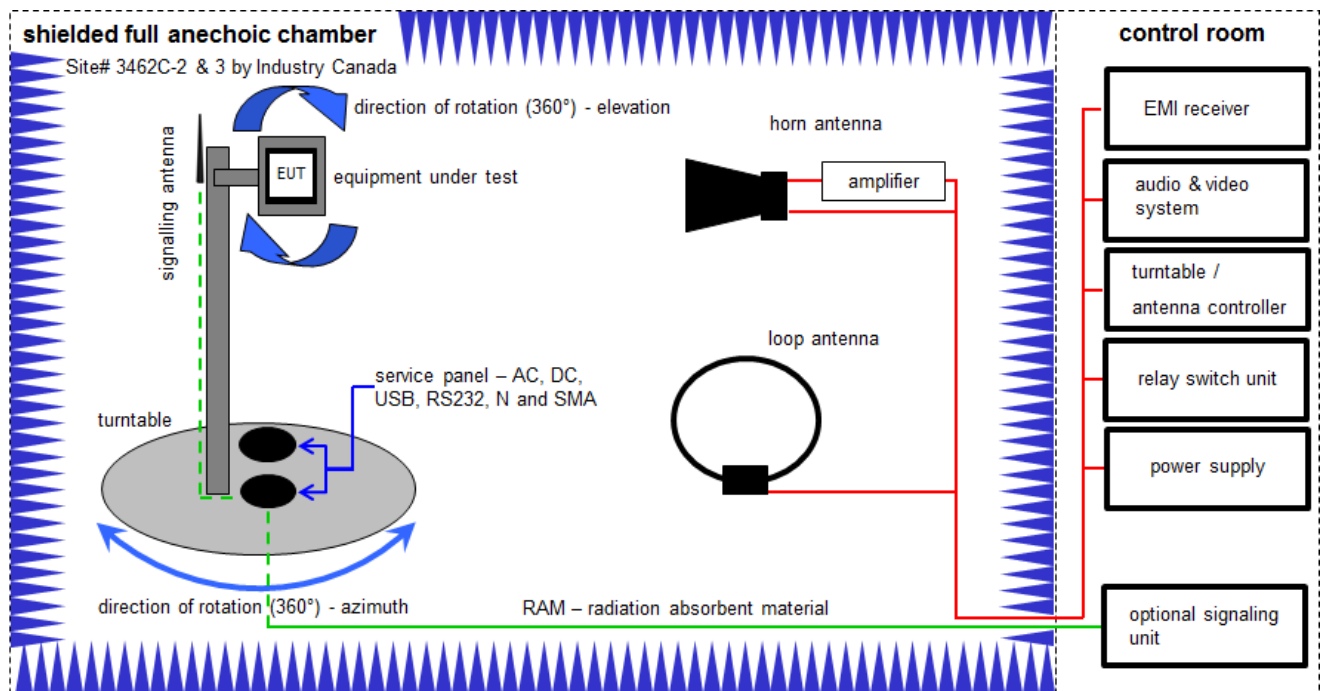
Example calculation:

$$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	Meßkabine 1	HF-Absorberhalle	MWB AG 300023	-/-	300000551	ne	-/-	-/-
3	A	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	12.12.2018	11.12.2019
4	A	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	vKI!	15.01.2018	14.01.2020
5	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
6	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
7	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
8	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	371	300003854	vKI!	24.11.2017	23.11.2020

6.2 Shielded fully anechoic chamber



Measurement distance: horn antenna 3 meter; loop antenna 3 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

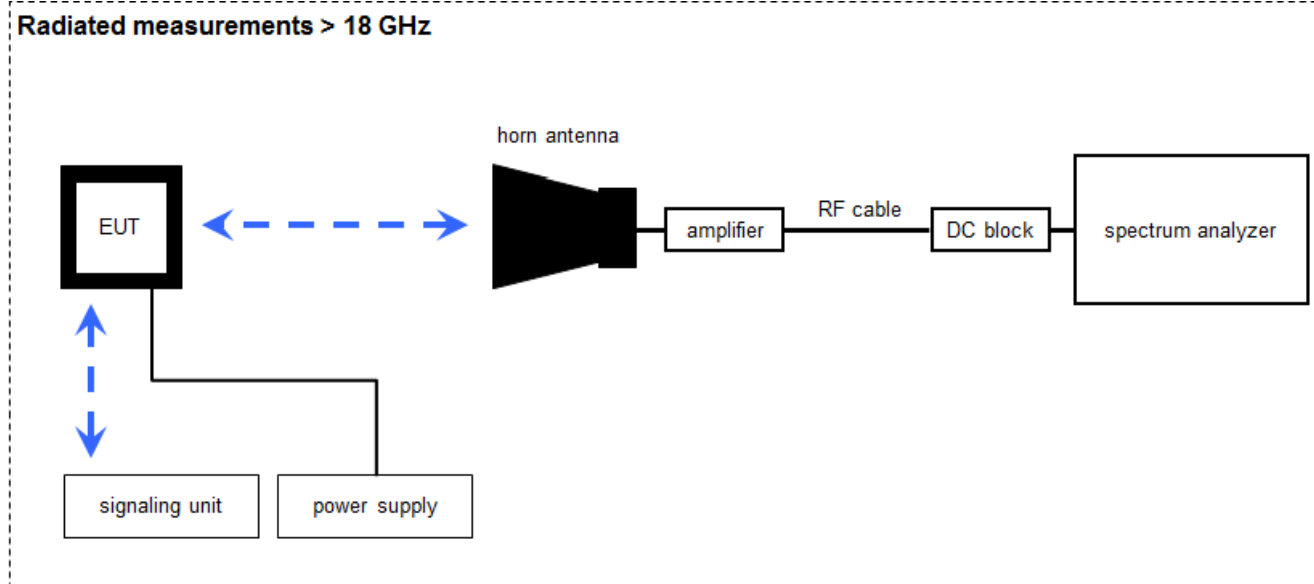
Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-35.8) \text{ [dB]} + 32.9 \text{ [dB/m]} = 37.1 \text{ [dB}\mu\text{V/m]} \text{ (71.61 } \mu\text{V/m)}$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	vIKI!	07.07.2017	06.07.2019
2	A, B, C	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev	-/-	-/-
3	B, C	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9107-3697	300001605	vIKI!	14.02.2017	13.02.2019
4	A, B, C	Switch / Control Unit	3488A	HP	*	300000199	ne	-/-	-/-
5	A, B, C	Variable isolating transformer	MPL IEC625 Bus Variable isolating transformer	Erft	91350	300001155	ne	-/-	-/-
6	B	Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev	-/-	-/-
7	A, B, C	EMI Test Receiver 20Hz- 26,5GHz	ESU26	R&S	100037	300003555	k	14.09.2018	13.12.2019
8	B, C	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev	-/-	-/-
9	B, C	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	19	300003790	ne	-/-	-/-
10	B, C	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22049	300004481	ev	-/-	-/-
11	B, C	Broadband Amplifier 5-13 GHz	CBLU5135235	CERNEX	22010	300004491	ev	-/-	-/-
12	A, B, C	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne	-/-	-/-
13	A, B, C	NEXIO EMV-Software	BAT EMC V3.16.0.49	EMCO	-/-	300004682	ne	-/-	-/-
14	A, B, C	PC	ExOne	F+W	-/-	300004703	ne	-/-	-/-

6.3 Radiated measurements > 18 GHz



Measurement distance: horn antenna 50 cm

$FS = UR + CA + AF$

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

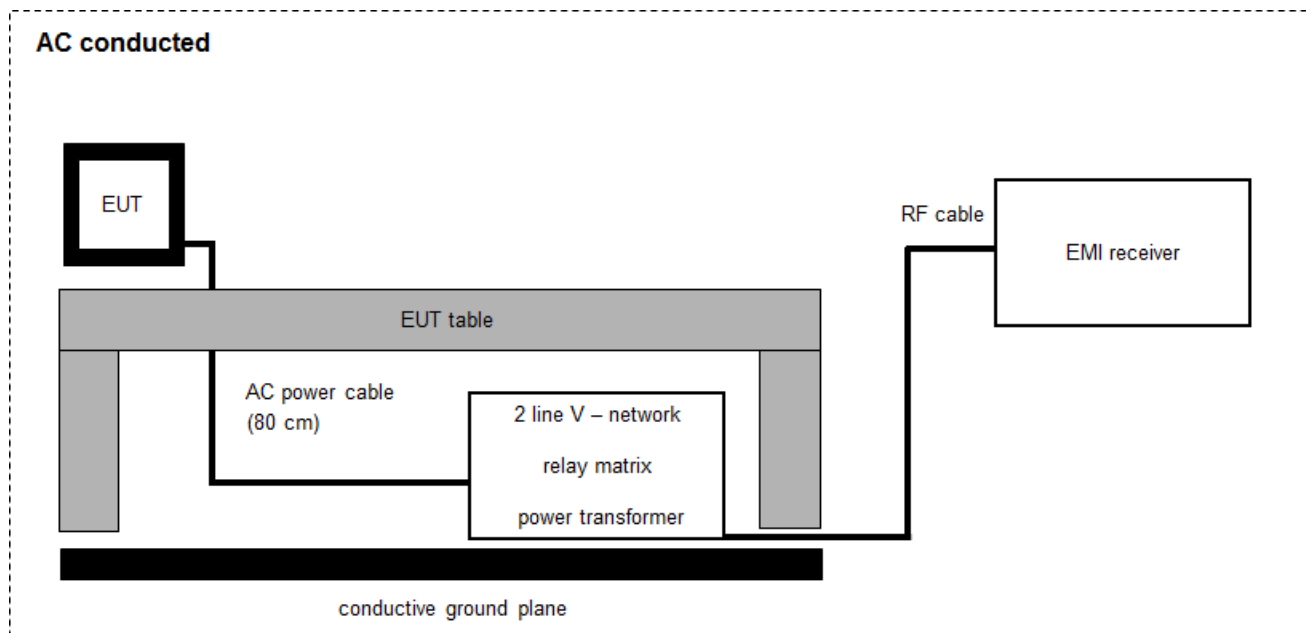
Example calculation:

$FS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-60.1) \text{ [dB]} + 36.74 \text{ [dB/m]} = 16.64 \text{ [dB}\mu\text{V/m]} \text{ (} 6.79 \text{ }\mu\text{V/m)}$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP	00419	300002268	ev	-/-	-/-
2	A	Std. Gain Horn Antenna 18.0-26.5 GHz	638	Narda	01096	300000486	vIKI!	13.12.2017	12.12.2019
3	A	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	17.12.2018	16.12.2019
4	A	RF-Cable	ST18/SMAM/SMAM/48	Huber & Suhner	Batch no. 600918	400001182	ev	-/-	-/-
5	A	RF-Cable	ST18/SMAM/SMAM/48	Huber & Suhner	Batch no. 127377	400001183	ev	-/-	-/-
6	A	DC-Blocker	WA7046	Weinschel Associates	-/-	400001310	ev	-/-	-/-
7	A	Isolating Transformer	RT5A	Grundig	12780	300001166	ev	-/-	-/-

6.4 AC conducted



$$FS = UR + CF + VC$$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

Example calculation:

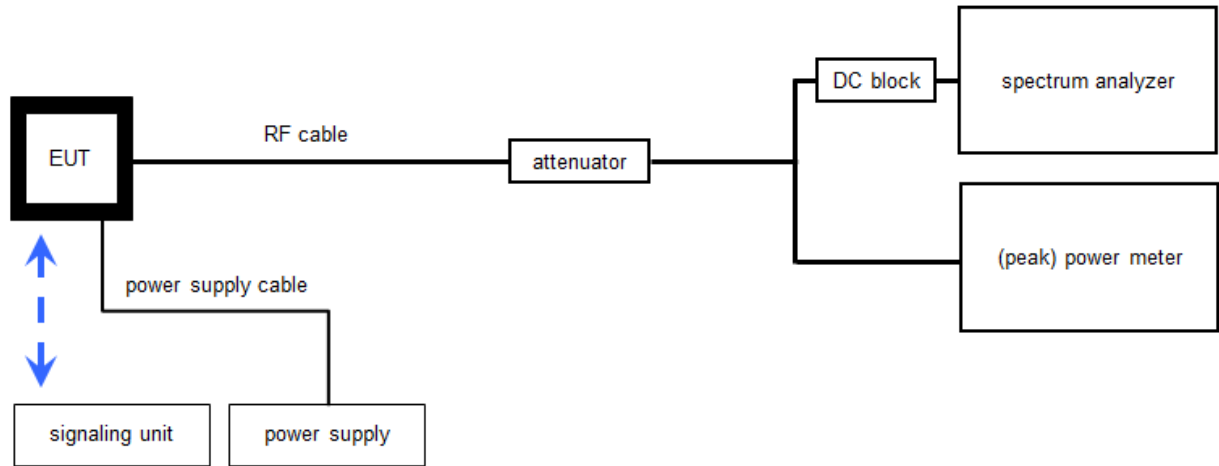
$$FS [dB\mu V/m] = 37.62 [dB\mu V/m] + 9.90 [dB] + 0.23 [dB] = 47.75 [dB\mu V/m] (244.06 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Two-line V-Network (LISN) 9 kHz to 30 MHz	ESH3-Z5	R&S	892475/017	300002209	vIKI!	13.12.2017	12.12.2019
2	A	RF-Filter-section	85420E	HP	3427A00162	300002214	NK!	-/-	-/-
3	A	Hochpass 150 kHz	EZ-25	R&S	100010	300003798	ev	-/-	-/-
4	A	MXE EMI Receiver 20 Hz to 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405	k	12.12.2018	11.12.2019
5	A	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	vIKI!	15.01.2018	14.01.2020

6.5 Conducted measurements with peak power meter & spectrum analyzer

Conducted measurements normal conditions



WLAN tester version: 1.1.13; LabView2015

OP = AV + CA
 (OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	17.12.2018	16.12.2019
2	A, B	Isolating Transformer	RT5A	Grundig	12780	300001166	ev	-/-	-/-
3	A, B	Hygro-Thermometer	-/-, 5-45°C, 20-100%rF	Thies Clima	-/-	400000108	ev	11.05.2018	10.05.2020
4	A, B	PC Tester R005	Intel Core i3 3220/3,3 GHz, Prozessor	-/-	2V2403033A4523	300004589	ne	-/-	-/-
5	A, B	Teststand	Teststand Custom Sequence Editor	National Instruments GmbH	-/-	300004590	ne	-/-	-/-
6	A, B	Power Sensor	NRP-Z81	R&S	100010	300003780	vIKI!	11.12.2018	10.12.2019
7	A, B	RF-Cable	ST18/SMAM/SMAM/60	Huber & Suhner	Batch no. 606844	400001181	ev	-/-	-/-
8	A, B	Coax Attenuator 10 dB 2W 0-40 GHz	MCL BW-K10-2W44+	Mini Circuits	-/-	400001186	ev	-/-	-/-
9	B	Synchron Power Meter	SPM-4	CTC	1	300005580	ev	-/-	-/-
10	A, B	DC-Blocker	WA7046	Weinschel Associates	-/-	400001310	ev	-/-	-/-

7 Sequence of testing

7.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

*)Note: The sequence will be repeated three times with different EUT orientations.

7.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

7.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

7.4 Sequence of testing radiated spurious above 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

8 Measurement uncertainty

Measurement uncertainty		
Test case	Uncertainty	
Antenna gain	± 3 dB	
Power spectral density	± 1.15 dB	
DTS bandwidth	± 100 kHz (depends on the used RBW)	
Occupied bandwidth	± 100 kHz (depends on the used RBW)	
Maximum output power conducted	± 1.15 dB	
Detailed spurious emissions @ the band edge - conducted	± 1.15 dB	
Band edge compliance radiated	± 3 dB	
Spurious emissions conducted	> 3.6 GHz	± 1.15 dB
	> 7 GHz	± 1.15 dB
	> 18 GHz	± 1.89 dB
	≥ 40 GHz	± 3.12 dB
Spurious emissions radiated below 30 MHz	± 3 dB	
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB	
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB	
Spurious emissions radiated above 12.75 GHz	± 4.5 dB	
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB	

9 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS - 247, Issue 2	See table!	2019-03-06	-/-

Test specification clause	Test case	Guideline	Temperature conditions	Power source voltages	Mode	C	NC	NA	NP	Remark
§15.247(b)(4) RSS - 247 / 5.4 (f)(ii)	Antenna gain	-/-	Nominal	Nominal	DSSS	-/-				-/-
§15.35	Duty cycle	-/-	Nominal	Nominal	DSSS OFDM	-/-				-/-
§15.247(e) RSS - 247 / 5.2 (b)	Power spectral density	KDB 558074 DTS clause: 8.4	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(a)(2) RSS - 247 / 5.2 (a)	DTS bandwidth	KDB 558074 DTS clause: 8.2	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
RSS Gen clause 4.6.1	Occupied bandwidth	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(b)(3) RSS - 247 / 5.4 (d)	Maximum output power	KDB 558074 DTS clause: 8.3.1.3	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5	Detailed spurious emissions @ the band edge – cond.	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance cond. & rad.	KDB 558074 DTS clause: 8.7.3	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5	TX spurious emissions cond.	KDB 558074 DTS clause: 8.5	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.209(a) RSS-Gen	TX spurious emissions rad. below 30 MHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions rad. 30 MHz to 1 GHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions rad. above 1 GHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.109 RSS-Gen	RX spurious emissions rad. 30 MHz to 1 GHz	-/-	Nominal	Nominal	RX / idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.109 RSS-Gen	RX spurious emissions rad. above 1 GHz	-/-	Nominal	Nominal	RX / idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.107(a) §15.207	Conducted emissions < 30 MHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
----------	-----------	-----------	---------------	-----------	----------------	-----------	---------------

10 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

Provided channels:

Channels with 20 MHz channel bandwidth:

channel number & center frequency													
channel	1	2	3	4	5	6	7	8	9	10	11	12	13
f _c / MHz	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472

Channels with 40 MHz channel bandwidth:

channel number & center frequency													
channel	-/-	-/-	3	4	5	6	7	8	9	10	11	-/-	-/-
f _c / MHz	-/-	-/-	2422	2427	2432	2437	2442	2447	2452	2457	2462	-/-	-/-

Note: The channels used for the tests are marked in bold in the list.

11 Additional EUT parameter

- Test mode:
- ☐ No test mode available
Iperf was used to ping another device with the largest support packet size
- ☒ Test mode available
Special software is used.
EUT is transmitting pseudo random data by itself
- Modulation types:
- ☒ Wide Band Modulation (None Hopping – e.g. DSSS, OFDM)
- ☐ Frequency Hopping Spread Spectrum (FHSS)
- Antennas and transmit operating modes:
- ☒ Operating mode 1 (single antenna)
- Equipment with 1 antenna,
 - Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,
 - Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)
- ☐ Operating mode 2 (multiple antennas, no beamforming)
- Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.
- ☐ Operating mode 3 (multiple antennas, with beamforming)
- Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.

12 Measurement results

12.1 Antenna gain

Description:

The antenna gain of the complete system is calculated by the difference of radiated power (@ 3 MHz) in EIRP and the conducted power (@ 3 MHz) of the module.

Measurement:

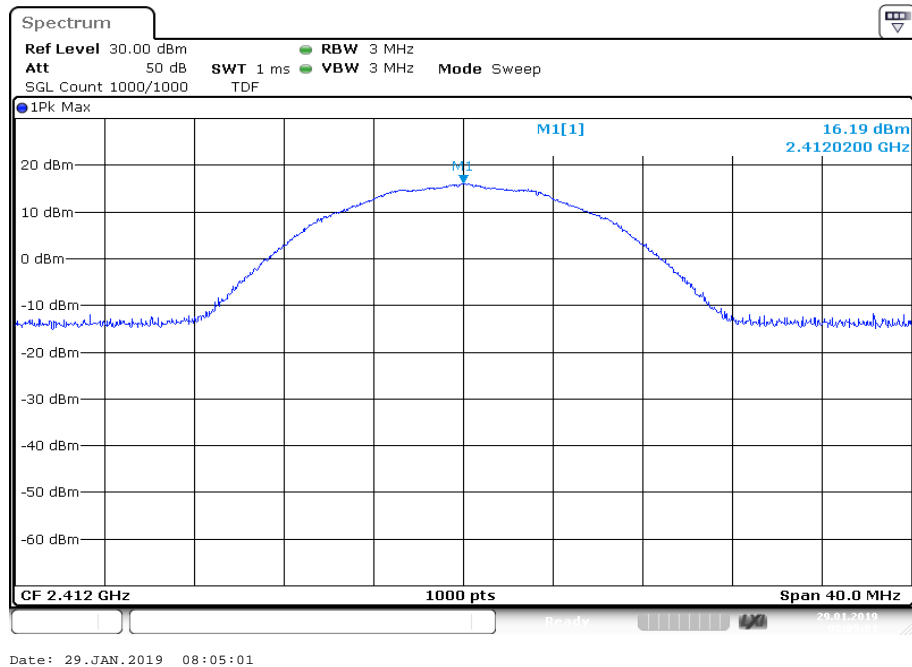
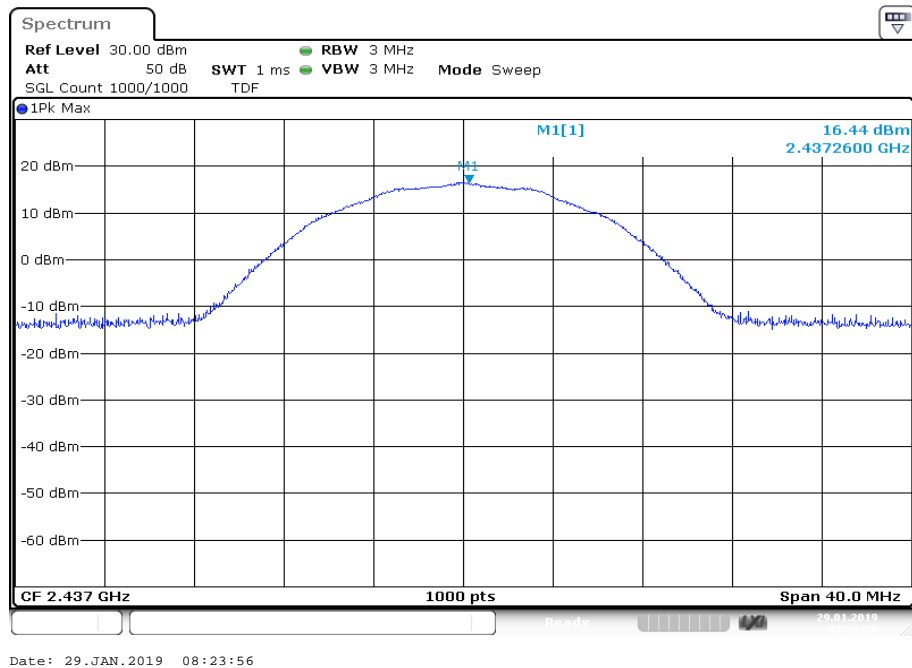
Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace mode	Max hold
Test setup	See chapter 6.5 - A (conducted) See chapter 6.2 - C (radiated)
Measurement uncertainty	See chapter 8

Limits:

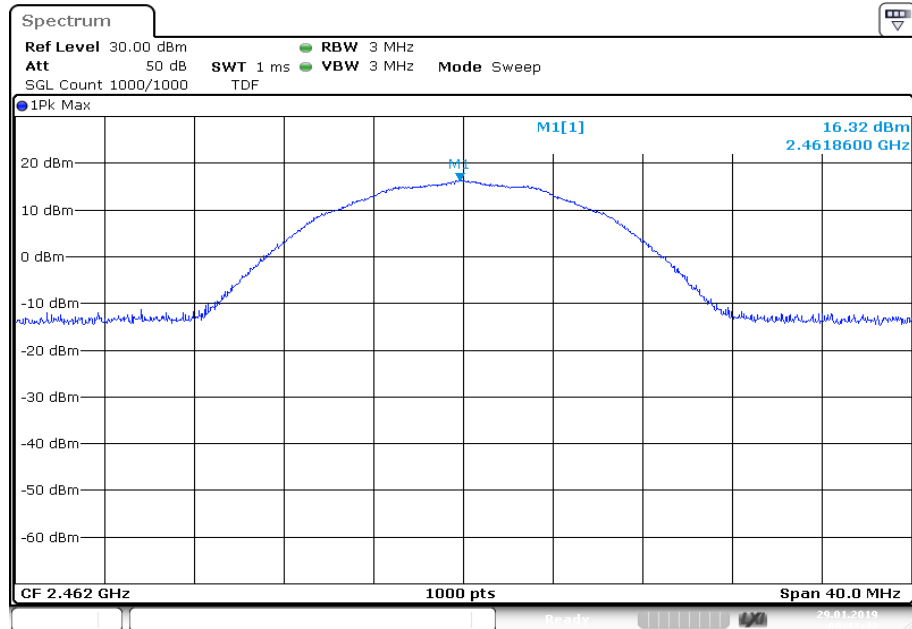
FCC	IC
6 dBi / > 6 dBi output power and power density reduction required	

Results:

	lowest channel	middle channel	highest channel
Conducted power / dBm Measured with DSSS modulation	16.2	16.4	16.3
Radiated power / dBm Measured with DSSS modulation	18.4	18.7	18.4
Gain [dBi] / Calculated	2.2	2.3	2.1

Plots: DSSS / b – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

Plot 3: Highest channel



Date: 29.JAN.2019 08:42:42

12.2 Identify worst case data rate

Results:

Modulation scheme / bandwidth	
DSSS / b – mode	11 Mbit/s
OFDM / g – mode	6 Mbit/s
OFDM / n HT20 – mode	MCS0
OFDM / n HT40 – mode	MCS0

Worst case data rate or modulation scheme declared by the manufacturer

12.3 Maximum output power

Description:

Measurement of the maximum conducted peak output power. The measurements are performed using the data rate identified in the previous chapter.

Measurement:

Measurement parameter	
According to DTS clause: 8.3.1.3	
Peak power meter	
Test setup	See chapter 6.5 - B
Measurement uncertainty	See chapter 8

Limits:

FCC	IC
Conducted 1.0 W / 30 dBm with an antenna gain of max. 6 dBi	

Results:

	maximum output power / dBm		
	lowest channel	middle channel	highest channel
Output power conducted DSSS / b – mode	14.3	14.5	14.2
Output power conducted OFDM / g – mode	17.1	17.1	16.4
Output power conducted OFDM / n HT20 – mode	17.1	17.0	16.0
Output power conducted OFDM / n HT40 – mode	17.0	17.2	16.4

12.4 Duty cycle

Description:

Measurement of the timing behavior.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Depends on the signal see plot
Resolution bandwidth	10 MHz
Video bandwidth	10 MHz
Trace mode	Max hold
Test setup	See chapter 6.5 - A
Measurement uncertainty	See chapter 8

Limits:

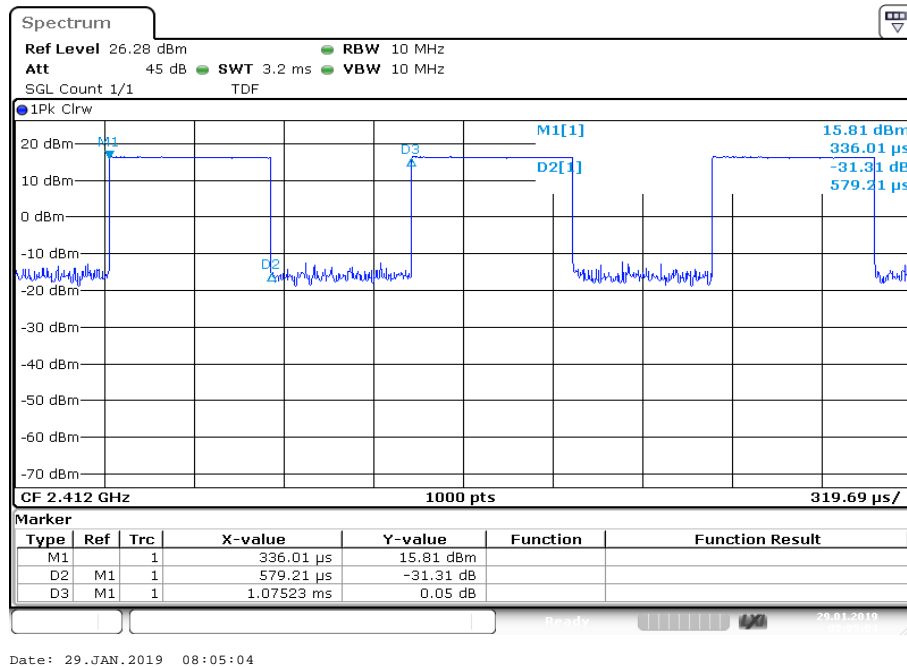
FCC	IC
No limitation!	

Results:

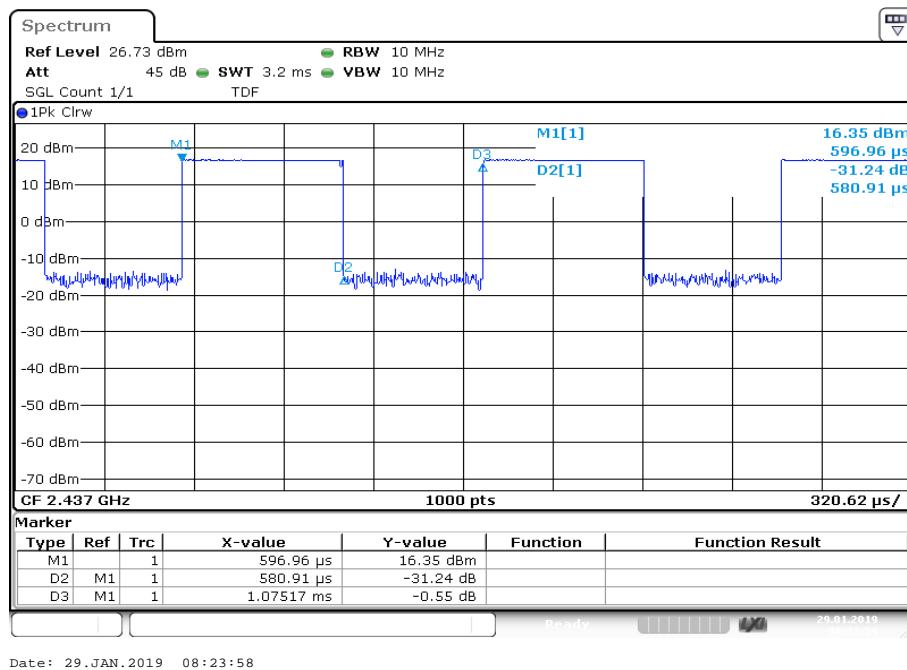
T_{nom}	V_{nom}	lowest channel	middle channel	highest channel
DSSS / b – mode		53.9 % / 2.68 dB	54.0 % / 2.68 dB	54.1 % / 2.67 dB
OFDM / g – mode		59.7 % / 2.24 dB	59.5 % / 2.25 dB	59.7 % / 2.24 dB
OFDM / n HT20 – mode		56.2 % / 2.50 dB	55.7 % / 2.54 dB	56.4 % / 2.49 dB
OFDM / n HT40 – mode		39.7% / 4.01 dB	39.8% / 3.99 dB	39.7 % / 4.13 dB

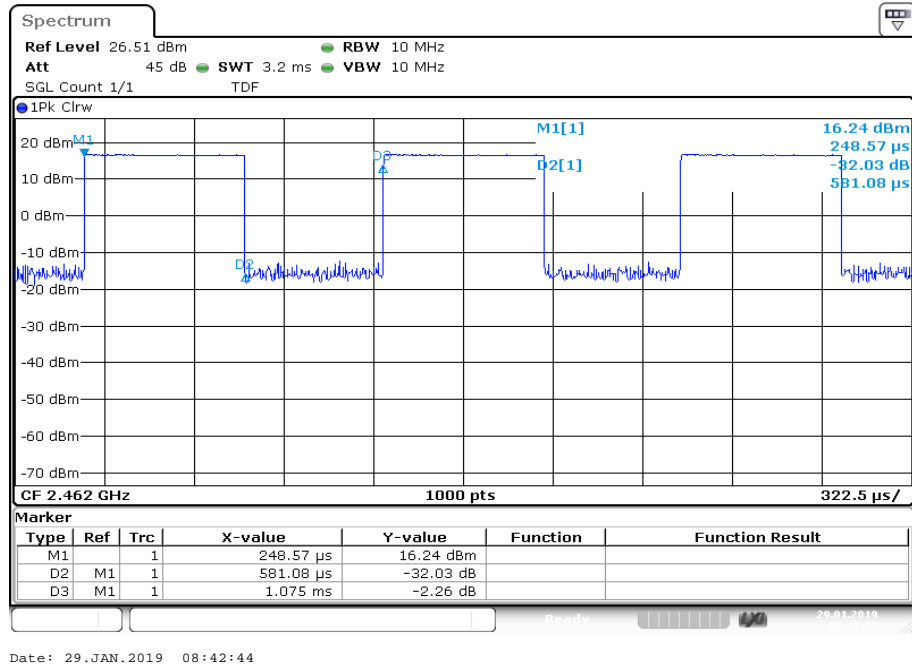
Plots: DSSS / b – mode

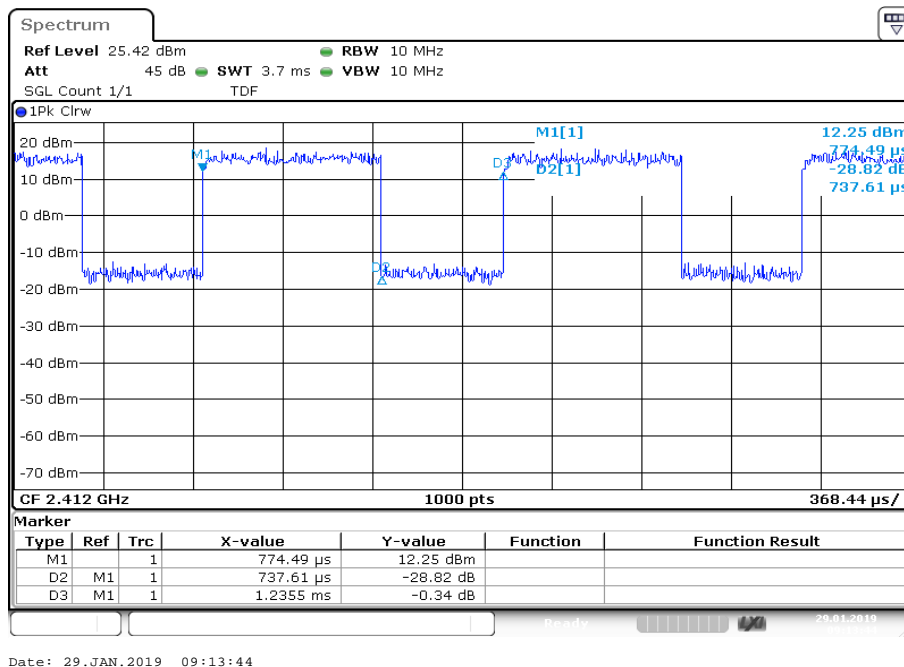
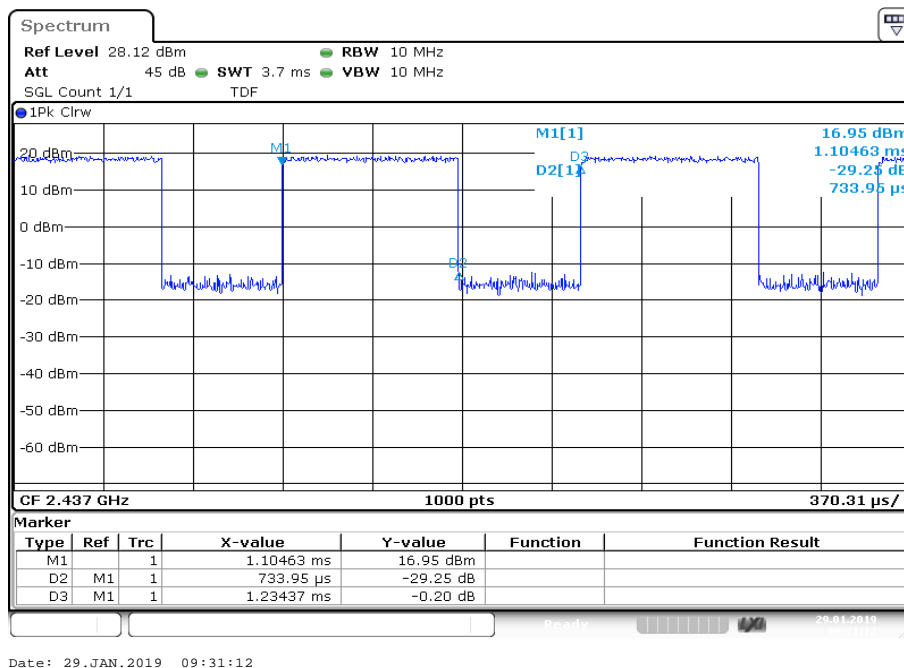
Plot 1: Lowest channel

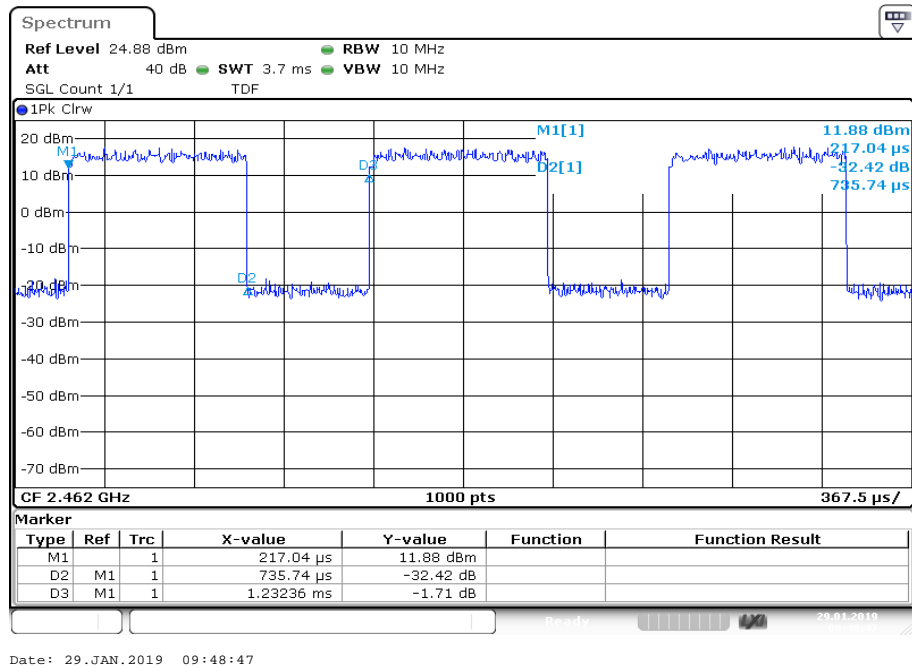


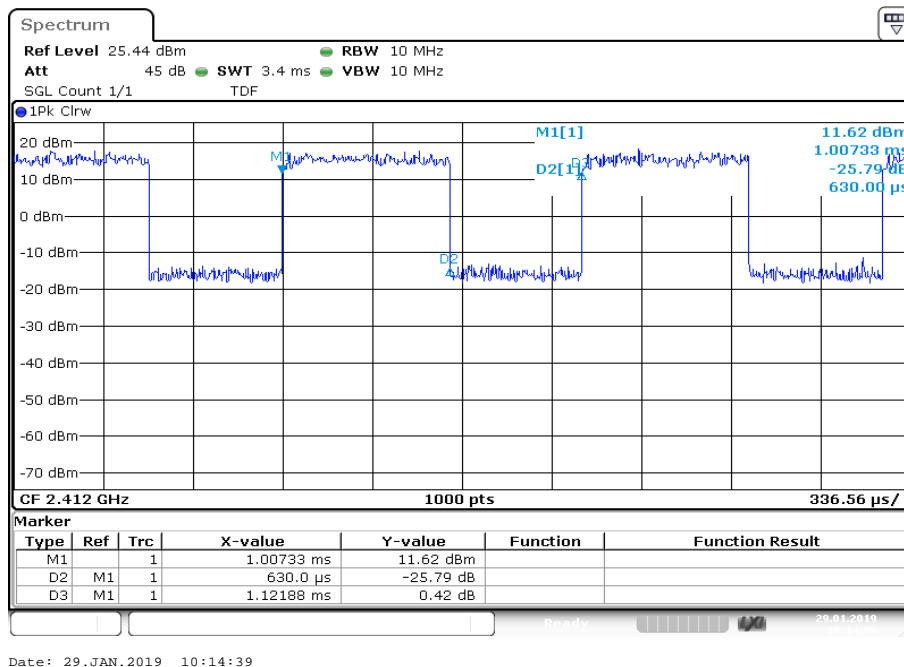
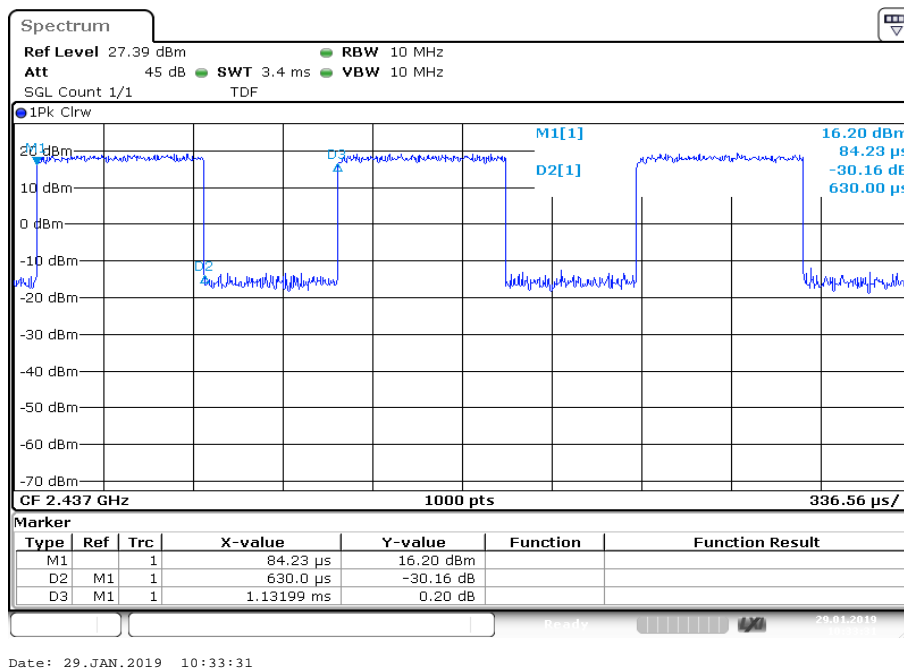
Plot 2: Middle channel

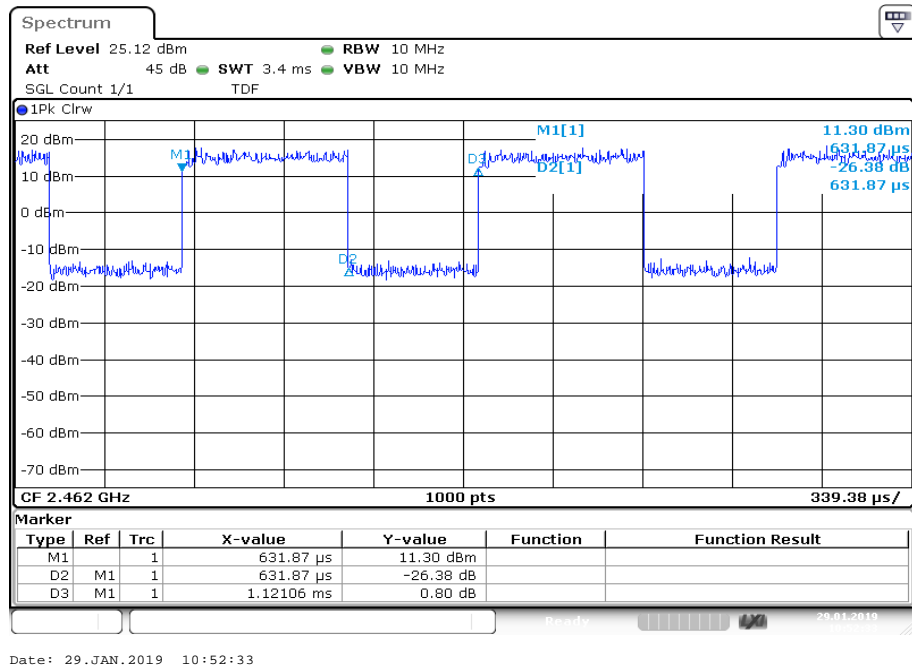


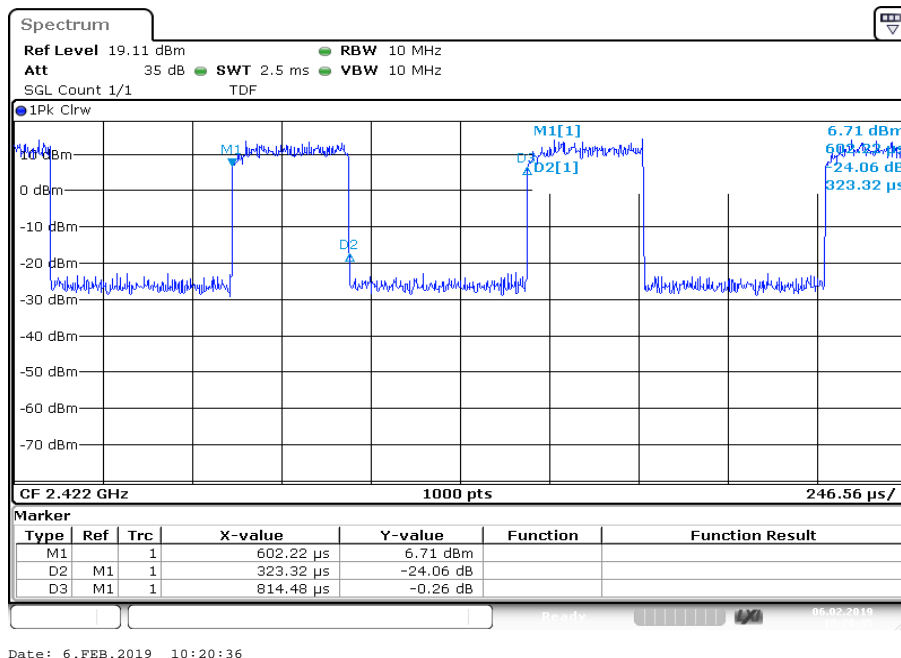
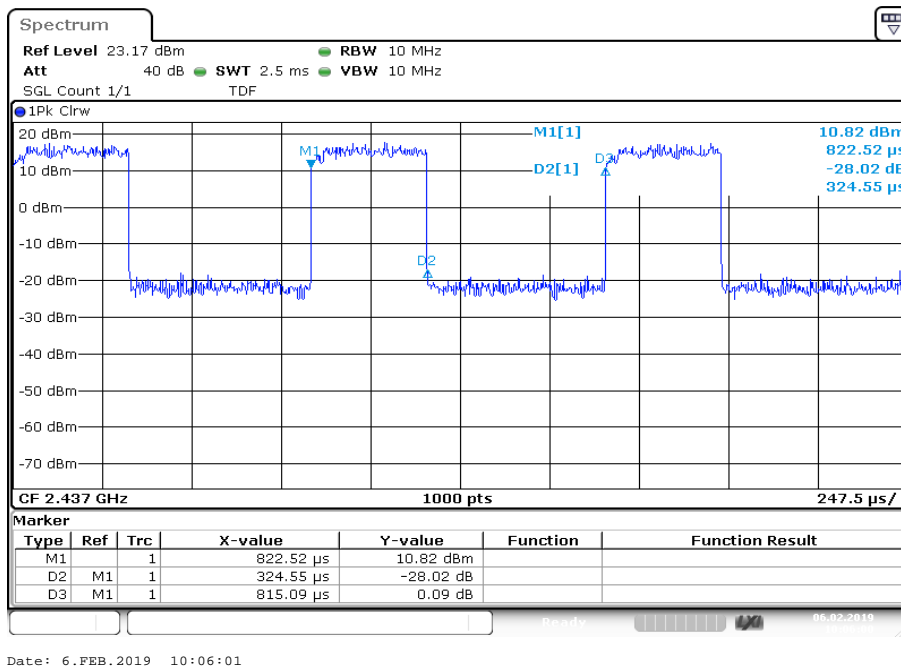
Plot 3: Highest channel

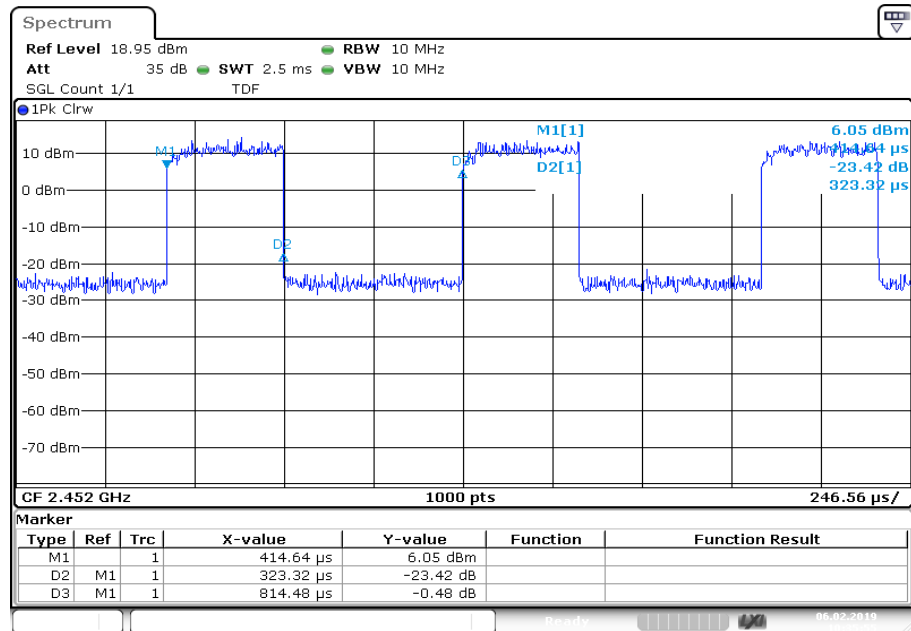
Plots: OFDM / g – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

Plot 3: Highest channel

Plots: OFDM / n HT20 – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

Plot 3: Highest channel

Plots: OFDM / n HT40 – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

Plot 3: Highest channel

Date: 6.FEB.2019 10:35:56

12.5 Peak power spectral density

Description:

Measurement of the peak power spectral density of a digital modulated system. The PSD shows the strength of the variations as a function of the frequency. The measurement is repeated for both modulations at the lowest, middle and highest channel.

Measurement:

Measurement parameter	
According to DTS clause: 8.4	
Detector	Positive Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Span	30 MHz
Trace mode	Max. hold (allow trace to fully stabilize)
Test setup	See chapter 6.5 - A
Measurement uncertainty	See chapter 8

Limits:

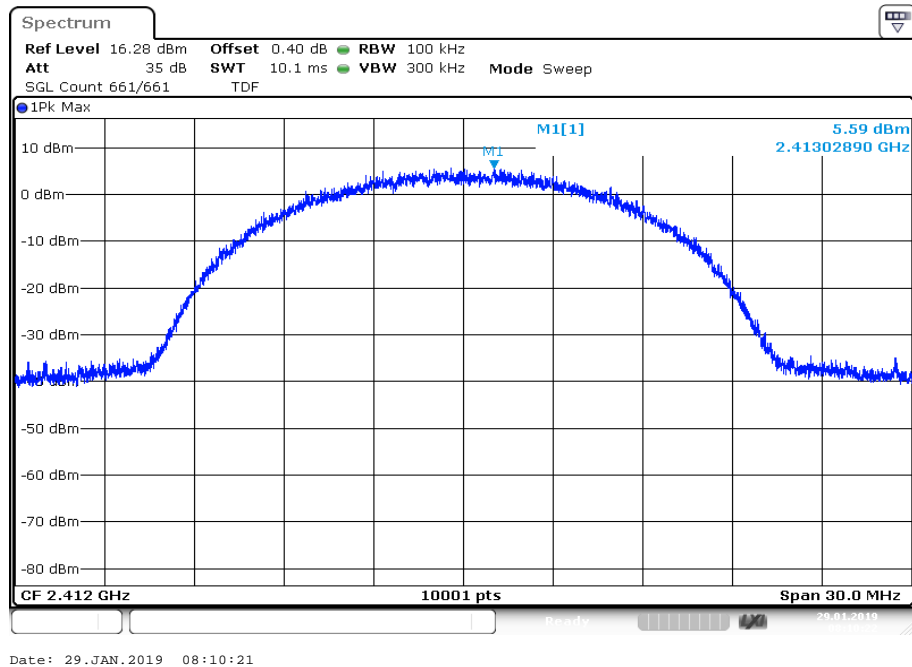
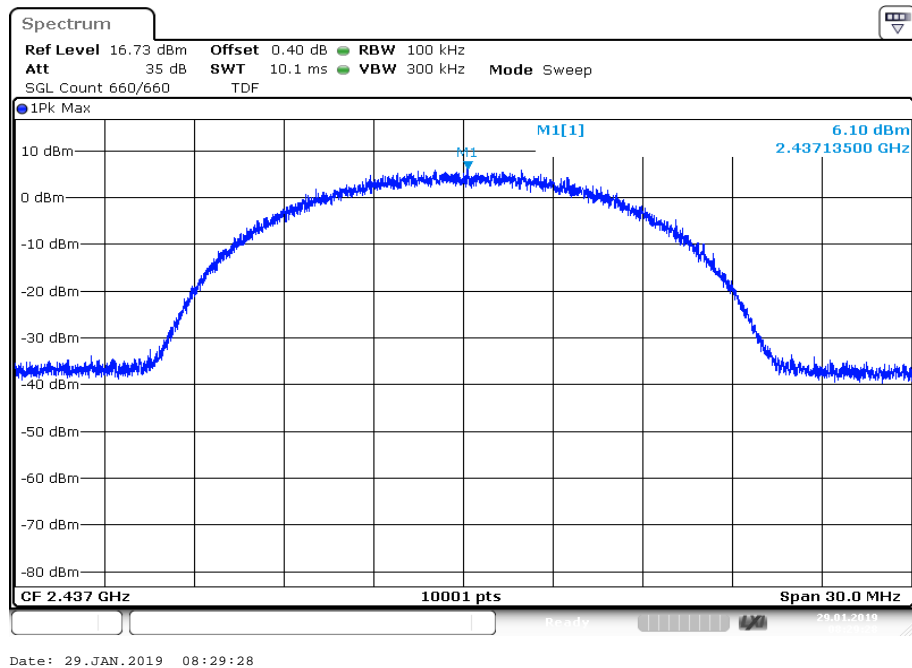
FCC	IC
8 dBm / 3 kHz (conducted)	

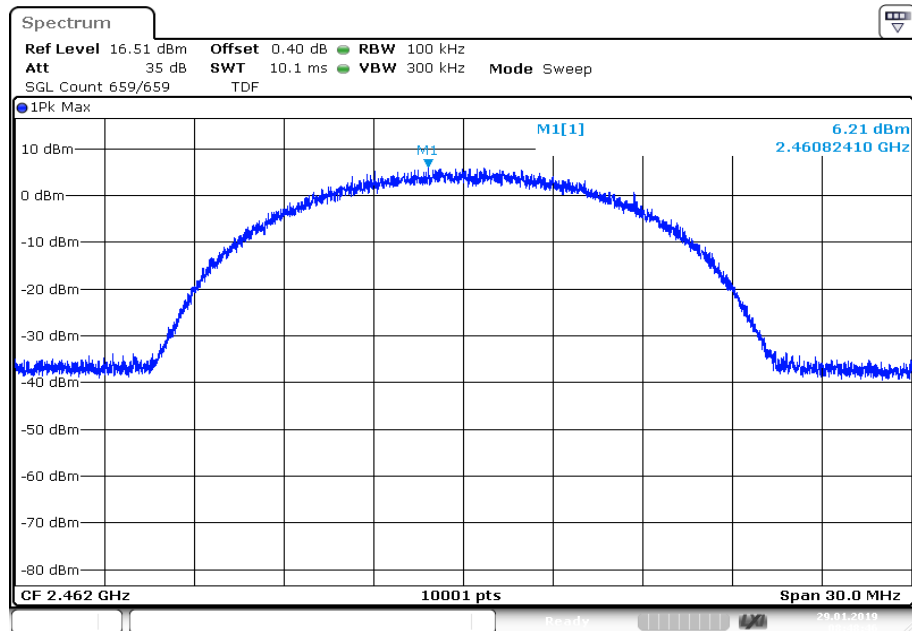
Results:

measured	peak power spectral density / dBm @ 100 kHz		
	Lowest channel	Middle channel	Highest channel
DSSS / b – mode	5.59	6.10	6.21
OFDM / g – mode	0.71	5.67	0.32
OFDM / n HT20 – mode	0.91	4.94	0.55
OFDM / n HT40 – mode	-3.67	1.17	-3.68

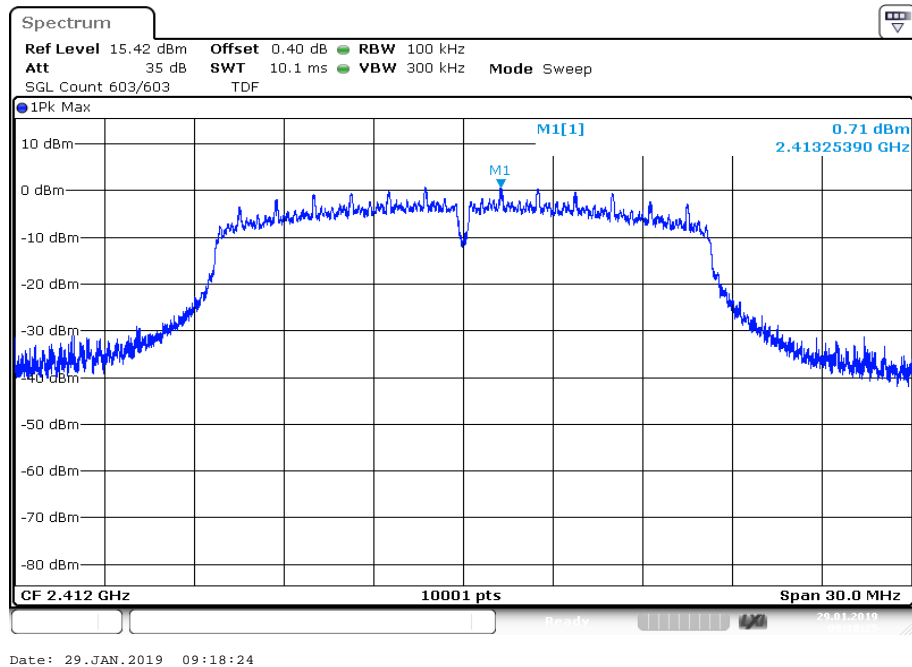
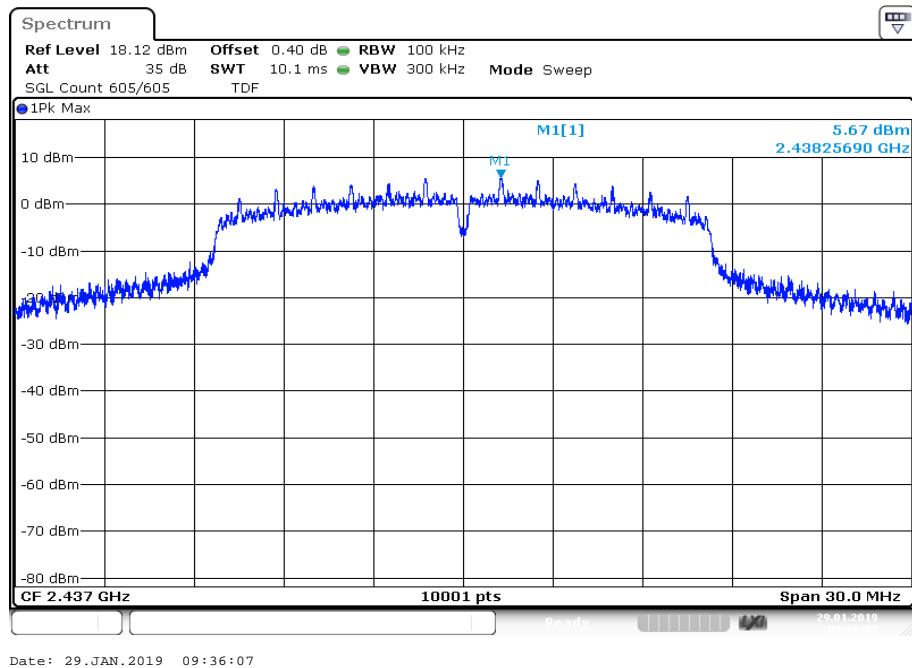
Formula for PKPSD calculation: $\text{PKPSD}_{\text{calculated}} = \text{PKPSD}_{\text{measured}} + 10 \cdot \log(3\text{kHz}/\text{RBW}_{\text{measured}}[\text{kHz}])$

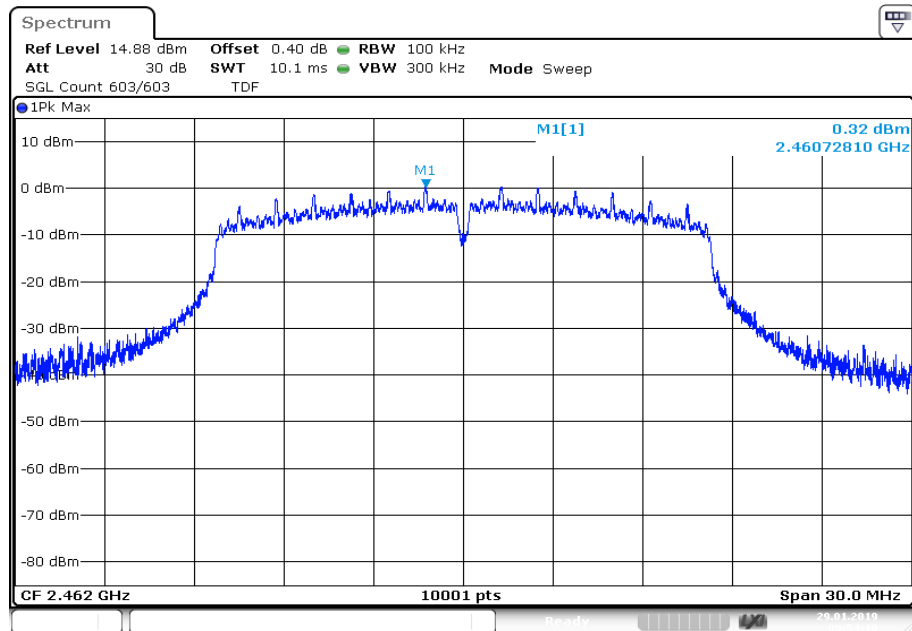
calculated	peak power spectral density / dBm @ 3 kHz		
	Lowest channel	Middle channel	Highest channel
DSSS / b – mode	-9.64	-9.13	-9.02
OFDM / g – mode	-14.52	-9.56	-14.91
OFDM / n HT20 – mode	-14.32	-10.29	-14.68
OFDM / n HT40 – mode	-18.90	-14.06	-18.91

Plots: DSSS / b – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

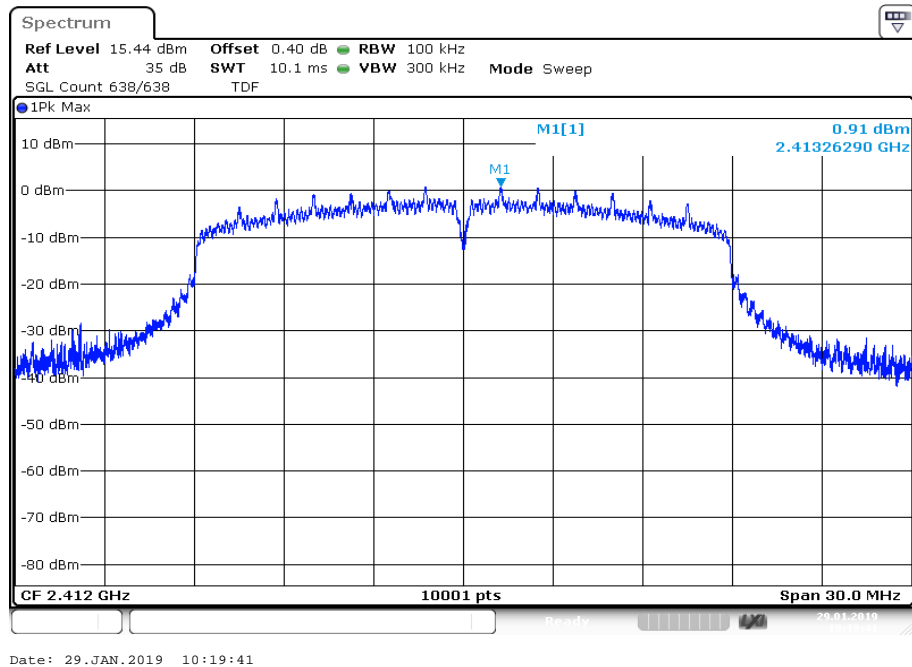
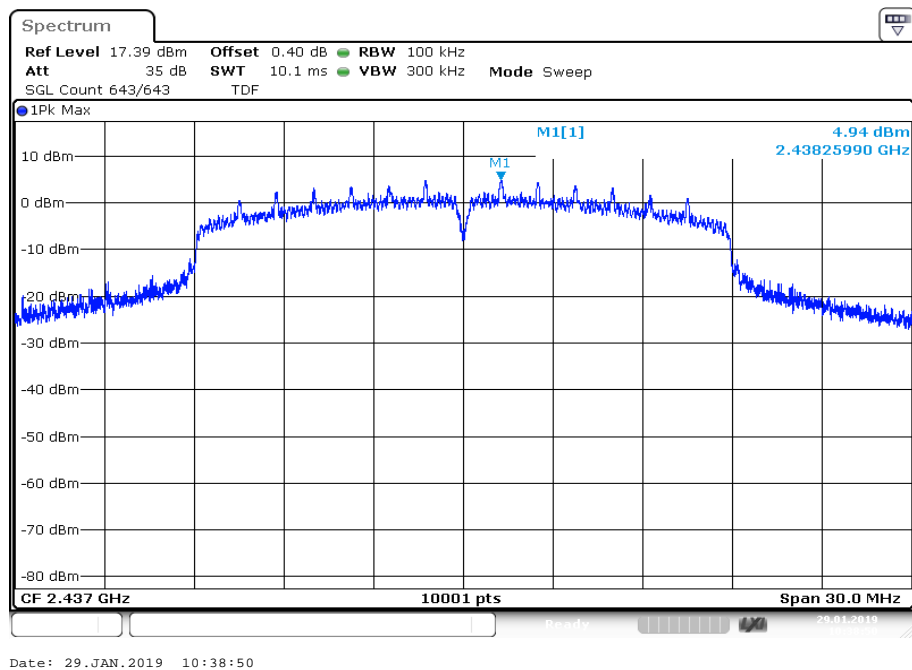
Plot 3: Highest channel

Date: 29.JAN.2019 08:48:46

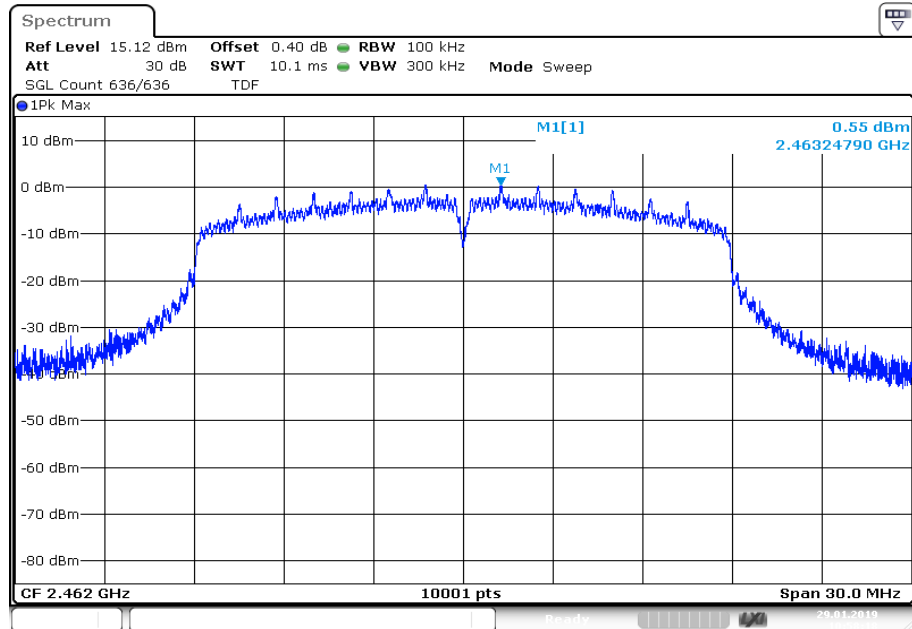
Plots: OFDM / g – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

Plot 3: Highest channel

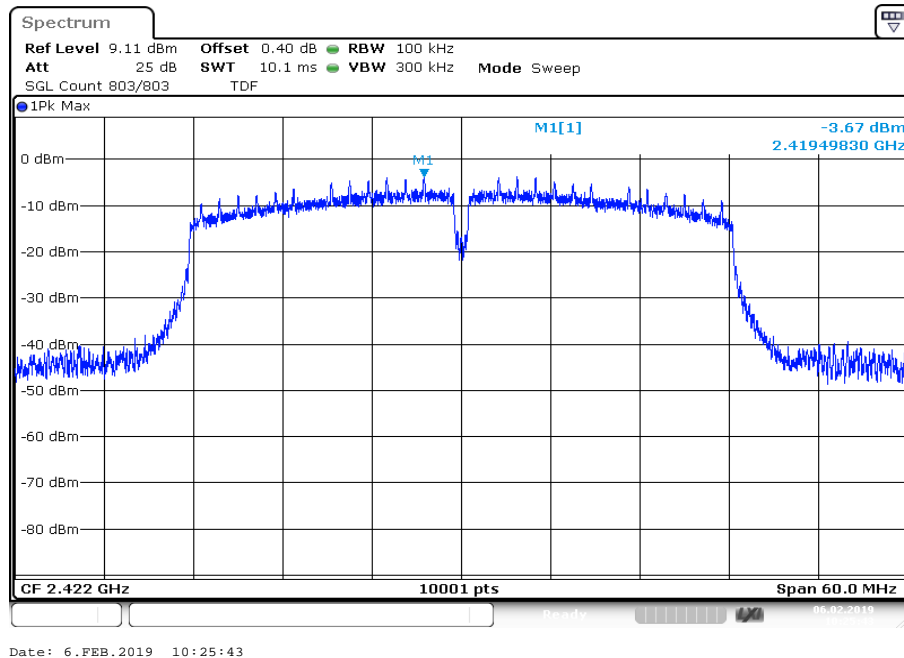
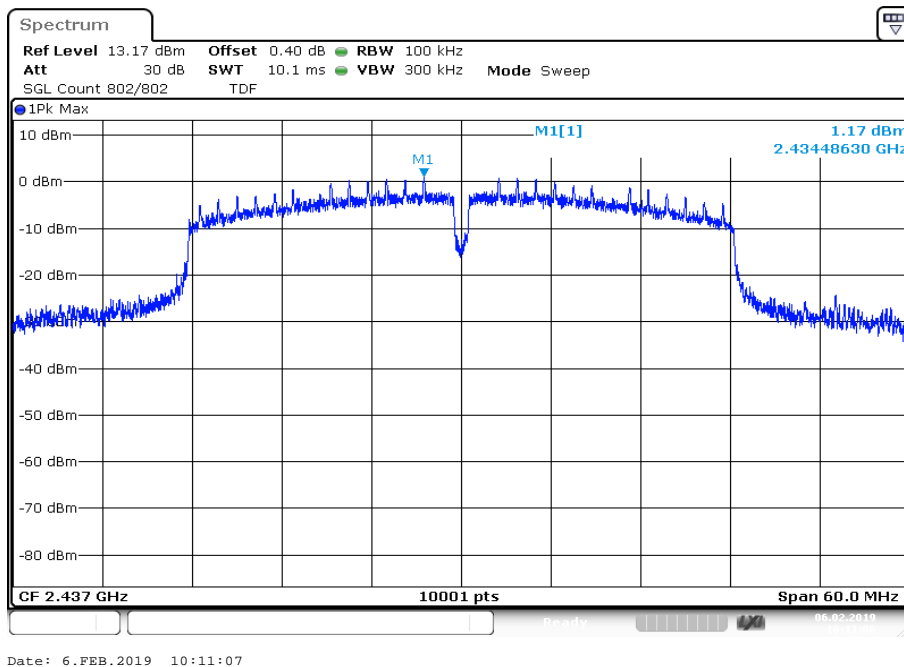
Date: 29.JAN.2019 09:54:10

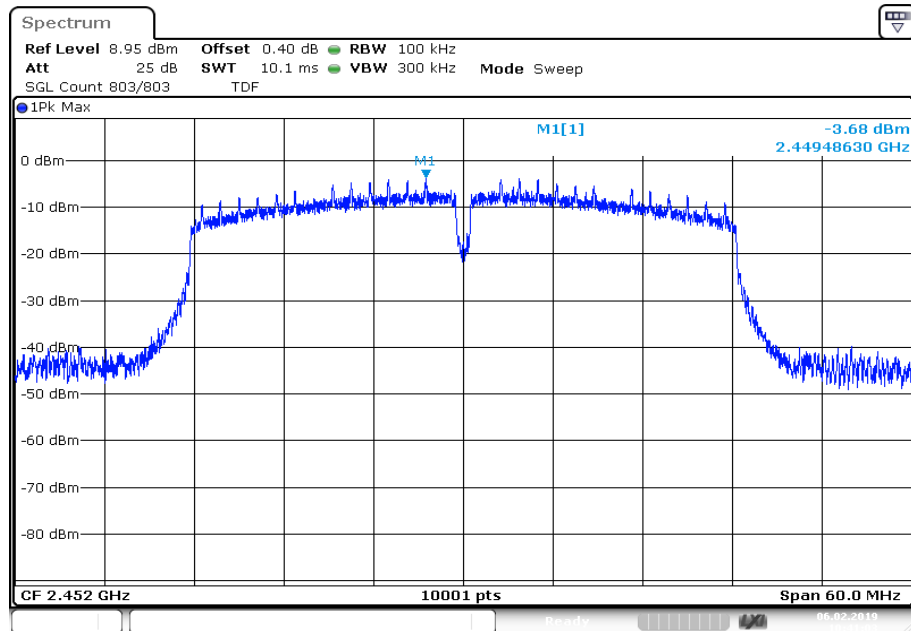
Plots: OFDM / n HT20 – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

Plot 3: Highest channel



Date: 29.JAN.2019 10:58:18

Plots: OFDM / n HT40 – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

Plot 3: Highest channel

Date: 6.FEB.2019 10:41:04

12.6 6 dB DTS bandwidth

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

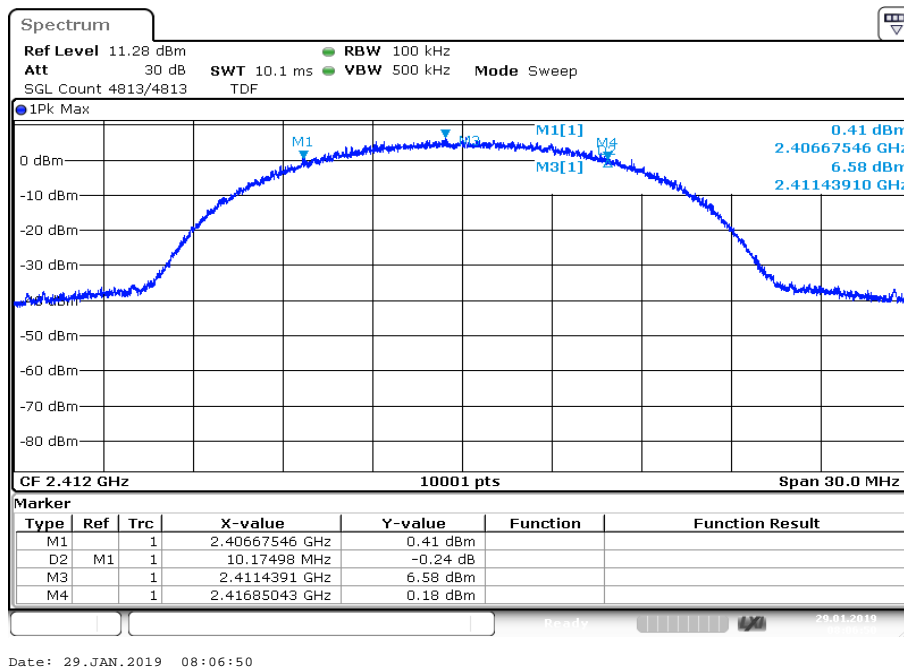
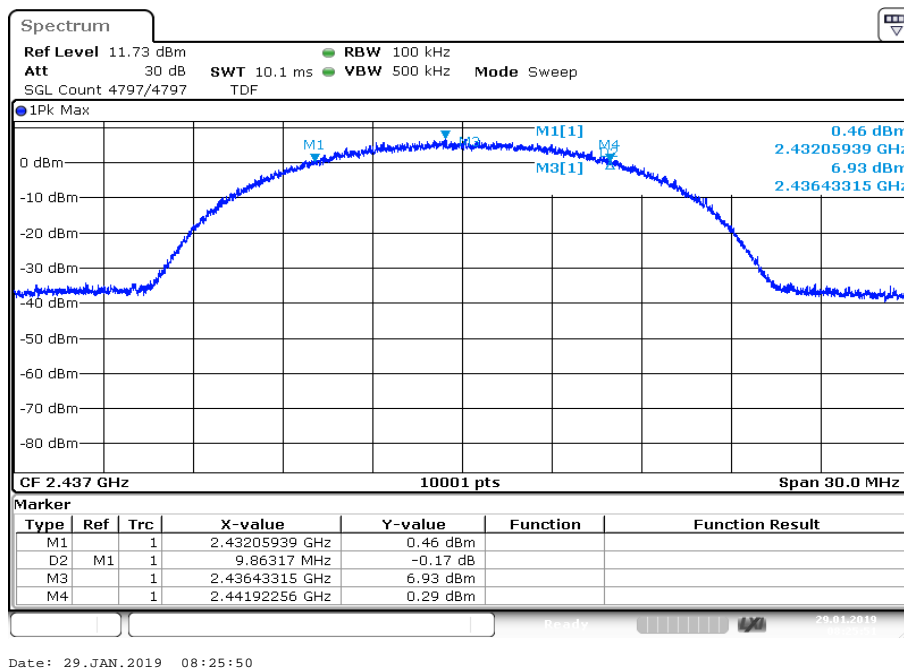
Measurement parameter	
According to DTS clause: 8.2	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	30 MHz / 50 MHz
Trace mode	Single count with 200 counts
Test setup	See chapter 6.5 - A
Measurement uncertainty	See chapter 8

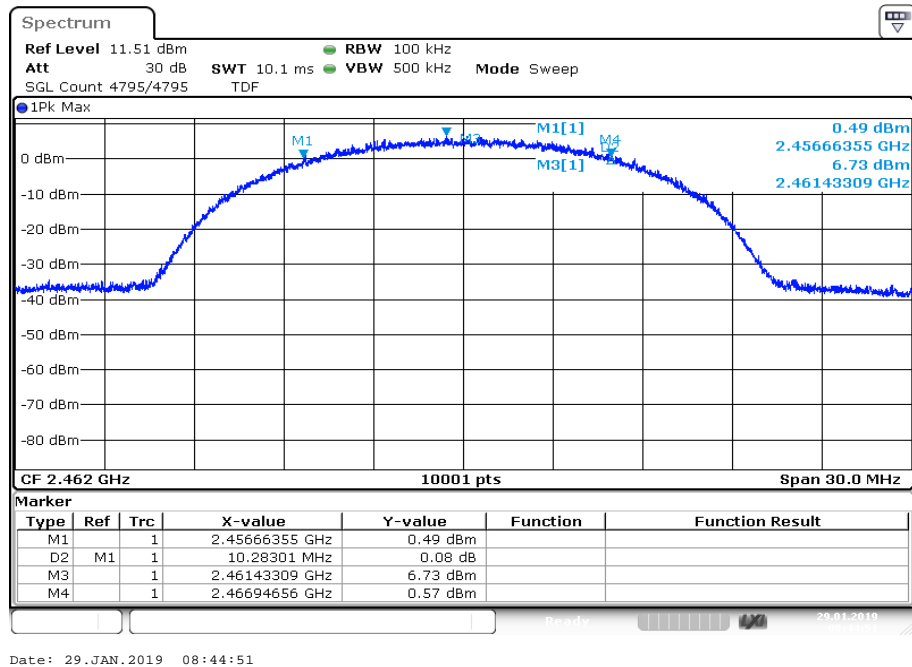
Limits:

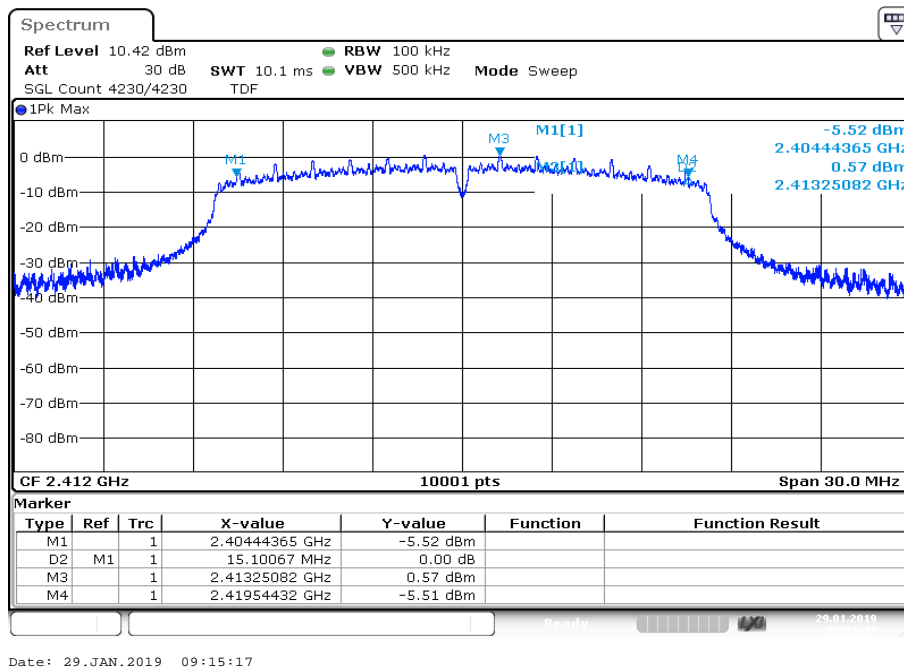
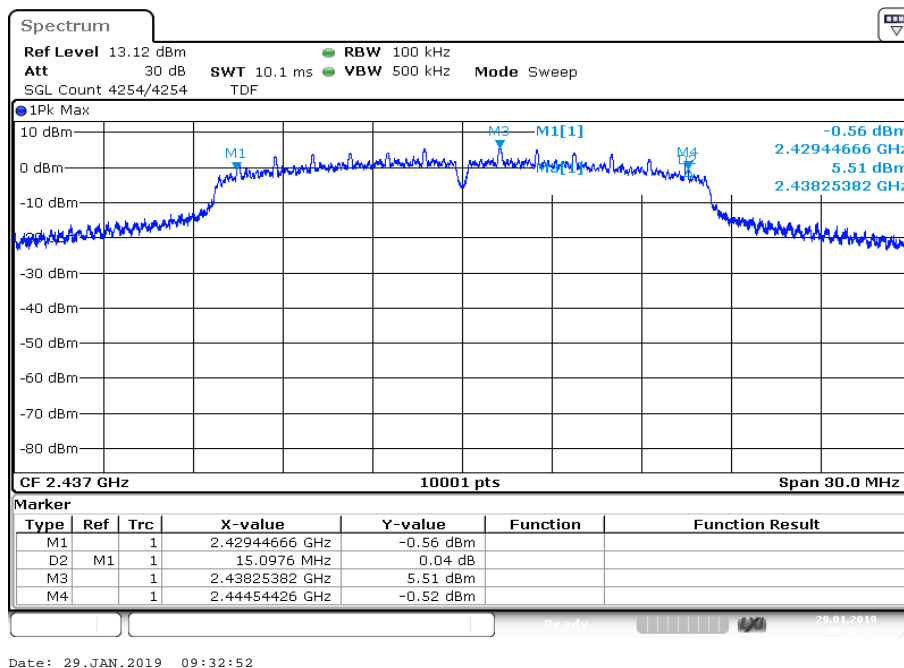
FCC	IC
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	

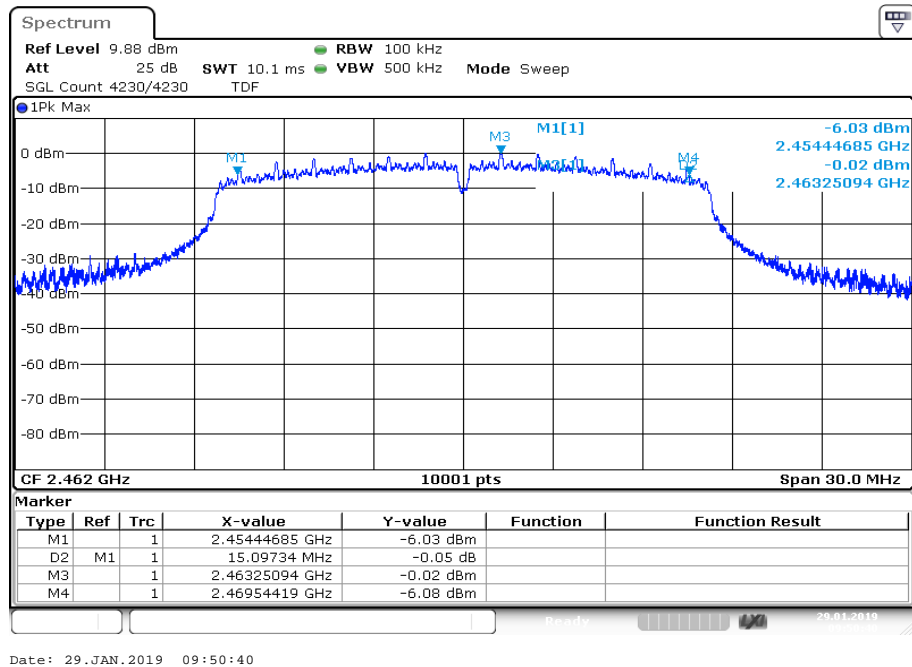
Results:

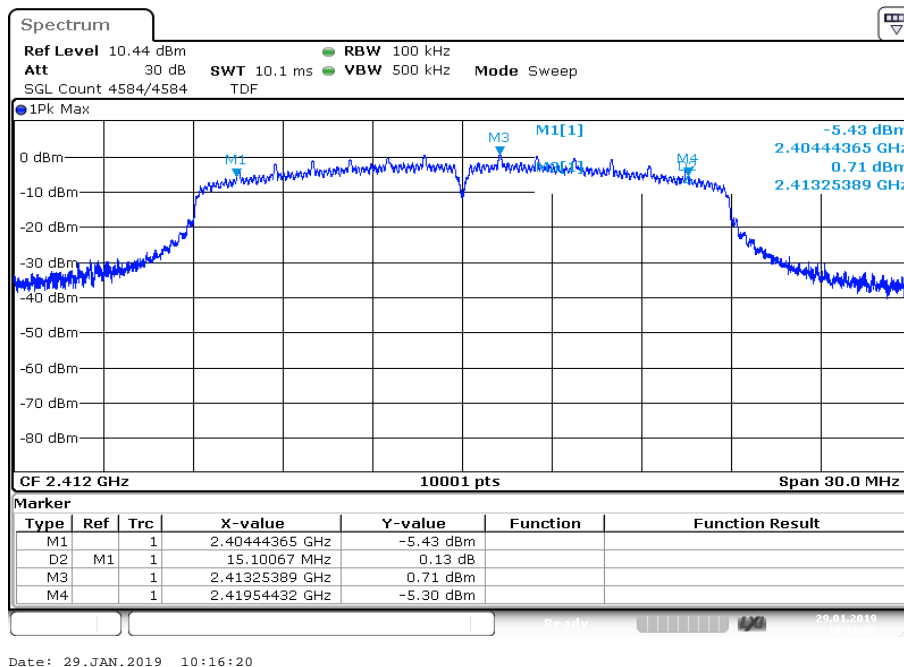
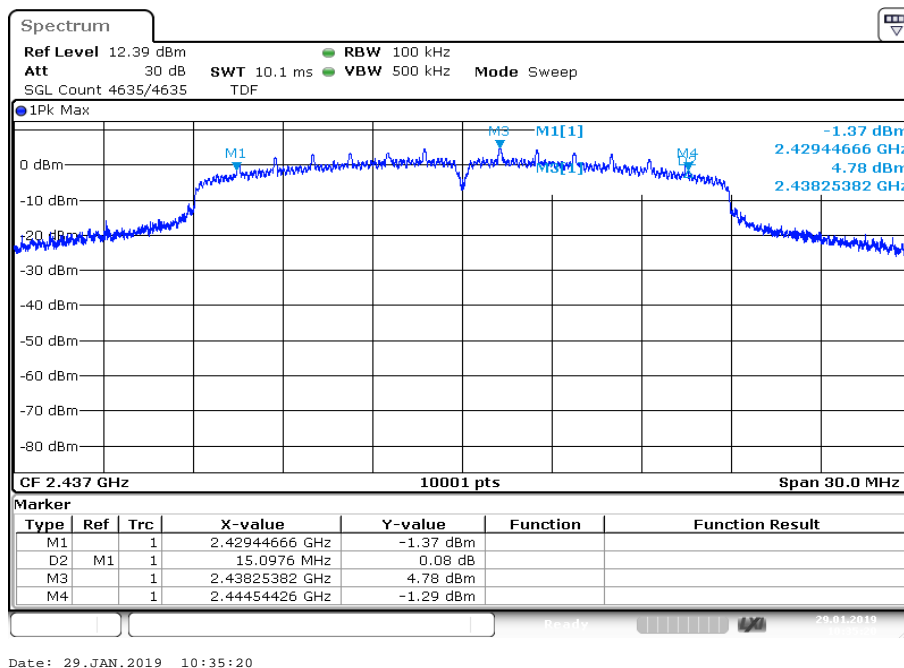
	6 dB DTS bandwidth / kHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	10175	9863	10283
OFDM / g – mode	15101	15098	15097
OFDM / n HT20 – mode	15101	15098	15100
OFDM / n HT40 – mode	35025	33819	35037

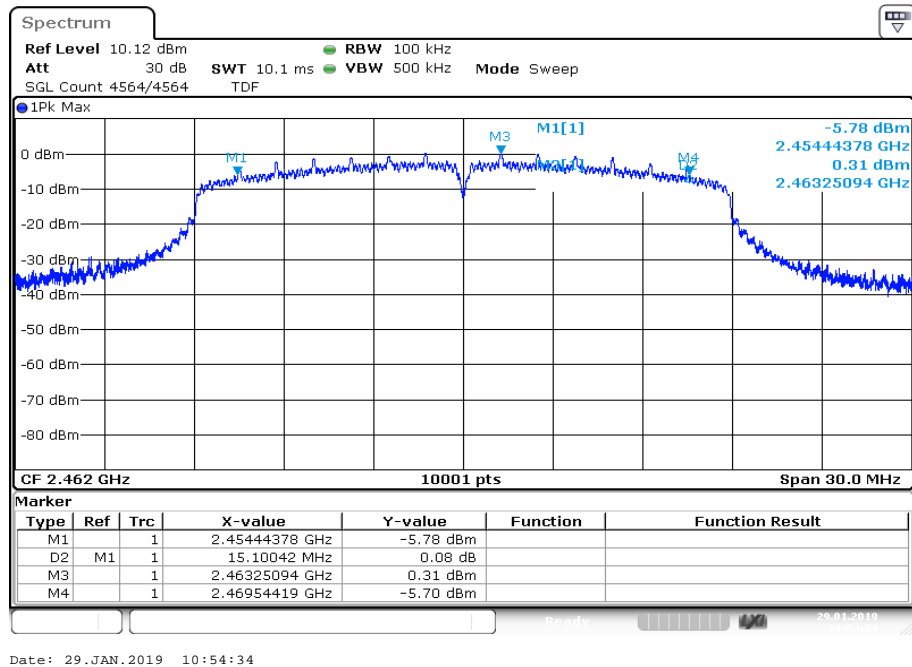
Plots: DSSS / b – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

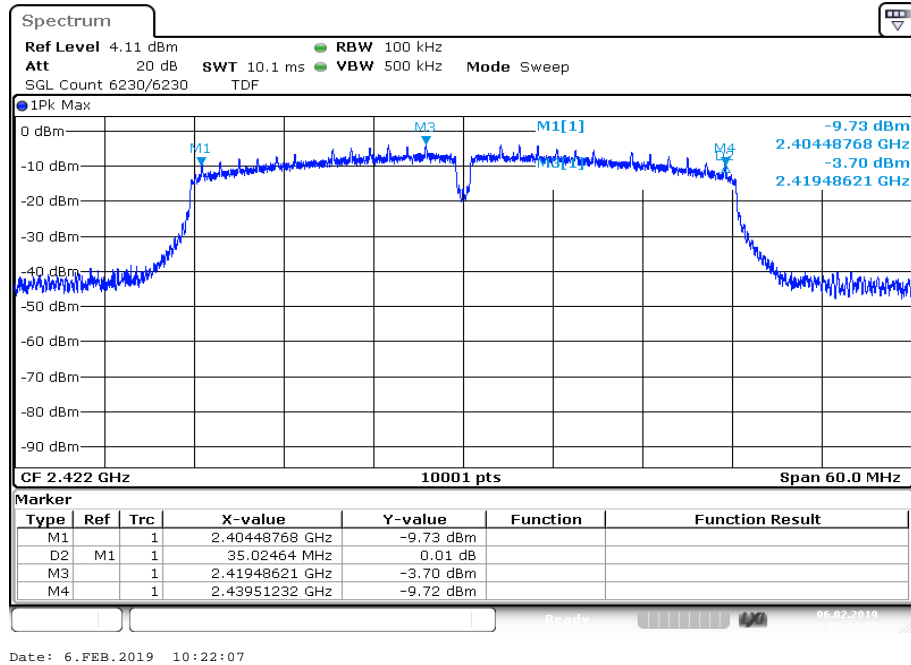
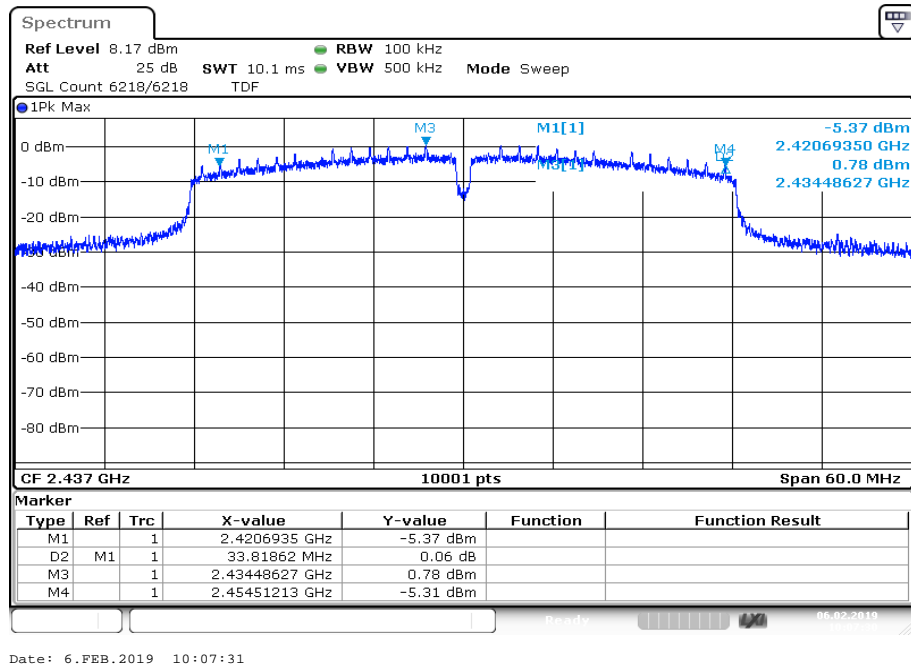
Plot 3: Highest channel

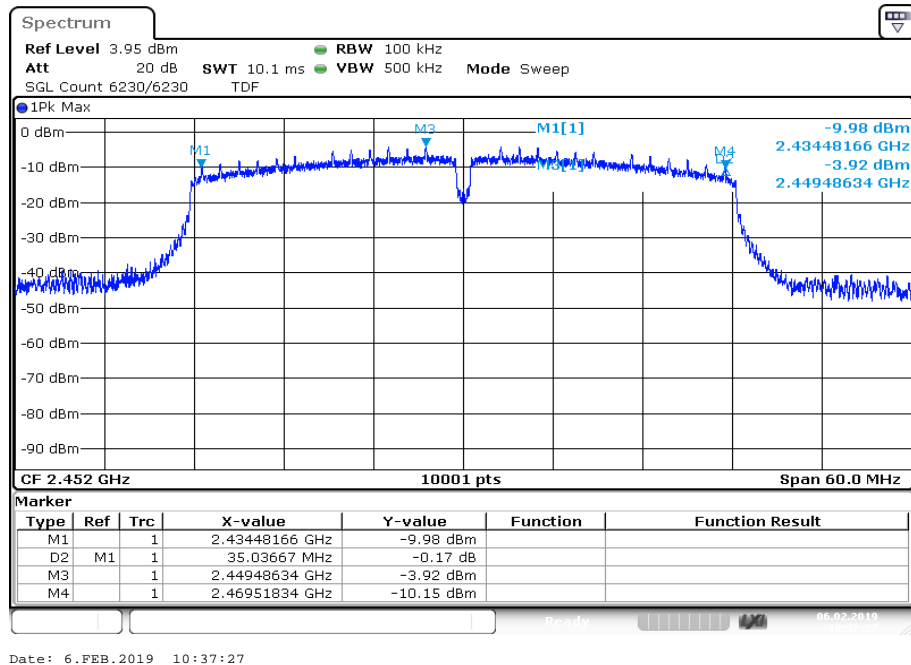
Plots: OFDM / g – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

Plot 3: Highest channel

Plots: OFDM / n HT20 – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

Plot 3: Highest channel

Plots: OFDM / n HT40 – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

Plot 3: Highest channel

12.7 Occupied bandwidth – 99% emission bandwidth

Description:

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

Measurement:

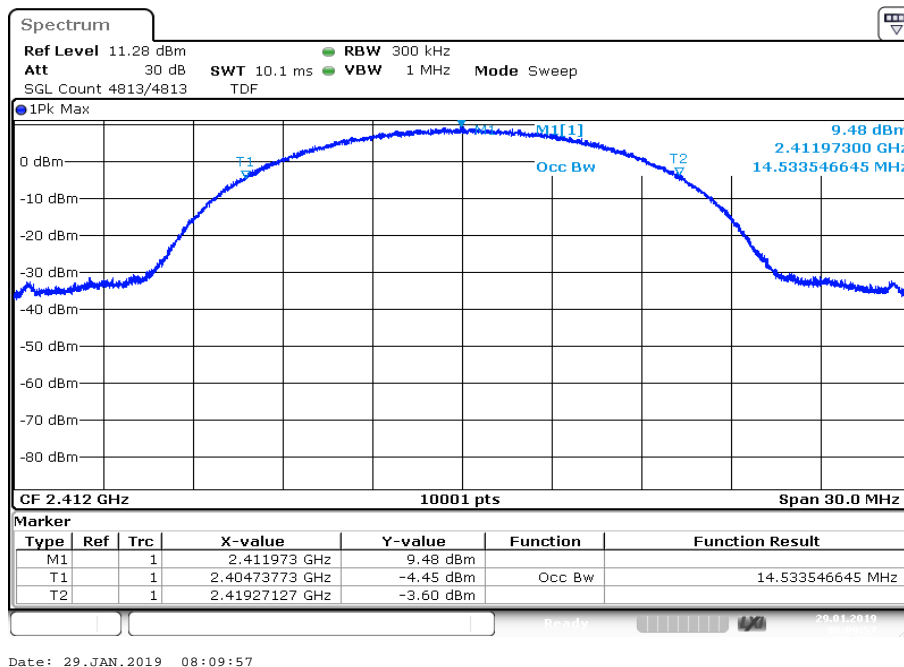
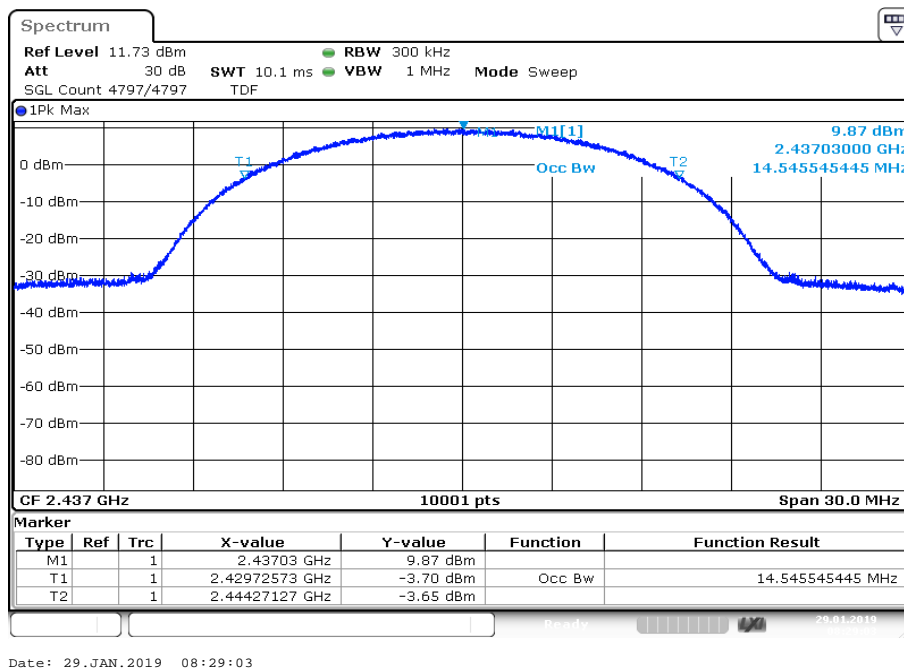
Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	300 kHz
Video bandwidth	1 MHz
Span	30 MHz / 50 MHz
Measurement procedure	Measurement of the 99% bandwidth using the integration function of the analyzer
Trace mode	Single count with 200 counts
Test setup	See chapter 6.5 - A
Measurement uncertainty	See chapter 8

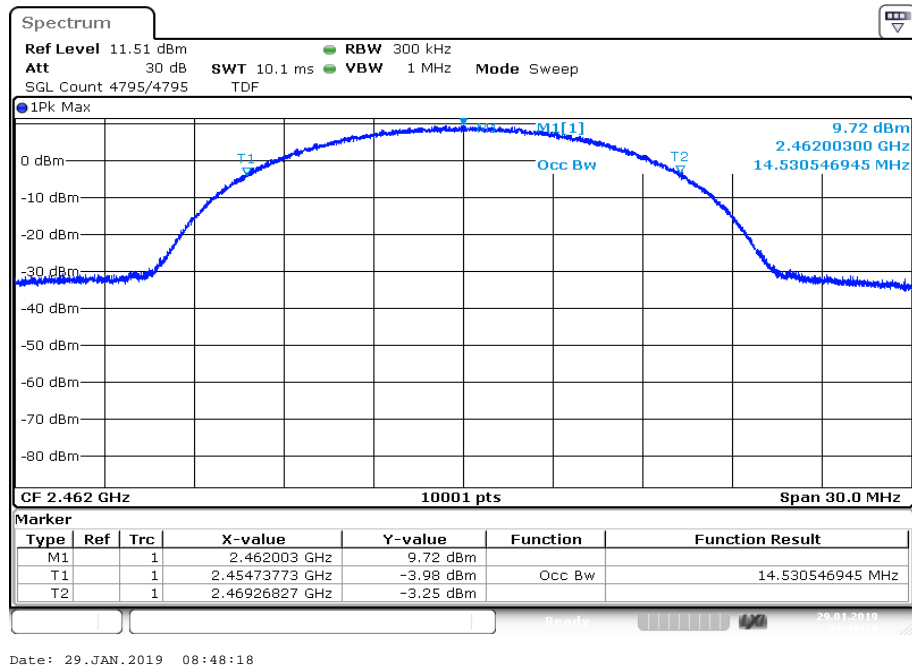
Usage:

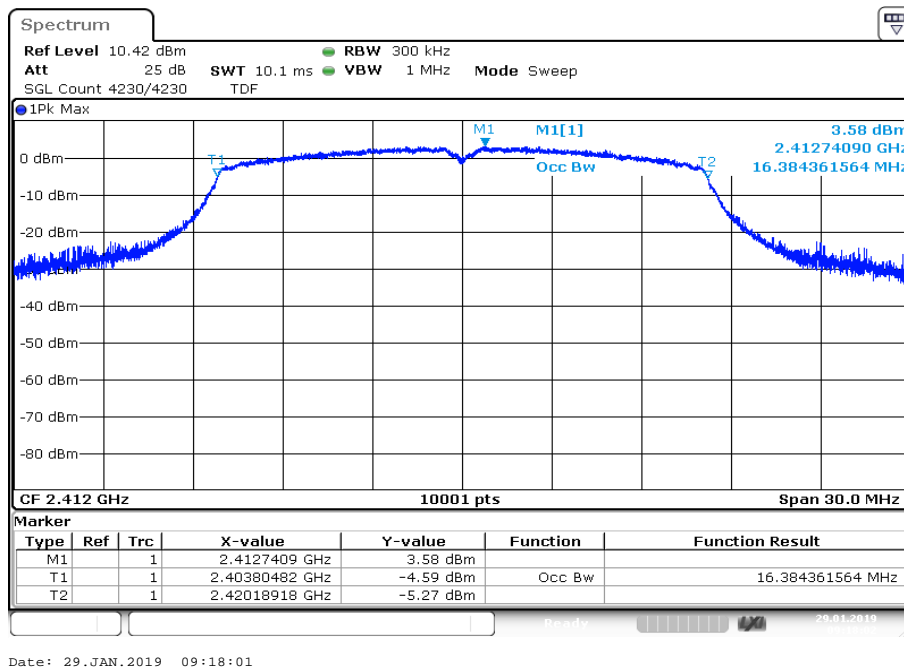
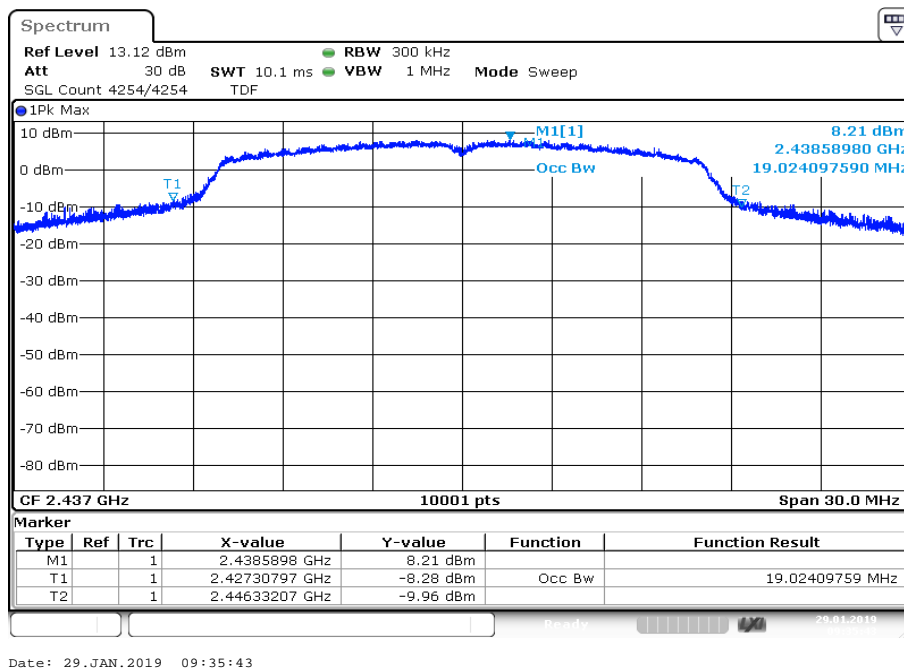
-/-	IC
OBW is necessary for Emission Designator	

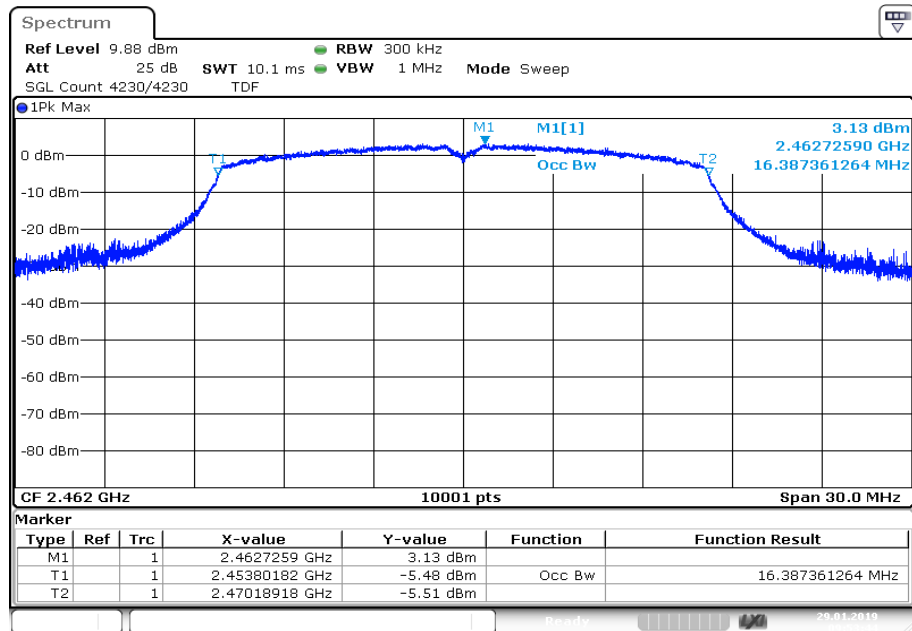
Results:

	99% emission bandwidth / kHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	14534	14546	14531
OFDM / g – mode	16384	19024	16387
OFDM / n HT20 – mode	17530	18586	17530
OFDM / n HT40 – mode	35840	37268	35852

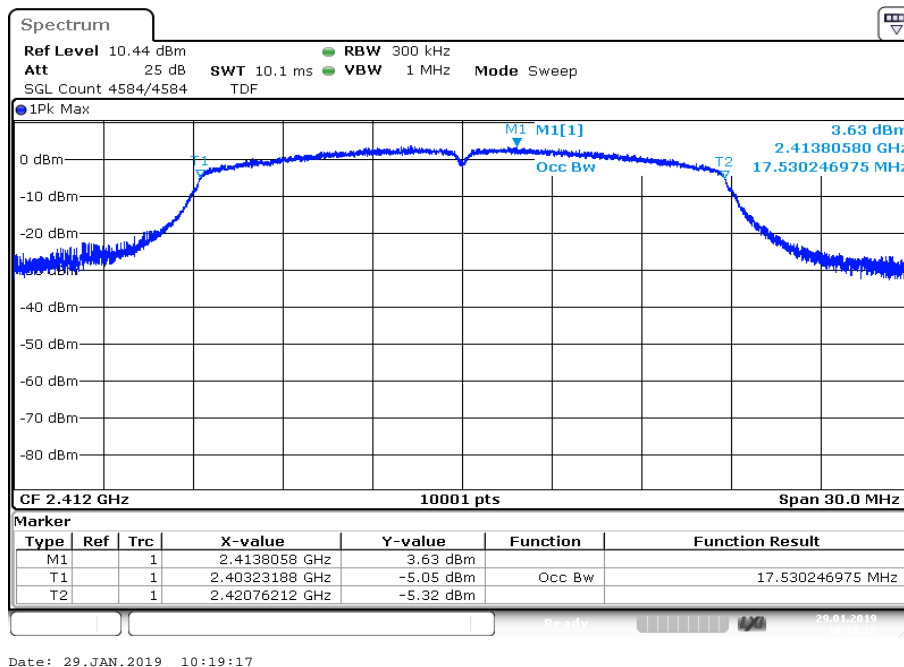
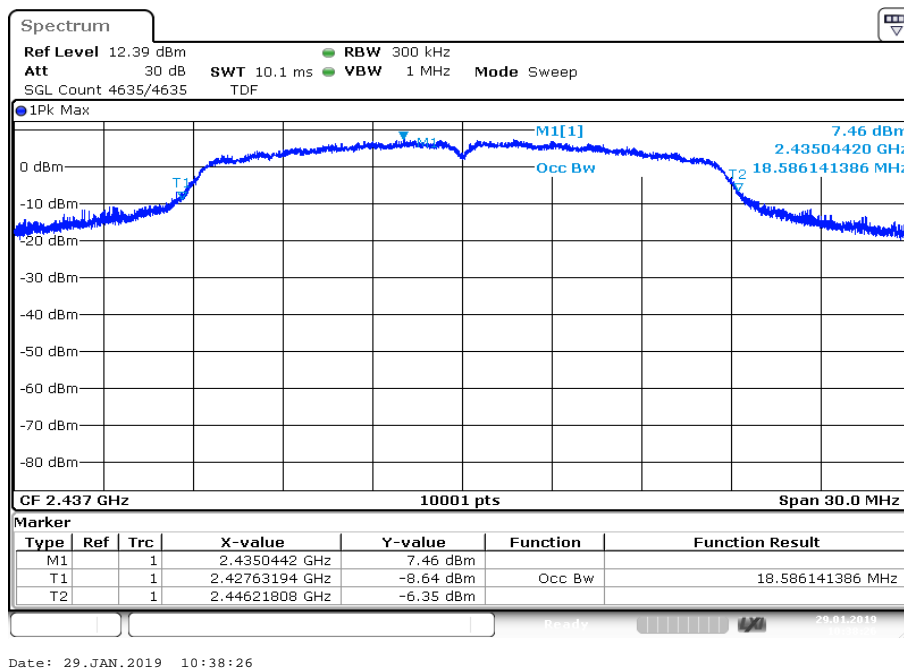
Plots: DSSS / b – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

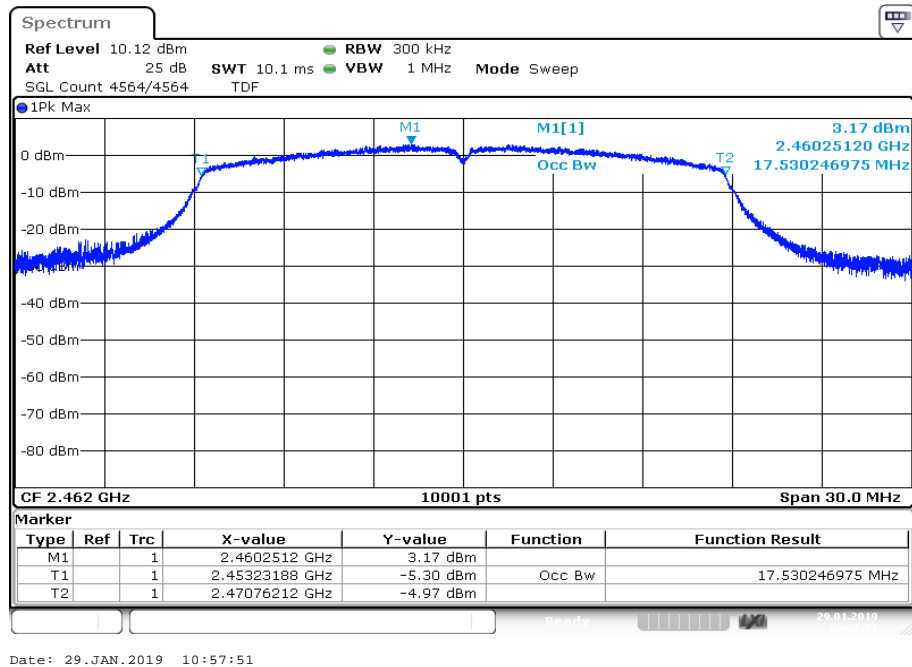
Plot 3: Highest channel

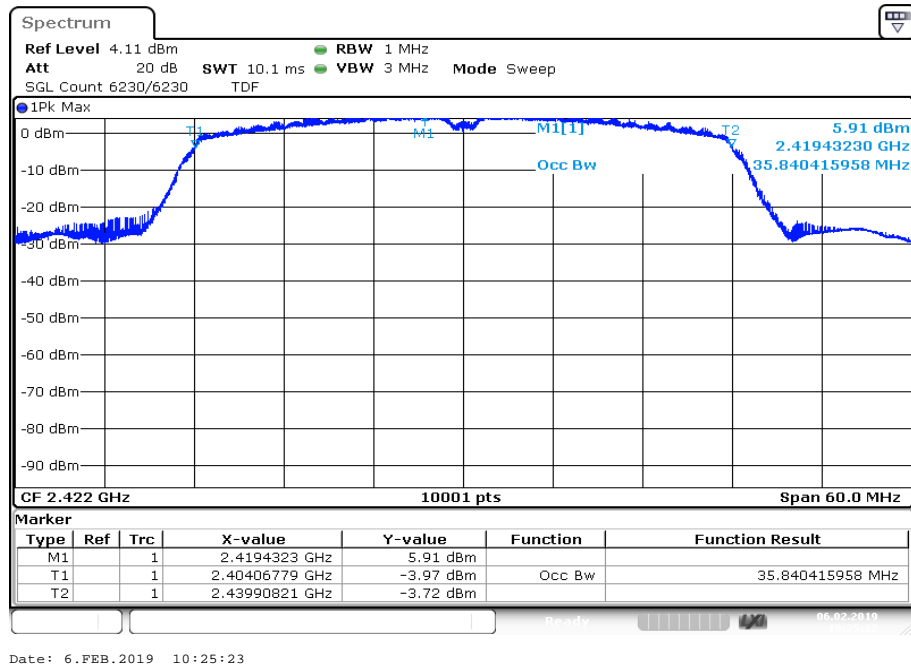
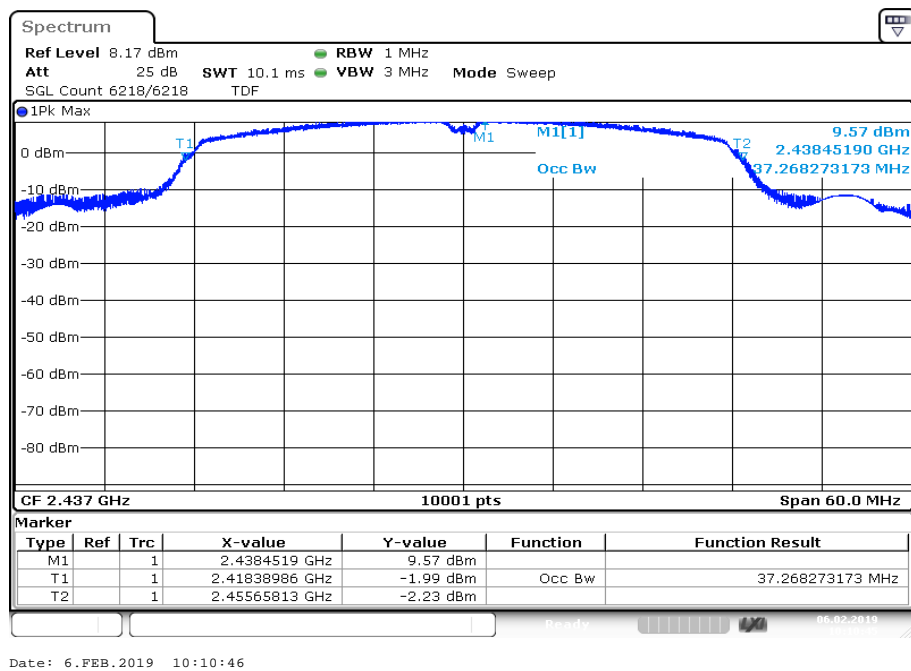
Plots: OFDM / g – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

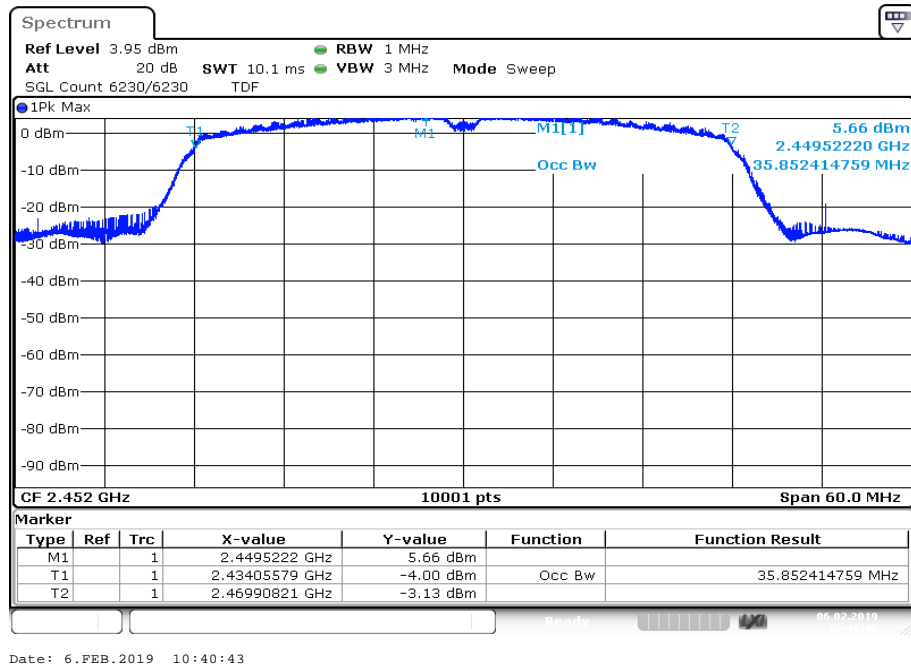
Plot 3: Highest channel

Date: 29.JAN.2019 09:53:44

Plots: OFDM / n HT20 – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

Plot 3: Highest channel

Plots: OFDM / n HT40 – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

Plot 3: Highest channel

12.8 Occupied bandwidth – 20 dB bandwidth

Description:

Measurement of the 20 dB bandwidth of the modulated carrier.

Measurement:

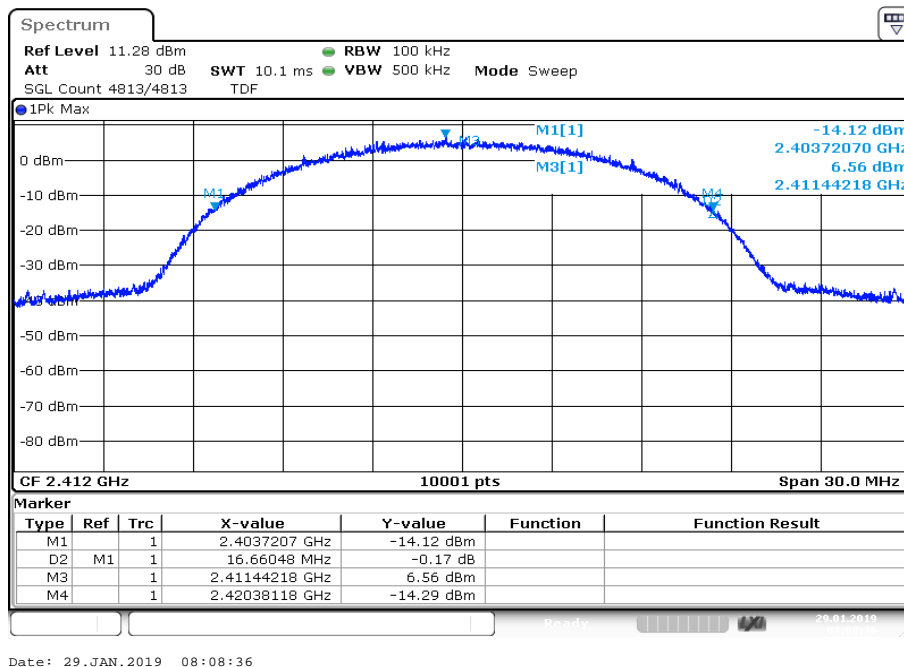
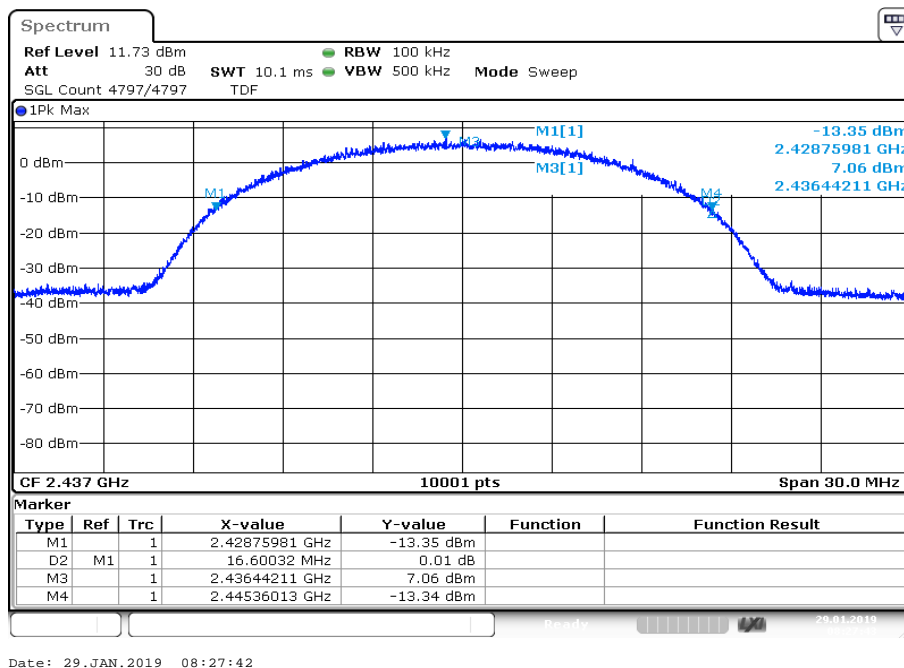
Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	30 MHz / 50 MHz
Trace mode	Single count with min. 200 counts
Test setup	See chapter 6.5 - A
Measurement uncertainty	See chapter 8

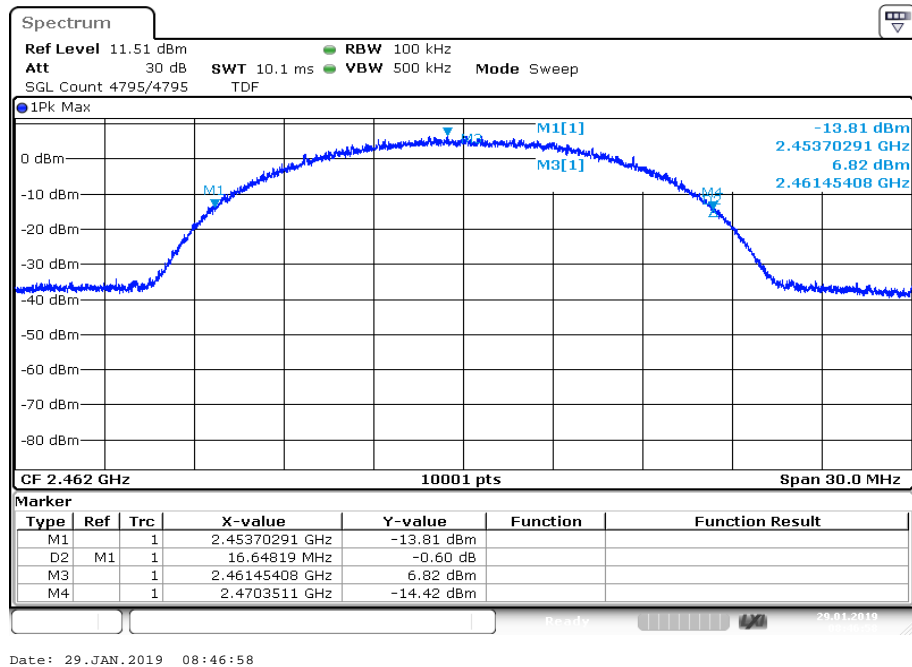
Usage:

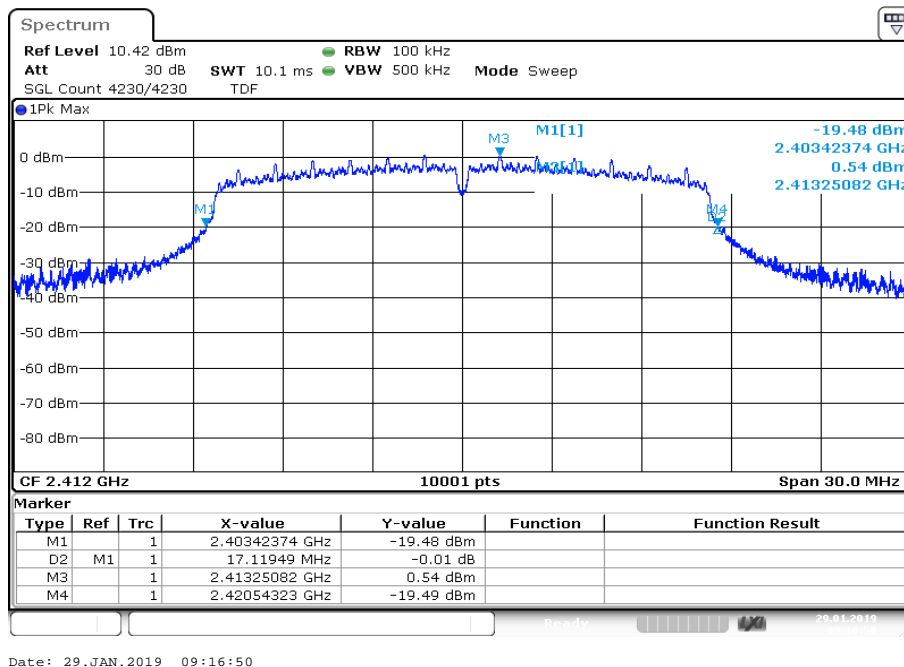
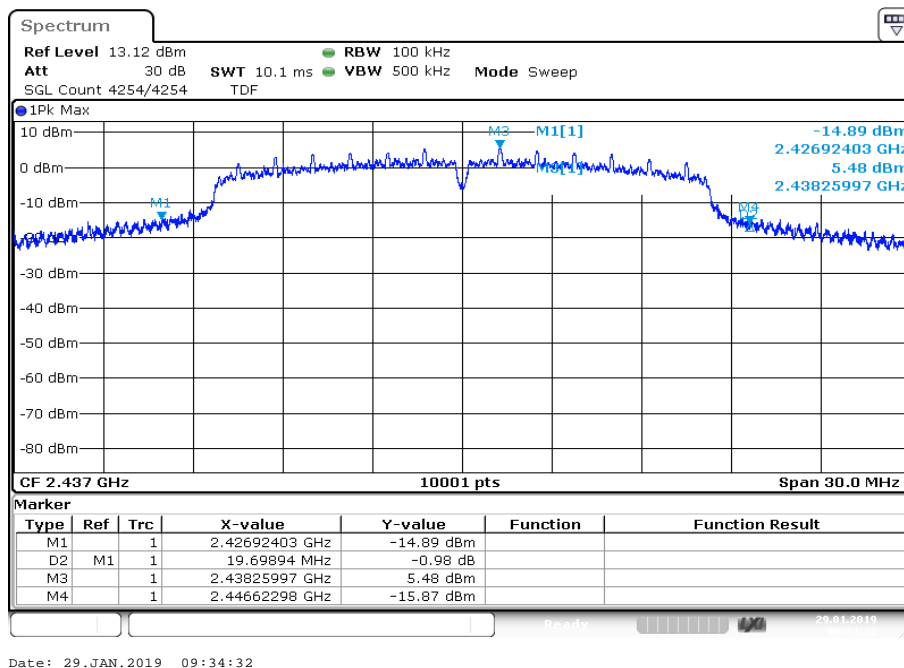
-/-	IC
Within the used band!	

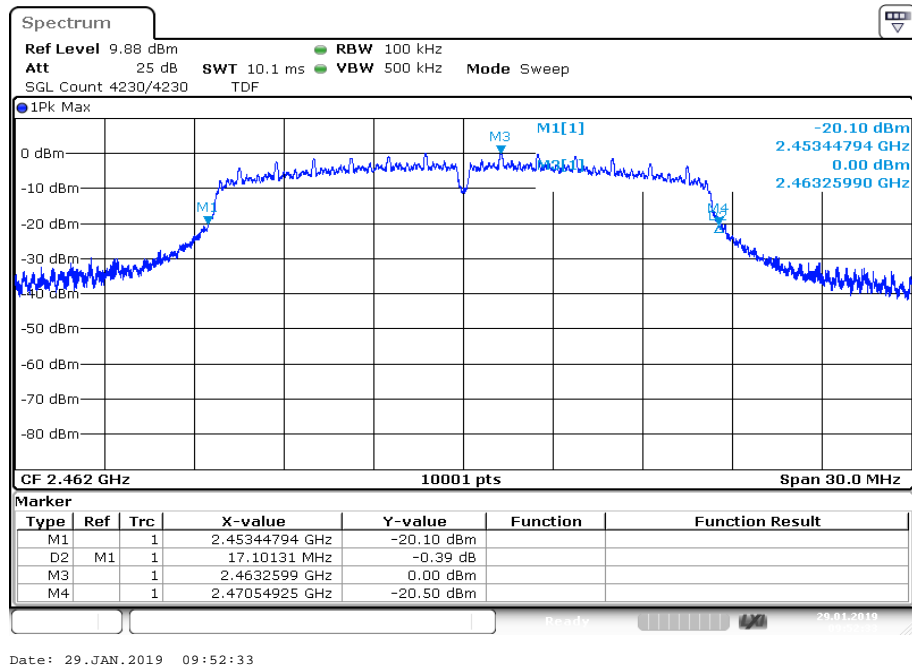
Results:

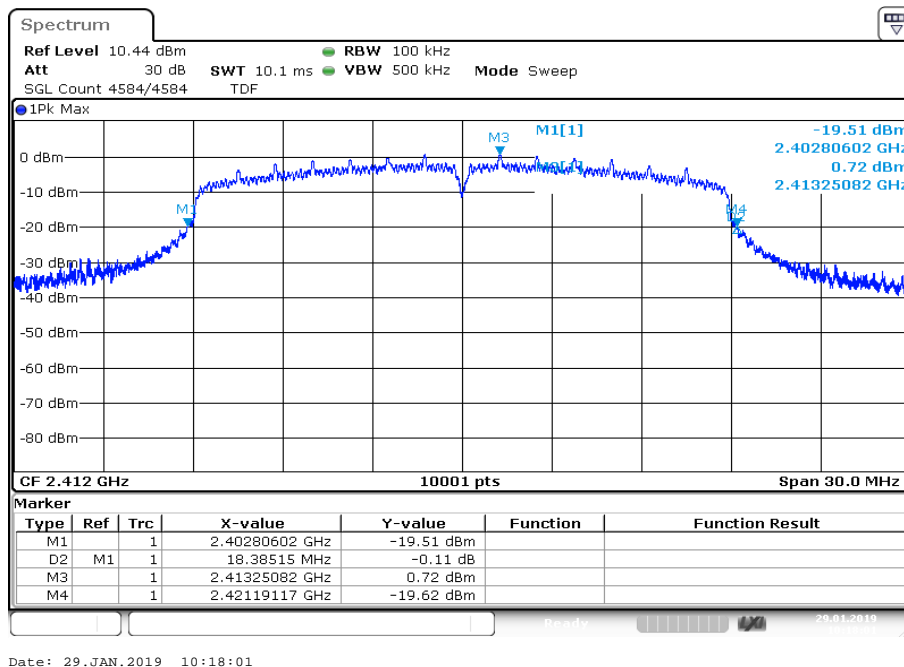
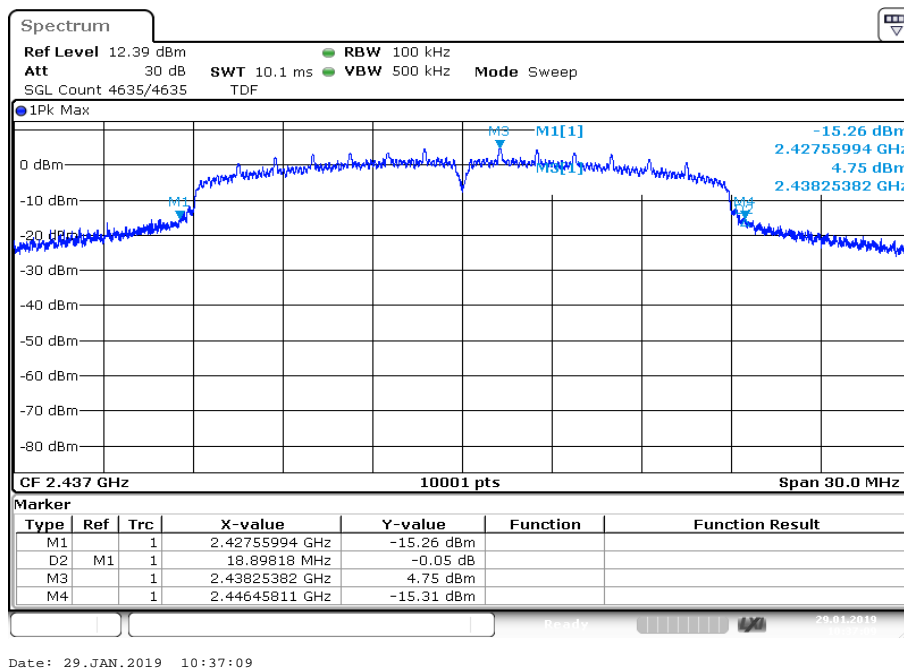
	20 dB bandwidth / MHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	16.66	16.60	16.65
OFDM / g – mode	17.12	19.70	17.10
OFDM / n HT20 – mode	18.39	18.90	18.40
OFDM / n HT40 – mode	37.02	37.07	37.02

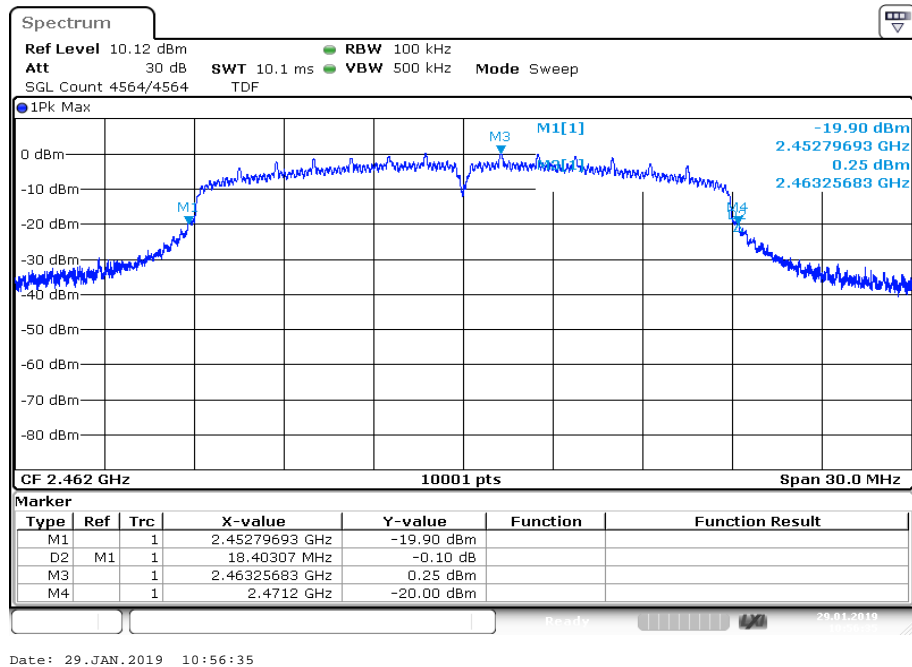
Plots: DSSS / b – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

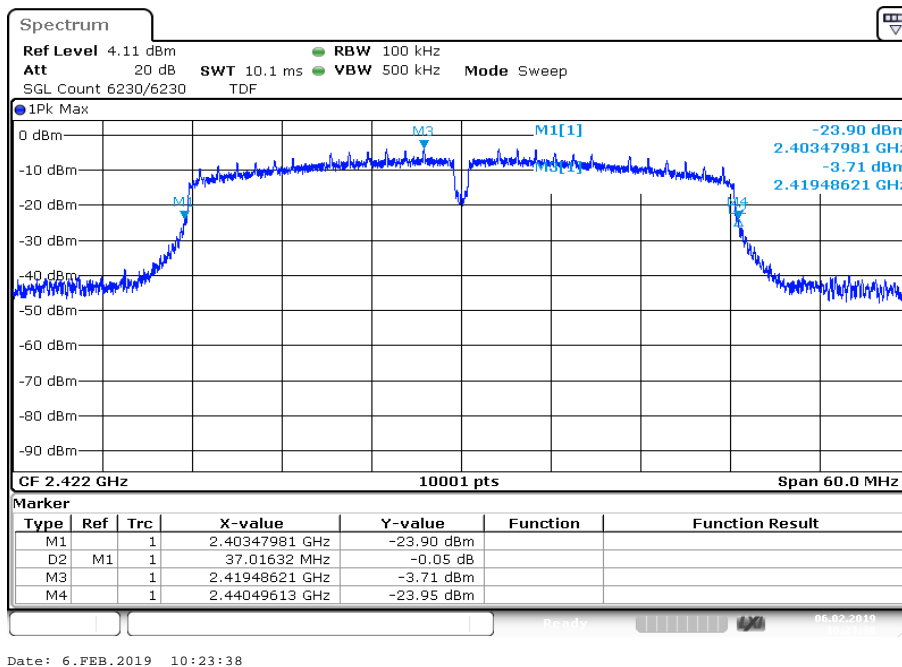
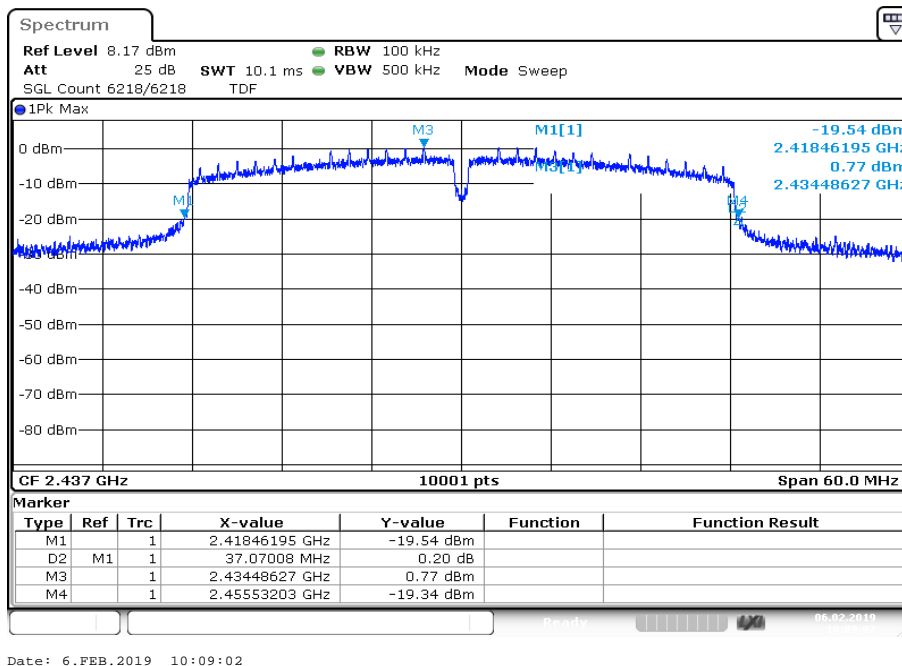
Plot 3: Highest channel

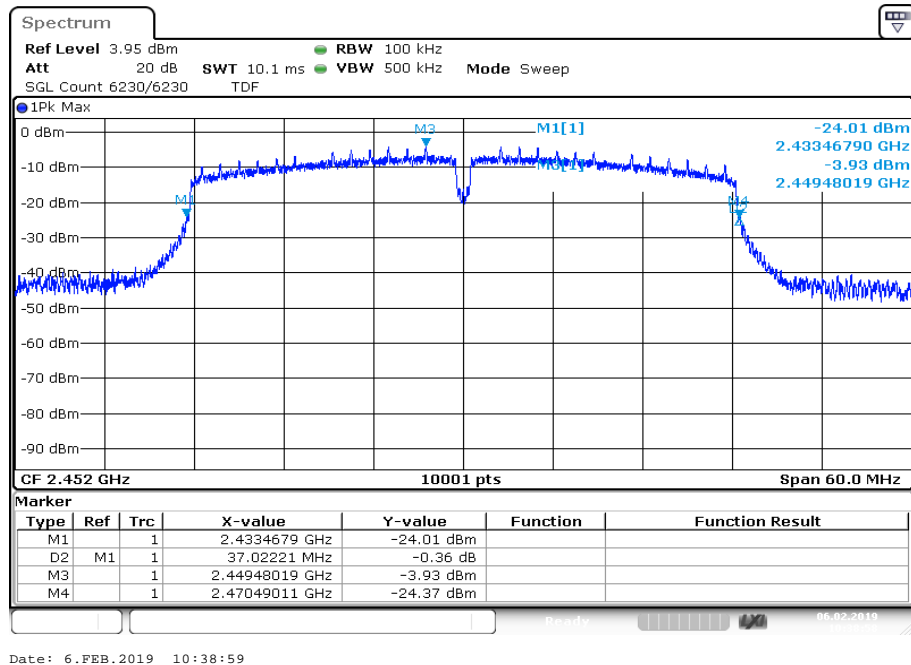
Plots: OFDM / g – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

Plot 3: Highest channel

Plots: OFDM / n HT20 – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

Plot 3: Highest channel

Plots: OFDM / n HT40 – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

Plot 3: Highest channel

12.9 Band edge compliance conducted

Description:

Measurement of the radiated band edge compliance with a conducted test setup.

Measurement:

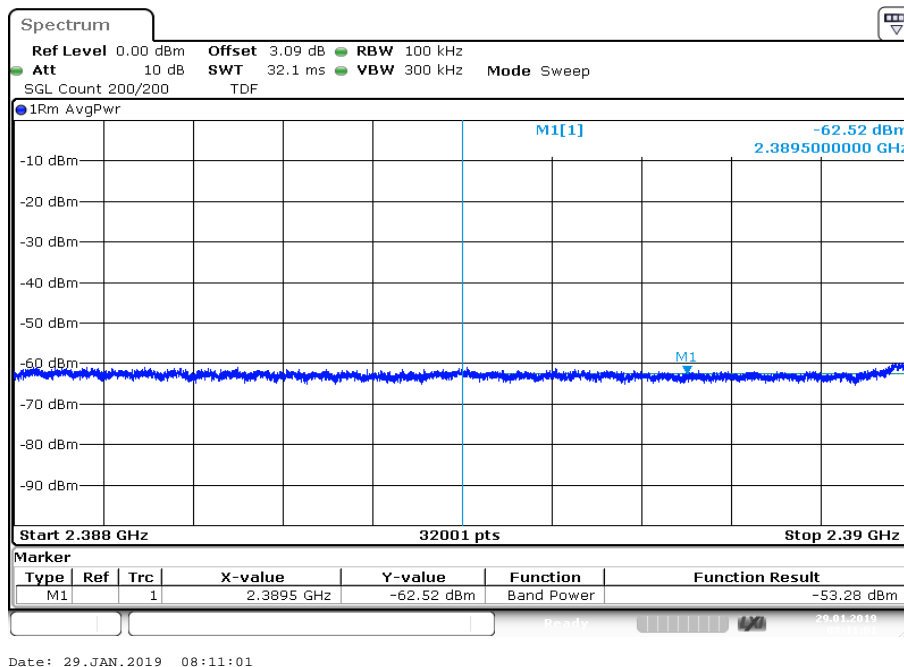
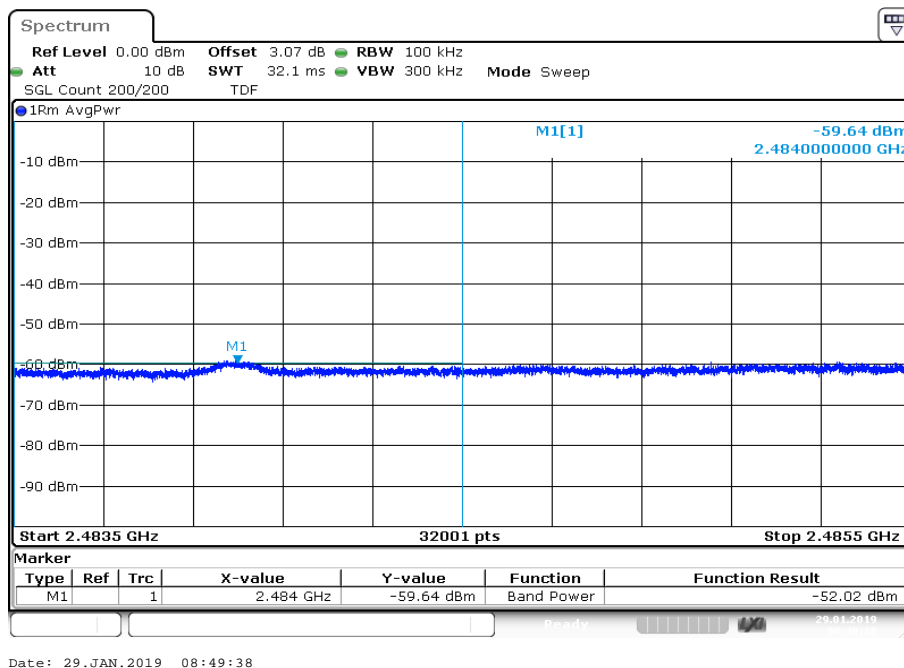
Measurement parameter for measurements				
According to DTS clause: 8.7.3 and clause 12.2.2				
Detector	RMS			
Sweep time	Auto			
Resolution bandwidth	100 kHz			
Video bandwidth	300 kHz			
Span	2 MHz			
	lower band edge	2388 MHz	to	2390 MHz
	upper band edge	2483.5 MHz	to	2485.5 MHz
Trace mode	Trace average with 200 counts			
Test setup	See chapter 6.5 - A			
Measurement uncertainty	See chapter 8			

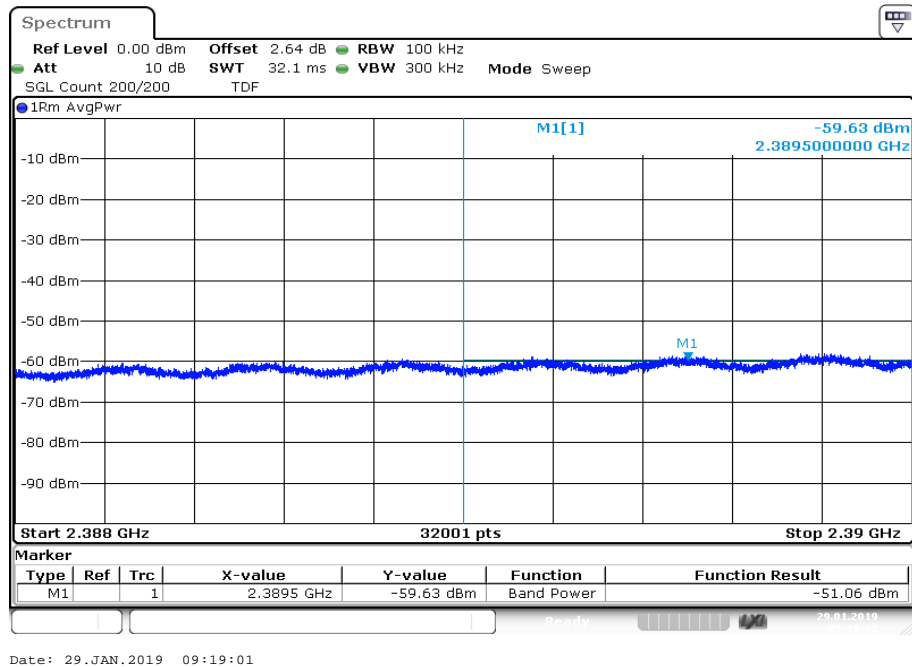
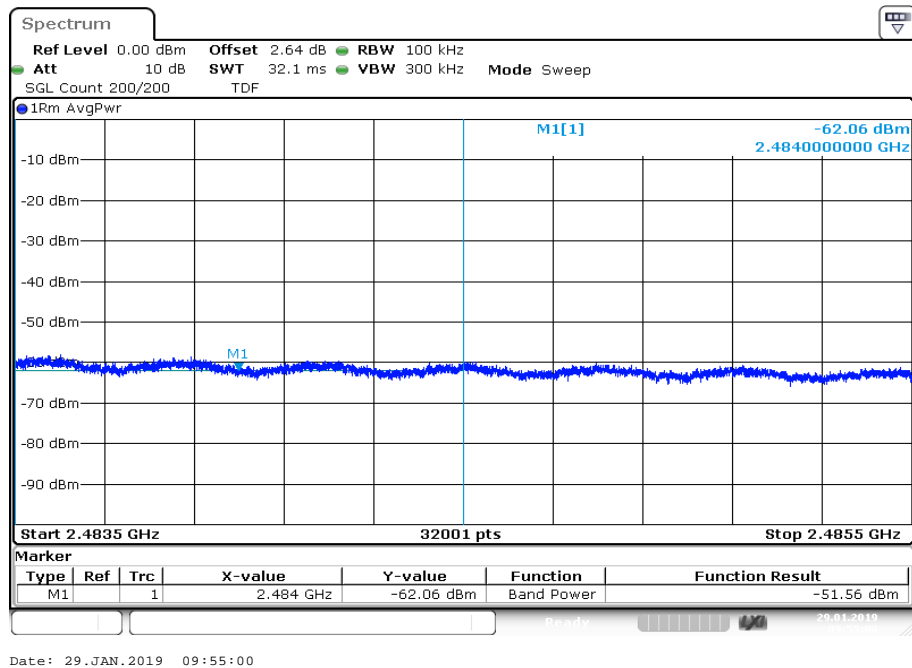
Limits:

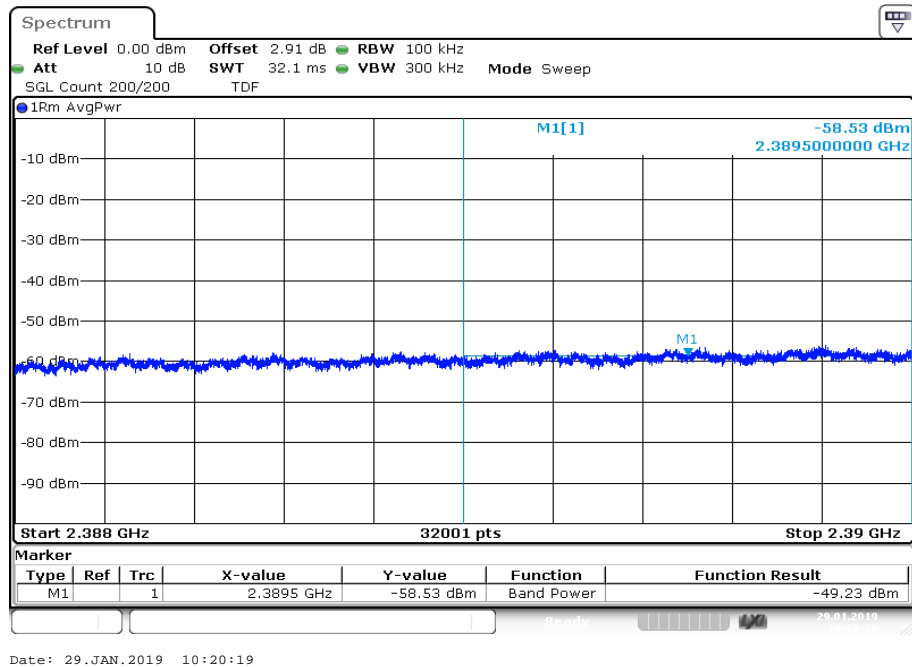
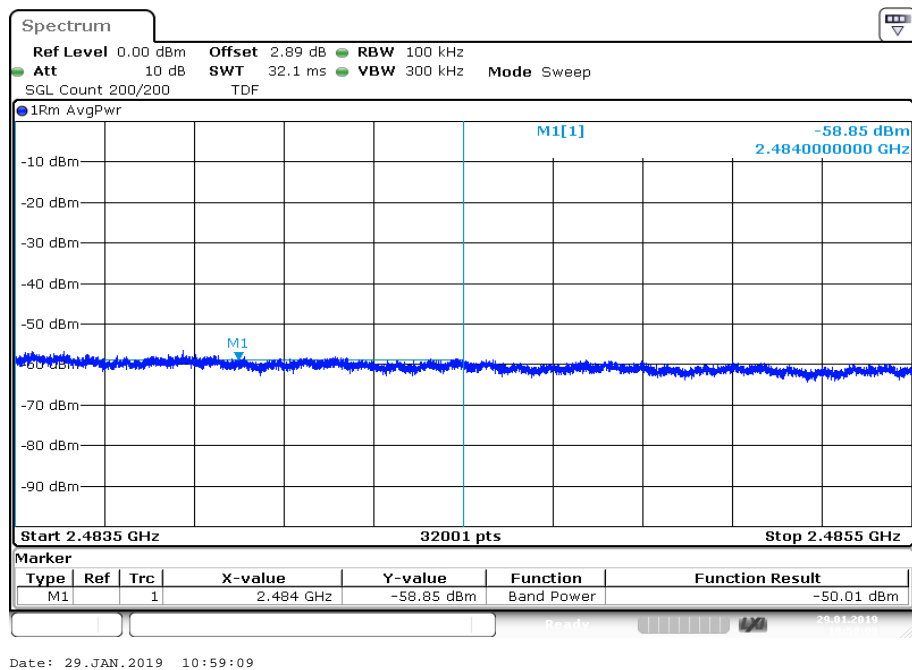
FCC	IC
-41.26 dBm	

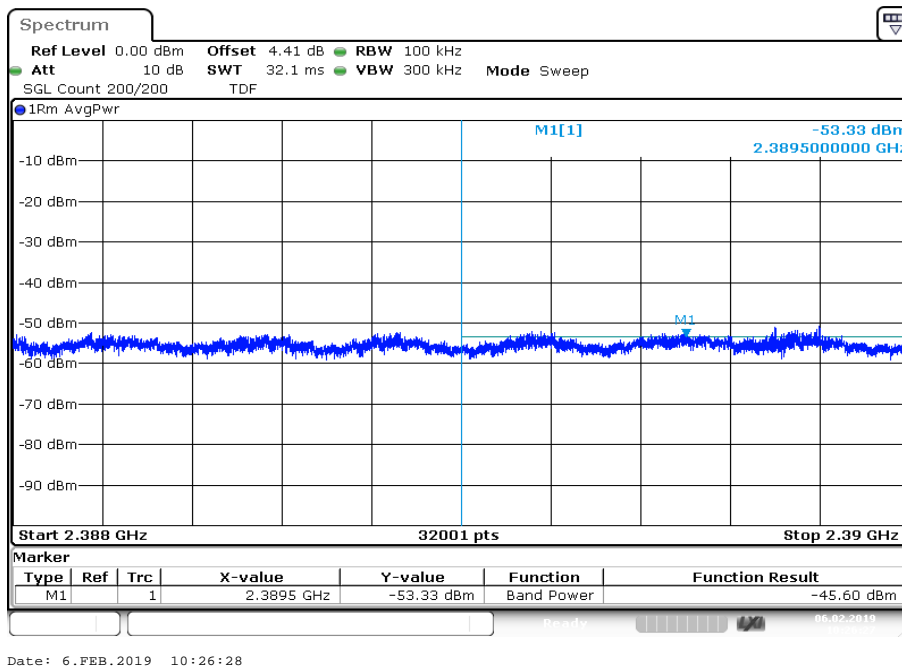
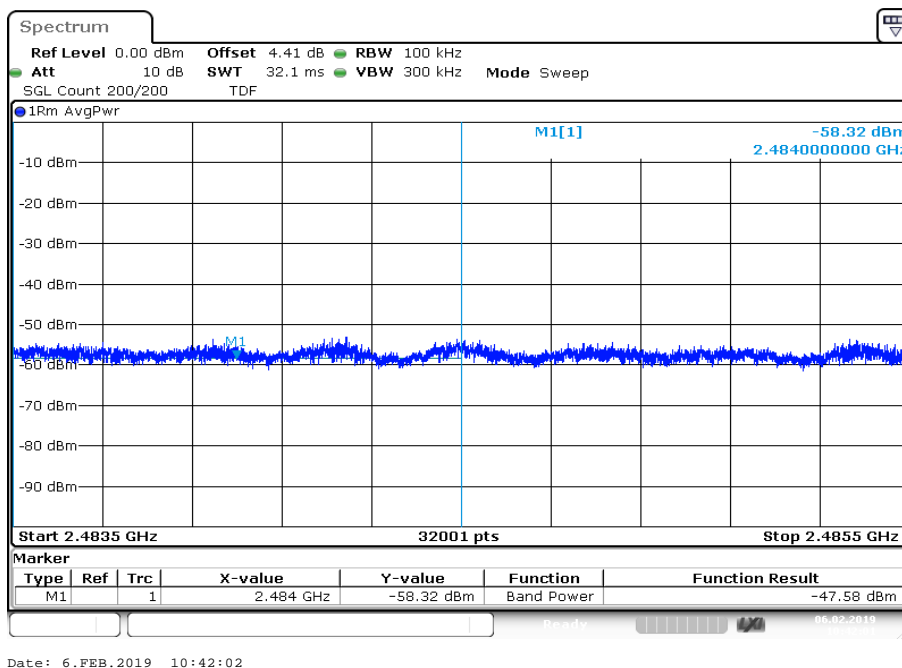
Results:

	band edge compliance / dBm (gain calculation)			
Modulation:	DSSS / b – mode	OFDM / g – mode	OFDM / n HT20 – mode	OFDM / n HT40 – mode
Max. lower band edge power conducted	-53.28	-51.06	-49.23	-45.60
Antenna gain / dBi	2.2			
Max. lower band edge power radiated	-51.08	-48.86	-47.03	-43.40
Max. upper band edge power conducted	-52.02	-51.56	-50.01	-47.58
Antenna gain / dBi	2.1			
Max. upper band edge power radiated	-49.92	-49.46	-47.91	-45.48

Plots: DSSS / b – mode**Plot 1:** Lower band edge**Plot 2:** Upper band edge

Plots: OFDM / g – mode**Plot 1:** Lower band edge**Plot 2:** Upper band edge

Plots: OFDM / n HT20 – mode**Plot 1:** Lower band edge**Plot 2:** Upper band edge

Plots: OFDM / n HT40 – mode**Plot 1:** Lower band edge**Plot 2:** Upper band edge

12.10 Spurious emissions conducted

Description:

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at the lowest; the middle and the highest channel. The measurement is repeated for all modulations.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	9 kHz to 25 GHz
Trace mode	Max Hold
Test setup	See chapter 6.5 - A
Measurement uncertainty	See chapter 8

Limits:

FCC	IC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required	

Results: DSSS / b – mode

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		5.11	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant
Middle channel		5.51	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant
Highest channel		5.38	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant

Results: OFDM / g – mode

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		0.16	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant
Middle channel		5.69	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant
Highest channel		0.53	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant

Results: OFDM / n HT20 – mode

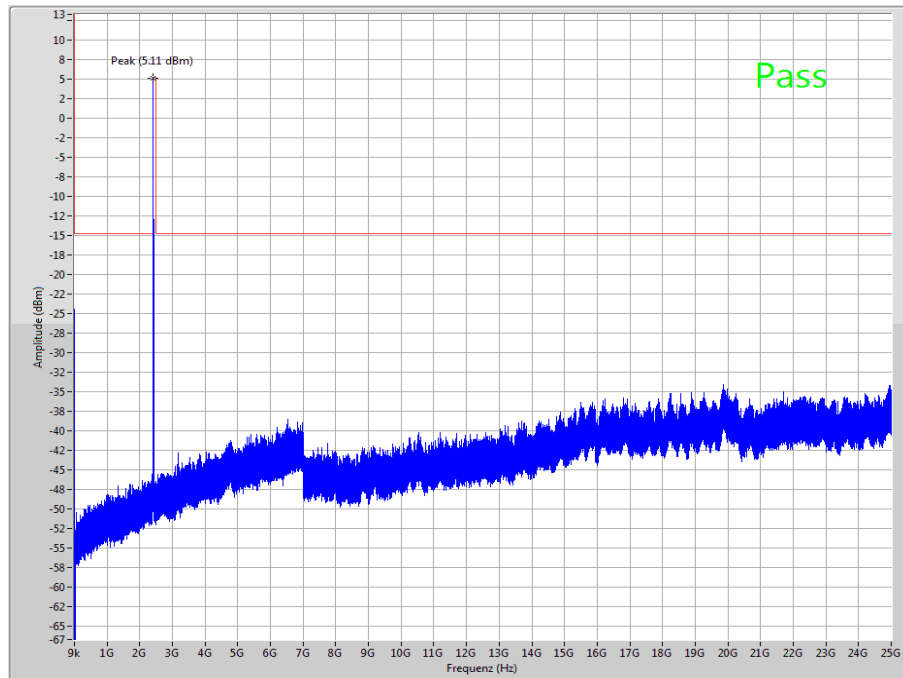
TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		1.14	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant
Middle channel		4.41	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant
Highest channel		-0.36	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant

Results: OFDM / n HT40 – mode

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		-3.32	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant
Middle channel		-3.45	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant
Highest channel		0.7	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant

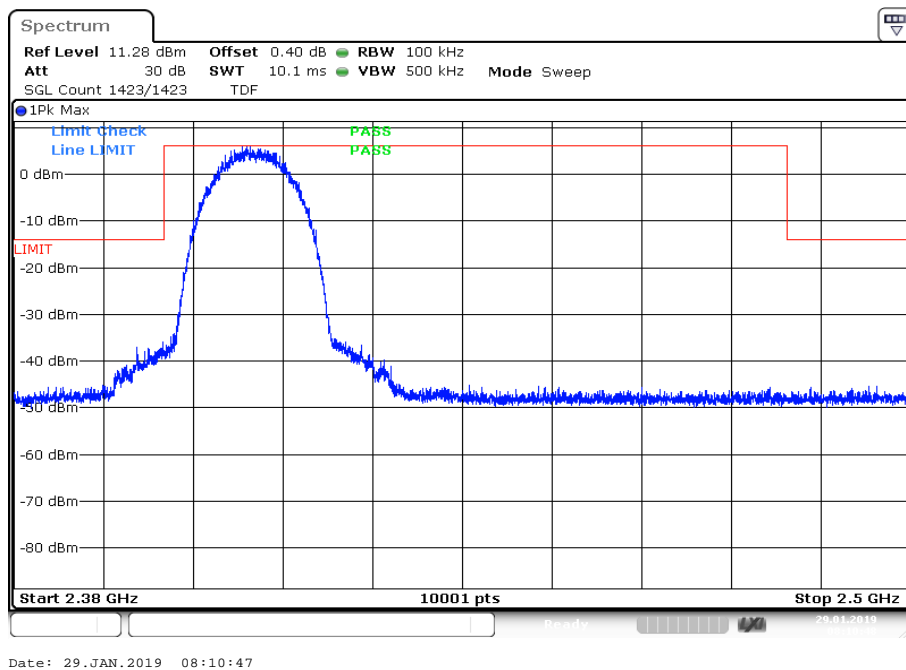
Plots: DSSS / b – mode

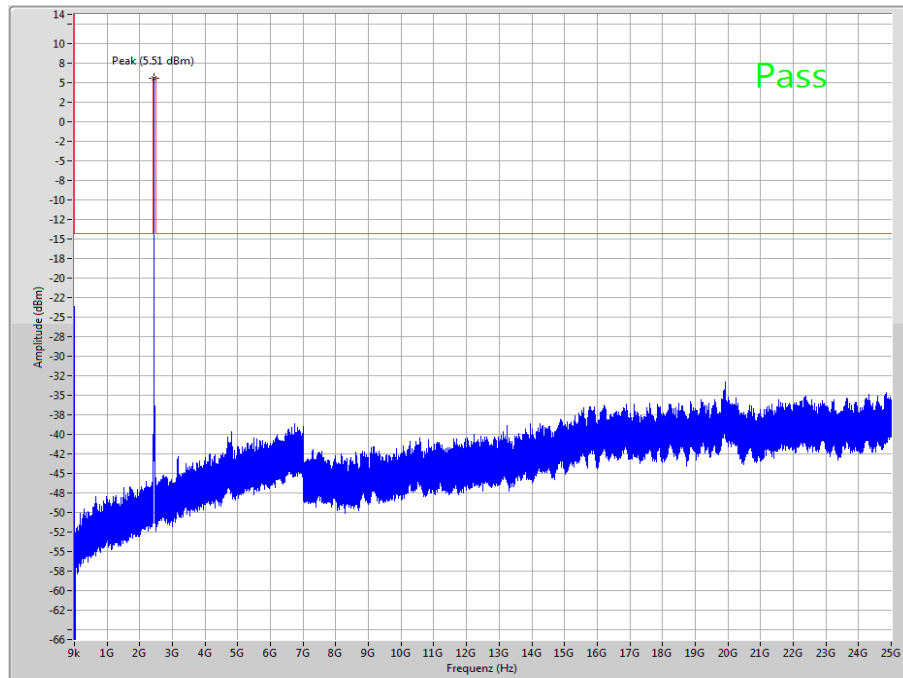
Plot 1: Lowest channel, up to 25 GHz



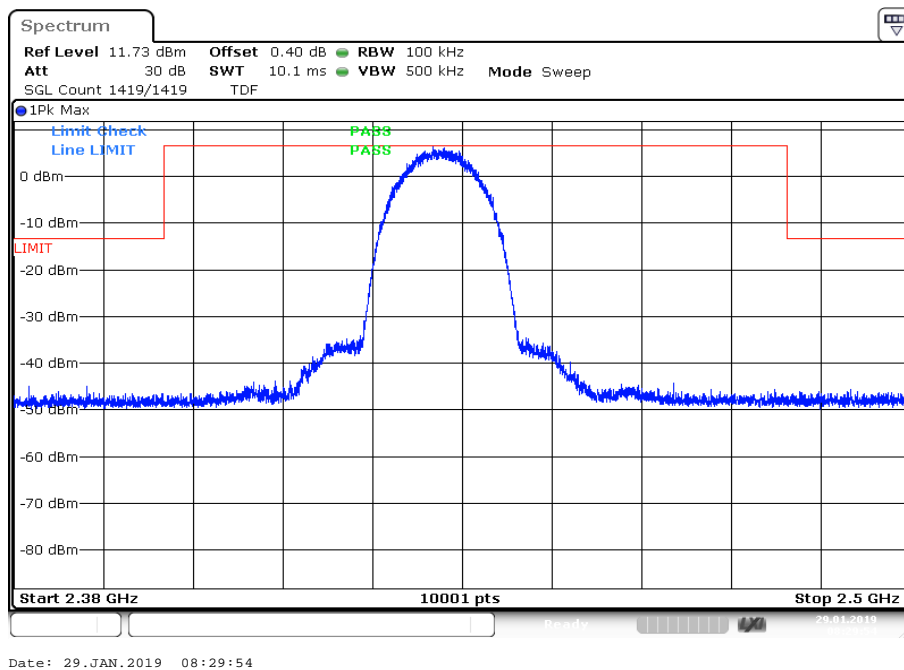
The peak at the beginning of the plot is the LO from the SA.

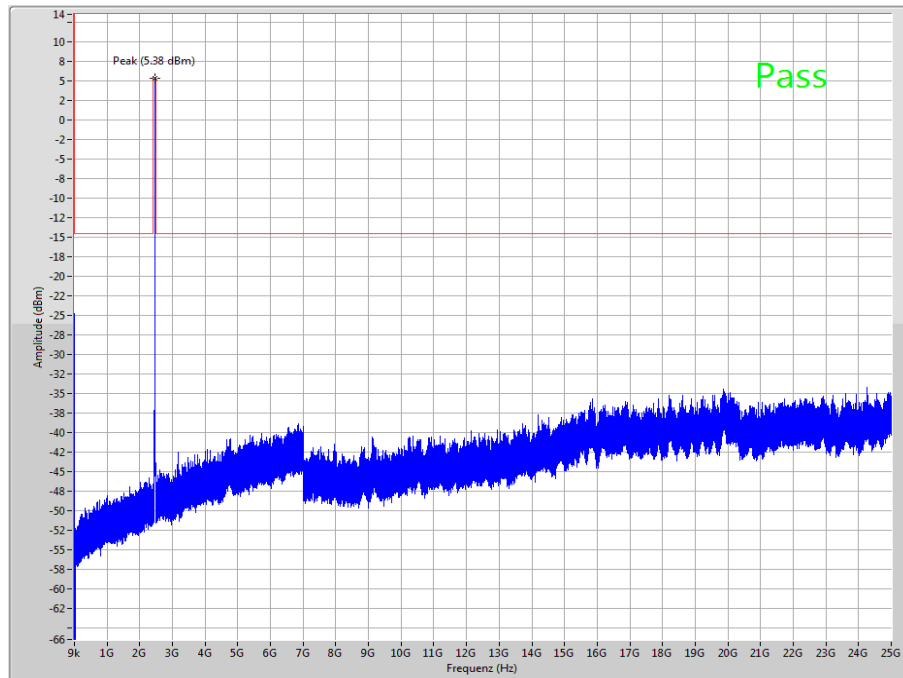
Plot 2: Lowest channel, zoomed carrier



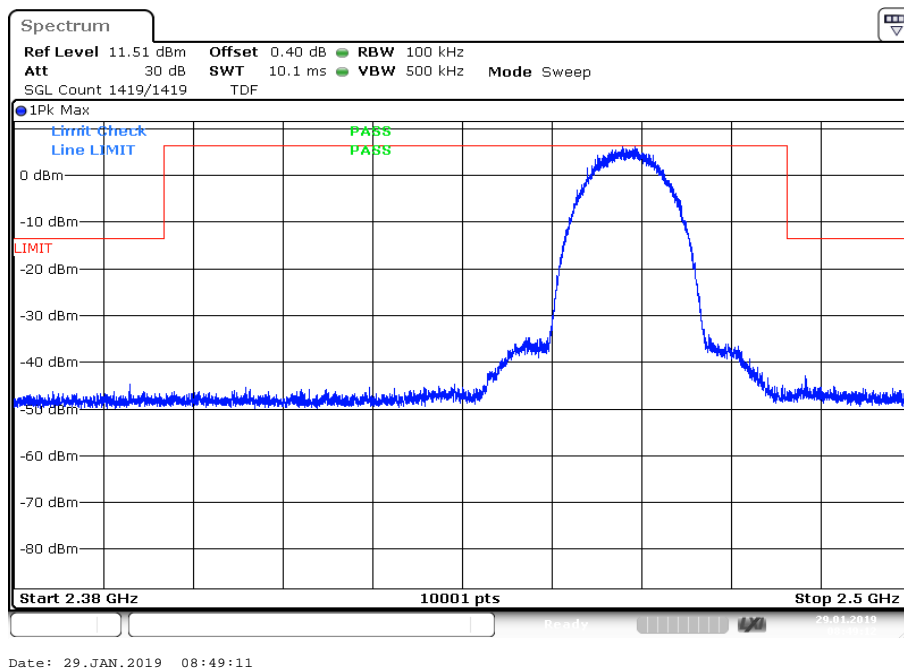
Plot 3: Middle channel, up to 25 GHz

The peak at the beginning of the plot is the LO from the SA.

Plot 4: Middle channel, zoomed carrier

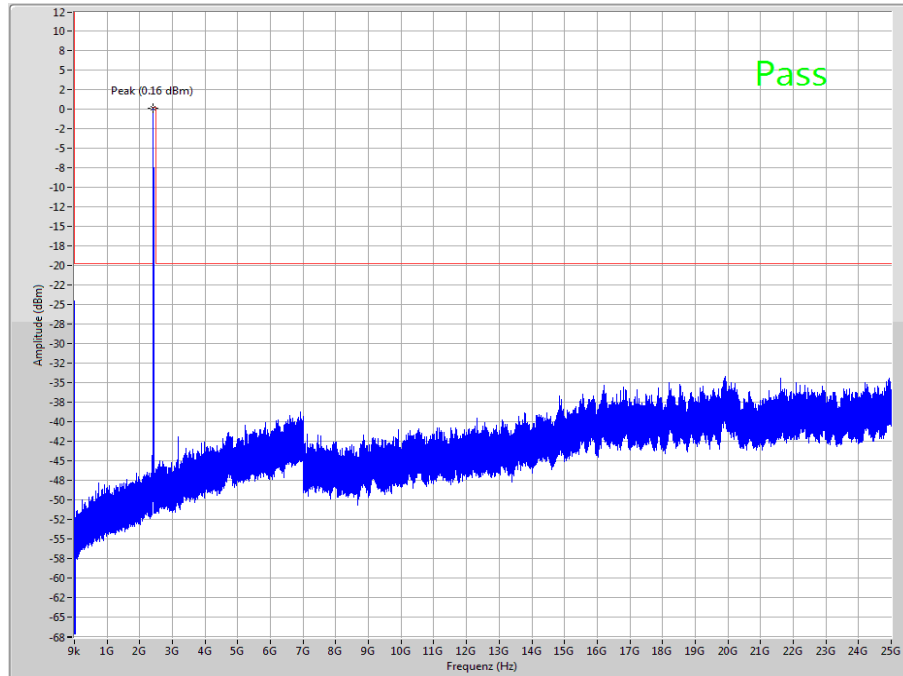
Plot 5: Highest channel, up to 25 GHz

The peak at the beginning of the plot is the LO from the SA.

Plot 6: Highest channel, zoomed carrier

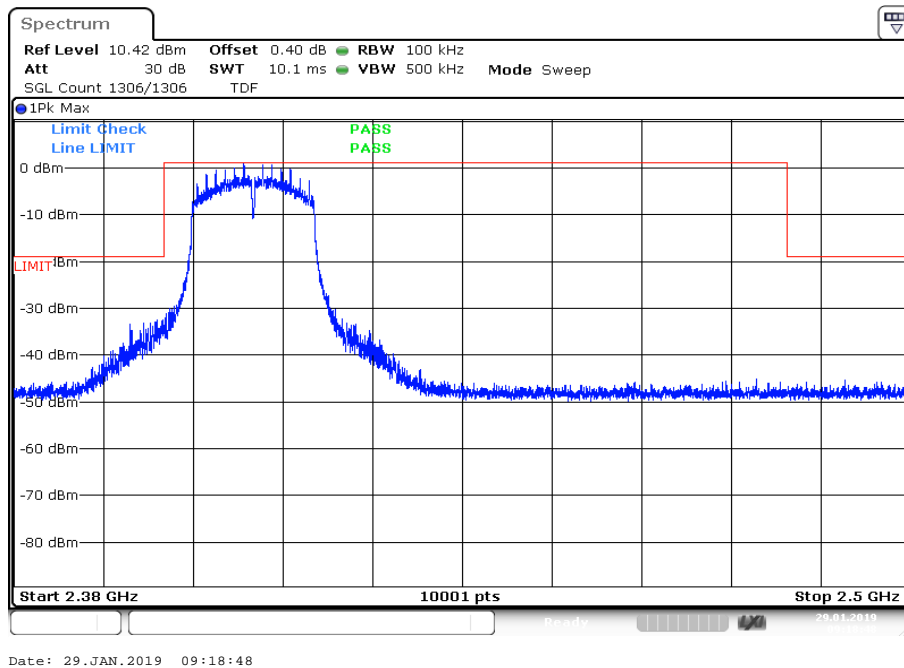
Plots: OFDM / g – mode

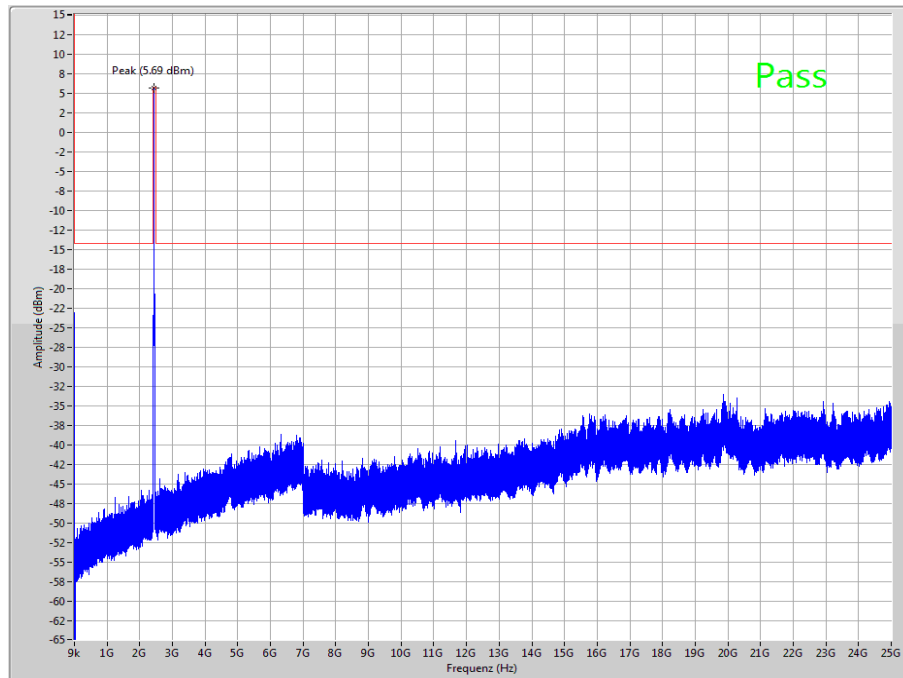
Plot 1: Lowest channel, up to 25 GHz



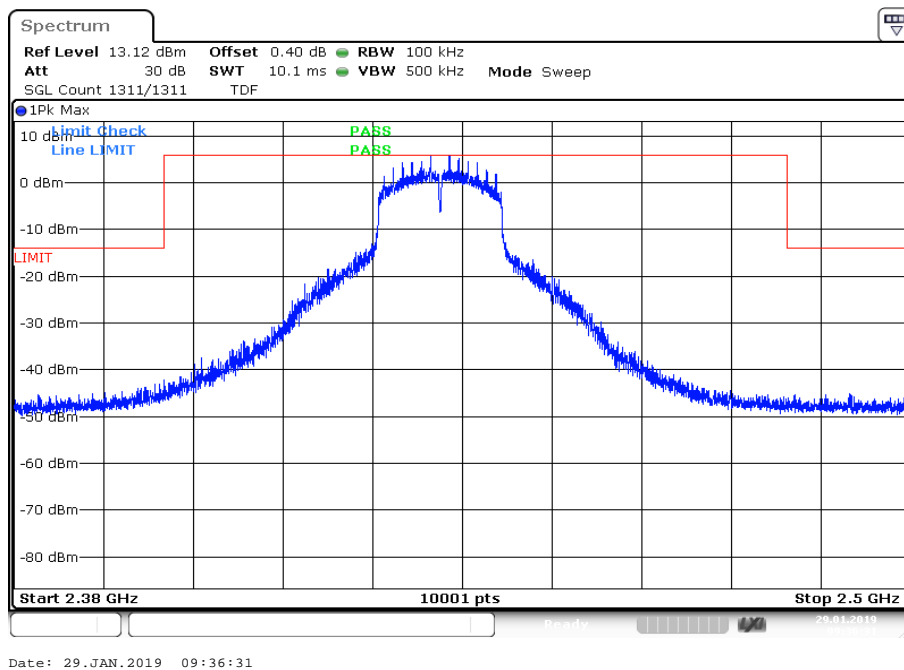
The peak at the beginning of the plot is the LO from the SA.

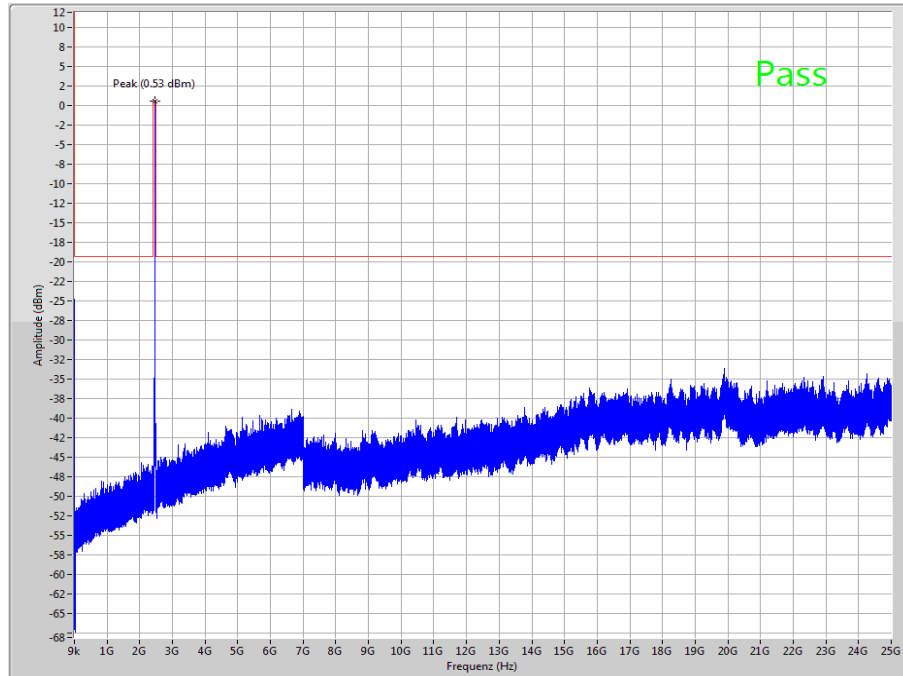
Plot 2: Lowest channel, zoomed carrier



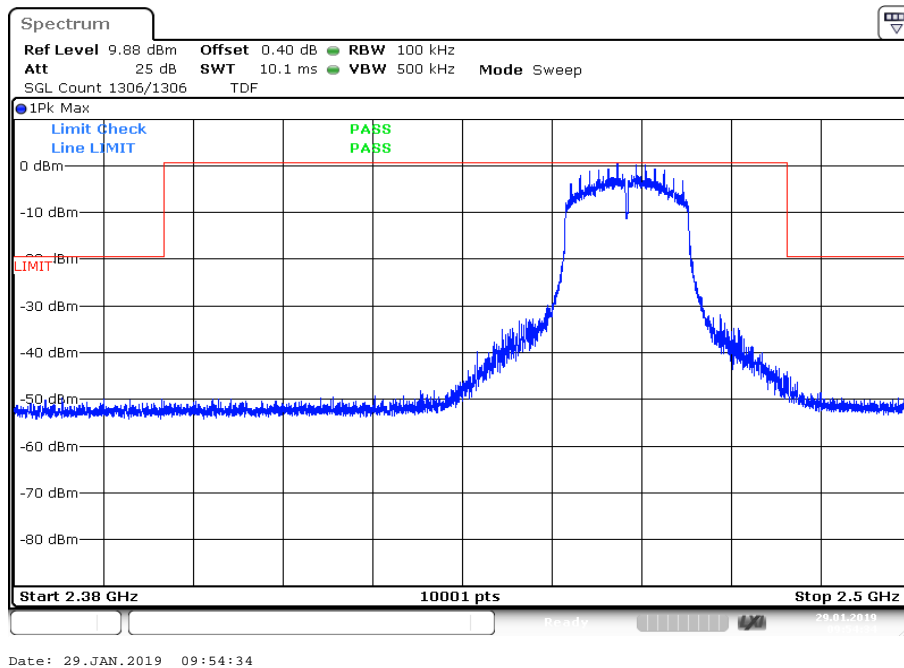
Plot 3: Middle channel, up to 25 GHz

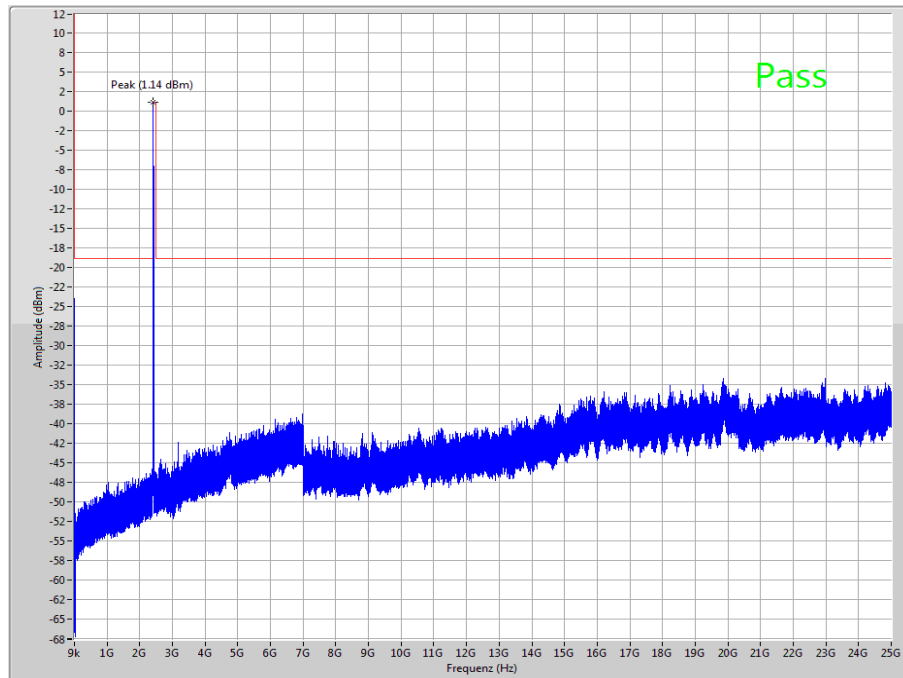
The peak at the beginning of the plot is the LO from the SA.

Plot 4: Middle channel, zoomed carrier

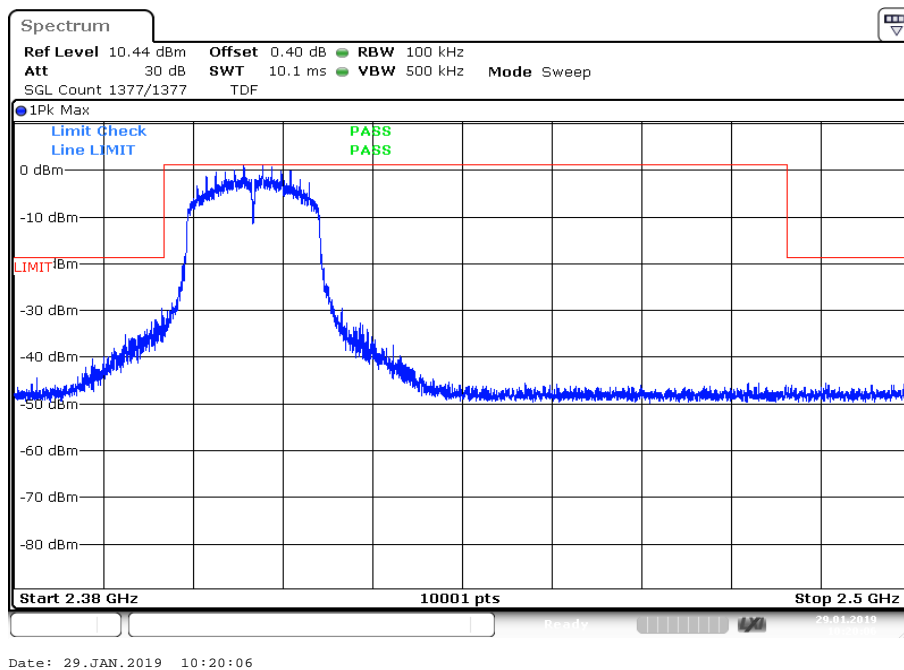
Plot 5: Highest channel, up to 25 GHz

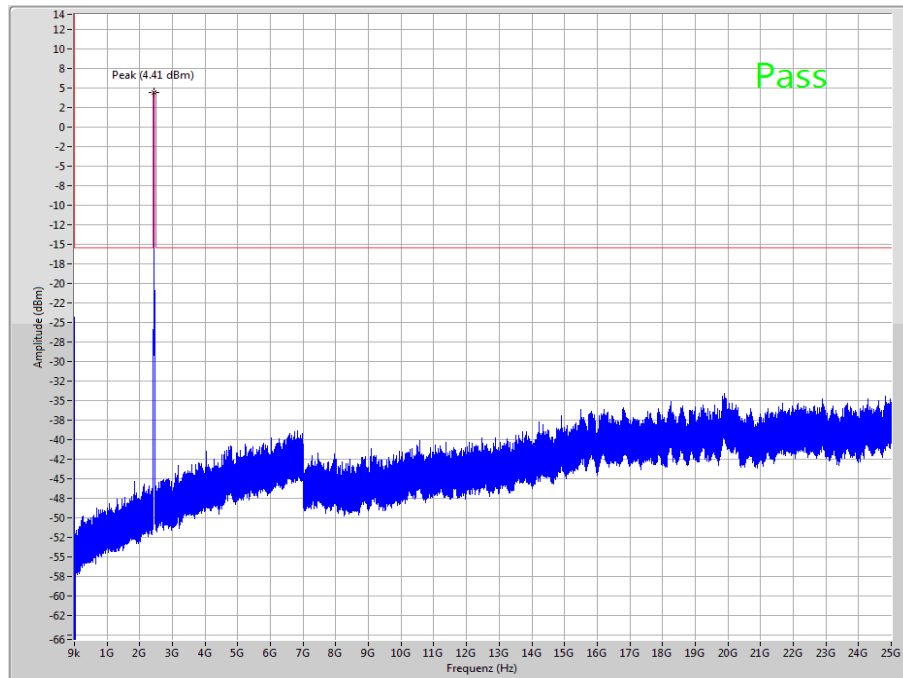
The peak at the beginning of the plot is the LO from the SA.

Plot 6: Highest channel, zoomed carrier

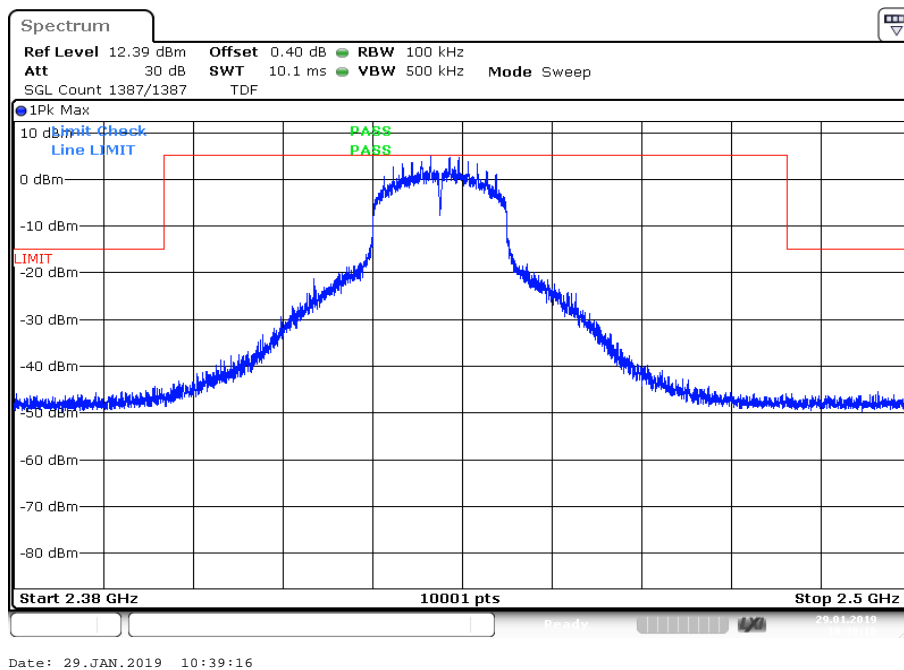
Plots: OFDM / n HT 20 – mode**Plot 1:** Lowest channel, up to 25 GHz

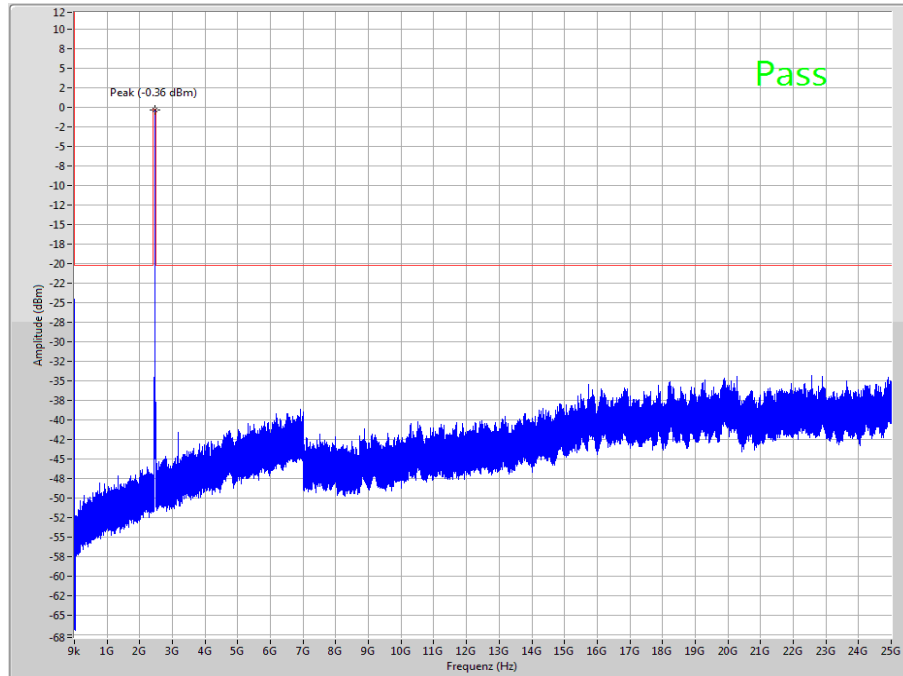
The peak at the beginning of the plot is the LO from the SA.

Plot 2: Lowest channel, zoomed carrier

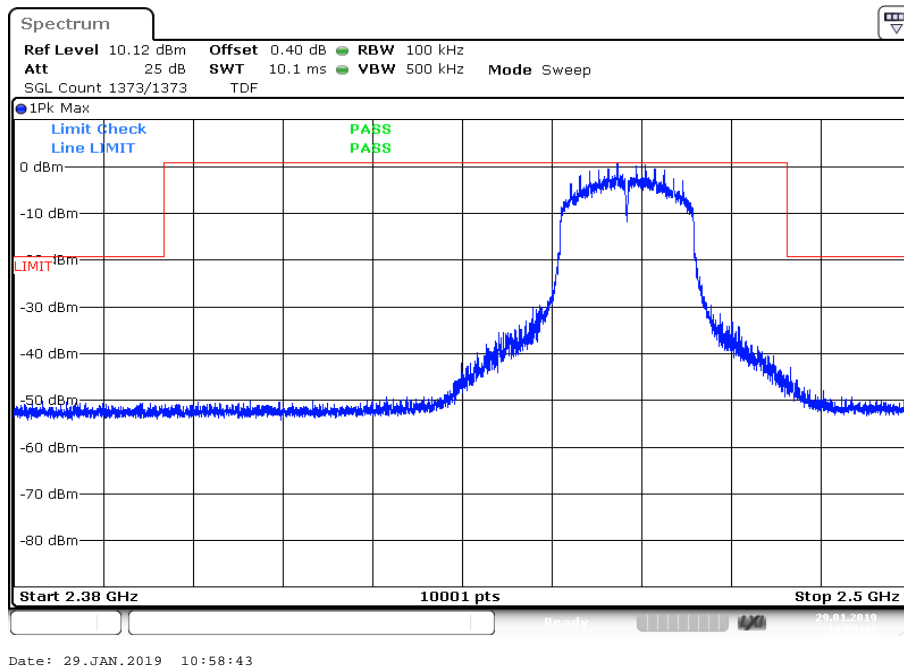
Plot 3: Middle channel, up to 25 GHz

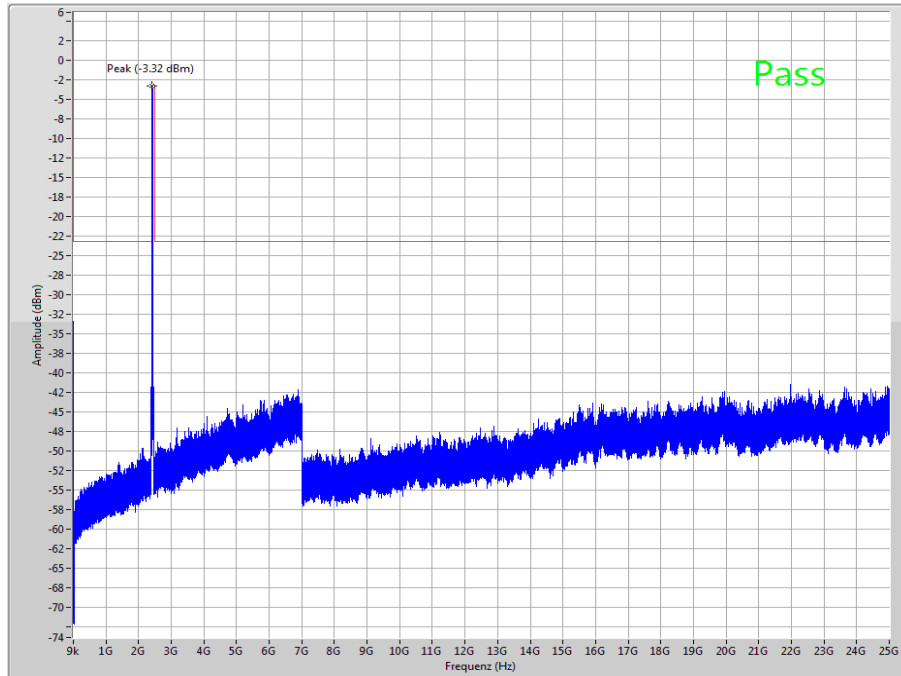
The peak at the beginning of the plot is the LO from the SA.

Plot 4: Middle channel, zoomed carrier

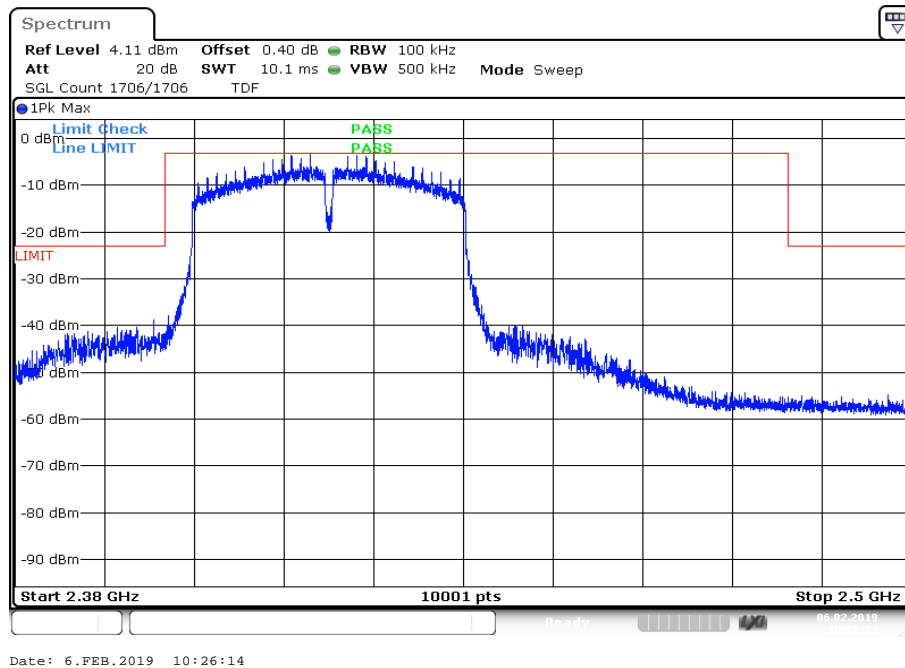
Plot 5: Highest channel, up to 25 GHz

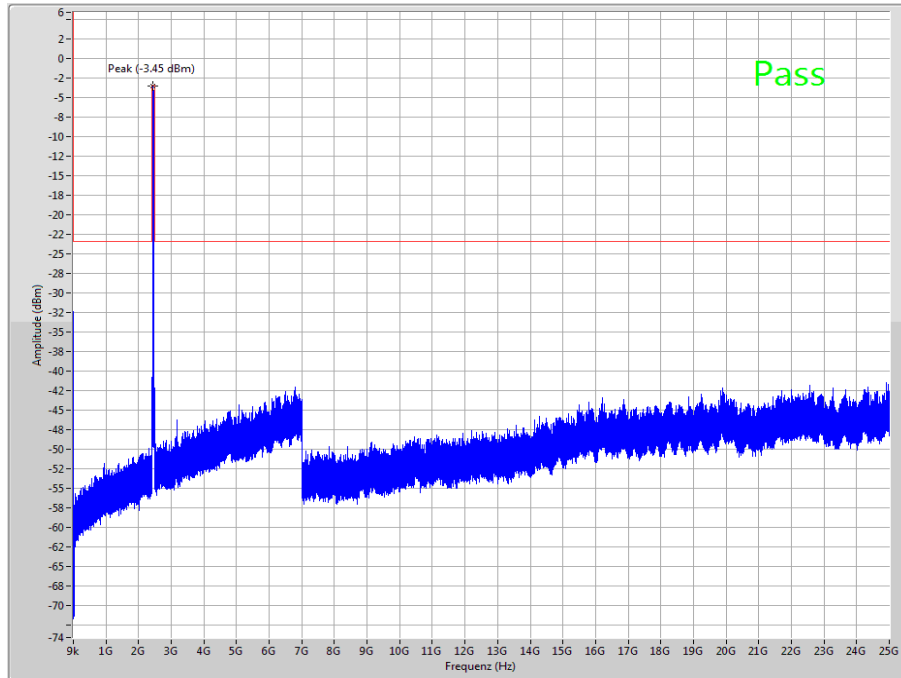
The peak at the beginning of the plot is the LO from the SA.

Plot 6: Highest channel, zoomed carrier

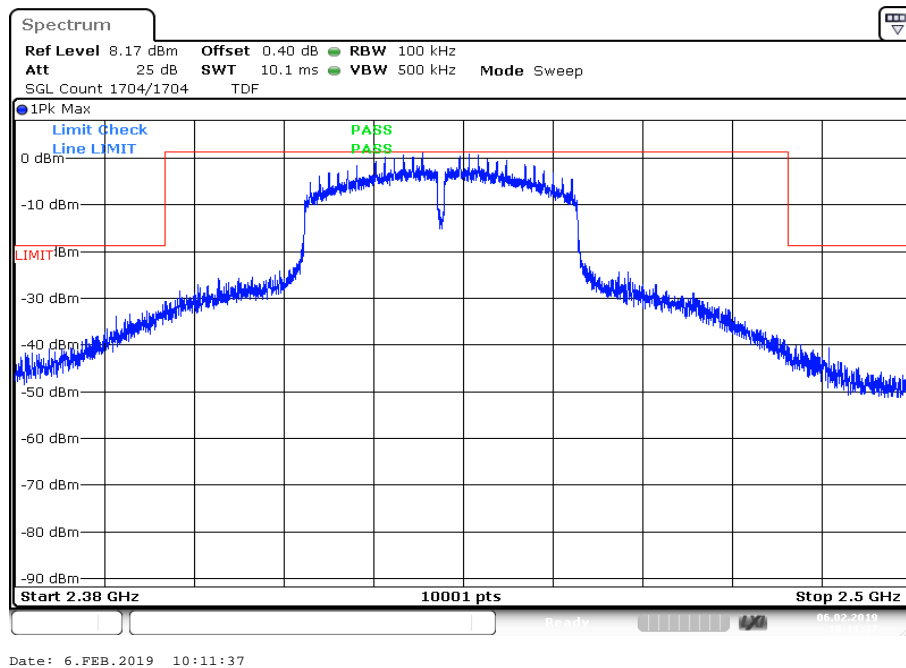
Plots: OFDM / n HT 40 – mode**Plot 1:** Lowest channel, up to 25 GHz

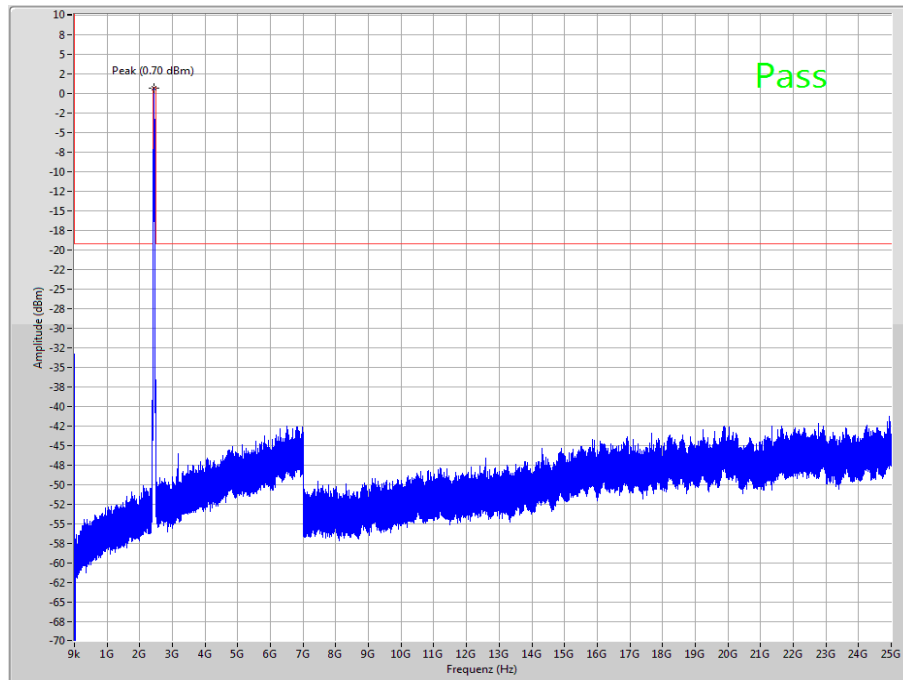
The peak at the beginning of the plot is the LO from the SA.

Plot 2: Lowest channel, zoomed carrier

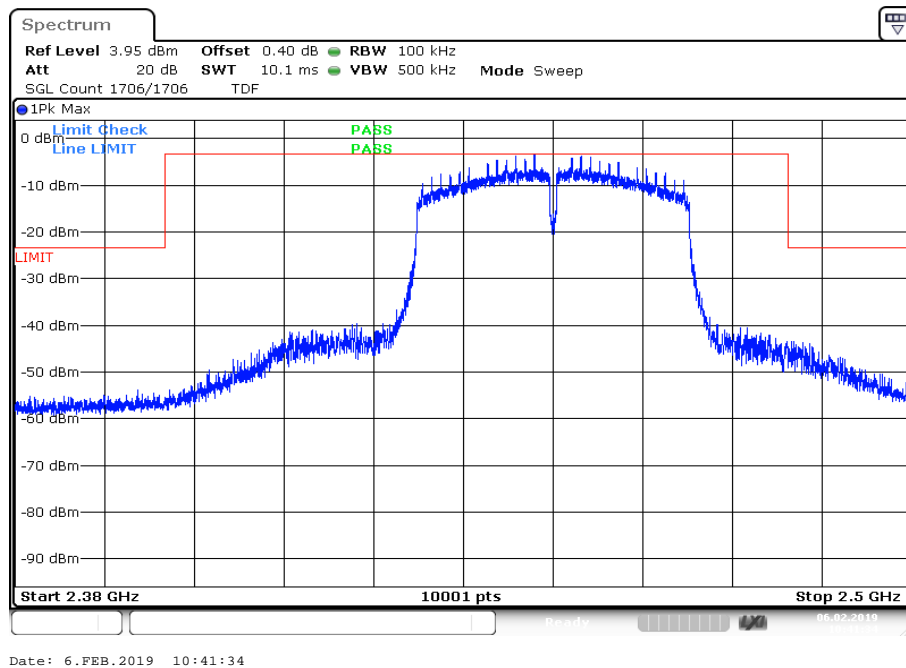
Plot 3: Middle channel, up to 25 GHz

The peak at the beginning of the plot is the LO from the SA.

Plot 4: Middle channel, zoomed carrier

Plot 5: Highest channel, up to 25 GHz

The peak at the beginning of the plot is the LO from the SA.

Plot 6: Highest channel, zoomed carrier

12.11 Spurious emissions radiated below 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

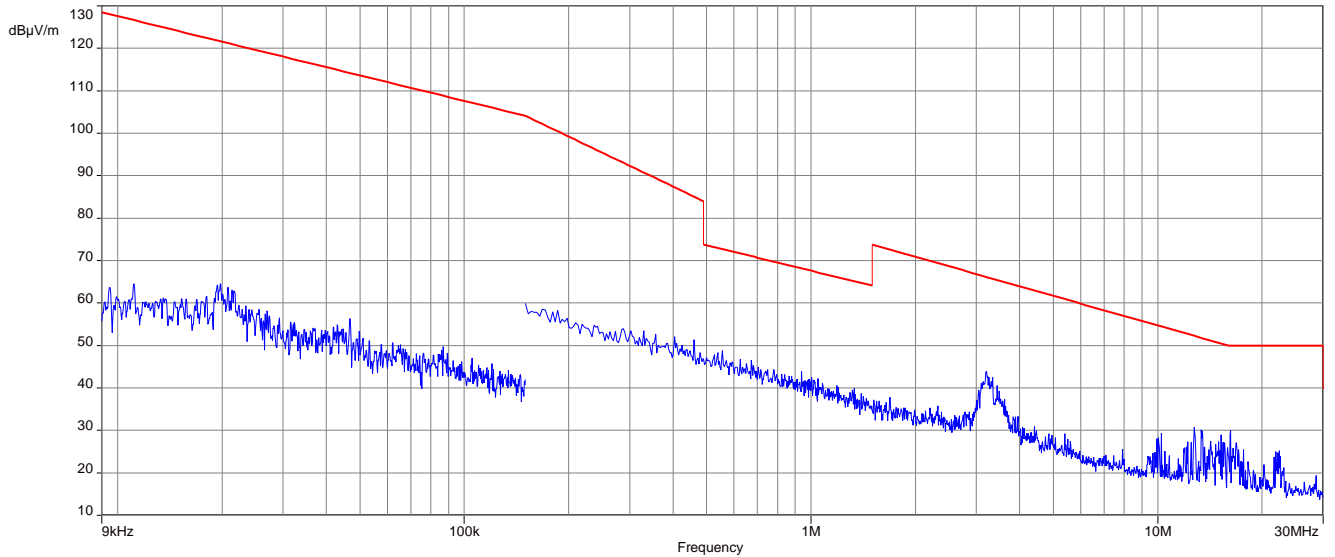
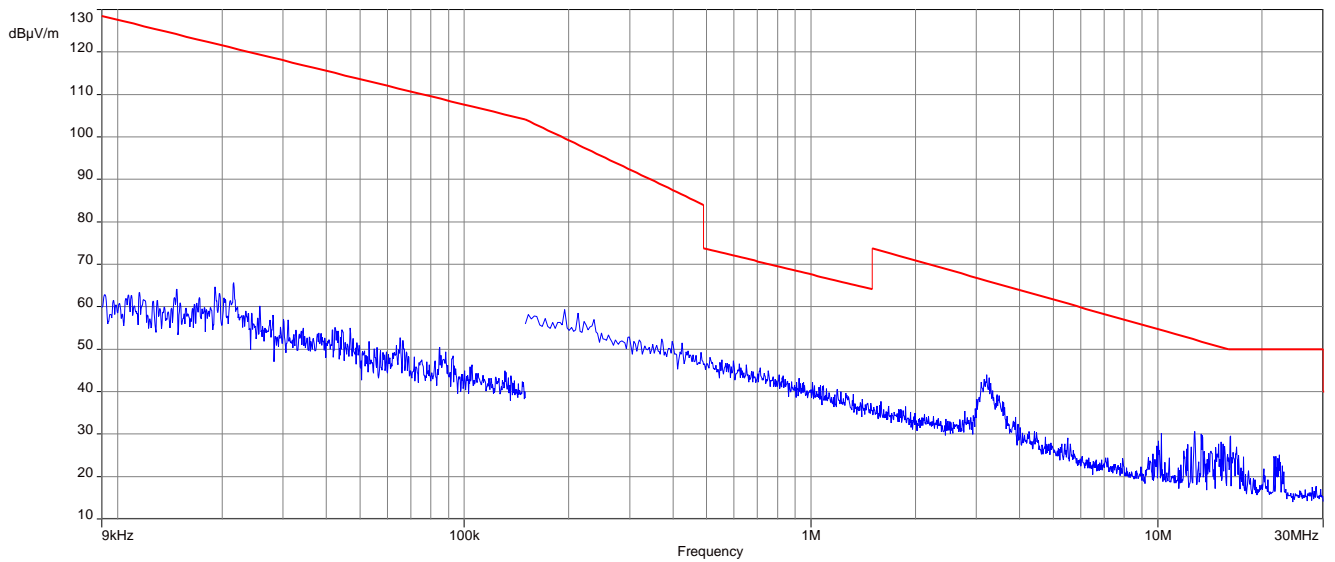
Measurement parameter	
Detector	Peak / Quasi Peak
Sweep time	Auto
Resolution bandwidth	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span	9 kHz to 30 MHz
Trace mode	Max Hold
Measured modulation	<input checked="" type="checkbox"/> DSSS b – mode <input type="checkbox"/> OFDM g – mode <input checked="" type="checkbox"/> OFDM n HT20 – mode <input checked="" type="checkbox"/> OFDM n HT40 – mode
Test setup	See chapter 6.2 - A
Measurement uncertainty	See chapter 8

Limits:

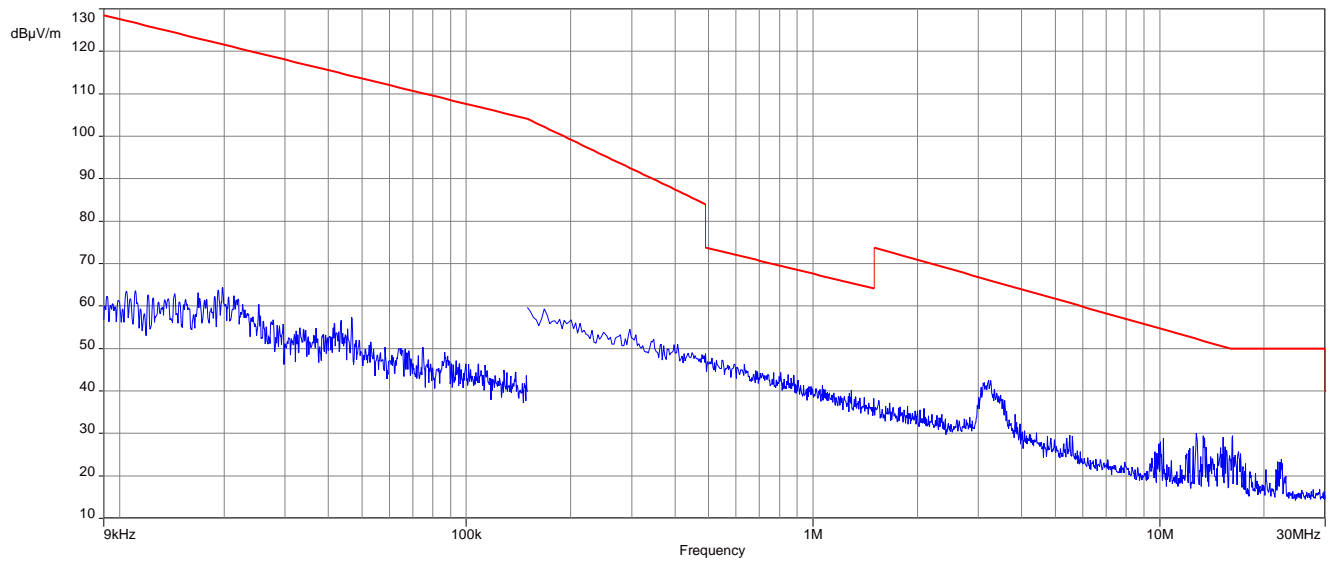
FCC		IC
Frequency / MHz	Field Strength / (dB μ V / m)	Measurement distance / m
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Results:

TX spurious emissions radiated < 30 MHz / (dB μ V / m) @ 3 m		
Frequency / MHz	Detector	Level / (dB μ V / m)
All detected peaks are more than 20 dB below the limit.		

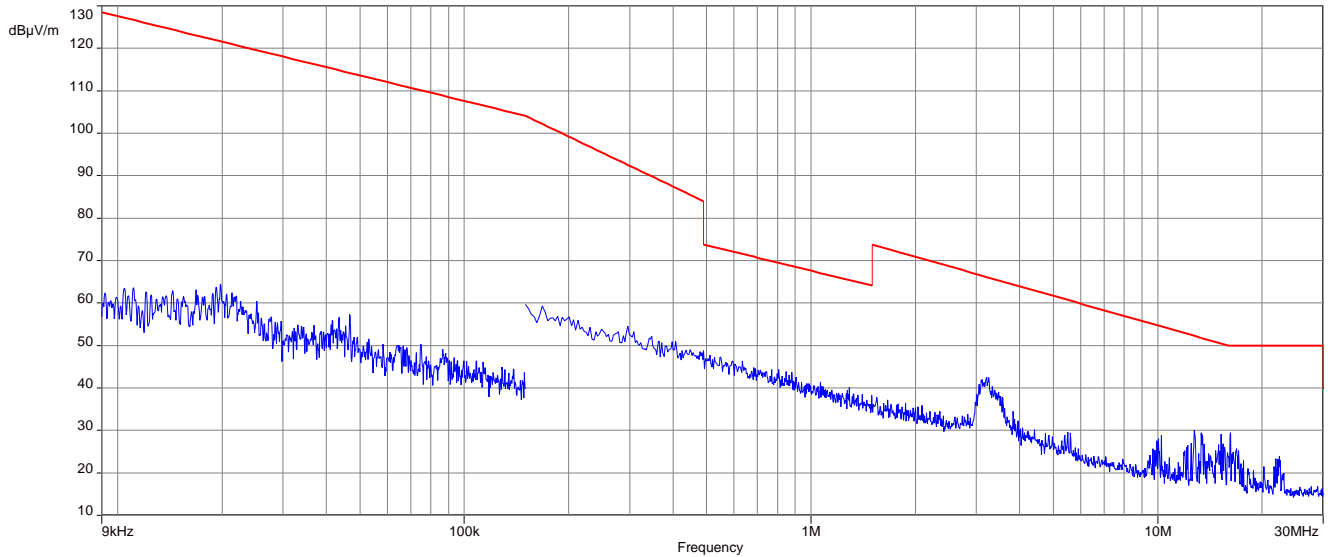
Plots: DSSS**Plot 1:** 9 kHz to 30 MHz, lowest channel**Plot 2:** 9 kHz to 30 MHz, middle channel

Plot 3: 9 kHz to 30 MHz, highest channel

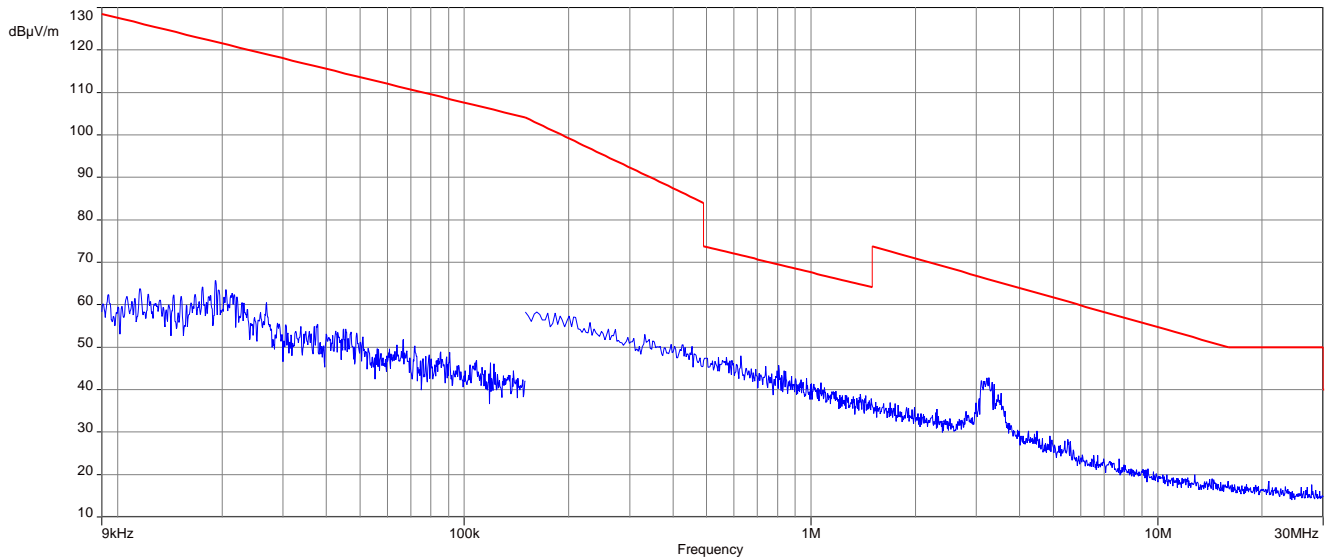


Plots: OFDM (20 MHz nominal channel bandwidth)

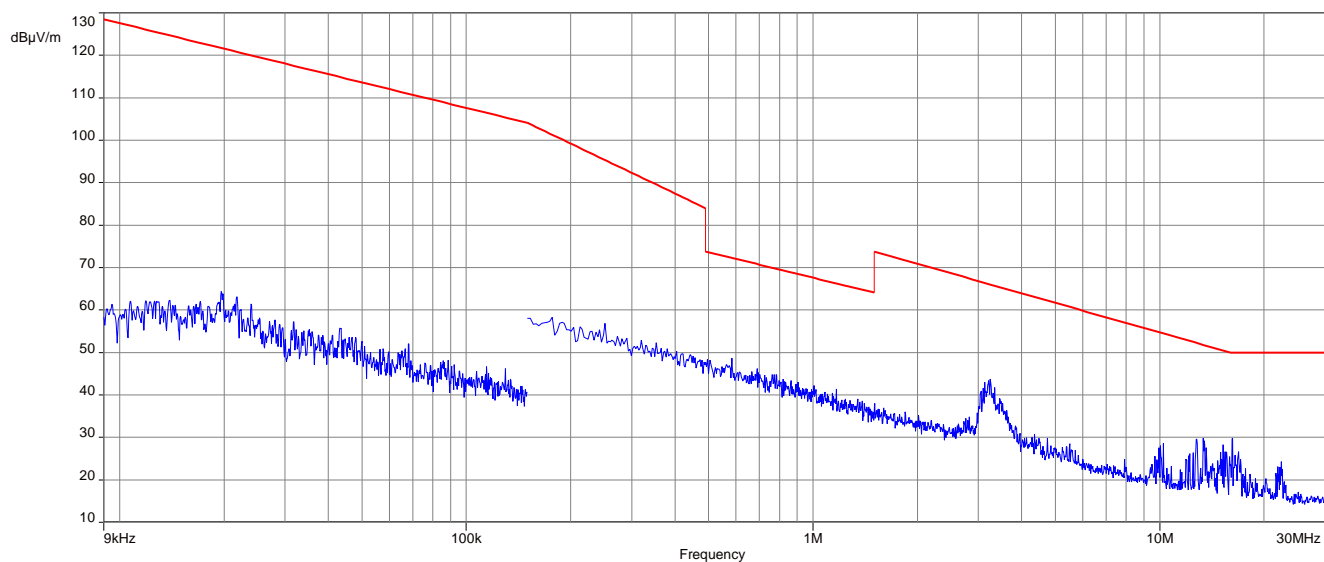
Plot 1: 9 kHz to 30 MHz, lowest channel

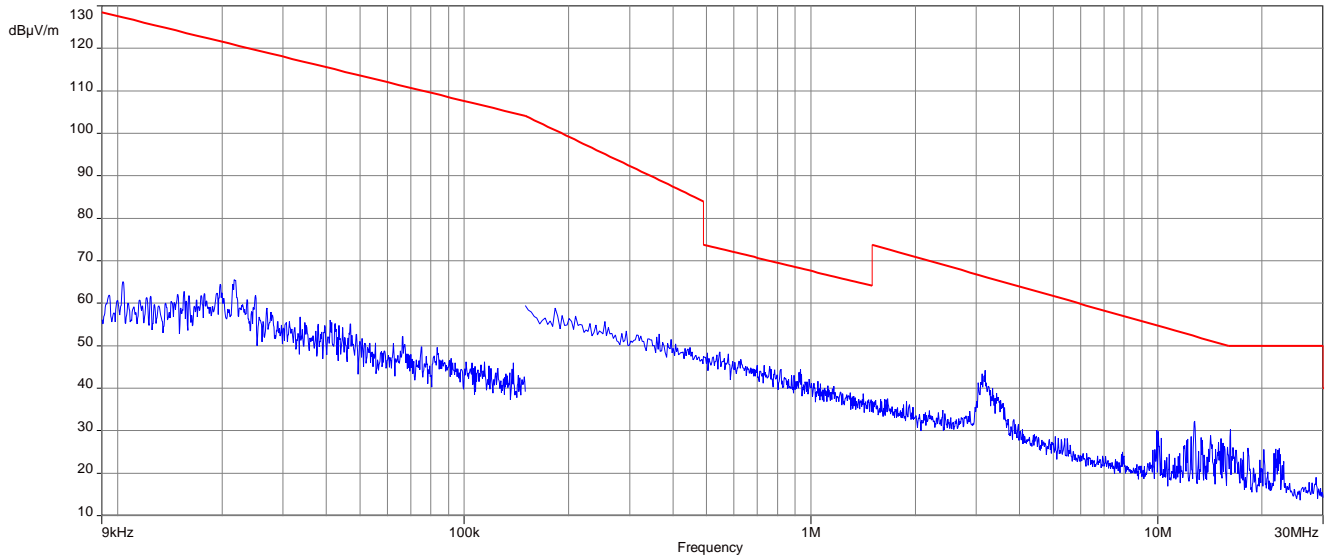
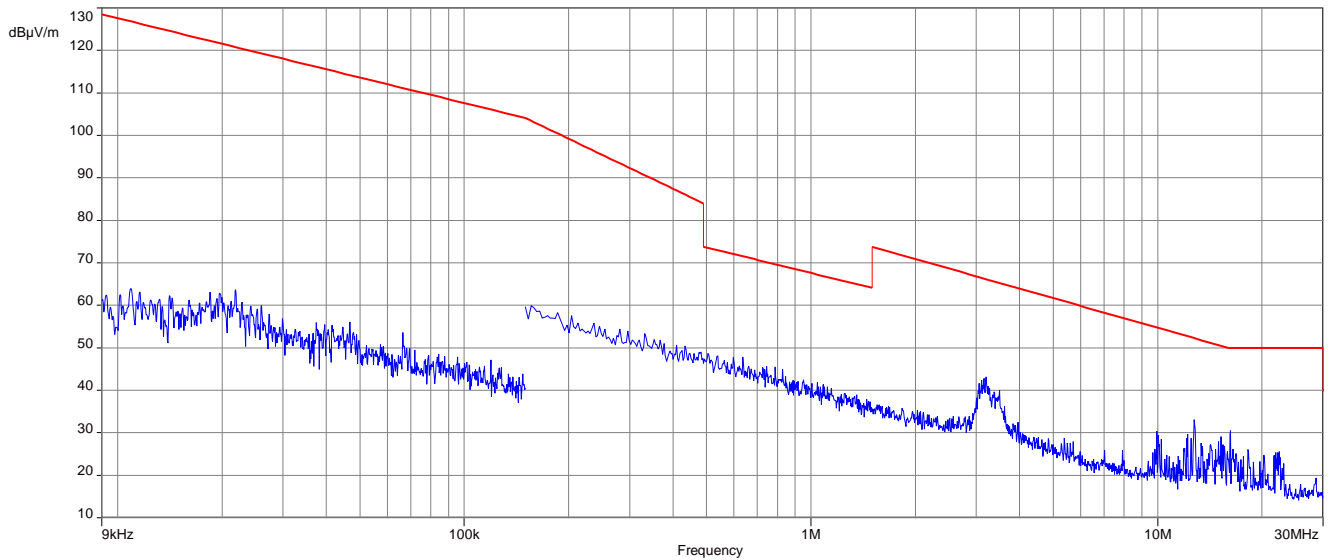


Plot 2: 9 kHz to 30 MHz, middle channel

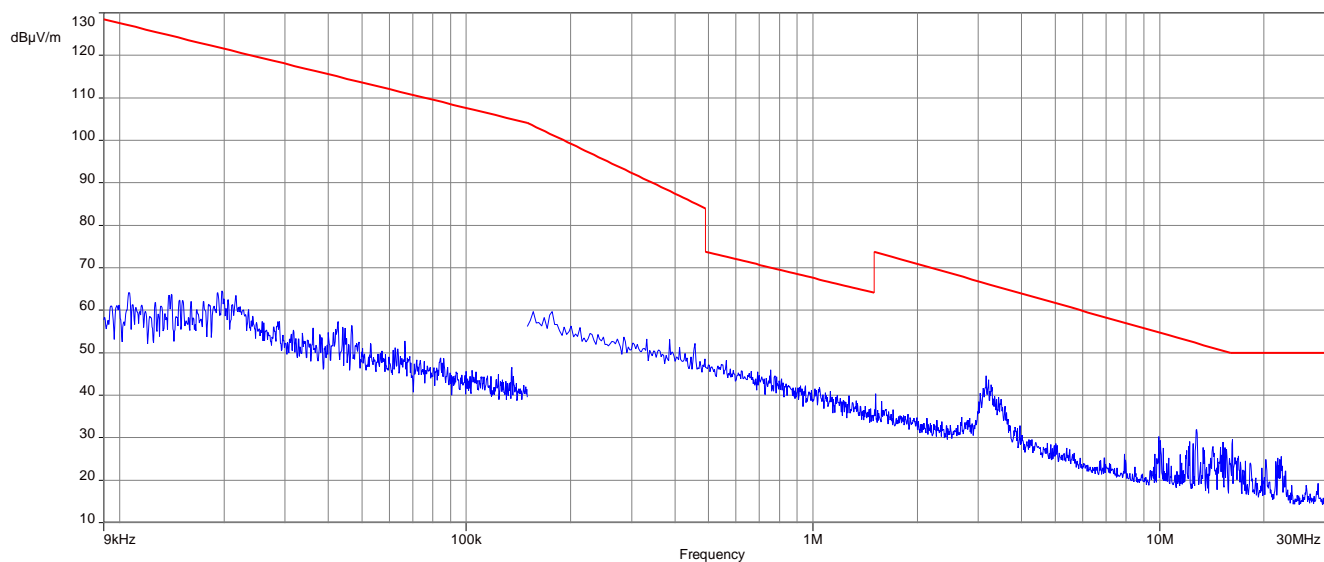


Plot 3: 9 kHz to 30 MHz, highest channel



Plots: OFDM (40 MHz nominal channel bandwidth)**Plot 1:** 9 kHz to 30 MHz, lowest channel**Plot 2:** 9 kHz to 30 MHz, middle channel

Plot 3: 9 kHz to 30 MHz, highest channel



12.12 Spurious emissions radiated 30 MHz to 1 GHz

Description:

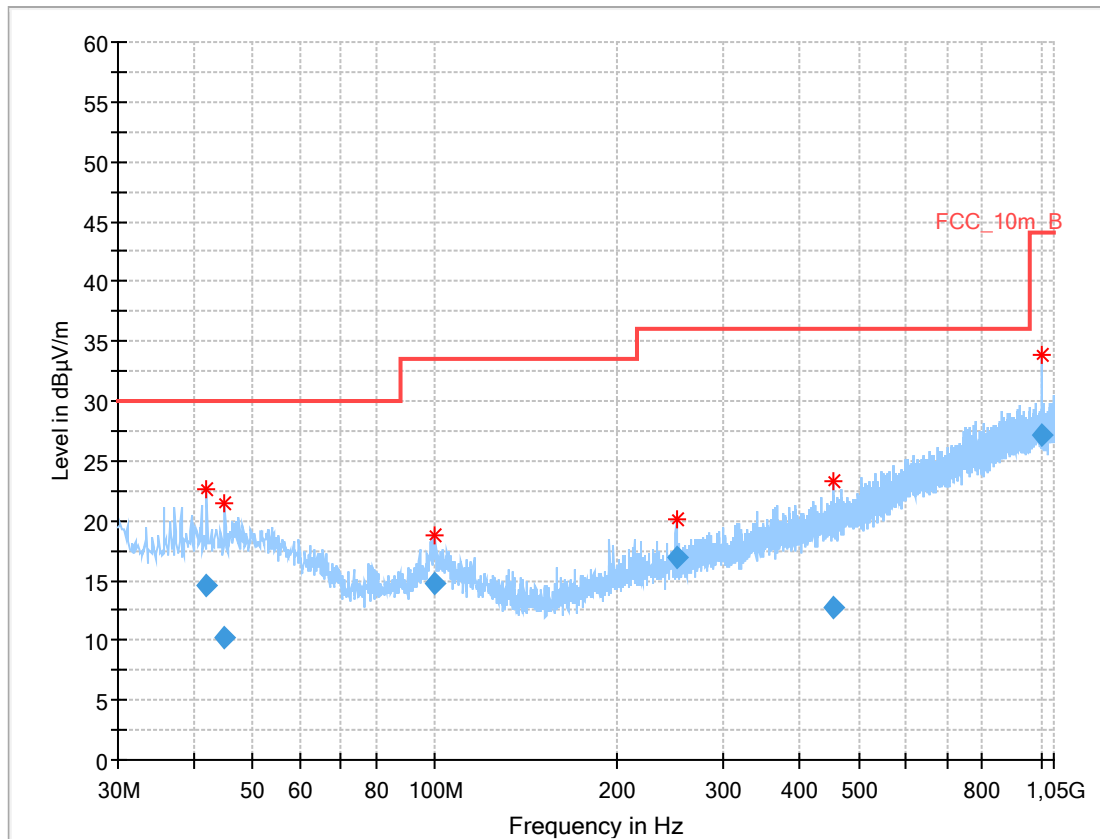
Measurement of the radiated spurious emissions and cabinet radiations below 1 GHz.

Measurement:

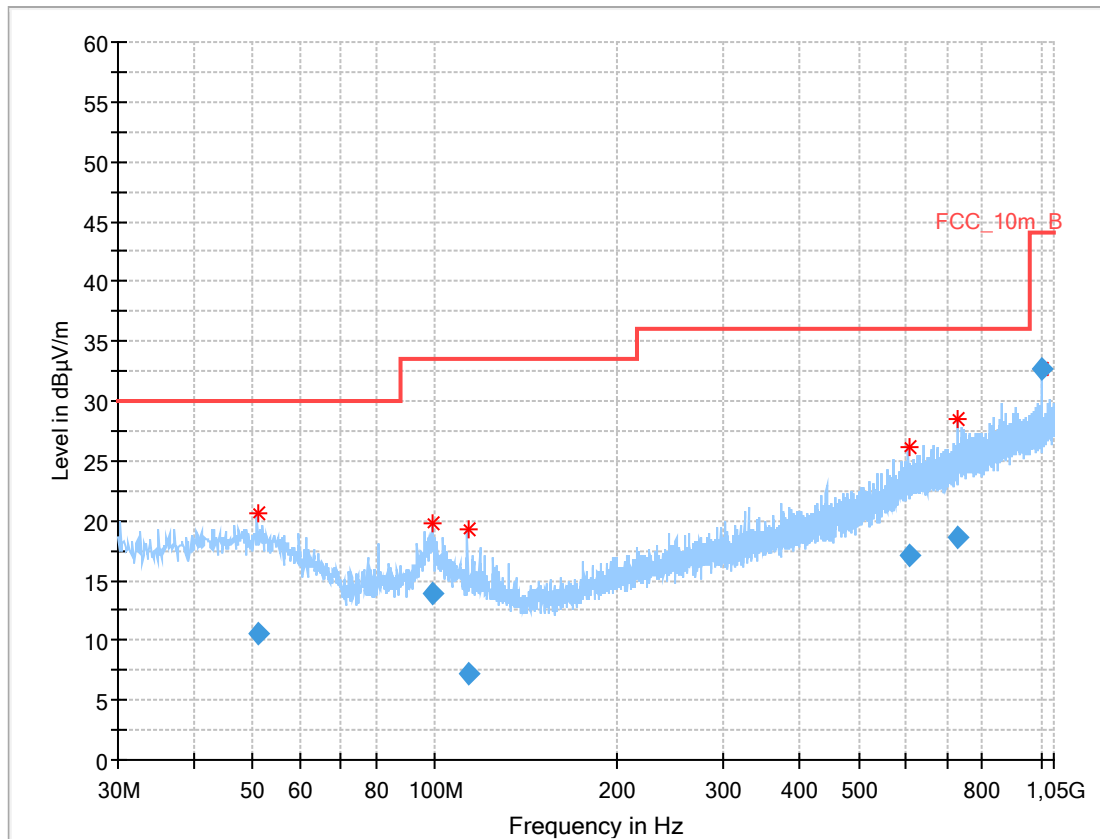
Measurement parameter	
Detector	Peak / Quasi Peak
Sweep time	Auto
Resolution bandwidth	120 kHz
Video bandwidth	3 x RBW
Span	30 MHz to 1 GHz
Trace mode	Max Hold
Measured modulation	<input checked="" type="checkbox"/> DSSS b – mode <input type="checkbox"/> OFDM g – mode <input checked="" type="checkbox"/> OFDM n HT20 – mode <input checked="" type="checkbox"/> OFDM n HT40 – mode <input checked="" type="checkbox"/> RX / Idle – mode
Test setup	See chapter 6.1 - A
Measurement uncertainty	See chapter 8

Limits:

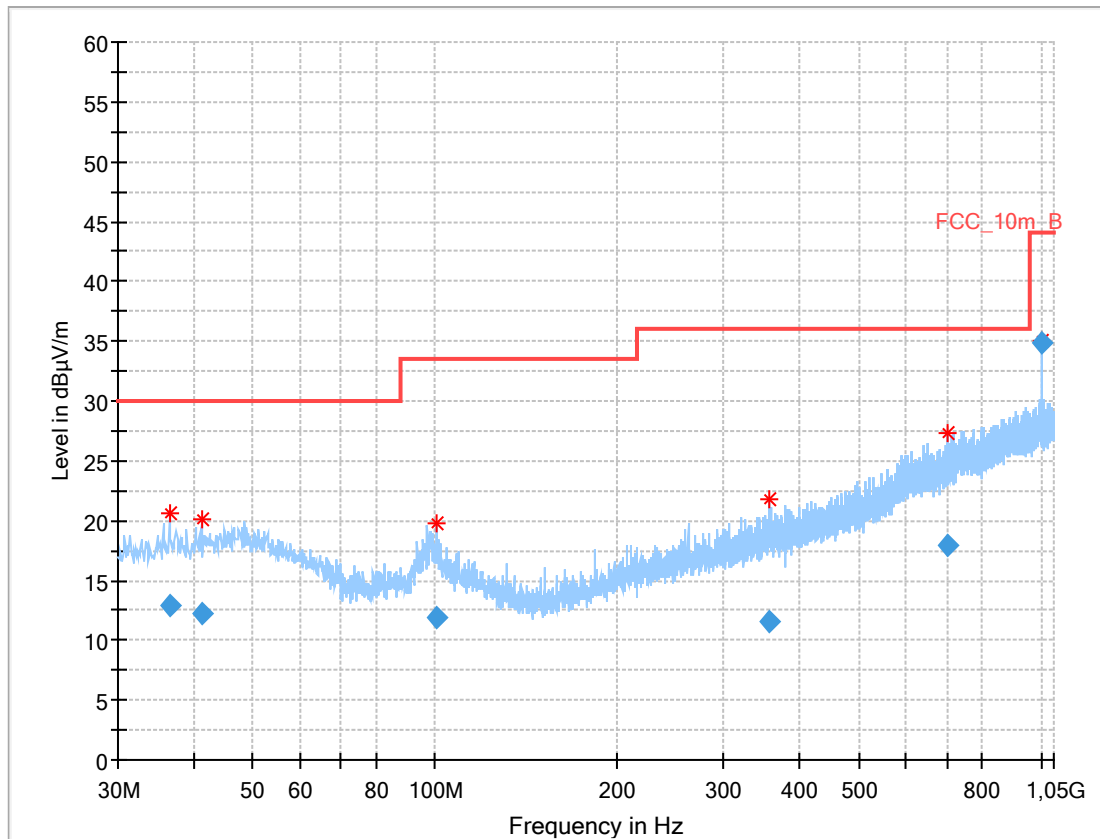
FCC		IC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency / MHz	Field Strength / (dBµV / m)	Measurement distance / m
30 – 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10

Plot: DSSS**Plot 1:** 30 MHz to 1 GHz, vertical & horizontal polarization, lowest channel**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
42.051	14.61	30.0	15.39	1000	120	173.0	V	113.0
44.917	10.19	30.0	19.81	1000	120	200.0	V	189.0
99.536	14.74	33.5	18.76	1000	120	350.0	V	156.0
250.008	16.88	36.0	19.12	1000	120	100.0	V	352.0
454.614	12.81	36.0	23.19	1000	120	171.0	H	25.0
999.983	27.22	44.0	16.78	1000	120	203.0	H	270.0

Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, middle channel**Final results:**

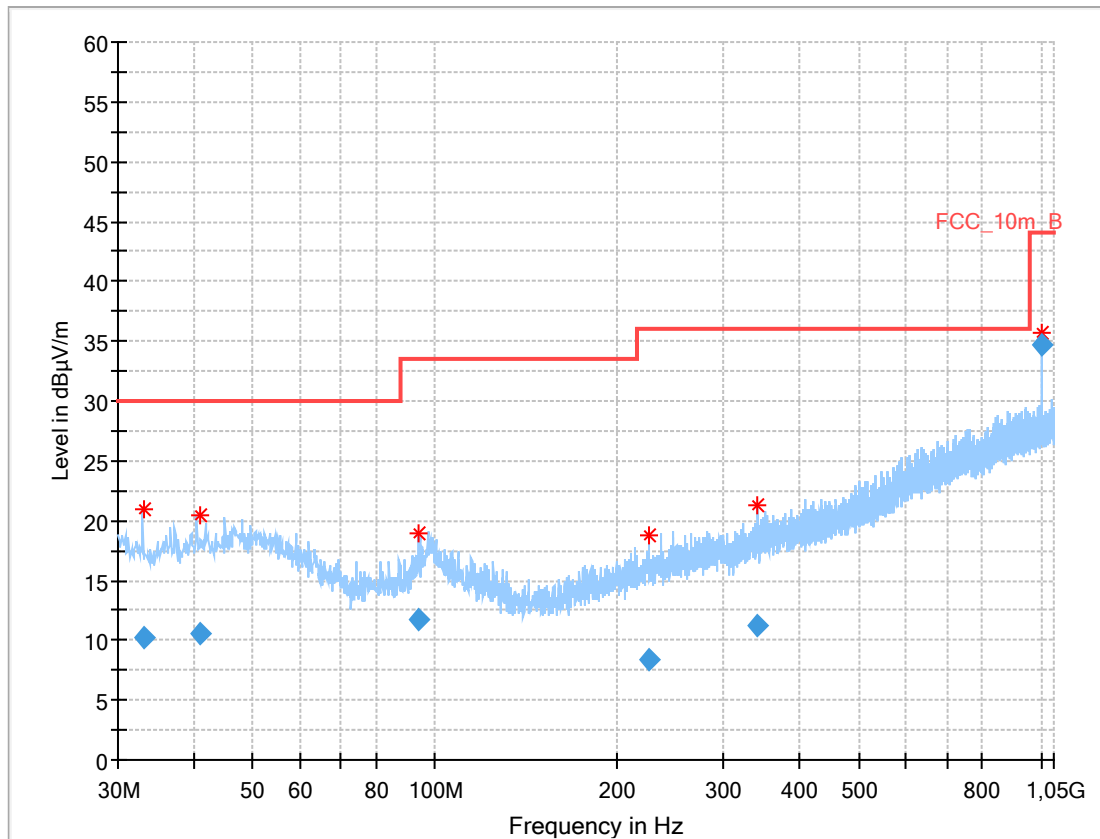
Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
51.240	10.62	30.0	19.38	1000	120	400.0	V	90.0
99.495	13.92	33.5	19.58	1000	120	100.0	V	128.0
113.543	7.19	33.5	26.31	1000	120	349.0	H	109.0
604.667	17.12	36.0	18.88	1000	120	100.0	H	135.0
730.278	18.55	36.0	17.45	1000	120	400.0	V	337.0
999.979	32.63	44.0	11.37	1000	120	103.0	H	271.0

Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, highest channel**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
36.566	12.86	30.0	17.14	1000	120	101.0	V	226.0
41.296	12.22	30.0	17.78	1000	120	98.0	V	180.0
100.627	11.95	33.5	21.55	1000	120	103.0	V	115.0
357.134	11.50	36.0	24.50	1000	120	346.0	V	315.0
701.130	17.85	36.0	18.15	1000	120	171.0	V	90.0
999.991	34.93	44.0	9.07	1000	120	103.0	H	251.0

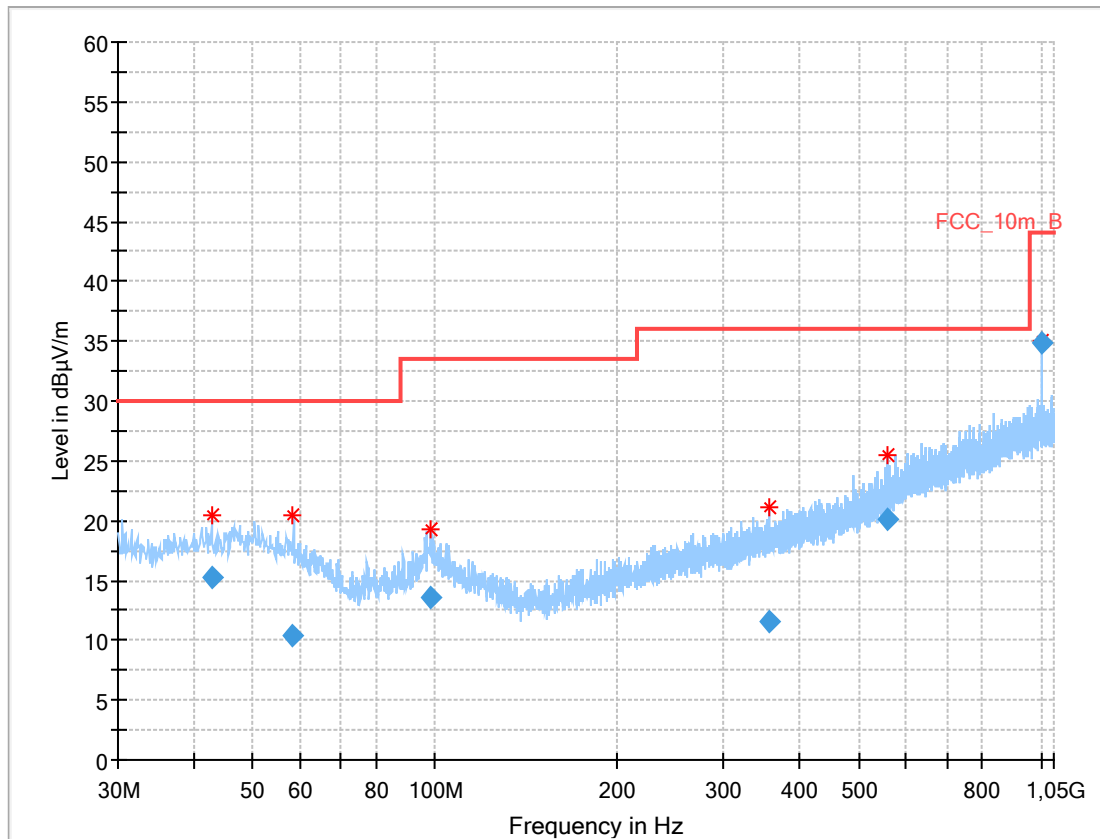
Plot: OFDM (20 MHz nominal channel bandwidth)

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization, lowest channel

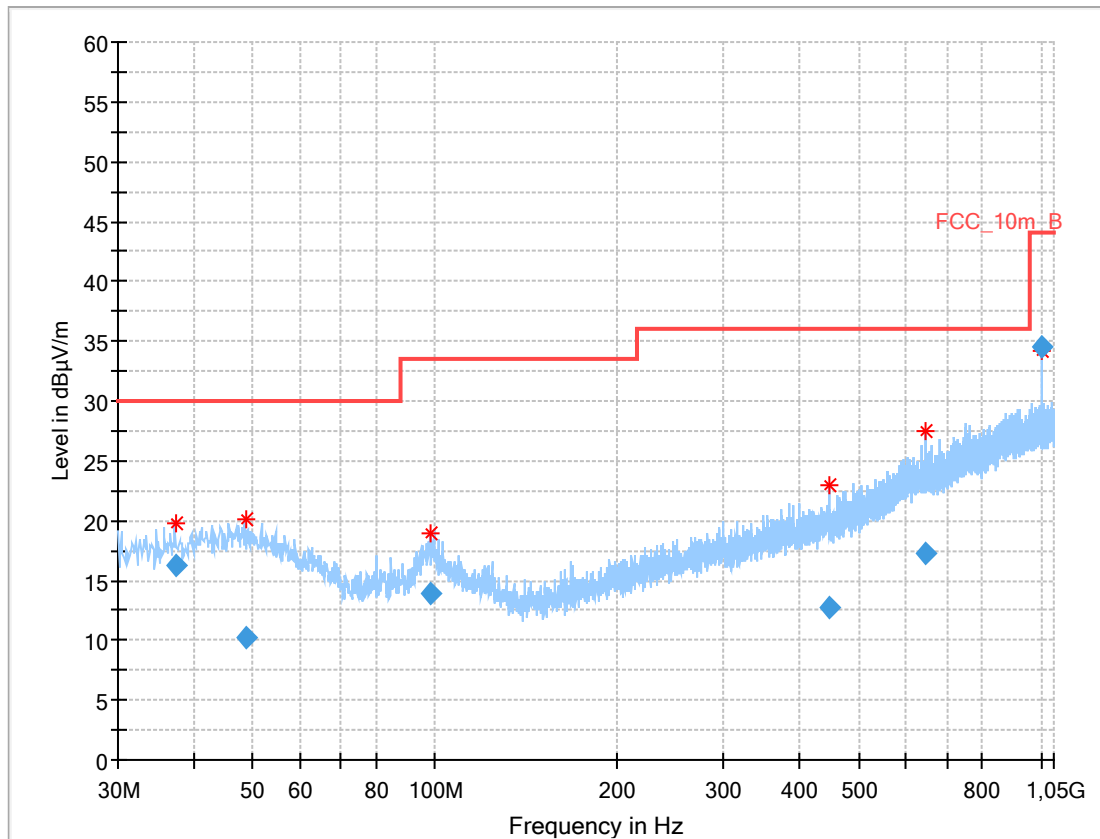


Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
33.035	10.18	30.0	19.82	1000	120	347.0	H	-36.0
40.915	10.50	30.0	19.50	1000	120	200.0	V	66.0
94.329	11.67	33.5	21.83	1000	120	400.0	V	28.0
226.035	8.35	36.0	27.65	1000	120	200.0	V	270.0
341.585	11.20	36.0	24.80	1000	120	200.0	H	271.0
999.998	34.75	44.0	9.25	1000	120	102.0	H	250.0

Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, middle channel**Final results:**

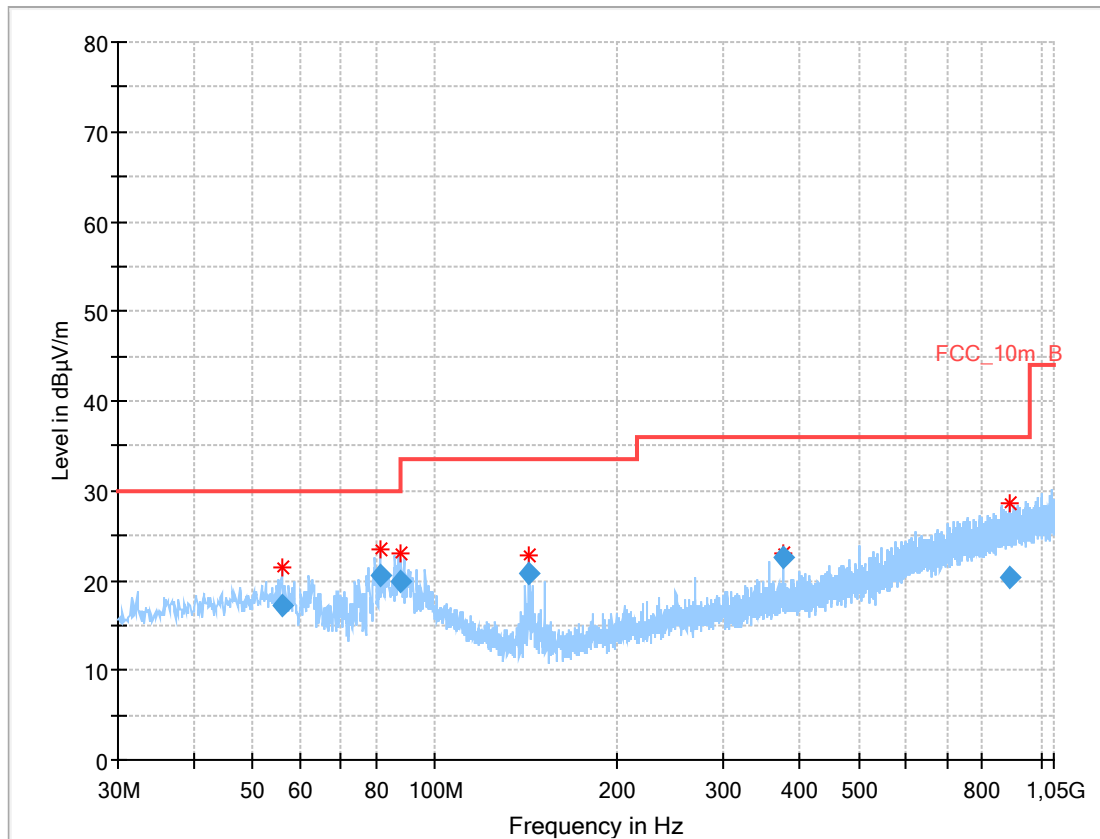
Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
42.807	15.19	30.0	14.81	1000	120	103.0	V	135.0
58.167	10.39	30.0	19.61	1000	120	200.0	V	127.0
98.122	13.57	33.5	19.93	1000	120	100.0	V	90.0
357.474	11.51	36.0	24.49	1000	120	100.0	H	315.0
560.008	20.19	36.0	15.81	1000	120	272.0	V	270.0
999.990	34.88	44.0	9.12	1000	120	102.0	H	250.0

Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, highest channel**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
37.387	16.22	30.0	13.78	1000	120	100.0	V	334.0
48.944	10.17	30.0	19.83	1000	120	203.0	V	0.0
98.375	13.87	33.5	19.63	1000	120	102.0	V	98.0
448.399	12.71	36.0	23.29	1000	120	200.0	H	25.0
647.350	17.33	36.0	18.67	1000	120	278.0	V	226.0
999.978	34.56	44.0	9.44	1000	120	100.0	H	250.0

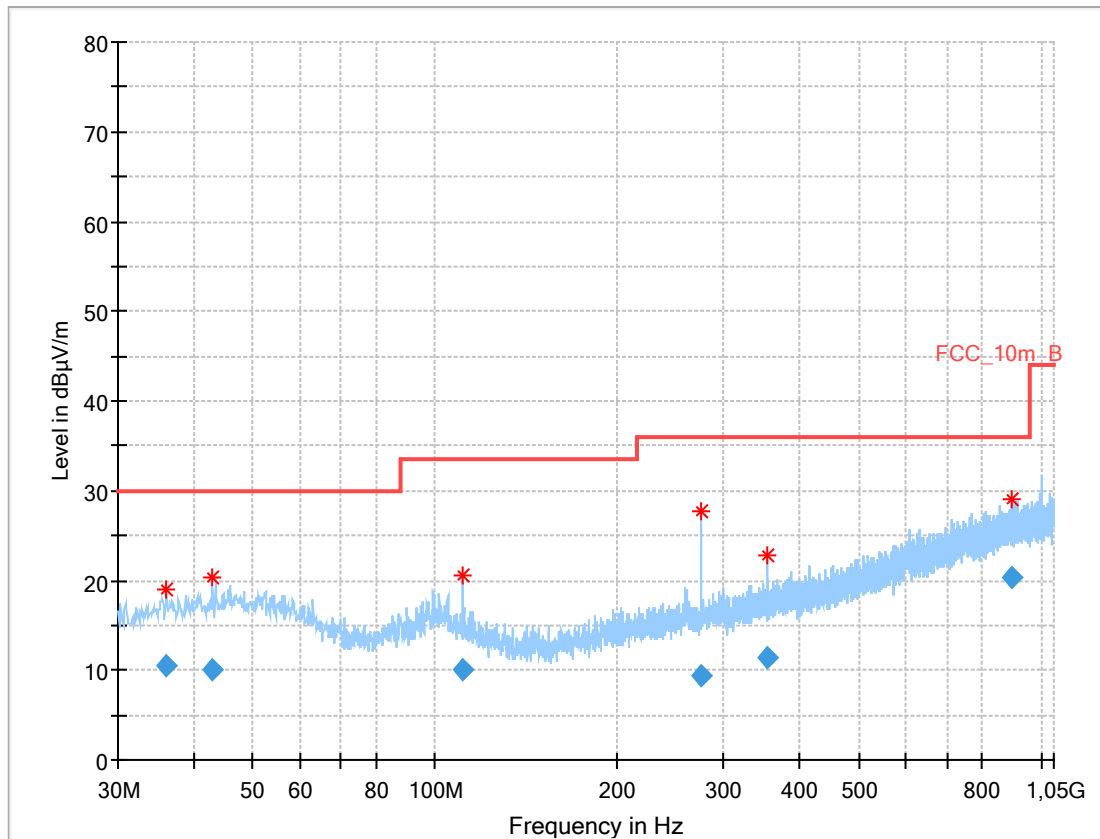
Plot: OFDM (40 MHz nominal channel bandwidth)

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization, lowest channel

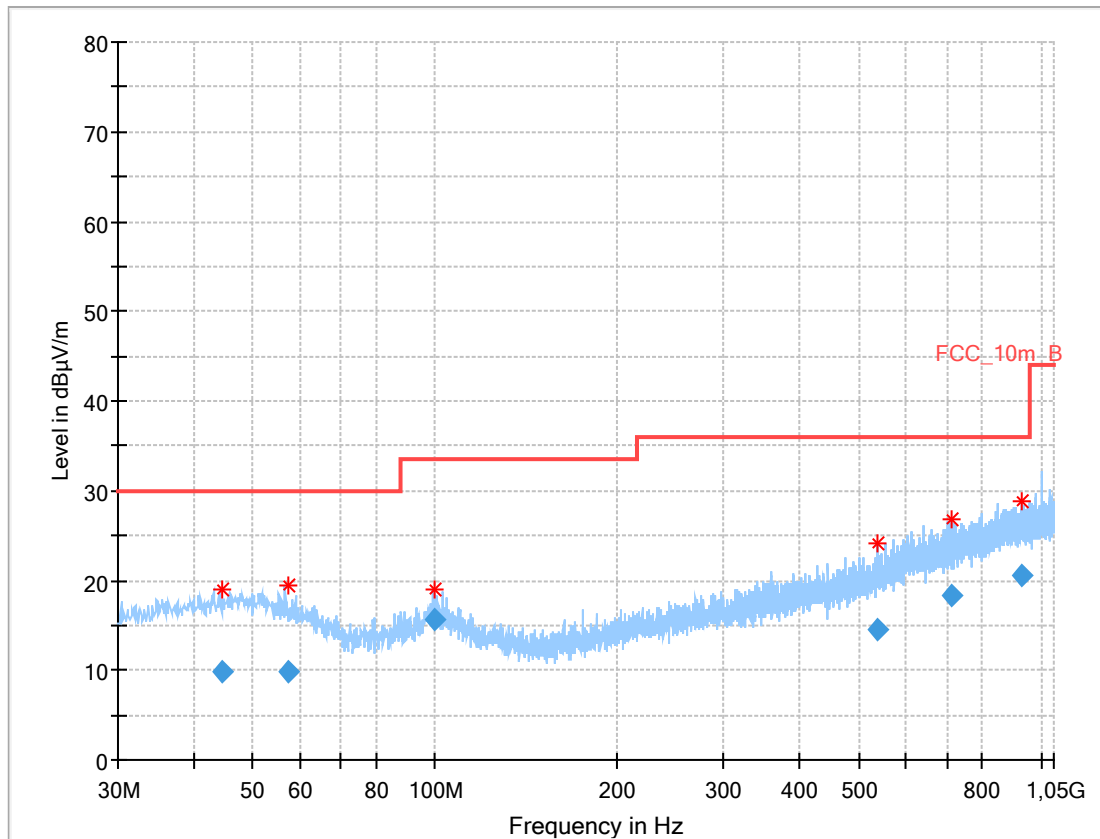


Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
55.890	17.22	30.0	12.78	1000	120	98.0	V	180.0
81.200	20.67	30.0	9.33	1000	120	101.0	V	180.0
87.616	19.83	30.0	10.17	1000	120	101.0	V	90.0
143.273	20.81	33.5	12.69	1000	120	101.0	V	180.0
375.018	22.62	36.0	13.38	1000	120	98.0	V	0.0
891.058	20.32	36.0	15.68	1000	120	101.0	V	270.0

Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, middle channel**Final results:**

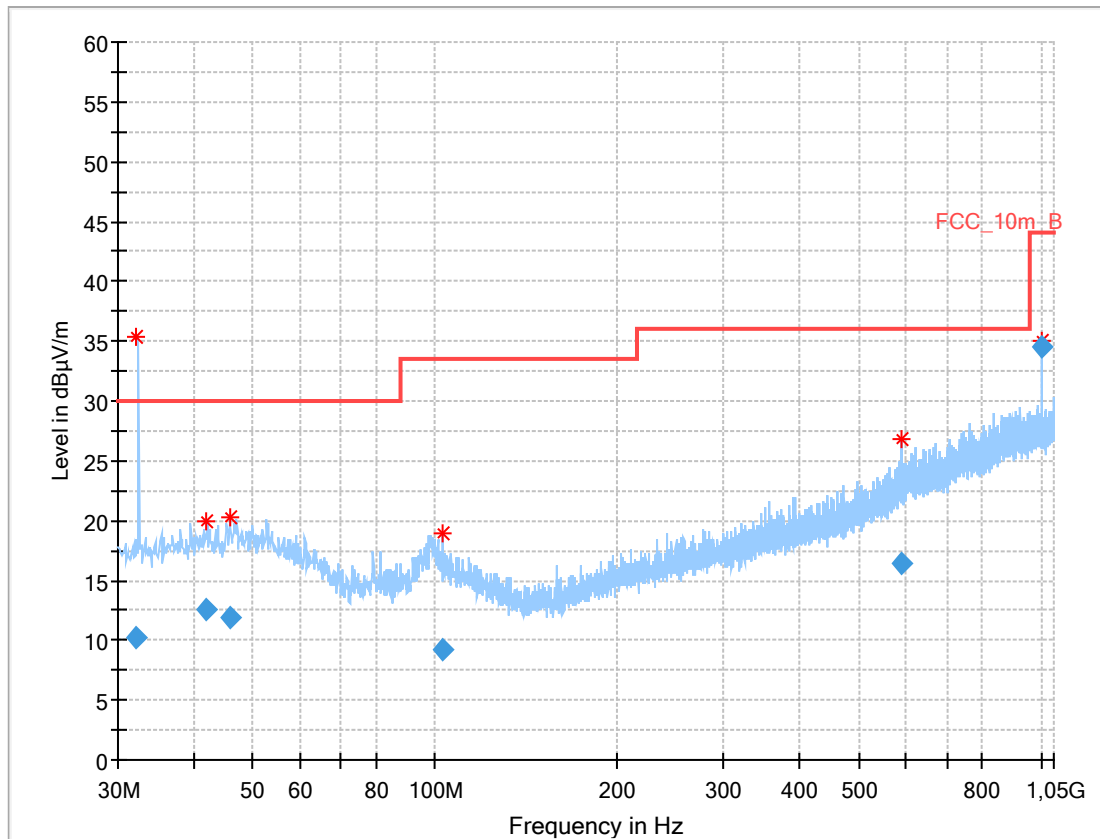
Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
36.032	10.45	30.0	19.55	1000	120	101.0	V	270.0
43.061	10.08	30.0	19.92	1000	120	103.0	V	0.0
111.531	10.03	33.5	23.47	1000	120	101.0	V	270.0
274.772	9.39	36.0	26.61	1000	120	170.0	H	270.0
352.798	11.42	36.0	24.58	1000	120	170.0	V	270.0
896.366	20.38	36.0	15.62	1000	120	170.0	V	90.0

Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, highest channel**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
44.464	9.83	30.0	20.17	1000	120	170.0	V	90.0
57.097	9.73	30.0	20.27	1000	120	98.0	H	270.0
99.532	15.74	33.5	17.76	1000	120	170.0	V	90.0
538.059	14.42	36.0	21.58	1000	120	98.0	H	270.0
714.190	18.22	36.0	17.78	1000	120	101.0	H	180.0
928.349	20.55	36.0	15.45	1000	120	170.0	H	180.0

Plot: RX / Idle mode

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization



Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
32.087	10.22	30.0	19.78	1000	120	400.0	V	270.0
42.057	12.63	30.0	17.37	1000	120	200.0	V	54.0
45.895	11.88	30.0	18.12	1000	120	173.0	V	318.0
103.148	9.27	33.5	24.23	1000	120	200.0	V	65.0
589.258	16.35	36.0	19.65	1000	120	200.0	V	69.0
1000.000	34.49	44.0	9.51	1000	120	100.0	H	250.0

12.13 Spurious emissions radiated above 1 GHz

Description:

Measurement of the radiated spurious emissions above 1 GHz in transmit mode and receiver / idle mode.

Measurement:

Measurement parameter	
Detector	Peak / RMS
Sweep time	Auto
Resolution bandwidth	1 MHz
Video bandwidth	3 x RBW
Span	1 GHz to 26 GHz
Trace mode	Max Hold
Measured modulation	<input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input checked="" type="checkbox"/> OFDM n HT20 – mode <input checked="" type="checkbox"/> OFDM n HT40 – mode <input checked="" type="checkbox"/> RX / Idle – mode
Test setup	See chapter 6.2 – B & C
Measurement uncertainty	See chapter 8

Limits:

FCC		IC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency / MHz	Field Strength / (dBµV / m)	Measurement distance / m
Above 960	54.0 (AVG)	3
	74.0 (peak)	

Results: DSSS

TX spurious emissions radiated / dBµV/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m
All detected peak emissions are below the average limit.			4874	Peak	54.1	4924	Peak	56.3
				AVG	41.2		AVG	43.4
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-

Results: OFDM (20 MHz nominal channel bandwidth)

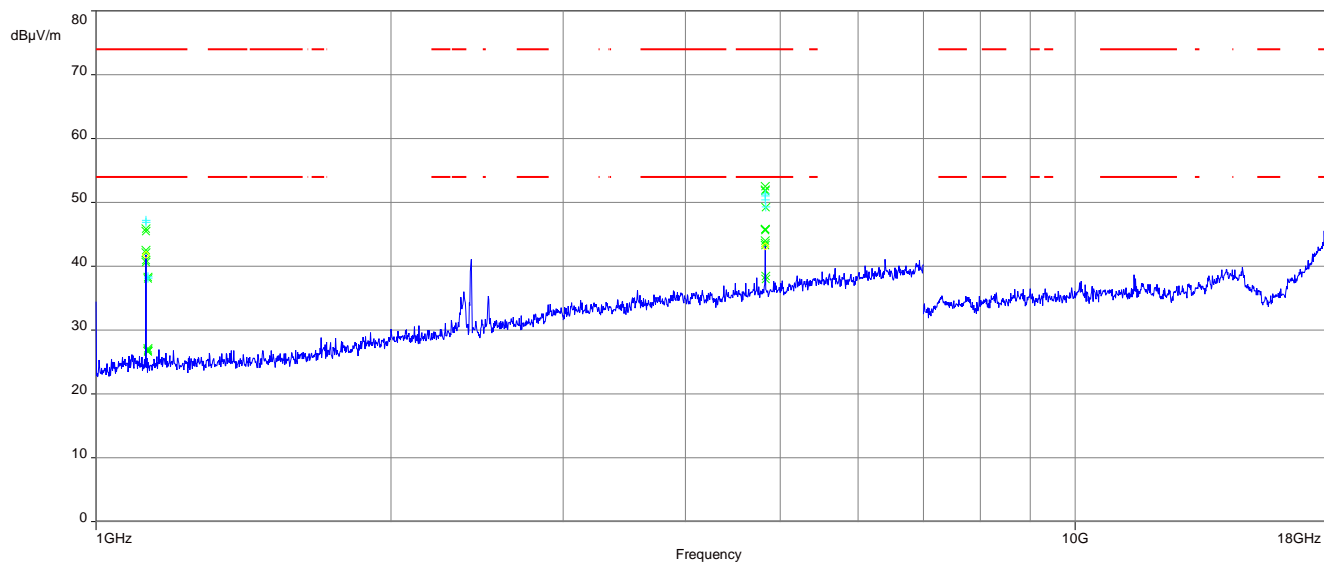
TX spurious emissions radiated / dBµV/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m
All detected peak emissions are below the average limit.			All detected peak emissions are below the average limit.			3599	Peak	No RB
							AVG	
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-

Results: OFDM (40 MHz nominal channel bandwidth)

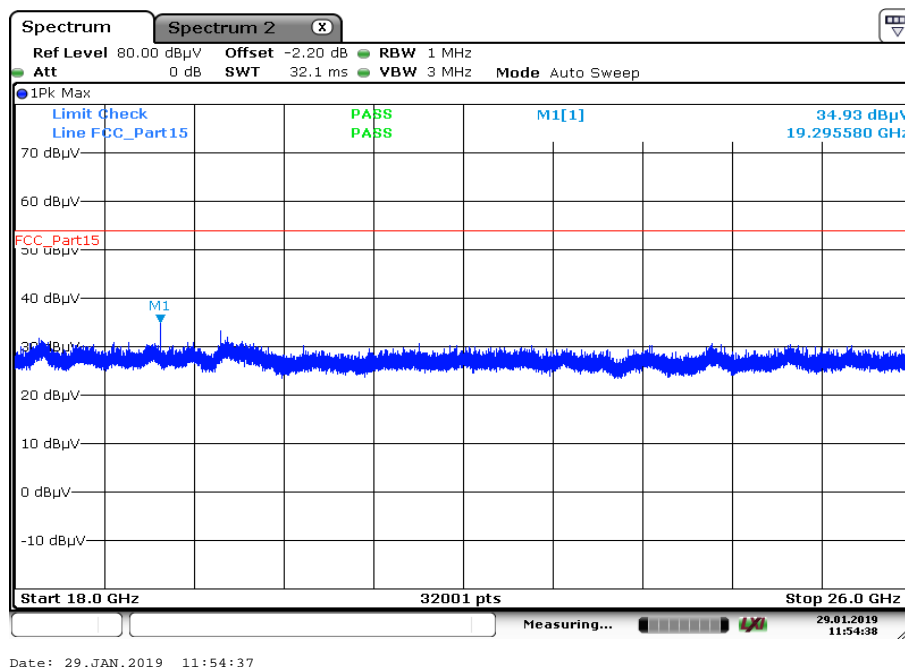
TX spurious emissions radiated / dBµV/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m
All detected peak emissions are below the average limit.			All detected peak emissions are below the average limit.			All detected peak emissions are below the average limit.		
	Peak			Peak			Peak	
	AVG			AVG			AVG	
	Peak			Peak			Peak	
	AVG			AVG			AVG	

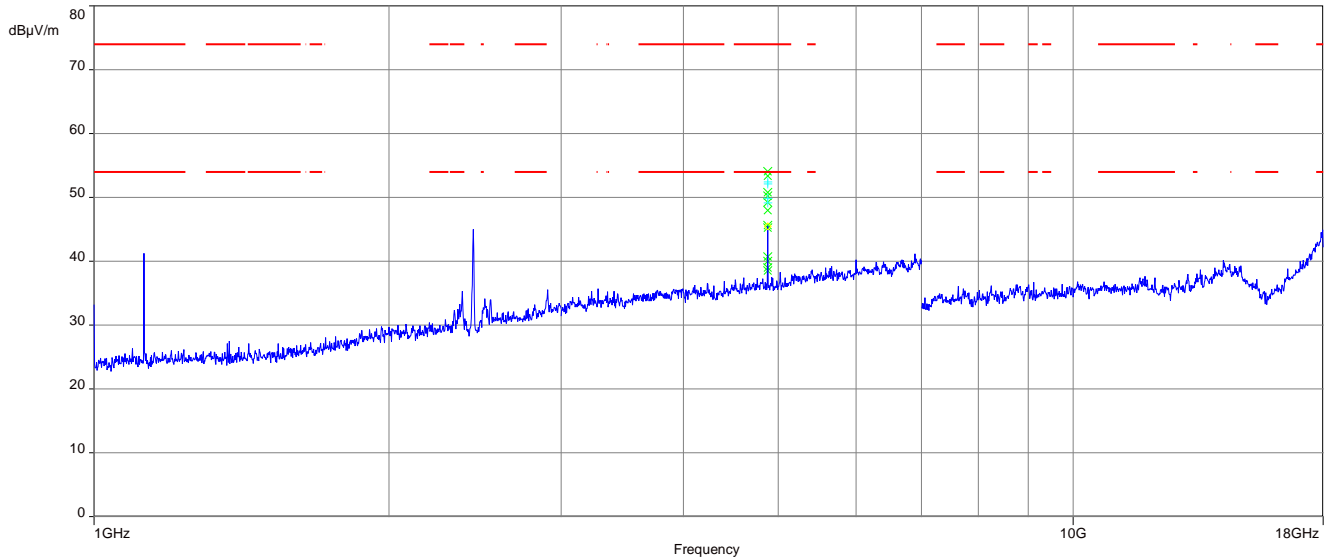
Results: RX / idle – mode

TX spurious emissions radiated / dB μ V/m @ 3 m		
f / MHz	Detector	Level / dB μ V/m
3606	Peak	65.7
	AVG	46.6
-/-	Peak	-/-
	AVG	-/-

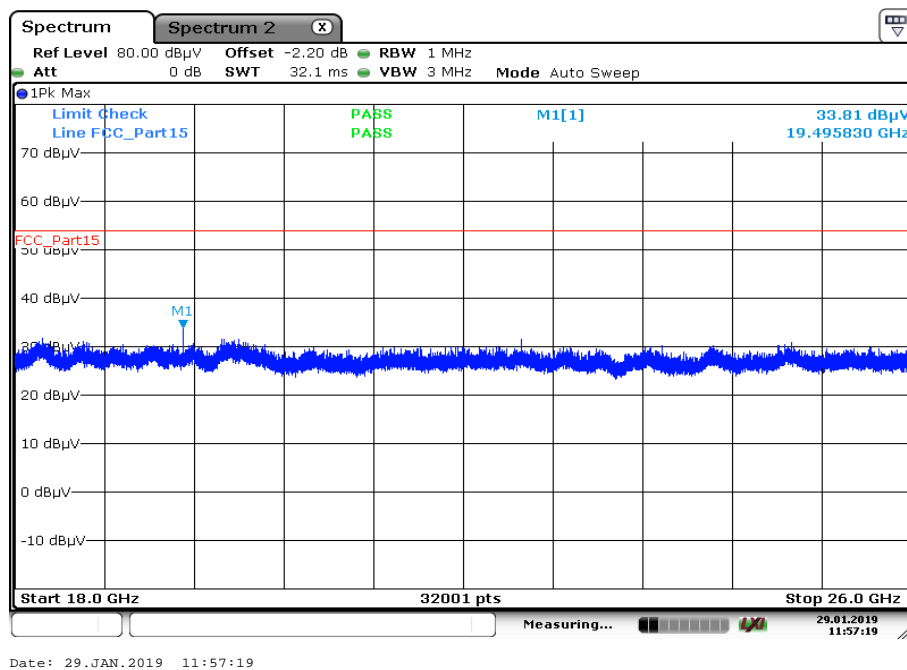
Plots: DSSS b – mode**Plot 1:** Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

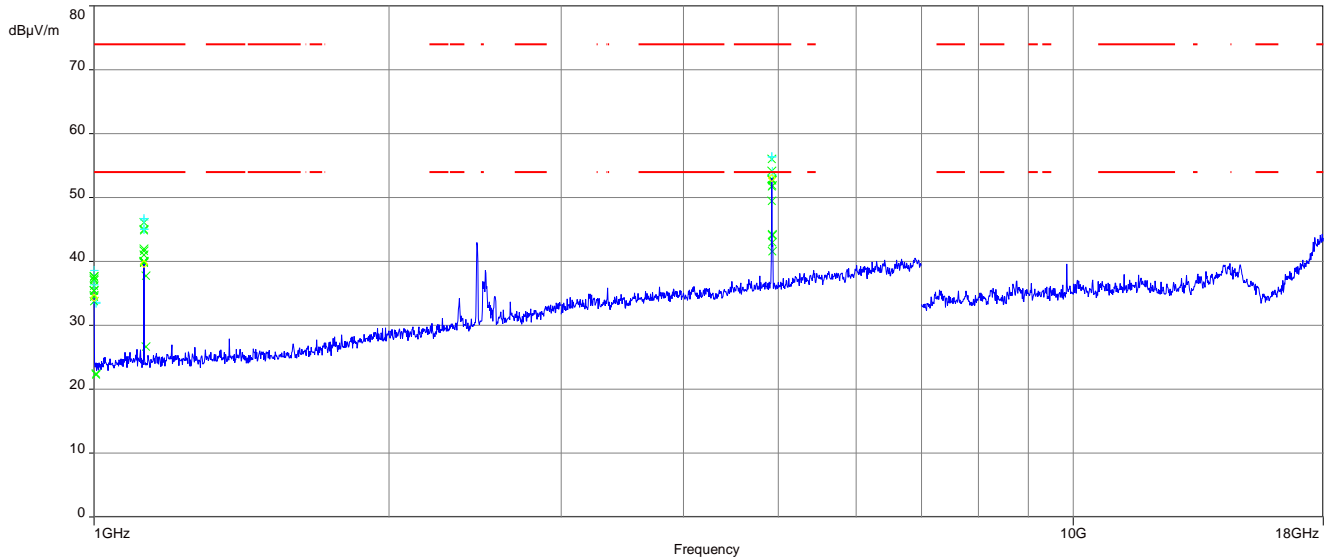
The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 2: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

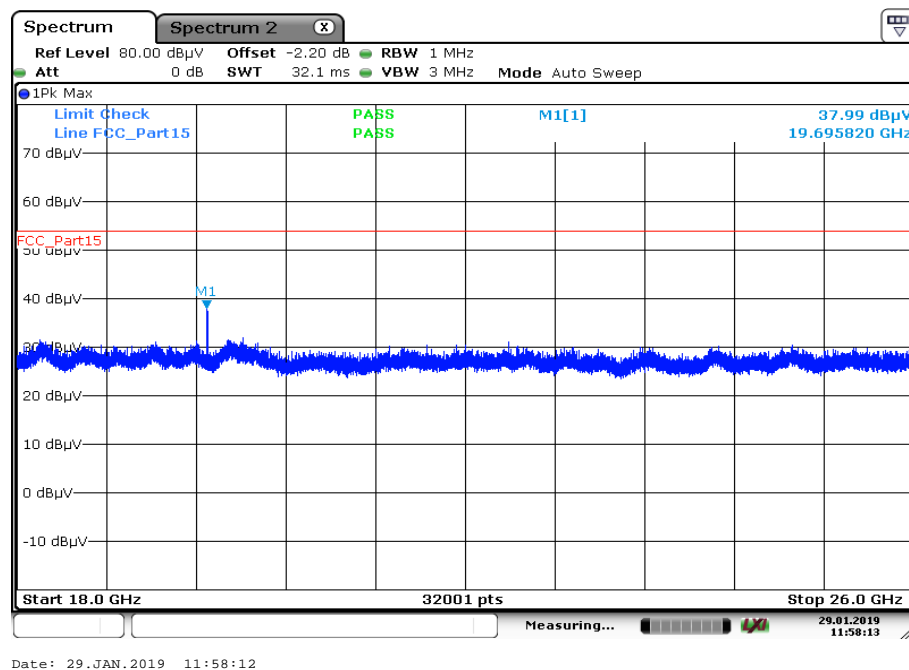
Plot 3: Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 4: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

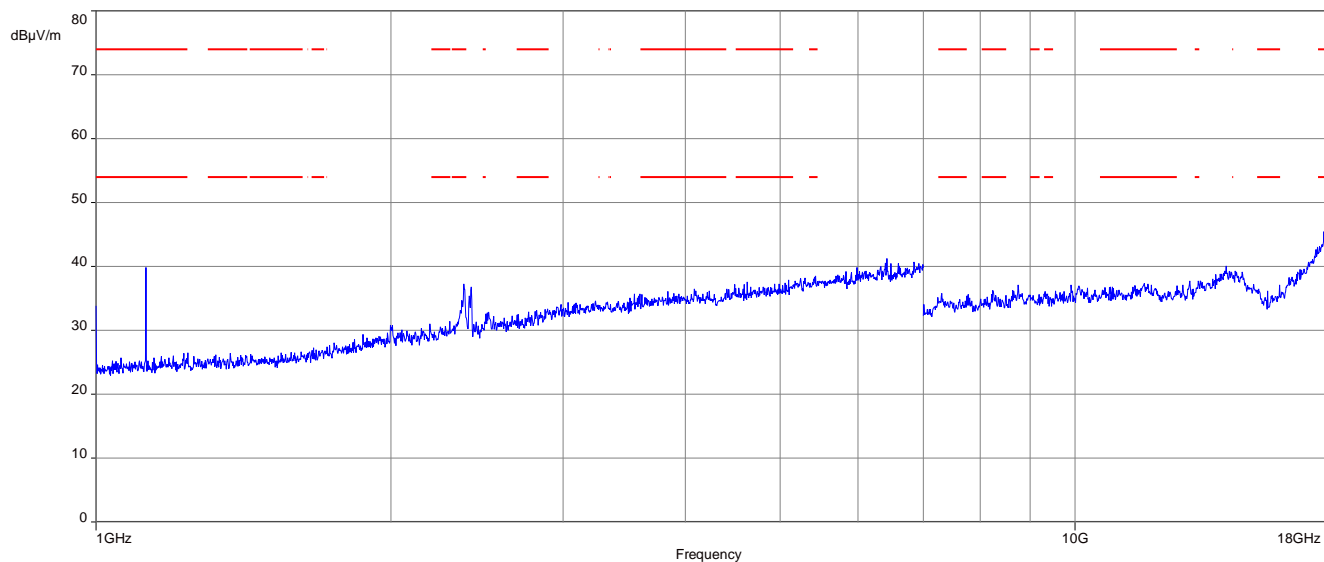
Plot 5: Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 6: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

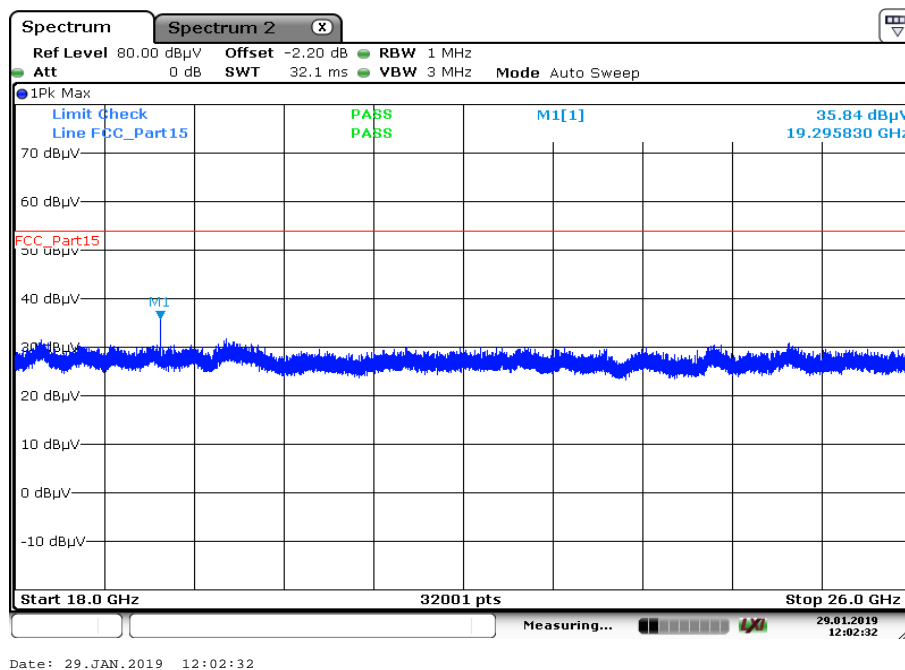
Plots: OFDM n HT20 – mode (20 MHz bandwidth)

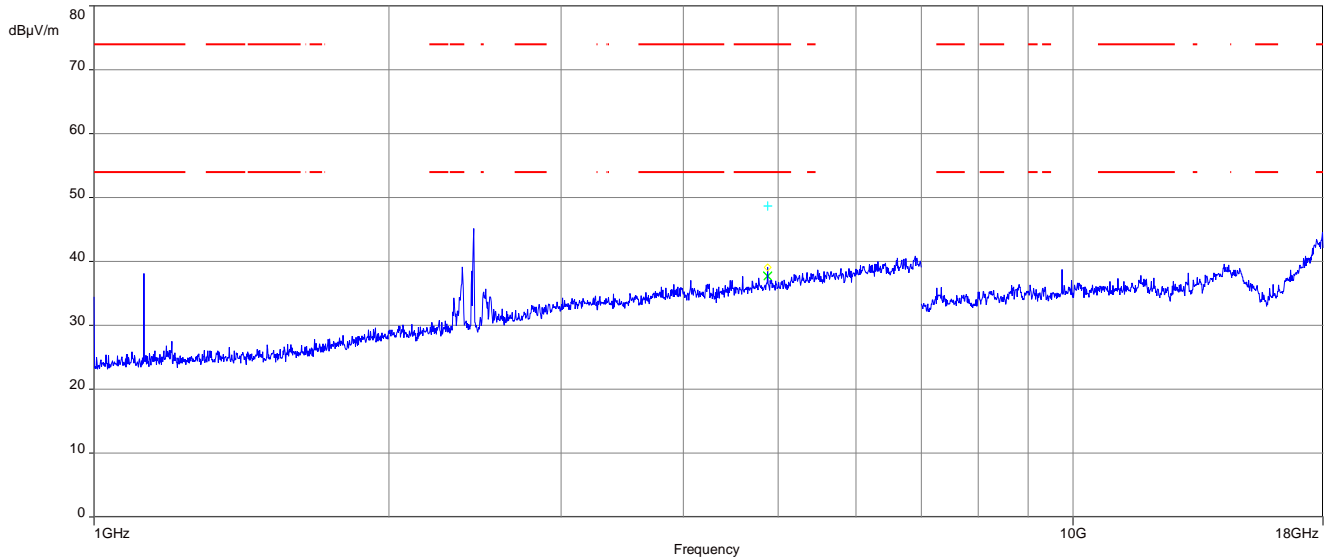
Plot 1: Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization



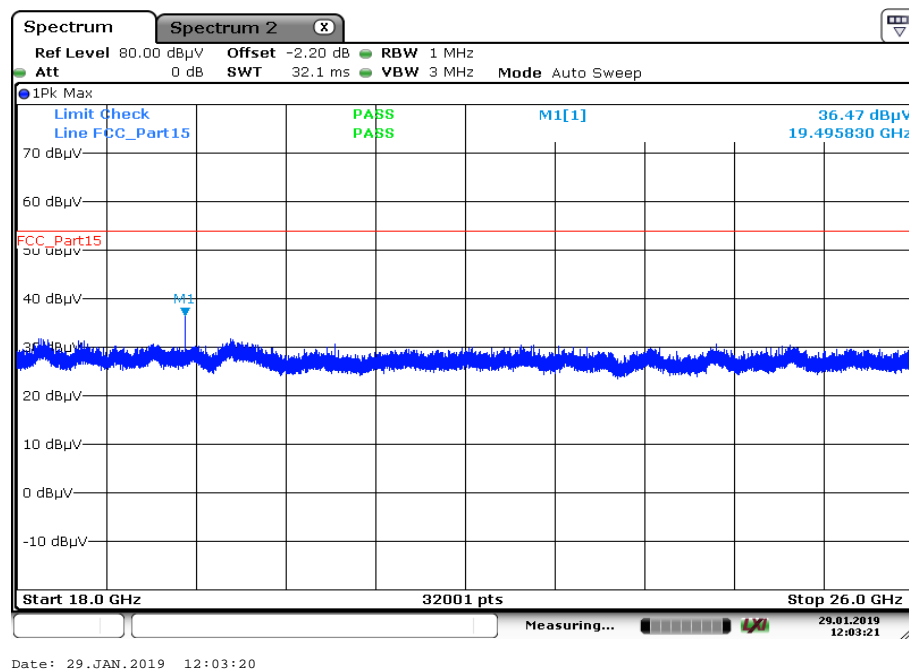
The carrier signal is notched with a 2.4 GHz band rejection filter.

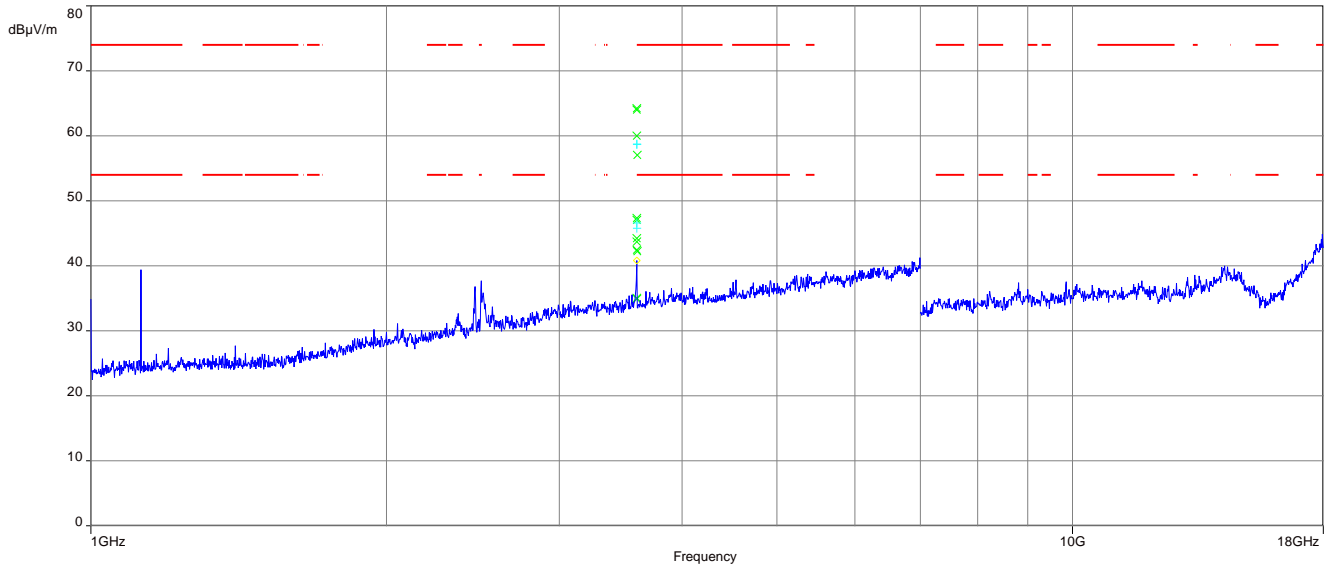
Plot 2: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization



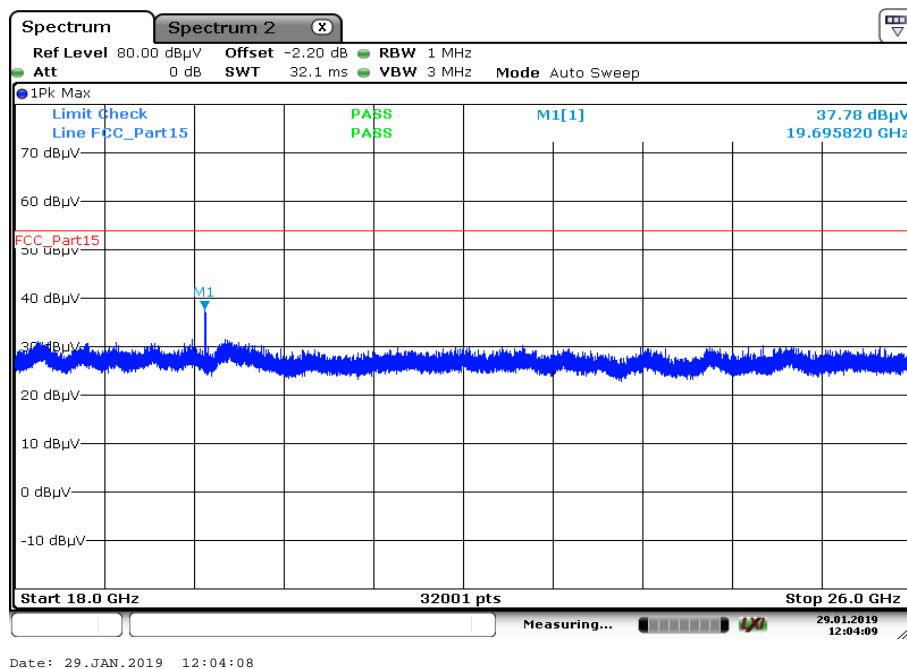
Plot 3: Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 4: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

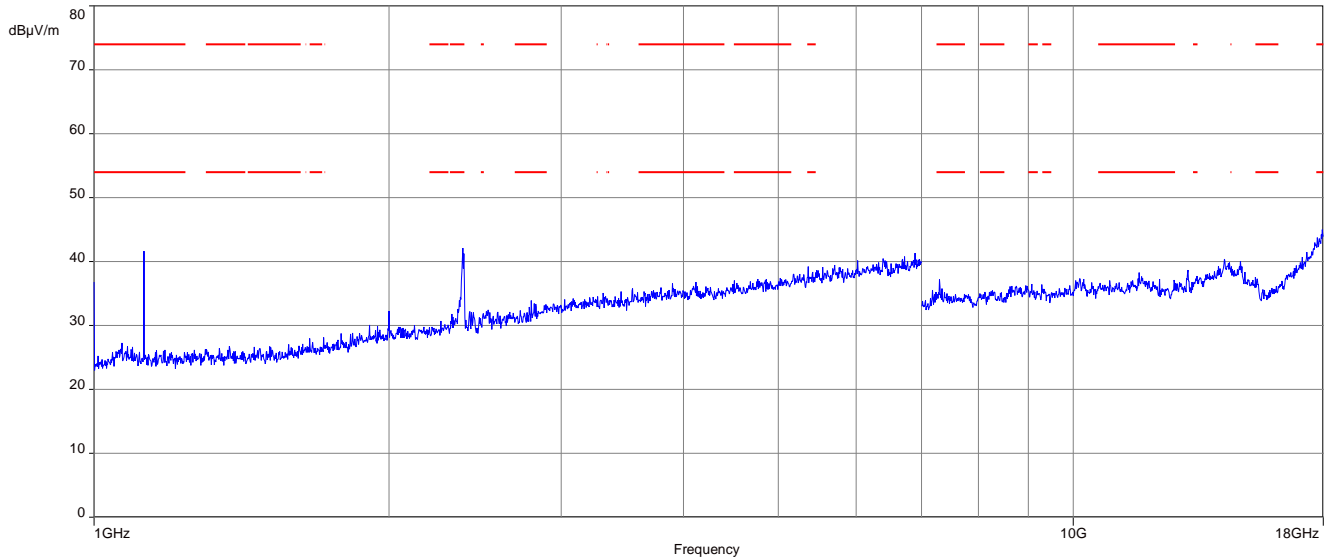
Plot 5: Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 6: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

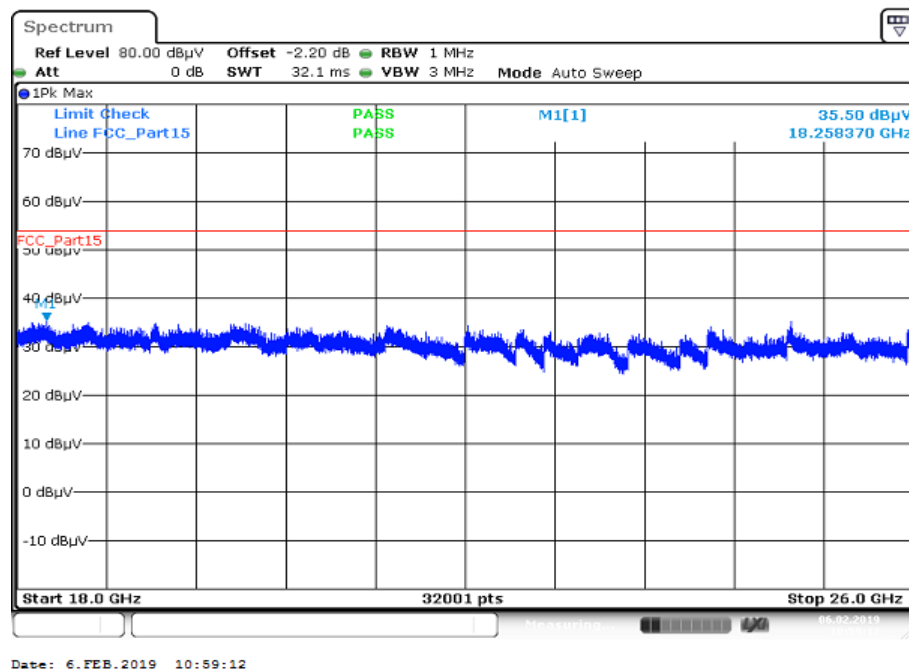
Plots: OFDM n HT40 – mode (40 MHz bandwidth)

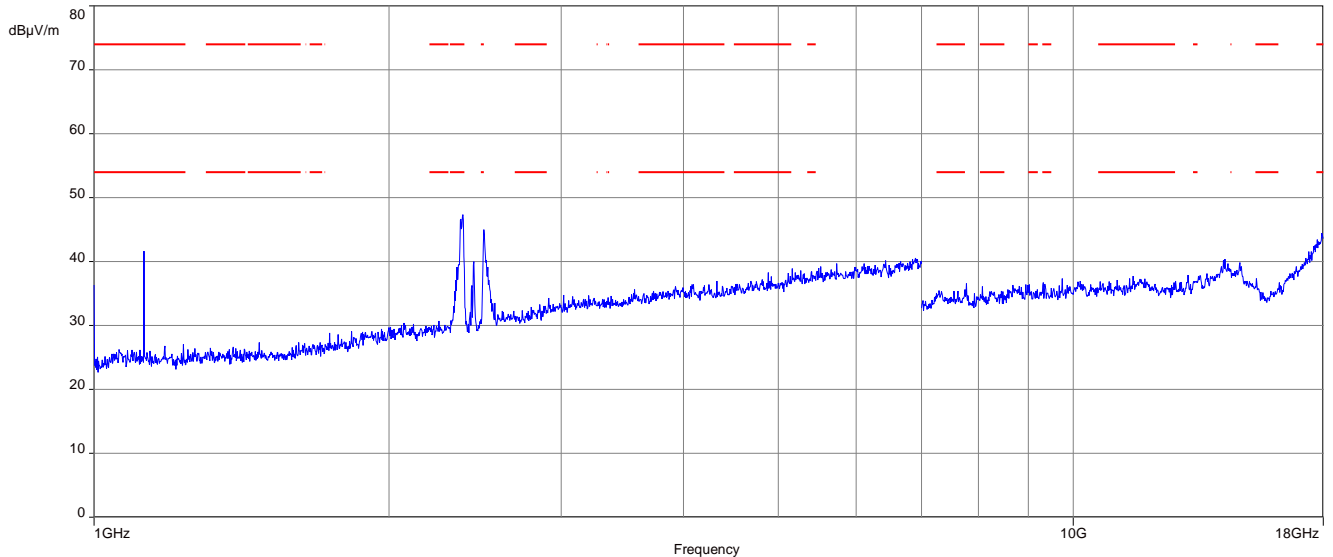
Plot 1: Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization



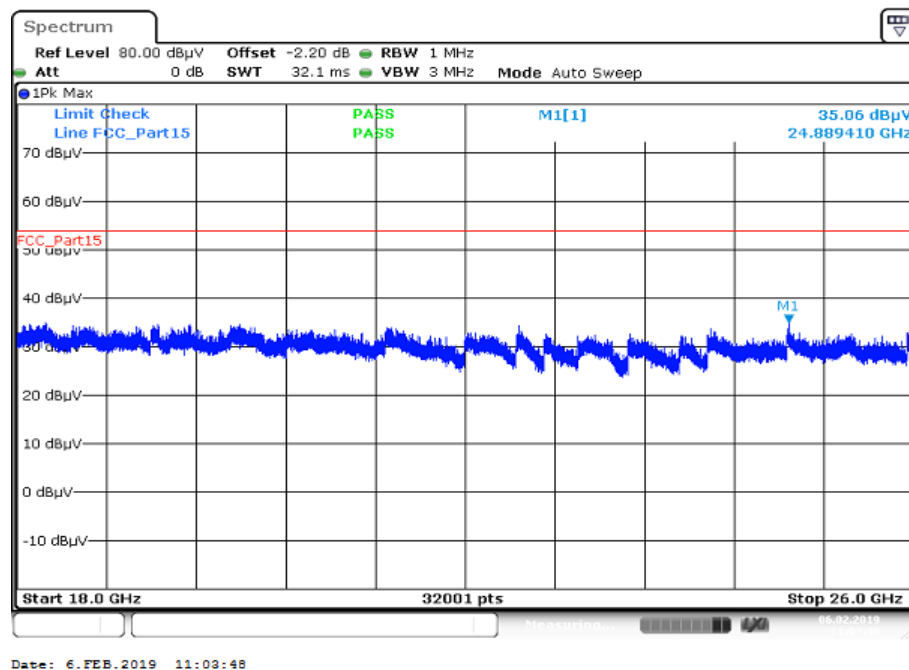
The carrier signal is notched with a 2.4 GHz band rejection filter.

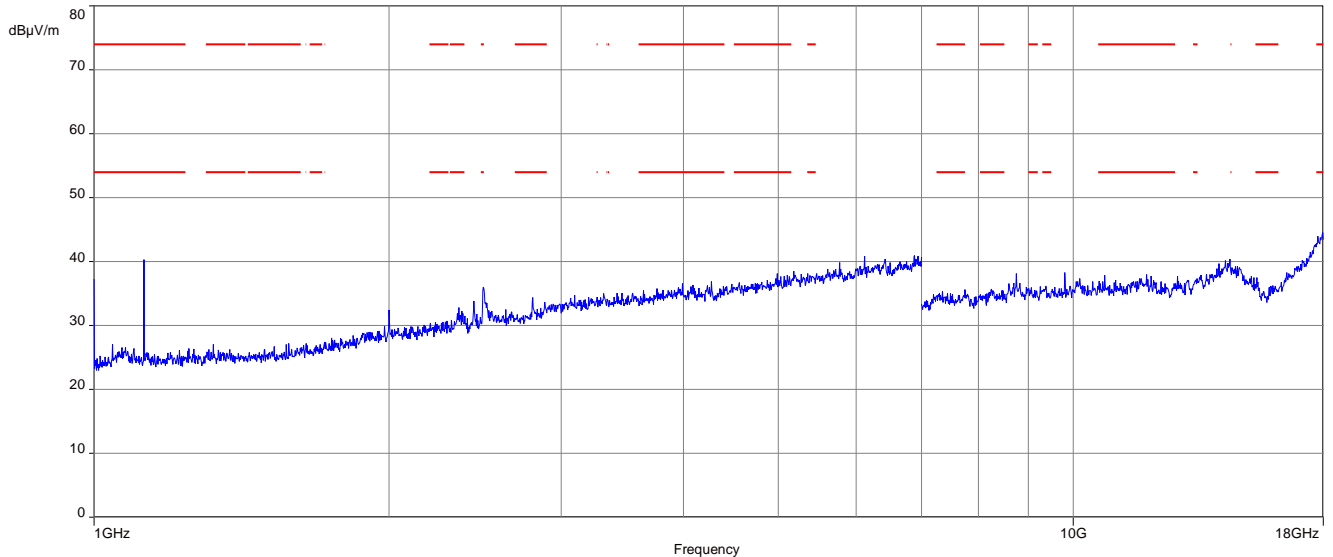
Plot 2: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization



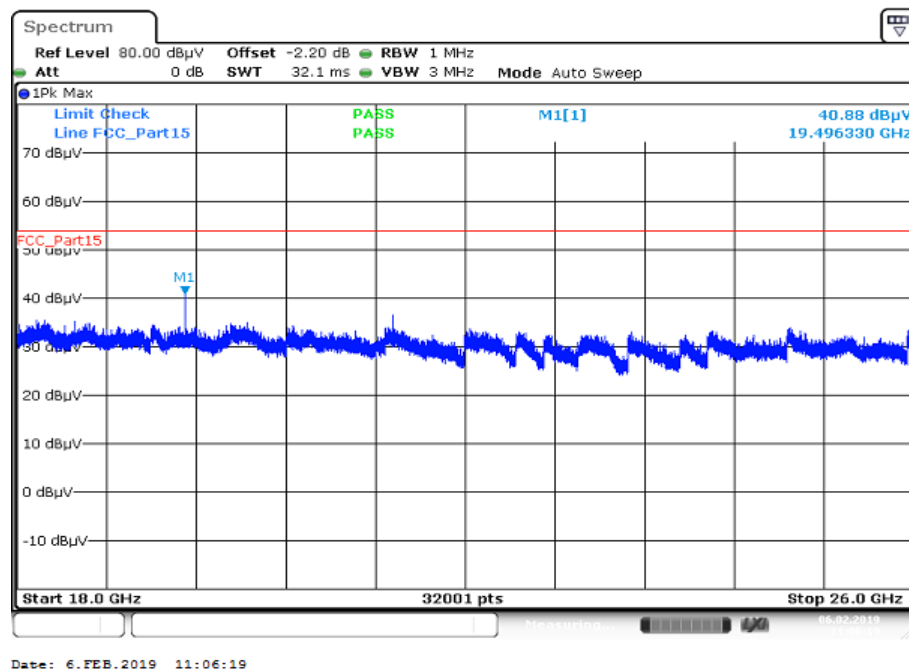
Plot 3: Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

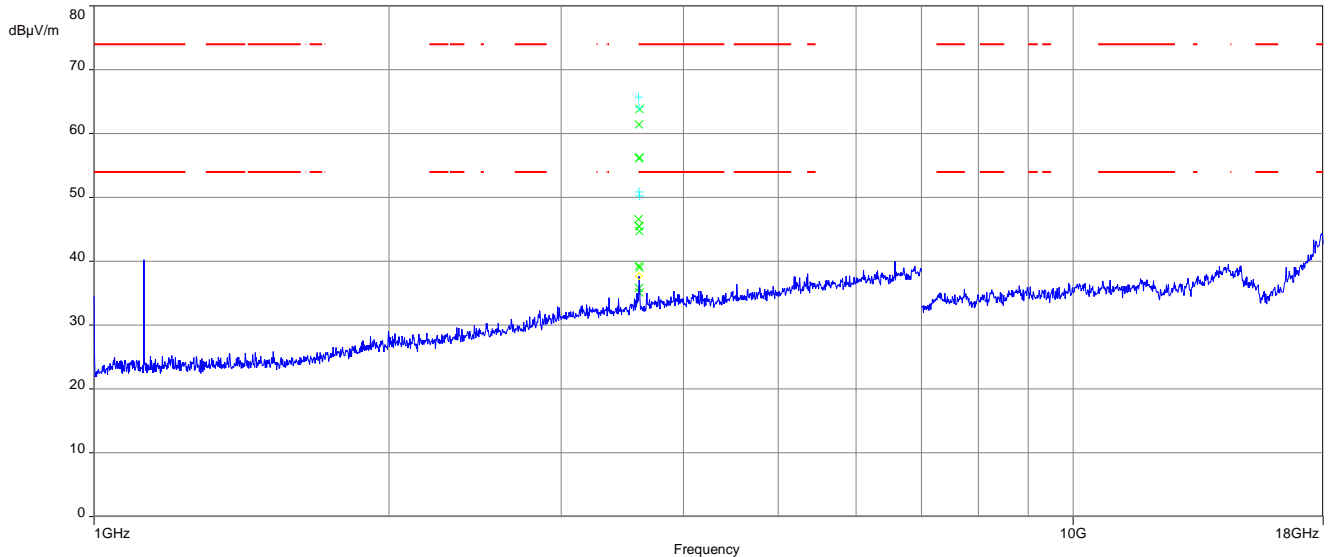
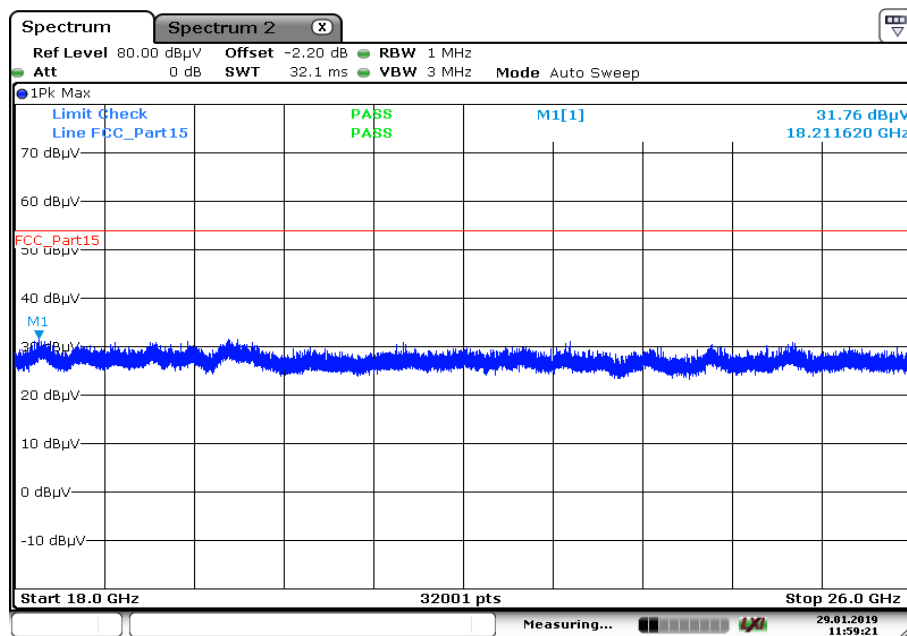
The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 4: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

Plot 5: Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 6: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

Plots: RX / idle mode**Plot 1:** 1 GHz to 18 GHz, vertical & horizontal polarization**Plot 2:** 18 GHz to 26 GHz, vertical & horizontal polarization

Date: 29.JAN.2019 11:59:21

12.14 Spurious emissions conducted below 30 MHz (AC conducted)

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector	Peak - Quasi Peak / Average
Sweep time	Auto
Resolution bandwidth	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span	9 kHz to 30 MHz
Trace mode	Max. hold
Test setup	See chapter 6.4 – A
Measurement uncertainty	See chapter 8

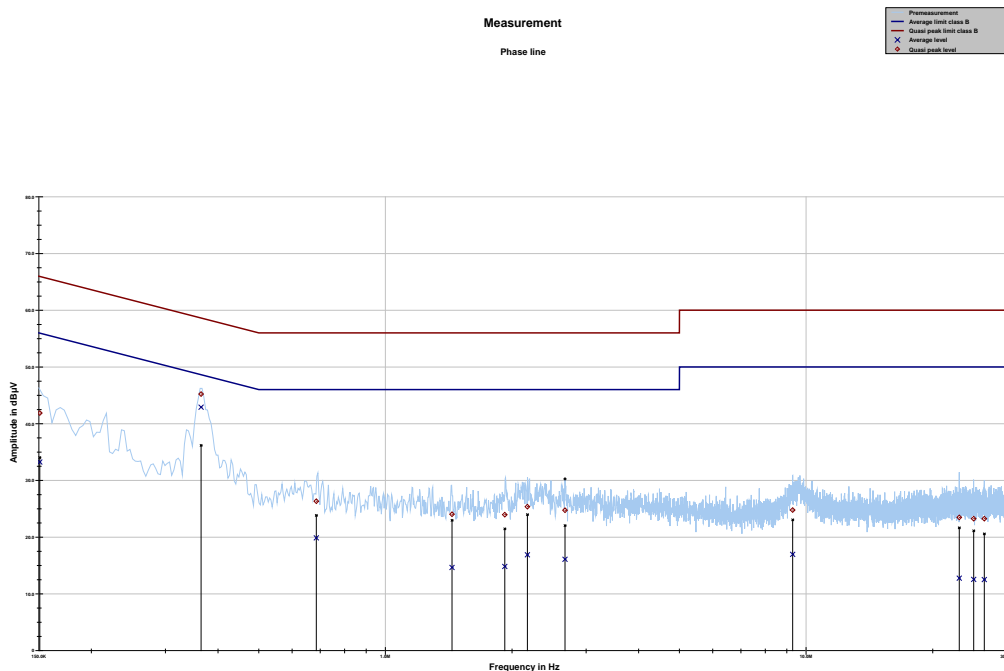
Limits:

FCC		IC
Frequency / MHz)	Quasi-Peak / (dB μ V / m)	Average / (dB μ V / m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

*Decreases with the logarithm of the frequency

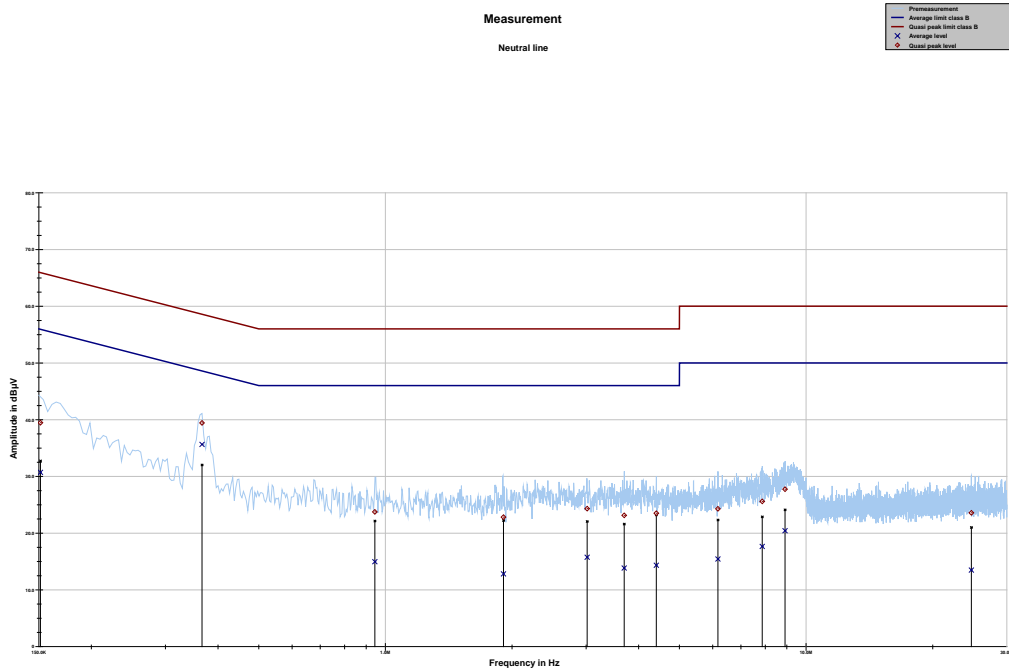
Results:

TX spurious emissions conducted < 30 MHz / (dB μ V / m) @ 3m		
f / MHz	Detector	Level / dB μ V/m
All detected peaks are more than 20 dB below the limit.		

Plots:**Plot 1:** 150 kHz to 30 MHz, phase line

Project ID: 1-7616/18-01-02

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.150831	41.88	24.08	65.954	33.24	22.74	55.976
0.364629	45.22	13.40	58.622	42.90	6.96	49.868
0.685080	26.34	29.66	56.000	19.87	26.13	46.000
1.440158	24.04	31.96	56.000	14.64	31.36	46.000
1.922511	23.95	32.05	56.000	14.82	31.18	46.000
2.175706	25.37	30.63	56.000	16.88	29.12	46.000
2.672120	24.75	31.25	56.000	16.09	29.91	46.000
9.292151	24.76	35.24	60.000	16.95	33.05	50.000
23.132905	23.48	36.52	60.000	12.76	37.24	50.000
25.029473	23.25	36.75	60.000	12.55	37.45	50.000
26.526476	23.24	36.76	60.000	12.51	37.49	50.000

Plot 2: 150 kHz to 30 MHz, neutral line

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.151329	39.46	26.47	65.927	30.70	25.26	55.962
0.366528	39.42	19.16	58.579	35.63	14.18	49.813
0.944001	23.74	32.26	56.000	14.95	31.05	46.000
1.908632	22.82	33.18	56.000	12.81	33.19	46.000
3.017120	24.32	31.68	56.000	15.74	30.26	46.000
3.695798	23.13	32.87	56.000	13.84	32.16	46.000
4.405372	23.50	32.50	56.000	14.33	31.67	46.000
6.171941	24.28	35.72	60.000	15.43	34.57	50.000
7.866119	25.60	34.40	60.000	17.65	32.35	50.000
8.911223	27.74	32.26	60.000	20.43	29.57	50.000
24.717510	23.58	36.42	60.000	13.48	36.52	50.000

13 Observations

No observations except those reported with the single test cases have been made.

Annex A Glossary

EUT	Equipment under test
DUT	Device under test
UUT	Unit under test
GUE	GNSS User Equipment
ETSI	European Telecommunications Standards Institute
EN	European Standard
FCC	Federal Communications Commission
FCC ID	Company Identifier at FCC
IC	Industry Canada
PMN	Product marketing name
HMN	Host marketing name
HVIN	Hardware version identification number
FVIN	Firmware version identification number
EMC	Electromagnetic Compatibility
HW	Hardware
SW	Software
Inv. No.	Inventory number
S/N or SN	Serial number
C	Compliant
NC	Not compliant
NA	Not applicable
NP	Not performed
PP	Positive peak
QP	Quasi peak
AVG	Average
OC	Operating channel
OCW	Operating channel bandwidth
OBW	Occupied bandwidth
OOB	Out of band
DFS	Dynamic frequency selection
CAC	Channel availability check
OP	Occupancy period
NOP	Non occupancy period
DC	Duty cycle
PER	Packet error rate
CW	Clean wave
MC	Modulated carrier
WLAN	Wireless local area network
RLAN	Radio local area network
DSSS	Dynamic sequence spread spectrum
OFDM	Orthogonal frequency division multiplexing
FHSS	Frequency hopping spread spectrum
GNSS	Global Navigation Satellite System
C/N₀	Carrier to noise-density ratio, expressed in dB-Hz

Annex B Document history

Version	Applied changes	Date of release
-/-	Initial release	2019-03-06

Annex C Accreditation Certificate

first page	last page
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p>Accreditation</p>  <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory CTC advanced GmbH Untertürkheimer Straße 6-10, 66117 Saarbrücken</p> <p>is competent under the terms of DIN EN ISO/IEC 17025:2005 to carry out tests in the following fields: Telecommunication</p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 02.06.2017 with the accreditation number D-PL-12076-01 and is valid until 21.04.2021. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 43 pages.</p> <p>Registration number of the certificate: D-PL-12076-01-03</p> <p>Frankfurt, 02.06.2017</p>  <p>Dipl.-Ing. (FH) Ralf Böker Head of Division</p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin Spittelmarkt 10 10117 Berlin</p> <p>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Office Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAKKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAKKS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAKKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: www.european-accreditation.org ILAC: www.ilac.org IAF: www.iaf.nu</p>

Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAKKS or may be received by CTC advanced GmbH on request

<https://www.dakks.de/as/ast/d/D-PL-12076-01-03.pdf>

END OF TEST REPORT