


Rear View

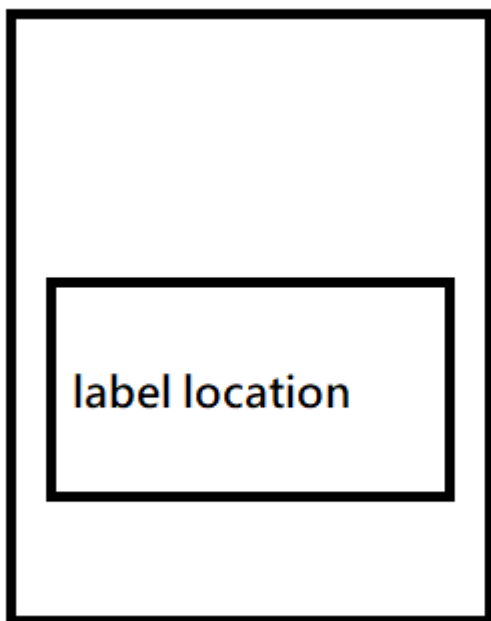

FCC ID: Q87-03530

IC: 3839A-03530

LINKSYS RE6900 PRODUCT ID LABEL
P/N:
Description:
Belkin P/N & Revision: XXXX-XXXX RevA00

Size: 57.96*49.85mm (tolerance±0.2mm)
Material: 50μ White Matt Polyester Film Label with Depressive Liner (thickness: 0.052mm±0.004)
+ embossing adhesive (thickness: 0.033mm±0.003)
+ Text opp film matt + Light stripping release paper + Roll up, with tearing line
50番白色霧面特多龍(thickness: 0.052mm±0.004) + 壓花膠(thickness: 0.033mm±0.003)
+ 打字霧膜 + 輕剝離型紙 + 捲狀進貨, 捲狀樣品請加上齒刀
Environment: All materials and surface finish should comply with RoHS directive
材質, 噴漆, 印刷油墨及表面殘留物, 均需符合RoHS之有害物質檢驗標準

☐

Original


☐

PMS COOL GRAY 2C



☐

PMS BLACK C

Printing content for supplier
供應商印刷內容

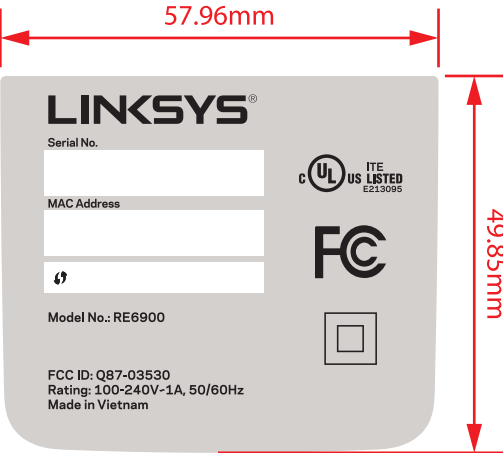

Printing position for factory
工廠列印示意圖
The info. in pink just an illustration for factory, actual printing will be in black.
洋紅資訊為參考用, 工廠以黑色列印

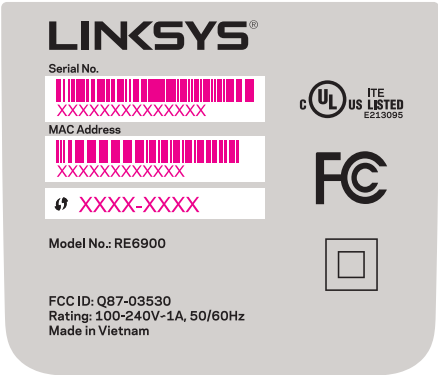

測試 / 檢驗 項目	測試標準
初粘力 (#)	1~6
粘著力 (kgf/inch)	1.0~2.2
保持力 (hr/kgxinch²)	1 ↑

LINKSYS RE7000v2 PRODUCT ID LABEL

P/N:

Description:

Belkin P/N & Revision: 8830-26258 RevA00

Size: 57.96*49.85mm (tolerance±0.2mm)
Material: 50μ White Matt Polyester Film Label with Depressive Liner (thickness: 0.052mm±0.004)
+ embossing adhesive (thickness: 0.033mm±0.003)
+ Text opp film matt + Light stripping release paper + Roll up, with tearing line
50番白色霧面特多龍(thickness: 0.052mm±0.004) + 壓花膠(thickness: 0.033mm±0.003)
+ 打字霧膜 + 輕剝離型紙 + 捲狀進貨, 捲狀樣品請加上齒刀
Environment: All materials and surface finish should comply with RoHS directive
材質, 噴漆, 印刷油墨及表面殘留物, 均需符合RoHS之有害物質檢驗標準



Original




PMS COOL GRAY 2C





PMS BLACK C

Printing content for supplier
供應商印刷內容

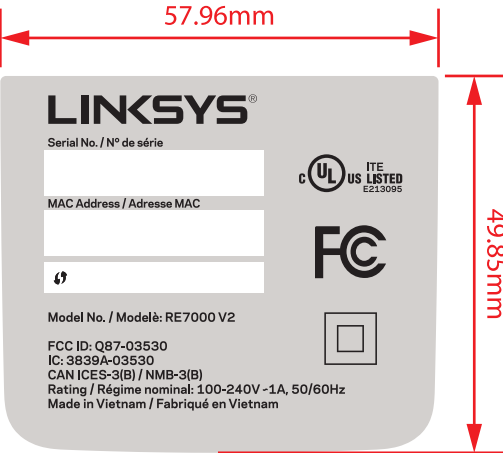

Printing position for factory
工廠列印示意圖

The info. in pink just an illustration for factory,
actual printing will be in black.
洋紅資訊為參考用, 工廠以黑色列印

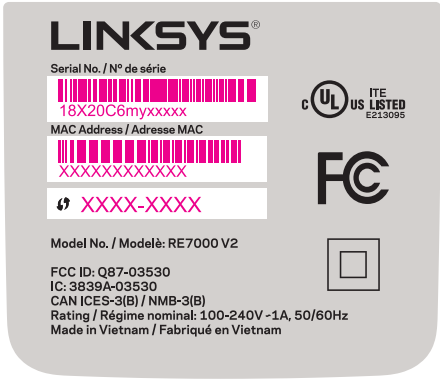

測試 / 檢驗 項目	測試標準
初粘力 (#)	1~6
粘著力 (kgf/inch)	1.0~2.2
保持力 (hr/kgxinch²)	1 ↑

LINKSYS RE7100 PRODUCT ID LABEL
P/N:
Description:
Belkin P/N & Revision: XXXX-XXXX RevA00

Size: 57.96*49.85mm (tolerance±0.2mm)
Material: 50μ White Matt Polyester Film Label with Depressive Liner (thickness: 0.052mm±0.004)
+ embossing adhesive (thickness: 0.033mm±0.003)
+ Text opp film matt + Light stripping release paper + Roll up, with tearing line
50番白色霧面特多龍(thickness: 0.052mm±0.004) + 壓花膠(thickness: 0.033mm±0.003)
+ 打字霧膜 + 輕剝離型紙 + 捲狀進貨, 捲狀樣品請加上齒刀
Environment: All materials and surface finish should comply with RoHS directive
材質, 噴漆, 印刷油墨及表面殘留物, 均需符合RoHS之有害物質檢驗標準

☐

Original


☐

PMS COOL GRAY 2C



☐

PMS BLACK C

Printing content for supplier
供應商印刷內容

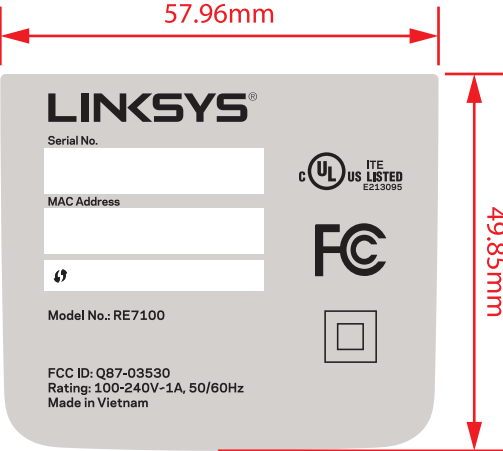

Printing position for factory
工廠列印示意圖
The info. in pink just an illustration for factory,
actual printing will be in black.
洋紅資訊為參考用, 工廠以黑色列印

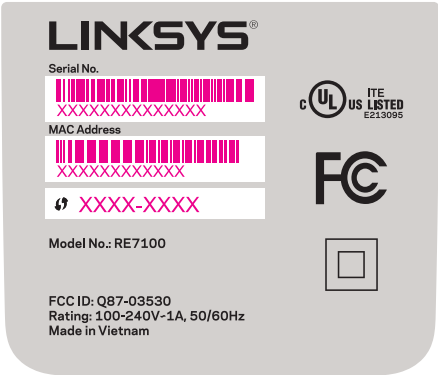

測試 / 檢驗 項目	測試標準
初粘力 (#)	1~6
粘著力 (kgf/inch)	1.0~2.2
保持力 (hr/kgxinch²)	1 ↑