

Report No.: SEWA2212000096RG01

Rev.: 01 Page: 1 of 38

TEST REPORT

Application No.: SEWA2212000096RG

Applicant: Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, **Address of Applicant:**

Minhang District, Shanghai, China 200233

Manufacturer: Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Address of Manufacturer:

Minhang District, Shanghai, China 200233

EUT Description: LTE Cat 1 bis Module

Model No.: EG915Q-NA

Trade Mark: Quectel

FCC ID: XMR2023EG915QNA

> 47 CFR Part 2 47 CFR Part 22

Standards: 47 CFR Part 24

> 47 CFR Part 27 47 CFR Part 90

Date of Receipt: 2023/03/01

Date of Test: 2023/03/01 to 2023/03/16

Date of Issue: 2023/03/17

Test Result: PASS *

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature: anta Sun

Panta Sun

Wireless Laboratory Manager



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 2 of 38

1 Version

	Revision Record				
Version	Version Chapter Date Modifier Remark				
01		2023/03/17		Original	

Prepared By	(Weller Liu) / Test Engineer
Checked By	(Well Wei) / Reviewer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request for accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions-Terms-and-Conditions-Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Indushia Park, Suzhou Area, China (Jiangsu) Pikol Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 鄉鄉: 215000

t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 3 of 38

Contents

1	Ver	sion	2
2	Tes	t Summary	5
	2.1	LTE Band 5	5
	2.2	LTE Band 2	6
	2.3	LTE Band 4 /66	7
	2.4	LTE Band 12	8
	2.5	LTE Band 13	g
	2.6	LTE Band 14	10
	2.7	LTE Band 71	12
3	Ger	neral Information	13
	3.1	Details of Client	13
	3.2	Test Location	13
	3.3	Test Facility	13
	3.4	General Description of EUT	14
	3.5	Test Mode	15
	3.6	Test Environment	15
	3.7	Description of Support Units	15
	3.8	Technical Specification	16
	3.9	Test Frequencies	18
4	Des	scription of Tests	23
	4.1	Conducted Output Power	23
	4.2	Effective (Isotropic) Radiated Power of Transmitter	24
	4.3	Occupied Bandwidth	25
	4.4	Band Edge at Antenna Terminals	26
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	27
	4.6	Peak-Average Ratio	28
	4.7	Field Strength of Spurious Radiation	29
	4.8	·	
	4.9		
		4.9.1 Test Setup 1	



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printeverleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aps
ubject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aps
tention is drawn to the limitation of liability, indemnification and jurisdiction issues defined rein. Any holder of this document is divised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of ilent's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ansaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproducetocept in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content of ppearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the sults shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Indushia Park, Suzhou Area, China (Jiangsu) Pikol Free Trade Zone 215000中国 - 苏州 - 中国(江苏)自由贸易试验区苏州广区苏州工业园区湖胜路1号的6号厂房南部 鄉鎮: 215000

t (86–512) 62992980 w t (86–512) 62992980 se



Report No.:	SEWA2212000096RG0
-------------	-------------------

Rev.:	01
Page:	4 of 38

	4.9.2 Test Setup 2	31
	4.9.3 Test Setup 3	32
	4.10 Test Conditions	33
5	Main Test Instruments	35
	Measurement Uncertainty	
	Appendixes	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits client's instructions, if any. The Company's sole responsibility is to its Client and this comment cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runshang Road, Suzhou Industrial Park, Suzhou Area, Chine (Jiangsu) Pliot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州广区苏州工业园区湖胜路1号的6号广房南部 鄉鄉: 215000



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 5 of 38

2 Test Summary

2.1 LTE Band 5

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	ERP ≤ 7 W	Section 1 of Appendix B.3	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB	Section 2 of Appendix B.3	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.3	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.3	Pass
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.3	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.3	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B.3	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §22.355	≤ ±2.5ppm.	Section 8 of Appendix B.3	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request for accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions-Terms-and-Conditions-Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Read, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6月厂房南部 邮编: 215000



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 6 of 38

2.2 LTE Band 2

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W	Section 1 of Appendix B.1	Pass
Peak-Average Ratio	§24.232(d)	Limit≤13 dB	Section 2 of Appendix B.1	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.1	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.1	Pass
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.1	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.1	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.1	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §24.235	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.1	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request for accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions-Terms-and-Conditions-Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pikof Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 鄉鄉: 215000



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 7 of 38

2.3 LTE Band 4 /66

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	Section 1 of Appendix B.2&B.7	Pass
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB	Section 2 of Appendix B.2&B.7	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.2&B.7	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.2&B.7	Pass
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.2&B.7	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.2&B.7	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.2&B.7	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.2&B.7	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request for accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions-Terms-and-Conditions-Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, Chine (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区海胜商1号的6号厂房商部 鄉編: 215000



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 8 of 38

2.4 LTE Band 12

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP≤3W.	Section 1 of Appendix B.4	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.4	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.4	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.4	Pass
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.4	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.4	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B.4	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.4	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request for accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions-Terms-and-Conditions-Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Indushia Park, Suzhou Area, Chine (Jiangsu) Pikit Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区海胜高1号的6号厂房南部 鄉鄉: 215000



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 9 of 38

2.5 LTE Band 13

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(b)(10)	ERP≤3W.	Section 1 of Appendix B.5	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.5	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.5	Pass
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.5	Pass
Band Edges Compliance	§2.1051, §27.53(c)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.5	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(c) §27.53(f)	≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges. On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 6 of Appendix B.5	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(c) §27.53(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 7 of Appendix B.5	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.5	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request for accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions/Terms-and-Co

South of No. 5 Plant, No. 1, Runsheng Rosal, Suzhou Industrial Park, Suzhou Area, Chine (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区海胜商1号的6号厂房商部 鄉編: 215000



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 10 of 38

2.6 LTE Band 14

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §90.542(c) §90.542(d)	ERP ≤ 3 W	Section 1 of Appendix B.6	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.6	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.6	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.6	Pass
Emission Mask	§2.1051 §90.210(n)	Transmitters designed for operation under this part on frequencies other than listed in this section must meet the emission mask requirements of Emission Mask B. Equipment operating under this part on frequencies allocated to but shared with the Federal Government, must meet the applicable Federal Government technical standards (b) Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows: (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.(2) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 35 dB(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 + 10 log (P) dB.	Section 5 of Appendix B.6	Pass
Band Edges Compliance	§2.1051 §90.543(e)(2)(3)	(1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than 76 + 10 log (P) dB in a 6.25 kHz band	Section 6 of Appendix B.6	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ss.com

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Indushia Park, Suzhou Area, China (Jiangsu) Pikol Free Trade Zone 215000中国 - 苏州 - 中国(江苏)自由贸易试验区苏州广区苏州工业园区湖胜路1号的6号厂房南部 鄉鎮: 215000



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 11 of 38

		- 3 -	1 01 00	
		segment, for base and fixed stations.(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations.(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least 43 + 10 log (P) dB.		
Spurious Emission at Antenna Terminals	§2.1051, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559– 1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 7 of Appendix B.6	Pass
Field Strength of Spurious Radiation	§2.1053, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 8 of Appendix B.6	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §90.213	Within authorized bands of operation/frequency block.	Section 9 of Appendix B.6	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration. Forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND occheck@sss.com

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Indushia Park, Suzhou Area, China (Jiangsu) Pikol Free Trade Zone 215000中国 - 苏州 - 中国(江苏)自由贸易试验区苏州广区苏州工业园区湖胜路1号的6号厂房南部 鄉鎮: 215000

t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 12 of 38

2.7 LTE Band 71

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP≤3W	Section 1 of Appendix B.8	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.8	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.8	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.8	Pass
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.8	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.8	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.8	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	within the authorized bands of operation.	Section 8 of Appendix B.8	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, Chine (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区海胜商1号的6号厂房商部 鄉編: 215000



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 13 of 38

3 General Information

3.1 Details of Client

Applicant:	Quectel Wireless Solutions Co., Ltd.
Address of Applicant:	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233
Manufacturer:	Quectel Wireless Solutions Co., Ltd.
Address of Manufacturer:	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

3.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Weller Liu, King-p Li

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC -Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents subject to Terms and Conditions (Ferms-Document.aspt.)
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

5000 t (86–512) 62992980 5000 t (86–512) 62992980



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 14 of 38

3.4 General Description of EUT

EUT Description:	LTE Cat 1 bis Module					
Model No.:	EG915Q-NA					
Trade Mark:	Quectel					
Hardware Version:	R1.0					
Software Version:	EG915QNALCR01/	404M04	4			
INACL	RF Conducted	86750	07060015845			
IMEI:	RSE	86750	07060022437			
Antenna Type:	External Antenna					
	LTE Band 2:	1.43d	Bi	LTE Band 4:		1.54dBi
	LTE Band 5:	2.21d	Bi	LTE Band 12	2:	2.00dBi
	LTE Band 13:	LTE Band 13: 2.10d		LTE Band 14	l :	2.20dBi
Antenna Gain:	LTE Band 66:	1.68d	Bi	LTE Band 71:		1.20dBi
	Note: The antenna gain a manufacturer.	re deriv	ved from the ga	ain information	report	provided by the
DE Oaklas	0.8dB(Below 1GHz)	1.0dB(1.0~2	.4GHz)	1.2dB	3(2.4~3.4GHz)
RF Cable:	1.5dB(Above 3.4GH	Hz)				
Remark:			1			

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic formard documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-an-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 15 of 38

3.5 Test Mode

Test Mode	Test Modes Description				
LTE/TM1	LTE system, QPSK modulation				
LTE/TM2	LTE system, 16QAM modulation				
Remark: The test mode(s)	Remark: The test mode(s) are selected according to relevant radio technology specifications.				

3.6 Test Environment

Environment Parameter	101.0 kPa Selected Values During Tests			
Relative Humidity	44-46 %	RH Ambient		
Value	Temperature(°C)	Voltage(V)		
NTNV	22~23	3.8		
LTLV	-30	3.3		
LTHV	-30	4.3		
HTLV	50	3.3		
HTHV	50	4.3		
Remark:				
NV: Normal Voltage LV:	Low Extreme Test Voltage	HV: High Extreme Test Voltage		
NT: Normal Temperature LT:	Low Extreme Test Temperature F	HT: High Extreme Test Temperature		

3.7 Description of Support Units

Description	Manufacturer	Model No.				
Mother board	Quectel	N/A				
Remark: all above the information of table are provided by client.						



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at https://www.sgs.com/en/Ferms-and-Conditions.aspx.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at https://www.sgs.com/en/Ferms-and-Conditions/Ferms-a-Document.aspx.attention is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document comment cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest stort of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industria Park, Suzhou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 16 of 38

3.8 Technical Specification

3.8 Technical Specification							
Characteristics	Description						
Radio System Type							
	Band		TX		RX		
	LTE Band 2		1850 to 19			1990 MHz	
	LTE Band 4		1710 to 17			2155 MHz	
	LTE Band 5		824 to 849	MHz	869 to 8	94 MHz	
Supported Frequency Range	LTE Band 12		699 to 716	MHz	729 to 7	46 MHz	
	LTE Band 13		777 to 787	MHz	746 to 7	56 MHz	
	LTE Band 14		788 to 798	MHz	758 to 7	68 MHz	
	LTE Band 66		1710 to 17	80 MHz	2110 to	2200 MHz	
	LTE Band 71		663 to 698	MHz	617 to 6	52 MHz	
	LTE Band 2		⊠1.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz	
	LIE Ballu Z		⊠15 MHz	⊠20 MHz			
	LTE Band 4		⊠1.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz	
	LTL Band 4		⊠15 MHz	⊠20 MHz			
	LTE Band 5		⊠1.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz	
	LTE Band 12		⊠1.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz	
Supported Channel Bandwidth	LTE Band 13		⊠5 MHz	⊠10 MHz			
	LTE Band 14		⊠5 MHz	⊠10 MHz			
	LTE Band 66		⊠1.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz	
	LTE Band 66		⊠15MHz	⊠20MHz			
	LTE Band 71		⊠5MHz	⊠10MHz	⊠15MHz	⊠20MHz	
	Note: Only 27 Resource Blocks for 10MHz/15MHz/20MHz when the modulation is 16QAM.						
Characteristics	Description						
Decimation of Environment	E-UTRA:	QP	SK 16	6QAM			
Designation of Emissions		1M	09G7D 1I	M10W7D			
(Remark: the necessary	is the LTE Band 2		2M70G7D 2M69W7D				
bandwidth of which is the			47G7D 41	M47W7D			
worst value from the			94G7D 4 i	M88W7D			
measured occupied			//5G7D 5I	M23W7D			
bandwidths for each type of	<u> </u>		/10G7D 51	M28W7D			
channel bandwidth	LTE Band 4			M10W7D			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indeminification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CVD. Doccheck@ss.com

South of No. 6 Plant, No. 1, Runsheng Read, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zore 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 v t (86–512) 62992980 s



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 17 of 38

			age: 17 of 38
configuration.)		2M70G7D	2M69W7D
		4M47G7D	4M47W7D
		8M94G7D	4M88W7D
		13M5G7D	5M23W7D
		18M0G7D	5M25W7D
		1M09G7D	1M10W7D
	LTE Band 5	2M70G7D	2M69W7D
	LIE Ballu 5	4M47G7D	4M47W7D
		8M95G7D	4M89W7D
		1M09G7D	1M10W7D
	LTE Bond 12	2M70G7D	2M69W7D
	LTE Band 12	4M47G7D	4M47W7D
		8M95G7D	4M89W7D
	LTE Band 13	4M47G7D	4M47W7D
		8M92G7D	4M89W7D
	LTE Band 14	4M47G7D	4M47W7D
		8M93G7D	4M89W7D
		1M09G7D	1M10W7D
		2M70G7D	2M69W7D
	LTE Band 66	4M47G7D	4M47W7D
	LIE Ballu 00	8M95G7D	4M89W7D
		13M5G7D	5M22W7D
		18M0G7D	5M26W7D
	LTE Band 71	4M47G7D	4M48W7D
		8M96G7D	4M89W7D
		13M5G7D	5M27W7D
		18M0G7D	5M29W7D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration. Forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND occheck@sss.com

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Indushia Park, Suzhou Area, China (Jiangsu) Pikol Free Trade Zone 215000中国 - 苏州 - 中国(江苏)自由贸易试验区苏州广区苏州工业园区湖胜路1号的6号厂房南部 鄉鎮: 215000



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 18 of 38

3.9 Test Frequencies

Took Made	Dondwidth	TX / RX		RF Channel	
Test Mode	Bandwidth TX / RX	Low (L)	Middle (M)	High (H)	
			Channel 18607	Channel 18900	Channel 19193
		TX	1850.7 MHz	1880 MHz	1909.3 MHz
	1.4MHz	RX	Channel 607	Channel 900	Channel 1193
		KA	1930.7 MHz	1960 MHz	1989.3 MHz
			Channel 18615	Channel 18900	Channel 19185
		TX	1851.5 MHz	1880 MHz	1908.5 MHz
	3MHz	RX	Channel 615	Channel 900	Channel 1185
		KΛ	1931.5 MHz	1960 MHz	1988.5 MHz
	5MHz	TX	Channel 18625	Channel 18900	Channel 19175
			1852.5 MHz	1880 MHz	1907.5 MHz
		RX	Channel 625	Channel 900	Channel1175
LTE Band 2			1932.5 MHz	1960 MHz	1987.5 MHz
LIE Dallu Z	10MHz	TX	Channel 18650	Channel 18900	Channel 19150
			1855 MHz	1880 MHz	1905 MHz
		RX	Channel 650	Channel 900	Channel 1150
		ΓΛ	1935 MHz	1960 MHz	1985 MHz
			Channel 18675	Channel 18900	Channel 19125
		TX	1857.5 MHz	1880 MHz	1902.5 MHz
	15MHz	RX	Channel 675	Channel 900	Channel 1125
		ΓΛ	1937.5 MHz	1960 MHz	1982.5 MHz
			Channel 18700	Channel 18900	Channel 19100
		TX	1860 MHz	1880 MHz	1900 MHz
	20MHz	RX	Channel 700	Channel 900	Channel 1100
		KA	1940 MHz	1960 MHz	1980 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at https://www.sgs.com/en/Ferms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions [Ferms-and-Conditions] Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions ferms-and-Conditions appearance and subject to the first subject of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 19 of 38

			ı agc.	13 01 30		
Test Mode	Bandwidth TX / RX	TY / PY		RF Channel		
1 est ivioue		Low (L)	Middle (M)	High (H)		
			Channel 19957	Channel 20175	Channel 20393	
		TX	1710.7 MHz	1732.5 MHz	1754.3 MHz	
	1.4MHz	RX	Channel 1975	Channel 2175	Channel 2375	
		NA	2112.5 MHz	2132.5MHz	2152.5 MHz	
			Channel 19965	Channel 20175	Channel 20385	
		TX	1711.5 MHz	1732.5 MHz	1753.5 MHz	
	3MHz	RX	Channel 2000	Channel 2175	Channel 2350	
		KA.	2115 MHz	2132.5MHz	2150 MHz	
	5MHz		Channel 19975	Channel 20175	Channel 20375	
		TX	1712.5 MHz	1732.5 MHz	1752.5 MHz	
		RX	Channel 1975	Channel 2175	Channel 2375	
LTC Daniel 4			2112.5 MHz	2132.5MHz	2152.5 MHz	
LTE Band 4	10MHz		Channel 20000	Channel 20175	Channel 20350	
		40.41.	TX	1715 MHz	1732.5 MHz	1750 MHz
		10MHz RX	Channel 2000	Channel 2175	Channel 2350	
			2115 MHz	2132.5MHz	2150 MHz	
			Channel 20025	Channel 20175	Channel 20325	
		TX	1717.5 MHz	1732.5 MHz	1747.5 MHz	
	15MHz	RX	Channel 2025	Channel 2175	Channel 2325	
			2117.5 MHz	2132.5MHz	2147.5 MHz	
			Channel 20050	Channel 20175	Channel 20300	
	TX		1720 MHz	1732.5 MHz	1745 MHz	
	20MHz	DV	Channel 2050	Channel 2175	Channel 2300	
		RX	2120 MHz	2132.5MHz	2145 MHz	

Took Made	Donduidth	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 20407	Channel 20525	Channel 20643
	1.4MHz	TX	824.7 MHz	836.5 MHz	848.3 MHz
		RX	Channel 2407	Channel 2525	Channel 2643
		KA.	869.7 MHz	881.5 MHz	893.3 MHz
			Channel 20415	Channel 20525	Channel 20635
	3MHz E Band 5	TX	825.5 MHz	836.5 MHz	847.5 MHz
		RX	Channel 2415	Channel 2525	Channel 2635
1.TE D 1.5			870.5 MHz	881.5 MHz	892.5 MHz
LIE Band 5		TX	Channel 20425	Channel 20525	Channel 20625
	CN41 I		826.5 MHz	836.5 MHz	846.5 MHz
	5MHz	RX	Channel 2425	Channel 2525	Channel 2625
			871.5 MHz	881.5 MHz	891.5 MHz
	10MHz		Channel 20450	Channel 20525	Channel 20600
		TX	829 MHz	836.5 MHz	844 MHz
		RX	Channel 2450	Channel 2525	Channel 2600
		Γ.Λ	874 MHz	881.5 MHz	889 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.reps.com/en/Terms-and-Conditions.reps.com/en/Terms-and-Conditions.reps.com/en/Terms-and-Conditions.reps.com/en/Terms-and-Conditions.reps.com/en/Terms-and-Conditions.reps.com/en/Terms-and-Conditions.reps.com/en/Terms-and-Conditions.reps.com/en/Terms-and-Conditions.reps.com/en/Terms-and-Conditions.reps.com/en/Terms-and-Conditions.reps.com/en/Terms-and-Conditions.reps.com/en/Terms-and-Conditions.reps.com/en/Terms-and-Conditions.reps.com/en/Terms-and-Conditions.reps.com/en/Terms-and-Conditions.reps.com/en/Terms-and-Conditions.reps.com/en/Terms-and-Conditions/terms-and-Conditions/terms-and-Conditions/terms-and-Conditions/terms-and-Conditions/terms-and-Conditions/terms-and-Conditions/terms-and-Conditions/terms-and-Conditions/terms-and-Conditions/terms-and-Conditions/terms-and-Conditions/terms-and-Conditions/terms-and-Conditions/terms-and-Conditions/terms-and-Conditions/terms-and-Conditions/terms-and-Conditions/terms-and-Conditions/terms-and-Conditions-and

South of No. 6 Plant, No. 1, Runshang Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Ploti Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州 | 上级区海胜路 | 号的8月 房南部 鄉鄉: 215000

t (86–512) 62992980 w t (86–512) 62992980 sg



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 20 of 38

			ı agc.	20 01 30	
Test Mode	Bandwidth	TX / RX		RF Channel	
i est iviode	Dariuwiutii	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 23017	Channel 23095	Channel 23173
		TX	699.7 MHz	707.5 MHz	715.3 MHz
	1.4MHz	RX	Channel 5017	Channel 5095	Channel 5173
		Γ.Λ	729.7 MHz	737.5 MHz	745.3 MHz
			Channel 23025	Channel 23095	Channel 23165
		TX	700.5 MHz	707.5 MHz	714.5 MHz
	3MHz	RX	Channel 5025	Channel 5095	Channel 5165
LTE Day 140			730.5 MHz	737.5 MHz	744.5 MHz
LTE Band 12		TX	Channel 23035	Channel 23095	Channel 23155
	5N41 I-		701.5 MHz	707.5 MHz	713.5 MHz
	5MHz	RX	Channel 5035	Channel 5095	Channel 5155
			731.5 MHz	737.5 MHz	743.5 MHz
			Channel 23060	Channel 23095	Channel 23130
		TX	704 MHz	707.5 MHz	711 MHz
	10MHz	RX	Channel 5060	Channel 5095	Channel 5130
		NA	734 MHz	737.5 MHz	741 MHz

Test Mode	Bandwidth	TX / RX		RF Channel	
i est ivioue	Dariuwiutii	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 23025	Channel 23230	Channel 23255
	5MHz	TX [779.5 MHz	782 MHz	784.5 MHz
		RX	Channel 5205	Channel 5230	Channel 5255
LTE Band 13			748.5 MHz	751 MHz	753.5 MHz
LIE Dallu 13			Channel 23230	Channel 23230	Channel 23230
	TX	782 MHz	782 MHz	782 MHz	
	10MHz	DV	Channel 5230	Channel 5230	Channel 5230
		RX	751 MHz	751 MHz	751 MHz

Test Mode	Bandwidth	TX / RX	RF Channel		
1 est Mode	Dariuwiutii	IA/NA	Low (L)	Middle (M)	High (H)
			Channel 23305	Channel 23330	Channel 23355
	5MHz TE Band 14	TX	790.5 MHz	793 MHz	795.5 MHz
		RX	Channel 5305	Channel 5330	Channel 5355
LTE Dand 14			760.5 MHz	763 MHz	765.5 MHz
LIE Dallu 14			Channel 23330	Channel 23330	Channel 23330
	TX	793MHz	793 MHz	793 MHz	
	10MHz	DV	Channel 5330	Channel 5330	Channel 5330
		RX	763MHz	763 MHz	763 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at https://www.sgs.com/en/Ferms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions [Ferms-and-Conditions] Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions ferms-and-Conditions appearance and subject to the first subject of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 21 of 38

Fage. 210130						
Test Mode	Bandwidth	TX / RX		RF Channel		
1 est Wode	Danawiatii	IX/IX	Low (L)	Middle (M)	High (H)	
		TX	Channel 131979	Channel 132322	Channel 132665	
			1710.7 MHz	1745 MHz	1779.3 MHz	
	1.4MHz	RX	Channel 66443	Channel 66786	Channel 67329	
		I IX	2110.7 MHz	2145MHz	2199.3 MHz	
			Channel 131987	Channel 132322	Channel 132657	
		TX	1711.5 MHz	1745 MHz	1778.5MHz	
	3MHz	RX	Channel 66451	Channel 66786	Channel 67321	
		I KA	2111.5 MHz	2145MHz	2198.5MHz	
			Channel 131997	Channel 132322	Channel 132647	
	55.41.1	TX	1712.5 MHz	1745 MHz	1777.5 MHz	
	5MHz 10MHz	RX	Channel 66461	Channel 66786	Channel 67311	
LTC Danieloo			2112.5 MHz	2145MHz	2197.5 MHz	
LTE Band66				Channel 132022	Channel 132322	Channel 132622
		TX	1715 MHz	1745 MHz	1775 MHz	
		DV	Channel 66486	Channel 66786	Channel 67286	
		RX	2115 MHz	2145MHz	2195 MHz	
				Channel 132047	Channel 132322	Channel 132597
		TX	1717.5 MHz	1745 MHz	1772.5 MHz	
	15MHz	RX	Channel 66511	Channel 66786	Channel 67261	
		^^	2117.5 MHz	2145MHz	2192.5 MHz	
			Channel 132072	Channel 132322	Channel 132572	
		TX	1720 MHz	1745 MHz	1770 MHz	
	20MHz	DV	Channel 66536	Channel 66786	Channel 67236	
		RX	2120 MHz	2145MHz	2190 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at https://www.sgs.com/en/Ferms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions [Ferms-and-Conditions] Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions ferms-and-Conditions appearance and subject to the first subject of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pikol Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 鄉鎮: 215000



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 22 of 38

1 age. 22 01 00					
Test Mode	Bandwidth	TX / RX		RF Channel	
1 est ivioue	Test Mode Bandwidth	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 133147	Channel 133297	Channel 133447
		TX	665.5 MHz	680.5 MHz	695.5 MHz
	5MHz	RX	Channel 68611	Channel 68761	Channel 68911
		I IX	619.5 MHz	634.5 MHz	649.5 MHz
			Channel 133172	Channel 133297	Channel 133422
		TX	668 MHz	680.5 MHz	693 MHz
	10MHz	RX	Channel 68636	Channel 68761	Channel 68886
L TE D 174			622 MHz	634.5 MHz	647 MHz
LTE Band71		TX	Channel 133197	Channel 133297	Channel 133397
	45841-		670.5 MHz	680.5 MHz	690.5 MHz
	15MHZ	15MHz RX	Channel 68661	Channel 68761	Channel 68861
			624.5 MHz	634.5 MHz	644.5 MHz
			Channel 133222	Channel 133297	Channel 133372
	20MHz	TX	673 MHz	680.5 MHz	688 MHz
		RX	Channel 68686	Channel 68761	Channel 68836
			627 MHz	634.5 MHz	642 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request for accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions-Terms-and-Conditions-Terms-and-Conditio

South of No. 6 Plant, No. 1, Runshang Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Ploti Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州 | 上级区海胜路 | 号的8月 房南部 鄉鄉: 215000

00 t (86–512) 62992980 00 t (86–512) 62992980



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 23 of 38

4 Description of Tests

4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at https://www.sgs.com/en/Ferms-and-Conditions.aspx.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at https://www.sgs.com/en/Ferms-and-Conditions/Ferms-a-Document.aspx.attention is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document comment cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest stort of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

5000 t (86–512) 62992980 5000 t (86–512) 62992980



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 24 of 38

4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBi) EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents subject to Terms and Conditions (Ferms-Document.aspt.)
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 25 of 38

4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7



otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service f, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format doct to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions/Terms

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 26 of 38

4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW > 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize





Report No.: SEWA2212000096RG01

Rev.: 01 Page: 27 of 38

4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings



iting, this document is issued by the Company subject to its General Conditions of Servic accessible at https://www.sgs.com/en/Terms-and-Conditions/Terms-an

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 28 of 38

4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.app.and, or electronic Document as this://www.sps.com/en/Terms-and-Conditions/Terms-Document.sps.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 29 of 38

4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dB μ V/m) = Measured amplitude level (dB μ V) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB μ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dB μ V/m) = Measured amplitude level (dB μ V) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB μ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20*LOG(3/1) = 9.54 dB.

Remark: Reference test setup 2

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit - Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 30 of 38

4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; Section 9

- . The frequency stability of the transmitter is measured by:
- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

Time Period and Procedure:

- The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3






Report No.: SEWA2212000096RG01


Rev.: 01 Page: 31 of 38

4.9 Test Setups

4.9.1 Test Setup 1

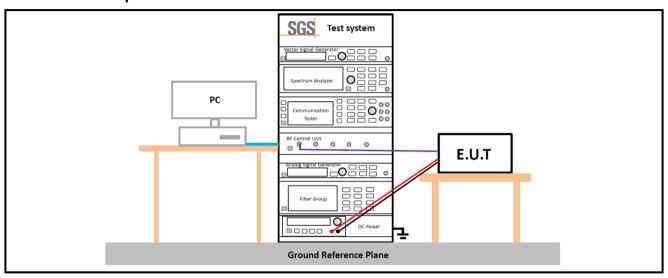

4.9.2 Test Setup 2

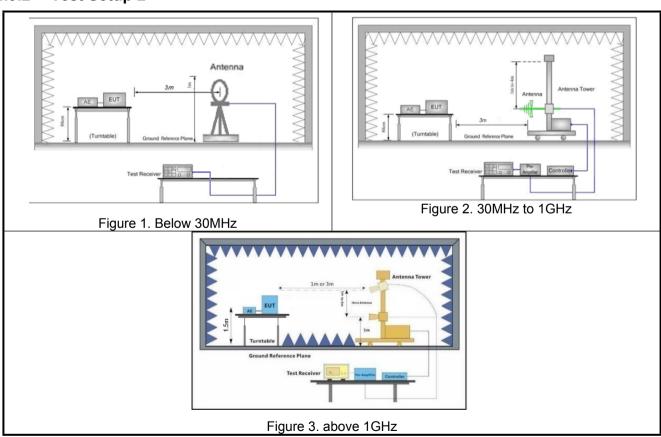



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents, subject to Terms and Conditions for Electronic Document as that <a href="https://www.sgs.com/en/Terms-en/Conditions/Terms-e

South of No. 6 Part, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zore 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 w t (86–512) 62992980 sg




Report No.: SEWA2212000096RG01

Rev.: 01

Page: 32 of 38

4.9.3 Test Setup 3

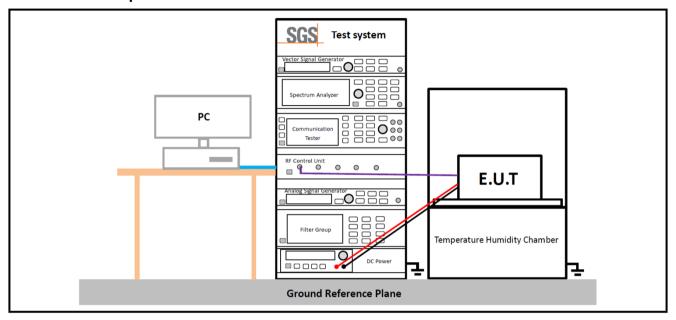



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en/

South of No. 6 Part, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 33 of 38

4.10Test Conditions

	Transmit Output Power Data - Average Power, Total
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	LTE/TM1;LTE/TM2
Test Mode	
Test Case	Peak-to-Average Ratio Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	LTE/TM1
	Modulation Characteristics
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	M (M= middle channel)
Test Mode	LTE/TM1;LTE/TM2
	Bandwidth - Occupied Bandwidth
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	LTE/TM1;LTE/TM2
	Bandwidth - Emission Bandwidth
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	LTE/TM1;LTE/TM2
	Band Edges Compliance
Test Case	Test Conditions



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ss.com

South of No. 6 Plant, No. 1, Punsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 鄉編: 215000



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 34 of 38

	Fage. 34 01 38		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	L, H (L= low channel, H= high channel)		
Test Mode	LTE/TM1		
	Spurious Emission at Antenna Terminals		
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	LTE/TM1		
Field Strength of Spurious Radiation			
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 2		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	LTE/TM1 Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.		
	Frequency Stability		
Test Case	Test Conditions		
Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage		
rest Environment	(2) VL, VN and VH of Rated Voltage at Ambient Climate.		
Test Setup	Test Setup 3		
DE OL L (TV)			
RF Channels (TX)	M (M= middle channel)		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request for accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions-Terms-and-Conditions-Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Indushia Park, Suzhou Area, China (Jiangsu) Pikol Free Trade Zone 215000中国 - 苏州 - 中国(江苏)自由贸易试验区苏州广区苏州工业园区湖胜路1号的6号厂房南部 鄉鎮: 215000



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 35 of 38

5 Main Test Instruments

	RF conducted test						
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)		
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2021/05/08	2024/05/07		
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2023/02/06	2024/02/05		
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2022/05/17	2023/05/16		
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR		
Radio Communication Analyzer	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22		
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	2023/02/06	2024/02/05		
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2023/02/06	2024/02/05		
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-01	2023/02/06	2024/02/05		
Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	2022/09/16	2023/09/15		
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request for accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions-Terms-and-Conditions-Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Read, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6月厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 36 of 38

		RSE Test Sy	/stem		
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2021/05/08	2024/05/07
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2023/02/07	2024/02/06
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-05	2022/11/23	2023/11/22
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2023/02/08	2024/02/07
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9163	SUWI-01-11-01	2021/05/16	2023/05/15
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	2021/05/16	2023/05/15
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2021/05/14	2023/05/13
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2023/02/06	2024/02/05
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2023/02/06	2024/02/05
Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	2023/02/08	2024/02/07
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2021/06/10	2023/06/09
Radio Communication Analyzer	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22
Measurement Software	Tonscend	JS32-RE 4.0.0.0	SUWI-02-09-04	NCR	NCR



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at https://www.sgs.com/en/Ferms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions [Ferms-and-Conditions] Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions Ferms-and-Conditions ferms-and-Conditions appearance and subject to the first subject of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Plunsheng Rosal, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pikot Free Trade Zone 215000中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区海胜裔(号的6号厂房南部 鄉第: 215000

t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWA2212000096RG01

Rev.: 01 Page: 37 of 38

6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
2	RF power density, conducted	±1.03dB
3	Spurious emissions, conducted	±0.54dB
4	Radio Frequency	±1.0 %
5	Duty Cycle	±0.37%
6	Occupied Bandwidth	±1.0 %
		± 3.13dB (9k -30MHz)
7	Dadiated Emission	± 4.80dB (30M -1GHz)
7	Radiated Emission	± 4.80dB (1GHz to 18GHz)
		± 4.80dB (Above 18GHz)

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{\text{cispr/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed worleral, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.saxy.and, for electronic format documents ubject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.asxy.ttention is drawn to the limitation of liability, indeminification and jurisdiction issues defined therein. Any holder of this document is divised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of itensity is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content on preaarance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the seults shown in this test report refer only to the sample(s) setzed and such sample(s) are retained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6月厂房南部 邮编: 215000



Report No.: SEWA2212000096RG01

Rev.: 01

Page: 38 of 38

7 Appendixes

Appendix A.2	WWAN Setup Photos
Appendix B.1	LTE Band 2
Appendix B.2	LTE Band 4
Appendix B.3	LTE Band 5
Appendix B.4	LTE Band 12
Appendix B.5	LTE Band 13
Appendix B.6	LTE Band 14
Appendix B.7	LTE Band 66
Appendix B.8	LTE Band 71

---End of Report---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at https://www.sgs.com/en/Ferms-and-Conditions.aspx.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at https://www.sgs.com/en/Ferms-and-Conditions/Ferms-a-Document.aspx.attention is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document comment cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest stort of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Read, Southou Industrial Park, Southou Aea, China (Jiangsu) Plot Free Trade Zone 215000中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000