

| | | | |
|-----------------|----------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) RU26 | Channel | CH 149 : 5745 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5606.40 | 61.1 PK | 68.2 | -7.1 | 2.45 H | 246 | 57.6 | 3.5 |
| 2 | *5745.00 | 125.8 PK | | | 2.45 H | 236 | 83.6 | 42.2 |
| 3 | *5745.00 | 117.5 AV | | | 2.45 H | 236 | 75.3 | 42.2 |
| 4 | #5981.60 | 62.4 PK | 68.2 | -5.8 | 2.45 H | 246 | 57.8 | 4.6 |
| 5 | 11490.00 | 63.7 PK | 74.0 | -10.3 | 2.46 H | 189 | 55.2 | 8.5 |
| 6 | 11490.00 | 53.2 AV | 54.0 | -0.8 | 2.46 H | 189 | 44.7 | 8.5 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5648.80 | 62.3 PK | 68.2 | -5.9 | 1.31 V | 170 | 58.5 | 3.8 |
| 2 | *5745.00 | 126.7 PK | | | 1.31 V | 170 | 84.5 | 42.2 |
| 3 | *5745.00 | 116.5 AV | | | 1.31 V | 170 | 74.3 | 42.2 |
| 4 | #5951.60 | 62.0 PK | 68.2 | -6.2 | 1.31 V | 170 | 57.4 | 4.6 |
| 5 | 11490.00 | 63.4 PK | 74.0 | -10.6 | 2.49 V | 221 | 54.9 | 8.5 |
| 6 | 11490.00 | 52.7 AV | 54.0 | -1.3 | 2.49 V | 221 | 44.2 | 8.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) RU26 | Channel | CH 165 : 5825 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5643.20 | 61.0 PK | 68.2 | -7.2 | 2.29 H | 236 | 57.2 | 3.8 |
| 2 | *5825.00 | 128.5 PK | | | 2.29 H | 236 | 85.9 | 42.6 |
| 3 | *5825.00 | 118.3 AV | | | 2.29 H | 236 | 75.7 | 42.6 |
| 4 | #5979.20 | 61.8 PK | 68.2 | -6.4 | 2.29 H | 236 | 57.2 | 4.6 |
| 5 | 11650.00 | 64.1 PK | 74.0 | -9.9 | 2.56 H | 185 | 55.3 | 8.8 |
| 6 | 11650.00 | 53.7 AV | 54.0 | -0.3 | 2.56 H | 185 | 44.9 | 8.8 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5624.40 | 60.7 PK | 68.2 | -7.5 | 1.21 V | 189 | 57.1 | 3.6 |
| 2 | *5825.00 | 127.5 PK | | | 1.21 V | 189 | 84.9 | 42.6 |
| 3 | *5825.00 | 116.9 AV | | | 1.21 V | 189 | 74.3 | 42.6 |
| 4 | #5983.20 | 62.2 PK | 68.2 | -6.0 | 1.21 V | 189 | 57.6 | 4.6 |
| 5 | 11650.00 | 63.5 PK | 74.0 | -10.5 | 2.42 V | 236 | 54.7 | 8.8 |
| 6 | 11650.00 | 53.1 AV | 54.0 | -0.9 | 2.42 V | 236 | 44.3 | 8.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) RU52 | Channel | CH 48 : 5240 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5240.00 | 126.1 PK | | | 2.47 H | 209 | 85.3 | 40.8 |
| 2 | *5240.00 | 113.8 AV | | | 2.47 H | 209 | 73.0 | 40.8 |
| 3 | 5350.00 | 59.6 PK | 74.0 | -14.4 | 2.47 H | 209 | 56.7 | 2.9 |
| 4 | 5350.00 | 47.3 AV | 54.0 | -6.7 | 2.47 H | 209 | 44.4 | 2.9 |
| 5 | #10480.00 | 63.7 PK | 68.2 | -4.5 | 3.60 H | 191 | 55.9 | 7.8 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5240.00 | 127.3 PK | | | 1.15 V | 197 | 86.5 | 40.8 |
| 2 | *5240.00 | 115.6 AV | | | 1.15 V | 197 | 74.8 | 40.8 |
| 3 | 5350.00 | 60.4 PK | 74.0 | -13.6 | 1.15 V | 197 | 57.5 | 2.9 |
| 4 | 5350.00 | 47.6 AV | 54.0 | -6.4 | 1.15 V | 197 | 44.7 | 2.9 |
| 5 | #10480.00 | 65.3 PK | 68.2 | -2.9 | 1.72 V | 163 | 57.5 | 7.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) RU52 | Channel | CH 165 : 5825 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5616.00 | 60.3 PK | 68.2 | -7.9 | 2.71 H | 238 | 56.7 | 3.6 |
| 2 | *5825.00 | 126.5 PK | | | 2.71 H | 238 | 83.9 | 42.6 |
| 3 | *5825.00 | 114.8 AV | | | 2.71 H | 238 | 72.2 | 42.6 |
| 4 | #5992.00 | 62.2 PK | 68.2 | -6.0 | 2.71 H | 238 | 57.5 | 4.7 |
| 5 | 11650.00 | 63.9 PK | 74.0 | -10.1 | 3.53 H | 194 | 55.1 | 8.8 |
| 6 | 11650.00 | 52.4 AV | 54.0 | -1.6 | 3.53 H | 194 | 43.6 | 8.8 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5630.40 | 61.4 PK | 68.2 | -6.8 | 1.19 V | 190 | 57.7 | 3.7 |
| 2 | *5825.00 | 126.3 PK | | | 1.19 V | 190 | 83.7 | 42.6 |
| 3 | *5825.00 | 114.5 AV | | | 1.19 V | 190 | 71.9 | 42.6 |
| 4 | #5941.60 | 63.2 PK | 68.2 | -5.0 | 1.19 V | 190 | 58.7 | 4.5 |
| 5 | 11650.00 | 64.7 PK | 74.0 | -9.3 | 1.70 V | 161 | 55.9 | 8.8 |
| 6 | 11650.00 | 53.5 AV | 54.0 | -0.5 | 1.70 V | 161 | 44.7 | 8.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-----------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) RU106 | Channel | CH 36 : 5180 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5149.50 | 73.0 PK | 74.0 | -1.0 | 2.52 H | 208 | 69.7 | 3.3 |
| 2 | 5149.50 | 48.3 AV | 54.0 | -5.7 | 2.52 H | 208 | 45.0 | 3.3 |
| 3 | *5180.00 | 120.5 PK | | | 2.52 H | 208 | 79.7 | 40.8 |
| 4 | *5180.00 | 107.9 AV | | | 2.52 H | 208 | 67.1 | 40.8 |
| 5 | #10360.00 | 59.4 PK | 68.2 | -8.8 | 3.57 H | 187 | 51.4 | 8.0 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5148.10 | 73.6 PK | 74.0 | -0.4 | 1.12 V | 197 | 70.3 | 3.3 |
| 2 | 5148.10 | 50.4 AV | 54.0 | -3.6 | 1.12 V | 197 | 47.1 | 3.3 |
| 3 | *5180.00 | 123.1 PK | | | 1.12 V | 197 | 82.3 | 40.8 |
| 4 | *5180.00 | 110.2 AV | | | 1.12 V | 197 | 69.4 | 40.8 |
| 5 | #10360.00 | 62.5 PK | 68.2 | -5.7 | 1.50 V | 178 | 54.5 | 8.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-----------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) RU106 | Channel | CH 64 : 5320 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5320.00 | 120.7 PK | | | 2.50 H | 209 | 80.0 | 40.7 |
| 2 | *5320.00 | 108.2 AV | | | 2.50 H | 209 | 67.5 | 40.7 |
| 3 | 5350.00 | 71.2 PK | 74.0 | -2.8 | 2.50 H | 209 | 68.3 | 2.9 |
| 4 | 5350.00 | 49.2 AV | 54.0 | -4.8 | 2.50 H | 209 | 46.3 | 2.9 |
| 5 | 10640.00 | 59.8 PK | 74.0 | -14.2 | 3.61 H | 188 | 51.8 | 8.0 |
| 6 | 10640.00 | 50.2 AV | 54.0 | -3.8 | 3.61 H | 188 | 42.2 | 8.0 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5320.00 | 122.2 PK | | | 1.09 V | 197 | 81.5 | 40.7 |
| 2 | *5320.00 | 109.6 AV | | | 1.09 V | 197 | 68.9 | 40.7 |
| 3 | 5353.00 | 73.6 PK | 74.0 | -0.4 | 1.09 V | 197 | 70.7 | 2.9 |
| 4 | 5353.00 | 49.7 AV | 54.0 | -4.3 | 1.09 V | 197 | 46.8 | 2.9 |
| 5 | 10640.00 | 59.6 PK | 74.0 | -14.4 | 1.53 V | 181 | 51.6 | 8.0 |
| 6 | 10640.00 | 49.8 AV | 54.0 | -4.2 | 1.53 V | 181 | 41.8 | 8.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

| | | | |
|-----------------|-----------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) RU106 | Channel | CH 100 : 5500 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 59.1 PK | 74.0 | -14.9 | 2.43 H | 208 | 56.1 | 3.0 |
| 2 | 5460.00 | 47.6 AV | 54.0 | -6.4 | 2.43 H | 208 | 44.6 | 3.0 |
| 3 | #5467.30 | 67.2 PK | 68.2 | -1.0 | 2.43 H | 208 | 64.2 | 3.0 |
| 4 | *5500.00 | 120.3 PK | | | 2.43 H | 208 | 79.1 | 41.2 |
| 5 | *5500.00 | 107.4 AV | | | 2.43 H | 208 | 66.2 | 41.2 |
| 6 | 11000.00 | 60.4 PK | 74.0 | -13.6 | 3.52 H | 184 | 52.9 | 7.5 |
| 7 | 11000.00 | 50.1 AV | 54.0 | -3.9 | 3.52 H | 184 | 42.6 | 7.5 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 59.3 PK | 74.0 | -14.7 | 1.39 V | 178 | 56.3 | 3.0 |
| 2 | 5460.00 | 47.8 AV | 54.0 | -6.2 | 1.39 V | 178 | 44.8 | 3.0 |
| 3 | #5464.60 | 67.6 PK | 68.2 | -0.6 | 1.39 V | 178 | 64.6 | 3.0 |
| 4 | *5500.00 | 120.4 PK | | | 1.39 V | 178 | 79.2 | 41.2 |
| 5 | *5500.00 | 108.7 AV | | | 1.39 V | 178 | 67.5 | 41.2 |
| 6 | 11000.00 | 60.2 PK | 74.0 | -13.8 | 1.55 V | 179 | 52.7 | 7.5 |
| 7 | 11000.00 | 49.9 AV | 54.0 | -4.1 | 1.55 V | 179 | 42.4 | 7.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-----------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) RU106 | Channel | CH 140 : 5700 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5700.00 | 118.7 PK | | | 2.77 H | 239 | 76.7 | 42.0 |
| 2 | *5700.00 | 106.2 AV | | | 2.77 H | 239 | 64.2 | 42.0 |
| 3 | #5728.20 | 67.9 PK | 68.2 | -0.3 | 2.77 H | 239 | 63.8 | 4.1 |
| 4 | 11400.00 | 59.8 PK | 74.0 | -14.2 | 3.58 H | 186 | 51.4 | 8.4 |
| 5 | 11400.00 | 50.0 AV | 54.0 | -4.0 | 3.58 H | 186 | 41.6 | 8.4 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5700.00 | 118.2 PK | | | 1.35 V | 176 | 114.2 | 4.0 |
| 2 | *5700.00 | 105.6 AV | | | 1.35 V | 176 | 101.6 | 4.0 |
| 3 | #5727.20 | 67.7 PK | 68.2 | -0.5 | 1.35 V | 176 | 63.6 | 4.1 |
| 4 | 11400.00 | 59.5 PK | 74.0 | -14.5 | 1.50 V | 184 | 51.1 | 8.4 |
| 5 | 11400.00 | 49.6 AV | 54.0 | -4.4 | 1.50 V | 184 | 41.2 | 8.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-----------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) RU106 | Channel | CH 149 : 5745 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5600.80 | 61.3 PK | 68.2 | -6.9 | 2.72 H | 242 | 57.8 | 3.5 |
| 2 | *5745.00 | 122.9 PK | | | 2.72 H | 242 | 80.7 | 42.2 |
| 3 | *5745.00 | 110.5 AV | | | 2.72 H | 242 | 68.3 | 42.2 |
| 4 | #5956.40 | 62.7 PK | 68.2 | -5.5 | 2.72 H | 242 | 58.1 | 4.6 |
| 5 | 11490.00 | 61.1 PK | 74.0 | -12.9 | 2.97 H | 187 | 52.6 | 8.5 |
| 6 | 11490.00 | 49.2 AV | 54.0 | -4.8 | 2.97 H | 187 | 40.7 | 8.5 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5634.00 | 61.7 PK | 68.2 | -6.5 | 1.34 V | 174 | 58.0 | 3.7 |
| 2 | *5745.00 | 122.4 PK | | | 1.34 V | 174 | 118.3 | 4.1 |
| 3 | *5745.00 | 109.9 AV | | | 1.34 V | 174 | 105.8 | 4.1 |
| 4 | #5971.60 | 62.5 PK | 68.2 | -5.7 | 1.34 V | 174 | 57.9 | 4.6 |
| 5 | 11490.00 | 63.1 PK | 74.0 | -10.9 | 1.50 V | 188 | 54.6 | 8.5 |
| 6 | 11490.00 | 49.9 AV | 54.0 | -4.1 | 1.50 V | 188 | 41.4 | 8.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-----------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) RU106 | Channel | CH 165 : 5825 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5634.00 | 61.4 PK | 68.2 | -6.8 | 2.75 H | 240 | 57.7 | 3.7 |
| 2 | *5825.00 | 123.1 PK | | | 2.75 H | 240 | 118.7 | 4.4 |
| 3 | *5825.00 | 110.8 AV | | | 2.75 H | 240 | 106.4 | 4.4 |
| 4 | #5933.60 | 62.7 PK | 68.2 | -5.5 | 2.75 H | 240 | 58.2 | 4.5 |
| 5 | 11650.00 | 61.3 PK | 74.0 | -12.7 | 2.99 H | 189 | 52.5 | 8.8 |
| 6 | 11650.00 | 49.5 AV | 54.0 | -4.5 | 2.99 H | 189 | 40.7 | 8.8 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5631.60 | 61.5 PK | 68.2 | -6.7 | 1.38 V | 190 | 57.8 | 3.7 |
| 2 | *5825.00 | 123.3 PK | | | 1.38 V | 190 | 118.9 | 4.4 |
| 3 | *5825.00 | 110.9 AV | | | 1.38 V | 190 | 106.5 | 4.4 |
| 4 | #5928.40 | 63.1 PK | 68.2 | -5.1 | 1.38 V | 190 | 58.6 | 4.5 |
| 5 | 11650.00 | 63.4 PK | 74.0 | -10.6 | 1.48 V | 185 | 54.6 | 8.8 |
| 6 | 11650.00 | 50.3 AV | 54.0 | -3.7 | 1.48 V | 185 | 41.5 | 8.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) Full RU | Channel | CH 36 : 5180 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5150.00 | 63.0 PK | 74.0 | -11.0 | 2.33 H | 218 | 59.7 | 3.3 |
| 2 | 5150.00 | 50.5 AV | 54.0 | -3.5 | 2.33 H | 218 | 47.2 | 3.3 |
| 3 | *5180.00 | 118.4 PK | | | 2.33 H | 218 | 77.6 | 40.8 |
| 4 | *5180.00 | 107.5 AV | | | 2.33 H | 218 | 66.7 | 40.8 |
| 5 | #10360.00 | 58.1 PK | 68.2 | -10.1 | 2.48 H | 210 | 50.1 | 8.0 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5150.00 | 63.7 PK | 74.0 | -10.3 | 1.22 V | 192 | 60.4 | 3.3 |
| 2 | 5150.00 | 53.5 AV | 54.0 | -0.5 | 1.22 V | 192 | 50.2 | 3.3 |
| 3 | *5180.00 | 120.9 PK | | | 1.22 V | 192 | 80.1 | 40.8 |
| 4 | *5180.00 | 109.9 AV | | | 1.22 V | 192 | 69.1 | 40.8 |
| 5 | #10360.00 | 58.6 PK | 68.2 | -9.6 | 1.12 V | 280 | 50.6 | 8.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) Full RU | Channel | CH 40 : 5200 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5149.30 | 60.0 PK | 74.0 | -14.0 | 2.34 H | 221 | 56.7 | 3.3 |
| 2 | 5149.30 | 48.5 AV | 54.0 | -5.5 | 2.34 H | 221 | 45.2 | 3.3 |
| 3 | *5200.00 | 120.6 PK | | | 2.34 H | 221 | 79.8 | 40.8 |
| 4 | *5200.00 | 109.5 AV | | | 2.34 H | 221 | 68.7 | 40.8 |
| 5 | #10400.00 | 58.7 PK | 68.2 | -9.5 | 2.44 H | 215 | 50.6 | 8.1 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5149.30 | 64.0 PK | 74.0 | -10.0 | 1.00 V | 192 | 60.7 | 3.3 |
| 2 | 5149.30 | 53.5 AV | 54.0 | -0.5 | 1.00 V | 192 | 50.2 | 3.3 |
| 3 | *5200.00 | 122.7 PK | | | 1.00 V | 192 | 81.9 | 40.8 |
| 4 | *5200.00 | 111.7 AV | | | 1.00 V | 192 | 70.9 | 40.8 |
| 5 | #10400.00 | 59.7 PK | 68.2 | -8.5 | 1.16 V | 278 | 51.6 | 8.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) Full RU | Channel | CH 48 : 5240 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5240.00 | 119.0 PK | | | 2.36 H | 220 | 78.2 | 40.8 |
| 2 | *5240.00 | 108.9 AV | | | 2.36 H | 220 | 68.1 | 40.8 |
| 3 | 5350.00 | 58.0 PK | 74.0 | -16.0 | 2.36 H | 220 | 55.1 | 2.9 |
| 4 | 5350.00 | 47.2 AV | 54.0 | -6.8 | 2.36 H | 220 | 44.3 | 2.9 |
| 5 | #10480.00 | 59.0 PK | 68.2 | -9.2 | 2.40 H | 206 | 51.2 | 7.8 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5240.00 | 121.2 PK | | | 1.06 V | 190 | 80.4 | 40.8 |
| 2 | *5240.00 | 111.0 AV | | | 1.06 V | 190 | 70.2 | 40.8 |
| 3 | 5350.00 | 58.8 PK | 74.0 | -15.2 | 1.06 V | 190 | 55.9 | 2.9 |
| 4 | 5350.00 | 47.4 AV | 54.0 | -6.6 | 1.06 V | 190 | 44.5 | 2.9 |
| 5 | #10480.00 | 59.4 PK | 68.2 | -8.8 | 1.19 V | 275 | 51.6 | 7.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) Full RU | Channel | CH 52 : 5260 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5150.00 | 55.6 PK | 74.0 | -18.4 | 2.31 H | 220 | 52.3 | 3.3 |
| 2 | 5150.00 | 45.4 AV | 54.0 | -8.6 | 2.31 H | 220 | 42.1 | 3.3 |
| 3 | *5260.00 | 118.2 PK | | | 2.31 H | 220 | 77.4 | 40.8 |
| 4 | *5260.00 | 108.5 AV | | | 2.31 H | 220 | 67.7 | 40.8 |
| 5 | #10520.00 | 58.9 PK | 68.2 | -9.3 | 2.01 H | 176 | 51.2 | 7.7 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5150.00 | 56.2 PK | 74.0 | -17.8 | 1.07 V | 183 | 52.9 | 3.3 |
| 2 | 5150.00 | 45.9 AV | 54.0 | -8.1 | 1.07 V | 183 | 42.6 | 3.3 |
| 3 | *5260.00 | 121.0 PK | | | 1.07 V | 183 | 80.2 | 40.8 |
| 4 | *5260.00 | 110.0 AV | | | 1.07 V | 183 | 69.2 | 40.8 |
| 5 | #10520.00 | 59.3 PK | 68.2 | -8.9 | 1.18 V | 281 | 51.6 | 7.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) Full RU | Channel | CH 60 : 5300 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5300.00 | 118.1 PK | | | 2.56 H | 218 | 77.3 | 40.8 |
| 2 | *5300.00 | 107.9 AV | | | 2.56 H | 218 | 67.1 | 40.8 |
| 3 | 10600.00 | 56.0 PK | 74.0 | -18.0 | 2.40 H | 211 | 48.2 | 7.8 |
| 4 | 10600.00 | 45.3 AV | 54.0 | -8.7 | 2.40 H | 211 | 37.5 | 7.8 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5300.00 | 119.8 PK | | | 1.24 V | 181 | 79.0 | 40.8 |
| 2 | *5300.00 | 109.5 AV | | | 1.24 V | 181 | 68.7 | 40.8 |
| 3 | 10600.00 | 56.4 PK | 74.0 | -17.6 | 1.55 V | 189 | 48.6 | 7.8 |
| 4 | 10600.00 | 45.6 AV | 54.0 | -8.4 | 1.55 V | 189 | 37.8 | 7.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) Full RU | Channel | CH 64 : 5320 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5320.00 | 117.5 PK | | | 2.55 H | 213 | 76.8 | 40.7 |
| 2 | *5320.00 | 106.6 AV | | | 2.55 H | 213 | 65.9 | 40.7 |
| 3 | 5350.00 | 61.3 PK | 74.0 | -12.7 | 2.55 H | 213 | 58.4 | 2.9 |
| 4 | 5350.00 | 51.8 AV | 54.0 | -2.2 | 2.55 H | 213 | 48.9 | 2.9 |
| 5 | 10640.00 | 56.1 PK | 74.0 | -17.9 | 2.48 H | 203 | 48.1 | 8.0 |
| 6 | 10640.00 | 45.4 AV | 54.0 | -8.6 | 2.48 H | 203 | 37.4 | 8.0 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5320.00 | 119.3 PK | | | 1.28 V | 182 | 78.6 | 40.7 |
| 2 | *5320.00 | 108.1 AV | | | 1.28 V | 182 | 67.4 | 40.7 |
| 3 | 5350.00 | 63.2 PK | 74.0 | -10.8 | 1.28 V | 182 | 60.3 | 2.9 |
| 4 | 5350.00 | 53.4 AV | 54.0 | -0.6 | 1.28 V | 182 | 50.5 | 2.9 |
| 5 | 10640.00 | 56.2 PK | 74.0 | -17.8 | 1.60 V | 182 | 48.2 | 8.0 |
| 6 | 10640.00 | 45.6 AV | 54.0 | -8.4 | 1.60 V | 182 | 37.6 | 8.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) Full RU | Channel | CH 100 : 5500 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 59.9 PK | 74.0 | -14.1 | 2.57 H | 219 | 56.9 | 3.0 |
| 2 | 5460.00 | 49.5 AV | 54.0 | -4.5 | 2.57 H | 219 | 46.5 | 3.0 |
| 3 | #5470.00 | 66.1 PK | 68.2 | -2.1 | 2.57 H | 219 | 63.1 | 3.0 |
| 4 | *5500.00 | 120.3 PK | | | 2.57 H | 219 | 79.1 | 41.2 |
| 5 | *5500.00 | 107.5 AV | | | 2.57 H | 219 | 66.3 | 41.2 |
| 6 | 11000.00 | 55.2 PK | 74.0 | -18.8 | 1.07 H | 284 | 47.7 | 7.5 |
| 7 | 11000.00 | 44.1 AV | 54.0 | -9.9 | 1.07 H | 284 | 36.6 | 7.5 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 65.1 PK | 74.0 | -8.9 | 1.00 V | 193 | 62.1 | 3.0 |
| 2 | 5460.00 | 51.6 AV | 54.0 | -2.4 | 1.00 V | 193 | 48.6 | 3.0 |
| 3 | #5470.00 | 67.9 PK | 68.2 | -0.3 | 1.00 V | 193 | 64.9 | 3.0 |
| 4 | *5500.00 | 121.6 PK | | | 1.00 V | 193 | 80.4 | 41.2 |
| 5 | *5500.00 | 109.1 AV | | | 1.00 V | 193 | 67.9 | 41.2 |
| 6 | 11000.00 | 56.3 PK | 74.0 | -17.7 | 1.48 V | 178 | 48.8 | 7.5 |
| 7 | 11000.00 | 45.3 AV | 54.0 | -8.7 | 1.48 V | 178 | 37.8 | 7.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) Full RU | Channel | CH 116 : 5580 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5580.00 | 121.3 PK | | | 2.61 H | 217 | 79.9 | 41.4 |
| 2 | *5580.00 | 108.4 AV | | | 2.61 H | 217 | 67.0 | 41.4 |
| 3 | 11160.00 | 55.9 PK | 74.0 | -18.1 | 1.04 H | 287 | 47.4 | 8.5 |
| 4 | 11160.00 | 44.7 AV | 54.0 | -9.3 | 1.04 H | 287 | 36.2 | 8.5 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5580.00 | 122.4 PK | | | 1.02 V | 191 | 81.0 | 41.4 |
| 2 | *5580.00 | 110.2 AV | | | 1.02 V | 191 | 68.8 | 41.4 |
| 3 | 11160.00 | 57.1 PK | 74.0 | -16.9 | 1.55 V | 174 | 48.6 | 8.5 |
| 4 | 11160.00 | 45.9 AV | 54.0 | -8.1 | 1.55 V | 174 | 37.4 | 8.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) Full RU | Channel | CH 140 : 5700 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5700.00 | 116.8 PK | | | 2.55 H | 220 | 74.8 | 42.0 |
| 2 | *5700.00 | 103.7 AV | | | 2.55 H | 220 | 61.7 | 42.0 |
| 3 | #5725.00 | 67.9 PK | 68.2 | -0.3 | 2.55 H | 220 | 63.8 | 4.1 |
| 4 | 11400.00 | 54.1 PK | 74.0 | -19.9 | 1.03 H | 279 | 45.7 | 8.4 |
| 5 | 11400.00 | 43.3 AV | 54.0 | -10.7 | 1.03 H | 279 | 34.9 | 8.4 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5700.00 | 116.4 PK | | | 1.00 V | 192 | 74.4 | 42.0 |
| 2 | *5700.00 | 103.3 AV | | | 1.00 V | 192 | 61.3 | 42.0 |
| 3 | #5725.00 | 67.5 PK | 68.2 | -0.7 | 1.00 V | 192 | 63.4 | 4.1 |
| 4 | 11400.00 | 55.8 PK | 74.0 | -18.2 | 1.55 V | 183 | 47.4 | 8.4 |
| 5 | 11400.00 | 44.7 AV | 54.0 | -9.3 | 1.55 V | 183 | 36.3 | 8.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) Full RU | Channel | CH 144 : 5720 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5470.00 | 59.3 PK | 68.2 | -8.9 | 2.48 H | 216 | 56.3 | 3.0 |
| 2 | *5720.00 | 120.9 PK | | | 2.48 H | 216 | 78.8 | 42.1 |
| 3 | *5720.00 | 109.5 AV | | | 2.48 H | 216 | 67.4 | 42.1 |
| 4 | #5850.00 | 61.7 PK | 68.2 | -6.5 | 2.48 H | 216 | 57.3 | 4.4 |
| 5 | 11440.00 | 55.2 PK | 74.0 | -18.8 | 2.50 H | 236 | 46.8 | 8.4 |
| 6 | 11440.00 | 43.7 AV | 54.0 | -10.3 | 2.50 H | 236 | 35.3 | 8.4 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5470.00 | 59.5 PK | 68.2 | -8.7 | 1.09 V | 192 | 56.5 | 3.0 |
| 2 | *5720.00 | 120.1 PK | | | 1.09 V | 192 | 78.0 | 42.1 |
| 3 | *5720.00 | 109.9 AV | | | 1.09 V | 192 | 67.8 | 42.1 |
| 4 | #5850.00 | 61.9 PK | 68.2 | -6.3 | 1.09 V | 192 | 57.5 | 4.4 |
| 5 | 11440.00 | 55.6 PK | 74.0 | -18.4 | 1.61 V | 186 | 47.2 | 8.4 |
| 6 | 11440.00 | 44.5 AV | 54.0 | -9.5 | 1.61 V | 186 | 36.1 | 8.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) Full RU | Channel | CH 149 : 5745 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5636.80 | 61.9 PK | 68.2 | -6.3 | 2.39 H | 220 | 58.2 | 3.7 |
| 2 | *5745.00 | 120.7 PK | | | 2.39 H | 220 | 116.6 | 4.1 |
| 3 | *5745.00 | 107.8 AV | | | 2.39 H | 220 | 103.7 | 4.1 |
| 4 | #5962.80 | 63.3 PK | 68.2 | -4.9 | 2.39 H | 220 | 58.7 | 4.6 |
| 5 | 11490.00 | 60.3 PK | 74.0 | -13.7 | 1.94 H | 197 | 51.8 | 8.5 |
| 6 | 11490.00 | 47.2 AV | 54.0 | -6.8 | 1.94 H | 197 | 38.7 | 8.5 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5601.20 | 60.0 PK | 68.2 | -8.2 | 1.05 V | 190 | 56.5 | 3.5 |
| 2 | *5745.00 | 119.8 PK | | | 1.05 V | 190 | 115.7 | 4.1 |
| 3 | *5745.00 | 106.4 AV | | | 1.05 V | 190 | 102.3 | 4.1 |
| 4 | #5980.80 | 60.9 PK | 68.2 | -7.3 | 1.05 V | 190 | 56.3 | 4.6 |
| 5 | 11490.00 | 60.5 PK | 74.0 | -13.5 | 1.47 V | 180 | 52.0 | 8.5 |
| 6 | 11490.00 | 47.9 AV | 54.0 | -6.1 | 1.47 V | 180 | 39.4 | 8.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) Full RU | Channel | CH 157 : 5785 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5620.80 | 60.9 PK | 68.2 | -7.3 | 2.38 H | 217 | 57.3 | 3.6 |
| 2 | *5785.00 | 120.0 PK | | | 2.38 H | 217 | 77.5 | 42.5 |
| 3 | *5785.00 | 108.9 AV | | | 2.38 H | 217 | 66.4 | 42.5 |
| 4 | #5950.80 | 62.6 PK | 68.2 | -5.6 | 2.38 H | 217 | 58.0 | 4.6 |
| 5 | 11570.00 | 60.4 PK | 74.0 | -13.6 | 1.90 H | 199 | 51.6 | 8.8 |
| 6 | 11570.00 | 47.3 AV | 54.0 | -6.7 | 1.90 H | 199 | 38.5 | 8.8 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5647.20 | 61.7 PK | 68.2 | -6.5 | 1.30 V | 191 | 57.9 | 3.8 |
| 2 | *5785.00 | 117.6 PK | | | 1.30 V | 191 | 75.1 | 42.5 |
| 3 | *5785.00 | 103.8 AV | | | 1.30 V | 191 | 61.3 | 42.5 |
| 4 | #5998.80 | 61.9 PK | 68.2 | -6.3 | 1.30 V | 191 | 57.1 | 4.8 |
| 5 | 11570.00 | 60.7 PK | 74.0 | -13.3 | 1.45 V | 193 | 51.9 | 8.8 |
| 6 | 11570.00 | 48.1 AV | 54.0 | -5.9 | 1.45 V | 193 | 39.3 | 8.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE20) Full RU | Channel | CH 165 : 5825 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5642.80 | 62.1 PK | 68.2 | -6.1 | 2.31 H | 216 | 58.3 | 3.8 |
| 2 | *5825.00 | 120.6 PK | | | 2.31 H | 216 | 78.0 | 42.6 |
| 3 | *5825.00 | 109.5 AV | | | 2.31 H | 216 | 66.9 | 42.6 |
| 4 | #5925.20 | 63.5 PK | 68.2 | -4.7 | 2.31 H | 216 | 59.0 | 4.5 |
| 5 | 11650.00 | 60.4 PK | 74.0 | -13.6 | 1.95 H | 187 | 51.6 | 8.8 |
| 6 | 11650.00 | 47.4 AV | 54.0 | -6.6 | 1.95 H | 187 | 38.6 | 8.8 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5608.00 | 61.9 PK | 68.2 | -6.3 | 1.13 V | 193 | 58.4 | 3.5 |
| 2 | *5825.00 | 119.3 PK | | | 1.13 V | 193 | 76.7 | 42.6 |
| 3 | *5825.00 | 108.1 AV | | | 1.13 V | 193 | 65.5 | 42.6 |
| 4 | #5985.60 | 63.3 PK | 68.2 | -4.9 | 1.13 V | 193 | 58.6 | 4.7 |
| 5 | 11650.00 | 60.7 PK | 74.0 | -13.3 | 1.45 V | 183 | 51.9 | 8.8 |
| 6 | 11650.00 | 48.1 AV | 54.0 | -5.9 | 1.45 V | 183 | 39.3 | 8.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE40) Full RU | Channel | CH 38 : 5190 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5148.50 | 63.0 PK | 74.0 | -11.0 | 2.37 H | 221 | 59.7 | 3.3 |
| 2 | 5148.50 | 52.2 AV | 54.0 | -1.8 | 2.37 H | 221 | 48.9 | 3.3 |
| 3 | *5190.00 | 112.9 PK | | | 2.37 H | 221 | 72.1 | 40.8 |
| 4 | *5190.00 | 103.9 AV | | | 2.37 H | 221 | 63.1 | 40.8 |
| 5 | #10380.00 | 58.0 PK | 68.2 | -10.2 | 2.56 H | 193 | 49.9 | 8.1 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5148.50 | 65.0 PK | 74.0 | -9.0 | 1.12 V | 181 | 61.7 | 3.3 |
| 2 | 5148.50 | 53.9 AV | 54.0 | -0.1 | 1.12 V | 181 | 50.6 | 3.3 |
| 3 | *5190.00 | 116.0 PK | | | 1.12 V | 181 | 75.2 | 40.8 |
| 4 | *5190.00 | 106.1 AV | | | 1.12 V | 181 | 65.3 | 40.8 |
| 5 | #10380.00 | 58.2 PK | 68.2 | -10.0 | 1.16 V | 277 | 50.1 | 8.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE40) Full RU | Channel | CH 46 : 5230 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5149.70 | 66.9 PK | 74.0 | -7.1 | 2.34 H | 219 | 63.6 | 3.3 |
| 2 | 5149.70 | 51.7 AV | 54.0 | -2.3 | 2.34 H | 219 | 48.4 | 3.3 |
| 3 | *5230.00 | 113.6 PK | | | 2.34 H | 219 | 72.8 | 40.8 |
| 4 | *5230.00 | 105.3 AV | | | 2.34 H | 219 | 64.5 | 40.8 |
| 5 | 5350.00 | 59.1 PK | 74.0 | -14.9 | 2.34 H | 219 | 56.2 | 2.9 |
| 6 | 5350.00 | 47.4 AV | 54.0 | -6.6 | 2.34 H | 219 | 44.5 | 2.9 |
| 7 | #10460.00 | 58.0 PK | 68.2 | -10.2 | 2.50 H | 200 | 50.2 | 7.8 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5149.70 | 70.0 PK | 74.0 | -4.0 | 1.25 V | 181 | 66.7 | 3.3 |
| 2 | 5149.70 | 53.7 AV | 54.0 | -0.3 | 1.25 V | 181 | 50.4 | 3.3 |
| 3 | *5230.00 | 116.7 PK | | | 1.25 V | 181 | 75.9 | 40.8 |
| 4 | *5230.00 | 107.5 AV | | | 1.25 V | 181 | 66.7 | 40.8 |
| 5 | 5350.00 | 59.2 PK | 74.0 | -14.8 | 1.25 V | 181 | 56.3 | 2.9 |
| 6 | 5350.00 | 47.6 AV | 54.0 | -6.4 | 1.25 V | 181 | 44.7 | 2.9 |
| 7 | #10460.00 | 59.1 PK | 68.2 | -9.1 | 1.19 V | 214 | 51.3 | 7.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE40) Full RU | Channel | CH 54 : 5270 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5148.00 | 60.5 PK | 74.0 | -13.5 | 2.53 H | 215 | 57.2 | 3.3 |
| 2 | 5148.00 | 47.4 AV | 54.0 | -6.6 | 2.53 H | 215 | 44.1 | 3.3 |
| 3 | *5270.00 | 116.7 PK | | | 2.53 H | 215 | 75.9 | 40.8 |
| 4 | *5270.00 | 105.6 AV | | | 2.53 H | 215 | 64.8 | 40.8 |
| 5 | 5350.00 | 67.0 PK | 74.0 | -7.0 | 2.53 H | 215 | 64.1 | 2.9 |
| 6 | 5350.00 | 51.8 AV | 54.0 | -2.2 | 2.53 H | 215 | 48.9 | 2.9 |
| 7 | #10540.00 | 56.4 PK | 68.2 | -11.8 | 2.31 H | 210 | 48.7 | 7.7 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5148.80 | 60.9 PK | 74.0 | -13.1 | 1.14 V | 182 | 57.6 | 3.3 |
| 2 | 5148.80 | 47.7 AV | 54.0 | -6.3 | 1.14 V | 182 | 44.4 | 3.3 |
| 3 | *5270.00 | 118.3 PK | | | 1.14 V | 182 | 77.5 | 40.8 |
| 4 | *5270.00 | 107.1 AV | | | 1.14 V | 182 | 66.3 | 40.8 |
| 5 | 5350.00 | 69.1 PK | 74.0 | -4.9 | 1.14 V | 182 | 66.2 | 2.9 |
| 6 | 5350.00 | 53.5 AV | 54.0 | -0.5 | 1.14 V | 182 | 50.6 | 2.9 |
| 7 | #10540.00 | 56.6 PK | 68.2 | -11.6 | 1.52 V | 184 | 48.9 | 7.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE40) Full RU | Channel | CH 62 : 5310 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5310.00 | 113.1 PK | | | 2.57 H | 219 | 72.4 | 40.7 |
| 2 | *5310.00 | 101.2 AV | | | 2.57 H | 219 | 60.5 | 40.7 |
| 3 | 5350.00 | 63.1 PK | 74.0 | -10.9 | 2.57 H | 219 | 60.2 | 2.9 |
| 4 | 5350.00 | 51.6 AV | 54.0 | -2.4 | 2.57 H | 219 | 48.7 | 2.9 |
| 5 | 10620.00 | 56.1 PK | 74.0 | -17.9 | 2.46 H | 230 | 48.2 | 7.9 |
| 6 | 10620.00 | 45.5 AV | 54.0 | -8.5 | 2.46 H | 230 | 37.6 | 7.9 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5310.00 | 114.3 PK | | | 1.26 V | 182 | 73.6 | 40.7 |
| 2 | *5310.00 | 102.5 AV | | | 1.26 V | 182 | 61.8 | 40.7 |
| 3 | 5350.00 | 64.3 PK | 74.0 | -9.7 | 1.26 V | 182 | 61.4 | 2.9 |
| 4 | 5350.00 | 53.1 AV | 54.0 | -0.9 | 1.26 V | 182 | 50.2 | 2.9 |
| 5 | 10620.00 | 56.4 PK | 74.0 | -17.6 | 1.50 V | 184 | 48.5 | 7.9 |
| 6 | 10620.00 | 45.6 AV | 54.0 | -8.4 | 1.50 V | 184 | 37.7 | 7.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE40) Full RU | Channel | CH 102 : 5510 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 63.4 PK | 74.0 | -10.6 | 2.47 H | 224 | 60.4 | 3.0 |
| 2 | 5460.00 | 49.5 AV | 54.0 | -4.5 | 2.47 H | 224 | 46.5 | 3.0 |
| 3 | #5470.00 | 67.3 PK | 68.2 | -0.9 | 2.47 H | 224 | 64.3 | 3.0 |
| 4 | *5510.00 | 114.7 PK | | | 2.47 H | 224 | 73.5 | 41.2 |
| 5 | *5510.00 | 103.4 AV | | | 2.47 H | 224 | 62.2 | 41.2 |
| 6 | 11020.00 | 54.6 PK | 74.0 | -19.4 | 1.04 H | 287 | 47.0 | 7.6 |
| 7 | 11020.00 | 43.3 AV | 54.0 | -10.7 | 1.04 H | 287 | 35.7 | 7.6 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 65.1 PK | 74.0 | -8.9 | 1.17 V | 183 | 62.1 | 3.0 |
| 2 | 5460.00 | 49.9 AV | 54.0 | -4.1 | 1.17 V | 183 | 46.9 | 3.0 |
| 3 | #5470.00 | 67.8 PK | 68.2 | -0.4 | 1.17 V | 183 | 64.8 | 3.0 |
| 4 | *5510.00 | 114.9 PK | | | 1.17 V | 183 | 73.7 | 41.2 |
| 5 | *5510.00 | 104.1 AV | | | 1.17 V | 183 | 62.9 | 41.2 |
| 6 | 11020.00 | 55.7 PK | 74.0 | -18.3 | 1.52 V | 181 | 48.1 | 7.6 |
| 7 | 11020.00 | 44.8 AV | 54.0 | -9.2 | 1.52 V | 181 | 37.2 | 7.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE40) Full RU | Channel | CH 110 : 5550 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 64.6 PK | 74.0 | -9.4 | 2.59 H | 221 | 61.6 | 3.0 |
| 2 | 5460.00 | 49.5 AV | 54.0 | -4.5 | 2.59 H | 221 | 46.5 | 3.0 |
| 3 | #5470.00 | 67.5 PK | 68.2 | -0.7 | 2.59 H | 221 | 64.5 | 3.0 |
| 4 | *5550.00 | 119.4 PK | | | 2.59 H | 221 | 78.0 | 41.4 |
| 5 | *5550.00 | 106.3 AV | | | 2.59 H | 221 | 64.9 | 41.4 |
| 6 | 11100.00 | 55.8 PK | 74.0 | -18.2 | 1.07 H | 289 | 47.5 | 8.3 |
| 7 | 11100.00 | 44.7 AV | 54.0 | -9.3 | 1.07 H | 289 | 36.4 | 8.3 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 65.2 PK | 74.0 | -8.8 | 1.51 V | 176 | 62.2 | 3.0 |
| 2 | 5460.00 | 49.8 AV | 54.0 | -4.2 | 1.51 V | 176 | 46.8 | 3.0 |
| 3 | #5470.00 | 67.9 PK | 68.2 | -0.3 | 1.51 V | 176 | 64.9 | 3.0 |
| 4 | *5550.00 | 120.1 PK | | | 1.51 V | 176 | 78.7 | 41.4 |
| 5 | *5550.00 | 107.2 AV | | | 1.51 V | 176 | 65.8 | 41.4 |
| 6 | 11100.00 | 57.1 PK | 74.0 | -16.9 | 1.63 V | 184 | 48.8 | 8.3 |
| 7 | 11100.00 | 46.0 AV | 54.0 | -8.0 | 1.63 V | 184 | 37.7 | 8.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE40) Full RU | Channel | CH 134 : 5670 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5670.00 | 117.7 PK | | | 2.51 H | 223 | 75.8 | 41.9 |
| 2 | *5670.00 | 105.1 AV | | | 2.51 H | 223 | 63.2 | 41.9 |
| 3 | #5725.00 | 68.1 PK | 68.2 | -0.1 | 2.51 H | 223 | 64.0 | 4.1 |
| 4 | 11340.00 | 55.2 PK | 74.0 | -18.8 | 1.04 H | 281 | 46.7 | 8.5 |
| 5 | 11340.00 | 44.3 AV | 54.0 | -9.7 | 1.04 H | 281 | 35.8 | 8.5 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5670.00 | 116.3 PK | | | 1.59 V | 167 | 74.4 | 41.9 |
| 2 | *5670.00 | 103.9 AV | | | 1.59 V | 167 | 62.0 | 41.9 |
| 3 | #5725.00 | 68.0 PK | 68.2 | -0.2 | 1.59 V | 167 | 63.9 | 4.1 |
| 4 | 11340.00 | 56.6 PK | 74.0 | -17.4 | 1.67 V | 190 | 48.1 | 8.5 |
| 5 | 11340.00 | 45.3 AV | 54.0 | -8.7 | 1.67 V | 190 | 36.8 | 8.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE40) Full RU | Channel | CH 142 : 5710 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5470.00 | 59.4 PK | 68.2 | -8.8 | 2.45 H | 221 | 56.4 | 3.0 |
| 2 | *5710.00 | 119.5 PK | | | 2.45 H | 221 | 77.5 | 42.0 |
| 3 | *5710.00 | 108.7 AV | | | 2.45 H | 221 | 66.7 | 42.0 |
| 4 | #5850.00 | 61.8 PK | 68.2 | -6.4 | 2.45 H | 221 | 57.4 | 4.4 |
| 5 | 11420.00 | 55.3 PK | 74.0 | -18.7 | 2.41 H | 251 | 46.9 | 8.4 |
| 6 | 11420.00 | 43.9 AV | 54.0 | -10.1 | 2.41 H | 251 | 35.5 | 8.4 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5470.00 | 60.2 PK | 68.2 | -8.0 | 1.00 V | 193 | 57.2 | 3.0 |
| 2 | *5710.00 | 119.8 PK | | | 1.00 V | 193 | 77.8 | 42.0 |
| 3 | *5710.00 | 108.1 AV | | | 1.00 V | 193 | 66.1 | 42.0 |
| 4 | #5850.00 | 63.9 PK | 68.2 | -4.3 | 1.00 V | 193 | 59.5 | 4.4 |
| 5 | 11420.00 | 55.6 PK | 74.0 | -18.4 | 1.63 V | 188 | 47.2 | 8.4 |
| 6 | 11420.00 | 44.8 AV | 54.0 | -9.2 | 1.63 V | 188 | 36.4 | 8.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE40) Full RU | Channel | CH 151 : 5755 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5641.20 | 60.9 PK | 68.2 | -7.3 | 2.60 H | 241 | 57.1 | 3.8 |
| 2 | *5755.00 | 119.7 PK | | | 2.60 H | 241 | 77.5 | 42.2 |
| 3 | *5755.00 | 106.9 AV | | | 2.60 H | 241 | 64.7 | 42.2 |
| 4 | #5968.00 | 61.4 PK | 68.2 | -6.8 | 2.60 H | 241 | 56.8 | 4.6 |
| 5 | 11510.00 | 59.8 PK | 74.0 | -14.2 | 1.85 H | 198 | 51.2 | 8.6 |
| 6 | 11510.00 | 47.1 AV | 54.0 | -6.9 | 1.85 H | 198 | 38.5 | 8.6 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5644.80 | 62.6 PK | 68.2 | -5.6 | 1.37 V | 183 | 58.8 | 3.8 |
| 2 | *5755.00 | 117.7 PK | | | 1.37 V | 183 | 75.5 | 42.2 |
| 3 | *5755.00 | 105.6 AV | | | 1.37 V | 183 | 63.4 | 42.2 |
| 4 | #5950.40 | 61.8 PK | 68.2 | -6.4 | 1.37 V | 183 | 57.2 | 4.6 |
| 5 | 11510.00 | 60.3 PK | 74.0 | -13.7 | 1.55 V | 172 | 51.7 | 8.6 |
| 6 | 11510.00 | 47.5 AV | 54.0 | -6.5 | 1.55 V | 172 | 38.9 | 8.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE40) Full RU | Channel | CH 159 : 5795 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5639.60 | 60.6 PK | 68.2 | -7.6 | 2.43 H | 222 | 56.8 | 3.8 |
| 2 | *5795.00 | 119.9 PK | | | 2.43 H | 222 | 77.3 | 42.6 |
| 3 | *5795.00 | 107.1 AV | | | 2.43 H | 222 | 64.5 | 42.6 |
| 4 | #5998.40 | 62.3 PK | 68.2 | -5.9 | 2.43 H | 222 | 57.5 | 4.8 |
| 5 | 11590.00 | 60.1 PK | 74.0 | -13.9 | 1.87 H | 192 | 51.3 | 8.8 |
| 6 | 11590.00 | 47.4 AV | 54.0 | -6.6 | 1.87 H | 192 | 38.6 | 8.8 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5613.60 | 59.3 PK | 68.2 | -8.9 | 1.12 V | 183 | 55.7 | 3.6 |
| 2 | *5795.00 | 118.6 PK | | | 1.12 V | 183 | 76.0 | 42.6 |
| 3 | *5795.00 | 106.3 AV | | | 1.12 V | 183 | 63.7 | 42.6 |
| 4 | #5931.20 | 60.4 PK | 68.2 | -7.8 | 1.12 V | 183 | 55.9 | 4.5 |
| 5 | 11590.00 | 60.7 PK | 74.0 | -13.3 | 1.49 V | 162 | 51.9 | 8.8 |
| 6 | 11590.00 | 48.0 AV | 54.0 | -6.0 | 1.49 V | 162 | 39.2 | 8.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE80) Full RU | Channel | CH 42 : 5210 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5149.70 | 64.1 PK | 74.0 | -9.9 | 2.40 H | 213 | 60.8 | 3.3 |
| 2 | 5149.70 | 53.5 AV | 54.0 | -0.5 | 2.40 H | 213 | 50.2 | 3.3 |
| 3 | *5210.00 | 105.6 PK | | | 2.40 H | 213 | 64.8 | 40.8 |
| 4 | *5210.00 | 96.9 AV | | | 2.40 H | 213 | 56.1 | 40.8 |
| 5 | 5350.00 | 56.9 PK | 74.0 | -17.1 | 2.40 H | 213 | 54.0 | 2.9 |
| 6 | 5350.00 | 46.0 AV | 54.0 | -8.0 | 2.40 H | 213 | 43.1 | 2.9 |
| 7 | #10420.00 | 56.2 PK | 68.2 | -12.0 | 2.45 H | 210 | 48.2 | 8.0 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5149.70 | 65.6 PK | 74.0 | -8.4 | 1.10 V | 182 | 62.3 | 3.3 |
| 2 | 5149.70 | 53.8 AV | 54.0 | -0.2 | 1.10 V | 182 | 50.5 | 3.3 |
| 3 | *5210.00 | 109.1 PK | | | 1.10 V | 182 | 68.3 | 40.8 |
| 4 | *5210.00 | 98.8 AV | | | 1.10 V | 182 | 58.0 | 40.8 |
| 5 | 5350.00 | 57.5 PK | 74.0 | -16.5 | 1.10 V | 182 | 54.6 | 2.9 |
| 6 | 5350.00 | 46.7 AV | 54.0 | -7.3 | 1.10 V | 182 | 43.8 | 2.9 |
| 7 | #10420.00 | 56.6 PK | 68.2 | -11.6 | 1.13 V | 288 | 48.6 | 8.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE80) Full RU | Channel | CH 58 : 5290 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5150.00 | 56.4 PK | 74.0 | -17.6 | 2.55 H | 217 | 53.1 | 3.3 |
| 2 | 5150.00 | 45.6 AV | 54.0 | -8.4 | 2.55 H | 217 | 42.3 | 3.3 |
| 3 | *5290.00 | 107.0 PK | | | 2.55 H | 217 | 66.2 | 40.8 |
| 4 | *5290.00 | 98.5 AV | | | 2.55 H | 217 | 57.7 | 40.8 |
| 5 | 5350.00 | 63.0 PK | 74.0 | -11.0 | 2.55 H | 217 | 60.1 | 2.9 |
| 6 | 5350.00 | 52.7 AV | 54.0 | -1.3 | 2.55 H | 217 | 49.8 | 2.9 |
| 7 | #10580.00 | 55.9 PK | 68.2 | -12.3 | 2.43 H | 211 | 48.2 | 7.7 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5150.00 | 56.8 PK | 74.0 | -17.2 | 1.21 V | 182 | 53.5 | 3.3 |
| 2 | 5150.00 | 45.9 AV | 54.0 | -8.1 | 1.21 V | 182 | 42.6 | 3.3 |
| 3 | *5290.00 | 108.7 PK | | | 1.21 V | 182 | 67.9 | 40.8 |
| 4 | *5290.00 | 99.4 AV | | | 1.21 V | 182 | 58.6 | 40.8 |
| 5 | 5350.00 | 63.4 PK | 74.0 | -10.6 | 1.21 V | 182 | 60.5 | 2.9 |
| 6 | 5350.00 | 53.6 AV | 54.0 | -0.4 | 1.21 V | 182 | 50.7 | 2.9 |
| 7 | #10580.00 | 56.4 PK | 68.2 | -11.8 | 1.52 V | 192 | 48.7 | 7.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE80) Full RU | Channel | CH 106 : 5530 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 66.4 PK | 74.0 | -7.6 | 2.44 H | 223 | 63.4 | 3.0 |
| 2 | 5460.00 | 53.8 AV | 54.0 | -0.2 | 2.44 H | 223 | 50.8 | 3.0 |
| 3 | #5470.00 | 67.8 PK | 68.2 | -0.4 | 2.44 H | 223 | 64.8 | 3.0 |
| 4 | *5530.00 | 113.9 PK | | | 2.44 H | 223 | 72.6 | 41.3 |
| 5 | *5530.00 | 100.6 AV | | | 2.44 H | 223 | 59.3 | 41.3 |
| 6 | 11060.00 | 53.8 PK | 74.0 | -20.2 | 1.06 H | 279 | 45.8 | 8.0 |
| 7 | 11060.00 | 43.2 AV | 54.0 | -10.8 | 1.06 H | 279 | 35.2 | 8.0 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 66.1 PK | 74.0 | -7.9 | 1.10 V | 175 | 63.1 | 3.0 |
| 2 | 5460.00 | 53.7 AV | 54.0 | -0.3 | 1.10 V | 175 | 50.7 | 3.0 |
| 3 | #5470.00 | 67.7 PK | 68.2 | -0.5 | 1.10 V | 175 | 64.7 | 3.0 |
| 4 | *5530.00 | 113.6 PK | | | 1.10 V | 175 | 72.3 | 41.3 |
| 5 | *5530.00 | 100.3 AV | | | 1.10 V | 175 | 59.0 | 41.3 |
| 6 | 11060.00 | 54.3 PK | 74.0 | -19.7 | 1.56 V | 188 | 46.3 | 8.0 |
| 7 | 11060.00 | 44.1 AV | 54.0 | -9.9 | 1.56 V | 188 | 36.1 | 8.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE80) Full RU | Channel | CH 122 : 5610 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5610.00 | 114.7 PK | | | 2.46 H | 222 | 73.2 | 41.5 |
| 2 | *5610.00 | 112.1 AV | | | 2.46 H | 222 | 70.6 | 41.5 |
| 3 | #5725.00 | 67.3 PK | 68.2 | -0.9 | 2.46 H | 222 | 63.2 | 4.1 |
| 4 | 11220.00 | 54.6 PK | 74.0 | -19.4 | 1.02 H | 283 | 45.9 | 8.7 |
| 5 | 11220.00 | 44.4 AV | 54.0 | -9.6 | 1.02 H | 283 | 35.7 | 8.7 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *5610.00 | 114.9 PK | | | 1.11 V | 177 | 73.4 | 41.5 |
| 2 | *5610.00 | 102.2 AV | | | 1.11 V | 177 | 60.7 | 41.5 |
| 3 | #5725.00 | 67.9 PK | 68.2 | -0.3 | 1.11 V | 177 | 63.8 | 4.1 |
| 4 | 11220.00 | 55.2 PK | 74.0 | -18.8 | 1.49 V | 186 | 46.5 | 8.7 |
| 5 | 11220.00 | 45.1 AV | 54.0 | -8.9 | 1.49 V | 186 | 36.4 | 8.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE80) Full RU | Channel | CH 138 : 5690 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5470.00 | 66.0 PK | 68.2 | -2.2 | 2.42 H | 218 | 63.0 | 3.0 |
| 2 | *5690.00 | 116.8 PK | | | 2.42 H | 218 | 74.8 | 42.0 |
| 3 | *5690.00 | 105.3 AV | | | 2.42 H | 218 | 63.3 | 42.0 |
| 4 | #5850.00 | 67.1 PK | 68.2 | -1.1 | 2.42 H | 218 | 62.7 | 4.4 |
| 5 | 11380.00 | 54.7 PK | 74.0 | -19.3 | 2.56 H | 231 | 46.2 | 8.5 |
| 6 | 11380.00 | 43.6 AV | 54.0 | -10.4 | 2.56 H | 231 | 35.1 | 8.5 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5467.10 | 68.0 PK | 68.2 | -0.2 | 1.06 V | 176 | 65.0 | 3.0 |
| 2 | *5690.00 | 115.8 PK | | | 1.06 V | 176 | 73.8 | 42.0 |
| 3 | *5690.00 | 104.8 AV | | | 1.06 V | 176 | 62.8 | 42.0 |
| 4 | #5850.00 | 65.8 PK | 68.2 | -2.4 | 1.06 V | 176 | 61.4 | 4.4 |
| 5 | 11380.00 | 56.1 PK | 74.0 | -17.9 | 1.59 V | 185 | 47.6 | 8.5 |
| 6 | 11380.00 | 44.9 AV | 54.0 | -9.1 | 1.59 V | 185 | 36.4 | 8.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|-------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE80) Full RU | Channel | CH 155 : 5775 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5648.00 | 63.9 PK | 68.2 | -4.3 | 2.58 H | 240 | 60.1 | 3.8 |
| 2 | *5775.00 | 114.5 PK | | | 2.58 H | 240 | 72.0 | 42.5 |
| 3 | *5775.00 | 101.2 AV | | | 2.58 H | 240 | 58.7 | 42.5 |
| 4 | #5925.60 | 64.2 PK | 68.2 | -4.0 | 2.58 H | 240 | 59.7 | 4.5 |
| 5 | 11550.00 | 60.1 PK | 74.0 | -13.9 | 1.88 H | 191 | 51.4 | 8.7 |
| 6 | 11550.00 | 47.3 AV | 54.0 | -6.7 | 1.88 H | 191 | 38.6 | 8.7 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | #5648.00 | 67.6 PK | 68.2 | -0.6 | 1.26 V | 185 | 63.8 | 3.8 |
| 2 | *5775.00 | 113.4 PK | | | 1.26 V | 185 | 70.9 | 42.5 |
| 3 | *5775.00 | 100.5 AV | | | 1.26 V | 185 | 58.0 | 42.5 |
| 4 | #5926.80 | 62.4 PK | 68.2 | -5.8 | 1.26 V | 185 | 57.9 | 4.5 |
| 5 | 11550.00 | 60.4 PK | 74.0 | -13.6 | 1.45 V | 180 | 51.7 | 8.7 |
| 6 | 11550.00 | 47.6 AV | 54.0 | -6.4 | 1.45 V | 180 | 38.9 | 8.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

| | | | |
|-----------------|--------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE160) Full RU | Channel | CH 50 : 5250 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5150.00 | 66.1 PK | 74.0 | -7.9 | 2.47 H | 218 | 62.8 | 3.3 |
| 2 | 5150.00 | 52.8 AV | 54.0 | -1.2 | 2.47 H | 218 | 49.5 | 3.3 |
| 3 | *5250.00 | 106.8 PK | | | 2.47 H | 218 | 66.0 | 40.8 |
| 4 | *5250.00 | 104.1 AV | | | 2.47 H | 218 | 63.3 | 40.8 |
| 5 | 5350.00 | 65.1 PK | 74.0 | -8.9 | 2.47 H | 218 | 62.2 | 2.9 |
| 6 | 5350.00 | 52.2 AV | 54.0 | -1.8 | 2.47 H | 218 | 49.3 | 2.9 |
| 7 | #10500.00 | 54.2 PK | 68.2 | -14.0 | 2.38 H | 234 | 46.5 | 7.7 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5150.00 | 67.4 PK | 74.0 | -6.6 | 1.02 V | 192 | 64.1 | 3.3 |
| 2 | 5150.00 | 53.9 AV | 54.0 | -0.1 | 1.02 V | 192 | 50.6 | 3.3 |
| 3 | *5250.00 | 109.6 PK | | | 1.02 V | 192 | 68.8 | 40.8 |
| 4 | *5250.00 | 96.2 AV | | | 1.02 V | 192 | 55.4 | 40.8 |
| 5 | 5350.00 | 66.9 PK | 74.0 | -7.1 | 1.02 V | 192 | 64.0 | 2.9 |
| 6 | 5350.00 | 53.8 AV | 54.0 | -0.2 | 1.02 V | 192 | 50.9 | 2.9 |
| 7 | #10500.00 | 55.7 PK | 68.2 | -12.5 | 1.59 V | 184 | 48.0 | 7.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|--------------------------------|-------------------|---------------------------|
| RF Mode | TX 802.11ax (HE160) Full RU | Channel | CH 114 : 5570 MHz |
| Frequency Range | 1GHz ~ 40GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 65.8 PK | 74.0 | -8.2 | 2.42 H | 220 | 62.8 | 3.0 |
| 2 | 5460.00 | 52.1 AV | 54.0 | -1.9 | 2.42 H | 220 | 49.1 | 3.0 |
| 3 | #5470.00 | 67.5 PK | 68.2 | -0.7 | 2.42 H | 220 | 64.5 | 3.0 |
| 4 | *5570.00 | 106.5 PK | | | 2.42 H | 220 | 65.1 | 41.4 |
| 5 | *5570.00 | 94.3 AV | | | 2.42 H | 220 | 52.9 | 41.4 |
| 6 | #5725.00 | 61.9 PK | 68.2 | -6.3 | 2.42 H | 220 | 57.8 | 4.1 |
| 7 | 11140.00 | 54.3 PK | 74.0 | -19.7 | 2.33 H | 241 | 45.9 | 8.4 |
| 8 | 11140.00 | 43.7 AV | 54.0 | -10.3 | 2.33 H | 241 | 35.3 | 8.4 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5460.00 | 67.1 PK | 74.0 | -6.9 | 1.03 V | 182 | 64.1 | 3.0 |
| 2 | 5460.00 | 53.5 AV | 54.0 | -0.5 | 1.03 V | 182 | 50.5 | 3.0 |
| 3 | #5470.00 | 67.9 PK | 68.2 | -0.3 | 1.03 V | 182 | 64.9 | 3.0 |
| 4 | *5570.00 | 107.1 PK | | | 1.03 V | 182 | 65.7 | 41.4 |
| 5 | *5570.00 | 95.2 AV | | | 1.03 V | 182 | 53.8 | 41.4 |
| 6 | #5725.00 | 62.1 PK | 68.2 | -6.1 | 1.03 V | 182 | 58.0 | 4.1 |
| 7 | 11140.00 | 55.5 PK | 74.0 | -18.5 | 1.61 V | 189 | 47.1 | 8.4 |
| 8 | 11140.00 | 44.6 AV | 54.0 | -9.4 | 1.61 V | 189 | 36.2 | 8.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.


Below 1GHz Worst-Case Data:

| | | | |
|-----------------|--------------|-------------------|-------------------|
| RF Mode | TX 802.11a | Channel | CH 165 : 5825 MHz |
| Frequency Range | 30MHz ~ 1GHz | Detector Function | Quasi-Peak (QP) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 39.84 | 33.5 QP | 40.0 | -6.5 | 2.00 H | 78 | 52.3 | -18.8 |
| 2 | 93.26 | 25.3 QP | 43.5 | -18.2 | 1.00 H | 271 | 49.1 | -23.8 |
| 3 | 146.68 | 24.9 QP | 43.5 | -18.6 | 1.00 H | 357 | 43.0 | -18.1 |
| 4 | 530.46 | 23.9 QP | 46.0 | -22.1 | 1.50 H | 7 | 36.2 | -12.3 |
| 5 | 697.75 | 25.7 QP | 46.0 | -20.3 | 1.00 H | 272 | 34.9 | -9.2 |
| 6 | 866.45 | 24.6 QP | 46.0 | -21.4 | 2.00 H | 14 | 31.3 | -6.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

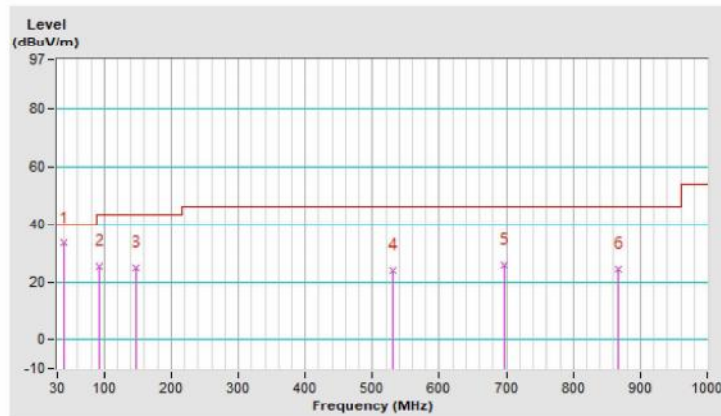


| | | | |
|-----------------|--------------|-------------------|-------------------|
| RF Mode | TX 802.11a | Channel | CH 165 : 5825 MHz |
| Frequency Range | 30MHz ~ 1GHz | Detector Function | Quasi-Peak (QP) |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 48.28 | 23.6 QP | 40.0 | -16.4 | 1.50 V | 345 | 41.7 | -18.1 |
| 2 | 222.59 | 34.0 QP | 46.0 | -12.0 | 1.00 V | 2 | 55.6 | -21.6 |
| 3 | 259.14 | 23.2 QP | 46.0 | -22.8 | 1.00 V | 2 | 42.4 | -19.2 |
| 4 | 371.61 | 30.7 QP | 46.0 | -15.3 | 1.00 V | 348 | 46.5 | -15.8 |
| 5 | 384.26 | 29.5 QP | 46.0 | -16.5 | 1.50 V | 350 | 45.0 | -15.5 |
| 6 | 775.07 | 26.9 QP | 46.0 | -19.1 | 1.50 V | 357 | 34.7 | -7.8 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

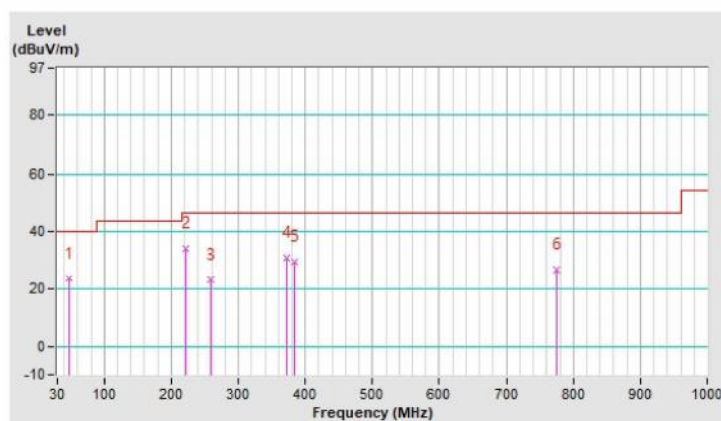

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

| Frequency (MHz) | Conducted Limit (dBuV) | |
|-----------------|------------------------|---------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30.0 | 60 | 50 |

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

| Description & Manufacturer | Model No. | Serial No. | Cal. Date | Cal. Due |
|-----------------------------------------|--------------------------|----------------|---------------|---------------|
| Test Receiver ROHDE & SCHWARZ | ESCI | 100613 | Dec. 04, 2020 | Dec. 03, 2021 |
| RF signal cable Woken | 5D-FB | Cable-cond1-01 | Jan. 16, 2021 | Jan. 15, 2022 |
| LISN ROHDE & SCHWARZ (EUT) | ENV216 | 101826 | Feb. 25, 2021 | Feb. 24, 2022 |
| LISN ROHDE & SCHWARZ (Peripheral) | ESH3-Z5 | 100311 | Aug. 28, 2020 | Aug. 27, 2021 |
| Software ADT | BV ADT_Cond_ V7.3.7.4 | NA | NA | NA |

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1 (Conduction 1).

3. The VCCI Site Registration No. is C-12040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

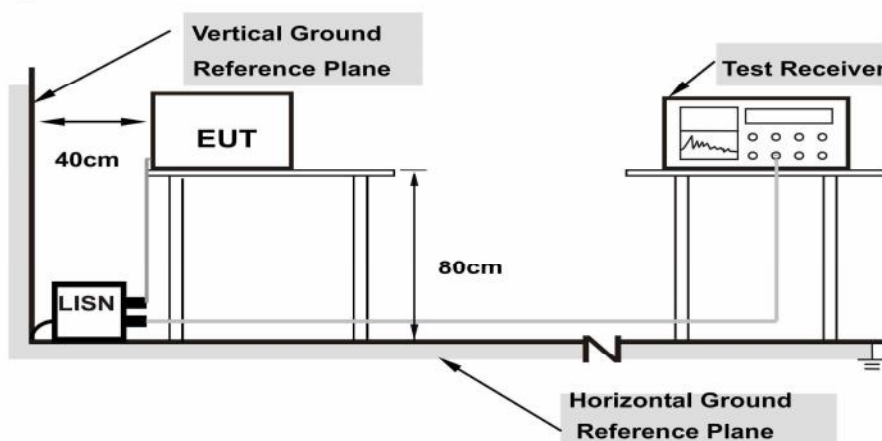

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results

Worst-case data:


802.11a

| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|----------|-------------------|--------------------------------|
|-------|----------|-------------------|--------------------------------|

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.20523 | 9.71 | 36.85 | 18.74 | 46.56 | 28.45 | 63.40 | 53.40 | -16.84 | -24.95 |
| 2 | 0.25400 | 9.72 | 28.69 | 11.17 | 38.41 | 20.89 | 61.63 | 51.63 | -23.22 | -30.74 |
| 3 | 0.81800 | 9.75 | 13.70 | 4.25 | 23.45 | 14.00 | 56.00 | 46.00 | -32.55 | -32.00 |
| 4 | 3.40200 | 9.78 | 28.33 | 18.13 | 38.11 | 27.91 | 56.00 | 46.00 | -17.89 | -18.09 |
| 5 | 5.72200 | 9.81 | 28.00 | 20.27 | 37.81 | 30.08 | 60.00 | 50.00 | -22.19 | -19.92 |
| 6 | 18.19000 | 9.82 | 20.84 | 9.14 | 30.66 | 18.96 | 60.00 | 50.00 | -29.34 | -31.04 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

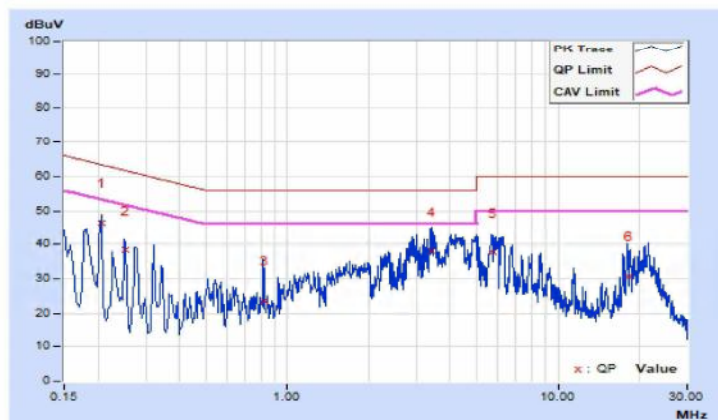


| | | | |
|-------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|-------------|-------------------|--------------------------------|

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-------------------------|----------------------------|-------|-----------------------------|-------|--------------------|-------|----------------|--------|
| | | | | | | | | | | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.15000 | 9.76 | 36.28 | 18.70 | 46.04 | 28.46 | 66.00 | 56.00 | -19.96 | -27.54 |
| 2 | 0.16932 | 9.77 | 34.98 | 18.98 | 44.75 | 28.75 | 64.99 | 54.99 | -20.24 | -26.24 |
| 3 | 0.51800 | 9.80 | 17.80 | 9.02 | 27.60 | 18.82 | 56.00 | 46.00 | -28.40 | -27.18 |
| 4 | 3.18600 | 9.84 | 23.92 | 16.83 | 33.76 | 26.67 | 56.00 | 46.00 | -22.24 | -19.33 |
| 5 | 4.55400 | 9.86 | 21.91 | 15.62 | 31.77 | 25.48 | 56.00 | 46.00 | -24.23 | -20.52 |
| 6 | 21.19400 | 9.99 | 18.39 | 9.86 | 28.38 | 19.85 | 60.00 | 50.00 | -31.62 | -30.15 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

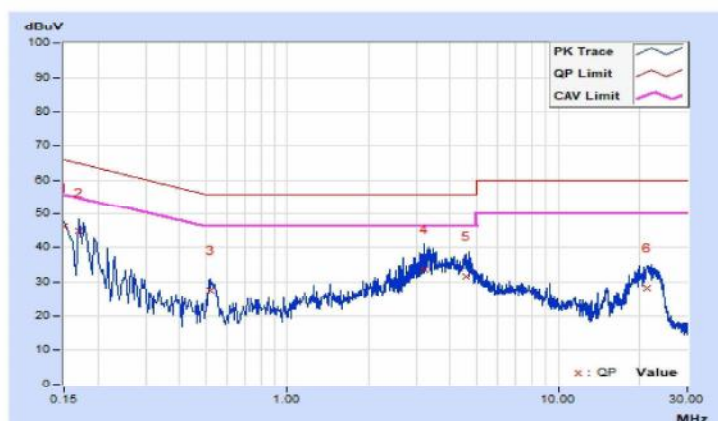

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

| Operation Band | EUT Category | | Limit |
|----------------|--------------|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| U-NII-1 | | Outdoor Access Point | 1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon) |
| | | Fixed point-to-point Access Point | 1 Watt (30 dBm) |
| | | Indoor Access Point | 1 Watt (30 dBm) |
| | ✓ | Mobile and Portable client device | 250mW (24 dBm) |
| U-NII-2A | | ✓ | 250mW (24 dBm) or 11 dBm+10 log B* |
| U-NII-2C | | ✓ | 250mW (24 dBm) or 11 dBm+10 log B* |
| U-NII-3 | | ✓ | 1 Watt (30 dBm) |

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.


For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup

For Power Output



For 26dB Bandwidth and power output of transmission above 5.725 GHz where the EBW crosses 5.725 GHz



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

For Average Power Measurement

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

For transmission above 5.725 GHz where the EBW crosses 5.725 GHz

For channel aggregation (channel 138, 142, 144) measurement refer to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Section II E 2 b) method SA-1.

For 26dB Bandwidth

- a. Set RBW = approximately 1% of the emission bandwidth.
- b. Set the VBW > RBW.
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Power Output:
802.11a

| Chan. | Freq. (MHz) | Average Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|------------------------|---------------------|---------|------------------------|-------------------------|-------------------------|----------------|
| | | Chain 0 | Chain 1 | | | | |
| 36 | 5180 | 19.22 | 19.15 | 165.785 | 22.20 | 24.00 | Pass |
| 40 | 5200 | 19.19 | 19.27 | 167.513 | 22.24 | 24.00 | Pass |
| 48 | 5240 | 19.09 | 18.99 | 160.346 | 22.05 | 24.00 | Pass |
| 52 | 5260 | 19.31 | 19.28 | 170.033 | 22.31 | 24.00 | Pass |
| 60 | 5300 | 18.90 | 18.82 | 153.833 | 21.87 | 24.00 | Pass |
| 64 | 5320 | 18.89 | 18.83 | 153.830 | 21.87 | 24.00 | Pass |
| 100 | 5500 | 19.01 | 19.04 | 159.784 | 22.04 | 24.00 | Pass |
| 116 | 5580 | 19.18 | 19.23 | 166.547 | 22.22 | 24.00 | Pass |
| 140 | 5700 | 19.09 | 18.96 | 159.801 | 22.04 | 24.00 | Pass |
| 144 | 5720 (For U-NII-2C) | 18.09 | 17.92 | 126.361 | 21.02 | 24.00 | Pass |
| 144 | 5720 (For U-NII-3) | 12.12 | 11.95 | 31.960 | 15.05 | 30.00 | Pass |
| 149 | 5745 | 20.87 | 21.03 | 248.945 | 23.96 | 30.00 | Pass |
| 157 | 5785 | 20.74 | 21.12 | 247.996 | 23.94 | 30.00 | Pass |
| 165 | 5825 | 20.94 | 21.03 | 250.930 | 24.00 | 30.00 | Pass |

Note:

For U-NII-2A, U-NII-2C Band:

Chain 0

1. $11\text{dBm} + 10\log(28.45) = 25.54 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(38.03) = 26.80 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(36.69) = 26.64 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(36.27) = 26.59 > 24\text{dBm}$
5. $11\text{dBm} + 10\log(24.59) = 24.90 > 24\text{dBm}$
6. $11\text{dBm} + 10\log(29.28) = 25.66 > 24\text{dBm}$
7. $11\text{dBm} + 10\log(5725.00 - 5700.05) = 24.97 > 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log(23.99) = 24.80 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(39.11) = 26.92 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(37.95) = 26.79 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(35.57) = 26.51 > 24\text{dBm}$
5. $11\text{dBm} + 10\log(24.10) = 24.82 > 24\text{dBm}$
6. $11\text{dBm} + 10\log(33.45) = 26.24 > 24\text{dBm}$
7. $11\text{dBm} + 10\log(5725.00 - 5697.42) = 25.40 > 24\text{dBm}$