

EVALUATION REPORT

for Certification of Conformity

Applicant: LG Electronics USA.**1000 Sylvan Avenue,****Englewood Cliffs New Jersey United States 07632,****Attn: Kyung-Su Han / Director****Date of Issue: Mar. 24, 2020****Order Number: GETEC-C1-20-149****Test Report Number: GETEC-E3-20-019****Test Site: GUMI UNIVERSITY EMC CENTER****CAB Designation Number: KR0033****FCC ID. : BEJQ50941E****Applicant : LG Electronics USA.**


Rule Part(s) : FCC Part 18
Test Method : FCC/OET MP-5
EUT Type : HOUSEHOLD COOKTOP
Equipment Class : Part 18 Consumer Device(8CC)
Type of Authority : Certification
Model Name : SKSIT3601G
Trade Mark : LG

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC/OET MP-5 (1986)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the vest of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

**Sang Hyun Park, Associate Engineer
GUMI UNIVERSITY EMC CENTER**

Reviewed by,

**Hyoung Seop Kim, Technical Manager
GUMI UNIVERSITY EMC CENTER**



CONTENTS

1. GENERAL INFORMATION	3
2. INTRODUCTION	4
3. PRODUCT INFORMATION	5
3.1 DESCRIPTION OF EUT.....	5
3.2 DEFINITION OF MODELS	5
3.3 SUPPORT EQUIPMENT / CABLES USED	6
3.4 MODIFICATION ITEM(S).....	6
4. DESCRIPTION OF TESTS.....	7
4.1 TEST CONDITION.....	7
5. SUMMARY OF TEST RESULTS	7
6. CONDUCTED EMISSION.....	8
6.1 OPERATING ENVIRONMENT	9
6.2 TEST SET-UP	9
6.3 MEASUREMENT UNCERTAINTY.....	9
6.4 LIMIT	10
6.5 TEST EQUIPMENT USED.....	10
6.6 TEST DATA FOR CONDUCTED EMISSION	10
7. RADIATED EMISSION	21
7.1 OPERATING ENVIRONMENT	21
7.2 TEST SET-UP	21
7.3 MEASUREMENT UNCERTAINTY.....	23
7.4 LIMIT	24
7.5 TEST EQUIPMENT USED.....	24
7.6 TEST DATA FOR RADIATED EMISSION	25
8. SAMPLE CALCULATIONS.....	29
8.1 EXAMPLE 1 :	29
8.2 EXAMPLE 2 :	29
9. RECOMMENDATION & CONCLUSION.....	29
APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – LABELLING	
APPENDIX C – BLOCK DIAGRAM	
APPENDIX D – SCHEMATIC DIAGRAM	
APPENDIX E – TEST SETUP PHOTOGRAPH	
APPENDIX F – EXTERNAL PHOTOGRAPH	
APPENDIX G – INTERNAL PHOTOGRAPH	
APPENDIX H – USER’S MANUAL	
APPENDIX I – OPERATIONAL DESCRIPTION	





Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: LG Electronics USA.

Applicant Address: 1000 Sylvan Avenue,
Englewood Cliffs New Jersey United States 07632

Manufacturer: LG Electronics Inc..

Manufacturer Address: 170, Sungsanpaechong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, 642-711, Korea

Contact Person: Kwang-Mu, Son / Chief Research Engineer

Telephone Number: +82-55-260-3966

● FCC ID.	BEJQ50941E
● EUT Type	HOUSEHOLD COOKTOP
● Model Name	SKSIT3601G
● Rule Part(s)	FCC Part 18
● Test Method	FCC/OET MP-5
● Type of Authority	Certification
● Test Procedure(s)	FCC/OET MP-5
● Dates of Test	Mar. 20, 2020 ~ Mar. 21, 2020
● Place of Test	GUMI UNIVERSITY EMC CENTER (FCC Test Firm Registration Number: 269701) 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Republic of Korea.
● Test Report Number	GETEC-E3-20-019
● Dates of Issue	Mar. 24, 2020





2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2014) was used in determining radiated and conducted emissions emanating from **LG Electronics USA. HOUSEHOLD COOKTOP (Model name: SKSIT3601G).**

These measurement tests were conducted at **GUMI UNIVERSITY EMC CENTER.**

The site address is 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Gyeongnam 641-713, Korea

This test site is one of the highest point of GUMI UNIVERSITY at about 200 kilometers away from Seoul city and 40 kilometers away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2014)

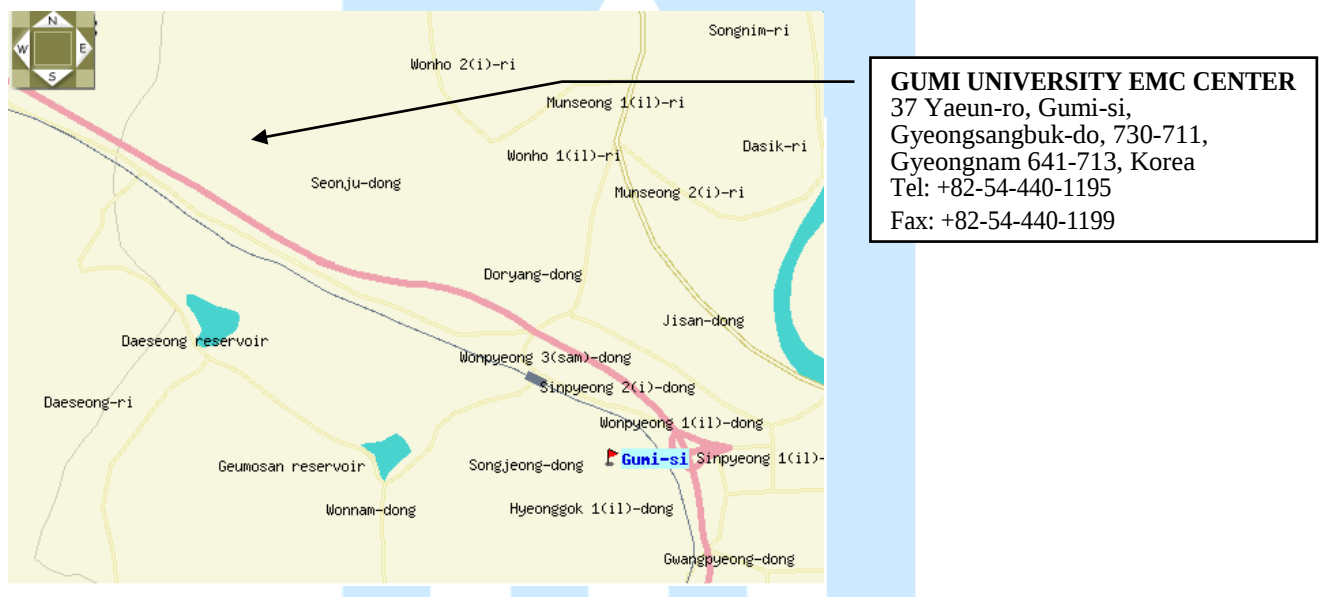


Fig 1. The map above shows the GUMI UNIVERSITY in vicinity area.





3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **LG Electronics USA.**
HOUSEHOLD COOKTOP (Model Name: SKSIT3601G)
FCC ID.: BEJQ50941E.

Models		SKSIT3601G		
Description		Induction Cooktop		
Electrical Specifications	Connection voltage	240/208 VAC 60 Hz., 46.3 A / 43.3 A		
	Maximum connected power load	11100 W / 9000 W		
Cooktop Dimensions		36 ⁵ / ₈ " (930 mm) (W) × 3 ⁹ / ₁₆ " (91 mm) (H) × 21 ¹ / ₁₆ " (535 mm) (D)		
Countertop Cutout Dimensions		Standard Installation - 34 ³ / ₈ " (873 mm) (W) × 6 ³ / ₄ "(172 mm) (H) × 19 ⁵¹ / ₆₄ " (503 mm) (D)		
		Flush Installation - 36 ²⁷ / ₃₂ " (936 mm) (W) × 6 ³ / ₄ "(172 mm) (H) × 21 ¹⁹ / ₆₄ " (541 mm) (D)		
Cooking Zones		Position	Size	Power
		Front Left	8 ¹ / ₂ " × 7 ³ / ₃₂ " (216×180 mm)	1500/3000 W (208 V) 1850/3700 W (240 V)
		Front Right	8 ¹ / ₂ " × 7 ³ / ₃₂ " (216×180 mm)	1500/3000 W (208 V) 1850/3700 W (240 V)
		Flex Left	8 ¹ / ₂ " × 14 ¹¹ / ₆₄ " (216×360 mm)	2700/3000 W (208 V) 3300/3700 W (240 V)
		Rear Left	8 ¹ / ₂ " × 7 ³ / ₃₂ " (216×180 mm)	1500/3000 W (208 V) 1850/3700 W (240 V)
		Rear Right	8 ¹ / ₂ " × 7 ³ / ₃₂ " (216×180 mm)	1500/3000 W (208 V) 1850/3700 W (240 V)
		Flex Right	8 ¹ / ₂ " × 14 ¹¹ / ₆₄ " (216×360 mm)	2700/3000 W (208 V) 3300/3700 W (240 V)
		Center	11", 7" (280, 178 mm)	Inner Burner : 1500/3000 W (208 V) 1850/3700 W (240 V) Dual Burner : 3000/5700 W (208 V) 3700/7000 W (240 V)

Wireless LAN module Specifications	
Model	LCW-009
Frequency Range	2412~2462 MHz
Output Power (max.)	IEEE 802.11 b : 20.41 dBm IEEE 802.11 g : 24.82 dBm IEEE 802.11 n (HT20) : 24.86 dBm IEEE 802.11 n (HT40) : 24.92 dBm

Induction heating mode

Cooking Element	Low frequency (Maximum power)	High frequency (Minimum power)
#1 Front Left Hob	30 kHz	65 kHz
#2 Rear Left Hob	30 kHz	65 kHz
#3 Front Right Hob	30 kHz	65 kHz
#4 Rear Right Hob	30 kHz	65 kHz
#5 Center	30 kHz	65 kHz

3.2 Definition of models

Factory model name : HN951VA





3.3 Support Equipment / Cables used

3.3.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
None	-	-	S/N: - FCC ID.: -

See “Appendix E – Test Setup Photographs” for actual system test set-up

3.3.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
WLAN module	LG Electronics	LCW-009	S/N: -. FCC ID.: BEJ-LCW009

3.3.3 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected to the EUT and AC power	1.50 m Unshielded.

3.4 Modification Item(s)

-. None





4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used.

The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency: AC 208V / 240 V, 60 Hz
- Operating condition during the test(s) :
This device has been tested in the configurations of Induction mode with WLAN module operating.
Induction mode: This device has been operated with an enameled steel vessel filled with tap water up to 80 % of its maximum capacity.

cooking element "1"= front left hob ,"2"= rear left hob, "3"=front right hob, "4"= rear right hob, "5"=center hob

4.2 General Test Procedures

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 (2014) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which Fixed at 2 m above the ground plane to find out the highest emission.

And also, each emission was to be maximized by the table was turned from 0 degrees to 360 degrees. In order to find out the max emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4 (2014).

5. Summary of Test Results

FCC Part Section(s)	Test Description	Test Result
§18.305	Radiated Emission	Pass
§18.307	Conducted Emission	Pass





6. Conducted Emission

-Test Description

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure.

(FCC Test Firm Registration No.: 269701)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ENV216) and the support equipment is powered from the Rohde & Schwarz LISN (ENV216). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCI).

Exploratory measurements were conducted to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Exploratory measurements were scanned using Peak mode of EMI Test receiver from 150 kHz to 30 MHz with 20 ms sweep time. The final measurements were measured with Quasi-Peak and Average mode.

The bandwidth of EMI Test Receiver was set to 9 kHz. Interface cables were connected to the available interface ports of the test unit. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

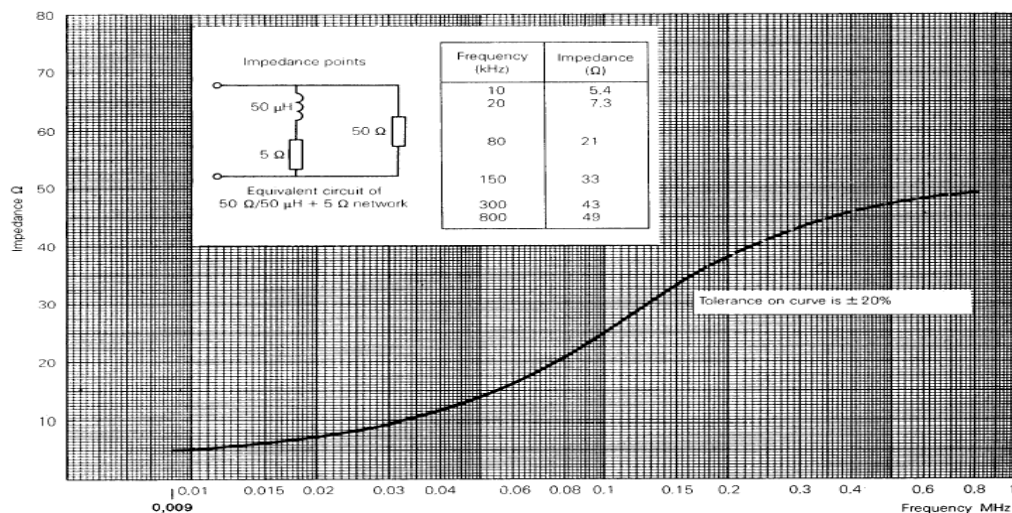


Fig 2. Impedance of LISN





6.1 Operating Environment

Temperature : 25.4 °C
Relative Humidity : 41.9 % R.H.
Air Pressure : 100.6 kPa

6.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

6.3 Measurement Uncertainty


The measurement uncertainty was calculated in accordance with ISO "Guide to the expression of uncertainty in measurement."

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	3.78 dB	Confidence level of approximately 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	3.31 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results





6.4 Limit

RFI Conducted	FCC Limit(dB μ V/m)	
Freq. Range	Quasi-Peak	Average
0.009 MHz ~ 0.05 MHz	110	-
0.05 MHz ~ 0.15 MHz	90 ~ 80*	-
0.15 MHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

6.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESCI	Rohde & Schwarz	EMI Test Receiver	100237	Apr. 03, 2020
□ - ENV216	Rohde & Schwarz	LISN	100173	Apr. 09, 2020
□ - ENV216	Rohde & Schwarz	LISN	100172	Apr. 09, 2020
■ - ESH2-Z5	Rohde & Schwarz	LISN	829991/009	Apr. 11, 2020
■ - VTSD 9561-D	SCHWARZBECK	Pulse Limiter	32	Apr. 11, 2020
■ - EMC 32	Rohde & Schwarz	Software	Ver.8.53	N/A

6.6 Test data for Conducted Emission

- Test Date	: Mar. 21, 2020
- Resolution Bandwidth	: 200 Hz (9 kHz ~ 0.15 MHz) / 9 kHz (0.15 MHz ~ 30 MHz)
- Frequency Range	: 9 kHz ~ 30 MHz
- Line	: L1: Live, N: Neutral
- Comment	: None






▪ Operating condition: Induction mode with WLAN

AC 208 V / 60 Hz

Cooking element #1

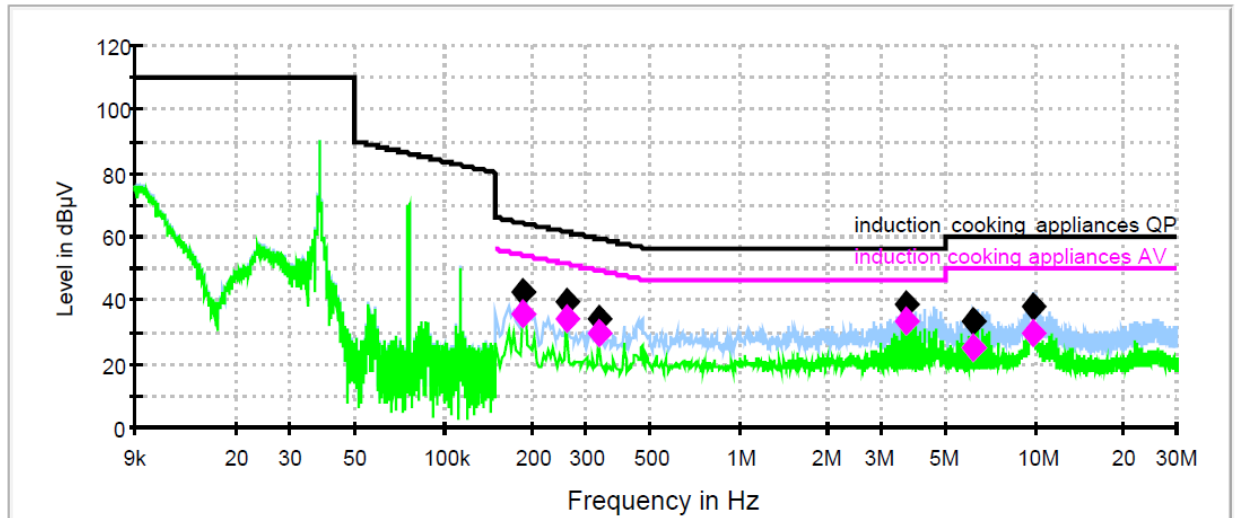

55014-1 induction cooking appliances QP
55014-1 induction cooking appliances AV
Preview Result 1-PK+
Preview Result 2-AVG
Final Result 1-QPK
Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.186290	42.4	1000.0	9.000	GND	L1	20.5	21.8	64.2	
0.257862	39.8	1000.0	9.000	GND	L1	20.5	21.7	61.5	
0.332041	34.0	1000.0	9.000	GND	L1	20.5	25.4	59.4	
3.647600	38.7	1000.0	9.000	GND	N	20.7	17.3	56.0	
6.141388	33.0	1000.0	9.000	GND	N	20.8	27.0	60.0	
9.891025	37.6	1000.0	9.000	GND	N	20.7	22.4	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.186290	35.7	1000.0	9.000	GND	L1	20.5	18.5	54.2	
0.257862	34.1	1000.0	9.000	GND	L1	20.5	17.4	51.5	
0.332041	29.4	1000.0	9.000	GND	L1	20.5	20.0	49.4	
3.647600	33.3	1000.0	9.000	GND	N	20.7	12.7	46.0	
6.141388	25.2	1000.0	9.000	GND	N	20.8	24.8	50.0	
9.891025	29.8	1000.0	9.000	GND	N	20.7	20.2	50.0	





Cooking element #2

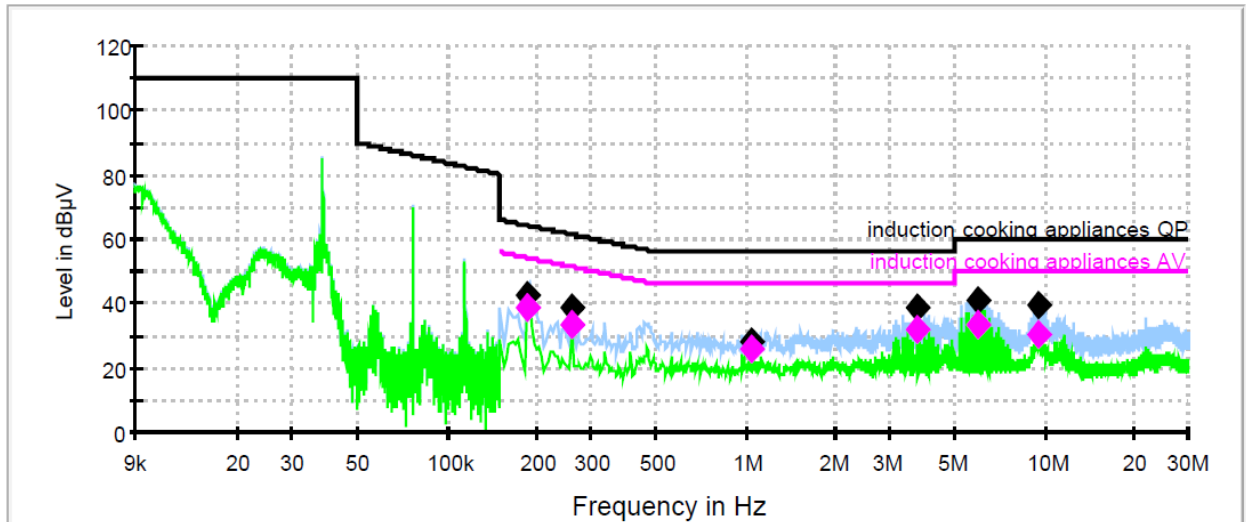

— 55014-1 induction cooking appliances QP — 55014-1 induction cooking appliances AV
— Preview Result 1-PK+ — Preview Result 2-AVG
◆ Final Result 1-QPK ◆ Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.186294	42.5	1000.0	9.000	GND	L1	20.5	21.7	64.2	
0.257858	38.9	1000.0	9.000	GND	L1	20.5	22.6	61.5	
1.034350	28.2	1000.0	9.000	GND	L1	20.6	27.8	56.0	
3.756044	38.5	1000.0	9.000	GND	N	20.7	17.5	56.0	
5.994794	40.9	1000.0	9.000	GND	N	20.8	19.1	60.0	
9.569631	39.3	1000.0	9.000	GND	N	20.7	20.7	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.186294	38.9	1000.0	9.000	GND	L1	20.5	15.3	54.2	
0.257858	33.3	1000.0	9.000	GND	L1	20.5	18.2	51.5	
1.034350	25.5	1000.0	9.000	GND	L1	20.6	20.5	46.0	
3.756044	32.1	1000.0	9.000	GND	N	20.7	13.9	46.0	
5.994794	33.1	1000.0	9.000	GND	N	20.8	16.9	50.0	
9.569631	30.1	1000.0	9.000	GND	N	20.7	19.9	50.0	





Cooking element #3

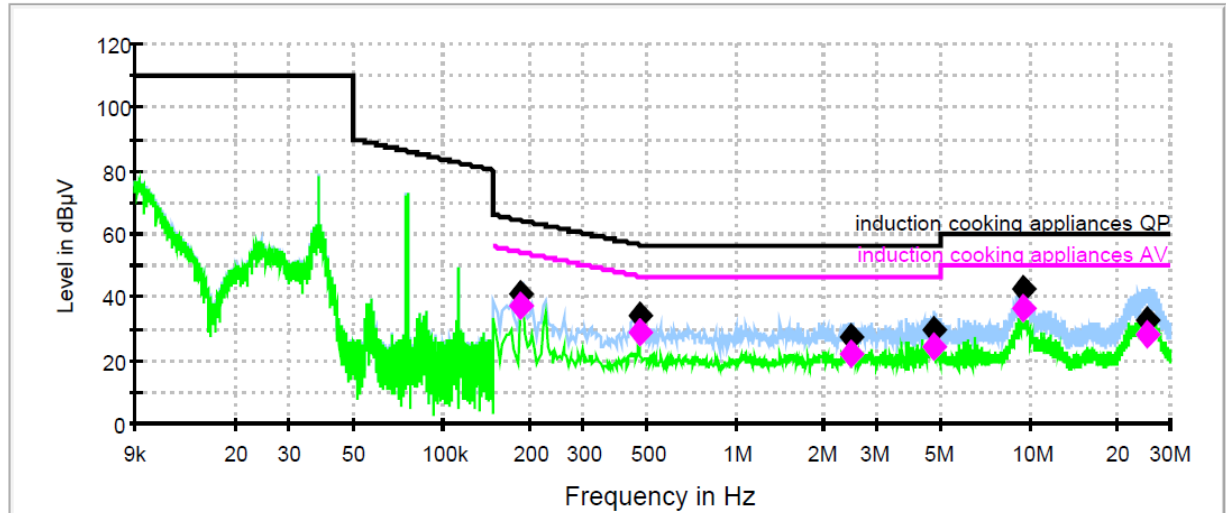

— 55014-1 induction cooking appliances QP — 55014-1 induction cooking appliances AV
— Preview Result 1-PK+ — Preview Result 2-AVG
◆ Final Result 1-QPK ◆ Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.186302	41.3	1000.0	9.000	GND	L1	20.5	22.9	64.2	
0.470425	34.1	1000.0	9.000	GND	L1	20.6	22.4	56.5	
2.453331	27.0	1000.0	9.000	GND	N	20.6	29.0	56.0	
4.681125	30.0	1000.0	9.000	GND	N	20.7	26.0	56.0	
9.517900	42.2	1000.0	9.000	GND	N	20.7	17.8	60.0	
25.075900	32.9	1000.0	9.000	GND	L1	21.3	27.1	60.0	



Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.186302	37.1	1000.0	9.000	GND	L1	20.5	17.1	54.2	
0.470425	28.8	1000.0	9.000	GND	L1	20.6	17.7	46.5	
2.453331	21.8	1000.0	9.000	GND	N	20.6	24.2	46.0	
4.681125	24.3	1000.0	9.000	GND	N	20.7	21.7	46.0	
9.517900	36.6	1000.0	9.000	GND	N	20.7	13.4	50.0	
25.075900	27.9	1000.0	9.000	GND	L1	21.3	22.1	50.0	





Cooking element #4

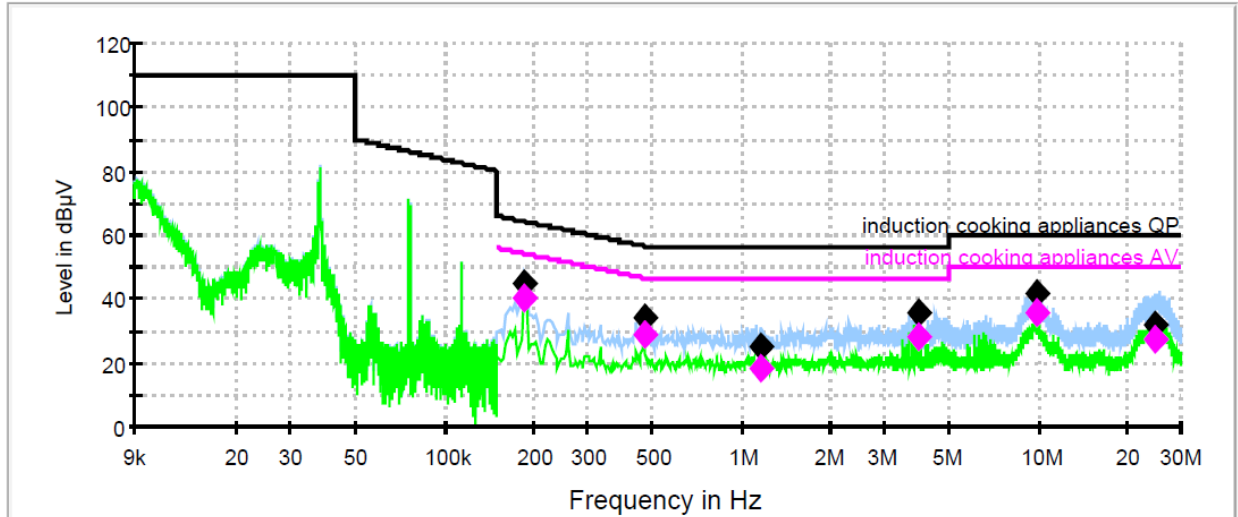

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.184067	44.6	1000.0	9.000	GND	N	20.5	19.7	64.3	
0.470694	34.4	1000.0	9.000	GND	N	20.6	22.1	56.5	
1.151663	25.0	1000.0	9.000	GND	L1	20.6	31.0	56.0	
3.927981	35.6	1000.0	9.000	GND	N	20.7	20.4	56.0	
9.777506	41.4	1000.0	9.000	GND	L1	20.8	18.6	60.0	
24.806325	32.1	1000.0	9.000	GND	L1	21.3	27.9	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.184067	40.6	1000.0	9.000	GND	N	20.5	13.7	54.3	
0.470694	28.9	1000.0	9.000	GND	N	20.6	17.6	46.5	
1.151663	18.4	1000.0	9.000	GND	L1	20.6	27.6	46.0	
3.927981	28.2	1000.0	9.000	GND	N	20.7	17.8	46.0	
9.777506	35.4	1000.0	9.000	GND	L1	20.8	14.6	50.0	
24.806325	27.1	1000.0	9.000	GND	L1	21.3	22.9	50.0	





Cooking element #5

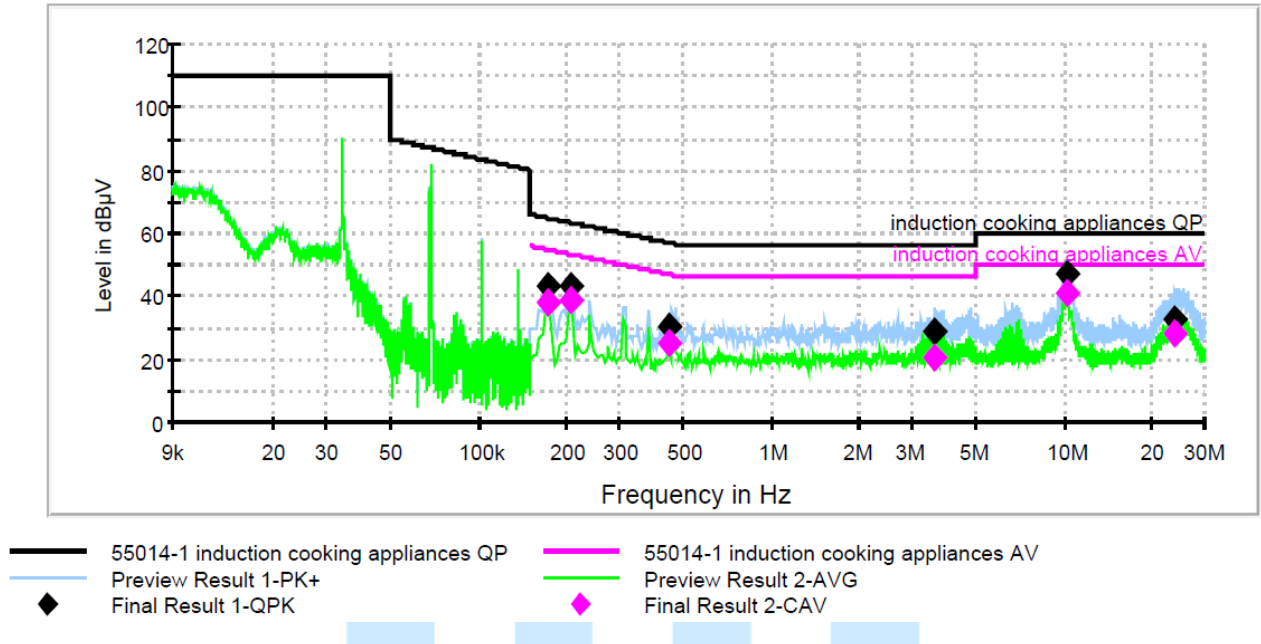

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.172388	43.4	1000.0	9.000	GND	N	20.5	21.5	64.9	
0.205135	43.6	1000.0	9.000	GND	L1	20.5	19.8	63.4	
0.445888	30.1	1000.0	9.000	GND	L1	20.6	26.9	57.0	
3.608675	29.1	1000.0	9.000	GND	L1	20.7	26.9	56.0	
10.160213	47.0	1000.0	9.000	GND	L1	20.8	13.0	60.0	
23.740381	32.9	1000.0	9.000	GND	N	21.1	27.1	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.172388	38.2	1000.0	9.000	GND	N	20.5	16.7	54.9	
0.205135	38.8	1000.0	9.000	GND	L1	20.5	14.6	53.4	
0.445888	25.2	1000.0	9.000	GND	L1	20.6	21.7	47.0	
3.608675	20.7	1000.0	9.000	GND	L1	20.7	25.3	46.0	
10.160213	41.2	1000.0	9.000	GND	L1	20.8	8.8	50.0	
23.740381	27.7	1000.0	9.000	GND	N	21.1	22.3	50.0	





AC 240 V / 60 Hz
Cooking element #1

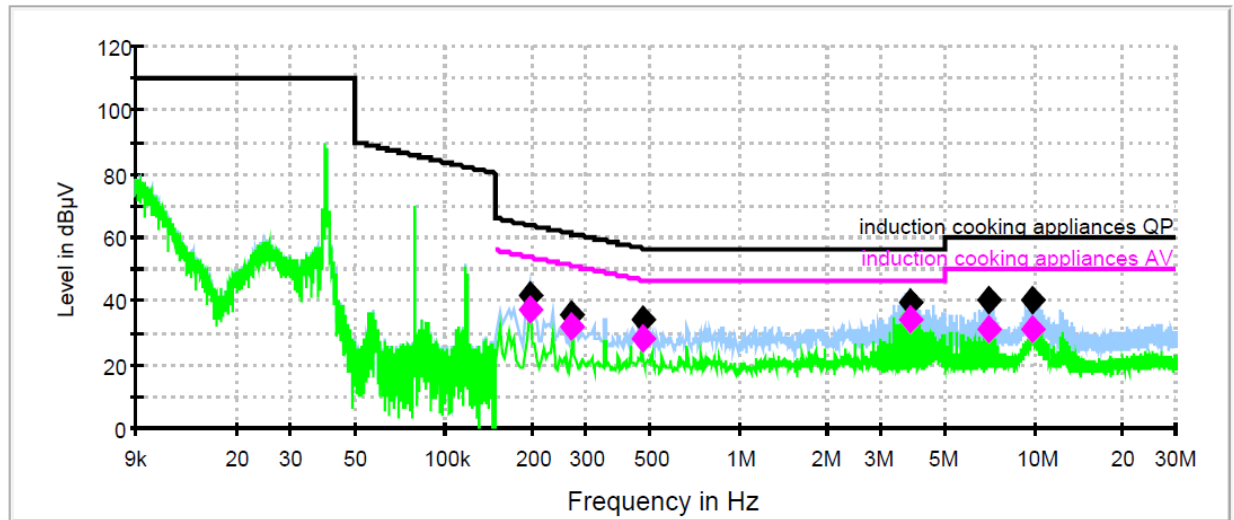

— 55014-1 induction cooking appliances QP — 55014-1 induction cooking appliances AV
— Preview Result 1-PK+ — Preview Result 2-AVG
◆ Final Result 1-QPK ◆ Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.195490	41.5	1000.0	9.000	GND	L1	20.5	22.3	63.8	
0.270584	35.6	1000.0	9.000	GND	L1	20.5	25.5	61.1	
0.469619	34.3	1000.0	9.000	GND	N	20.6	22.2	56.5	
3.798431	39.8	1000.0	9.000	GND	L1	20.7	16.2	56.0	
7.023306	40.0	1000.0	9.000	GND	N	20.8	20.0	60.0	
9.786550	40.6	1000.0	9.000	GND	N	20.7	19.4	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.195490	37.3	1000.0	9.000	GND	L1	20.5	16.5	53.8	
0.270584	31.8	1000.0	9.000	GND	L1	20.5	19.3	51.1	
0.469619	28.4	1000.0	9.000	GND	N	20.6	18.2	46.5	
3.798431	34.2	1000.0	9.000	GND	L1	20.7	11.8	46.0	
7.023306	31.4	1000.0	9.000	GND	N	20.8	18.6	50.0	
9.786550	30.8	1000.0	9.000	GND	N	20.7	19.2	50.0	





Cooking element #2

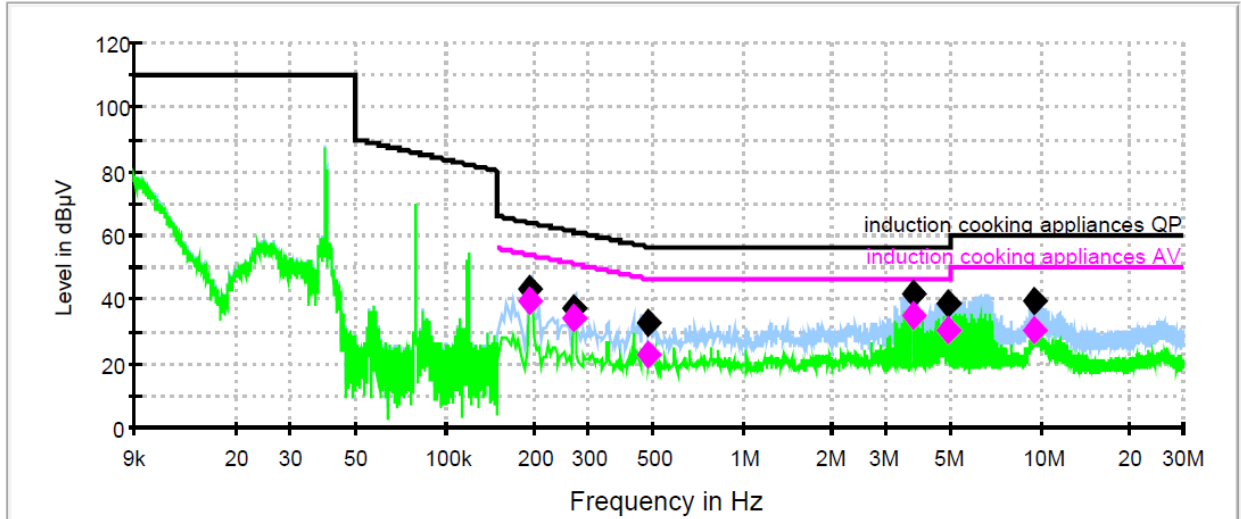

— 55014-1 induction cooking appliances QP — 55014-1 induction cooking appliances AV
— Preview Result 1-PK+ — Preview Result 2-AVG
◆ Final Result 1-QPK ◆ Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.193150	43.6	1000.0	9.000	GND	L1	20.5	20.3	63.9	
0.270584	37.5	1000.0	9.000	GND	L1	20.5	23.6	61.1	
0.478963	32.5	1000.0	9.000	GND	N	20.6	23.8	56.4	
3.708075	41.7	1000.0	9.000	GND	N	20.7	14.3	56.0	
4.867688	38.5	1000.0	9.000	GND	N	20.7	17.5	56.0	
9.553331	39.3	1000.0	9.000	GND	N	20.7	20.7	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.193150	39.7	1000.0	9.000	GND	L1	20.5	14.2	53.9	
0.270584	33.9	1000.0	9.000	GND	L1	20.5	17.2	51.1	
0.478963	22.5	1000.0	9.000	GND	N	20.6	23.9	46.4	
3.708075	35.3	1000.0	9.000	GND	N	20.7	10.7	46.0	
4.867688	30.5	1000.0	9.000	GND	N	20.7	15.5	46.0	
9.553331	30.2	1000.0	9.000	GND	N	20.7	19.8	50.0	





Cooking element #3

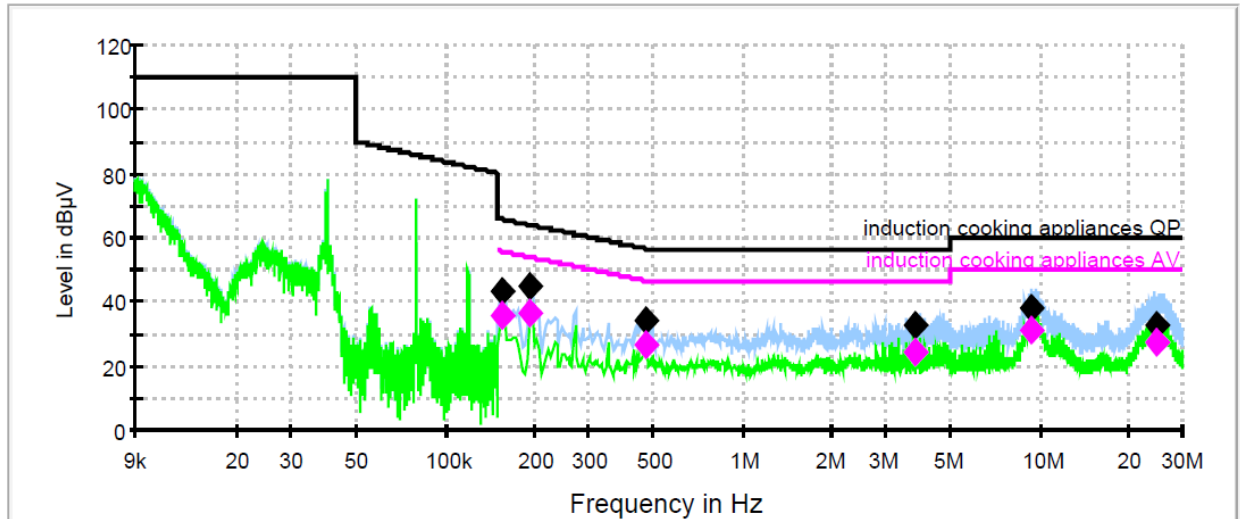

— 55014-1 induction cooking appliances QP — 55014-1 induction cooking appliances AV
— Preview Result 1-PK+ — Preview Result 2-AVG
◆ Final Result 1-QPK ◆ Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.155517	43.5	1000.0	9.000	GND	L1	20.5	22.2	65.7	
0.193150	44.6	1000.0	9.000	GND	L1	20.5	19.3	63.9	
0.474694	34.0	1000.0	9.000	GND	N	20.6	22.4	56.4	
3.793388	32.9	1000.0	9.000	GND	N	20.7	23.1	56.0	
9.355219	38.2	1000.0	9.000	GND	L1	20.8	21.8	60.0	
24.595881	32.8	1000.0	9.000	GND	L1	21.3	27.2	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.155517	36.0	1000.0	9.000	GND	L1	20.5	19.7	55.7	
0.193150	36.4	1000.0	9.000	GND	L1	20.5	17.5	53.9	
0.474694	26.8	1000.0	9.000	GND	N	20.6	19.6	46.4	
3.793388	24.2	1000.0	9.000	GND	N	20.7	21.8	46.0	
9.355219	31.1	1000.0	9.000	GND	L1	20.8	18.9	50.0	
24.595881	27.7	1000.0	9.000	GND	L1	21.3	22.3	50.0	





Cooking element #4

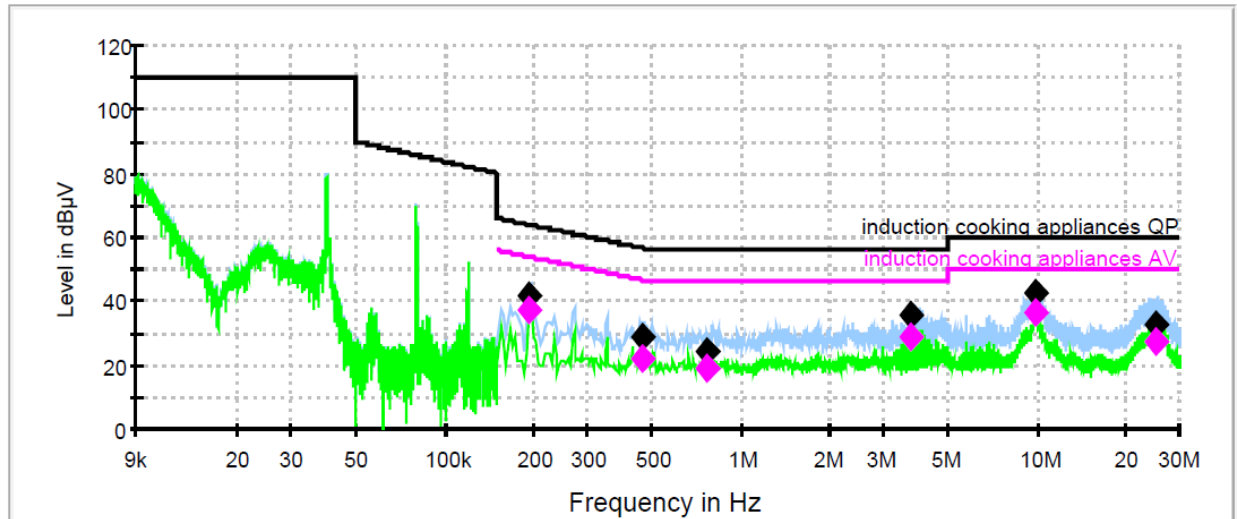

— 55014-1 induction cooking appliances QP — 55014-1 induction cooking appliances AV
— Preview Result 1-PK+ — Preview Result 2-AVG
◆ Final Result 1-QPK ◆ Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.193150	41.7	1000.0	9.000	GND	L1	20.5	22.2	63.9	
0.465155	28.9	1000.0	9.000	GND	N	20.5	27.7	56.6	
0.758238	24.6	1000.0	9.000	GND	L1	20.6	31.4	56.0	
3.718494	35.8	1000.0	9.000	GND	N	20.7	20.2	56.0	
9.819088	42.6	1000.0	9.000	GND	L1	20.8	17.4	60.0	
24.975425	32.6	1000.0	9.000	GND	N	21.1	27.4	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.193150	37.3	1000.0	9.000	GND	L1	20.5	16.6	53.9	
0.465155	21.7	1000.0	9.000	GND	N	20.5	24.9	46.6	
0.758238	19.3	1000.0	9.000	GND	L1	20.6	26.7	46.0	
3.718494	28.9	1000.0	9.000	GND	N	20.7	17.1	46.0	
9.819088	36.1	1000.0	9.000	GND	L1	20.8	13.9	50.0	
24.975425	27.7	1000.0	9.000	GND	N	21.1	22.3	50.0	





Cooking element #5

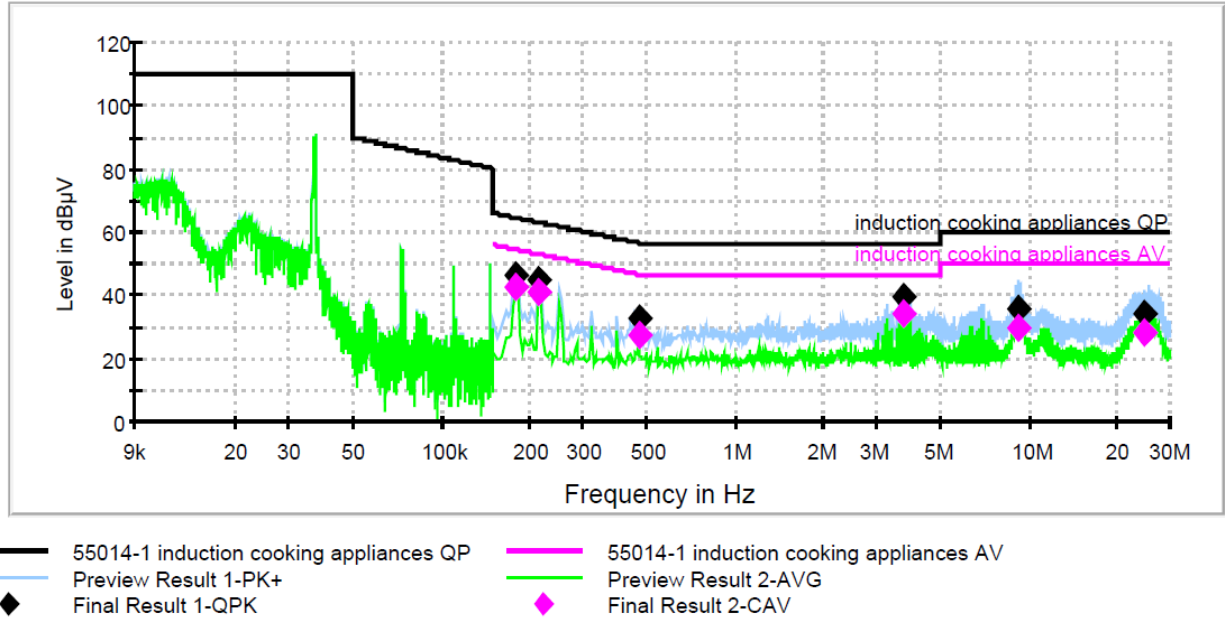

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.179690	46.5	1000.0	9.000	GND	L1	20.5	18.0	64.5	
0.212680	45.2	1000.0	9.000	GND	L1	20.5	17.9	63.1	
0.470156	32.8	1000.0	9.000	GND	L1	20.6	23.7	56.5	
3.749388	39.7	1000.0	9.000	GND	N	20.7	16.3	56.0	
9.187313	35.8	1000.0	9.000	GND	L1	20.8	24.2	60.0	
24.578031	33.8	1000.0	9.000	GND	N	21.1	26.2	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.179690	42.6	1000.0	9.000	GND	L1	20.5	11.9	54.5	
0.212680	41.3	1000.0	9.000	GND	L1	20.5	11.8	53.1	
0.470156	27.6	1000.0	9.000	GND	L1	20.6	18.9	46.5	
3.749388	34.2	1000.0	9.000	GND	N	20.7	11.8	46.0	
9.187313	29.7	1000.0	9.000	GND	L1	20.8	20.3	50.0	
24.578031	28.4	1000.0	9.000	GND	N	21.1	21.6	50.0	





7. Radiated Emission

7.1 Operating Environment

Temperature : 23.1 °C
Relative Humidity : 38.4 % R.H.
Air Pressure : 100.6 kPa

7.2 Test Set-up

The Radiated emission measurements were conducted at the worst test conditions.

The measurements of below 1 GHz were made at 3 m Semi Anechoic Chamber or 10 m Semi Anechoic Chamber (FCC Test Firm Registration No.: 269701) that complies with CISPR 16/ANSI C63.4.

The frequency range of 9 kHz to 30 MHz, The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane. The turntable with EUT was rotated 360° and the receive antenna was fixed 2.0 m on the ground plane.

The frequency range of 30 MHz to 1 000 MHz, The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane. The turntable with EUT was rotated 360° and adjusting the receive antenna height from 1.0 m to 4.0 m. All frequencies were investigated in both horizontal and vertical antenna polarity.

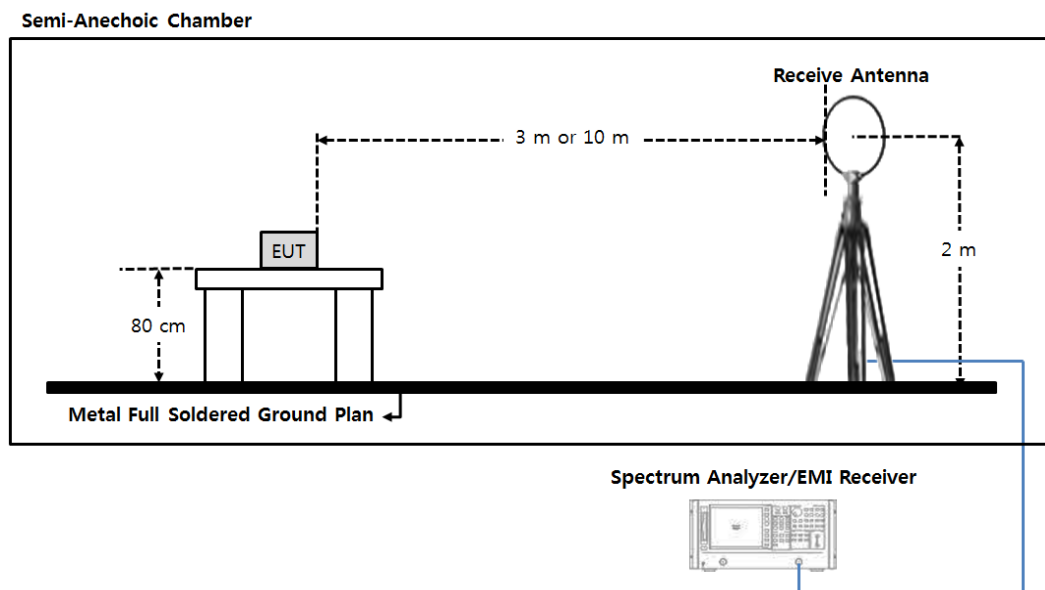


Fig 3. Configurations of Radiated emission test (9 kHz to 30 MHz)



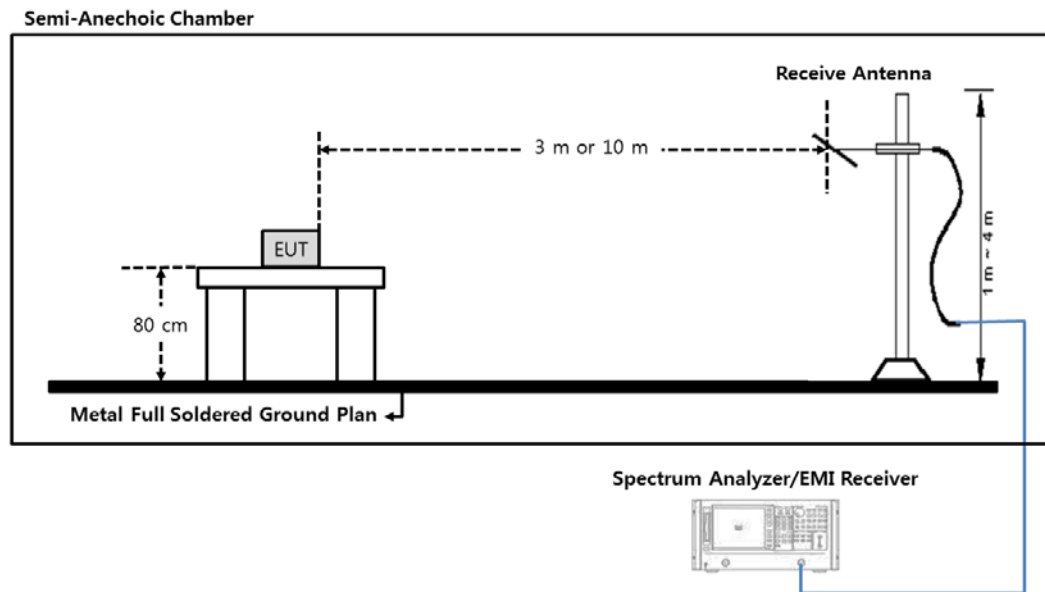


Fig 4. Configurations of Radiated emission test (30 MHz to 1 000 MHz)





7.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test Items(Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	4.72 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	4.72 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	4.79 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	4.79 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 6 000 MHz, 3 m)	5.16 dB	Confidence level of approximately 95 % ($k = 2$)
Test items (3 m Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	5.14 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	5.10 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	6.05 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	5.19 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 GHz ~ 6 GHz, 3 m)	5.20 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (6 GHz ~ 18 GHz, 3 m)	5.20 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (18 GHz ~ 26 GHz, 3 m)	5.53 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results





7.4 Limit

Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (uV/m)	Distance (meters)
Any type unless otherwise specified (miscellaneous)	Any ISM frequency	Below 500 500 or more	25 $25 \times \text{SQRT}(\text{power}/500)$	300 ¹ 300
	Any non-ISM frequency	Below 500 500 or more	15 $15 \times \text{SQRT}(\text{power}/500)$	300 ¹ 300
Industrial heaters and RF stabilized arc welders	On or below 5,725 MHz Above 5,725 MHz	Any Any	10 (²)	1,600 (²)
Medical diathermy	Any ISM frequency Any non-ISM frequency	Any Any	25 15	300 300
Ultrasonic	Below 490 kHz	Below 500 500 or more	$2,400/\text{F}(\text{kHz})$ $2,400/\text{F}(\text{kHz}) \times \text{SQRT}(\text{power}/500)$	300 ³ 300
	490 to 1,600 kHz Above 1,600 kHz	Any Any	$24,000/\text{F}(\text{kHz})$ 15	30 30
Induction cooking ranges	Below 90 kHz On or above 90 kHz	Any Any	1,500 300	⁴30 ⁴ 30

Note.

- 1) Field strength may not exceed 10 $\mu\text{V}/\text{m}$ at 1600 meters. Consumer equipment operating below 1000 MHz is not permitted the increase in field strength otherwise permitted here for power over 500 watts.
- 2) Reduced to the greatest extent possible.
- 3) Field strength may not exceed 10 $\mu\text{V}/\text{m}$ at 1600 meters. Consumer equipment is not permitted the increase in field strength otherwise permitted here for over 500 watts.
- 4) Induction cooking ranges manufactured prior to February 1, 1980, shall be subject to the field strength limits for miscellaneous ISM equipment.

7.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESR7	Rohde & Schwarz	EMI Test Receiver	101382	Apr. 10, 2020
■ - HFH2-Z2	Rohde & Schwarz	Loop ANT	100041	Dec. 19, 2021
■ - CO3000	Innco system GmbH	Position Controller	CO3000/779/330 50314/L	N/A
■ - DT3000	Innco system GmbH	Turntable	1280314	N/A
□ - MA4000-EP	Innco system GmbH	Antenna Mast	4420314	N/A
□ - MA4640-XP-ET	Innco system GmbH	Antenna Mast	MA4640/558	N/A
■ - EMC 32	Rohde & Schwarz	Software	Ver.10.40.10	N/A

All test equipment used is calibrated on a regular basis.





7.6 Test data for Radiated Emission

- Test Date : Mar. 20, 2020
- Measurement Distance : 10 m
- Note : frequency range to be scanned up to 30 MHz, because the frequency band in which the EUT operates less than 1.705 MHz

-. Measurement setting

Frequency range	9 kHz ~ 150 kHz	0.15 MHz ~ 30 MHz
Detector mode	Average	Average
Resolution bandwidth	200 Hz	9 kHz

-. Measurement Data: Induction mode with WLAN [208V, 60 Hz]

Cooking Element #1

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] at 10 m	D.C.F	Field Strength [dBuV/m] at 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.035	Average	H	55.90	19.08	36.82	82.6	63.52	26.7
F	0.037	Average	V	75.49	19.08	56.41			7.11
S	0.075	Average	H	41.65	19.08	22.57			40.95
S	0.111	Average	V	52.28	19.08	33.20			30.32
S	0.172	Average	V	49.96	19.08	30.88			32.64
S	0.301	Average	V	39.30	19.08	20.22			43.3

Cooking Element #2

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] At 10 m	D.C.F	Field Strength [dBuV/m] At 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.035	Average	V	49.04	19.08	29.96	82.6	63.52	33.56
F	0.037	Average	H	78.43	19.08	59.35			4.17
S	0.074	Average	V	40.62	19.08	21.54			41.98
S	0.112	Average	H	53.35	19.08	34.27			29.25
S	0.150	Average	H	47.22	19.08	28.14			35.38
S	0.258	Average	H	42.92	19.08	23.84			39.68





Cooking Element #3

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] At 10 m	D.C.F	Field Strength [dBuV/m] At 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.035	Average	H	55.73	19.08	36.65	82.6	63.52	26.87
F	0.038	Average	H	77.89	19.08	58.81			4.71
S	0.076	Average	H	39.06	19.08	19.98			43.54
S	0.112	Average	V	51.43	19.08	32.35			31.17
S	0.172	Average	H	41.99	19.08	22.91			40.61
S	0.258	Average	H	40.28	19.08	21.20			42.32

Cooking Element #4

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] At 10 m	D.C.F	Field Strength [dBuV/m] At 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.035	Average	H	57.73	19.08	38.65	82.6	63.52	24.87
F	0.037	Average	H	76.79	19.08	57.71			5.81
S	0.074	Average	V	39.98	19.08	20.90			42.62
S	0.113	Average	H	47.25	19.08	28.17			35.35
S	0.172	Average	V	45.22	19.08	26.14			37.38
S	0.215	Average	V	42.11	19.08	23.03			40.49

Cooking Element #5

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] At 10 m	D.C.F	Field Strength [dBuV/m] At 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
F	0.034	Average	H	76.73	19.08	57.65	82.6	63.52	5.87
S	0.068	Average	H	50.91	19.08	31.83			31.69
S	0.102	Average	H	58.23	19.08	39.15			24.37
S	0.138	Average	V	38.99	19.08	19.91			43.61
S	0.172	Average	V	50.49	19.08	31.41			32.11
S	0.215	Average	V	41.22	19.08	22.14			41.38





[240V , 60 Hz]

Cooking Element #1

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] at 10 m	D.C.F	Field Strength [dBuV/m] at 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.035	Average	H	56.66	19.08	37.58	82.6	63.52	25.94
F	0.038	Average	H	74.48	19.08	55.40			8.12
S	0.076	Average	V	42.77	19.08	23.69			39.83
S	0.115	Average	H	51.50	19.08	32.42			31.1
S	0.172	Average	V	44.54	19.08	25.46			38.06
S	0.344	Average	H	45.27	19.08	26.19			37.33

Cooking Element #2

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] at 10 m	D.C.F	Field Strength [dBuV/m] at 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.035	Average	H	56.76	19.08	37.68	82.6	63.52	25.84
F	0.040	Average	V	76.99	19.08	57.91			5.61
S	0.08	Average	H	39.51	19.08	20.43			43.09
S	0.120	Average	V	54.79	19.08	35.71			27.81
S	0.215	Average	V	47.65	19.08	28.57			34.95
S	0.301	Average	V	41.47	19.08	22.39			41.13

Cooking Element #3

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] At 10 m	D.C.F	Field Strength [dBuV/m] At 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.035	Average	H	56.76	19.08	37.68	82.6	63.52	25.84
F	0.040	Average	H	77.59	19.08	58.51			5.01
S	0.080	Average	H	38.41	19.08	19.33			44.19
S	0.120	Average	H	54.03	19.08	34.95			28.57
S	0.215	Average	H	47.65	19.08	28.57			34.95
S	0.258	Average	V	41.89	19.08	22.81			40.71





Cooking Element #4

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] At 10 m	D.C.F	Field Strength [dBuV/m] At 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.035	Average	V	56.64	19.08	37.56	82.6	63.52	25.96
F	0.039	Average	H	76.73	19.08	57.65			5.87
S	0.078	Average	H	38.37	19.08	19.29			44.23
S	0.117	Average	H	52.81	19.08	33.73			29.79
S	0.215	Average	H	46.80	19.08	27.72			35.8
S	0.301	Average	H	46.15	19.08	27.07			36.45

Cooking Element #5

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] At 10 m	D.C.F	Field Strength [dBuV/m] At 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
F	0.037	Average	H	76.25	19.08	57.17	82.6	63.52	6.35
S	0.074	Average	H	45.68	19.08	26.60			36.92
S	0.111	Average	H	50.62	19.08	31.54			31.98
S	0.115	Average	H	51.55	19.08	32.47			31.05
S	0.172	Average	V	49.25	19.08	30.17			33.35
S	0.258	Average	H	44.24	19.08	25.16			38.36

Note.1 The worst case data were reported

And no other spurious and harmonic emissions were reported greater than listed emission above table

Note.2 “F”=Fundamental / “S”=Spurious / “*” = Noise Floor

Note.3 All measurements were recorded using a spectrum analyzer employing a Average detector for below 30 MHz

Note.4 Distance Correction Factor (D.C.F.)

For 30 m: $40\log(30/10) = 19.08$ dB

Note.5 Sample calculation

Field Strength = Reading – D.C.F

Margin = Limit – Field Strength

Where, D.C.F = Distance Correction Factor

Note.6 “V1”= Vertical and perpendicular to the centerline / “V2”=vertical and parallel to the centerline

“H” = horizontal (parallel to the ground)

Note.7 cooking element “1”= front left hob ,”2”= rear left hob, “3”=front right hob, “4”= rear right hob, “5”=center hob





8. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

8.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV = 48 dB μV
Reading	= 39.2 dB μV
10 ^(39.2dBμV/20)	= 91.2 μV
Margin	= 48 dB μV - 39.2 dB μV
	= 8.8 dB

8.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$
Reading	= 31.0 dB μV
Antenna Factor + Cable Loss	= 5.8 dB
Total	= 36.8 dB $\mu\text{V}/\text{m}$
Margin	= 40.0 dB $\mu\text{V}/\text{m}$ - 36.8 dB $\mu\text{V}/\text{m}$
	= 3.2 dB

9. Recommendation & Conclusion

The data collected shows that the **LG Electronics USA. HOUSEHOLD COOKTOP (Model Name: SKSIT3601G)** was complies with §18.305 and 18.307 of the FCC Rules.

- The end -

