 RESEARCH IN MOTION	Document		Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN		1(25)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

SAR Compliance Test Report

Testing Lab:	Research In Motion Limited 305 Phillip Street Waterloo, Ontario Canada N2L 3W8 Phone: 519-888-7465 Fax: 519-880-8173 Web site: www.rim.net	Applicant:	Research In Motion Limited 295 Phillip Street Waterloo, Ontario Canada N2L 3W8 Phone: 519-888-7465 Fax: 519-888-6906 Web site: www.rim.net
---------------------	--	-------------------	--

Statement of Compliance: Research In Motion Limited, declares under its sole responsibility that the product to which this declaration relates, is in conformity with the appropriate RF exposure standards, recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(none)

Device Category: This wireless handheld is a portable device, designed to be used in direct contact with the user's head, hand and to be carried in approved accessories when carried on the user's body.

RF exposure environment: This wireless portable device has been shown to be in compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in OET Bulletin 65 Supplement C (Edition 01-01), FCC 96-326, IEEE Std. C95.1-1999, Health Canada's Safety Code 6, and reproduced in RSS-102 and has been tested in accordance with the measurement procedures specified in OET Bulletin 65 Supplement C (Edition 01-01), ANSI/IEEE Std. C95.3-1991, IEEE 1528-2003 and Health Canada's Safety Code 6.

Approved by:

Signatures

Date

Paul G. Cardinal, Ph.D.
Manager, Compliance & Certification




Nov. 11, 2004

Tested and documented by:
Daoud Attayi
Compliance Specialist




Nov. 05, 2004

 RESEARCH IN MOTION	Document		Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN		2(25)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

CONTENTS

GENERAL INFORMATION	1
1.0 OPERATING CONFIGURATIONS AND TEST CONDITIONS	4
1.1 PICTURE OF HANDHELD	4
1.2 ANTENNA DESCRIPTION	4
1.3 HANDHELD DESCRIPTION	4
1.4 BODY WORN ACCESSORIES	5
1.5 HEADSETS	6
1.6 BATTERIES	6
1.7 PROCEDURE USED TO ESTABLISHING THE TEST SIGNAL	6
2.0 DESCRIPTION OF THE TEST EQUIPMENT	6
2.1 SAR MEASUREMENT SYSTEM	6
2.2 DESCRIPTION OF THE TEST SETUP	8
2.2.1 HANDHELD AND BASE STATION SIMULATOR	8
2.2.2 DASY SETUP	8
3.0 ELECTRIC FIELD PROBE CALIBRATION	8
3.1 PROBE SPECIFICATION	8
3.2 PROBE CALIBRATION AND MEASUREMENT ERROR	9
4.0 SAR MEASUREMENT SYSTEM VERIFICATION	9
4.1 SYSTEM ACCURACY VERIFICATION for Head Adjacent Use	9
5.0 PHANTOM DESCRIPTION	10
6.0 TISSUE DIELECTRIC PROPERTY	11
6.1 COMPOSITION OF TISSUE SIMULANT	11
6.1.1 EQUIPMENT	11
6.1.2 PREPARATION PROCEDURE	11
6.2 ELECTRICAL PARAMETERS OF THE TISSUE SIMULATING LIQUID	12
6.2.1 EQUIPMENT	12
6.2.2 TEST CONFIGURATION	13
6.2.3 TEST PROCEDURE	13
7.0 SAR SAFETY LIMITS	16
8.0 DEVICE POSITIONING	17
8.1 DEVICE HOLDER	17
8.2 DESCRIPTION OF TEST POSITION	18
8.2.1 TEST POSITION OF DEVICE RELATIVE TO HEAD	18
8.2.1.1 DEFINITION OF THE "CHEEK" POSITION	19
8.2.1.2 DEFINITION OF THE "TILTED" POSITION	20
8.2.2 BODY-WORN TEST CONFIGURATION	20

 RESEARCH IN MOTION	Document		Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN		3(25)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

9.0 HIGH LEVEL EVALUATION	21
9.1 MAXIMUM SEARCH	21
9.2 EXTRAPOLATION	
9.3 BOUNDARY CORRECTION	21
9.4 PEAK SEARCH FOR 1G AND 10G AVERAGED SAR	21
10.0 MEASUREMENT UNCERTAINTIES	22
11.0 SAR TEST RESULTS	23
11.1 HEAD CONFIGURATION	23
11.2 BODY-WORN CONFIGURATION USING HOLSTERS	23
12.0 REFERENCES	24

APPENDIX A: SAR DISTRIBUTION COMPARISON FOR THE ACCURACY VERIFICATION
APPENDIX B: SAR DISTRIBUTION PLOTS FOR HEAD CONFIGURATION
APPENDIX C: SAR DISTRIBUTION PLOTS FOR BODY-WORN CONFIGURATION
APPENDIX D: PROBE & DIPOLE CALIBRATION DATA
APPENDIX E: SAR TEST SETUP PHOTOGRAPHS

1.0 OPERATING CONFIGURATIONS AND TEST CONDITIONS

1.1 Picture of Handheld Audio output

Headset Jack



Voice microphone

Figure 1. BlackBerry Wireless Handheld

1.2 Antenna description


Type	Internal fixed antenna
Location	Back top centre section
Configuration	Internal fixed antenna

Table 1. Antenna description

1.3 Handheld description

Handheld Model	RAR20CN		
FCC ID	L6ARAR20CN		
Serial Number	P1 R5B F53		
Prototype or Production Unit	Pre-production		
Mode(s) of Operation	Cellular CDMA	PCS CDMA	Bluetooth
Maximum conducted RF Output Power	24.50 dBm	23.50 dBm	3.5 dBm
Tolerance in Power Setting on centre channel	± 0.50 dB	± 0.50 dB	N/A
Duty Cycle	1:1	1:1	N/A
Transmitting Frequency Range (MHz)	824.70-848.31 MHz	1851.25-1908.75 MHz	2402-2483

Table 2. Test device description

 RESEARCH IN MOTION	Document		Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN		5(25)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

1.3 Body worn accessories


Holsters

The BlackBerry Wireless Handheld has been tested with the following holsters which all contain metal components and the separation distance between the handheld and the user's body is listed in the table below. All of the holsters are designed with the intended handheld orientation being with the LCD facing the belt clip. Proper positioning is vital for protection of the LCD display, and to help maximize the battery life of the handheld.

Holster Type	Model / Part Number	Separation (mm)
Ruggedized	HDW-08617-XXX	18
Leather Swivel	HDW-07386-001	17
Plastic Swivel	ASY-06669-001	15
Horizontal Foam	HDW-06619-XXX	14
Vertical Foam	HDW-06620-XXX	14



Figure 2. Body-worn holsters

 RESEARCH IN MOTION	Document		Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN		6(25)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

1.5 Headsets

The Blackberry Wireless Handheld was tested with and without headset model number HDW-03458-001. The SAR values are shown in the Table 16.

1.6 Batteries

The Blackberry Wireless Handheld was tested with the following Lithium Ion Batteries:

- 1) GS Melcotec battery pack P/N: BAT-03087-003
- 2) Sanyo battery pack P/N: BAT-03487-002
- 3) Sanyo GS higher capacity battery pack P/N: BAT-06532-001

1.7 Procedure used to establish the test signal

The Handheld was put into test mode for the SAR measurements by enabling a call via a Rohde & Schwartz CMU 200 Base Station Simulator test instrument. The CMU 200 communications test instrument then sent out a command for the Handheld to transmit at full power at the specified frequency.

A second CMU 200 was used to connect to the Bluetooth band and set to transmit at maximum power. Worst case SAR was measured with GSM and Bluetooth bands ON simultaneously.


2.0 DESCRIPTION OF THE TEST EQUIPMENT

2.1 SAR measurement system

SAR measurements were performed using a Dosimetric Assessment System (DASY 4), an automated SAR measurement system manufactured by Schmid & Partner Engineering AG (SPEAG), of Zurich, Switzerland.

The DASY 4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software.
- An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A DAE module which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the Electro-optical coupler (EOC).
- A unit to operate the optical surface detector which is connected to the EOC.
- The EOC performs the conversion from an optical signal into the digital electric signal of the DAE. The EOC is connected to the PC plug-in card.
- The functions of the PC plug-in card based on a DSP is to perform the time critical tasks such as signal filtering, surveillance of the robot operation fast movement interrupts.
- A computer operating Windows 2000.
- DASY 4 software version 4.3.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.

 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN			8(25)
Author Data	Dates of Test	Test Report No	FCC ID:	
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN	

2.2 Description of the test setup

Before a SAR test is conducted the Handheld and the DASY equipment are setup as follows:

2.2.1 Handheld and base station simulator setup

- Power up the Handheld.
- Turn on the CMU 200 test set and set the carrier frequency and power to the appropriate values.
- Connect an antenna to the RF IN/OUT of the communication test set and place it close to the Handheld.


2.2.2 DASY setup

- Turn the computer on and log on to Windows 200.
- Start DASY 4 software by clicking on the icon located on the Windows desktop. Once the software loads, click on the Change to Robot toolbar button to open the State and Robot Monitoring Windows.
- Once the DASY State dialog opens you can ignore all errors and click OK to open the Robot Monitoring window.
- Mount the DAE unit and the probe. Turn on the DAE unit.
- Turn the Robot Controller on by turning the main power switch to the horizontal position
- Align the probe and click the align probe in the light beam button to correct the probe offset.
- Open a program and configure it to the proper parameters
- Establish a connection between the Handheld and the communications test instrument. Place the Handheld on the stand and adjust it under the phantom.
- Start SAR measurements.

3.0 ELECTRIC FIELD PROBE CALIBRATION

3.1 Probe Specification

SAR measurements were conducted using the dosimetric probe ET3DV6, designed by Schmid & Partner Engineering AG for the measurement of SAR. The probe is constructed using the thin film technique, with printed resistive lines on ceramic substrates. It has a symmetrical design with triangular core, built-in optical fiber for the surface detection system and built-in shielding against static discharge. The probe is sensitive to E-fields and thus incorporates three small dipoles arranged so that the overall response is close to isotropic. The table below summarizes the technical data for the probe.

 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN			9(25)
Author Data	Dates of Test	Test Report No	FCC ID:	
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN	

Property	Data
Frequency range	30 MHz – 3 GHz
Linearity	± 0.1 dB
Directivity (rotation around probe axis)	$\leq \pm 0.2$ dB
Directivity (rotation normal to probe axis)	± 0.4 dB
Dynamic Range	5 mW/kg – 100 W/kg
Probe positioning repeatability	± 0.2 mm
Spatial resolution	< 0.125 mm ³

Table 4. Probe specification

3.2 Probe calibration and measurement errors

The probe was calibrated on 21/04/2004 with an accuracy better than $\pm 10\%$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe were tested. The probe calibration parameters are shown on Appendix D.


4.0 SAR MEASUREMENT SYSTEM VERIFICATION

Prior to conducting SAR evaluation, the measurements were validated using the dipole validation kit and a flat phantom. A power level of 1.0 W was applied to the dipole antenna. The verification results are in the table below with a comparison to reference values. Printouts are shown in Appendix A. All the measured parameters are satisfactory.

4.1 System accuracy verification for Head Adjacent use

f (MHz)	Limits / Measured	SAR (W/kg) 1 g/ 10 g	Dielectric Parameters		Liquid Temp (°C)
			ϵ_r	σ [S/m]	
835	Measured	9.7 / 6.4	44.7	0.94	22.5
	Recommended Limits	9.6 / 6.2	43.3	0.91	N/A
1900	Measured	39.4 / 20.5	39.4	1.40	22.1
	Recommended Limits	41.2 / 21.3	40.2	1.46	N/A

Table 5. System accuracy (Validation for Head Adjacent use)

 RESEARCH IN MOTION	Document		Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN		10(25)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

5.0 PHANTOM DESCRIPTION

The SAM Twin Phantom, manufactured by SPEAG, was used during the SAR measurements. The phantom is made of a fiberglass shell integrated with a wooden table.

The SAM Twin Phantom is a fiberglass shell phantom with 2 mm shell thickness. It has three measurement areas:

- Left hand
- Right hand
- Flat phantom

The phantom table dimensions are: 100x50x85 cm (LxWxH). The table is intended for use with free standing robots.


The bottom shelf contains three pair of bolts for locking the device holder in place. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different solutions).

A white cover is provided to top the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on the cover are possible; however the optical surface detector does not work properly at the cover surface. Place a sheet of white paper on the cover when using optical surface detection.

Liquid depth of ≥ 15 cm is maintained in the phantom for all the measurement.



Figure 4
SAM Twin Phantom

 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN			11(25)
Author Data	Dates of Test	Test Report No	FCC ID:	
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN	

6.0 TISSUE DIELECTRIC PROPERTY

6.1 Composition of tissue simulant

The composition of the brain and muscle simulating liquids for 800-900 MHz and 1800-1900 MHz are shown in the table below.

INGREDIENT	MIXTURE 800–900MHz		MIXTURE 1800–1900MHz	
	Brain %	Muscle %	Brain %	Muscle %
Water	51.07	65.45	54.88	69.91
Sugar	47.31	34.31	0	0
Salt	1.15	0.62	0.21	0.13
HEC	0.23	0	0	0
Bactericide	0.24	0.10	0	0
DGBE	0	0	44.91	29.96

Table 6. Tissue simulant recipe

6.1.1 Equipment


Manufacturer	Test Equipment	Model Number	Serial Number	Cal. Due Date
Pyrex, England	Graduated Cylinder	N/A	N/A	N/A
Pyrex, USA	Beaker	N/A	N/A	N/A
Acculab	Weight Scale	V1-1200	018WB2003	N/A
Hart Scientific	Digital Thermometer	61161-302	21352860	09/10/2005
IKA Works Inc.	Hot Plate	RC Basic	3.107433	N/A

Table 7. Tissue simulant preparation equipment

6.1.2 Preparation procedure

800-900 MHz liquids

- Fill the container with **water**. Begin heating and stirring.
- Add the **Cellulose**, the **preservative substance** and the **salt**. After several hours, the liquid will become more transparent again. The container must be covered to prevent evaporation.
- Add **Sugar**. Stir it well until the sugar is sufficiently dissolved.
- Keep the liquid hot but below the boiling point for at least an hour. The container must be covered to prevent evaporation.
- Remove the container from, and turn the hotplate off and allow the liquid to cool off to room temperature prior to performing dielectric measurements.

 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN			12(25)
Author Data	Dates of Test	Test Report No	FCC ID:	
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN	

1800-1900 MHz liquid

- Fill the container with **water**. Begin heating and stirring.
- Add the **salt** and **Glycol**. The container must be covered to prevent evaporation.
- Keep the liquid hot but below the boiling point for at least an hour. The container must be covered to prevent evaporation.
- Remove the container from, and turn the hotplate off and allow the liquid to cool off to room temperature prior to performing dielectric measurements.

6.2 Electrical parameters of the tissue simulating liquid

The tissue dielectric parameters shall be measured before a batch can be used for SAR measurements to ensure that the simulated tissue was properly made and will simulate the desired human characteristic. Limits and measured electrical parameters are show in the table below.

Recommended limits are adopted from IEEE P1528- 2003:

“ Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, SPEAG dipole calibration certificates and from FCC Tissue Dielectric Properties web page at <http://www.fcc.gov/fcc-bin/dielec.sh>


f (MHz)	Tissue Type	Limits / Measured	Dielectric Parameters		Liquid Temp (°C)
			ϵ_r	σ [S/m]	
835	Head	Measured	44.7	0.94	22.5
		Recommended Limits	43.3	0.91	N/A
	Muscle	Measured	52.3	1.03	22.4
		Recommended Limits	55.2	0.97	N/A
1900	Head	Measured	39.4	1.40	22.1
		Recommended Limits	40.0	1.46	N/A
	Muscle	Measured	51.5	1.54	21.6
		Recommended Limits	53.3	1.52	N/A

Table 8. Electrical parameters of tissue simulating liquid

6.2.1 Equipment

Manufacturer	Test Equipment	Model Number	Serial Number	Cal. Due Date
Agilent Technologies	Network Analyzer	8753ES	US39174857	27/07/2005
Agilent Technologies	Dielectric probe kit	HP 85070C	US9936135	CNR
Dell	PC using GPIB card	GX110	347	N/A
Hart Scientific	Digital Thermometer	61161-302	21352860	09/10/2005

Table 9. Equipment required for electrical parameter measurements

 RESEARCH IN MOTION	Document		Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN		13(25)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

6.2.2 Test Configuration

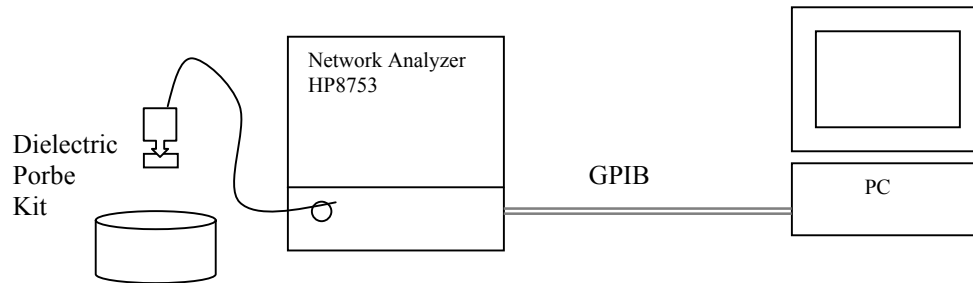


Figure 5: Test configuration

6.2.3 Procedure


1. Turn NWA on and allow at least 30 minutes for warm up.
2. Mount dielectric probe kit so that interconnecting cable to NWA will not be moved during measurements or calibration.
3. Pour de-ionized water and measure water temperature ($\pm 1^\circ$).
4. Set water temperature in HP-Software (Calibration Setup).
5. Perform calibration.
6. Validate calibration with dielectric material of known properties (e.g. polished ceramic slab with $>8\text{mm}$ thickness $\epsilon' = 10.0$, $\epsilon'' = 0.0$). If measured parameters do not fit within tolerance, repeat calibration (± 0.2 for ϵ' ; ± 0.1 for ϵ'').
7. Relative permittivity $\epsilon_r = \epsilon'$ and conductivity can be calculated from ϵ''

$$\sigma = \omega \epsilon_0 \epsilon''$$
8. Measure liquid shortly after calibration.
9. Stir the liquid to be measured. Take a sample ($\sim 50\text{ml}$) with a syringe from the center of the liquid container.
10. Pour the liquid into a small glass flask. Hold the syringe at the bottom of the flask to avoid air bubbles.
11. Put the dielectric probe in the glass flask. Check that there are no air bubbles in front of the opening in the dielectric probe kit.
12. Perform measurements.
13. Adjust medium parameters in DASY 4 for the frequencies necessary for the measurements ('Setup Config', select medium (e.g. Brain 900 MHz) and press 'Option'-button.
14. Select the current medium for the frequency of the validation (e.g. Setup Medium Brain 900 MHz).

Sample calculation for 835 MHz head tissue dielectric parameters using data from Table 10.


Relative permittivity $\epsilon_r = \epsilon' = 44.7$

Conductivity $\sigma = \omega \epsilon_0 \epsilon'' = 2 \times 3.1416 \times 835 \times 10^6 \times 8.854 \times 10^{-12} \times 20.27 = 0.94 \text{ S/m}$

 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN			14(25)
Author Data Daoud Attayi	Dates of Test Oct. 22 – Nov. 04, 2004	Test Report No RIM-0110-0411-01	FCC ID: L6ARAR20CN	

Title			Title		
SubTitle			SubTitle		
October 22, 2004 02:17 PM			October 26, 2004 10:19 AM		
Frequency	e'	e''	Frequency	e'	e''
800.000000 MHz	45.0678	20.2682	800.000000 MHz	52.7544	22.3411
801.000000 MHz	45.0763	20.2955	801.000000 MHz	52.7378	22.3076
802.000000 MHz	45.0507	20.2997	802.000000 MHz	52.7080	22.3185
803.000000 MHz	45.0621	20.2985	803.000000 MHz	52.7224	22.3257
804.000000 MHz	45.0431	20.3063	804.000000 MHz	52.6873	22.3043
805.000000 MHz	45.0370	20.2828	805.000000 MHz	52.6661	22.3066
806.000000 MHz	45.0412	20.2947	806.000000 MHz	52.6604	22.3207
807.000000 MHz	45.0310	20.2944	807.000000 MHz	52.6355	22.2790
808.000000 MHz	45.0113	20.2804	808.000000 MHz	52.6145	22.2813
809.000000 MHz	45.0091	20.2887	809.000000 MHz	52.5610	22.2382
810.000000 MHz	45.0135	20.3005	810.000000 MHz	52.5946	22.2840
811.000000 MHz	44.9813	20.3176	811.000000 MHz	52.5634	22.2560
812.000000 MHz	44.9703	20.2957	812.000000 MHz	52.5523	22.2211
813.000000 MHz	44.9852	20.3425	813.000000 MHz	52.5049	22.2439
814.000000 MHz	44.9799	20.3026	814.000000 MHz	52.5174	22.1955
815.000000 MHz	44.9584	20.3002	815.000000 MHz	52.4868	22.2013
816.000000 MHz	44.9550	20.3033	816.000000 MHz	52.4695	22.1968
817.000000 MHz	44.9352	20.3059	817.000000 MHz	52.4813	22.2273
818.000000 MHz	44.9468	20.3045	818.000000 MHz	52.4670	22.1826
819.000000 MHz	44.9291	20.2956	819.000000 MHz	52.4601	22.1915
820.000000 MHz	44.8945	20.3026	820.000000 MHz	52.4094	22.1707
821.000000 MHz	44.8997	20.2978	821.000000 MHz	52.4358	22.1624
822.000000 MHz	44.9148	20.2899	822.000000 MHz	52.4254	22.1446
823.000000 MHz	44.9017	20.2959	823.000000 MHz	52.4253	22.1566
824.000000 MHz	44.8846	20.3247	824.000000 MHz	52.3819	22.1559
825.000000 MHz	44.8796	20.2852	825.000000 MHz	52.3917	22.1478
826.000000 MHz	44.8735	20.2783	826.000000 MHz	52.3717	22.1501
827.000000 MHz	44.8536	20.2971	827.000000 MHz	52.3582	22.1390
828.000000 MHz	44.8447	20.2803	828.000000 MHz	52.3250	22.1348
829.000000 MHz	44.8220	20.2892	829.000000 MHz	52.3284	22.1401
830.000000 MHz	44.8131	20.2725	830.000000 MHz	52.3284	22.1354
831.000000 MHz	44.7974	20.2686	831.000000 MHz	52.3447	22.1139
832.000000 MHz	44.7945	20.2716	832.000000 MHz	52.2758	22.1335
833.000000 MHz	44.7887	20.2647	833.000000 MHz	52.2985	22.0987
834.000000 MHz	44.7476	20.2471	834.000000 MHz	52.2888	22.0975
835.000000 MHz	44.7409	20.2726	835.000000 MHz	52.2699	22.1326
836.000000 MHz	44.7264	20.2364	836.000000 MHz	52.2499	22.1020
837.000000 MHz	44.7432	20.2335	837.000000 MHz	52.2363	22.0581
838.000000 MHz	44.6917	20.2511	838.000000 MHz	52.2169	22.0603
839.000000 MHz	44.7280	20.2422	839.000000 MHz	52.2339	22.0717
840.000000 MHz	44.6797	20.2696	840.000000 MHz	52.1946	22.0481

Table 10. 835 MHz head and muscle tissue dielectric parameters

 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN			15(25)
Author Data Daoud Attayi	Dates of Test Oct. 22 – Nov. 04, 2004	Test Report No RIM-0110-0411-01	FCC ID: L6ARAR20CN	

Title

SubTitle

October 28, 2004 10:44 AM


Title

SubTitle

October 28, 2004 03:44 PM

Frequency	e'	e''	Frequency	e'	e''
1.700000000 GHz	40.4675	12.3867	1.700000000 GHz	52.0862	13.6963
1.710000000 GHz	40.4216	12.4506	1.710000000 GHz	52.0537	13.7342
1.720000000 GHz	40.3770	12.4825	1.720000000 GHz	52.0313	13.7641
1.730000000 GHz	40.3194	12.5160	1.730000000 GHz	52.0140	13.7755
1.740000000 GHz	40.2665	12.5652	1.740000000 GHz	51.9871	13.8305
1.750000000 GHz	40.2221	12.6002	1.750000000 GHz	51.9683	13.8574
1.760000000 GHz	40.1572	12.6598	1.760000000 GHz	51.9456	13.8946
1.770000000 GHz	40.1119	12.6985	1.770000000 GHz	51.9234	13.9387
1.780000000 GHz	40.0448	12.7290	1.780000000 GHz	51.9021	13.9856
1.790000000 GHz	39.9939	12.7834	1.790000000 GHz	51.8877	14.0339
1.800000000 GHz	39.9538	12.8282	1.800000000 GHz	51.8566	14.0853
1.810000000 GHz	39.8890	12.8700	1.810000000 GHz	51.8303	14.1186
1.820000000 GHz	39.8454	12.9140	1.820000000 GHz	51.8009	14.1797
1.830000000 GHz	39.8000	12.9531	1.830000000 GHz	51.7777	14.2285
1.840000000 GHz	39.7420	13.0031	1.840000000 GHz	51.7283	14.2819
1.850000000 GHz	39.6765	13.0580	1.850000000 GHz	51.6840	14.3385
1.860000000 GHz	39.6079	13.1149	1.860000000 GHz	51.6560	14.3990
1.870000000 GHz	39.5661	13.1551	1.870000000 GHz	51.6167	14.4483
1.880000000 GHz	39.5057	13.2012	1.880000000 GHz	51.5818	14.5082
1.890000000 GHz	39.4351	13.2570	1.890000000 GHz	51.5148	14.5575
1.900000000 GHz	39.3843	13.2855	1.900000000 GHz	51.4805	14.5890
1.910000000 GHz	39.3307	13.3308	1.910000000 GHz	51.4426	14.6384
1.920000000 GHz	39.2771	13.3556	1.920000000 GHz	51.4064	14.6794

Table 11. 1900 MHz head and muscle tissue dielectric parameters

 RESEARCH IN MOTION	Document		Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN		16(25)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

7.0 SAR SAFETY LIMITS

Standards/Guideline	Localized SAR Limit (W/kg) General public (uncontrolled)	Localized SAR Limits (W/kg) Workers (controlled)
ICNIRP (1998) Standard	2.0 (10g)	10.0 (10g)
IEEE C95.1 (1999) Standard	1.6 (1g)	8.0 (1g)


Table 12. SAR safety limits for Controlled / Uncontrolled environment

Human Exposure	Localized SAR Limits (W/kg) 10g, ICNIRP (1998) Standard	Localized SAR Limits (W/kg) 1g, IEEE C95.1 (1999) Standard
Spatial Average (averaged over the whole body)	0.08	0.08
Spatial Peak (averaged over any X g of tissue)	2.00	1.60
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.00	4.00 (10g)

Table 13. SAR safety limits

Uncontrolled Environments are defined as locations where there is exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

 RESEARCH IN MOTION	Document		Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN		17(25)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

8.0 DEVICE POSITIONING

8.1 Device holder for SAM Twin Phantom

The Handheld was positioned for all test configurations using the DASY 4 holder. The device holder facilitates the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately and with repeatability positioned according to FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

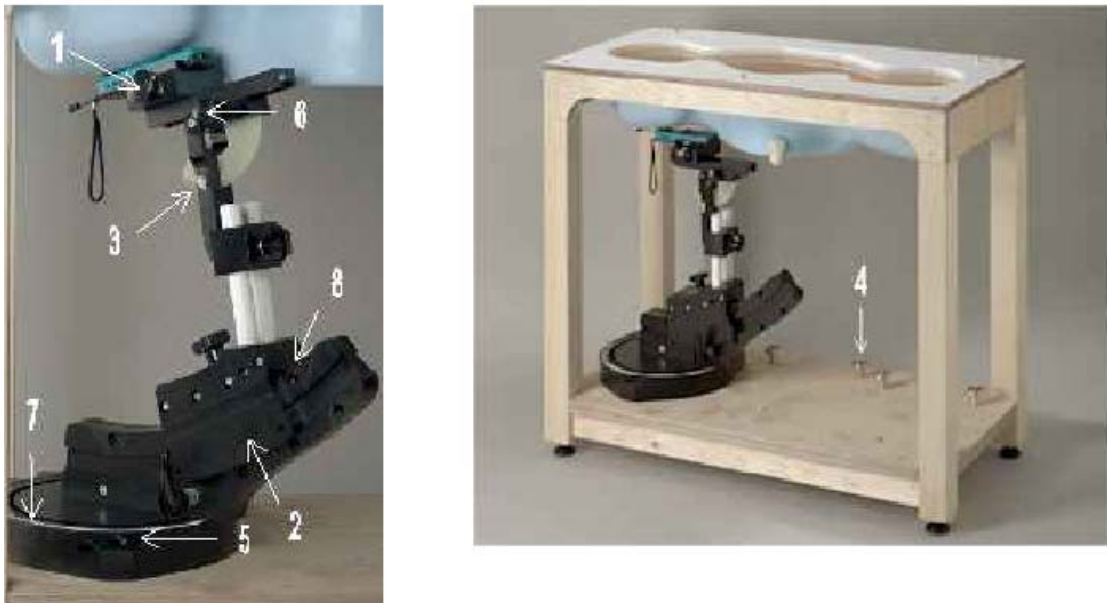



Figure 6
Device Holder

1. Put the phone in the clamp mechanism (1) and hold it straight while tightening. (Curved phones or phones with asymmetrical ear pieces should be positioned so that the ear piece is in the symmetry plane of the clamp).
2. Adjust the sliding carriage (2) to 90°. Then adjust the phone holder angle (3) until the reference line of the phone is horizontal (parallel to the flat phantom bottom). The phone reference line is defined as the front tangential line between the ear piece and the center of the device bottom (or the center of the flip hinge). For devices with parallel front and back sides, the phone holder angle (3) is 0°.
3. Place the device holder at the desired phantom section and move it securely against the positioning pins (4). The screw in front of the turning plate can be applied for correct positioning (5). (Do not tighten it too strongly).
4. Shift the phone clamp (6) so that the ear piece is exactly below the ear marking of the phantom. The phone is now correctly positioned in the holder for all standard phantom measurements, even after changing the phantom or phantom section.

 RESEARCH IN MOTION	Document SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN		Page 18(25)
Author Data Daoud Attayi	Dates of Test Oct. 22 – Nov. 04, 2004	Test Report No RIM-0110-0411-01	FCC ID: L6ARAR20CN

5. Adjust the device position angles to the desired measurement position.
6. After fixing the device angles, move the phone fixture up until the phone touches the ear marking.
(The point of contact depends on the design of the device and the positioning angle).

8.2 Description of the test positioning

8.2.1 Test Positions of Device Relative to Head

The handset was tested in two test positions against the head phantom, the “cheek” position and the “tilted” position, on both left and right sides of the phantom.

The handset was tested in the above positions according to IEEE 1528- 2003 “Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques”.

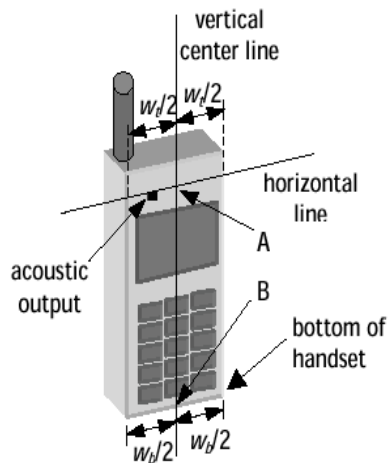


Figure 7a – Handset vertical and horizontal reference lines – fixed case

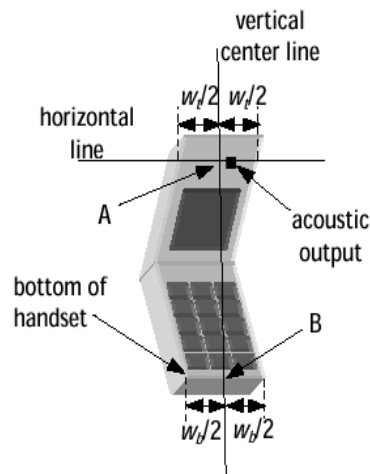



Figure 7b – Handset vertical and horizontal reference lines – “clam-shell”

 RESEARCH IN MOTION	Document SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN		Page 19(25)
Author Data Daoud Attayi	Dates of Test Oct. 22 – Nov. 04, 2004	Test Report No RIM-0110-0411-01	FCC ID: L6ARAR20CN

8.2.1.1 Definition of the “cheek” position

- 1) Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece, open the cover.
- 2) Define two imaginary lines on the handset: the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A on Figures 7a and 7b), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 7a). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 7b), especially for clamshell handsets, handsets with flip pieces, and other irregularly shaped handsets.
- 3) Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 7), such that the plane defined by the vertical center line and the horizontal center line is in a plane approximately parallel to the sagittal plane of the phantom.
- 4) Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the ear.
- 5) While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is the plane normal to MB (“mouth-back”) - NF (“neck-front”) including the line MB (reference plane).
- 6) Rotate the phone around the vertical centerline until the phone (horizontal line) is symmetrical with respect to the line NF.
- 7) While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, rotate the handset about the line NF until any point on the handset is in contact with a phantom point below the ear (cheek).

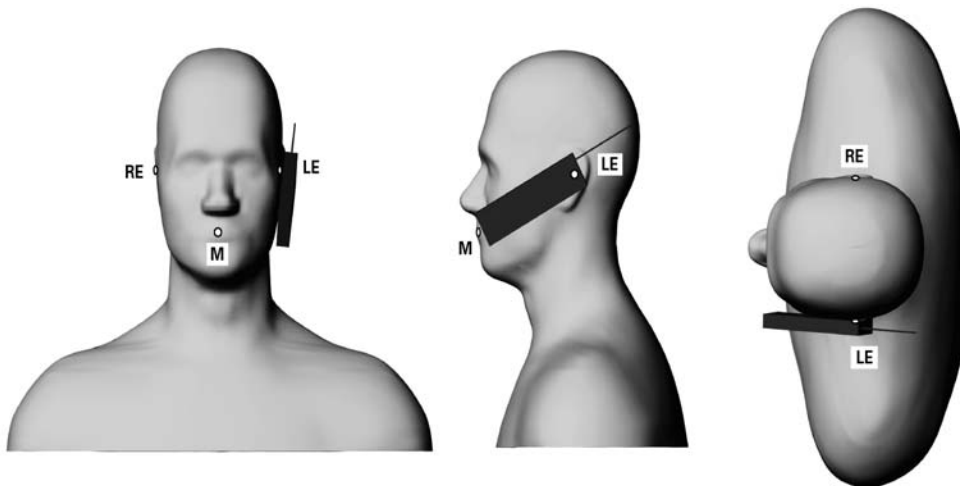



Figure 8 – Phone position 1, “cheek” or “touch” position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated. The shoulders are shown for illustration purposes only.

 RESEARCH IN MOTION	Document		Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN		20(25)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

8.2.1.2 Definition of the “Tilted” Position

- 1) Repeat steps 1 to 7 of 5.4.1 (in this report 8.2.1.1) to replace the device in the “cheek position.”
- 2) While maintaining the device in the reference plane (described above) and pivoting against the ear, move the device outward away from the mouth by an angle of 15 degrees, or until the antenna touches the phantom.

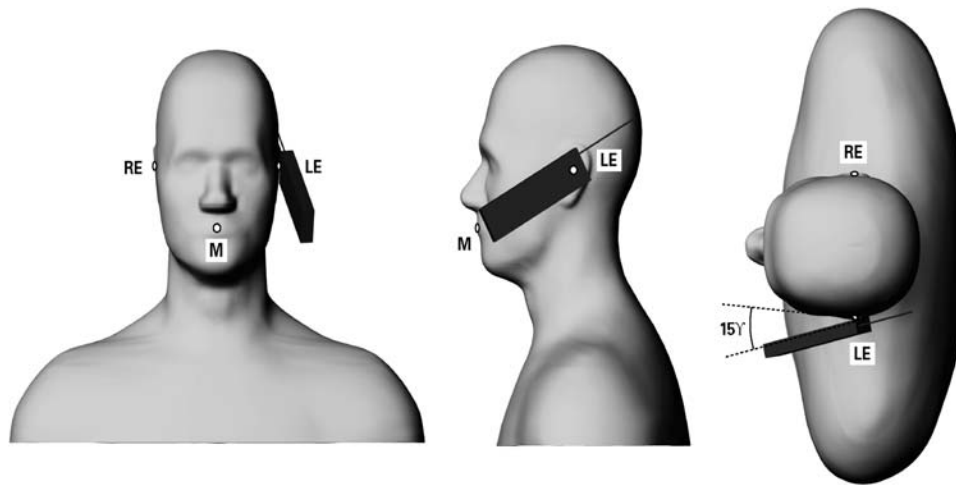



Figure 9 – Phone position 2, “tilted position.” The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated. The shoulders are shown for illustration purposes only.

8.2.2 Body Holster Configuration

A body worn holster, as shown on Figure 2, was tested with the Wireless Handheld for FCC RF exposure compliance. The EUT was positioned in the holster case and the belt clip was placed against the flat section of the phantom. A headset was then connected to the handheld to simulate hands-free operation in a body worn holster configuration.

 RESEARCH IN MOTION	Document		Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN		21(25)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

9.0 High Level Evaluation

9.1 Maximum search

The maximum search is automatically performed after each coarse scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations.

9.2 Extrapolation

The extrapolation can be used in z-axis scans with automatic surface detection. The SAR values can be extrapolated to the inner phantom surface. The extrapolation distance is the sum of the probe sensor offset, the surface detection distance and the grid offset. The extrapolation is based on fourth order polynomial functions. The extrapolation is only available for SAR values.


9.3 Boundary correction

The correction of the probe boundary effect in the vicinity of the phantom surface is done in the standard (worst case) evaluation; the boundary effect is reduced by different weights for the lowest measured points in the extrapolation routine. The result is a slight overestimation of the extrapolated SAR values (2% to 8%) depending on the SAR distribution and gradient. The advanced evaluation makes a full compensation of the boundary effect before doing the extrapolation. This is only possible for probes with specifications on the boundary effect.

9.4 Peak search for 1g and 10g cube averaged SAR

The 1g and 10g peak evaluations are only available for the predefined cube 5x5x7 scan. The routines are verified and optimized for the grid dimensions used in these cube measurements.


The measure volume of 32x32x35mm mm contains about 35g of tissue. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume in a 1mm grid (35000 points). In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is then moved around until the highest averaged SAR is found. This last procedure is repeated for a 10 g cube. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

 RESEARCH IN MOTION	Document		Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN		22(25)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

10.0 MEASUREMENT UNCERTAINTIES

DASY4 Uncertainty Budget According to IEEE P1528 [1]								
Error Description	Uncertainty value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v_i) v_{eff}
Measurement System								
Probe Calibration	±4.8 %	N	1	1	1	±4.8 %	±4.8 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Readout Electronics	±1.0 %	N	1	1	1	±1.0 %	±1.0 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Conditions	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.4 %	R	√3	1	1	±0.2 %	±0.2 %	∞
Probe Positioning	±2.9 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Max. SAR Eval.	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
Phantom and Setup								
Phantom Uncertainty	±4.0 %	R	√3	1	1	±2.3 %	±2.3 %	∞
Liquid Conductivity (target)	±5.0 %	R	√3	0.64	0.43	±1.8 %	±1.2 %	∞
Liquid Conductivity (meas.)	±2.5 %	N	1	0.64	0.43	±1.6 %	±1.1 %	∞
Liquid Permittivity (target)	±5.0 %	R	√3	0.6	0.49	±1.7 %	±1.4 %	∞
Liquid Permittivity (meas.)	±2.5 %	N	1	0.6	0.49	±1.5 %	±1.2 %	∞
Combined Std. Uncertainty						±10.3 %	±10.0 %	330
Expanded STD Uncertainty						±20.6 %	±20.1 %	

Table 14. Measurement uncertainty


 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN			23(25)
Author Data	Dates of Test	Test Report No	FCC ID:	
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN	

11.0 TEST RESULTS

11.1 SAR Measurement results at highest power measured against the head

Mode	f (MHz)	Cond. Output Power (dBm)	Battery Type	SAR, averaged over 1 g (W/Kg)			SAR, averaged over 1 g (W/Kg)		
				Left-hand			Right-hand		
				Liquid Temp (°C)	Cheek	Tilted	Liquid Temp (°C)	Cheek	Tilted
CDMA Cellular 835	*836.52	24.8	GS	23.0	0.43	0.38	22.5	0.34	0.34
	836.52	24.8	Sanyo	22.9	0.42	-	-	-	-
	836.52	24.8	higher capacity	22.8	0.44	-	-	-	-
	836.52 + BT	24.8	higher capacity	22.6	0.53	-	-	-	-
CDMA PCS 1900	* 1880.00	23.6	GS	22.4	0.18	0.22	22.3	0.29	0.32
	1880.00	23.6	Sanyo	-	-	-	22.9	-	0.33
	1880.00	23.6	higher capacity	-	-	-	22.8	-	0.34
	1880.00 + BT	23.6	Sanyo	-	-	-	22.6	-	0.36

Table 15. SAR results for head configuration


 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN			24(25)
Author Data	Dates of Test	Test Report No	FCC ID:	
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN	

11.2 SAR measurement results at highest power measured against the body using accessories

Mode	f (MHz)	Cond. Output Power (dBm)	Liquid Temp (°C)	Accessory	SAR, averaged over 1 g (W/kg) Holster
CDMA Cellular 835	*836.52	24.8	22.3	Ruggedized Holster	0.35
	836.52	24.8	22.4	Leather Swivel Holster	0.35
	836.52	24.8	22.3	Plastic Swivel Holster	0.39
	836.52	24.8	22.2	Horizontal Foam Holster	0.48
	836.52	24.8	22.2	Vertical Foam Holster	0.30
	836.52 + BT	24.8	22.6	Horizontal Foam Holster	0.41
	836.52	24.8	22.5	15 mm distance between the back of the handheld and flat phantom, no holster	0.84
CDMA PCS 1900	*1880.00	23.6	22.6	Ruggedized Holster	0.15
	1880.00	23.6	21.8	Leather Swivel Holster	0.13
	1880.00	23.6	21.6	Plastic Swivel Holster	0.17
	1880.00	23.6	22.4	Horizontal Foam Holster	0.14
	1880.00	23.6	22.5	Vertical Foam Holster	0.20
	1880.00 + BT	23.6	22.7	Vertical Foam Holster	0.13
	1880.00	23.6	22.6	15 mm distance between the back of the handheld and flat phantom, no holster	0.60

Table 16. SAR results with body-worn accessories

* Supplement C: Middle channel testing is sufficient only if SAR < 3dB below limit see PN 02-1438

 RESEARCH IN MOTION	Document		Page
	SAR Compliance Test Report for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN		25(25)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

12.0 REFERENCES

- [1] EN 50360: 2001, Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)
- [2] EN 50361: 2001, Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz – 3 GHz)
- [3] ICNIRP, International Commission on Non-Ionizing Radiation Protection (1998), Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz).
- [4] Council Recommendation 1999/519/EC of July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)
- [5] IEEE C95.3-1991, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave.
- [6] IEEE C95.1-1999, IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
- [7] OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.
- [8] FCC 96-326, Guidelines for Evaluating the Environmental Effects of Radio-Frequency Radiation.
- [9] DASY 4 DOSIMETRIC ASSESSMENT SYSTEM SOFTWARE MANUAL V4.1
Schmid & Partner Engineering AG, April 2003.
- [10] IEEE 1528-2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [11] Health Canada, Safety Code 6, 1999: Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency range from 3 kHz to 300 GHz.
- [12] RSS-102, issue 1 (Provisional), September 25, 1999: Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields.