

FCC Test Report

APPLICANT : TCL Communication Ltd.
EQUIPMENT : Charging Cradle
BRAND NAME : lively
MODEL NAME : R52CC200
FCC ID : 2ACCJ-R52CC200
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Dec. 24, 2024 ~ Dec. 25, 2024

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification of Equipment Under Test	5
1.5. Modification of EUT	5
1.6. Test Location	6
1.7. Test Software	6
1.8. Applicable Standards	6
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1. Test Mode	7
2.2. Connection Diagram of Test System	7
2.3. Support Unit used in test configuration and system.....	8
2.4. EUT Operation Test Setup	8
3. TEST RESULT	9
3.1. Test of AC Conducted Emission Measurement	9
3.2. Test of Radiated Emission Measurement	13
4. LIST OF MEASURING EQUIPMENT	18
5. MEASUREMENT UNCERTAINTY	19
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC4N0507	Rev. 01	Initial issue of report	Apr. 30, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 11.70 dB at 0.15 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 14.22 dB at 67.83 MHz

Conformity Assessment Condition:

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1. General Description

1.1. Applicant

TCL Communication Ltd.

5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong

1.2. Manufacturer

TCL Communication Ltd.

5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Charging Cradle
Brand Name	lively
Model Name	R52CC200
FCC ID	2ACCJ-R52CC200
EUT supports Radios application	Bluetooth LE
SN Code	Radiation: JDPB03BFHGI0007 Conduction: JDPB03BFHGI0006
HW Version	V6.0
SW Version	2.3
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	Bluetooth: 2400 MHz ~ 2483.5 MHz
Rx Frequency	Bluetooth: 2400 MHz ~ 2483.5 MHz
Antenna Type	Bluetooth : Chip Antenna
Type of Modulation	Bluetooth LE : GFSK

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO02-SZ ; 03CH04-SZ	CN1256	421272

1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test


2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: BT idle + USB Cable + Adapter
	Mode 2: Lively Mobile2 + BT Link + USB Cable + Charging from NB
Radiated Emissions	Mode 1: BT idle + USB Cable + Adapter
	Mode 2: Lively Mobile2 + BT Link + USB Cable + Charging from NB
Remark: <ol style="list-style-type: none"> 1. The worst case of AC is mode 2; only the test data of this mode is reported. 2. The worst case of RE is mode 2; only the test data of this mode is reported. 	

2.2. Connection Diagram of Test System

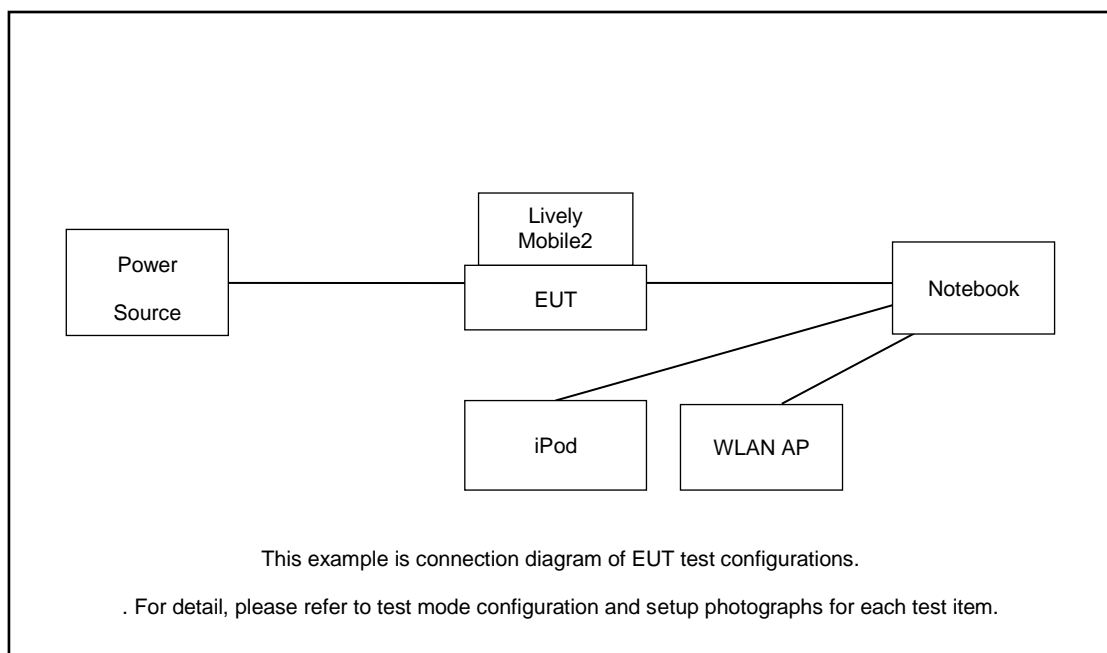

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	iPod	Apple	N/A	MC69029/A	N/A	N/A
2.	iPod	Apple	MC525 ZP/A	Fcc DoC	N/A	Shielded, 1.0m
3.	Notebook	Lenovo	E540	FCC DoC		AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
4.	Notebook	Thinkpad	Thinkpad E14	N/A	N/A	N/A
5.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
6.	WLAN AP	ASUSTek	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 2.7m with Core
7.	Lively Mobile2	lively	N/A	N/A	N/A	N/A

2.4. EUT Operation Test Setup

The following program installed in the EUT was programmed during the test.

1. EUT BT Link with the Lively Mobile2.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup

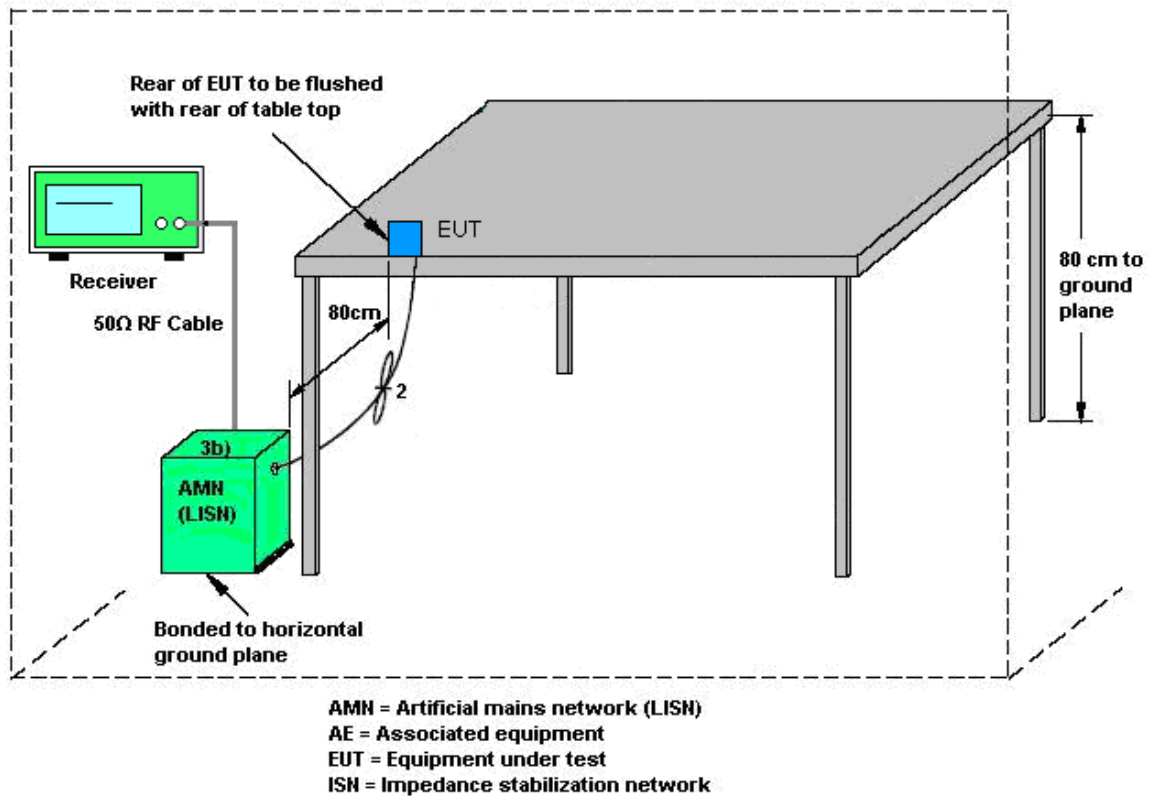



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

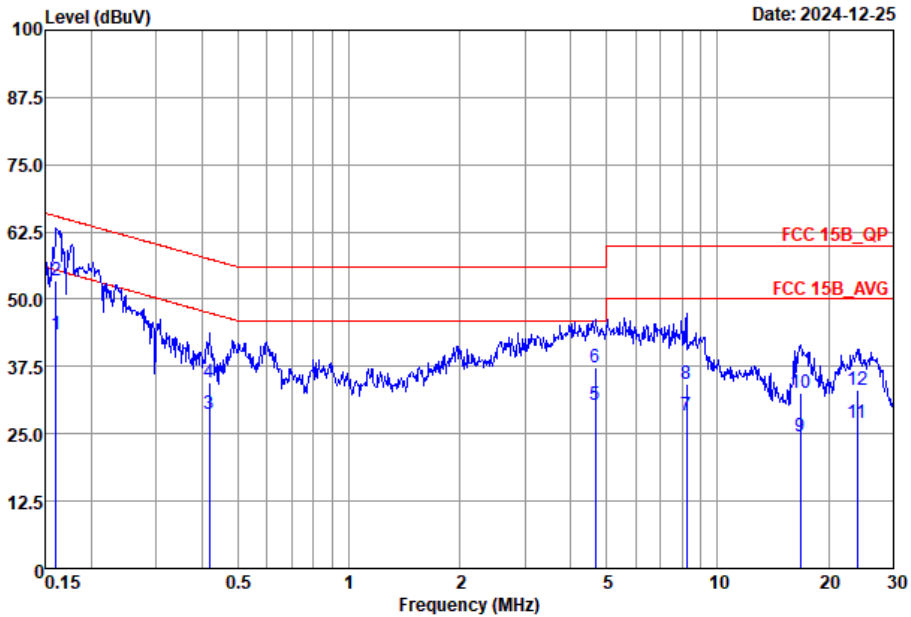


Site : C002-SZ
Condition : FCC 15B_QP LISN_2024-L-1 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.16	43.58	-11.85	55.43	23.90	9.67	10.01	Average
2 *	0.16	53.48	-11.95	65.43	33.80	9.67	10.01	QP
3	0.42	28.82	-18.64	47.46	9.09	9.64	10.09	Average
4	0.42	34.62	-22.84	57.46	14.89	9.64	10.09	QP
5	4.67	30.37	-15.63	46.00	10.50	9.61	10.26	Average
6	4.67	37.27	-18.73	56.00	17.40	9.61	10.26	QP
7	8.24	28.34	-21.66	50.00	8.30	9.61	10.43	Average
8	8.24	34.14	-25.86	60.00	14.10	9.61	10.43	QP
9	16.75	24.57	-25.43	50.00	4.20	9.57	10.80	Average
10	16.75	32.57	-27.43	60.00	12.20	9.57	10.80	QP
11	23.89	27.13	-22.87	50.00	6.70	9.70	10.73	Average
12	23.89	33.23	-26.77	60.00	12.80	9.70	10.73	QP



Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

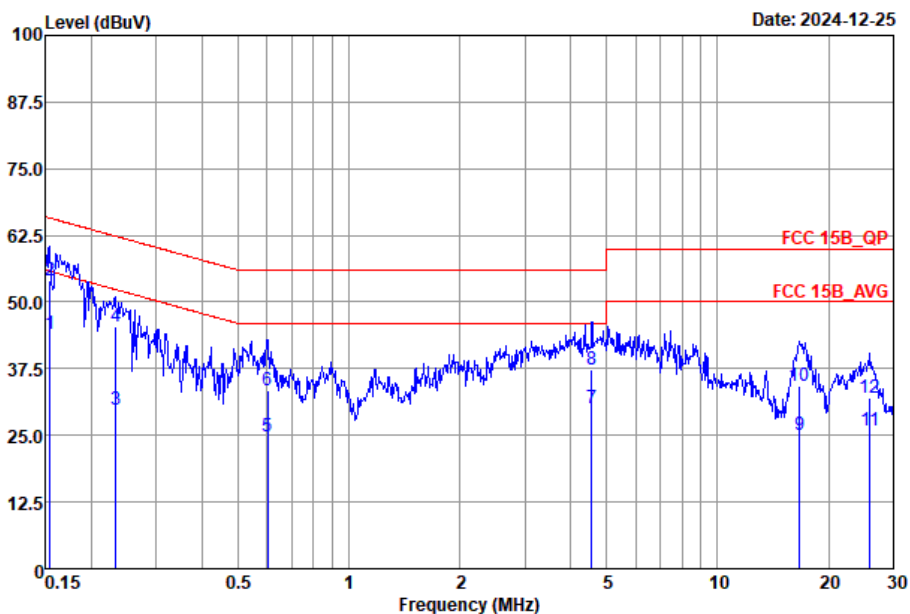

Site : CO02-SZ
Condition : FCC 15B_QP LISN_2024-N-1 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.15	43.94	-11.80	55.74	24.20	9.73	10.01	Average
2 *	0.15	54.04	-11.70	65.74	34.30	9.73	10.01	QP
3	0.23	29.91	-22.44	52.35	10.20	9.68	10.03	Average
4	0.23	45.31	-17.04	62.35	25.60	9.68	10.03	QP
5	0.60	24.82	-21.18	46.00	5.00	9.69	10.13	Average
6	0.60	33.32	-22.68	56.00	13.50	9.69	10.13	QP
7	4.55	30.02	-15.98	46.00	10.10	9.66	10.26	Average
8	4.55	37.22	-18.78	56.00	17.30	9.66	10.26	QP
9	16.66	25.20	-24.80	50.00	4.80	9.60	10.80	Average
10	16.66	34.20	-25.80	60.00	13.80	9.60	10.80	QP
11	25.86	26.01	-23.99	50.00	5.49	9.77	10.75	Average
12	25.86	31.91	-28.09	60.00	11.39	9.77	10.75	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission


For radiated emissions from 30MHz to 1GHz

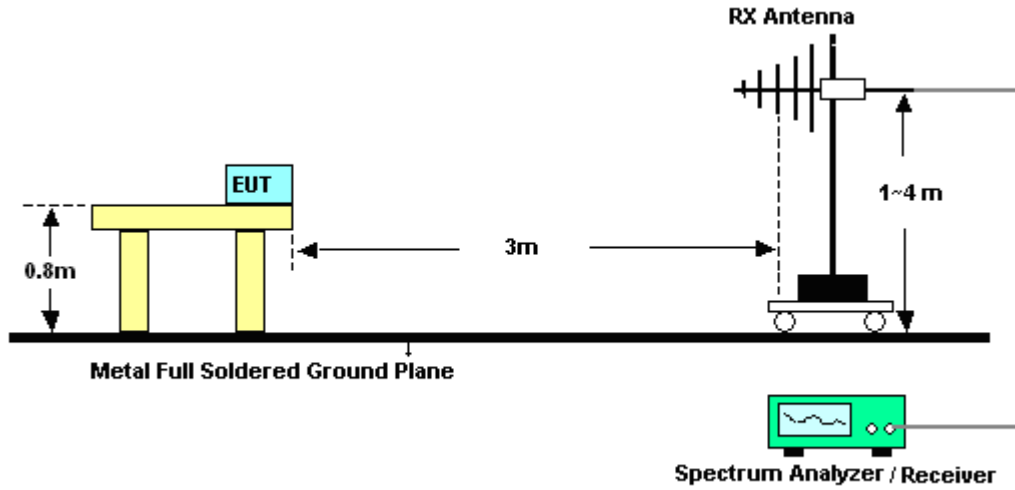

For radiated emissions above 1GHz

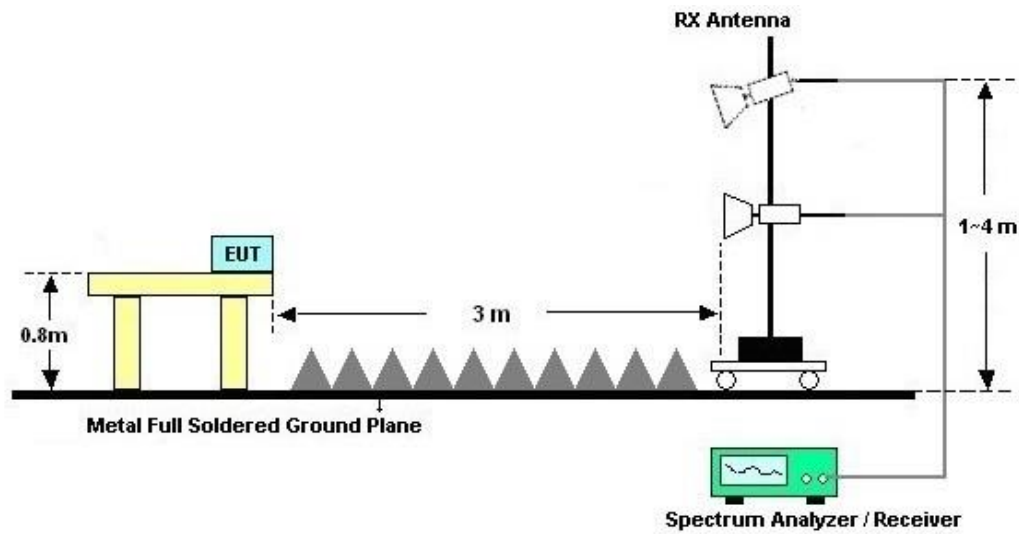


3.2.5. Test Result of Radiated Emission

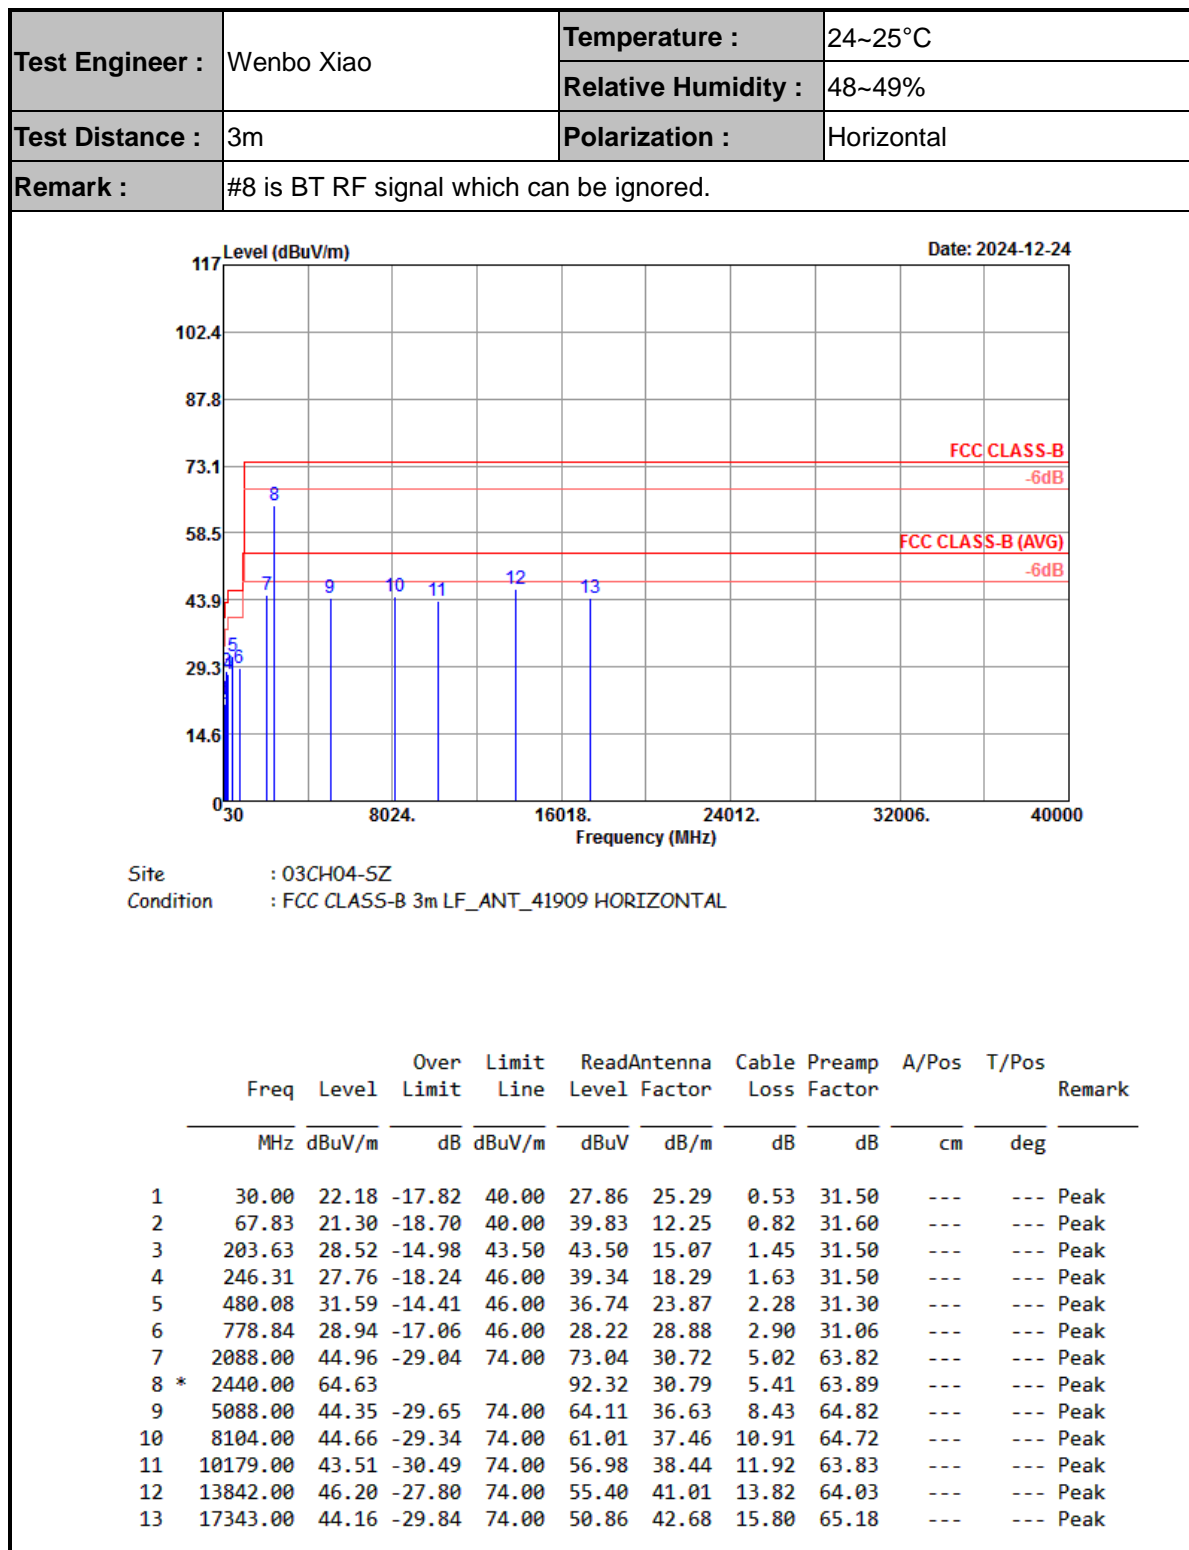



Test Engineer :	Wenbo Xiao	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Vertical
Remark :	#8 is BT RF signal which can be ignored.		

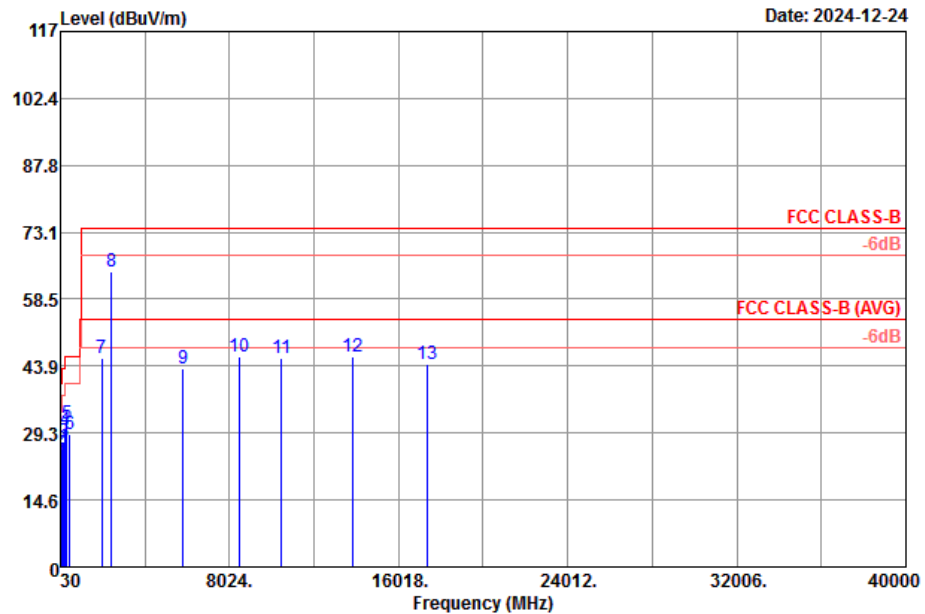

Site : 03CH04-SZ
Condition : FCC CLASS-B 3m LF_ANT_41909 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	22.78	-17.22	40.00	28.46	25.29	0.53	31.50	---	---	Peak
2	67.83	25.78	-14.22	40.00	44.31	12.25	0.82	31.60	---	---	Peak
3	202.66	27.39	-16.11	43.50	42.39	15.06	1.44	31.50	---	---	Peak
4	246.31	30.02	-15.98	46.00	41.60	18.29	1.63	31.50	---	---	Peak
5	331.67	31.24	-14.76	46.00	40.78	20.09	1.91	31.54	---	---	Peak
6	480.08	29.01	-16.99	46.00	34.16	23.87	2.28	31.30	---	---	Peak
7	1984.00	45.55	-28.45	74.00	73.86	30.64	4.85	63.80	---	---	Peak
8 *	2440.00	64.45			92.14	30.79	5.41	63.89	---	---	Peak
9	5816.00	43.51	-30.49	74.00	61.68	36.62	10.17	64.96	---	---	Peak
10	8504.00	45.87	-28.13	74.00	61.77	37.70	10.80	64.40	---	---	Peak
11	10467.00	45.61	-28.39	74.00	58.68	38.49	12.15	63.71	---	---	Peak
12	13878.00	45.86	-28.14	74.00	55.02	41.03	13.83	64.02	---	---	Peak
13	17397.00	44.27	-29.73	74.00	50.94	42.74	15.83	65.24	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 14, 2024	Dec. 24, 2024	Oct. 13, 2025	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Dec. 24, 2024	Jul. 02, 2025	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May 09, 2024	Dec. 24, 2024	May 08, 2025	Radiation (03CH04-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2024	Dec. 24, 2024	Oct. 17, 2025	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 07, 2023	Dec. 24, 2024	Jul. 06, 2025	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Dec. 24, 2024	Oct. 13, 2025	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz	Jul. 03, 2024	Dec. 24, 2024	Jul. 02, 2025	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 04, 2024	Dec. 24, 2024	Jul. 03, 2025	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Oct. 14, 2024	Dec. 24, 2024	Oct. 13, 2025	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 24, 2024	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 24, 2024	NCR	Radiation (03CH04-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Dec. 25, 2024	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Dec. 25, 2024	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	61601000247 0	100Vac~250Vac	Dec. 25, 2024	Dec. 25, 2024	Dec. 24, 2025	Conduction (CO02-SZ)

NCR: No Calibration Required

5. Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
--	--------

----- THE END -----