



A D T

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10480.00	57.6 PK	74.0	-16.4	1.07 H	29	47.93	9.67
2	#10480.00	44.9 AV	54.0	-9.1	1.07 H	29	35.23	9.67
3	15720.00	63.2 PK	74.0	-10.8	1.26 H	293	49.31	13.89
4	15720.00	50.3 AV	54.0	-3.7	1.26 H	293	36.41	13.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10480.00	58.3 PK	74.0	-15.7	1.51 V	290	48.63	9.67
2	#10480.00	45.2 AV	54.0	-8.8	1.51 V	290	35.53	9.67
3	15720.00	63.2 PK	74.0	-10.8	1.17 V	163	49.31	13.89
4	15720.00	50.6 AV	54.0	-3.4	1.17 V	163	36.71	13.89

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10520.00	57.6 PK	74.0	-16.4	1.10 H	25	47.82	9.78
2	#10520.00	45.1 AV	54.0	-8.9	1.10 H	25	35.32	9.78
3	15780.00	63.8 PK	74.0	-10.2	1.18 H	284	49.87	13.93
4	15780.00	50.4 AV	54.0	-3.6	1.18 H	284	36.47	13.93
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10520.00	58.8 PK	74.0	-15.2	1.51 V	309	49.02	9.78
2	#10520.00	45.7 AV	54.0	-8.3	1.51 V	309	35.92	9.78
3	15780.00	63.5 PK	74.0	-10.5	1.19 V	169	49.57	13.93
4	15780.00	50.3 AV	54.0	-3.7	1.19 V	169	36.37	13.93

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10600.00	57.5 PK	74.0	-16.5	1.08 H	47	47.43	10.07
2	10600.00	44.9 AV	54.0	-9.1	1.08 H	47	34.83	10.07
3	15900.00	63.1 PK	74.0	-10.9	1.26 H	303	48.88	14.22
4	15900.00	49.9 AV	54.0	-4.1	1.26 H	303	35.68	14.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10600.00	59.1 PK	74.0	-14.9	1.59 V	292	49.03	10.07
2	10600.00	45.7 AV	54.0	-8.3	1.59 V	292	35.63	10.07
3	15900.00	63.6 PK	74.0	-10.4	1.22 V	160	49.38	14.22
4	15900.00	50.6 AV	54.0	-3.4	1.22 V	160	36.38	14.22

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10640.00	57.9 PK	74.0	-16.1	1.04 H	34	47.89	10.01
2	10640.00	45.1 AV	54.0	-8.9	1.04 H	34	35.09	10.01
3	15960.00	63.5 PK	74.0	-10.5	1.19 H	293	49.35	14.15
4	15960.00	50.2 AV	54.0	-3.8	1.19 H	293	36.05	14.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10640.00	58.5 PK	74.0	-15.5	1.50 V	317	48.49	10.01
2	10640.00	45.1 AV	54.0	-8.9	1.50 V	317	35.09	10.01
3	15960.00	63.0 PK	74.0	-11.0	1.19 V	150	48.85	14.15
4	15960.00	50.2 AV	54.0	-3.8	1.19 V	150	36.05	14.15

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11000.00	57.7 PK	74.0	-16.3	1.05 H	26	47.47	10.23
2	11000.00	45.2 AV	54.0	-8.8	1.05 H	26	34.97	10.23
3	#16500.00	63.3 PK	74.0	-10.7	1.27 H	291	47.10	16.20
4	#16500.00	50.2 AV	54.0	-3.8	1.27 H	291	34.00	16.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11000.00	58.8 PK	74.0	-15.2	1.53 V	318	48.57	10.23
2	11000.00	45.6 AV	54.0	-8.4	1.53 V	318	35.37	10.23
3	#16500.00	63.5 PK	74.0	-10.5	1.23 V	155	47.30	16.20
4	#16500.00	50.5 AV	54.0	-3.5	1.23 V	155	34.30	16.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 120	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11200.00	57.4 PK	74.0	-16.6	1.12 H	50	47.27	10.13
2	11200.00	45.0 AV	54.0	-9.0	1.12 H	50	34.87	10.13
3	#16800.00	63.4 PK	74.0	-10.6	1.26 H	299	45.98	17.42
4	#16800.00	50.3 AV	54.0	-3.7	1.26 H	299	32.88	17.42
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11200.00	59.1 PK	74.0	-14.9	1.57 V	289	48.97	10.13
2	11200.00	45.7 AV	54.0	-8.3	1.57 V	289	35.57	10.13
3	#16800.00	63.7 PK	74.0	-10.3	1.29 V	168	46.28	17.42
4	#16800.00	50.6 AV	54.0	-3.4	1.29 V	168	33.18	17.42

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11400.00	57.2 PK	74.0	-16.8	1.10 H	28	47.23	9.97
2	11400.00	44.9 AV	54.0	-9.1	1.10 H	28	34.93	9.97
3	#17100.00	63.1 PK	74.0	-10.9	1.26 H	308	45.38	17.72
4	#17100.00	50.1 AV	54.0	-3.9	1.26 H	308	32.38	17.72
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11400.00	59.0 PK	74.0	-15.0	1.57 V	320	49.03	9.97
2	11400.00	45.5 AV	54.0	-8.5	1.57 V	320	35.53	9.97
3	#17100.00	63.5 PK	74.0	-10.5	1.20 V	158	45.78	17.72
4	#17100.00	50.6 AV	54.0	-3.4	1.20 V	158	32.88	17.72

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11440.00	57.1 PK	74.0	-16.9	1.15 H	27	47.10	10.00
2	11440.00	44.7 AV	54.0	-9.3	1.15 H	27	34.70	10.00
3	#17160.00	63.2 PK	74.0	-10.8	1.17 H	294	45.04	18.16
4	#17160.00	50.4 AV	54.0	-3.6	1.17 H	294	32.24	18.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11440.00	58.8 PK	74.0	-15.2	1.52 V	333	48.80	10.00
2	11440.00	45.2 AV	54.0	-8.8	1.52 V	333	35.20	10.00
3	#17160.00	63.3 PK	74.0	-10.7	1.17 V	163	45.14	18.16
4	#17160.00	50.2 AV	54.0	-3.8	1.17 V	163	32.04	18.16

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	55.4 PK	74.0	-18.6	1.06 H	16	45.36	10.04
2	11490.00	43.1 AV	54.0	-10.9	1.06 H	16	33.06	10.04
3	#17235.00	51.5 PK	74.0	-22.5	1.05 H	134	32.94	18.56
4	#17235.00	40.0 AV	54.0	-14.0	1.05 H	134	21.44	18.56
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	56.6 PK	74.0	-17.4	1.49 V	352	46.56	10.04
2	11490.00	43.2 AV	54.0	-10.8	1.49 V	352	33.16	10.04
3	#17235.00	51.6 PK	74.0	-22.4	1.26 V	323	33.04	18.56
4	#17235.00	39.6 AV	54.0	-14.4	1.26 V	323	21.04	18.56

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	55.1 PK	74.0	-18.9	1.17 H	5	45.02	10.08
2	11570.00	42.9 AV	54.0	-11.1	1.17 H	5	32.82	10.08
3	#17355.00	51.8 PK	74.0	-22.2	1.00 H	130	32.90	18.90
4	#17355.00	40.5 AV	54.0	-13.5	1.00 H	130	21.60	18.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	56.3 PK	74.0	-17.7	1.46 V	344	46.22	10.08
2	11570.00	42.9 AV	54.0	-11.1	1.46 V	344	32.82	10.08
3	#17355.00	52.1 PK	74.0	-21.9	1.25 V	301	33.20	18.90
4	#17355.00	40.1 AV	54.0	-13.9	1.25 V	301	21.20	18.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	55.2 PK	74.0	-18.8	1.13 H	29	45.23	9.97
2	11650.00	42.6 AV	54.0	-11.4	1.13 H	29	32.63	9.97
3	#17475.00	51.1 PK	74.0	-22.9	1.02 H	126	31.99	19.11
4	#17475.00	40.0 AV	54.0	-14.0	1.02 H	126	20.89	19.11
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	56.5 PK	74.0	-17.5	1.48 V	346	46.53	9.97
2	11650.00	43.5 AV	54.0	-10.5	1.48 V	346	33.53	9.97
3	#17475.00	51.0 PK	74.0	-23.0	1.21 V	331	31.89	19.11
4	#17475.00	39.3 AV	54.0	-14.7	1.21 V	331	20.19	19.11

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

802.11ac VHT20

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10360.00	57.5 PK	74.0	-16.5	1.14 H	33	48.07	9.43
2	#10360.00	45.3 AV	54.0	-8.7	1.14 H	33	35.87	9.43
3	15540.00	63.3 PK	74.0	-10.7	1.22 H	306	49.27	14.03
4	15540.00	50.1 AV	54.0	-3.9	1.22 H	306	36.07	14.03
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10360.00	58.2 PK	74.0	-15.8	1.56 V	334	48.77	9.43
2	#10360.00	45.0 AV	54.0	-9.0	1.56 V	334	35.57	9.43
3	15540.00	63.4 PK	74.0	-10.6	1.15 V	170	49.37	14.03
4	15540.00	50.2 AV	54.0	-3.8	1.15 V	170	36.17	14.03

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10400.00	57.2 PK	74.0	-16.8	1.07 H	41	47.75	9.45
2	#10400.00	44.9 AV	54.0	-9.1	1.07 H	41	35.45	9.45
3	15600.00	62.8 PK	74.0	-11.2	1.18 H	289	48.62	14.18
4	15600.00	49.9 AV	54.0	-4.1	1.18 H	289	35.72	14.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10400.00	59.3 PK	74.0	-14.7	1.62 V	334	49.85	9.45
2	#10400.00	45.7 AV	54.0	-8.3	1.62 V	334	36.25	9.45
3	15600.00	63.6 PK	74.0	-10.4	1.17 V	158	49.42	14.18
4	15600.00	50.4 AV	54.0	-3.6	1.17 V	158	36.22	14.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10480.00	57.9 PK	74.0	-16.1	1.13 H	43	48.23	9.67
2	#10480.00	45.4 AV	54.0	-8.6	1.13 H	43	35.73	9.67
3	15720.00	63.0 PK	74.0	-11.0	1.26 H	294	49.11	13.89
4	15720.00	50.1 AV	54.0	-3.9	1.26 H	294	36.21	13.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10480.00	59.1 PK	74.0	-14.9	1.52 V	323	49.43	9.67
2	#10480.00	45.8 AV	54.0	-8.2	1.52 V	323	36.13	9.67
3	15720.00	63.7 PK	74.0	-10.3	1.21 V	172	49.81	13.89
4	15720.00	50.7 AV	54.0	-3.3	1.21 V	172	36.81	13.89

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10520.00	57.9 PK	74.0	-16.1	1.09 H	40	48.12	9.78
2	#10520.00	45.4 AV	54.0	-8.6	1.09 H	40	35.62	9.78
3	15780.00	62.9 PK	74.0	-11.1	1.26 H	282	48.97	13.93
4	15780.00	49.8 AV	54.0	-4.2	1.26 H	282	35.87	13.93
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10520.00	58.2 PK	74.0	-15.8	1.58 V	325	48.42	9.78
2	#10520.00	45.0 AV	54.0	-9.0	1.58 V	325	35.22	9.78
3	15780.00	64.0 PK	74.0	-10.0	1.24 V	152	50.07	13.93
4	15780.00	50.4 AV	54.0	-3.6	1.24 V	152	36.47	13.93

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10600.00	58.1 PK	74.0	-15.9	1.15 H	35	48.03	10.07
2	10600.00	45.3 AV	54.0	-8.7	1.15 H	35	35.23	10.07
3	15900.00	63.5 PK	74.0	-10.5	1.28 H	307	49.28	14.22
4	15900.00	50.3 AV	54.0	-3.7	1.28 H	307	36.08	14.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10600.00	58.7 PK	74.0	-15.3	1.57 V	320	48.63	10.07
2	10600.00	45.2 AV	54.0	-8.8	1.57 V	320	35.13	10.07
3	15900.00	63.3 PK	74.0	-10.7	1.25 V	170	49.08	14.22
4	15900.00	50.4 AV	54.0	-3.6	1.25 V	170	36.18	14.22

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10640.00	57.5 PK	74.0	-16.5	1.05 H	30	47.49	10.01
2	10640.00	45.1 AV	54.0	-8.9	1.05 H	30	35.09	10.01
3	15960.00	63.9 PK	74.0	-10.1	1.23 H	283	49.75	14.15
4	15960.00	50.5 AV	54.0	-3.5	1.23 H	283	36.35	14.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10640.00	59.1 PK	74.0	-14.9	1.61 V	316	49.09	10.01
2	10640.00	45.4 AV	54.0	-8.6	1.61 V	316	35.39	10.01
3	15960.00	63.8 PK	74.0	-10.2	1.22 V	172	49.65	14.15
4	15960.00	50.9 AV	54.0	-3.1	1.22 V	172	36.75	14.15

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11000.00	57.7 PK	74.0	-16.3	1.12 H	33	47.47	10.23
2	11000.00	45.0 AV	54.0	-9.0	1.12 H	33	34.77	10.23
3	#16500.00	63.2 PK	74.0	-10.8	1.18 H	285	47.00	16.20
4	#16500.00	50.3 AV	54.0	-3.7	1.18 H	285	34.10	16.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11000.00	59.2 PK	74.0	-14.8	1.57 V	336	48.97	10.23
2	11000.00	45.7 AV	54.0	-8.3	1.57 V	336	35.47	10.23
3	#16500.00	63.5 PK	74.0	-10.5	1.21 V	155	47.30	16.20
4	#16500.00	50.6 AV	54.0	-3.4	1.21 V	155	34.40	16.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 120	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11200.00	57.4 PK	74.0	-16.6	1.10 H	45	47.27	10.13
2	11200.00	45.0 AV	54.0	-9.0	1.10 H	45	34.87	10.13
3	#16800.00	63.8 PK	74.0	-10.2	1.21 H	312	46.38	17.42
4	#16800.00	50.6 AV	54.0	-3.4	1.21 H	312	33.18	17.42
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11200.00	59.0 PK	74.0	-15.0	1.56 V	319	48.87	10.13
2	11200.00	45.6 AV	54.0	-8.4	1.56 V	319	35.47	10.13
3	#16800.00	63.2 PK	74.0	-10.8	1.17 V	142	45.78	17.42
4	#16800.00	50.5 AV	54.0	-3.5	1.17 V	142	33.08	17.42

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11400.00	57.8 PK	74.0	-16.2	1.06 H	38	47.83	9.97
2	11400.00	45.2 AV	54.0	-8.8	1.06 H	38	35.23	9.97
3	#17100.00	63.5 PK	74.0	-10.5	1.20 H	308	45.78	17.72
4	#17100.00	50.5 AV	54.0	-3.5	1.20 H	308	32.78	17.72
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11400.00	59.4 PK	74.0	-14.6	1.54 V	315	49.43	9.97
2	11400.00	45.7 AV	54.0	-8.3	1.54 V	315	35.73	9.97
3	#17100.00	63.2 PK	74.0	-10.8	1.17 V	155	45.48	17.72
4	#17100.00	50.4 AV	54.0	-3.6	1.17 V	155	32.68	17.72

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11440.00	57.6 PK	74.0	-16.4	1.13 H	51	47.60	10.00
2	11440.00	44.8 AV	54.0	-9.2	1.13 H	51	34.80	10.00
3	#17160.00	63.8 PK	74.0	-10.2	1.27 H	299	45.64	18.16
4	#17160.00	50.4 AV	54.0	-3.6	1.27 H	299	32.24	18.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11440.00	59.0 PK	74.0	-15.0	1.59 V	312	49.00	10.00
2	11440.00	45.3 AV	54.0	-8.7	1.59 V	312	35.30	10.00
3	#17160.00	63.9 PK	74.0	-10.1	1.19 V	172	45.74	18.16
4	#17160.00	50.9 AV	54.0	-3.1	1.19 V	172	32.74	18.16

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	55.2 PK	74.0	-18.8	1.13 H	8	45.16	10.04
2	11490.00	42.6 AV	54.0	-11.4	1.13 H	8	32.56	10.04
3	#17235.00	51.1 PK	74.0	-22.9	1.00 H	117	32.54	18.56
4	#17235.00	39.7 AV	54.0	-14.3	1.00 H	117	21.14	18.56
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	55.9 PK	74.0	-18.1	1.55 V	360	45.86	10.04
2	11490.00	42.8 AV	54.0	-11.2	1.55 V	360	32.76	10.04
3	#17235.00	51.2 PK	74.0	-22.8	1.24 V	310	32.64	18.56
4	#17235.00	39.3 AV	54.0	-14.7	1.24 V	310	20.74	18.56

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	55.6 PK	74.0	-18.4	1.12 H	16	45.52	10.08
2	11570.00	42.9 AV	54.0	-11.1	1.12 H	16	32.82	10.08
3	#17355.00	51.7 PK	74.0	-22.3	1.00 H	132	32.80	18.90
4	#17355.00	40.5 AV	54.0	-13.5	1.00 H	132	21.60	18.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	56.2 PK	74.0	-17.8	1.52 V	359	46.12	10.08
2	11570.00	42.8 AV	54.0	-11.2	1.52 V	359	32.72	10.08
3	#17355.00	51.1 PK	74.0	-22.9	1.16 V	306	32.20	18.90
4	#17355.00	39.1 AV	54.0	-14.9	1.16 V	306	20.20	18.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	55.5 PK	74.0	-18.5	1.13 H	24	45.53	9.97
2	11650.00	43.2 AV	54.0	-10.8	1.13 H	24	33.23	9.97
3	#17475.00	51.4 PK	74.0	-22.6	1.00 H	127	32.29	19.11
4	#17475.00	40.3 AV	54.0	-13.7	1.00 H	127	21.19	19.11
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	56.1 PK	74.0	-17.9	1.55 V	357	46.13	9.97
2	11650.00	42.8 AV	54.0	-11.2	1.55 V	357	32.83	9.97
3	#17475.00	51.4 PK	74.0	-22.6	1.19 V	301	32.29	19.11
4	#17475.00	39.5 AV	54.0	-14.5	1.19 V	301	20.39	19.11

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

802.11ac VHT40

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10380.00	57.2 PK	74.0	-16.8	1.14 H	41	47.76	9.44
2	#10380.00	44.8 AV	54.0	-9.2	1.14 H	41	35.36	9.44
3	15570.00	63.4 PK	74.0	-10.6	1.21 H	297	49.29	14.11
4	15570.00	50.2 AV	54.0	-3.8	1.21 H	297	36.09	14.11
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10380.00	59.1 PK	74.0	-14.9	1.55 V	304	49.66	9.44
2	#10380.00	45.6 AV	54.0	-8.4	1.55 V	304	36.16	9.44
3	15570.00	63.2 PK	74.0	-10.8	1.20 V	159	49.09	14.11
4	15570.00	50.2 AV	54.0	-3.8	1.20 V	159	36.09	14.11

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10460.00	57.7 PK	74.0	-16.3	1.09 H	40	48.09	9.61
2	#10460.00	44.9 AV	54.0	-9.1	1.09 H	40	35.29	9.61
3	15690.00	63.1 PK	74.0	-10.9	1.24 H	293	49.20	13.90
4	15690.00	49.8 AV	54.0	-4.2	1.24 H	293	35.90	13.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10460.00	58.9 PK	74.0	-15.1	1.59 V	312	49.29	9.61
2	#10460.00	45.5 AV	54.0	-8.5	1.59 V	312	35.89	9.61
3	15690.00	63.3 PK	74.0	-10.7	1.21 V	144	49.40	13.90
4	15690.00	50.2 AV	54.0	-3.8	1.21 V	144	36.30	13.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10540.00	57.6 PK	74.0	-16.4	1.15 H	29	47.74	9.86
2	#10540.00	44.8 AV	54.0	-9.2	1.15 H	29	34.94	9.86
3	15810.00	63.2 PK	74.0	-10.8	1.17 H	307	49.22	13.98
4	15810.00	50.3 AV	54.0	-3.7	1.17 H	307	36.32	13.98
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10540.00	58.8 PK	74.0	-15.2	1.57 V	328	48.94	9.86
2	#10540.00	45.3 AV	54.0	-8.7	1.57 V	328	35.44	9.86
3	15810.00	63.1 PK	74.0	-10.9	1.23 V	172	49.12	13.98
4	15810.00	50.2 AV	54.0	-3.8	1.23 V	172	36.22	13.98

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10620.00	57.4 PK	74.0	-16.6	1.09 H	41	47.37	10.03
2	10620.00	45.1 AV	54.0	-8.9	1.09 H	41	35.07	10.03
3	15930.00	63.6 PK	74.0	-10.4	1.18 H	302	49.42	14.18
4	15930.00	50.3 AV	54.0	-3.7	1.18 H	302	36.12	14.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10620.00	58.4 PK	74.0	-15.6	1.56 V	323	48.37	10.03
2	10620.00	45.1 AV	54.0	-8.9	1.56 V	323	35.07	10.03
3	15930.00	63.3 PK	74.0	-10.7	1.24 V	155	49.12	14.18
4	15930.00	50.2 AV	54.0	-3.8	1.24 V	155	36.02	14.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11020.00	58.2 PK	74.0	-15.8	1.13 H	29	48.00	10.20
2	11020.00	45.5 AV	54.0	-8.5	1.13 H	29	35.30	10.20
3	#16530.00	63.5 PK	74.0	-10.5	1.19 H	292	47.23	16.27
4	#16530.00	50.3 AV	54.0	-3.7	1.19 H	292	34.03	16.27
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11020.00	59.0 PK	74.0	-15.0	1.55 V	316	48.80	10.20
2	11020.00	45.5 AV	54.0	-8.5	1.55 V	316	35.30	10.20
3	#16530.00	63.3 PK	74.0	-10.7	1.18 V	164	47.03	16.27
4	#16530.00	50.4 AV	54.0	-3.6	1.18 V	164	34.13	16.27

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 118	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11180.00	57.5 PK	74.0	-16.5	1.15 H	53	47.39	10.11
2	11180.00	45.1 AV	54.0	-8.9	1.15 H	53	34.99	10.11
3	#16770.00	63.4 PK	74.0	-10.6	1.17 H	296	46.15	17.25
4	#16770.00	50.5 AV	54.0	-3.5	1.17 H	296	33.25	17.25
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11180.00	58.9 PK	74.0	-15.1	1.54 V	311	48.79	10.11
2	11180.00	45.5 AV	54.0	-8.5	1.54 V	311	35.39	10.11
3	#16770.00	63.4 PK	74.0	-10.6	1.23 V	146	46.15	17.25
4	#16770.00	50.5 AV	54.0	-3.5	1.23 V	146	33.25	17.25

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11340.00	57.9 PK	74.0	-16.1	1.12 H	49	47.80	10.10
2	11340.00	45.2 AV	54.0	-8.8	1.12 H	49	35.10	10.10
3	#17010.00	63.1 PK	74.0	-10.9	1.16 H	287	45.50	17.60
4	#17010.00	50.2 AV	54.0	-3.8	1.16 H	287	32.60	17.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11340.00	58.9 PK	74.0	-15.1	1.53 V	321	48.80	10.10
2	11340.00	45.6 AV	54.0	-8.4	1.53 V	321	35.50	10.10
3	#17010.00	63.3 PK	74.0	-10.7	1.19 V	157	45.70	17.60
4	#17010.00	50.5 AV	54.0	-3.5	1.19 V	157	32.90	17.60

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 142	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11420.00	57.2 PK	74.0	-16.8	1.11 H	33	47.21	9.99
2	11420.00	44.9 AV	54.0	-9.1	1.11 H	33	34.91	9.99
3	#17130.00	63.5 PK	74.0	-10.5	1.18 H	312	45.56	17.94
4	#17130.00	50.2 AV	54.0	-3.8	1.18 H	312	32.26	17.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11420.00	59.1 PK	74.0	-14.9	1.62 V	308	49.11	9.99
2	11420.00	45.8 AV	54.0	-8.2	1.62 V	308	35.81	9.99
3	#17130.00	63.8 PK	74.0	-10.2	1.22 V	147	45.86	17.94
4	#17130.00	50.6 AV	54.0	-3.4	1.22 V	147	32.66	17.94

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11510.00	55.8 PK	74.0	-18.2	1.11 H	20	45.75	10.05
2	11510.00	43.5 AV	54.0	-10.5	1.11 H	20	33.45	10.05
3	#17265.00	50.8 PK	74.0	-23.2	1.04 H	141	32.16	18.64
4	#17265.00	39.7 AV	54.0	-14.3	1.04 H	141	21.06	18.64
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11510.00	56.2 PK	74.0	-17.8	1.53 V	360	46.15	10.05
2	11510.00	43.0 AV	54.0	-11.0	1.53 V	360	32.95	10.05
3	#17265.00	51.3 PK	74.0	-22.7	1.24 V	306	32.66	18.64
4	#17265.00	39.2 AV	54.0	-14.8	1.24 V	306	20.56	18.64

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11590.00	55.3 PK	74.0	-18.7	1.07 H	15	45.21	10.09
2	11590.00	42.8 AV	54.0	-11.2	1.07 H	15	32.71	10.09
3	#17385.00	51.7 PK	74.0	-22.3	1.01 H	132	32.70	19.00
4	#17385.00	40.4 AV	54.0	-13.6	1.01 H	132	21.40	19.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11590.00	56.0 PK	74.0	-18.0	1.53 V	360	45.91	10.09
2	11590.00	42.7 AV	54.0	-11.3	1.53 V	360	32.61	10.09
3	#17385.00	51.6 PK	74.0	-22.4	1.23 V	315	32.60	19.00
4	#17385.00	40.0 AV	54.0	-14.0	1.23 V	315	21.00	19.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

802.11ac VHT80

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10420.00	58.2 PK	74.0	-15.8	1.08 H	26	48.70	9.50
2	#10420.00	45.4 AV	54.0	-8.6	1.08 H	26	35.90	9.50
3	15630.00	63.4 PK	74.0	-10.6	1.17 H	304	49.31	14.09
4	15630.00	50.3 AV	54.0	-3.7	1.17 H	304	36.21	14.09
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10420.00	59.2 PK	74.0	-14.8	1.56 V	332	49.70	9.50
2	#10420.00	45.6 AV	54.0	-8.4	1.56 V	332	36.10	9.50
3	15630.00	62.9 PK	74.0	-11.1	1.14 V	157	48.81	14.09
4	15630.00	50.2 AV	54.0	-3.8	1.14 V	157	36.11	14.09

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 58	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10580.00	57.9 PK	74.0	-16.1	1.04 H	33	47.89	10.01
2	#10580.00	45.4 AV	54.0	-8.6	1.04 H	33	35.39	10.01
3	15870.00	63.4 PK	74.0	-10.6	1.23 H	288	49.26	14.14
4	15870.00	50.3 AV	54.0	-3.7	1.23 H	288	36.16	14.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10580.00	58.7 PK	74.0	-15.3	1.59 V	309	48.69	10.01
2	#10580.00	45.4 AV	54.0	-8.6	1.59 V	309	35.39	10.01
3	15870.00	63.7 PK	74.0	-10.3	1.15 V	163	49.56	14.14
4	15870.00	50.5 AV	54.0	-3.5	1.15 V	163	36.36	14.14

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 106	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11060.00	58.0 PK	74.0	-16.0	1.10 H	31	47.87	10.13
2	11060.00	45.5 AV	54.0	-8.5	1.10 H	31	35.37	10.13
3	#16590.00	63.5 PK	74.0	-10.5	1.21 H	285	47.08	16.42
4	#16590.00	50.5 AV	54.0	-3.5	1.21 H	285	34.08	16.42
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11060.00	58.9 PK	74.0	-15.1	1.57 V	317	48.77	10.13
2	11060.00	45.2 AV	54.0	-8.8	1.57 V	317	35.07	10.13
3	#16590.00	64.0 PK	74.0	-10.0	1.22 V	158	47.58	16.42
4	#16590.00	50.8 AV	54.0	-3.2	1.22 V	158	34.38	16.42

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 122	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11220.00	57.5 PK	74.0	-16.5	1.14 H	51	47.35	10.15
2	11220.00	45.0 AV	54.0	-9.0	1.14 H	51	34.85	10.15
3	#16830.00	63.3 PK	74.0	-10.7	1.23 H	308	45.81	17.49
4	#16830.00	50.0 AV	54.0	-4.0	1.23 H	308	32.51	17.49
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11220.00	59.7 PK	74.0	-14.3	1.54 V	324	49.55	10.15
2	11220.00	46.0 AV	54.0	-8.0	1.54 V	324	35.85	10.15
3	#16830.00	63.8 PK	74.0	-10.2	1.18 V	150	46.31	17.49
4	#16830.00	50.3 AV	54.0	-3.7	1.18 V	150	32.81	17.49

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 138	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11380.00	57.8 PK	74.0	-16.2	1.11 H	43	47.79	10.01
2	11380.00	45.0 AV	54.0	-9.0	1.11 H	43	34.99	10.01
3	#17070.00	62.8 PK	74.0	-11.2	1.19 H	282	45.12	17.68
4	#17070.00	49.8 AV	54.0	-4.2	1.19 H	282	32.12	17.68
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11380.00	59.0 PK	74.0	-15.0	1.56 V	326	48.99	10.01
2	11380.00	45.7 AV	54.0	-8.3	1.56 V	326	35.69	10.01
3	#17070.00	63.3 PK	74.0	-10.7	1.18 V	174	45.62	17.68
4	#17070.00	50.5 AV	54.0	-3.5	1.18 V	174	32.82	17.68

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11550.00	55.1 PK	74.0	-18.9	1.07 H	35	45.03	10.07
2	11550.00	42.8 AV	54.0	-11.2	1.07 H	35	32.73	10.07
3	#17325.00	51.5 PK	74.0	-22.5	1.02 H	141	32.68	18.82
4	#17325.00	40.3 AV	54.0	-13.7	1.02 H	141	21.48	18.82
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11550.00	55.7 PK	74.0	-18.3	1.49 V	360	45.63	10.07
2	11550.00	42.7 AV	54.0	-11.3	1.49 V	360	32.63	10.07
3	#17325.00	51.2 PK	74.0	-22.8	1.26 V	326	32.38	18.82
4	#17325.00	39.3 AV	54.0	-14.7	1.26 V	326	20.48	18.82

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

4.4.9 TEST RESULTS (CONDUCTED MEASUREMENT)

Radiated versus Conducted Measurement	
☒ Conducted measurement	☐ Radiated measurement
<u>For Radiated measurement:</u> The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation) <u>For Conducted measurement:</u> The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).	

Conducted Measurement Factor
a. The composite gain will be used when signal support the correlated signal. (Composite gain = $3.08\text{dBi} + 10\log(2) = 6.09\text{dBi}$ Composite gain = $4.76\text{dBi} + 10\log(2) = 7.77\text{dBi}$) b. For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands. c. For the band edge the gain for the specific band may have been used. d. In restricted bands below 1000 MHz, add upper bound on ground plane reflection: For $f = 30 - 1000$ MHz, add 4.7 dB. Note: The conducted emission test was considered some factor to compute test result.

BELOW 1GHz WORST-CASE DATA

802.11a – Channel 157


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	86.5025	31.71	40	-8.29	-73.32	-75.66	7.77	-63.55
2	136.9425	32.04	43.5	-11.46	-74.48	-73.56	7.77	-63.22
3	286.3225	32.69	46	-13.31	-71.88	-75.59	7.77	-62.57
4	468.925	32.52	46	-13.48	-72.09	-75.66	7.77	-62.74
5	702.695	32.75	46	-13.25	-71.78	-75.62	7.77	-62.51
6	940.83	33.5	46	-12.5	-73.42	-71.81	7.77	-61.76

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

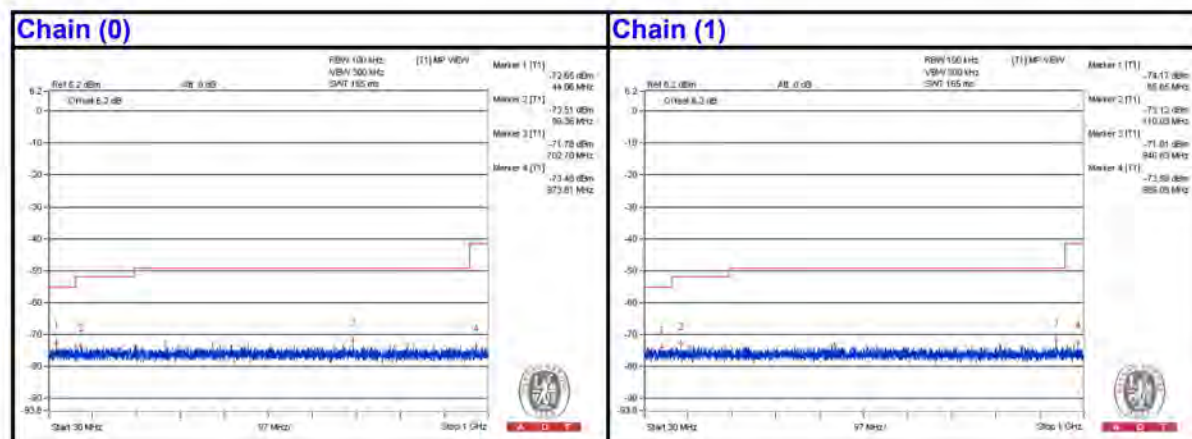

ABOVE 1GHz DATA
802.11a - Channel 36

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3459.375 PK	54.99	74	-19.01	-49.09	-49.67	6.09	-40.27
2	3453.125 AV	43.83	54	-10.17	-70.42	-57.75	6.09	-51.43
3	6906.25 PK	57.4	74	-16.6	-45.7	-48.75	6.09	-37.86
4	6906.25 AV	49.44	54	-4.56	-52.77	-59.37	6.09	-45.82
5	10356.25 PK	55.38	74	-18.62	-49.01	-48.96	6.09	-39.88
6	10362.5 AV	39.48	54	-14.52	-65.52	-64.33	6.09	-55.78
7	15535.5 PK	54.66	74	-19.34	-50.57	-48.98	6.09	-40.6
8	15532.625 AV	43.54	54	-10.46	-60.77	-60.88	6.09	-51.72

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

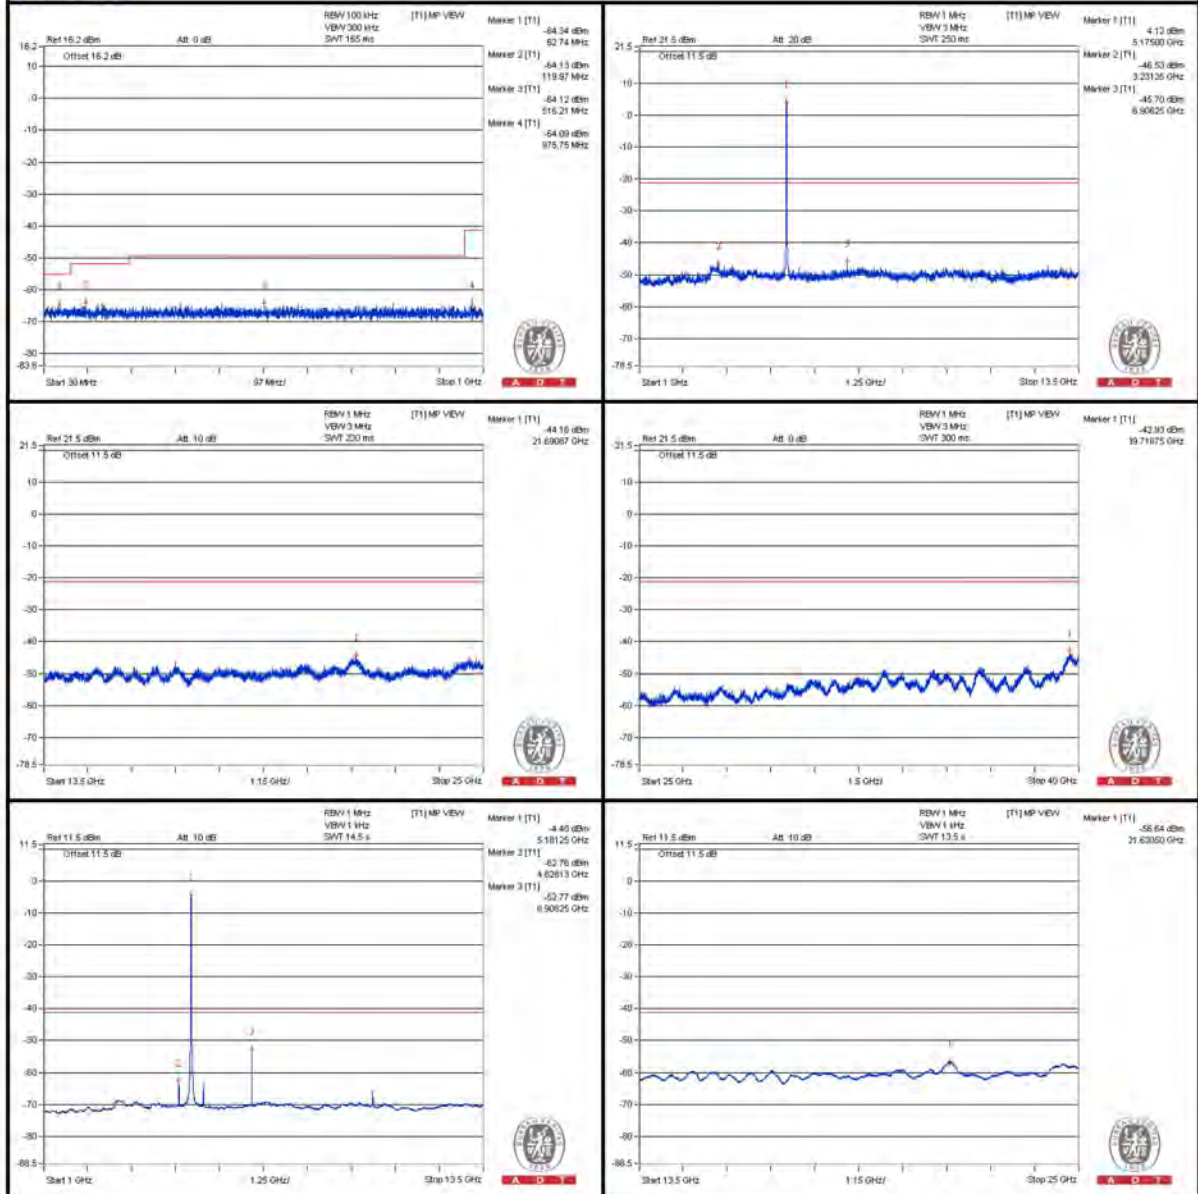

Chain (1)

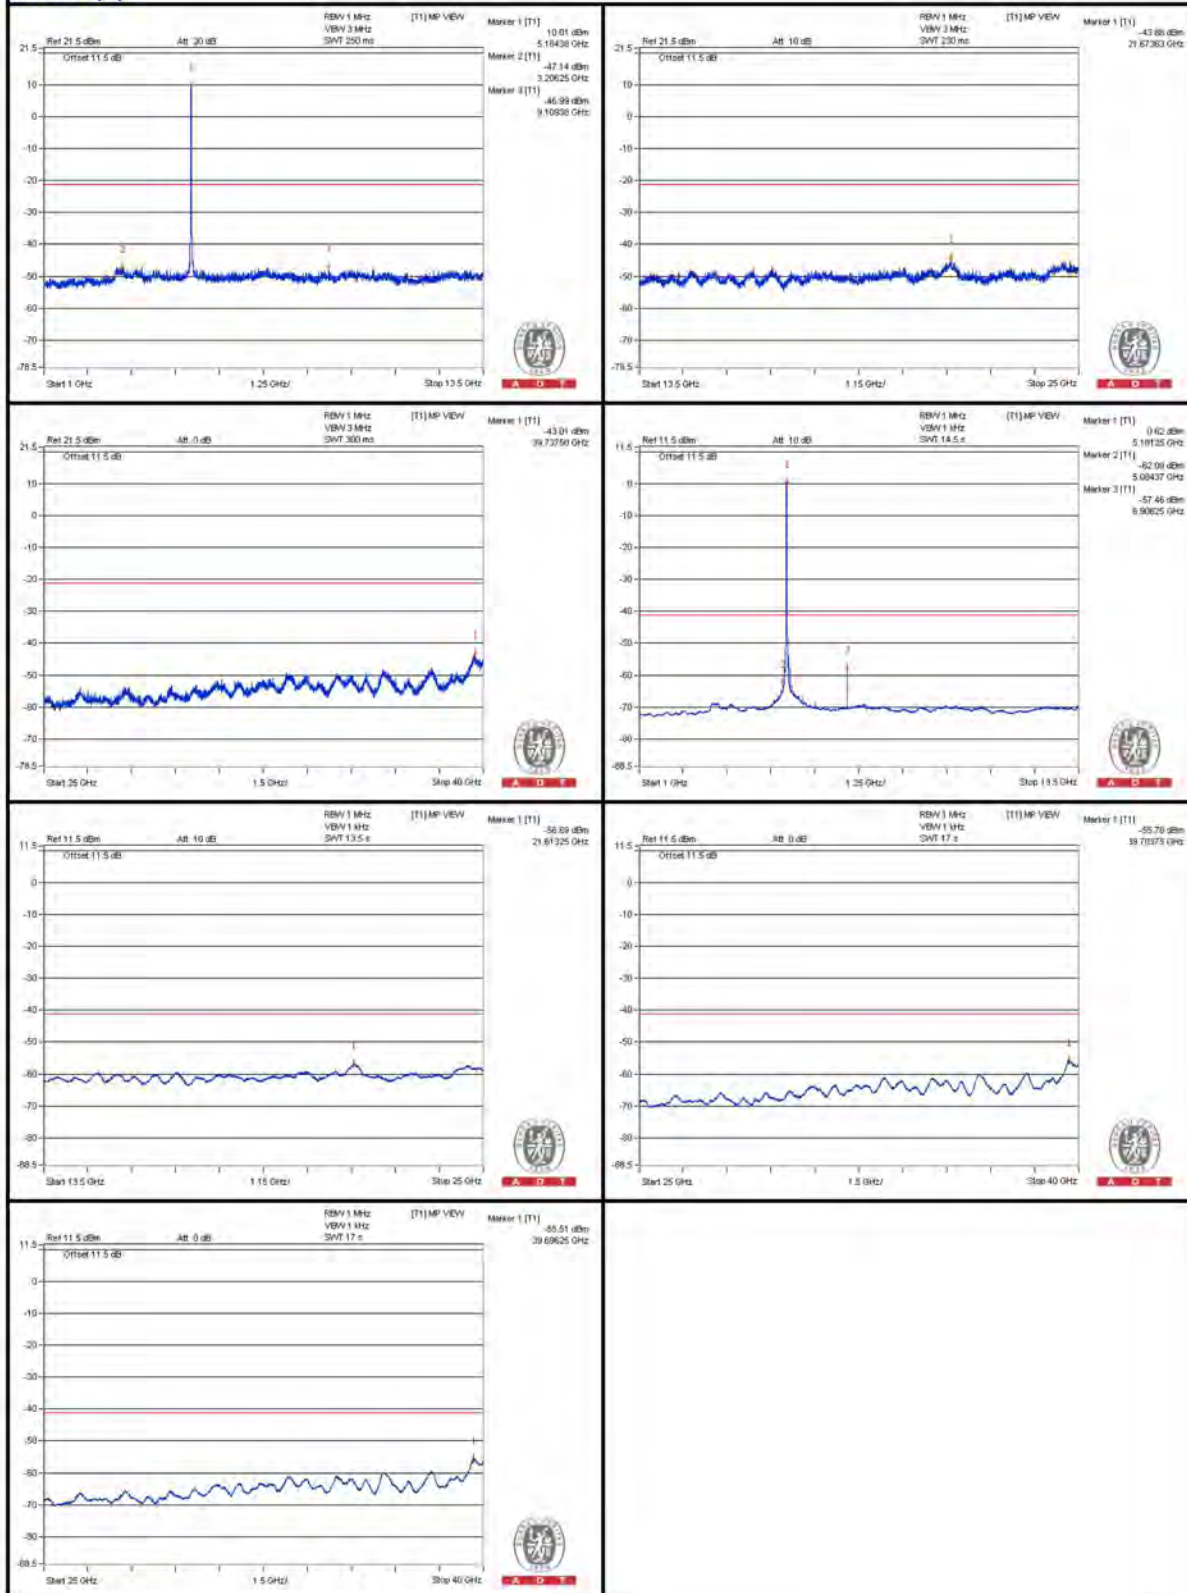

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5145.95 PK	69.31	74	-4.69	-40.45	-32.72	6.09	-25.95
2	5150 AV	50.09	54	-3.91	-53.49	-55.21	6.09	-45.17

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

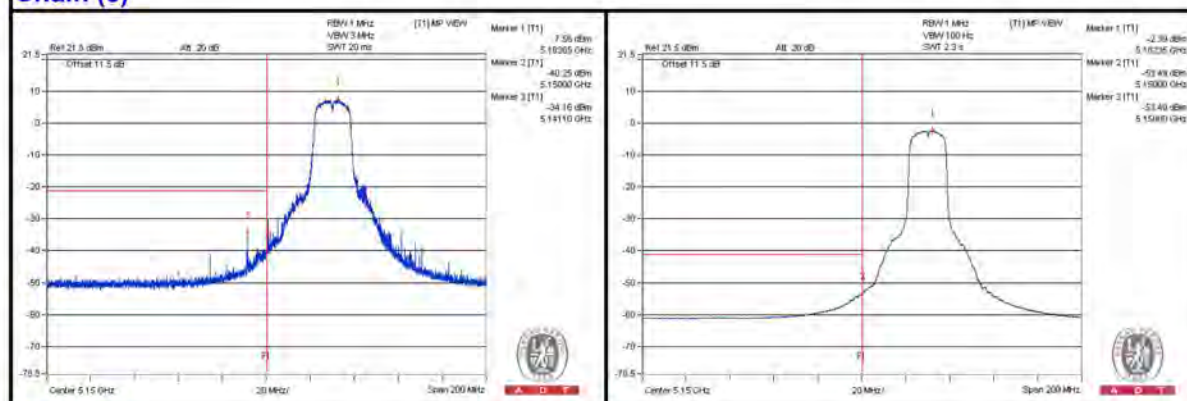

Chain (1)

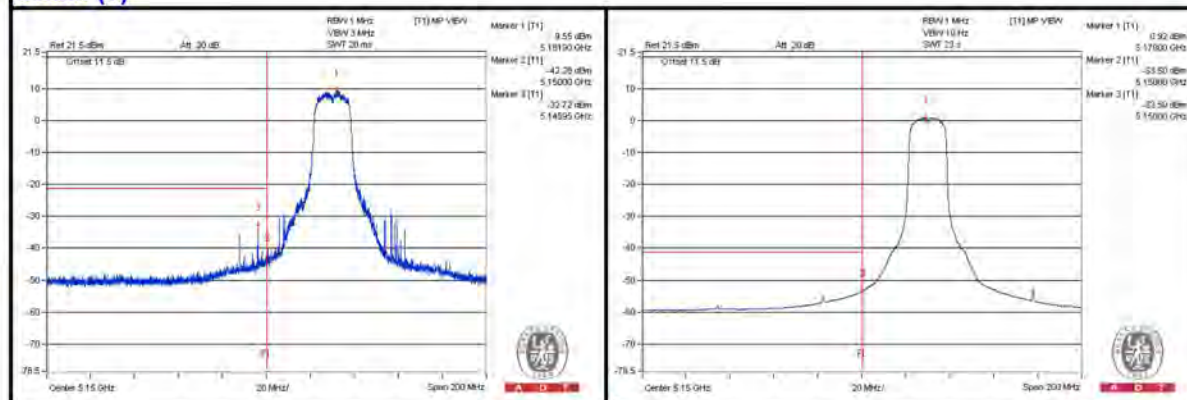

802.11a - Channel 40

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3459.375 PK	55.08	74	-18.92	-49.49	-49.08	6.09	-40.18
2	3465.625 AV	45.05	54	-8.95	-70.07	-56.49	6.09	-50.21
3	6934.375 PK	56.45	74	-17.55	-46.67	-49.64	6.09	-38.81
4	6934.375 AV	48.38	54	-5.62	-53.79	-60.6	6.09	-46.88
5	10409.375 PK	55.51	74	-18.49	-49.14	-48.58	6.09	-39.75
6	10403.125 AV	40.75	54	-13.25	-64.87	-62.63	6.09	-54.51
7	15601.625 PK	55.25	74	-18.75	-49.06	-49.17	6.09	-40.01
8	15598.75 AV	43.46	54	-10.54	-60.23	-61.7	6.09	-51.8

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

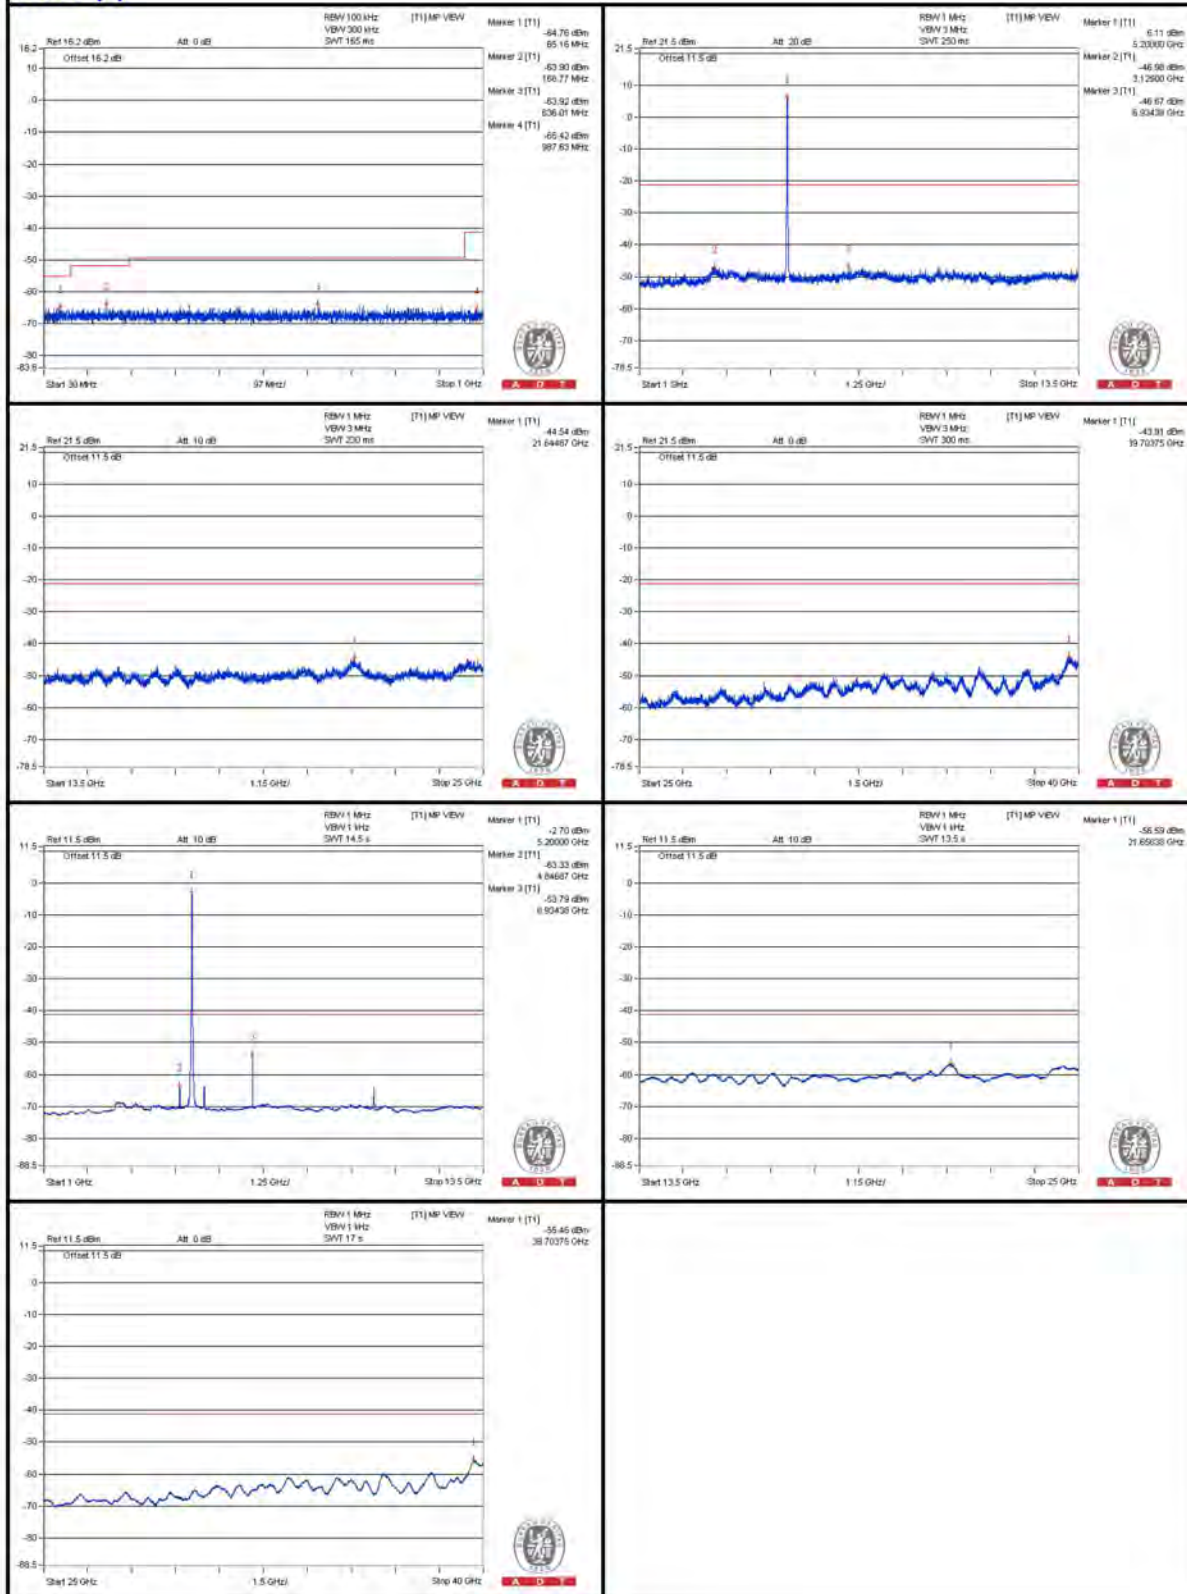

Chain (1)

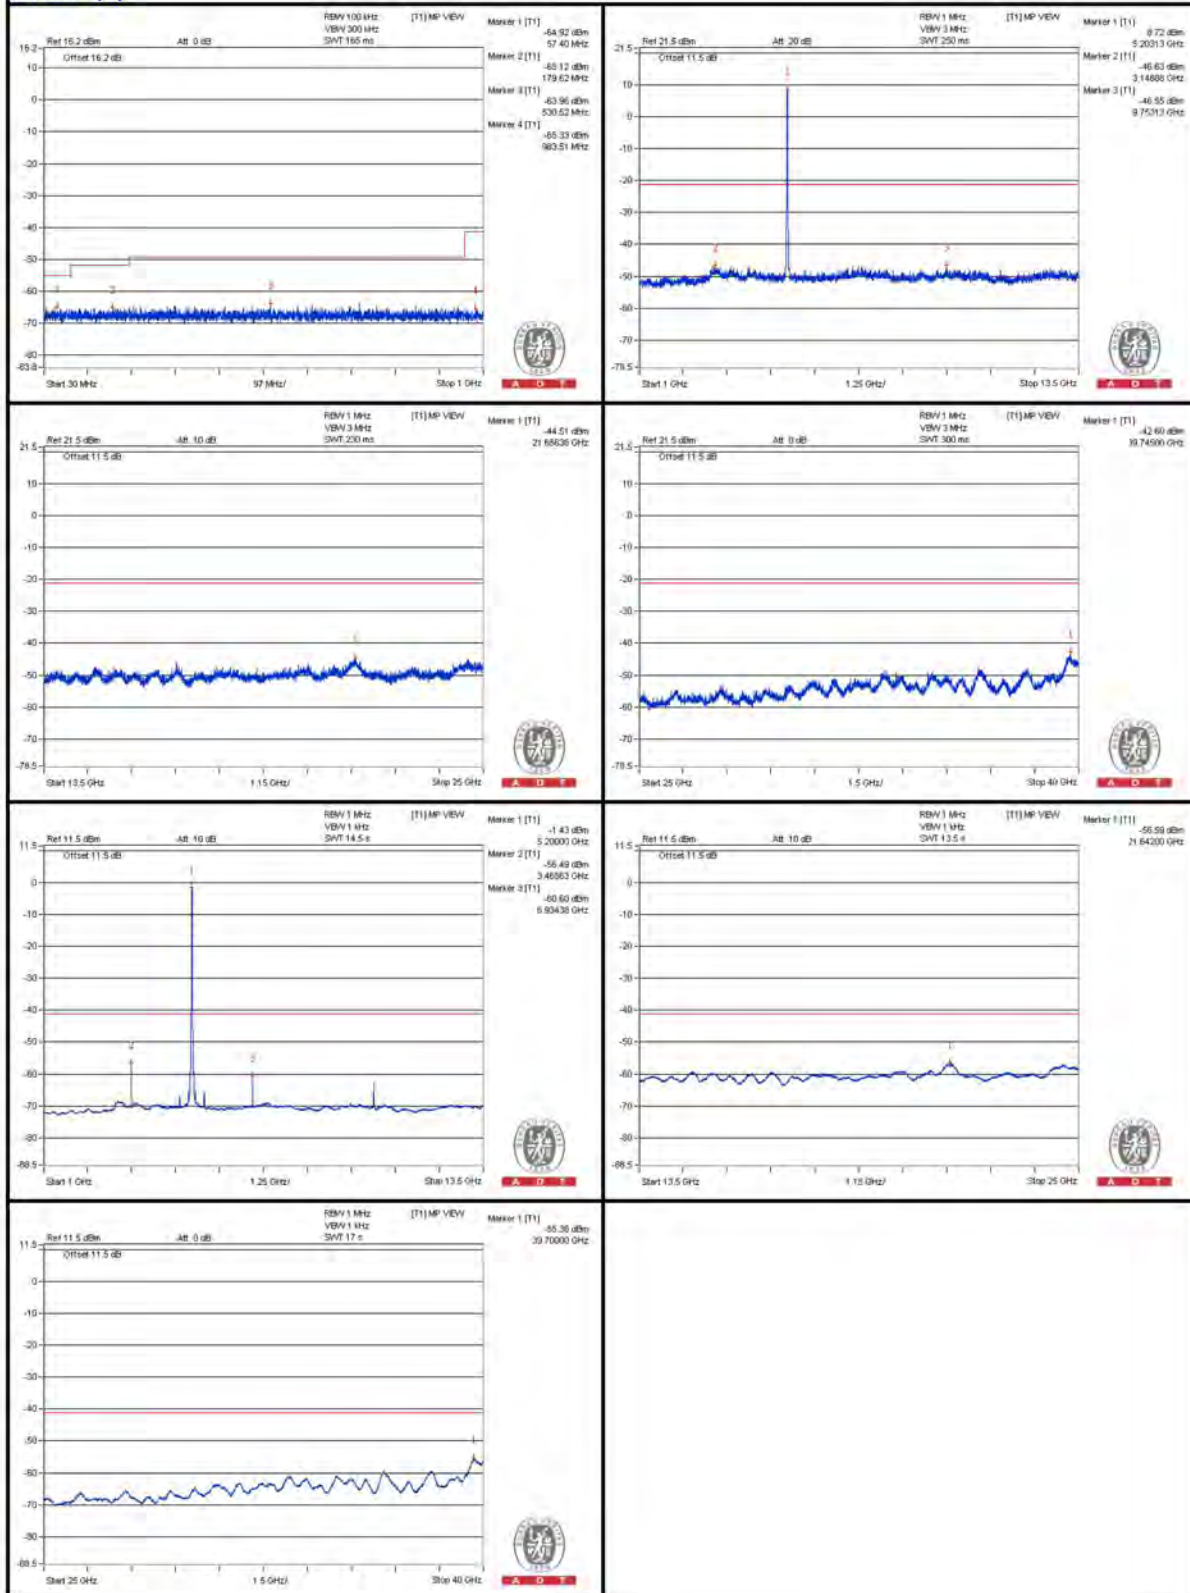

802.11a - Channel 48

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3493.75 PK	55.42	74	-18.58	-50.34	-47.88	6.09	-39.84
2	3493.75 AV	47.08	54	-6.92	-70	-54.39	6.09	-48.18
3	6987.5 PK	56.62	74	-17.38	-46.46	-49.55	6.09	-38.64
4	6987.5 AV	47.17	54	-6.83	-54.78	-63.08	6.09	-48.09
5	10484.375 PK	56.01	74	-17.99	-48.81	-47.94	6.09	-39.25
6	10478.125 AV	41.92	54	-12.08	-63.05	-61.9	6.09	-53.34
7	15713.75 PK	54.23	74	-19.77	-49.62	-50.72	6.09	-41.03
8	15722.375 AV	43.14	54	-10.86	-60.74	-61.77	6.09	-52.12

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)



Chain (1)

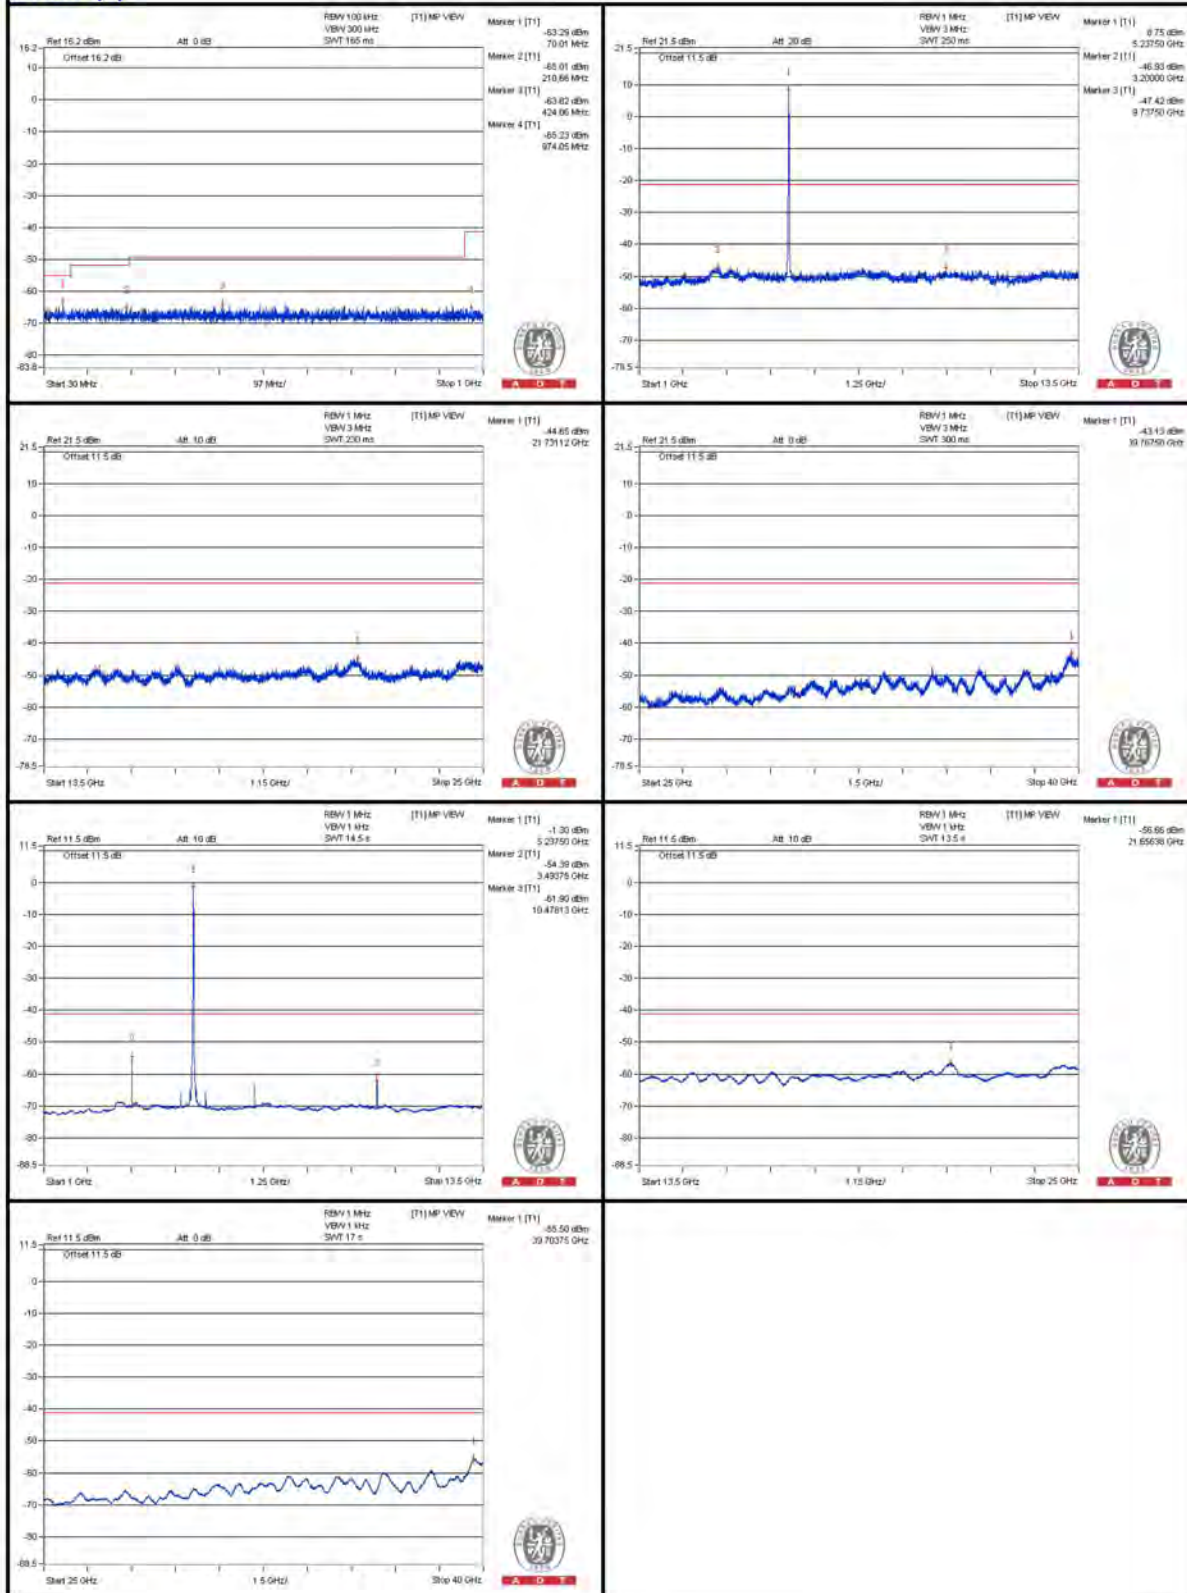

802.11a - Channel 52

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3506.25 PK	56.69	74	-17.31	-48.15	-47.24	6.09	-38.57
2	3506.25 AV	47.74	54	-6.26	-69.33	-53.73	6.09	-47.52
3	7012.5 PK	55.93	74	-18.07	-47.03	-50.52	6.09	-39.33
4	7012.5 AV	46.18	54	-7.82	-55.78	-64.01	6.09	-49.08
5	10525 PK	56.65	74	-17.35	-47.7	-47.72	6.09	-38.61
6	10521.875 AV	43	54	-11	-63.21	-60.06	6.09	-52.26
7	15771.25 PK	54.85	74	-19.15	-49.02	-50.07	6.09	-40.41
8	15779.875 AV	43.8	54	-10.2	-60.05	-61.13	6.09	-51.46

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

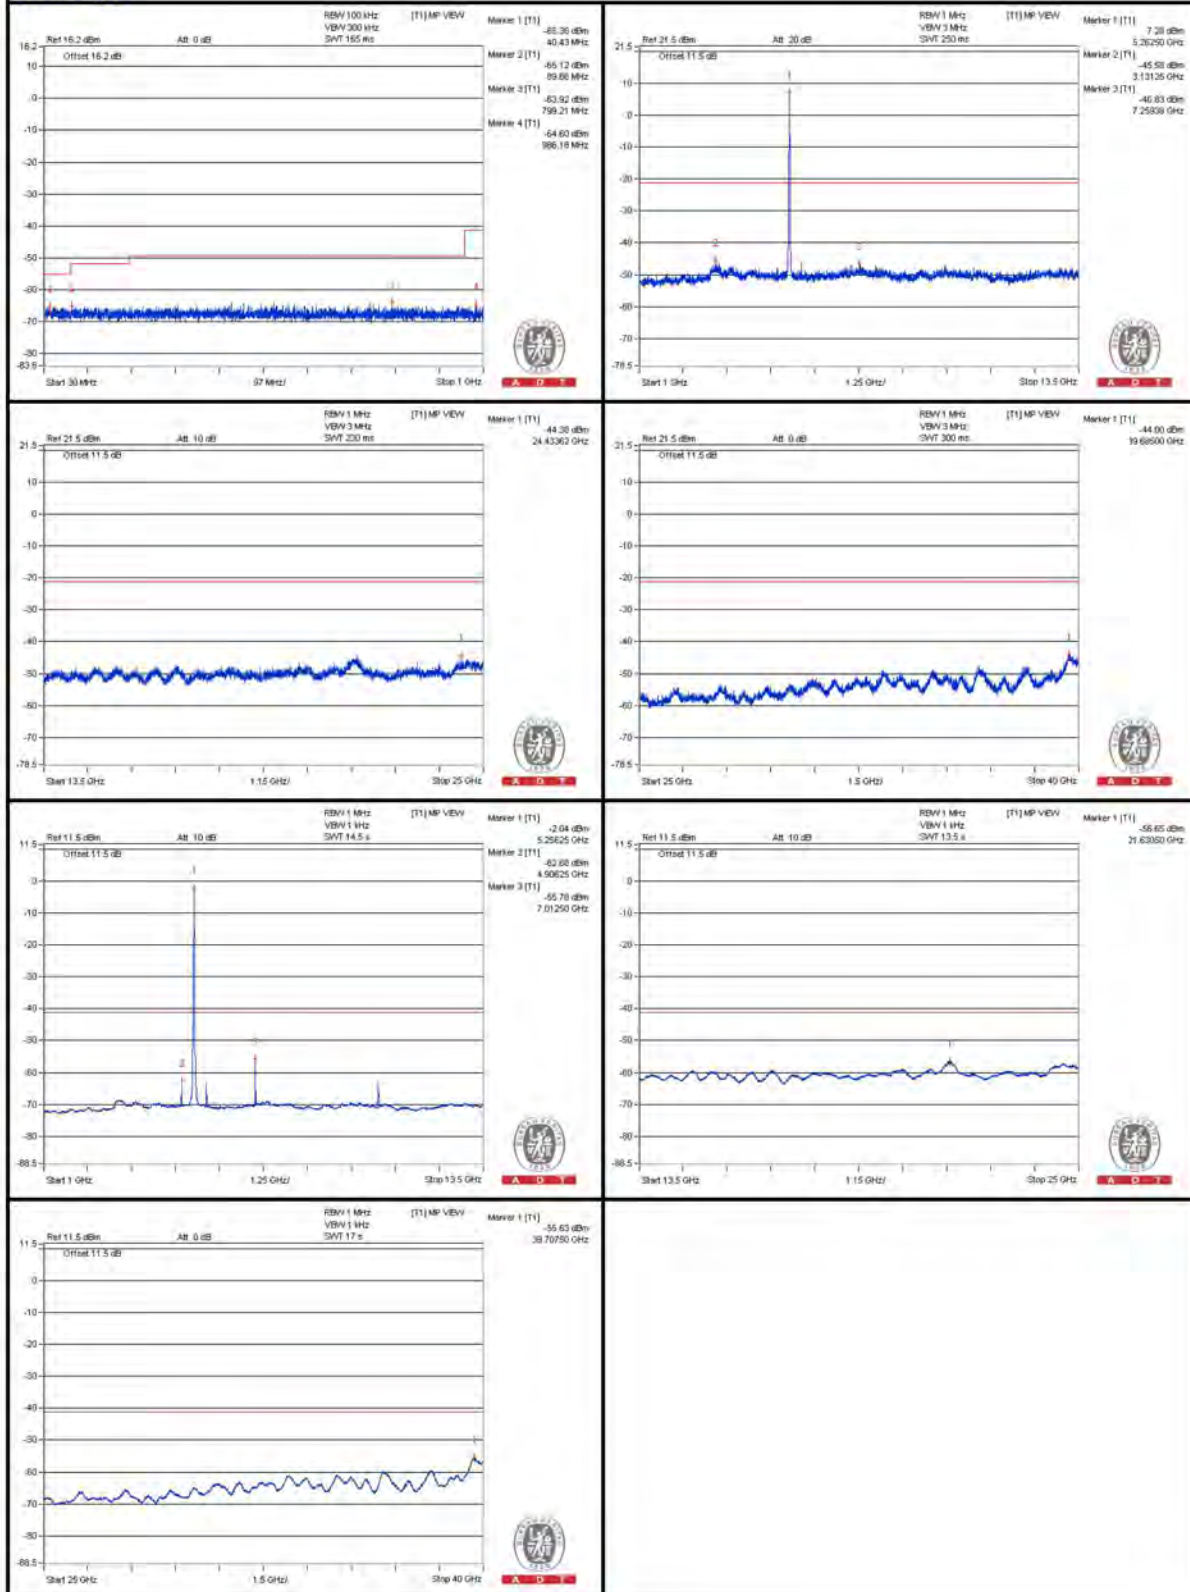

Chain (1)

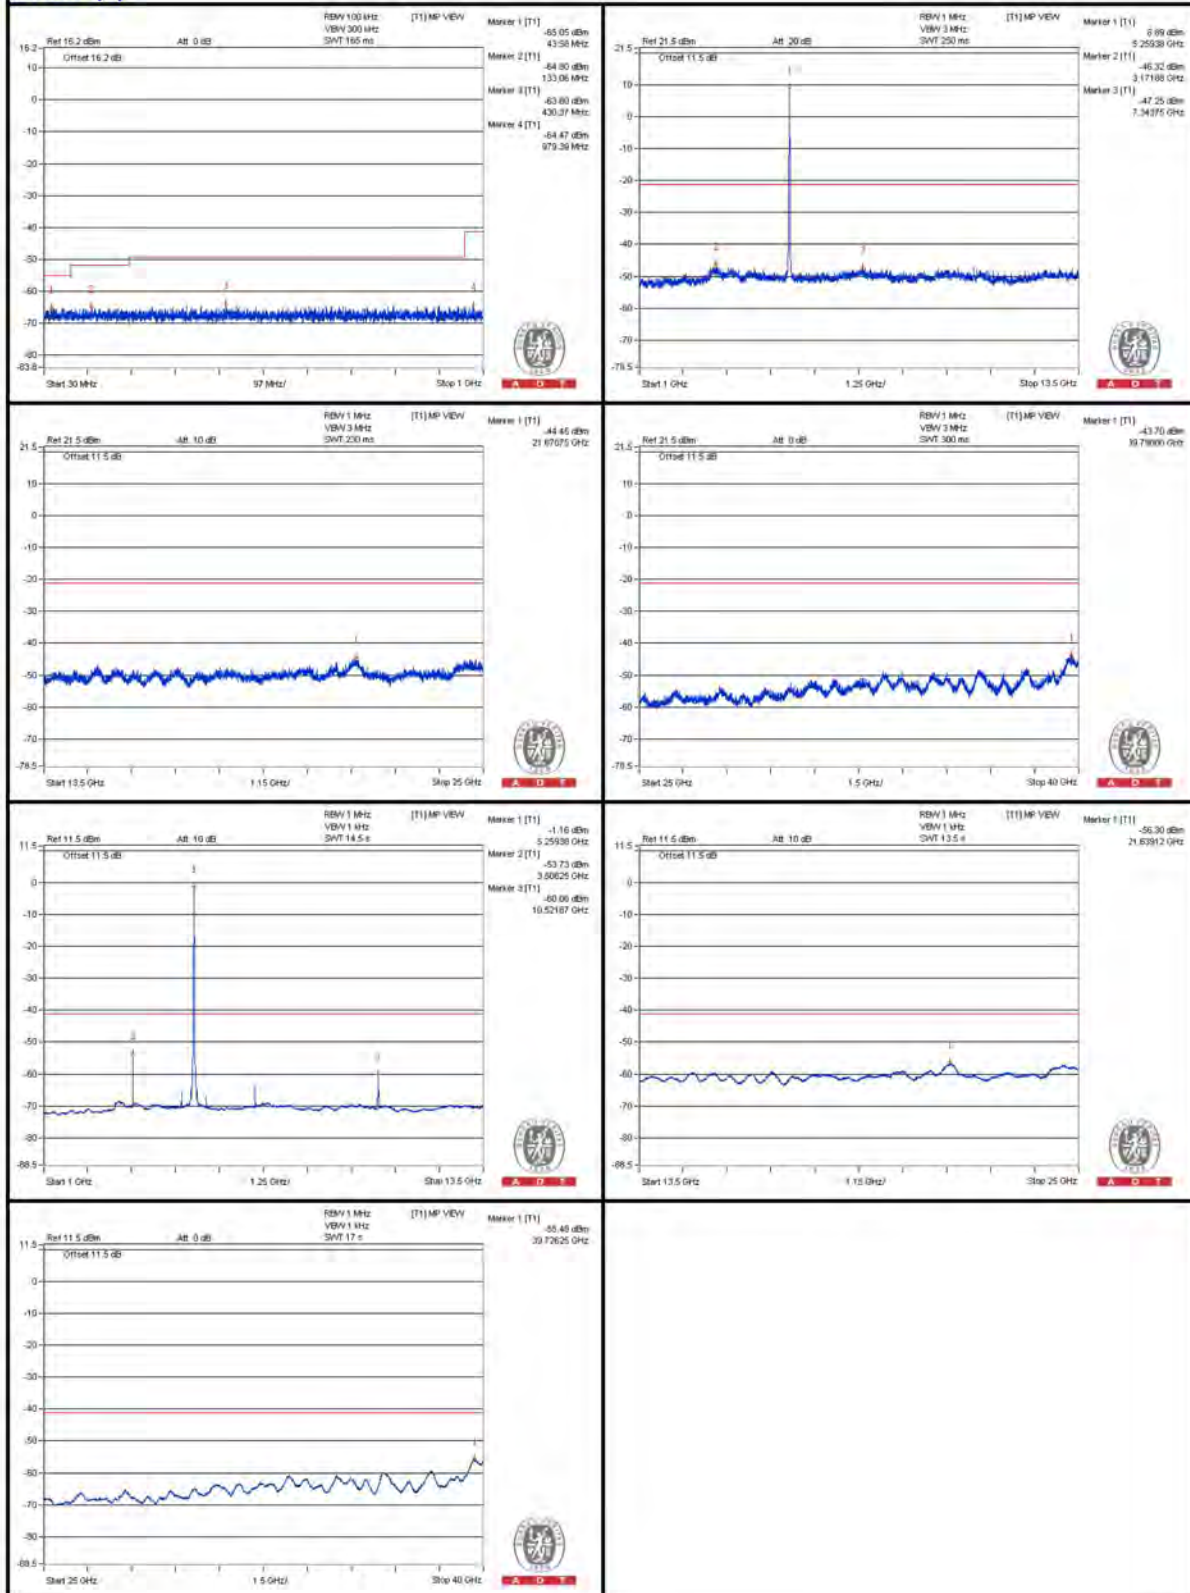

802.11a - Channel 60

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3528.125 PK	55.61	74	-18.39	-48.42	-49.1	6.09	-39.65
2	3531.25 AV	40.68	54	-13.32	-69.67	-61.25	6.09	-54.58
3	7075 PK	56.05	74	-17.95	-48.36	-48.27	6.09	-39.21
4	7065.625 AV	46.43	54	-7.57	-56.62	-59.82	6.09	-48.83
5	10603.125 PK	56.56	74	-17.44	-48.56	-47.16	6.09	-38.7
6	10600 AV	42.58	54	-11.42	-62.42	-61.23	6.09	-52.68
7	15909.25 PK	54.95	74	-19.05	-49.35	-49.47	6.09	-40.31
8	15892 AV	43.83	54	-10.17	-60.28	-60.79	6.09	-51.43

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

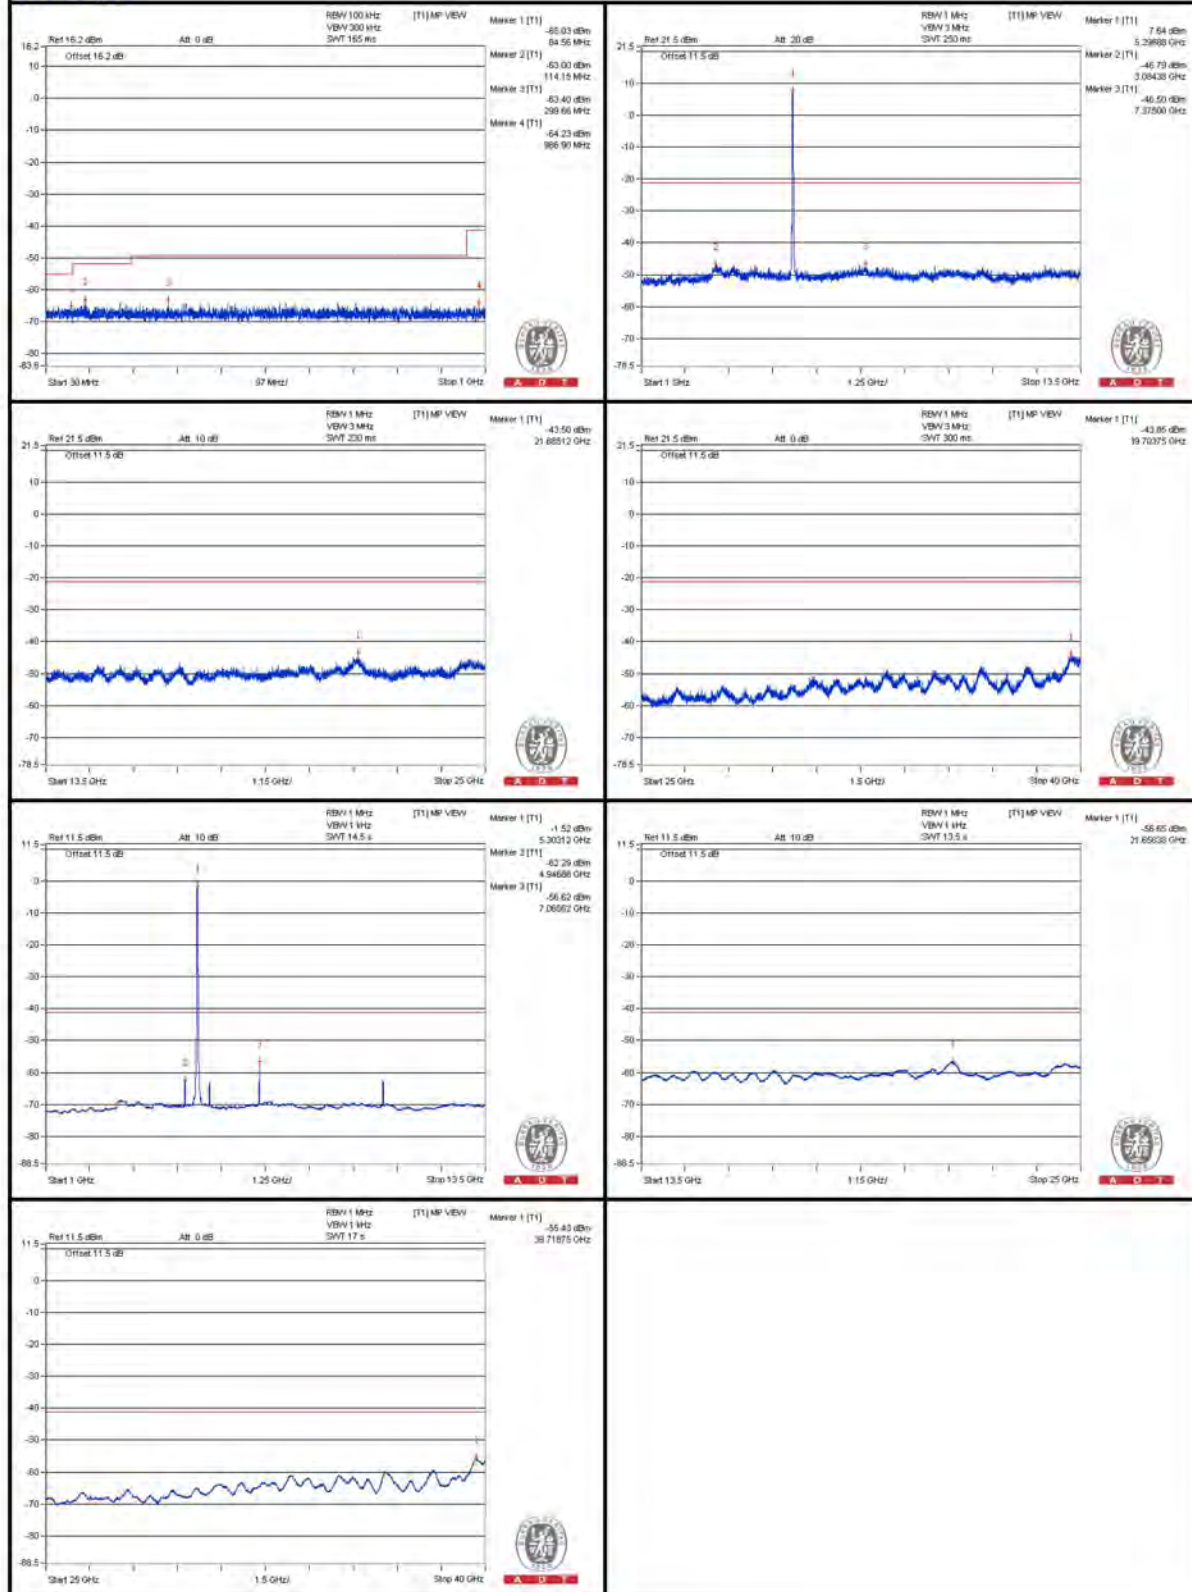

Chain (1)

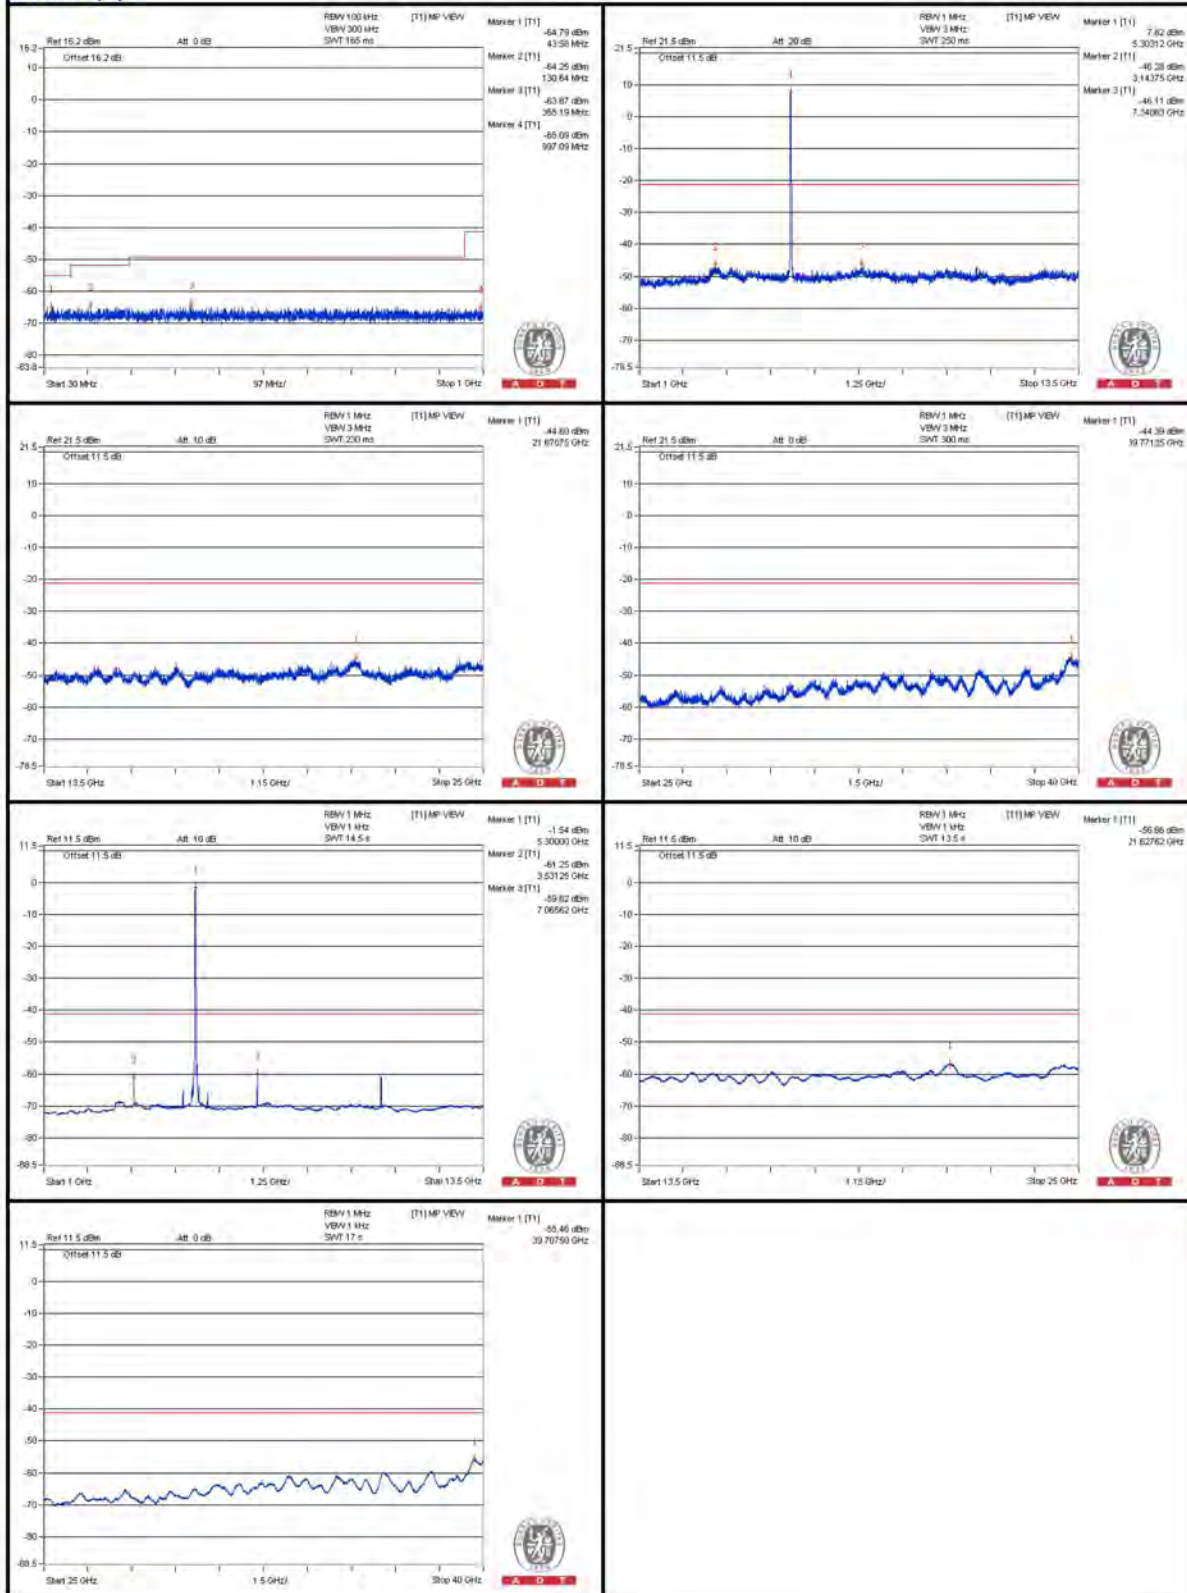

802.11a - Channel 64

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3546.875 PK	56.57	74	-17.43	-49.35	-46.65	6.09	-38.69
2	3546.875 AV	42.48	54	-11.52	-69.4	-59.27	6.09	-52.78
3	7093.75 PK	56.1	74	-17.9	-47.36	-49.41	6.09	-39.16
4	7093.75 AV	43.75	54	-10.25	-60.22	-61.04	6.09	-51.51
5	10640.625 PK	56.77	74	-17.23	-50.14	-45.99	6.09	-38.49
6	10640.625 AV	42.06	54	-11.94	-65.12	-60.61	6.09	-53.2
7	15958.125 PK	53.65	74	-20.35	-51.11	-50.34	6.09	-41.61
8	15961 AV	42.92	54	-11.08	-61.26	-61.62	6.09	-52.34

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

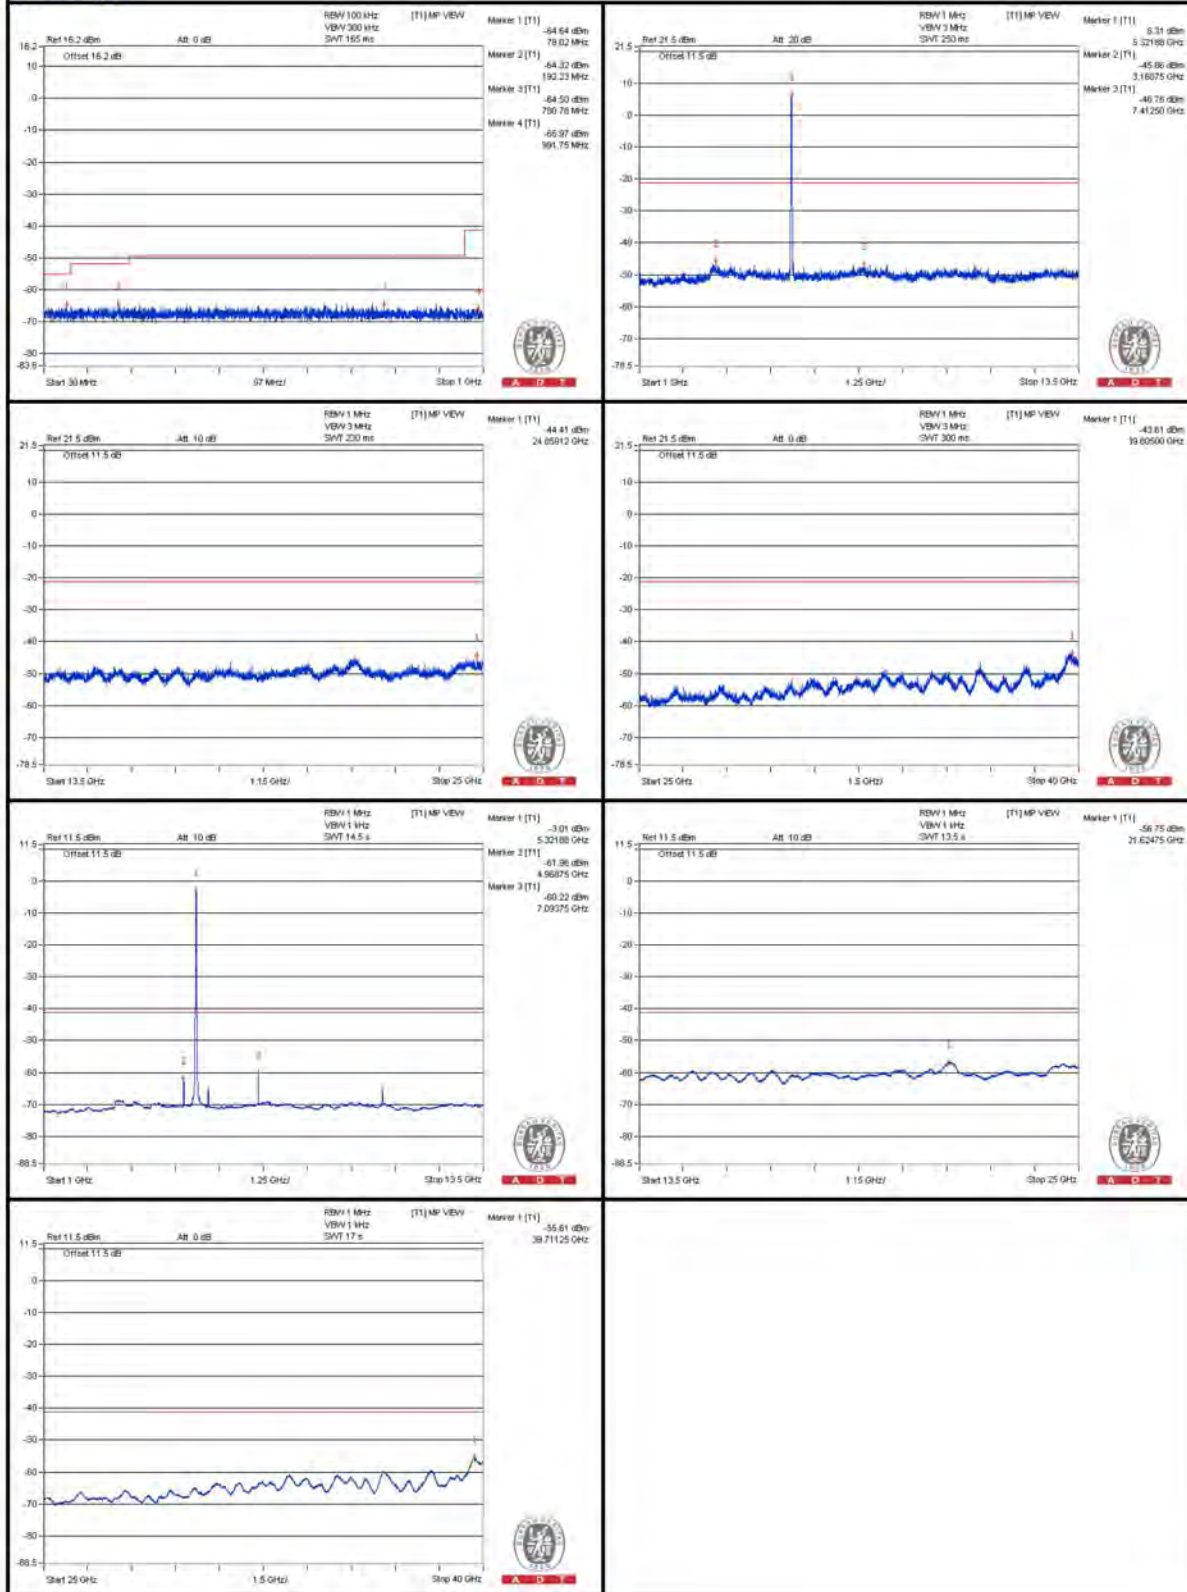

Chain (1)

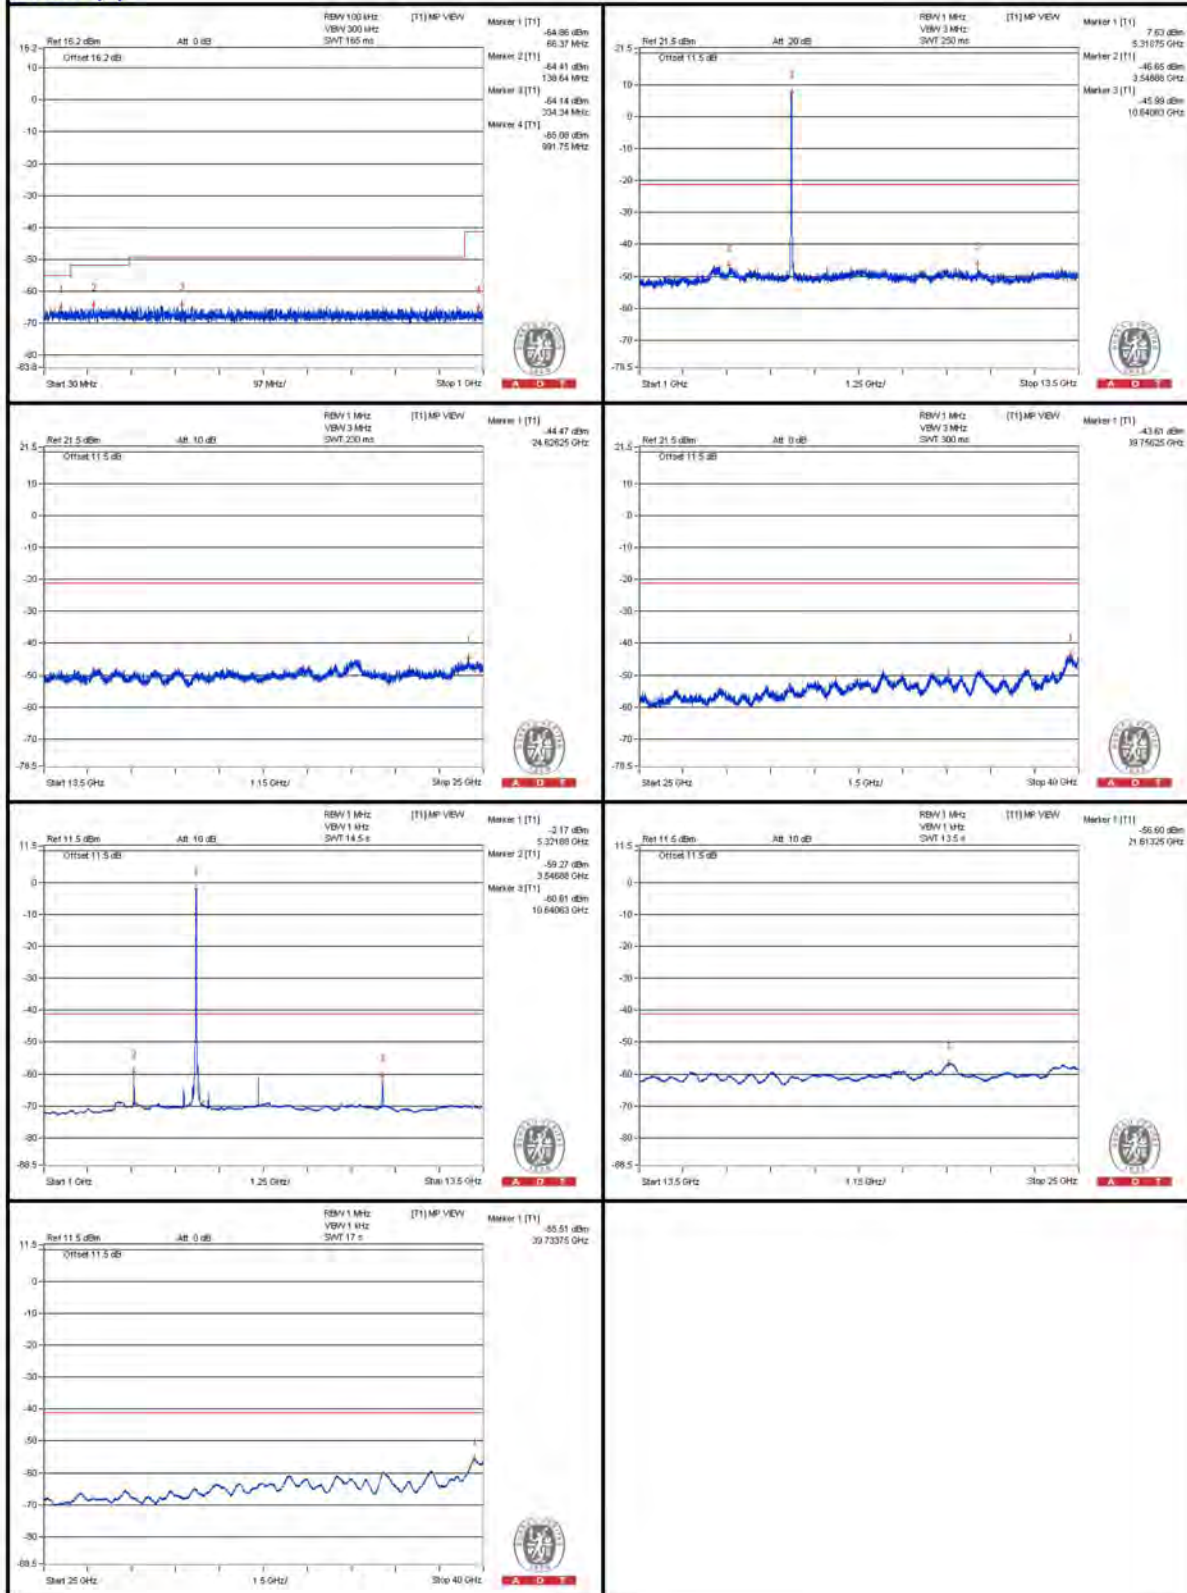

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.3 PK	70.95	74	-3.05	-30.52	-46.1	6.09	-24.31
2	5350 AV	49.62	54	-4.38	-53.53	-56.41	6.09	-45.64

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

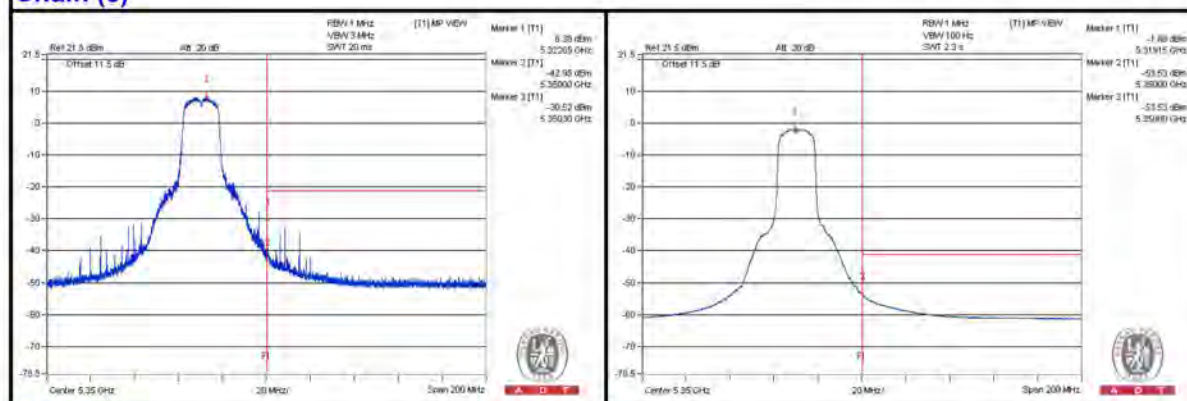

Chain (1)

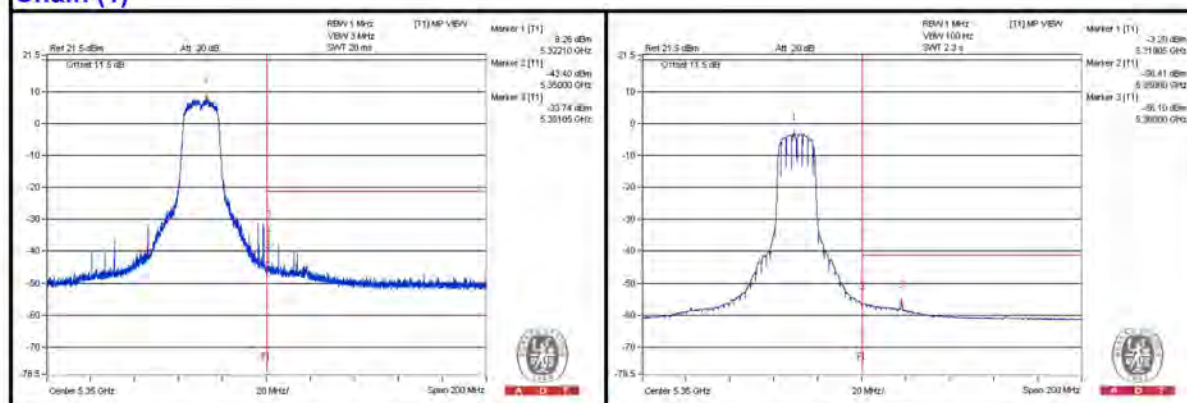

802.11a - Channel 100

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3665.625 PK	58.98	74	-15.02	-49.13	-45.66	7.77	-36.28
2	3665.625 AV	52	54	-2	-65.47	-51.19	7.77	-43.26
3	7334.375 PK	58.72	74	-15.28	-46.19	-48.86	7.77	-36.54
4	7334.375 AV	50.47	54	-3.53	-52.77	-65.79	7.77	-44.79
5	11003.125 PK	57.51	74	-16.49	-49.09	-48.03	7.77	-37.75
6	11003.125 AV	42.84	54	-11.16	-63.54	-62.88	7.77	-52.42
7	16504.375 PK	56.41	74	-17.59	-49.25	-50.04	7.77	-38.85
8	16490 AV	45.81	54	-8.19	-59.88	-60.61	7.77	-49.45

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

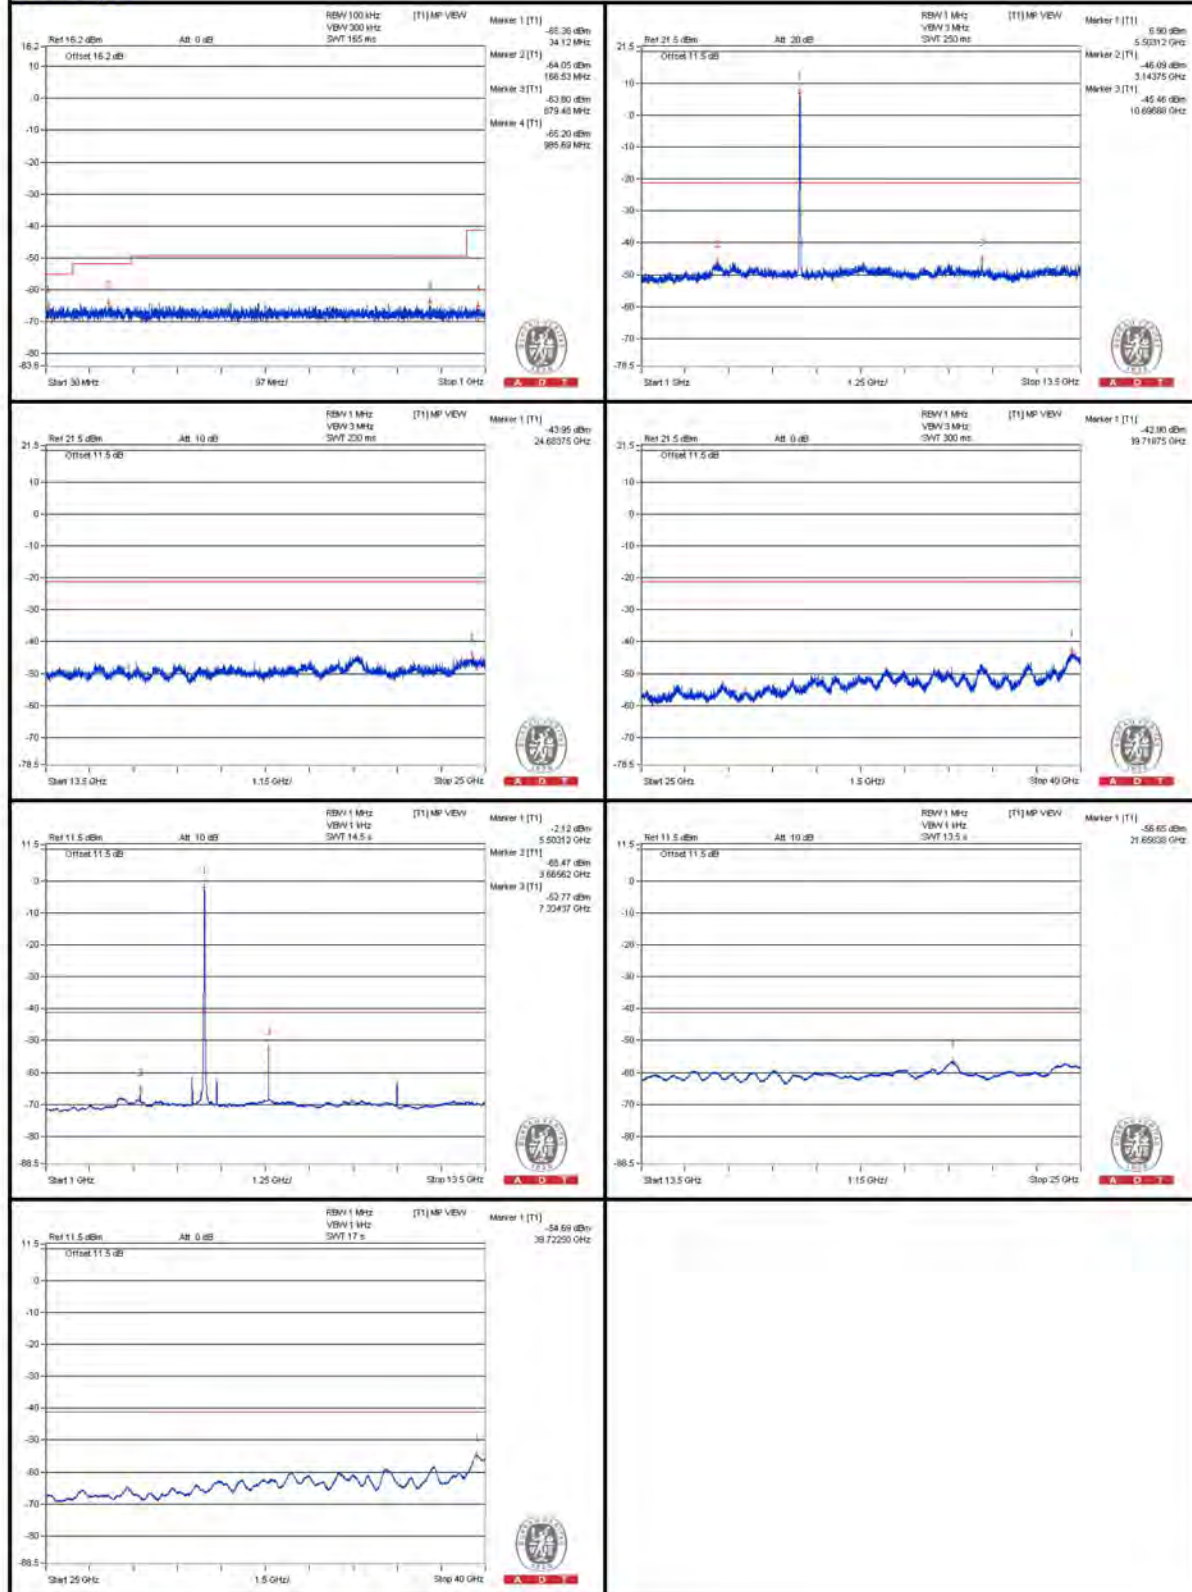

Chain (1)

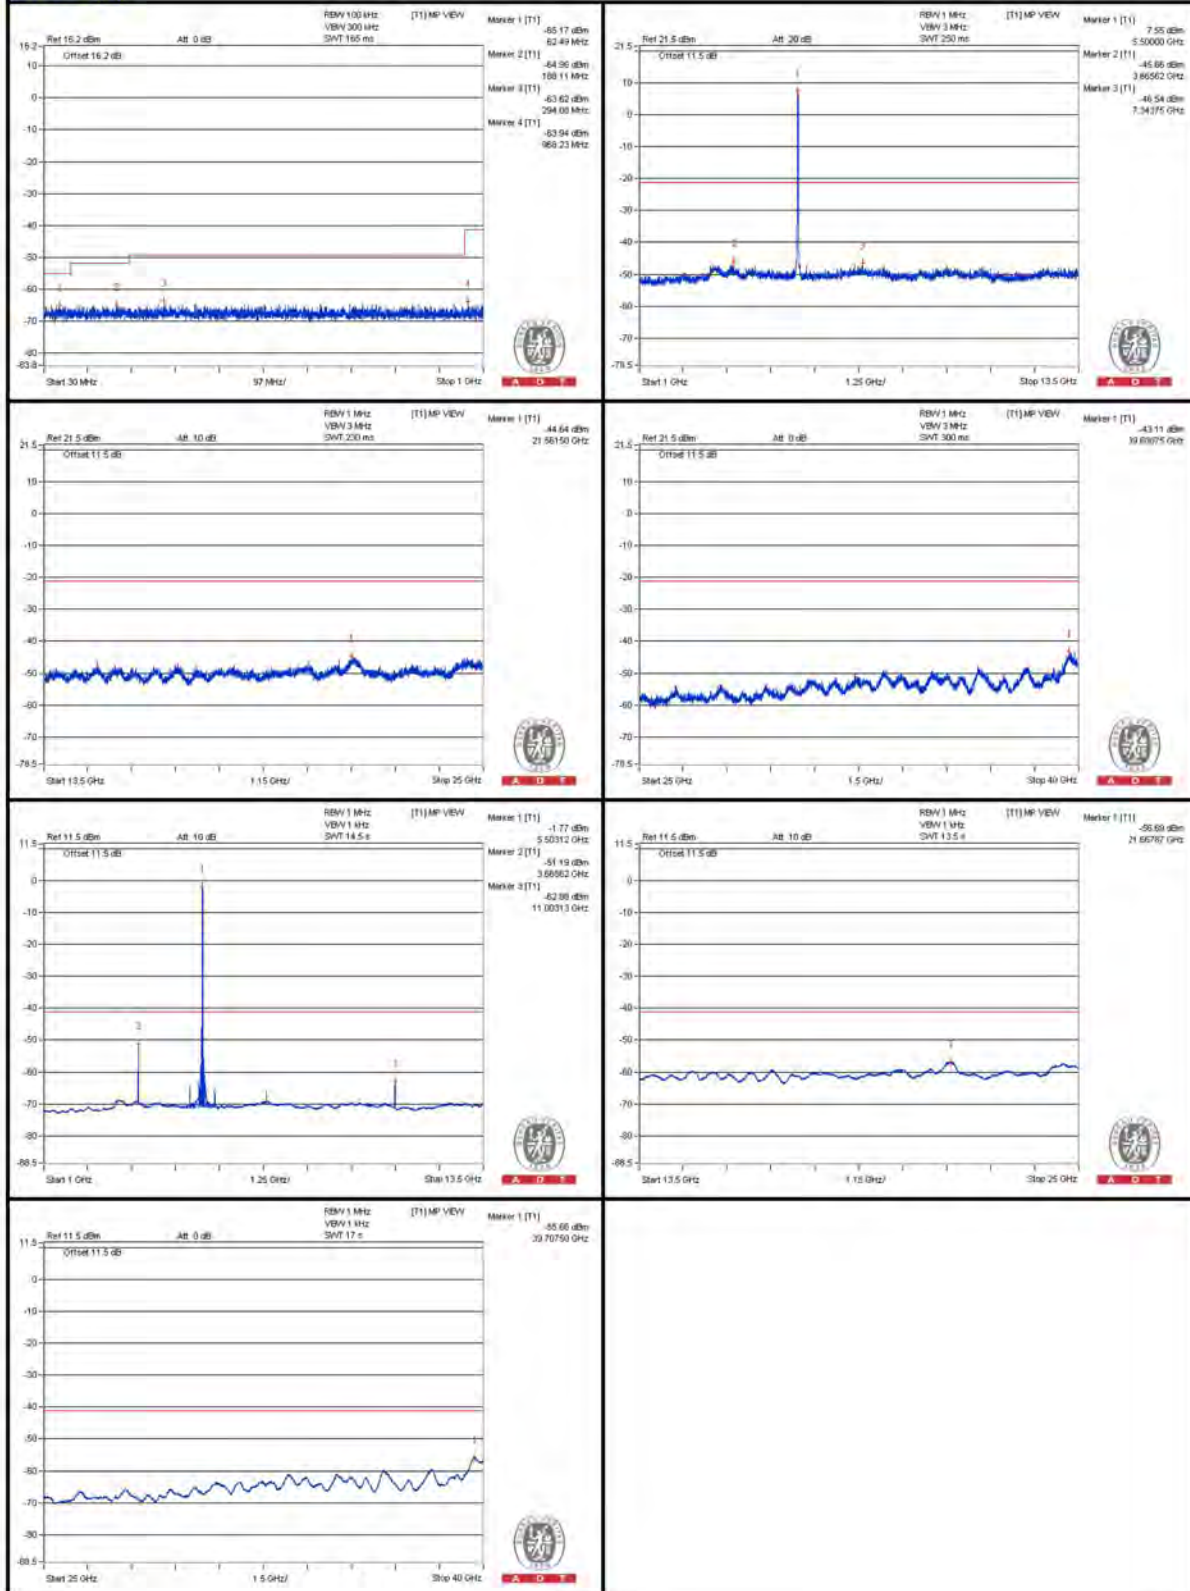

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5469.5625 PK	70.16	74	-3.84	-33.26	-43.49	7.77	-25.1
2	5470 AV	51.89	54	-2.11	-54.2	-54.1	7.77	-43.37

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

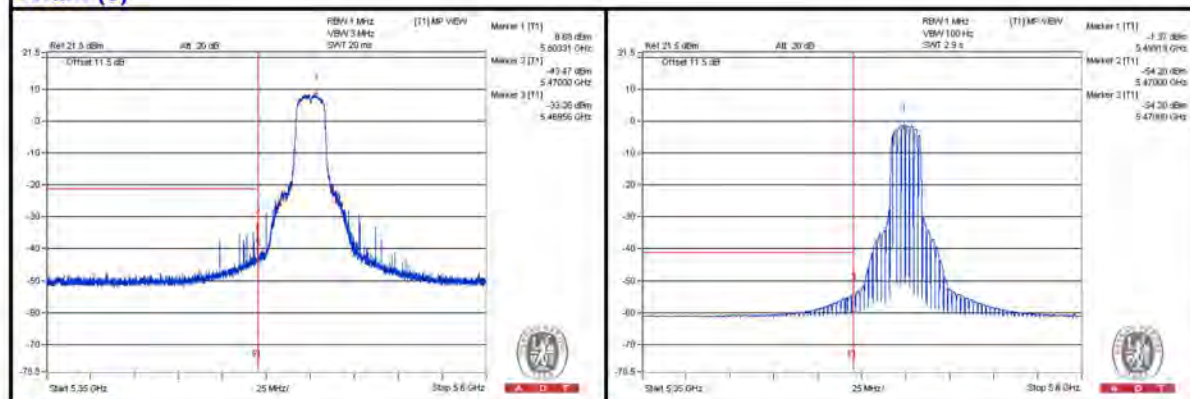

Chain (1)

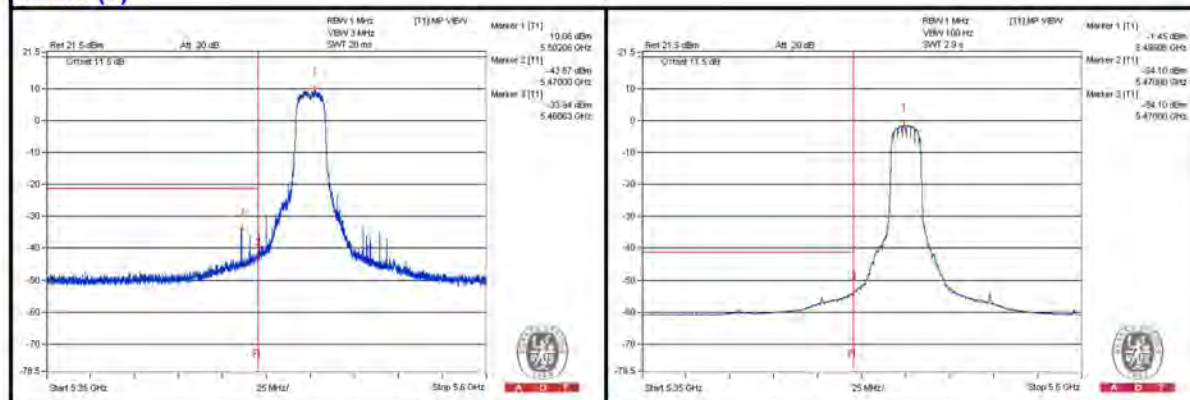

802.11a - Channel 120

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3734.375 PK	58.99	74	-15.01	-49.16	-45.63	7.77	-36.27
2	3731.25 AV	50.71	54	-3.29	-64.49	-52.59	7.77	-44.55
3	7468.75 PK	57.09	74	-16.91	-48.31	-49.71	7.77	-38.17
4	7465.625 AV	48.14	54	-5.86	-55.82	-62.03	7.77	-47.12
5	11200 PK	57.51	74	-16.49	-50.48	-47.19	7.77	-37.75
6	11200 AV	41.47	54	-12.53	-65.98	-63.51	7.77	-53.79
7	16809.125 PK	55.55	74	-18.45	-50.43	-50.55	7.77	-39.71
8	16797.625 AV	44.76	54	-9.24	-61.25	-61.31	7.77	-50.5

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


Chain (0)





A D T

Chain (1)

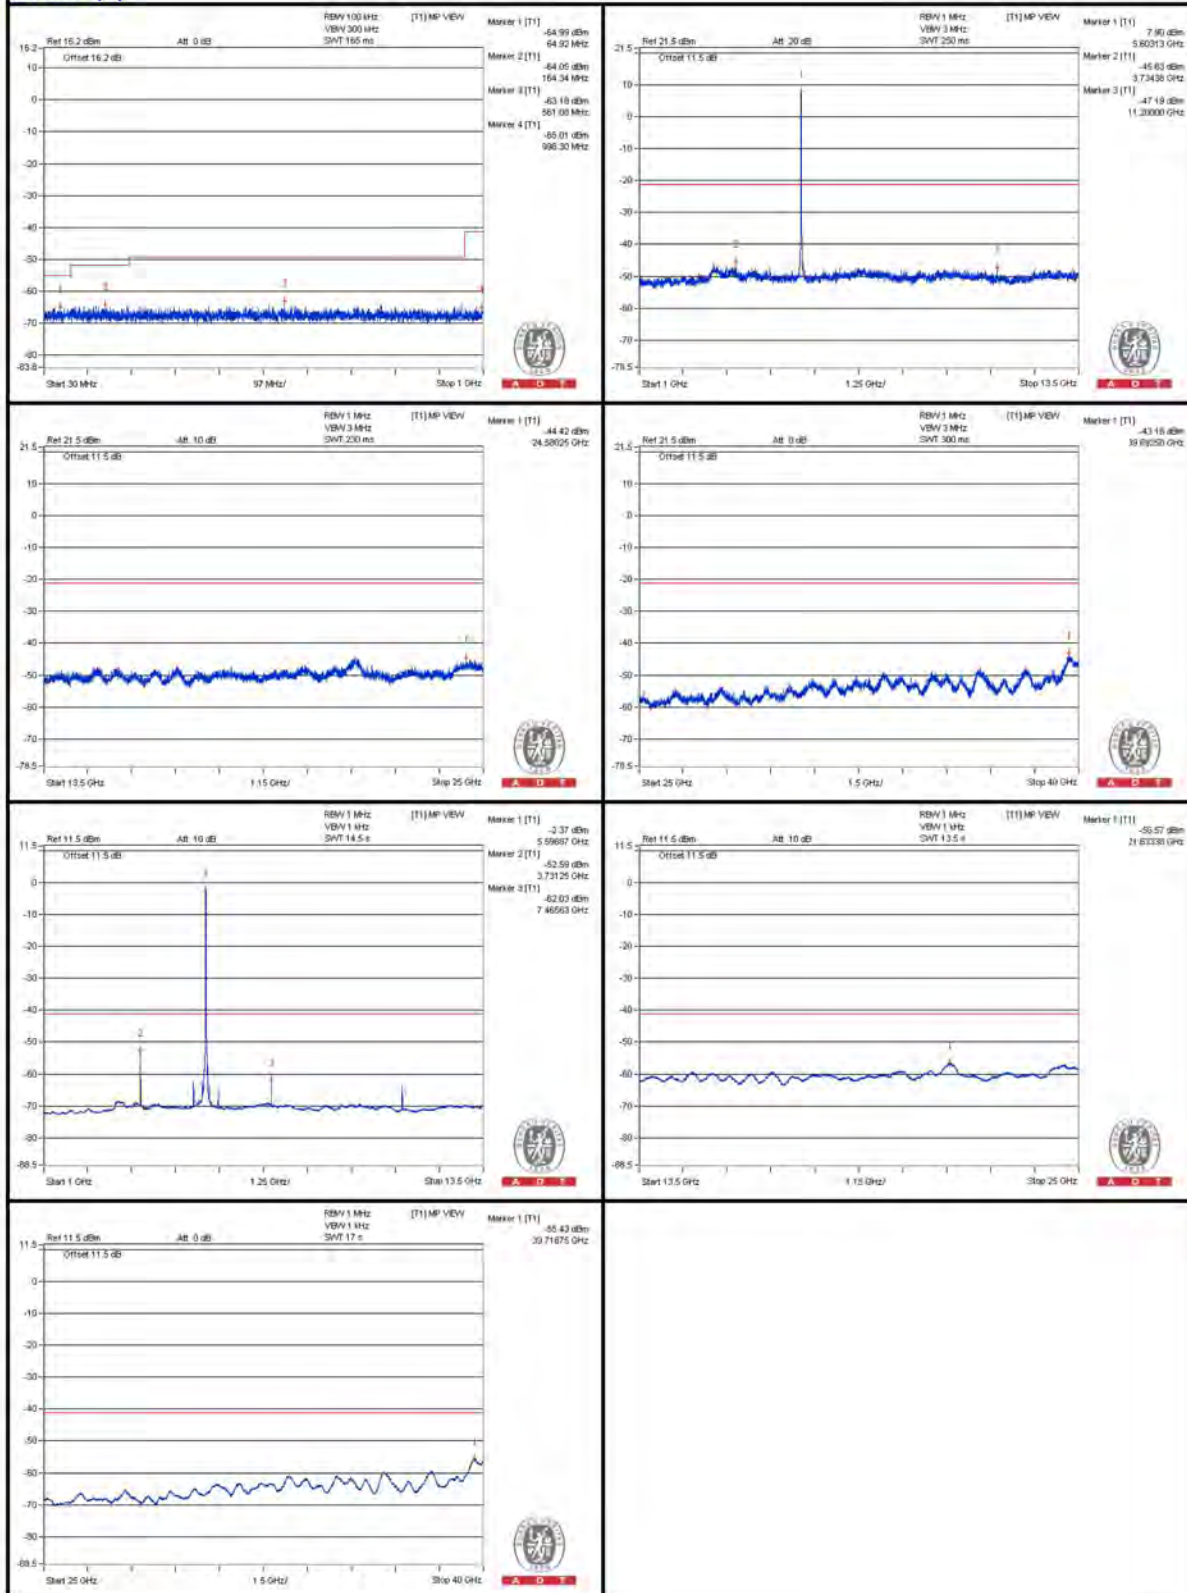

802.11a - Channel 140

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3800 PK	57.11	74	-16.89	-49.69	-48.29	7.77	-38.15
2	3800 AV	40.38	54	-13.62	-63.48	-70.23	7.77	-54.88
3	7609.375 PK	57.64	74	-16.36	-48.04	-48.8	7.77	-37.62
4	7600 AV	47.7	54	-6.3	-55.68	-66.38	7.77	-47.56
5	11396.875 PK	56.92	74	-17.08	-48.52	-49.82	7.77	-38.34
6	11396.875 AV	39.57	54	-14.43	-66.3	-66.64	7.77	-55.69
7	17090.875 PK	56.88	74	-17.12	-48.24	-50.32	7.77	-38.38
8	17090.875 AV	45.71	54	-8.29	-59.77	-60.97	7.77	-49.55

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

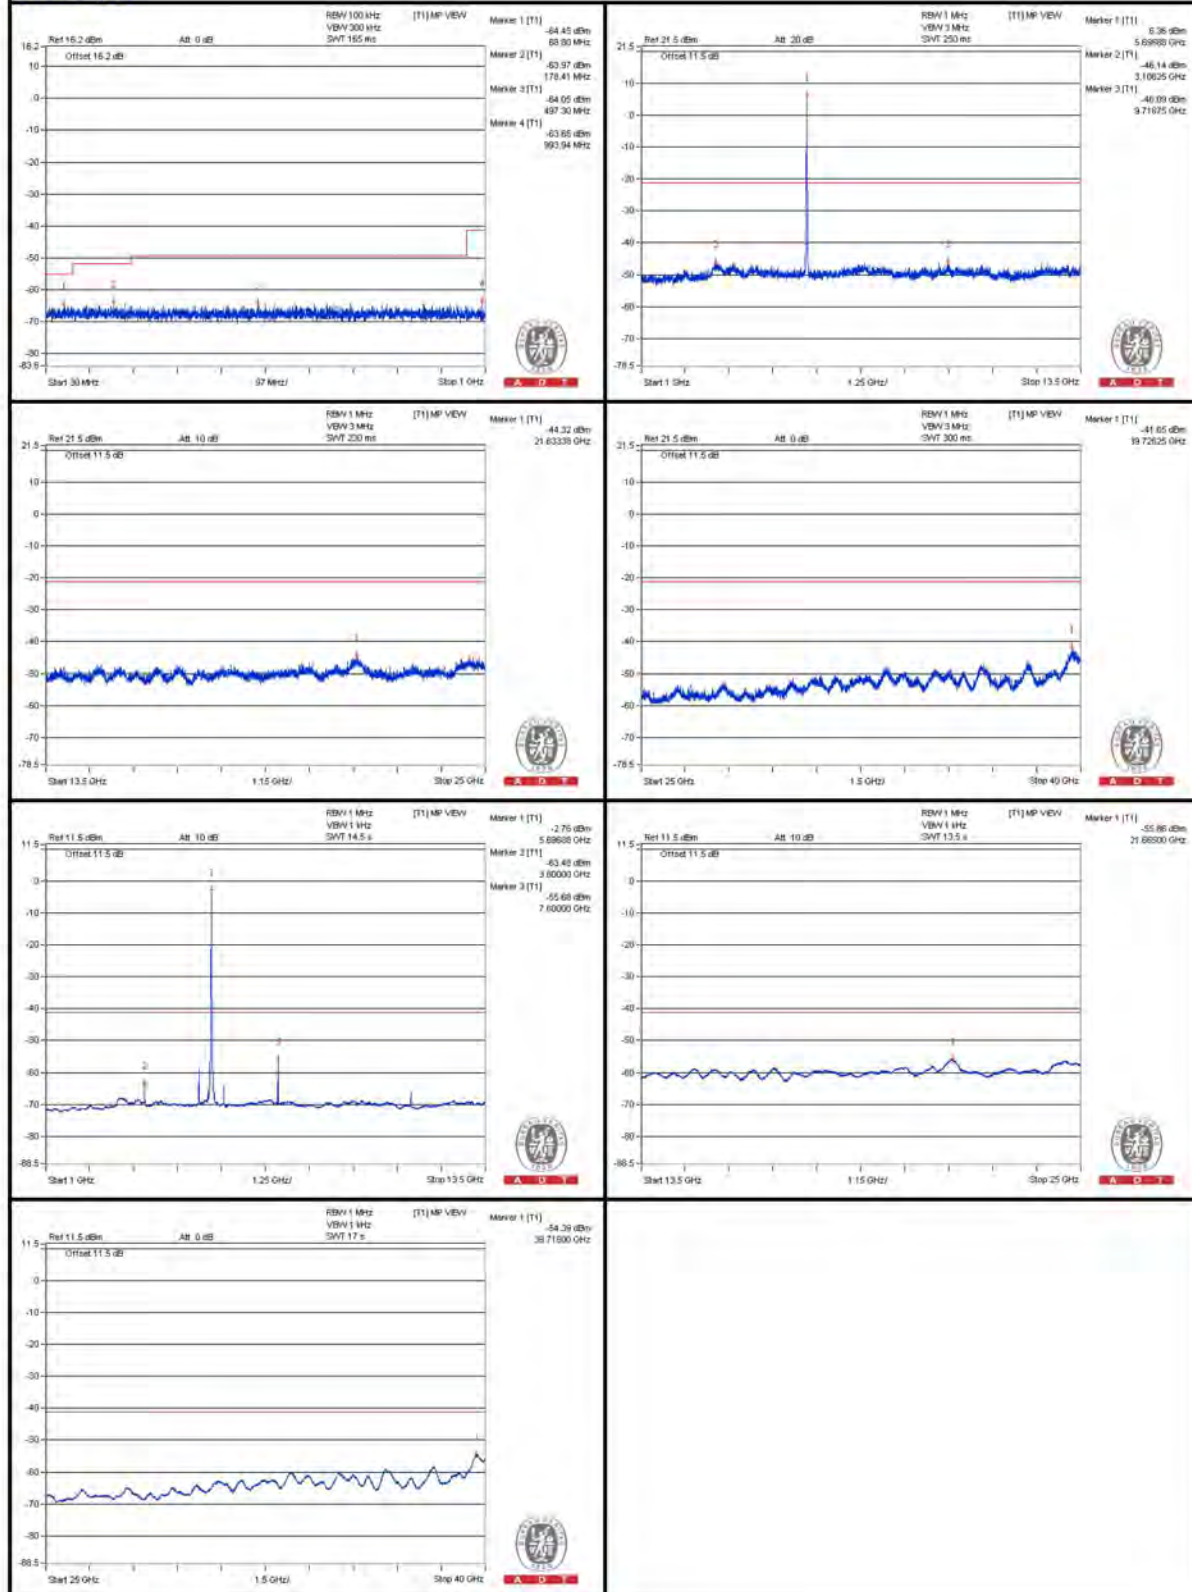

Chain (1)

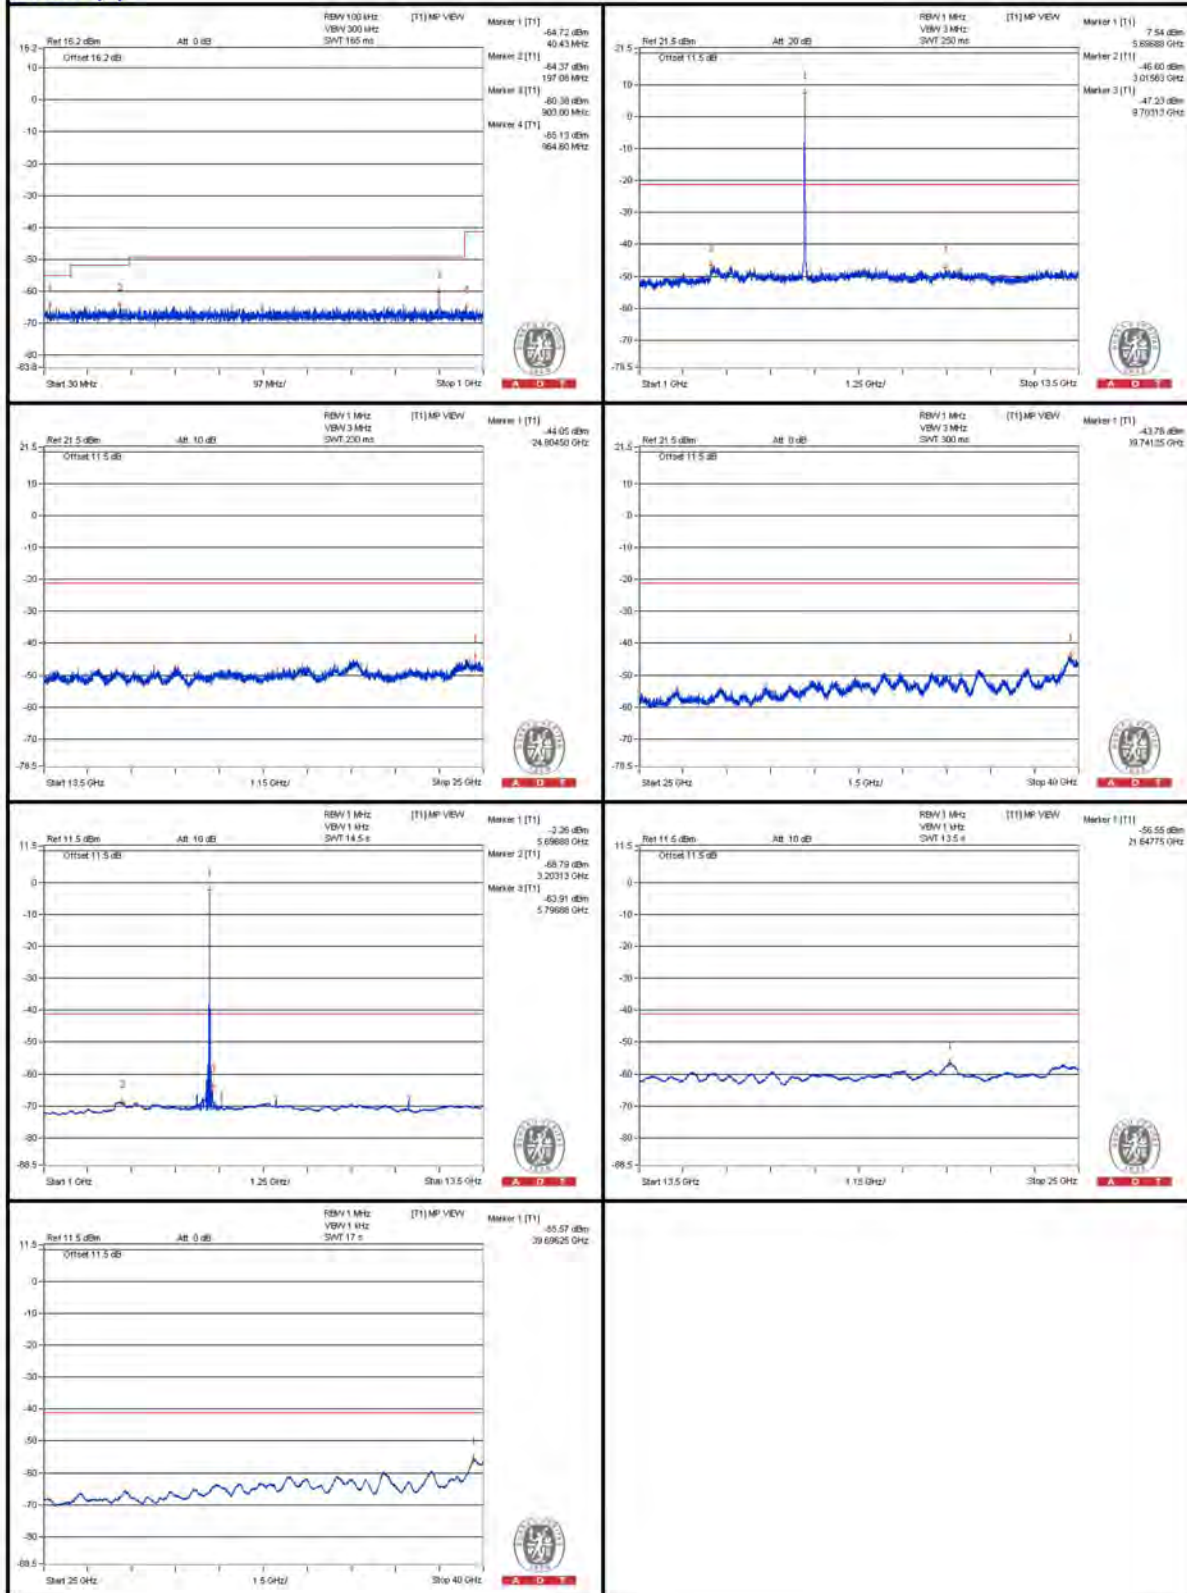

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5732.9 PK	71.43	74	-2.57	-31.77	-45.75	7.77	-23.83
2	5725.05 AV	51.51	54	-2.49	-54.03	-55.09	7.77	-43.75

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

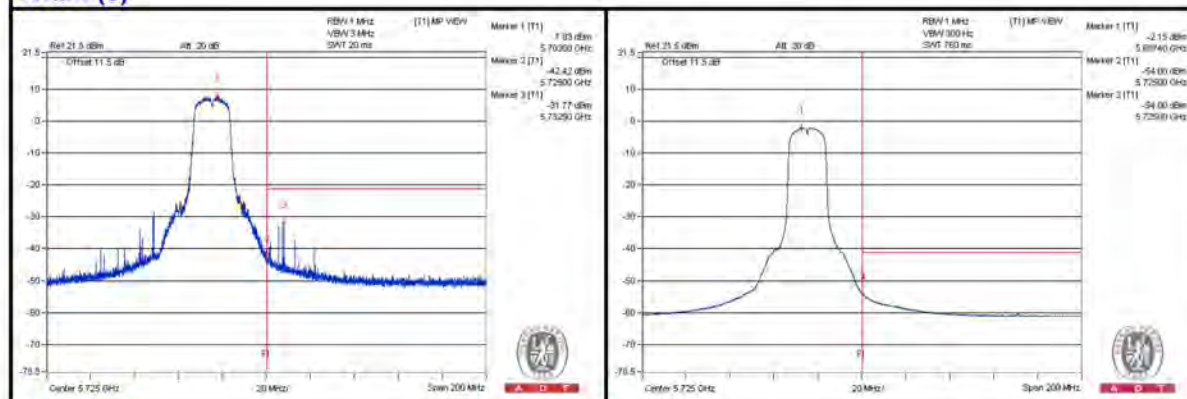

Chain (1)

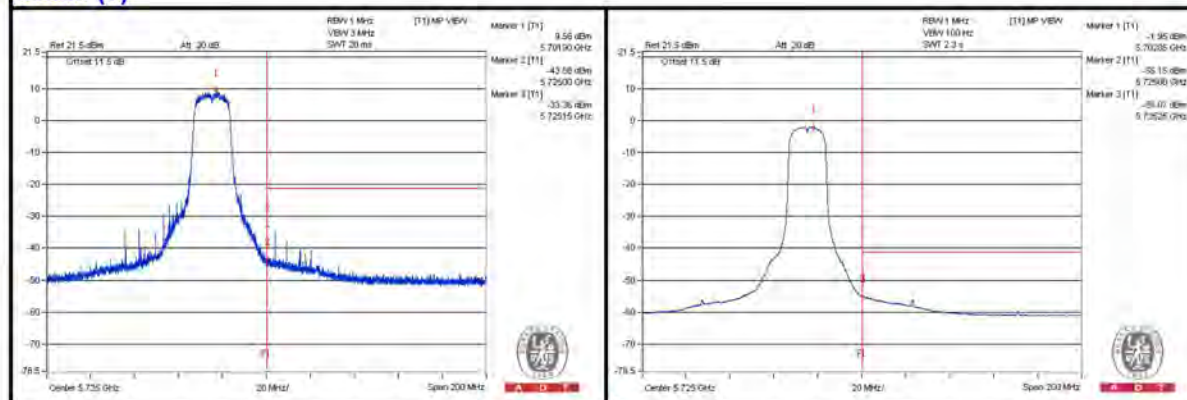

802.11a - Channel 144

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3812.5 PK	56.77	74	-17.23	-49.63	-48.93	7.77	-38.49
2	3812.5 AV	48.3	54	-5.7	-64.24	-55.24	7.77	-46.96
3	7631.25 PK	57.22	74	-16.78	-50.93	-47.4	7.77	-38.04
4	7628.125 AV	46.27	54	-7.73	-57.02	-69.08	7.77	-48.99
5	11440.625 PK	56.4	74	-17.6	-50.64	-48.82	7.77	-38.86
6	11440.625 AV	40.82	54	-13.18	-66.3	-64.36	7.77	-54.44
7	17159.875 PK	55.17	74	-18.83	-51.16	-50.59	7.77	-40.09
8	17154.125 AV	44.36	54	-9.64	-61.88	-61.48	7.77	-50.9

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

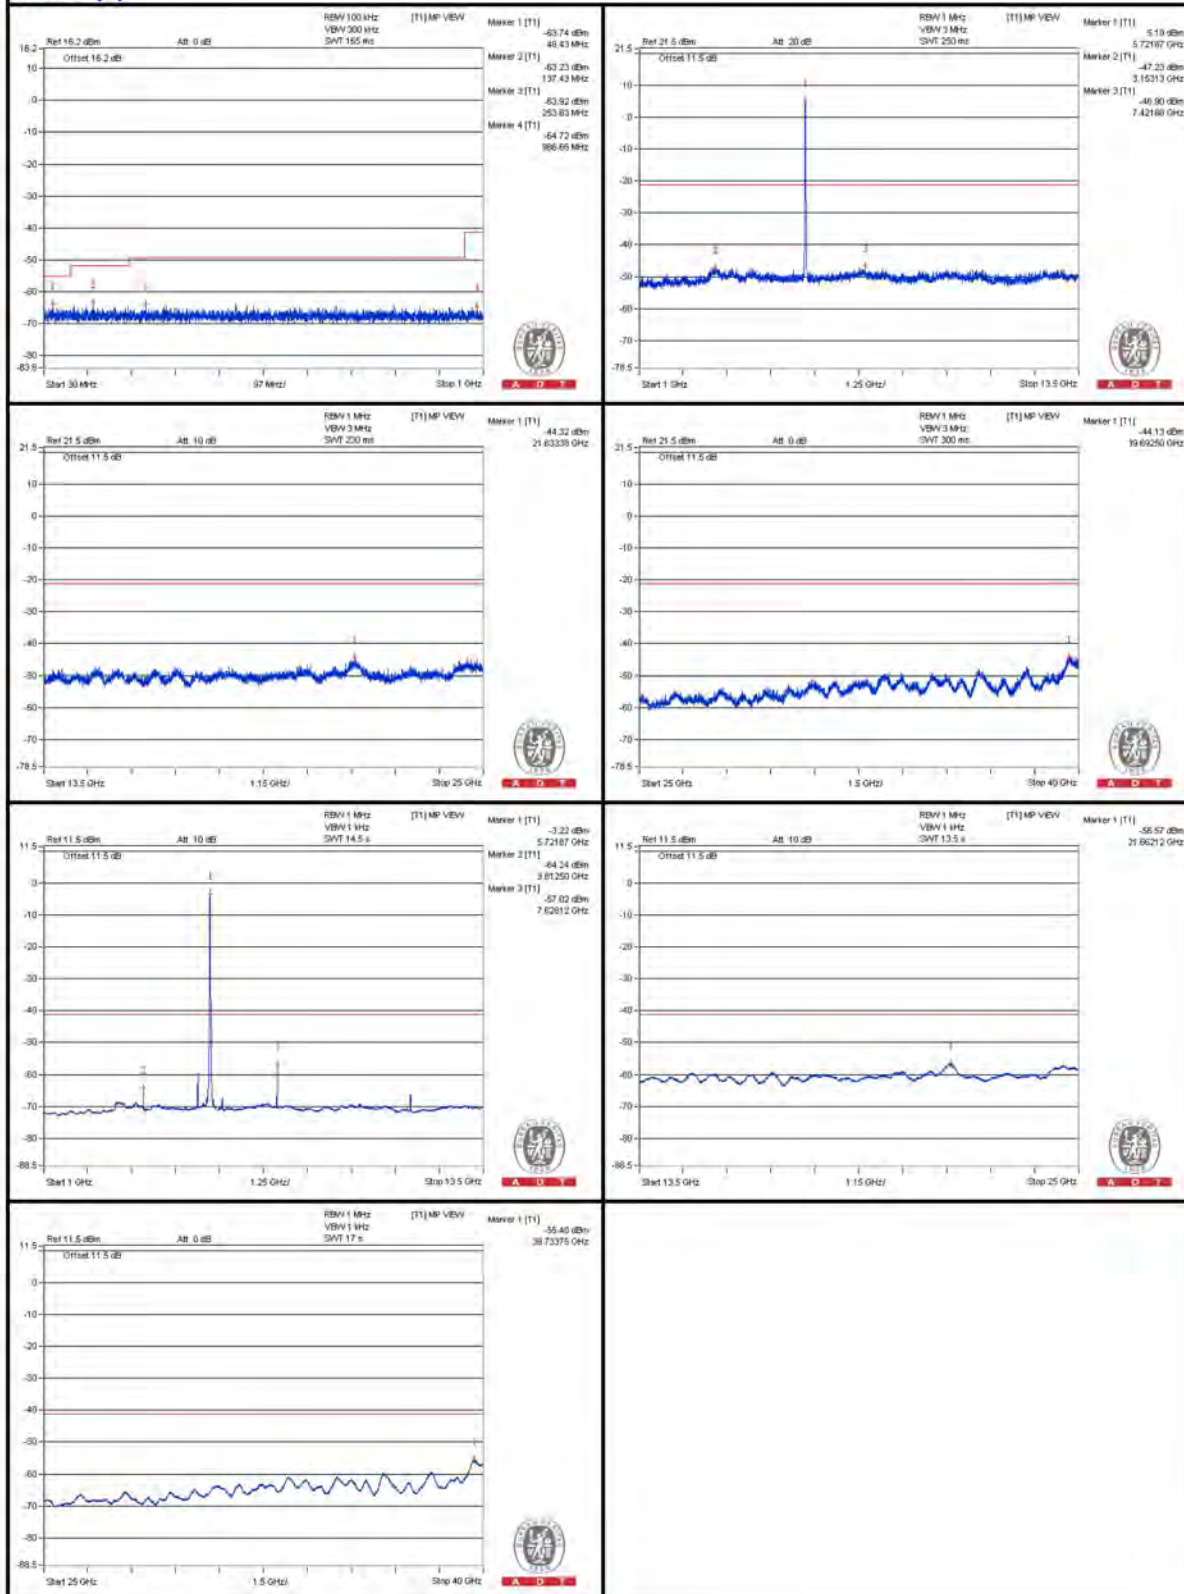

Chain (1)

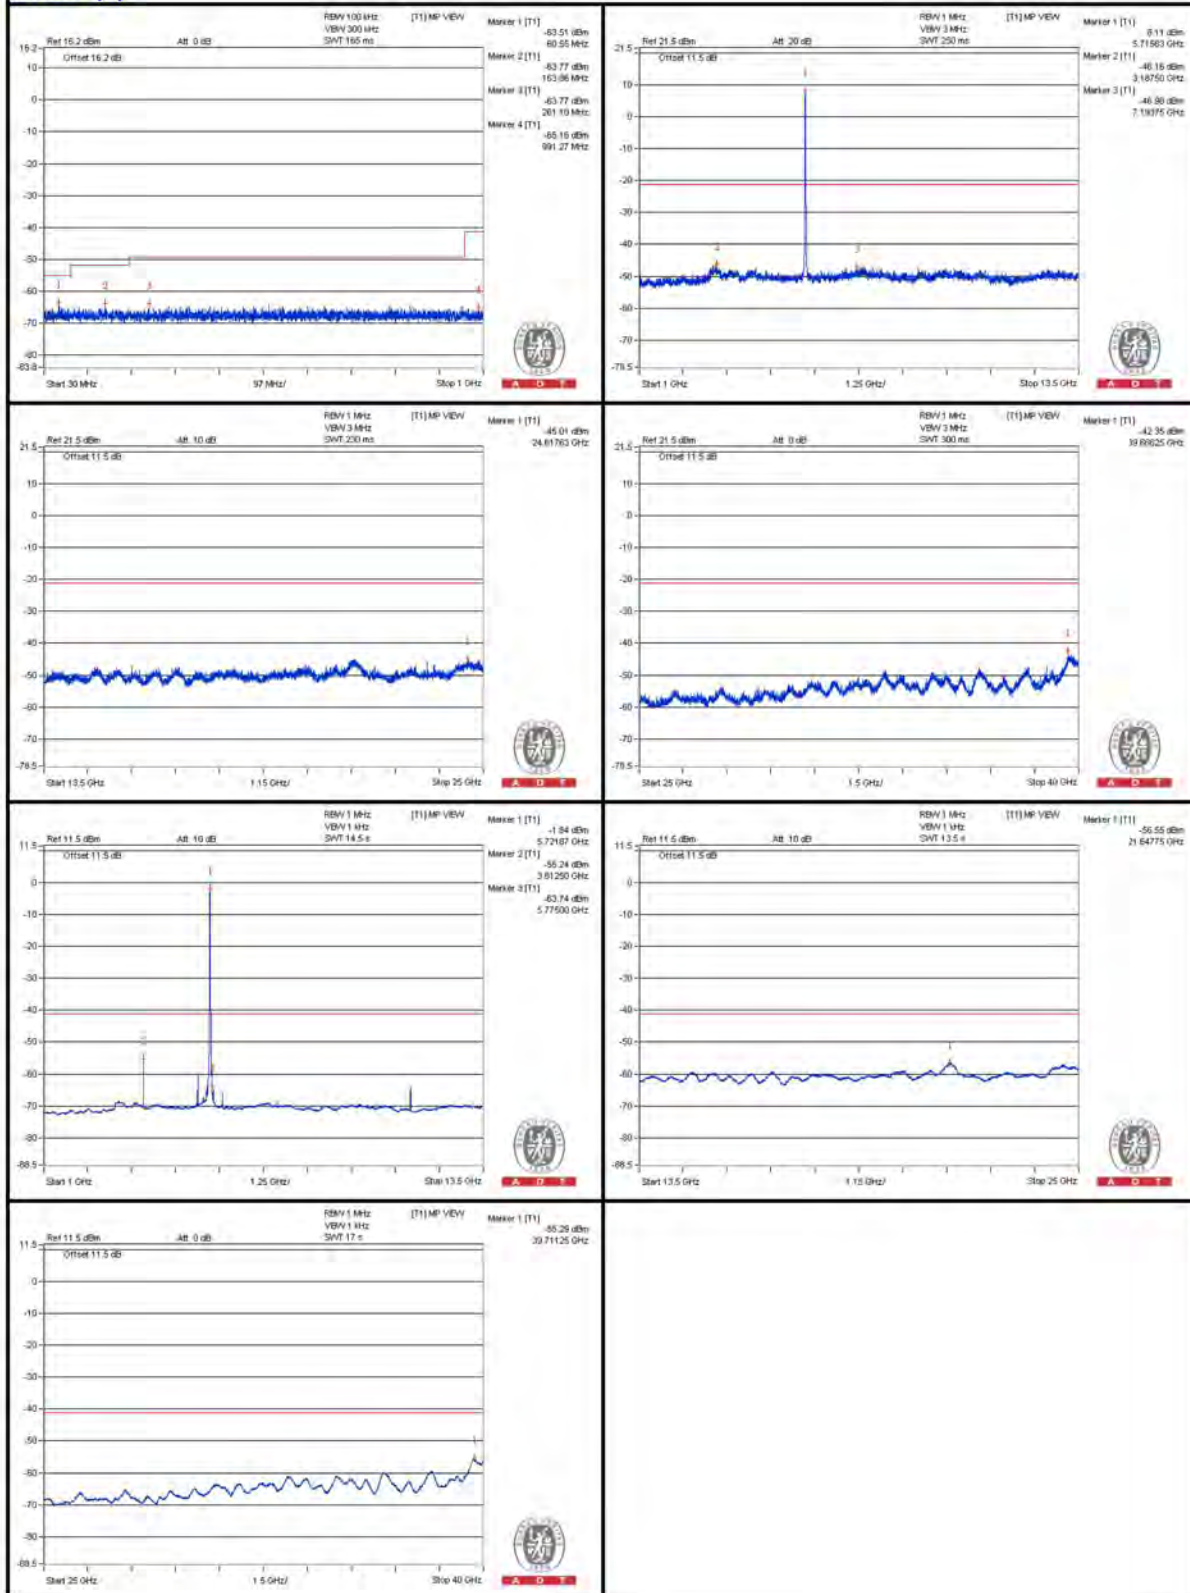

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5855.875 PK	57.18	74	-16.82	-49.12	-48.61	7.77	-38.08
2	5851.6 AV	45.09	54	-8.91	-61.03	-60.88	7.77	-50.17

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

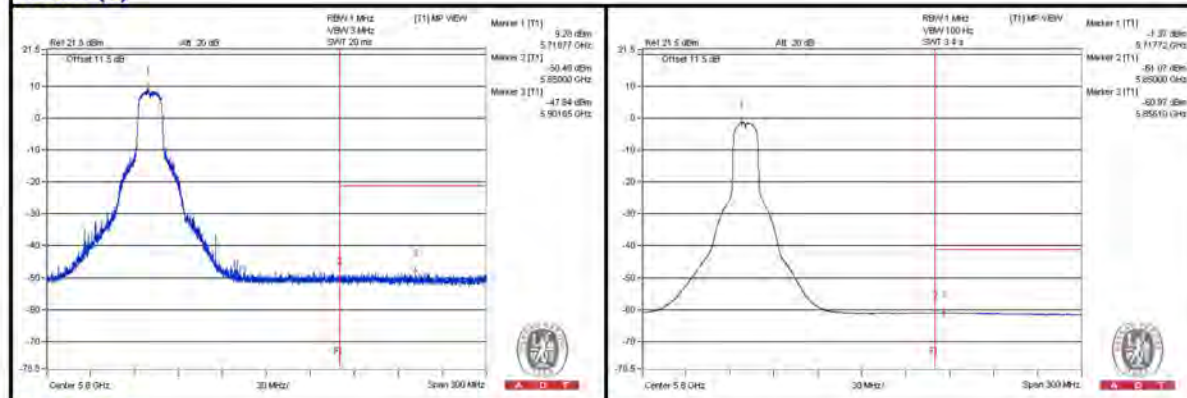

Chain (1)

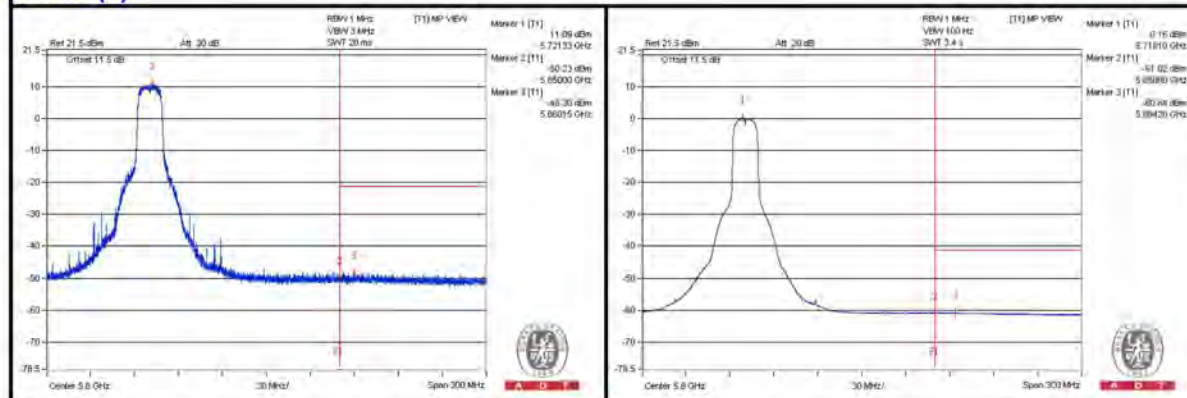

802.11a - Channel 149


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3828.125 PK	57.27	74	-16.73	-50.87	-47.36	7.77	-37.99
2	3828.125 AV	49.91	54	-4.09	-71.05	-53.19	7.77	-45.35
3	7659.375 PK	57.81	74	-16.19	-47.21	-49.58	7.77	-37.45
4	7659.375 AV	36.85	54	-17.15	-70.27	-68.33	7.77	-58.41
5	11490.625 PK	55.74	74	-18.26	-50.72	-49.91	7.77	-39.52
6	11490.625 AV	40.97	54	-13.03	-65.19	-64.96	7.77	-54.29


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

Chain (0)

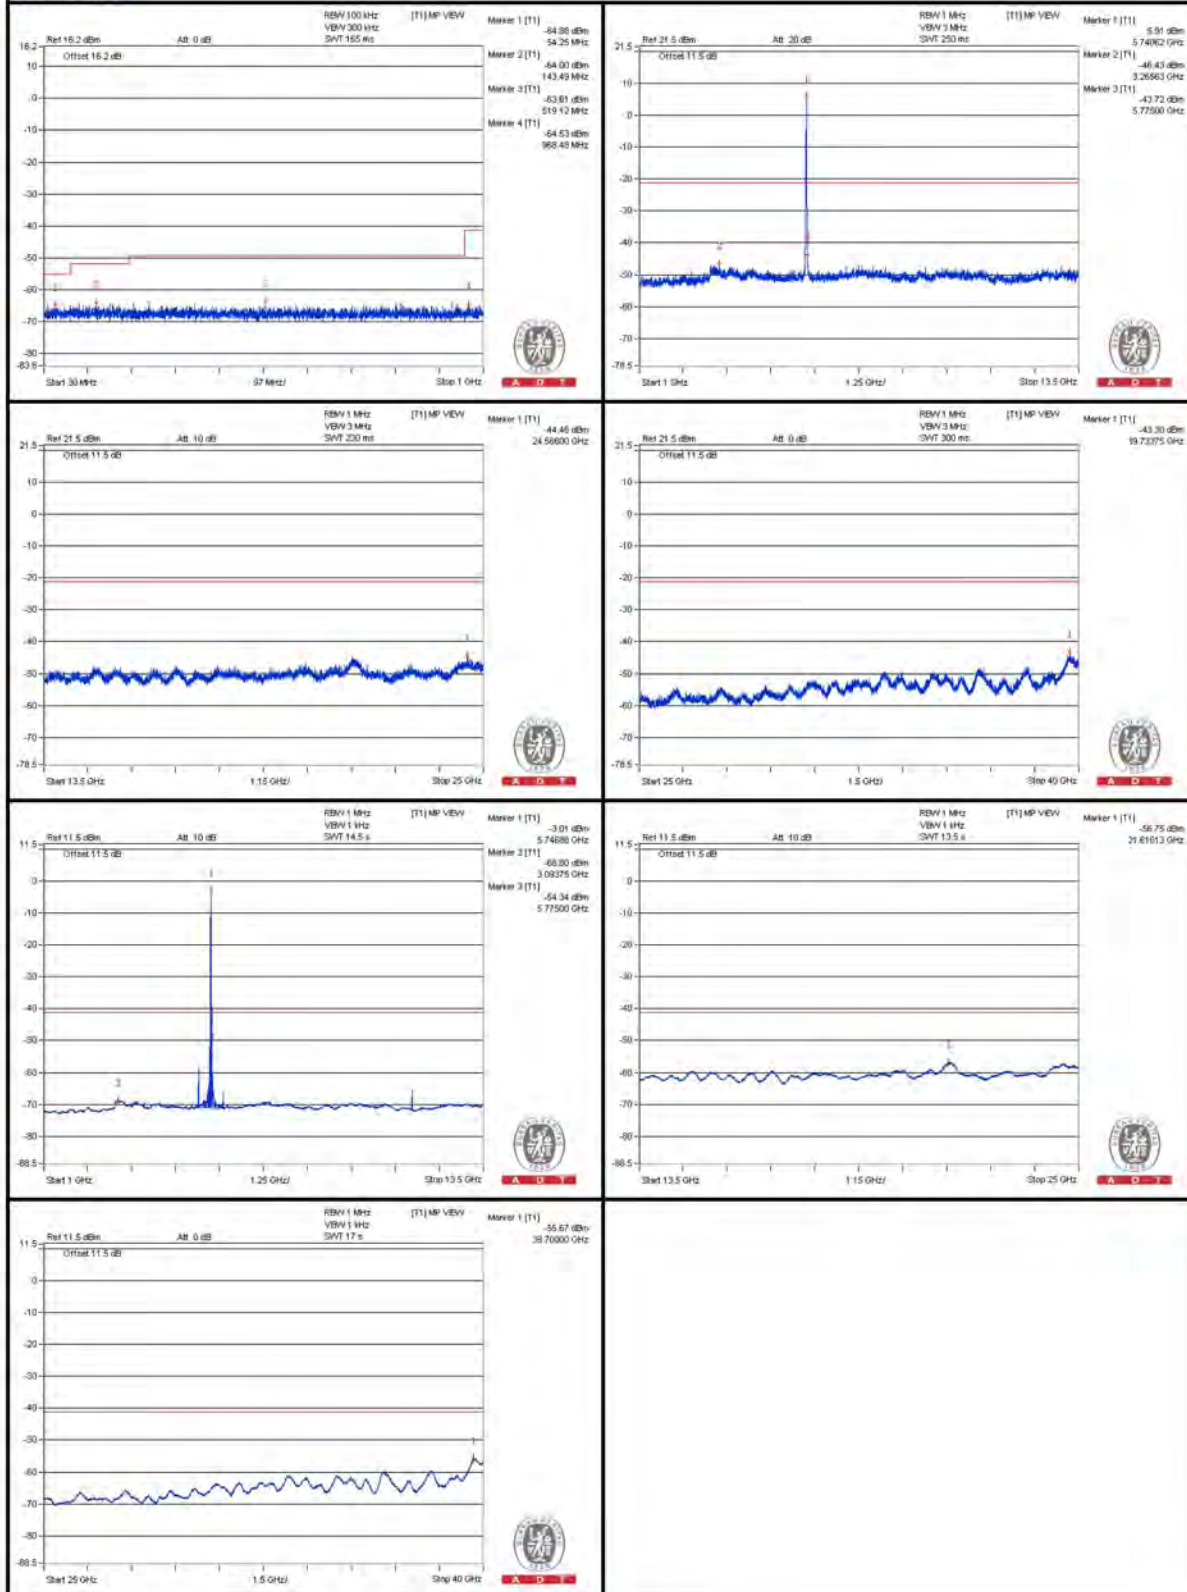

Chain (1)

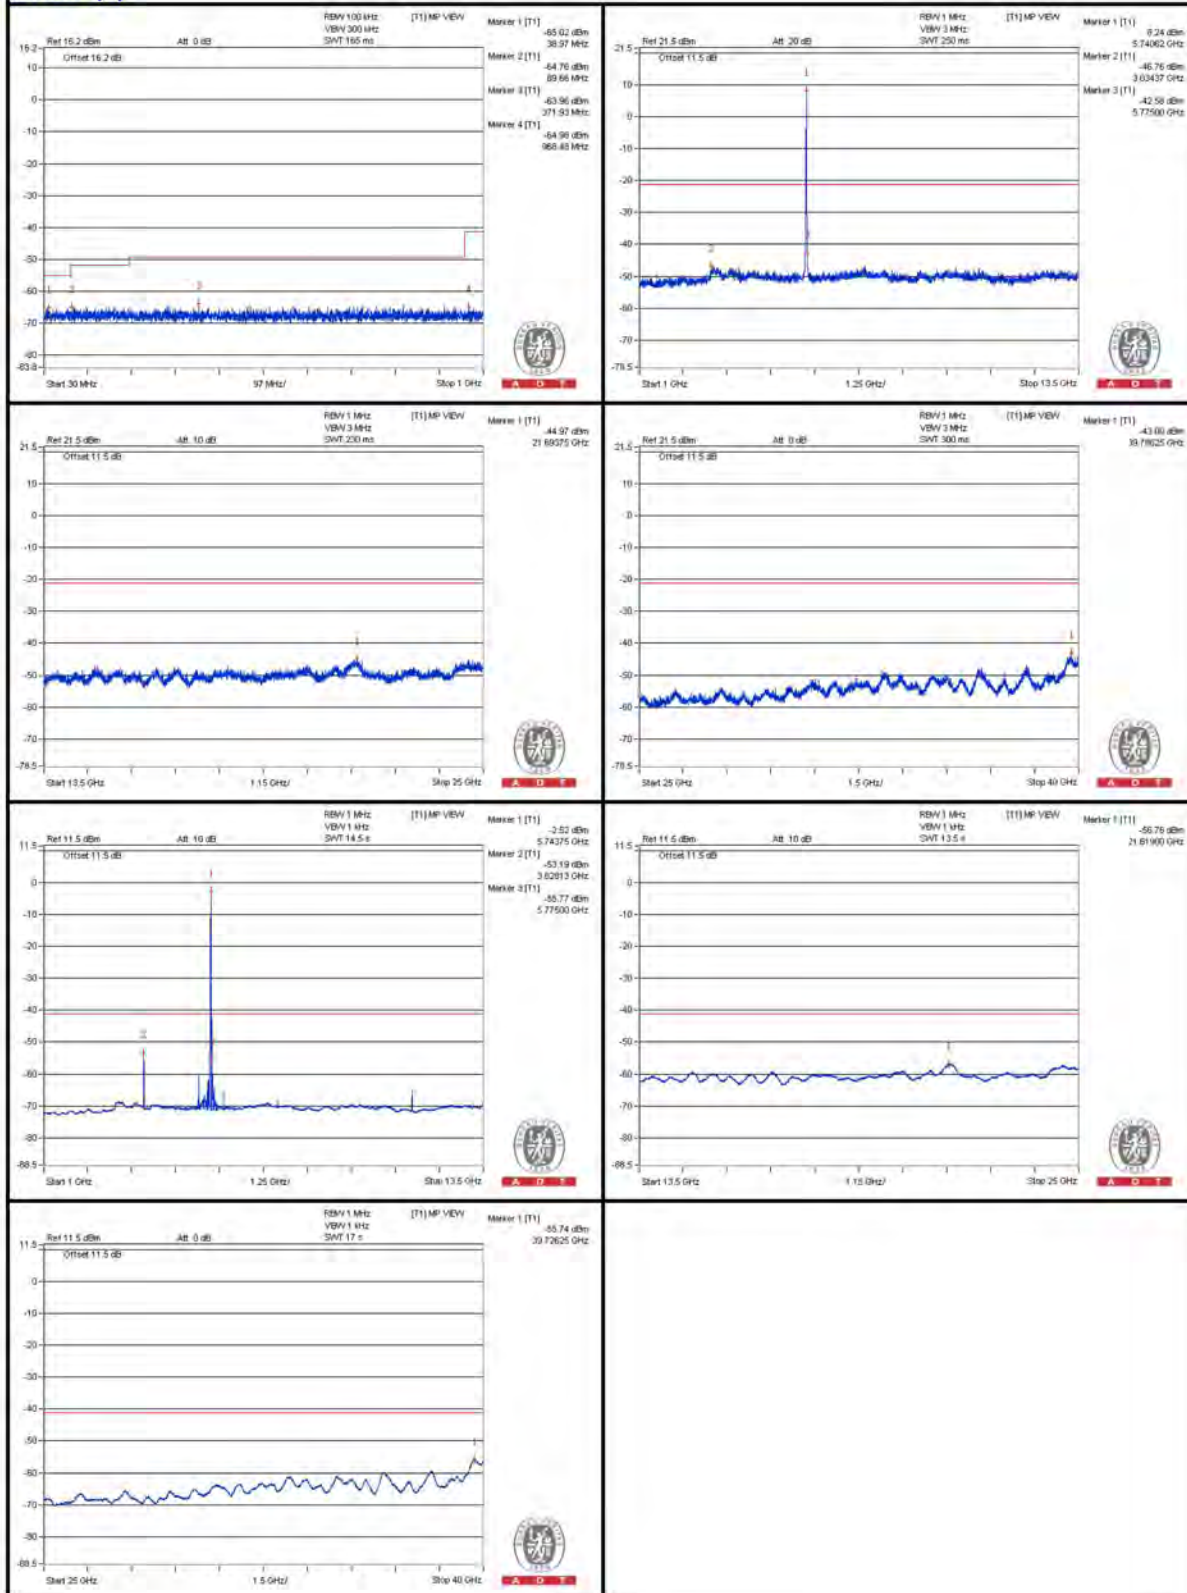

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5708.75 PK	70.64	74	-3.36	-32.62	-45.2	7.77	-24.62
2	5714.975 AV	52.36	54	-1.64	-53.38	-54	7.77	-42.9
3	5723.225 PK	76.55	78.2	-1.65	-27.01	-35.88	7.77	-18.71
4	5851.1 PK	57.31	78.2	-20.89	-47.95	-49.67	7.77	-37.95
5	5880.2 PK	57.69	74	-16.31	-47.87	-48.89	7.77	-37.57
6	5860.55 AV	45.2	54	-8.8	-60.92	-60.77	7.77	-50.06

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

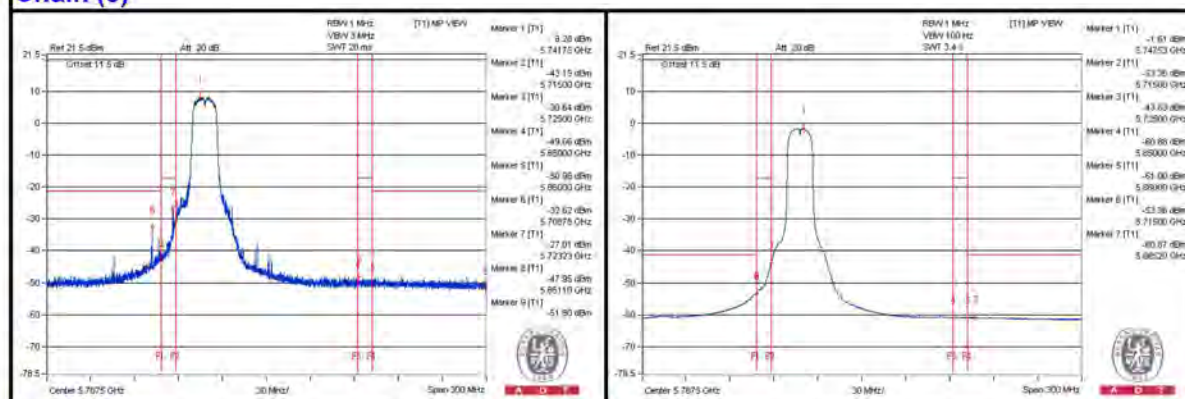

Chain (1)

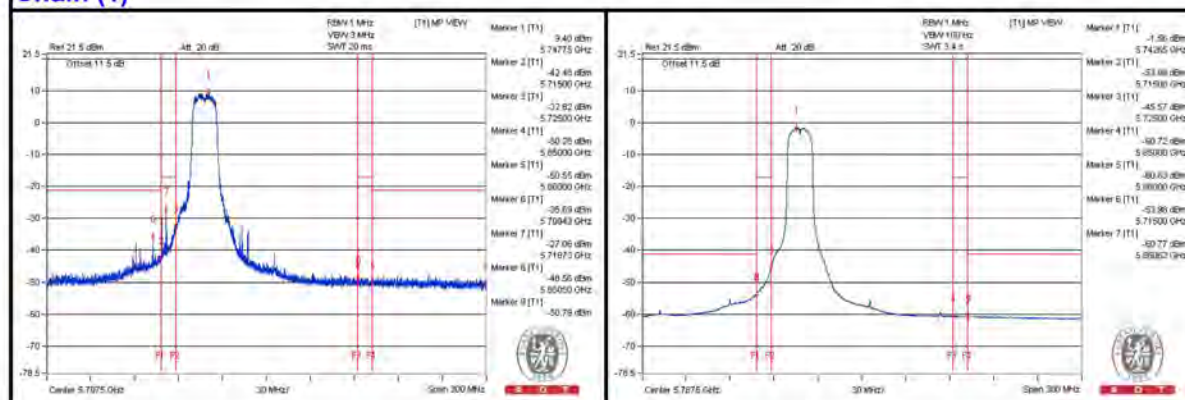

802.11a - Channel 157

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3856.25 PK	58.02	74	-15.98	-49.89	-46.72	7.77	-37.24
2	3856.25 AV	51.18	54	-2.82	-70.85	-51.91	7.77	-44.08
3	7721.875 PK	57.16	74	-16.84	-48.19	-49.7	7.77	-38.1
4	7712.5 AV	44.95	54	-9.05	-58.5	-68.45	7.77	-50.31
5	11568.75 PK	57.11	74	-16.89	-48.08	-49.99	7.77	-38.15
6	11571.875 AV	42.91	54	-11.09	-64.39	-62.15	7.77	-52.35
7	3856.25 PK	58.02	74	-15.98	-49.89	-46.72	7.77	-37.24
8	3856.25 AV	51.18	54	-2.82	-70.85	-51.91	7.77	-44.08

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

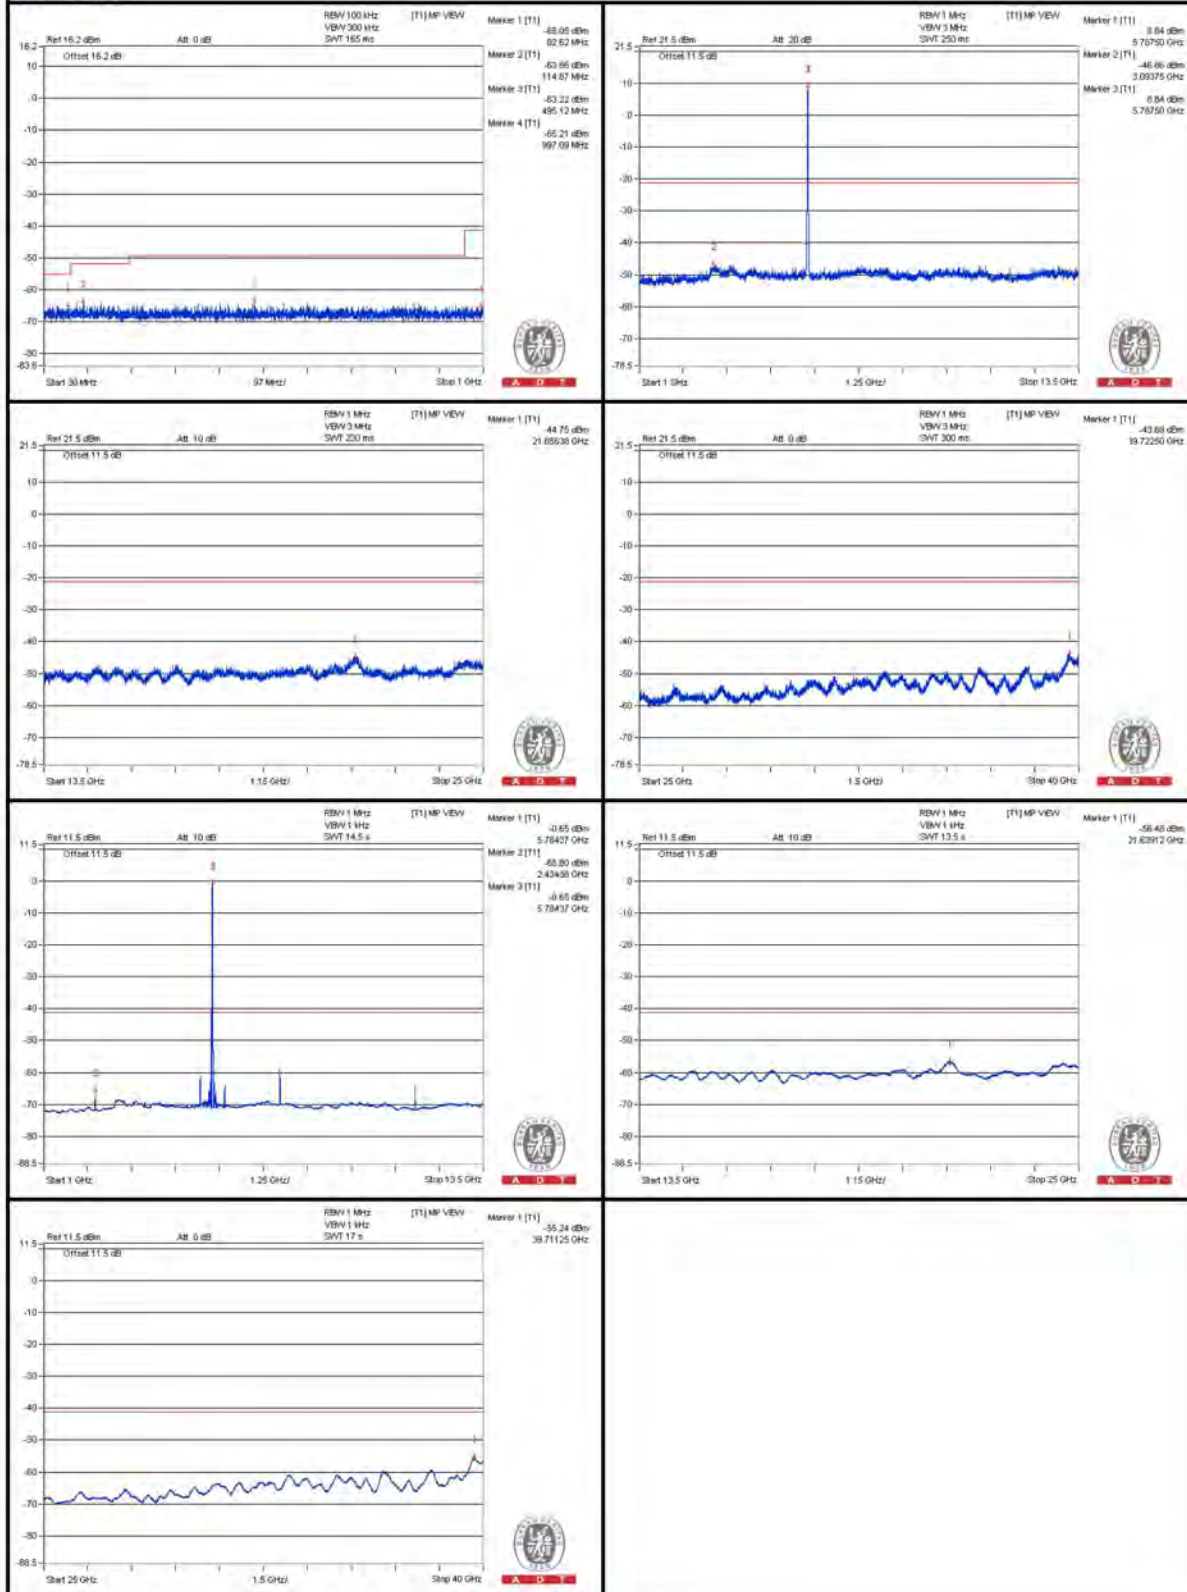

Chain (1)

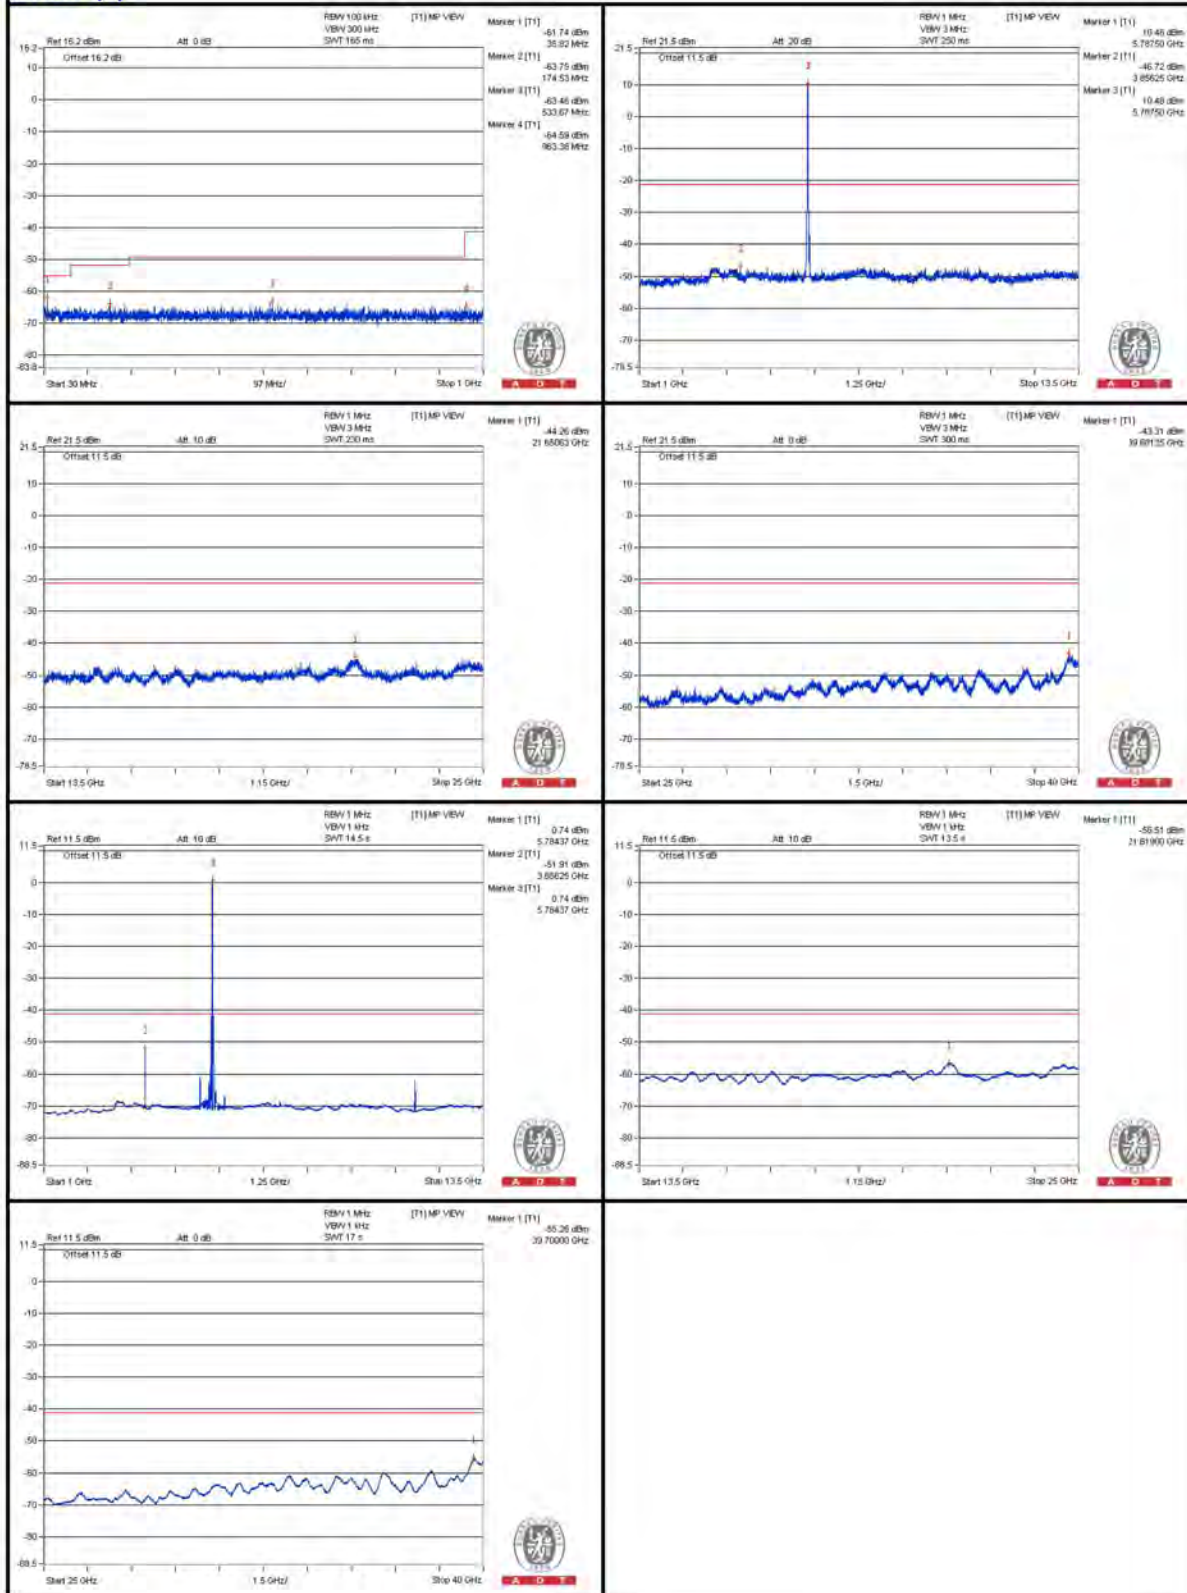

802.11a - Channel 165

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3884.375 PK	59.5	74	-14.5	-49.61	-44.76	7.77	-35.76
2	3881.25 AV	55.47	54	* 1.47	-58.98	-47.88	7.77	-39.79
3	11643.75 PK	55.83	74	-18.17	-49.57	-50.96	7.77	-39.43
4	11653.125 AV	40.32	54	-13.68	-66.56	-65.02	7.77	-54.94


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX A)


Chain (0)

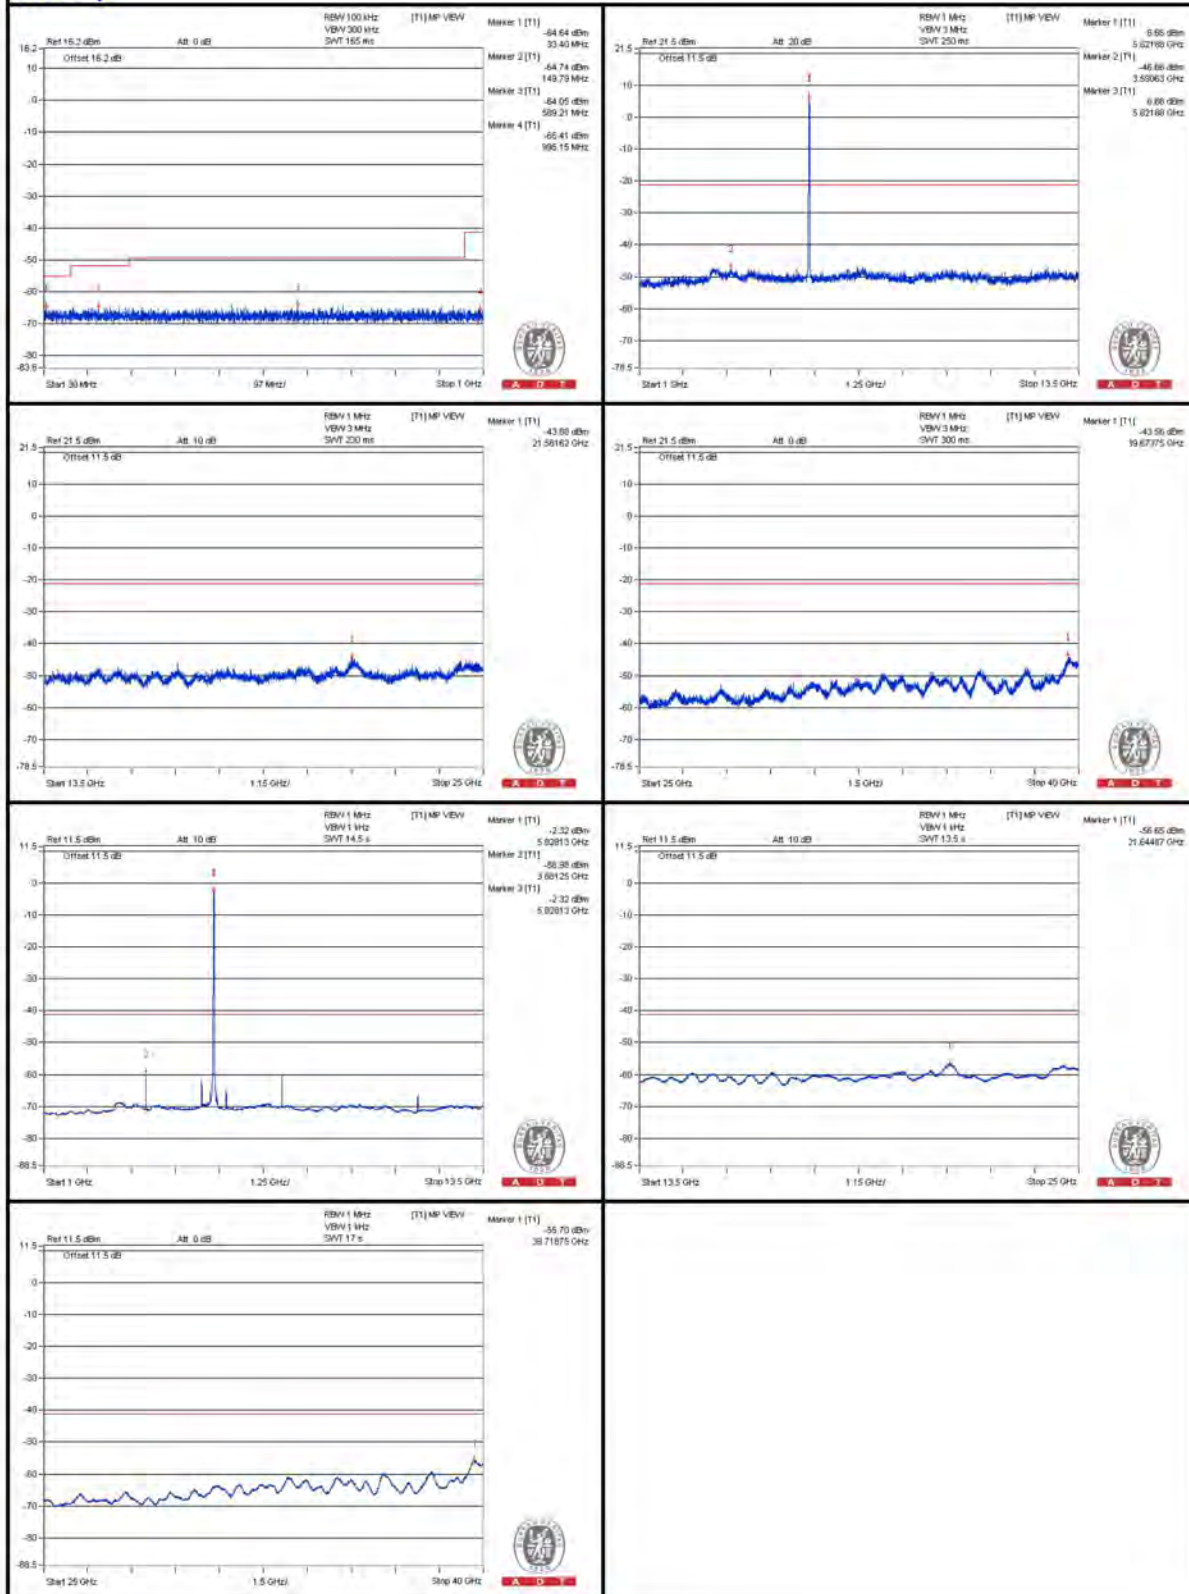



A D T

Chain (1)

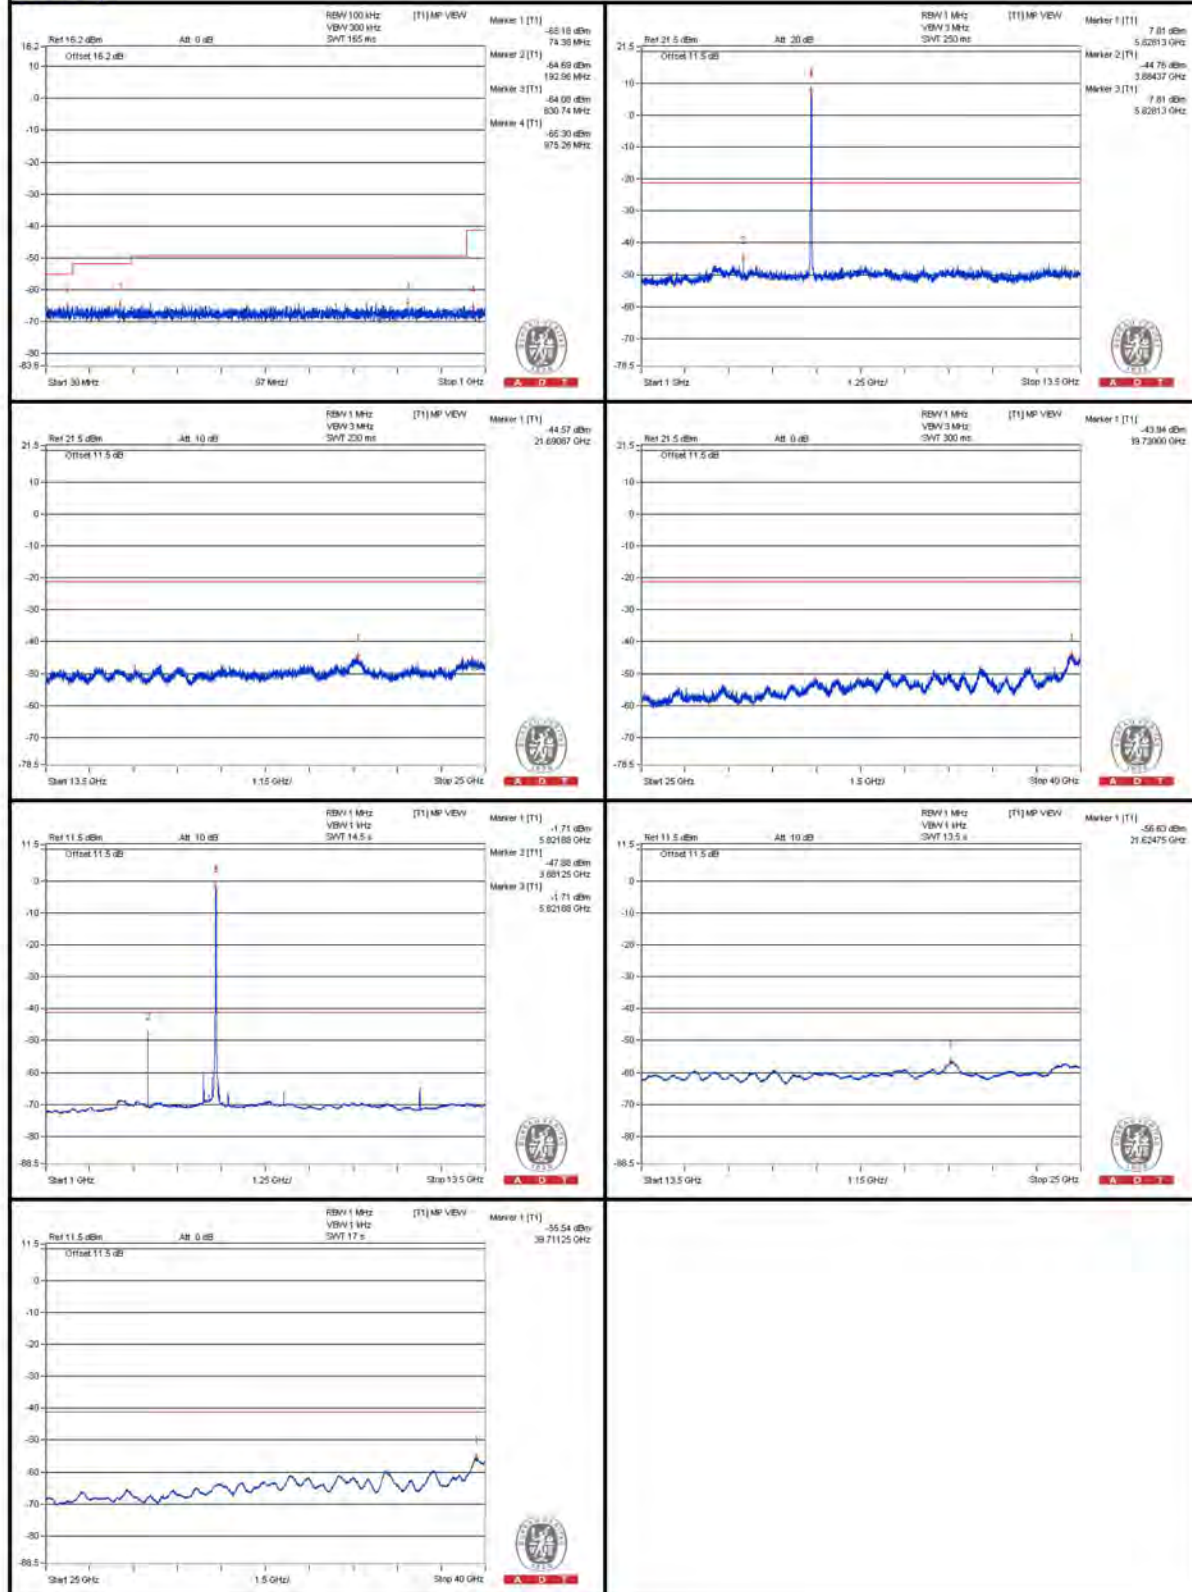

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5653.175 PK	57.58	74	-16.42	-47.26	-50.13	7.77	-37.68
2	5712.275 AV	45.91	54	-8.09	-60.75	-59.58	7.77	-49.35
3	5720.675 PK	57.76	78.2	-20.44	-49.41	-47.38	7.77	-37.5
4	5853.95 PK	72.07	78.2	-6.13	-31.4	-41.14	7.77	-23.19
5	5865.5 PK	69.3	74	-4.7	-45.8	-34.01	7.77	-25.96
6	5860.025 AV	50.98	54	-3.02	-54.22	-56.11	7.77	-44.28

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

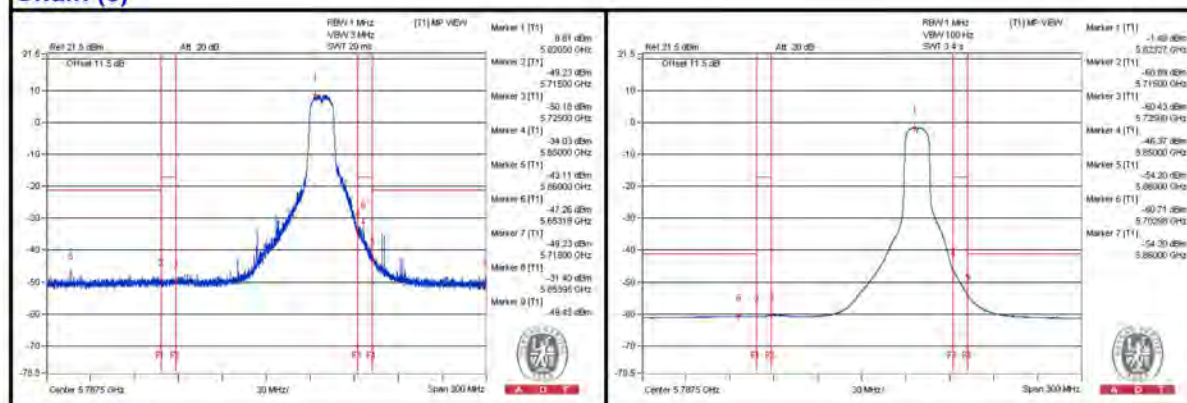

Chain (1)

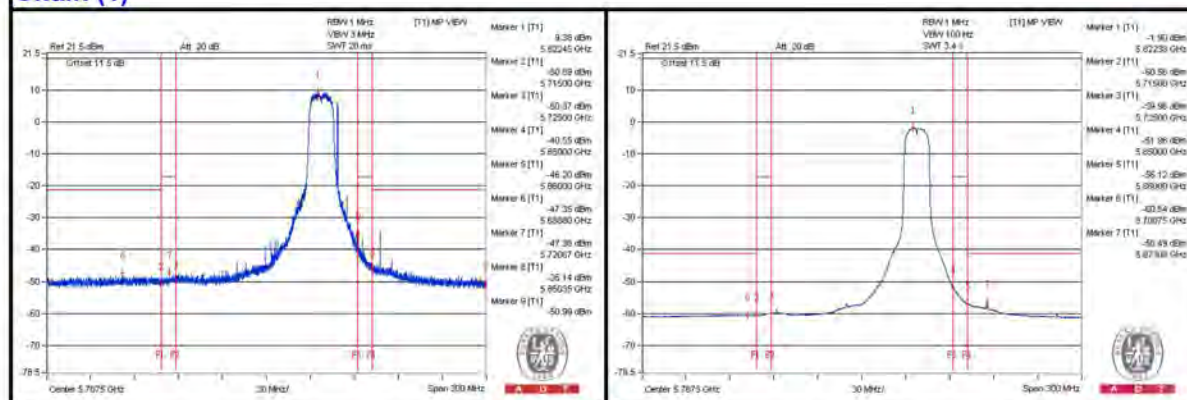

802.11ac (VHT20) - Channel 36

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3443.75 PK	55.53	74	-18.47	-47.81	-50.17	6.09	-39.73
2	3453.125 AV	44.61	54	-9.39	-69.98	-56.95	6.09	-50.65
3	6906.25 PK	56.78	74	-17.22	-46.45	-49.12	6.09	-38.48
4	6906.25 AV	49.37	54	-4.63	-52.81	-59.55	6.09	-45.89
5	10365.625 PK	55.35	74	-18.65	-48.39	-49.74	6.09	-39.91
6	10365.625 AV	39.2	54	-14.8	-66.74	-64	6.09	-56.06
7	15535.5 PK	55.19	74	-18.81	-49.09	-49.25	6.09	-40.07
8	15538.375 AV	43.73	54	-10.27	-60.44	-60.83	6.09	-51.53

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

Chain (0)

