
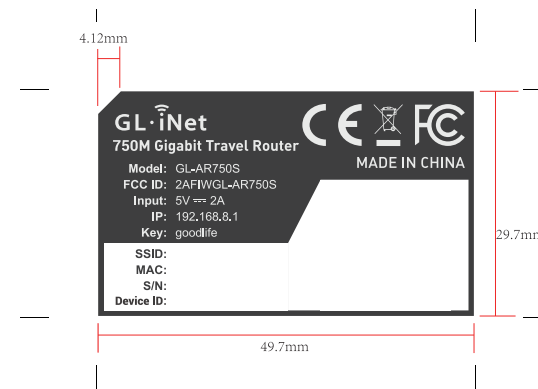


	1	2	3	4	5	6																																																																																																																		
A					Remark	Description	Editor	Date																																																																																																																
B	1. 以下内容由供应商印刷				2. 以下内容由工厂在供应商印刷的基础上打印																																																																																																																			
																																																																																																																								
C	标贴印刷Certificate logo size: 																																																																																																																							
D	NOTES(技术要求) : 1. 黑色印刷，无边框， (Black printing,no frame,) 2.材料:100 # 亮白压花格底PET,耐85度以上高温测试不起泡,过UV,背胶 (Material:100 # Bright white embossing PET, Heat resistant of at least 85°C, no bubble,with UV Coating,adhesive) 3. 原材料及后处理工艺均能满足我司《环保技术标准》要求。 (Raw materials and the corresponding post processing should meet requirements defined in the T&W Environmental Protection Technical Standards)				BARCODE: CODE 39 来料方式：卷装																																																																																																																			
					<table><tr><th>DIM</th><th>TOL±</th><th>△</th><th></th><th></th><th></th><th colspan="2">CUSTOMER: ZyXEL</th><th colspan="4"></th></tr><tr><td>RANGE</td><td></td><td>C1</td><td>C2</td><td>C3</td><td>C4</td><td colspan="2" rowspan="2">TITLE: 印刷盒底标贴</td><td colspan="2" rowspan="2">MODEL: NBG6615</td><td colspan="2" rowspan="2">PART NO: 611000013880</td></tr><tr><td>0~6</td><td>0.1</td><td>0.1</td><td>0.15</td><td>0.2</td></tr><tr><td>6~30</td><td>0.2</td><td>0.3</td><td>0.4</td><td>0.5</td><td></td><td>UNIT'S</td><td>mm</td><td>VER</td><td>V01</td><td>DRAW</td><td>杨克华</td><td>DATE: 20180612</td></tr><tr><td>30~80</td><td>0.25</td><td>0.5</td><td>0.9</td><td>1.2</td><td></td><td>MAT'L</td><td>XXXX</td><td>SCALE</td><td>N/A</td><td>CHECK</td><td colspan="2">罗杰思</td></tr><tr><td>80~180</td><td>0.3</td><td>0.8</td><td>1.2</td><td>1.5</td><td></td><td>FINISH</td><td>N/A</td><td>SHEET</td><td>1 / 1</td><td>PDE</td><td colspan="2">N/A</td></tr><tr><td>180~315</td><td>0.5</td><td>1.3</td><td>1.8</td><td>3</td><td></td><td colspan="6"></td></tr><tr><td>315~500</td><td>0.7</td><td>1.5</td><td>2.5</td><td>4</td><td></td><td colspan="6"></td></tr><tr><td>500~800</td><td>0.9</td><td>1.8</td><td>3</td><td>5</td><td></td><td colspan="6"></td></tr><tr><td>ANG.TOL±</td><td colspan="2">0°~30°/0.1°</td><td colspan="2">30°~60°/0.3°</td><td colspan="2">60°~90°/0.5°</td><td colspan="6"></td></tr></table>				DIM	TOL±	△				CUSTOMER: ZyXEL						RANGE		C1	C2	C3	C4	TITLE: 印刷盒底标贴		MODEL: NBG6615		PART NO: 611000013880		0~6	0.1	0.1	0.15	0.2	6~30	0.2	0.3	0.4	0.5		UNIT'S	mm	VER	V01	DRAW	杨克华	DATE: 20180612	30~80	0.25	0.5	0.9	1.2		MAT'L	XXXX	SCALE	N/A	CHECK	罗杰思		80~180	0.3	0.8	1.2	1.5		FINISH	N/A	SHEET	1 / 1	PDE	N/A		180~315	0.5	1.3	1.8	3								315~500	0.7	1.5	2.5	4								500~800	0.9	1.8	3	5								ANG.TOL±	0°~30°/0.1°		30°~60°/0.3°		60°~90°/0.5°		
DIM	TOL±	△				CUSTOMER: ZyXEL																																																																																																																		
RANGE		C1	C2	C3	C4	TITLE: 印刷盒底标贴		MODEL: NBG6615		PART NO: 611000013880																																																																																																														
0~6	0.1	0.1	0.15	0.2																																																																																																																				
6~30	0.2	0.3	0.4	0.5		UNIT'S	mm	VER	V01	DRAW	杨克华	DATE: 20180612																																																																																																												
30~80	0.25	0.5	0.9	1.2		MAT'L	XXXX	SCALE	N/A	CHECK	罗杰思																																																																																																													
80~180	0.3	0.8	1.2	1.5		FINISH	N/A	SHEET	1 / 1	PDE	N/A																																																																																																													
180~315	0.5	1.3	1.8	3																																																																																																																				
315~500	0.7	1.5	2.5	4																																																																																																																				
500~800	0.9	1.8	3	5																																																																																																																				
ANG.TOL±	0°~30°/0.1°		30°~60°/0.3°		60°~90°/0.5°																																																																																																																			
	1	2	3	4	5	6																																																																																																																		

Label location

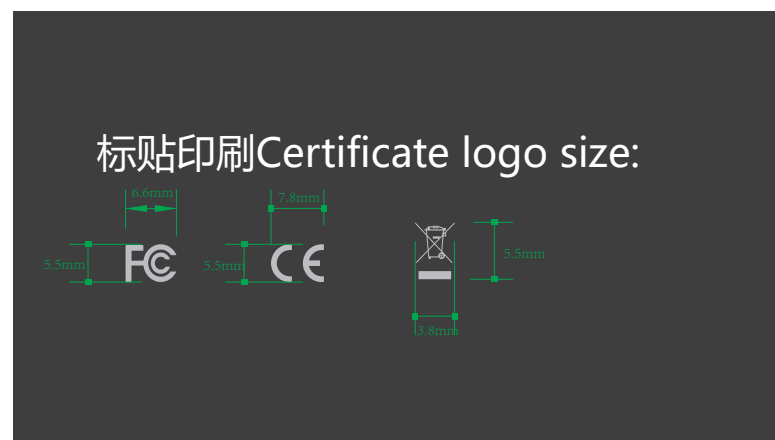