



**CFR 47 FCC PART 15 SUBPART C  
ISED RSS-247 ISSUE 2**

**TEST REPORT**

*For*

**BLUETOOTH HEADSET**

**MODEL NUMBER: TUNE BUDS**

**REPORT NUMBER: 4790624339-1-RF-2**

**ISSUE DATE: November 16, 2022**

**FCC ID: APIJBLTUNEBUDS**

**IC: 6132A-JBLTUNEBUDS**

*Prepared for*

**Harman International Industries, Inc**

**8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.



### Revision History

Rev.	Issue Date	Revisions	Revised By
V0	November 16, 2022	Initial Issue	



### Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC 15.203 RSS-GEN Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013 Clause 6.2	FCC Part 15.207	Pass
Conducted Output Power	ANSI C63.10-2013 Clause 7.8.5	FCC 15.247 (b) (1) RSS-247 Clause 5.1 (b)	Pass
20 dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013 Clause 6.9.2	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a) RSS-Gen Clause 6.7	Pass
Carrier Hopping Channel Separation	ANSI C63.10-2013 Clause 7.8.2	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (b)	Pass
Number of Hopping Frequency	ANSI C63.10-2013 Clause 7.8.3	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Pass
Time of Occupancy (Dwell Time)	ANSI C63.10-2013 Clause 7.8.4	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Pass
Conducted Bandedge and Spurious Emission	ANSI C63.10-2013 Clause 6.10.4 & Clause 7.8.8	FCC 15.247 (d) RSS-247 Clause 5.5	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013 Clause 6.3 & 6.5 & 6.6	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

\*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

\*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C><ISED RSS-247 ISSUE 2> when <Accuracy Method> decision rule is applied.

## CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>7</b>
<b>2. TEST METHODOLOGY.....</b>	<b>8</b>
<b>3. FACILITIES AND ACCREDITATION.....</b>	<b>8</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>9</b>
4.1. MEASURING INSTRUMENT CALIBRATION .....	9
4.2. MEASUREMENT UNCERTAINTY.....	9
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>10</b>
5.1. DESCRIPTION OF EUT .....	10
5.2. CHANNEL LIST .....	10
5.3. MAXIMUM EIRP .....	10
5.4. TEST CHANNEL CONFIGURATION.....	11
5.5. THE WORSE CASE POWER SETTING PARAMETER.....	11
5.6. DESCRIPTION OF AVAILABLE ANTENNAS .....	12
5.7. SUPPORT UNITS FOR SYSTEM TEST.....	13
<b>6. MEASURING EQUIPMENT AND SOFTWARE USED.....</b>	<b>15</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>18</b>
7.1. CONDUCTED OUTPUT POWER.....	18
7.2. 20 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	19
7.3. CARRIER HOPPING CHANNEL SEPARATION.....	20
7.4. NUMBER OF HOPPING FREQUENCY.....	22
7.5. TIME OF OCCUPANCY (DWEIL TIME).....	23
7.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSION.....	25
7.7. DUTY CYCLE.....	27
<b>8. RADIATED TEST RESULTS.....</b>	<b>28</b>
8.1. RESTRICTED BANDEDGE.....	37
8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ) .....	42
8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ) .....	48
8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ) .....	60
8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ) .....	63
8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ).....	65
8.7. RESTRICTED BANDEDGE.....	67
8.8. SPURIOUS EMISSIONS(1 GHZ~3 GHZ) .....	71
8.9. SPURIOUS EMISSIONS(3 GHZ~18 GHZ) .....	77



8.10.	SPURIOUS EMISSIONS(9 KHZ~30 MHZ) .....	89
8.11.	SPURIOUS EMISSIONS(18 GHZ~26 GHZ) .....	92
8.12.	SPURIOUS EMISSIONS(30 MHZ~1 GHZ) .....	94
<b>9.</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>96</b>
<b>10.</b>	<b>AC POWER LINE CONDUCTED EMISSION .....</b>	<b>97</b>
<b>11.</b>	<b>TEST DATA FOR RIGHT BLUETOOTH EARPHONE .....</b>	<b>100</b>
11.1.	APPENDIX A: 20DB EMISSION BANDWIDTH .....	100
11.1.1.	Test Result.....	100
11.1.2.	Test Graphs .....	101
11.2.	APPENDIX B: OCCUPIED CHANNEL BANDWIDTH.....	103
11.2.1.	Test Result.....	103
11.2.2.	Test Graphs .....	104
11.3.	APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER.....	106
11.3.1.	Test Result.....	106
11.4.	APPENDIX D: CARRIER FREQUENCY SEPARATION .....	107
11.4.1.	Test Result.....	107
11.4.2.	Test Graphs .....	108
11.5.	APPENDIX E: TIME OF OCCUPANCY .....	109
11.5.1.	Test Result.....	109
11.5.2.	Test Graphs .....	110
11.6.	APPENDIX F: NUMBER OF HOPPING CHANNELS.....	112
11.6.1.	Test Result.....	112
11.6.2.	Test Graphs .....	113
11.7.	APPENDIX G: BAND EDGE MEASUREMENTS .....	114
11.7.1.	Test Result.....	114
11.7.2.	Test Graphs .....	115
11.8.	APPENDIX H: CONDUCTED SPURIOUS EMISSION.....	118
11.8.1.	Test Result.....	118
11.8.2.	Test Graphs .....	119
11.9.	APPENDIX I: DUTY CYCLE .....	125
11.9.1.	Test Result.....	125
11.9.2.	Test Graphs .....	126
<b>12.</b>	<b>TEST DATA FOR LEFT BLUETOOTH EARPHONE.....</b>	<b>127</b>
12.1.	APPENDIX A: 20DB EMISSION BANDWIDTH .....	127
12.1.1.	Test Result.....	127
12.1.2.	Test Graphs .....	128
12.2.	APPENDIX B: OCCUPIED CHANNEL BANDWIDTH.....	130
12.2.1.	Test Result.....	130
12.2.2.	Test Graphs .....	131
12.3.	APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER.....	133
12.3.1.	Test Result.....	133
12.4.	APPENDIX D: CARRIER FREQUENCY SEPARATION .....	134
12.4.1.	Test Result.....	134



12.4.2.	Test Graphs .....	135
12.5.	<i>APPENDIX E: TIME OF OCCUPANCY</i> .....	136
12.5.1.	Test Result.....	136
12.5.2.	Test Graphs .....	137
12.6.	<i>APPENDIX F: NUMBER OF HOPPING CHANNELS</i> .....	139
12.6.1.	Test Result.....	139
12.6.2.	Test Graphs .....	140
12.7.	<i>APPENDIX G: BAND EDGE MEASUREMENTS</i> .....	141
12.7.1.	Test Result.....	141
12.7.2.	Test Graphs .....	142
12.8.	<i>APPENDIX H: CONDUCTED SPURIOUS EMISSION</i> .....	145
12.8.1.	Test Result.....	145
12.8.2.	Test Graphs .....	146
12.9.	<i>APPENDIX I: DUTY CYCLE</i> .....	152
12.9.1.	Test Result.....	152
12.9.2.	Test Graphs .....	153



## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: Harman International Industries, Inc  
Address: 8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

### Manufacturer Information

Company Name: Harman International Industries, Inc  
Address: 8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

### EUT Information

EUT Name: BLUETOOTH HEADSET  
Model: TUNE BUDS  
Brand: JBL  
Sample Received Date: November 4, 2022  
Sample Status: Normal  
Sample ID: 5493565  
Date of Tested: November 5, 2022 to November 16, 2022

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C ISED RSS-247 ISSUE 2	Pass

Prepared By:

Kebo Zhang  
Senior Project Engineer

Checked By:

Denny Huang  
Senior Project Engineer

Approved By:

Stephen Guo  
Operations Manager



## 2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C  
ISED RSS-247 ISSUE 2, KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01  
Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED  
RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011</p>
------------------------------	--

Note1:

All tests measurement facilities use to collect the measurement data are located at Building 10,  
Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone  
Dongguan, 523808, People's Republic of China.

Note2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd.  
Song Shan Lake Branch had been calibrated and compared to the open field sites and the test  
anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to  
measurements obtained on an open field site. And these measurements below 30 MHz had  
been correlated to measurements performed on an OFS.





## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	BLUETOOTH HEADSET
Model	TUNE BUDS
Frequency Range:	2402 MHz to 2480 MHz
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Normal Test Voltage:	DC 5 V

### 5.2. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

### 5.3. MAXIMUM EIRP

Right Bluetooth earphone

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)	Maximum EIRP (dBm)
GFSK	2402 ~ 2480	0-78[79]	13.71	9.71
8DPSK	2402 ~ 2480	0-78[79]	13.76	9.76

Left Bluetooth earphone

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)	Maximum EIRP (dBm)
GFSK	2402 ~ 2480	0-78[79]	14.06	9.66
8DPSK	2402 ~ 2480	0-78[79]	14.07	9.67

## 5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK-DH5	CH 00(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
8DPSK-3DH5	CH 00(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
GFSK-DH5	Hopping	
8DPSK-3DH5	Hopping	

## PACKET TYPE CONFIGURATION

Test Mode	Packet Type	Setting (Packet Length)
GFSK	DH1	27
	DH3	183
	DH5	339
π/4-DQPSK	2-DH1	54
	2-DH3	367
	2-DH5	679
8DPSK	3-DH1	83
	3-DH3	552
	3-DH5	1021

## 5.5. THE WORSE CASE POWER SETTING PARAMETER

### WORST-CASE CONFIGURATIONS

Bluetooth Mode	Modulation Technology	Modulation Type	Data Rate (Mbps)
BR	FHSS	GFSK	1Mbit/s
EDR	FHSS	8DPSK	3Mbit/s

Note: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		BQB		
Modulation Type	Transmit Antenna Number	Test Software setting value		
		CH 00	CH 39	CH 78
GFSK	1	4	4	4
8DPSK	1	4	4	4

## 5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Bluetooth earphone	Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
Right	1	2402-2480	FPC Antenna	-4.0
Left	1	2402-2480	FPC Antenna	-4.4

Test Mode	Transmit and Receive Mode	Description
GFSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
8DPSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

Note: The value of the antenna gain was declared by customer.

## 5.7. SUPPORT UNITS FOR SYSTEM TEST

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
1	PC	Lenovo	E42-80	/
2	AC Power Adapter	HUAWEI	HW-050200C01	Input: 100-240V~50/60Hz, 0.5A Output: DC 5 V, 2A

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB 1	Type C	/	1.0	/
1	USB 2	Micro	/	1.0	/

### ACCESSORIES


Item	Accessory	Brand Name	Model Name	Description
1	USB 3	/	/	0.25m

### TEST SETUP


The EUT can work in engineering mode with a software through a Laptop.

**SETUP DIAGRAM FOR TESTS**

For Others:

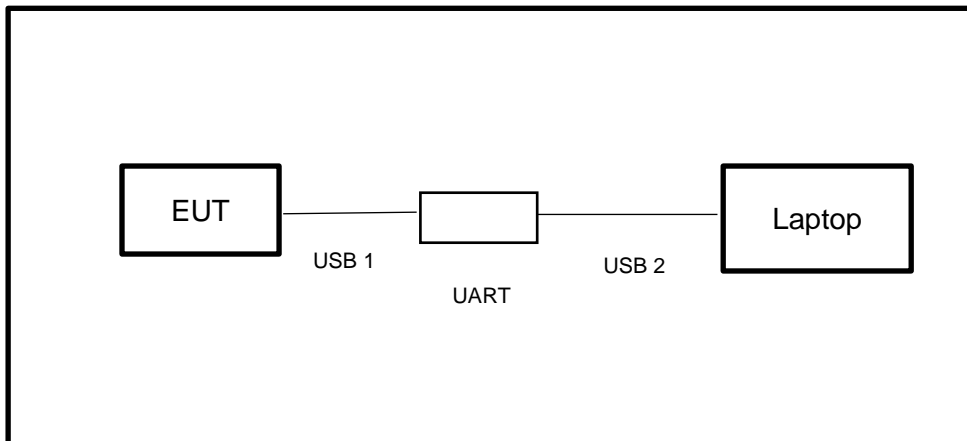

For AC POWER LINE CONDUCTED EMISSION:

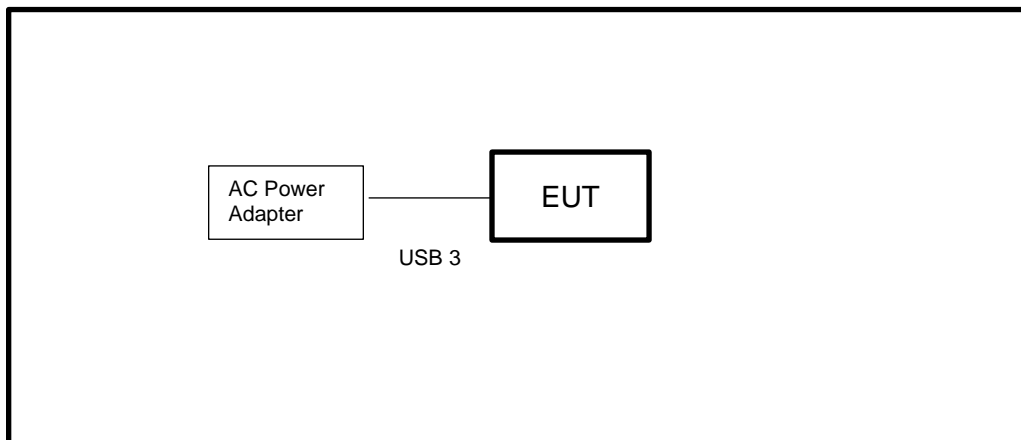

## 6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Apr.02,2022	Apr.01,2023
Vector Signal Generator	R&S	SMBV100A	261637	Oct.17, 2022	Oct.16, 2023
Signal Generator	R&S	SMB100A	178553	Oct.17, 2022	Oct.16, 2023
Signal Analyzer	R&S	FSV40	101118	Oct.17, 2022	Oct.16, 2023
Software					
Description	Manufacturer		Name		Version
For R&S TS 8997 Test System	Rohde & Schwarz		EMC 32		10.60.10
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.17, 2022	Oct.16, 2023
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.28, 2022	Sep.27, 2023
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.17, 2022	Oct.16, 2023
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.17, 2022	Oct.16, 2023
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.17, 2022	Oct.16, 2023
DC power supply	Keysight	E3642A	MY55159130	Oct.17, 2022	Oct.16, 2023
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Oct.17, 2022	Oct.16, 2023
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		2.6.77.0518	



Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.17, 2022	Oct.16, 2023
Two-Line V-Network	R&S	ENV216	101983	Oct.17, 2022	Oct.16, 2023
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.17, 2022	Oct.16, 2023
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.17, 2022	Oct.16, 2023
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.17, 2022	Oct.16, 2023
EMI Measurement Receiver	R&S	ESR26	101377	Oct.17, 2022	Oct.16, 2023
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.17, 2022	Oct.16, 2023
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.17, 2022	Oct.16, 2023
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.17, 2022	Oct.16, 2023
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.17, 2022	Oct.16, 2023
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01202035	Oct.17, 2022	Oct.16, 2023
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	/	/
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	/	/
Band Reject Filter	Wainwright	WRCJV12-5695-5725-5850-5880-40SS	4	/	/
Band Reject Filter	Wainwright	WRCJV20-5120-5150-	2	/	/





		5350-5380-60SS			
Band Reject Filter	Wainwright	WRCJV20-5440-5470-5725-5755-60SS	1	/	/
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	/	/
Band Reject Filter	Wainwright	WRCD5-1879-1879.85-1880.15-1881-40SS	1	/	/
Notch Filter	Wainwright	WHJ10-882-980-7000-40SS	1	/	/
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.22, 2022	Oct.21, 2023
Barometer	Yiyi	Baro	N/A	Oct.24, 2022	Oct.23, 2023
Attenuator	Agilent	8495B	2814a12853	Oct.18, 2022	Oct.17, 2023



## 7. ANTENNA PORT TEST RESULTS

### 7.1. CONDUCTED OUTPUT POWER

#### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (b) (1) ISED RSS-247 Clause 5.4 (b)	Peak Conducted Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel: 1 watt or 30 dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel: 125 mW or 21 dBm	2400-2483.5

#### TEST PROCEDURE

For Peak Power:

Refer to ANSI C63.10-2013 clause 11.9.1.3.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

For AVG Power:


Refer to ANSI C63.10-2013 clause 11.9.2.3.1.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

The test result in dBm by adding  $[10 \log (1 / D)]$ , where D is the duty cycle.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	24°C	Relative Humidity	63%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

#### TEST RESULTS

Please refer to section "Test Data" - Appendix C

## 7.2. 20 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

### LIMITS

CFR 47FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a)	20 dB Bandwidth	None; for reporting purposes only.	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	None; for reporting purposes only.	2400-2483.5

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 6.9.2.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20 dB Bandwidth: 1 % to 5 % of the 20 dB bandwidth For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 20 dB Bandwidth: approximately 3×RBW For 99 % Occupied Bandwidth: ≥ 3×RBW
Span	Approximately 2 to 3 times the 20dB bandwidth
Trace	Max hold
Sweep	Auto couple

a) Use the occupied bandwidth function of the instrument, allow the trace to stabilize and report the measured 99 % occupied bandwidth and 20 dB Bandwidth.

### TEST SETUP

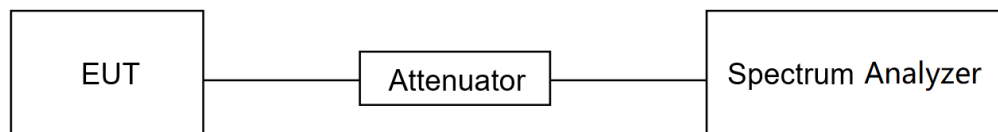

### TEST ENVIRONMENT

Temperature	24°C	Relative Humidity	63%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

### TEST RESULTS

Please refer to section "Test Data" - Appendix A&B

### 7.3. CARRIER HOPPING CHANNEL SEPARATION

#### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISSED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) ISSED RSS-247 Clause 5.1 (b)	Carrier Frequency Separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.	2400-2483.5

#### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	≥RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize and use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

#### TEST SETUP

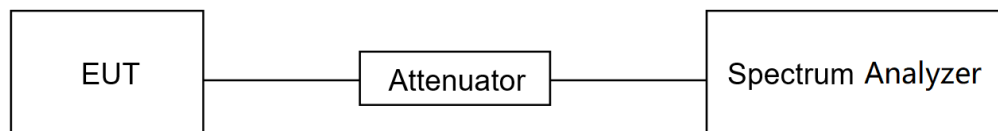

#### TEST ENVIRONMENT

Temperature	24°C	Relative Humidity	63%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V



## **TEST RESULTS**

Please refer to section "Test Data" - Appendix D

## 7.4. NUMBER OF HOPPING FREQUENCY

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III ISED RSS-247 Clause 5.1 (d)	Number of Hopping Frequency	at least 15 hopping channels

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 7.8.3.

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	≥RBW
Span	The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer, count the quantity of peaks to get the number of hopping channels.

### TEST SETUP

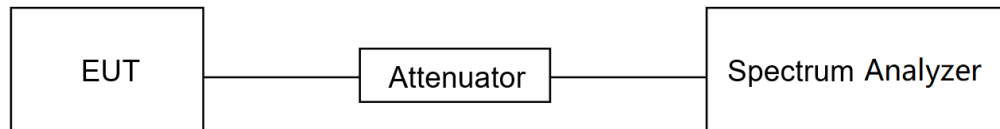

### TEST ENVIRONMENT

Temperature	24°C	Relative Humidity	63%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

### TEST RESULTS

Please refer to section "Test Data" - Appendix F

## 7.5. TIME OF OCCUPANCY (DWELL TIME)

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III ISED RSS-247 Clause 5.1 (d)	Time of Occupancy (Dwell Time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.4.

Connect the EUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1 MHz
VBW	≥RBW
Span	Zero span, centered on a hopping channel
Trace	Max hold
Sweep time	As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel

Use the marker-delta function to determine the transmit time per hop (Burst Width). If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

For FHSS Mode (79 Channel):

DH1/3DH1 Dwell Time:  $\text{Burst Width} * (1600/2) * 31.6 / (\text{channel number})$

DH3/3DH3 Dwell Time:  $\text{Burst Width} * (1600/4) * 31.6 / (\text{channel number})$

DH5/3DH5 Dwell Time:  $\text{Burst Width} * (1600/6) * 31.6 / (\text{channel number})$


For AFHSS Mode (20 Channel):

DH1/3DH1 Dwell Time:  $\text{Burst Width} * (1600/2) * 8 / (\text{channel number})$

DH3/3DH3 Dwell Time:  $\text{Burst Width} * (1600/4) * 8 / (\text{channel number})$

DH5/3DH5 Dwell Time:  $\text{Burst Width} * (1600/6) * 8 / (\text{channel number})$

### TEST SETUP

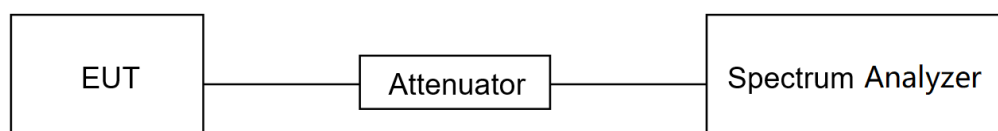



**TEST ENVIRONMENT**

Temperature	24°C	Relative Humidity	63%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

**TEST RESULTS**

Please refer to section "Test Data" - Appendix E



## 7.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSION

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.6 and 7.8.8.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.


Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum



### TEST SETUP

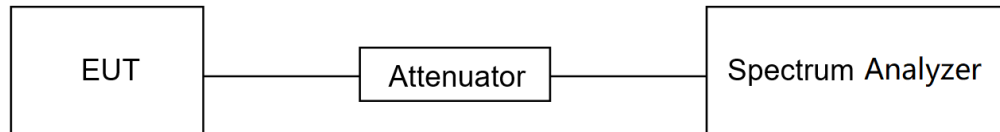

### TEST ENVIRONMENT

Temperature	24°C	Relative Humidity	63%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

### TEST RESULTS

Please refer to section "Test Data" - Appendix G&H



## 7.7. DUTY CYCLE


### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

Refer to ANSI C63.10-2013 Zero – Span Spectrum Analyzer method.

### TEST SETUP

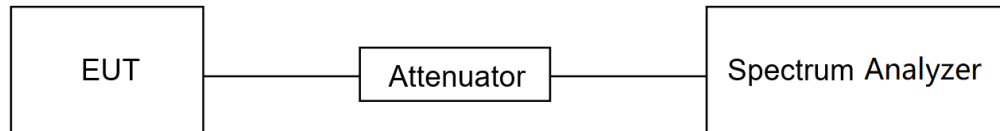

### TEST ENVIRONMENT

Temperature	24°C	Relative Humidity	63%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

### TEST RESULTS

Please refer to section "Test Data" - Appendix I



## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz-1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (uA/m)	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2695 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

**Note 1:** Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

**TEST PROCEDURE**

Below 30 MHz

The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ . For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to  $Y-51.5 = Z$  dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.



Below 1 GHz and above 30 MHz

The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.



Above 1 GHz


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.7.ON TIME AND DUTY CYCLE.



X axis, Y axis, Z axis positions:

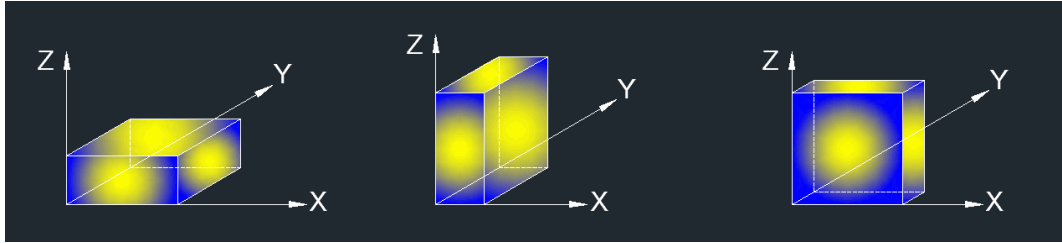

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Band edge note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.7.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Horizontal and Vertical have been tested, only the worst data was recorded in the report.
8. All modes and channels have been tested, only the worst data was recorded in the report.

For Radiate Spurious emission 1 GHz-3 GHz note:

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.7.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
  8. All modes and channels have been tested, only the worst data was recorded in the report.

For Radiate Spurious emission 3 GHz-18 GHz note:

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.7.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

For Radiate Spurious emission 9 kHz-30 MHz note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes and channels have been tested, only the worst data was recorded in the report.


For Radiate Spurious emission 18 GHz-26 GHz note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. All modes and channels have been tested, only the worst data was recorded in the report.


For Radiate Spurious emission 30MHz-1GHz note:

1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
4. All modes and channels have been tested, only the worst data was recorded in the report.


## TEST SETUP

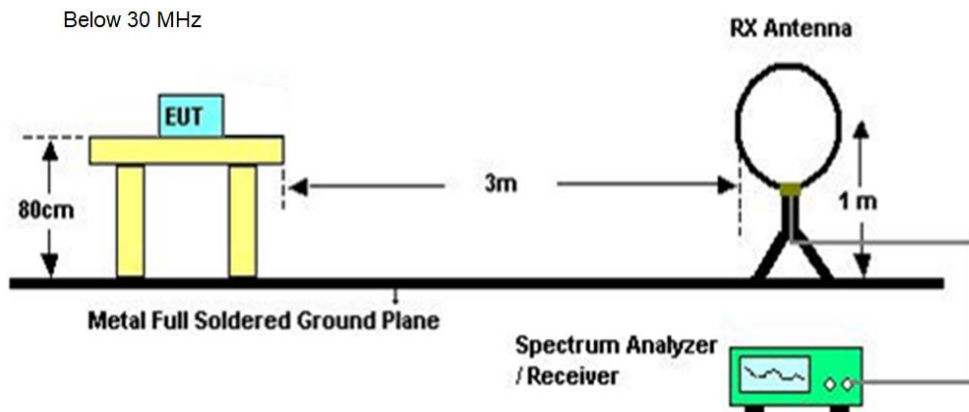

Below 1 GHz and above 30 MHz

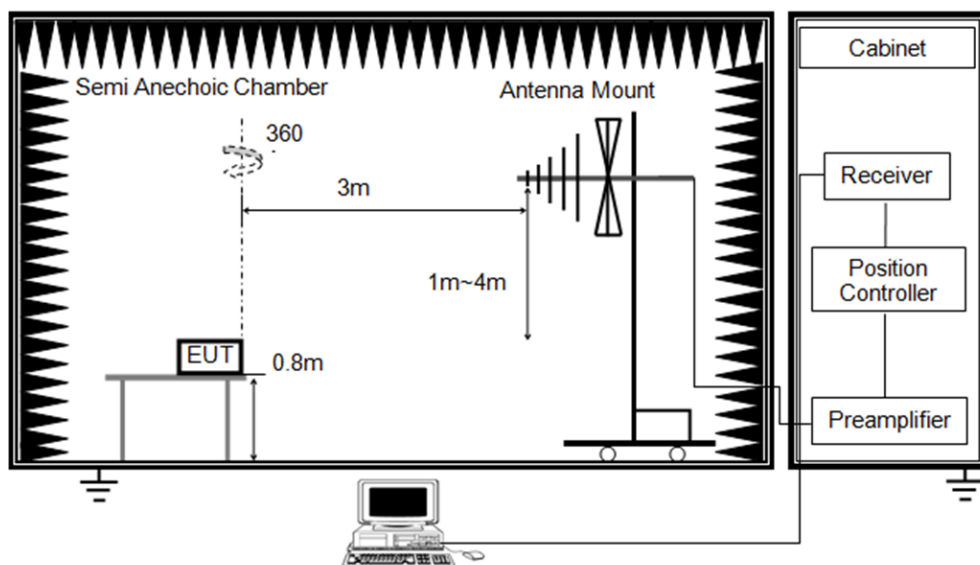

Above 1 GHz

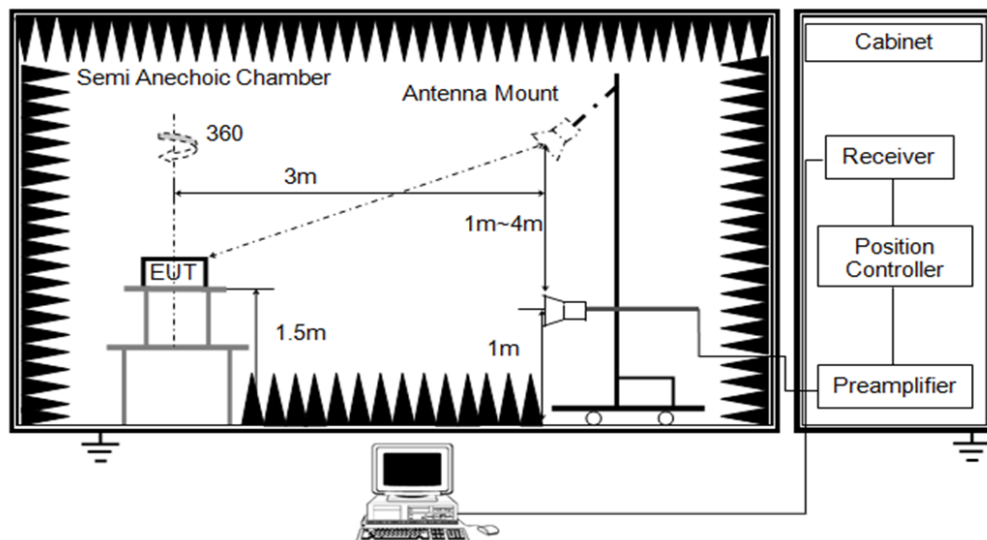



**TEST ENVIRONMENT**

Temperature	24.8°C	Relative Humidity	61%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V


**TEST RESULTS**



TEST RESULTS FOR RIGHT BLUETOOTH EARPHONE

8.1. RESTRICTED BANDEDGE


Test Mode:	GFSK PK	Channel:	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

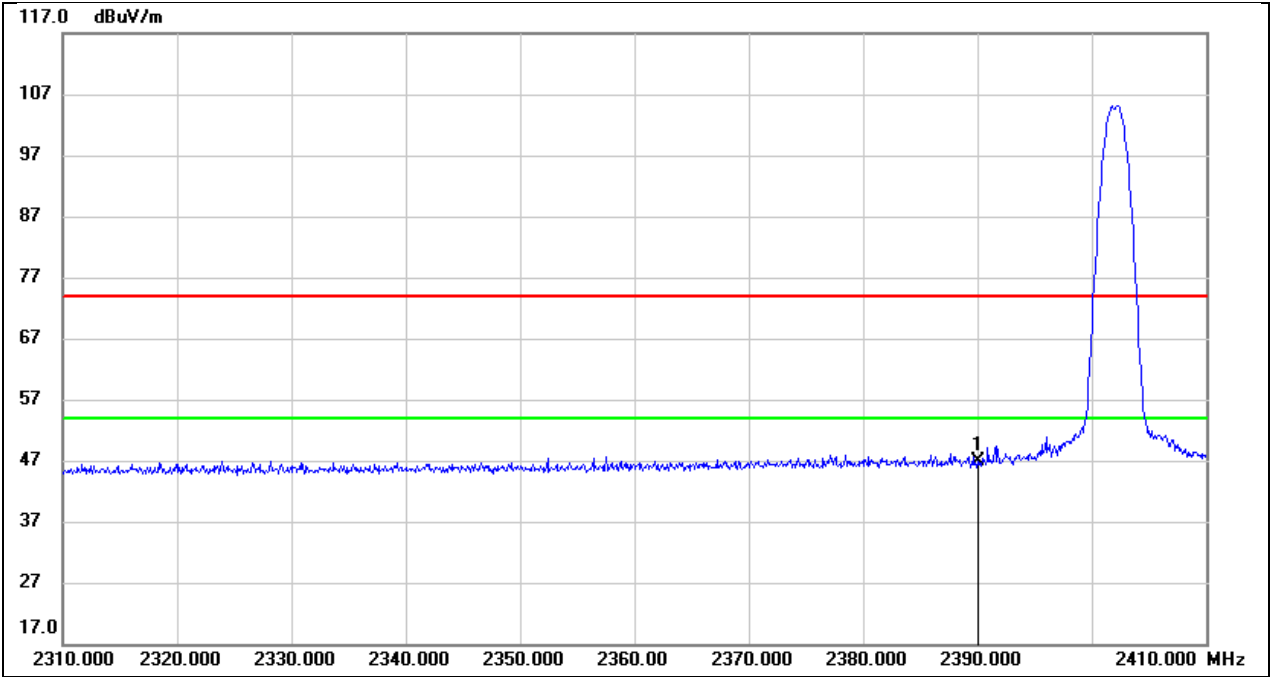

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	14.83	32.16	46.99	74.00	-27.01	peak




Test Mode:	GFSK PK	Channel:	2402
Polarity:	Vertical	Test Voltage:	DC 5 V

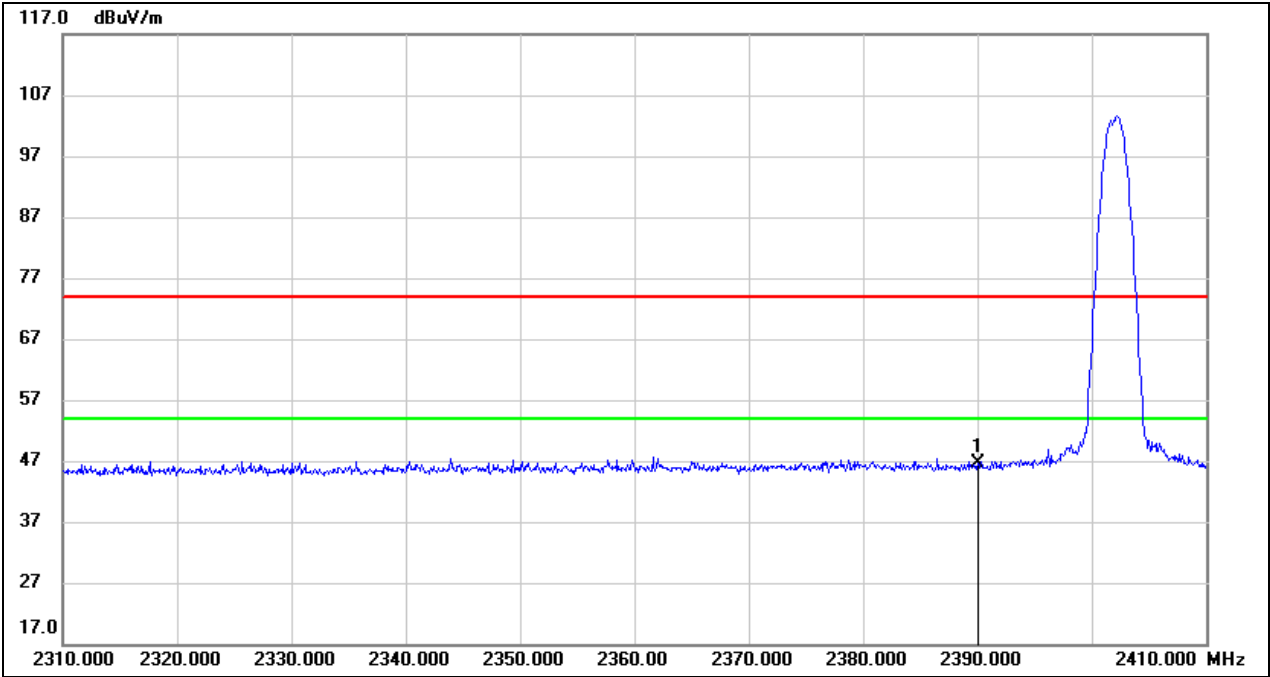

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	14.52	32.16	46.68	74.00	-27.32	peak




Test Mode:	GFSK PK	Channel:	2480
Polarity:	Horizontal	Test Voltage:	DC 5 V

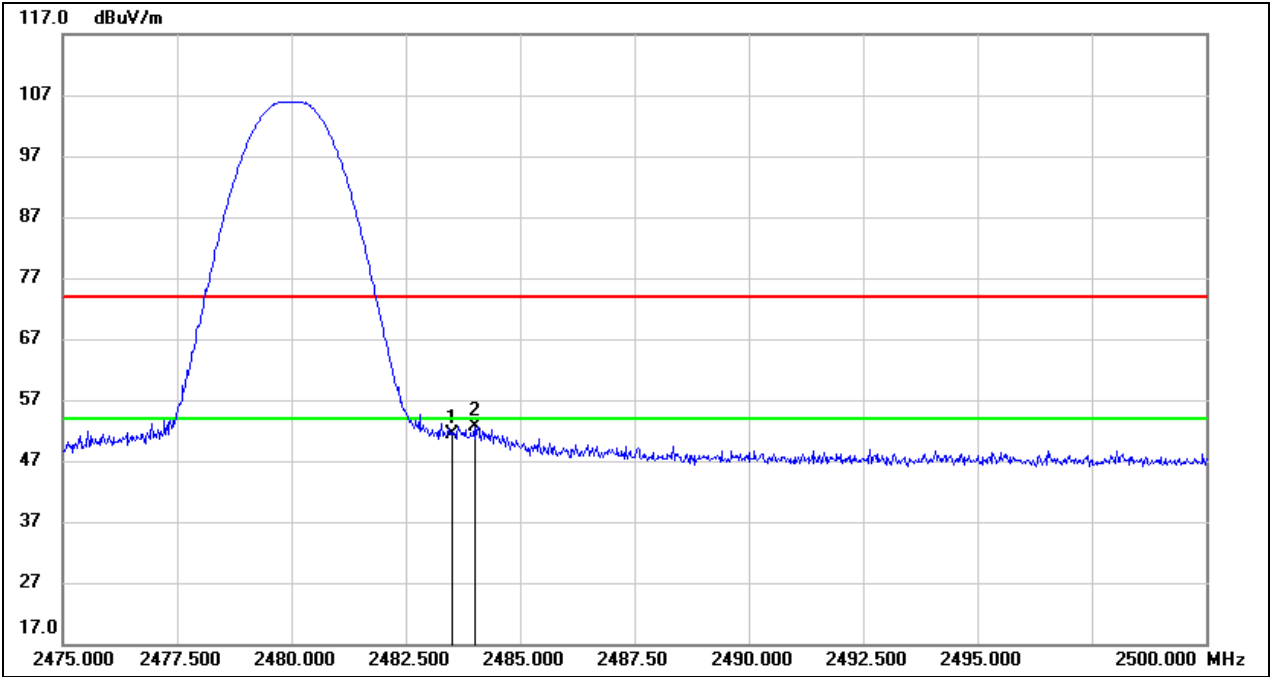

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.87	32.44	51.31	74.00	-22.69	peak
2	2484.000	20.30	32.44	52.74	74.00	-21.26	peak



Test Mode:	8DPSK PK	Channel:	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

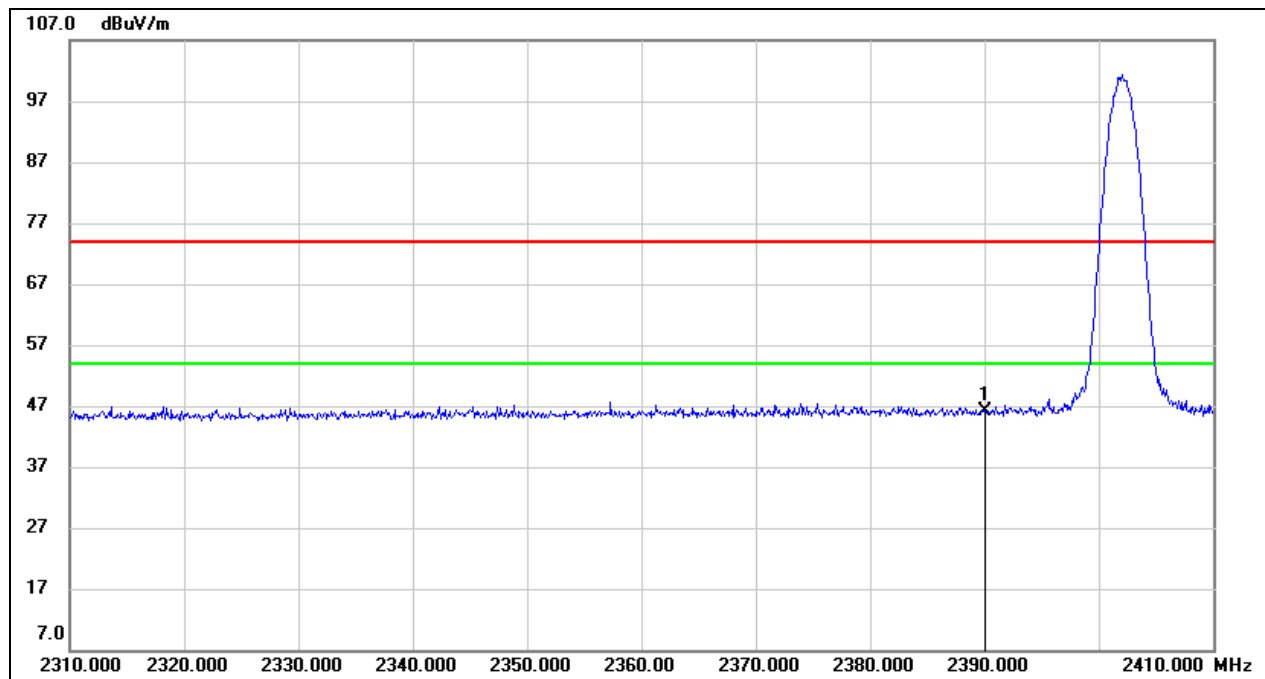


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	13.94	32.16	46.10	74.00	-27.90	peak





Test Mode:	8DPSK PK	Channel:	2480
Polarity:	Horizontal	Test Voltage:	DC 5 V

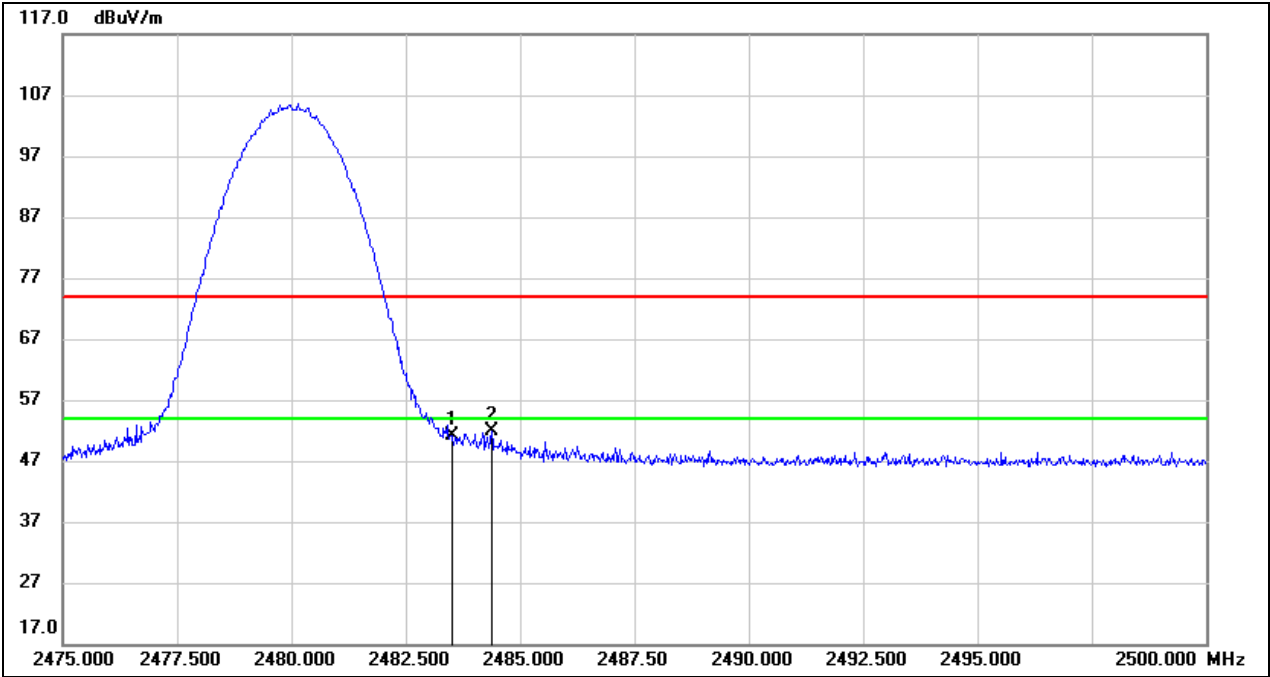


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.68	32.44	51.12	74.00	-22.88	peak
2	2484.375	19.41	32.44	51.85	74.00	-22.15	peak



## 8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)


Test Mode:	GFSK	Channel:	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

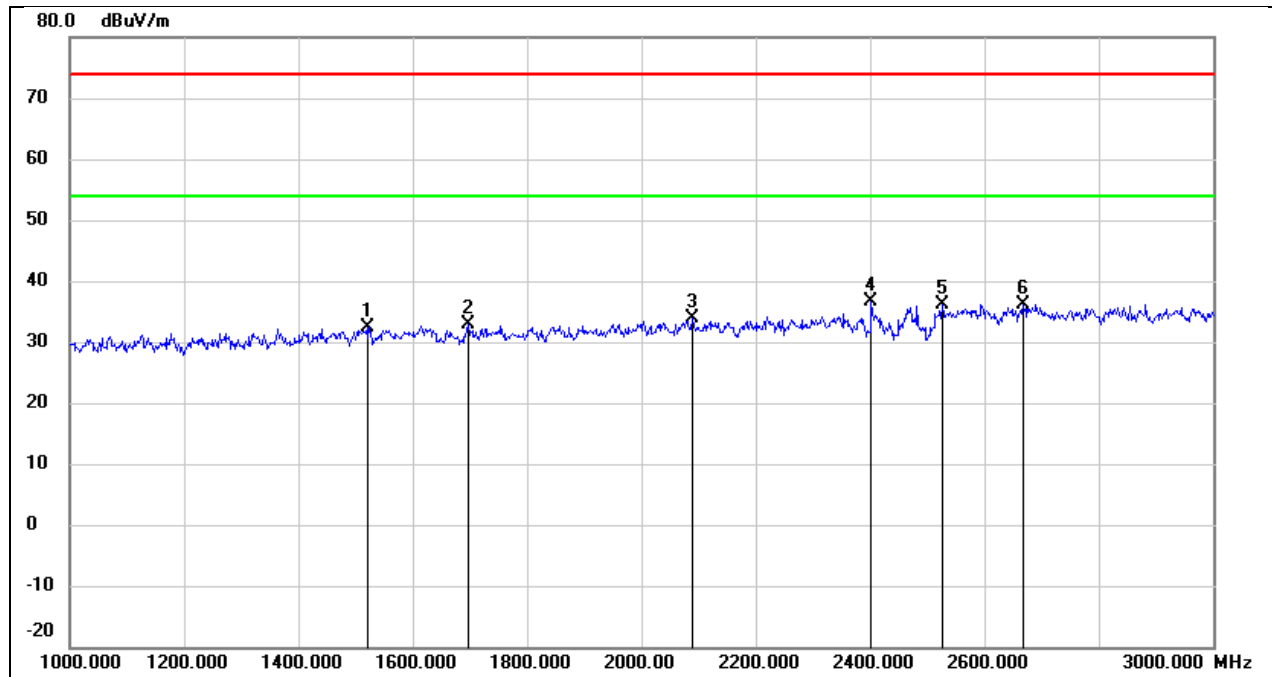

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1520.000	45.08	-12.64	32.44	74.00	-41.56	peak
2	1698.000	44.85	-12.05	32.80	74.00	-41.20	peak
3	2088.000	44.37	-10.61	33.76	74.00	-40.24	peak
4	2402.000	45.61	-8.99	36.62	74.00	-37.38	peak
5	2526.000	44.53	-8.41	36.12	74.00	-37.88	peak
6	2668.000	44.19	-7.98	36.21	74.00	-37.79	peak




Test Mode:	GFSK	Channel:	2402
Polarity:	Vertical	Test Voltage:	DC 5 V

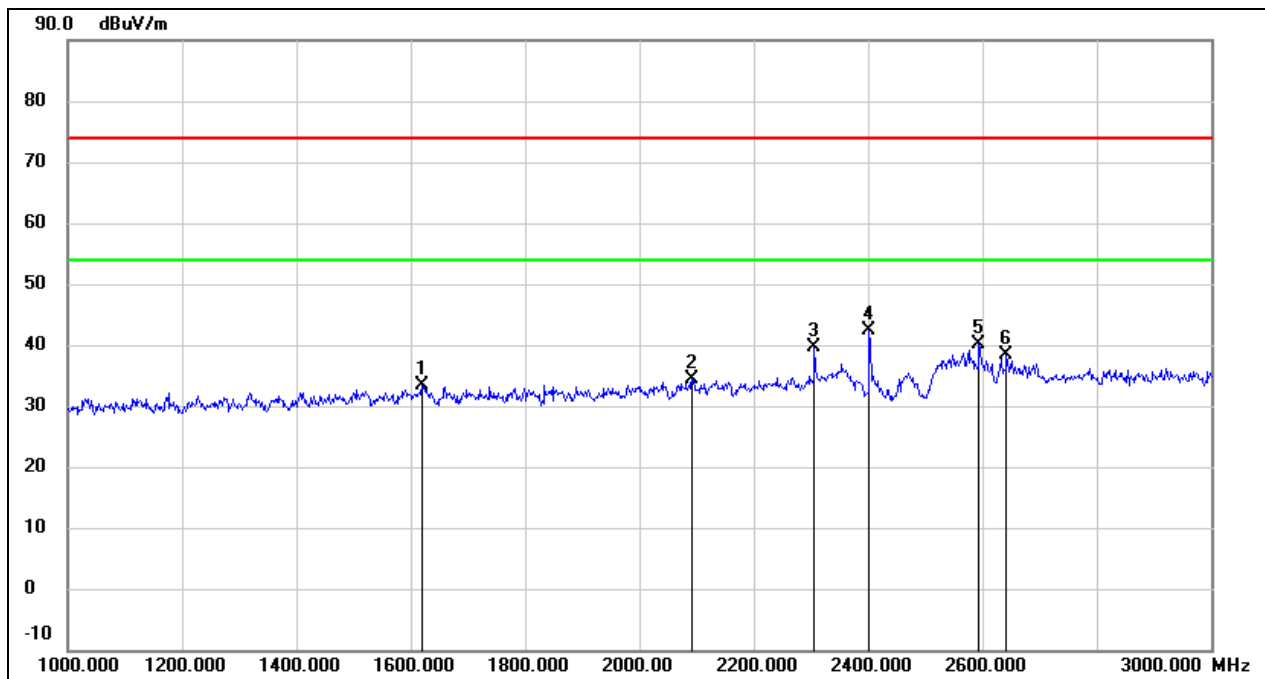

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1620.000	45.71	-12.31	33.40	74.00	-40.60	peak
2	2092.000	45.09	-10.59	34.50	74.00	-39.50	peak
3	2306.000	49.00	-9.49	39.51	74.00	-34.49	peak
4	2402.000	51.25	-8.99	42.26	74.00	-31.74	peak
5	2594.000	48.35	-8.20	40.15	74.00	-33.85	peak
6	2642.000	46.48	-8.06	38.42	74.00	-35.58	peak




Test Mode:	GFSK	Channel:	2441
Polarity:	Horizontal	Test Voltage:	DC 5 V

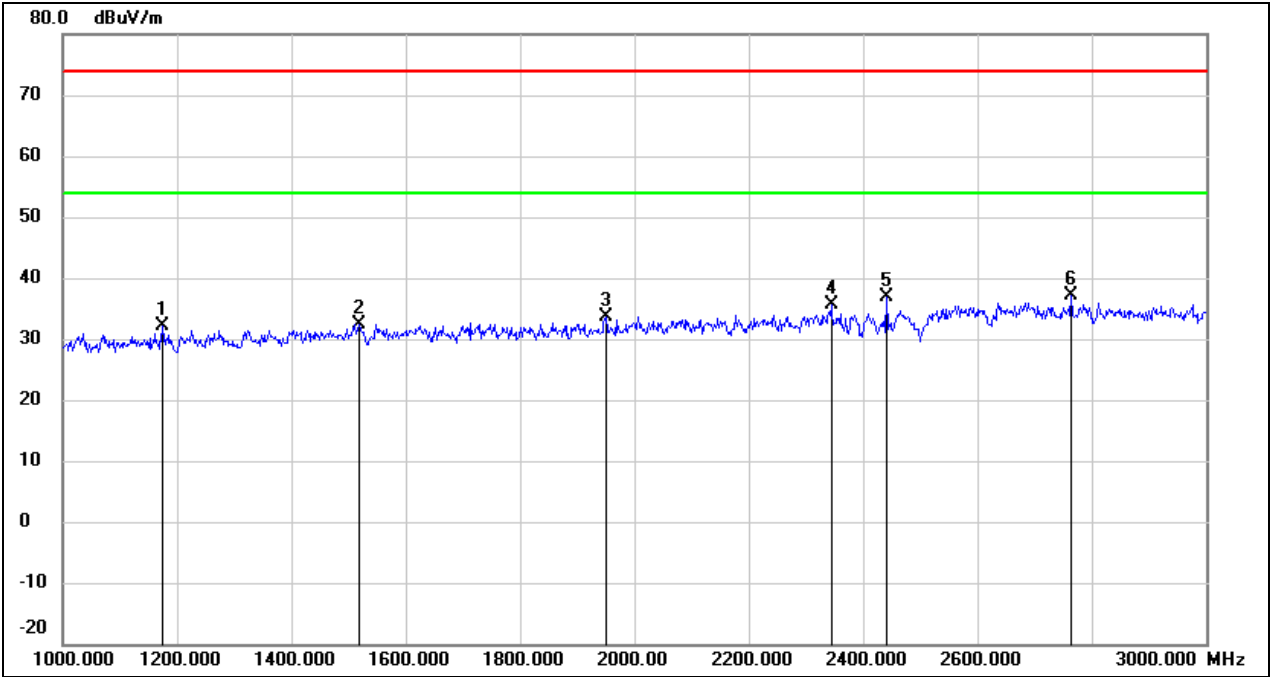

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1174.000	46.42	-14.22	32.20	74.00	-41.80	peak
2	1518.000	45.15	-12.65	32.50	74.00	-41.50	peak
3	1950.000	44.88	-11.22	33.66	74.00	-40.34	peak
4	2344.000	44.84	-9.30	35.54	74.00	-38.46	peak
5	2442.000	45.61	-8.79	36.82	74.00	-37.18	peak
6	2764.000	44.83	-7.69	37.14	74.00	-36.86	peak




Test Mode:	GFSK	Channel:	2441
Polarity:	Vertical	Test Voltage:	DC 5 V

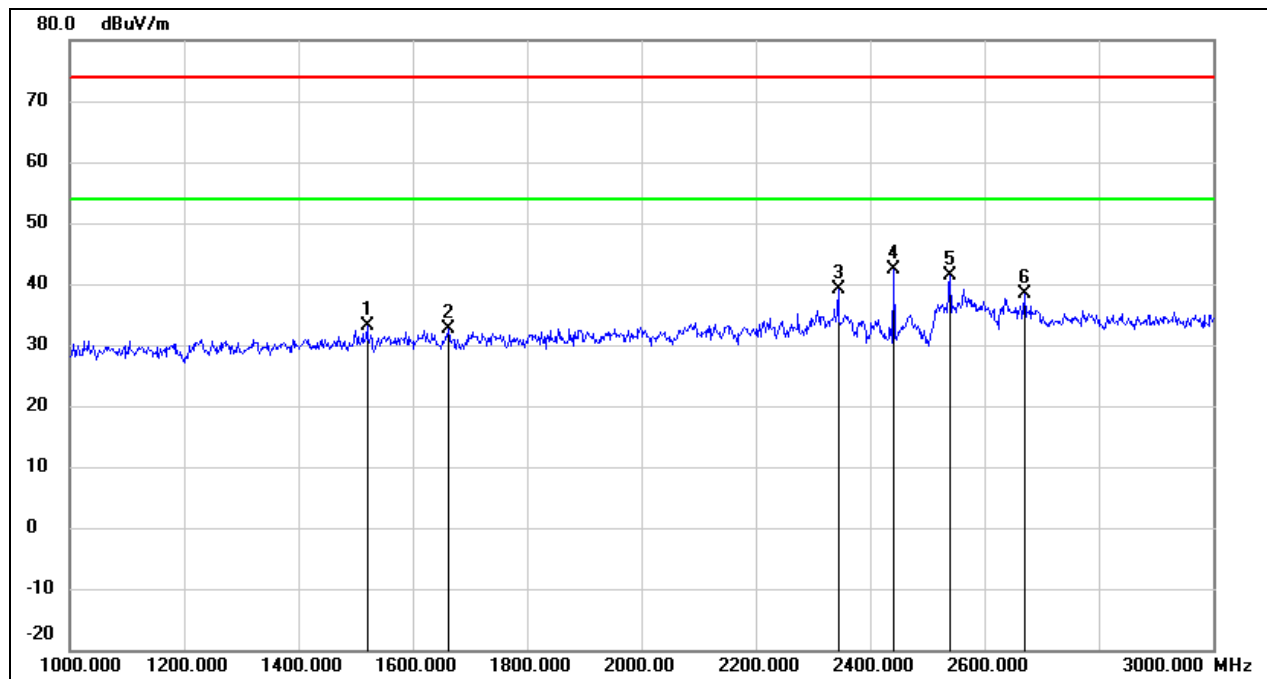

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1520.000	45.71	-12.64	33.07	74.00	-40.93	peak
2	1662.000	44.68	-12.17	32.51	74.00	-41.49	peak
3	2344.000	48.50	-9.30	39.20	74.00	-34.80	peak
4	2442.000	51.14	-8.79	42.35	74.00	-31.65	peak
5	2540.000	49.65	-8.37	41.28	74.00	-32.72	peak
6	2670.000	46.33	-7.97	38.36	74.00	-35.64	peak




Test Mode:	GFSK	Channel:	2480
Polarity:	Horizontal	Test Voltage:	DC 5 V

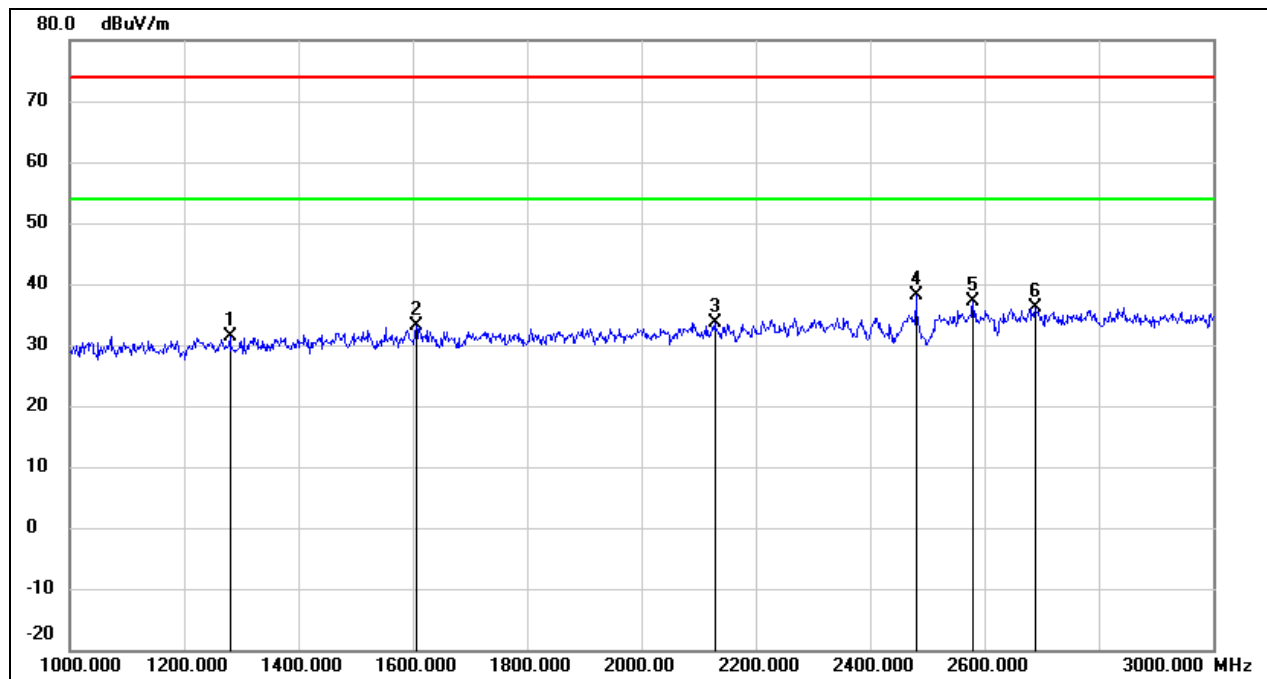

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1280.000	45.19	-13.73	31.46	74.00	-42.54	peak
2	1606.000	45.57	-12.36	33.21	74.00	-40.79	peak
3	2128.000	43.98	-10.40	33.58	74.00	-40.42	peak
4	2480.000	46.61	-8.59	38.02	74.00	-35.98	peak
5	2580.000	45.39	-8.25	37.14	74.00	-36.86	peak
6	2688.000	44.09	-7.92	36.17	74.00	-37.83	peak



Test Mode:	GFSK	Channel:	2480
Polarity:	Vertical	Test Voltage:	DC 5 V

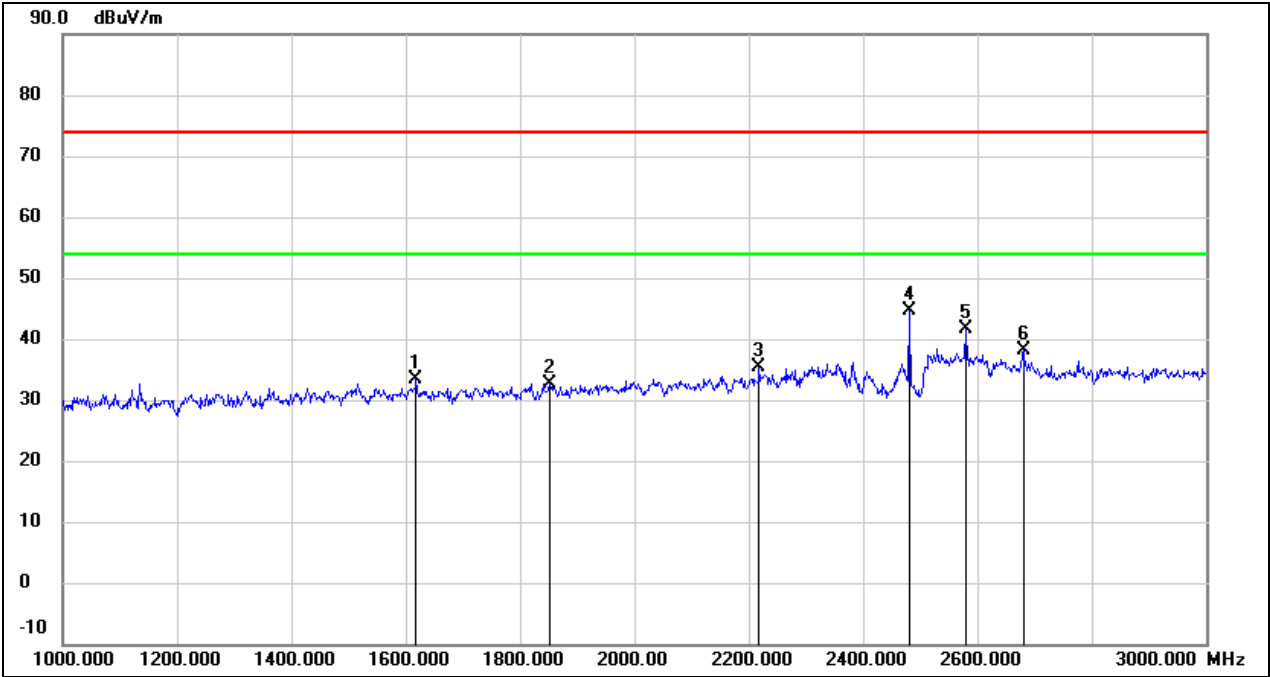


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1618.000	45.64	-12.32	33.32	74.00	-40.68	peak
2	1852.000	44.15	-11.55	32.60	74.00	-41.40	peak
3	2218.000	45.21	-9.94	35.27	74.00	-38.73	peak
4	2480.000	53.24	-8.59	44.65	74.00	-29.35	peak
5	2580.000	49.93	-8.25	41.68	74.00	-32.32	peak
6	2680.000	46.07	-7.95	38.12	74.00	-35.88	peak



### 8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)

Test Mode:	GFSK	Channel:	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

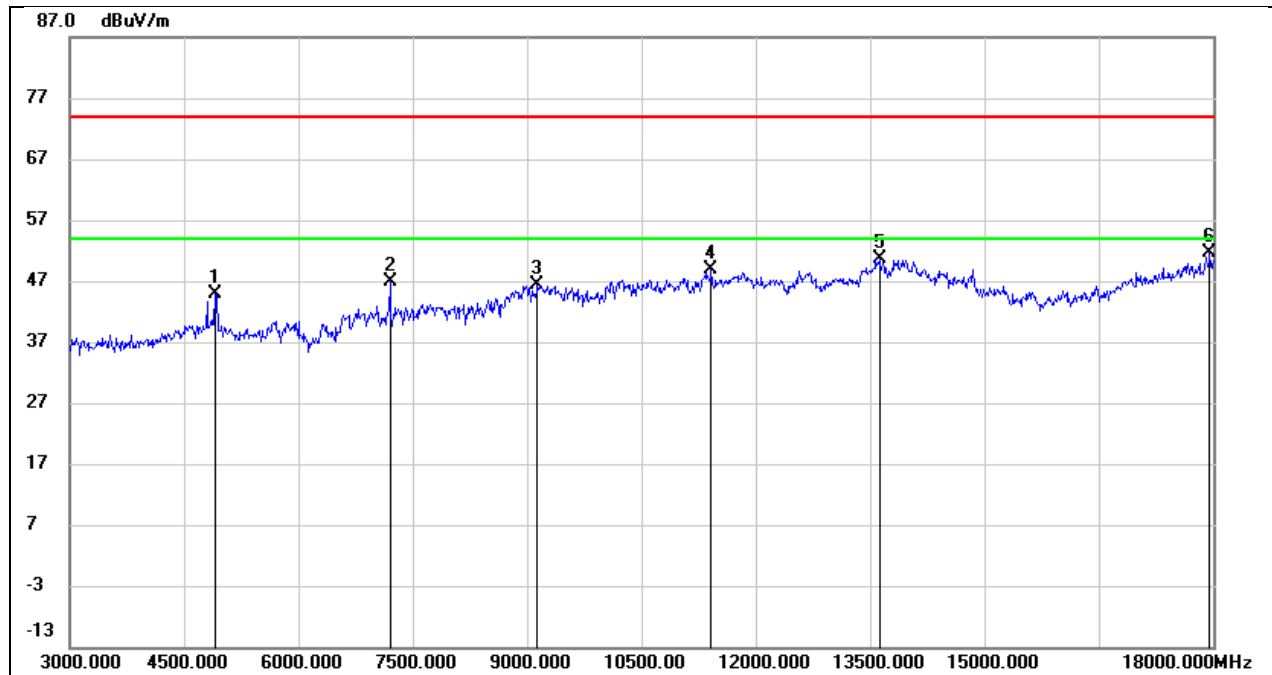


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	44.91	0.09	45.00	74.00	-29.00	peak
2	7200.000	40.39	6.55	46.94	74.00	-27.06	peak
3	9135.000	35.75	10.55	46.30	74.00	-27.70	peak
4	11415.000	32.53	16.29	48.82	74.00	-25.18	peak
5	13620.000	29.53	21.15	50.68	74.00	-23.32	peak
6	17955.000	26.27	25.42	51.69	74.00	-22.31	peak






Test Mode:	GFSK	Channel:	2402
Polarity:	Vertical	Test Voltage:	DC 5 V

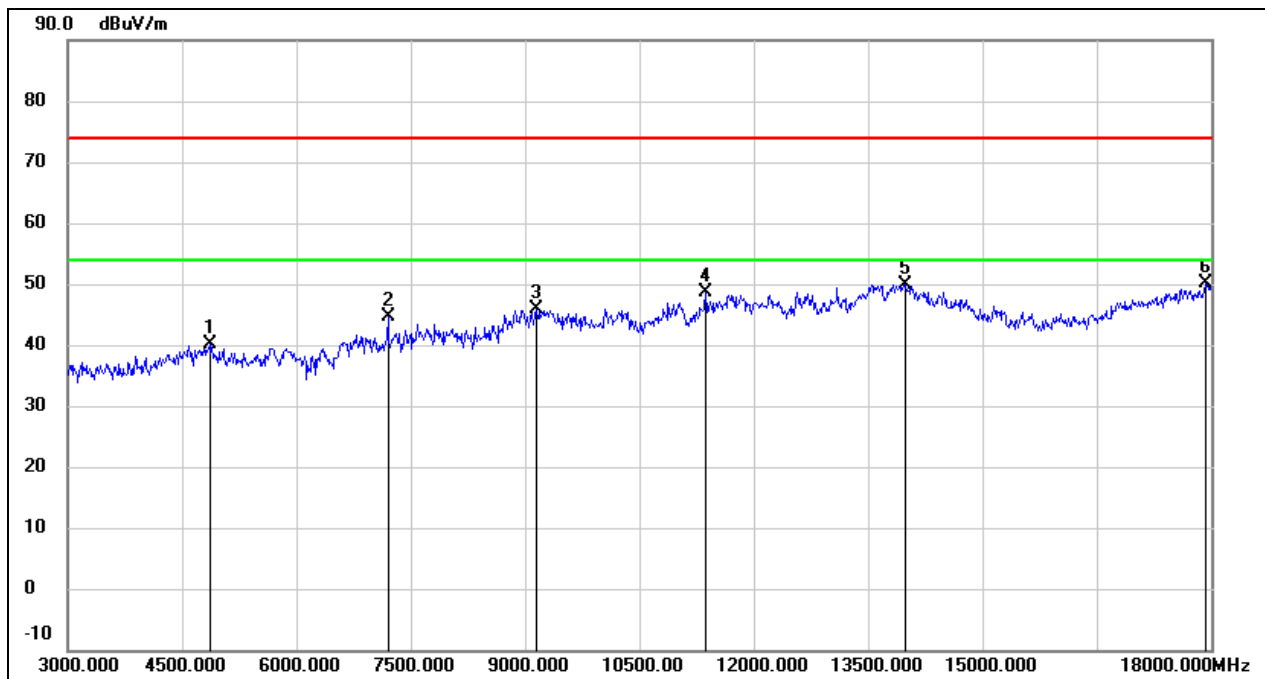

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	40.34	-0.09	40.25	74.00	-33.75	peak
2	7200.000	37.99	6.55	44.54	74.00	-29.46	peak
3	9150.000	35.26	10.54	45.80	74.00	-28.20	peak
4	11370.000	32.55	16.12	48.67	74.00	-25.33	peak
5	13980.000	28.07	21.92	49.99	74.00	-24.01	peak
6	17925.000	24.98	25.25	50.23	74.00	-23.77	peak




Test Mode:	GFSK	Channel:	2441
Polarity:	Horizontal	Test Voltage:	DC 5 V

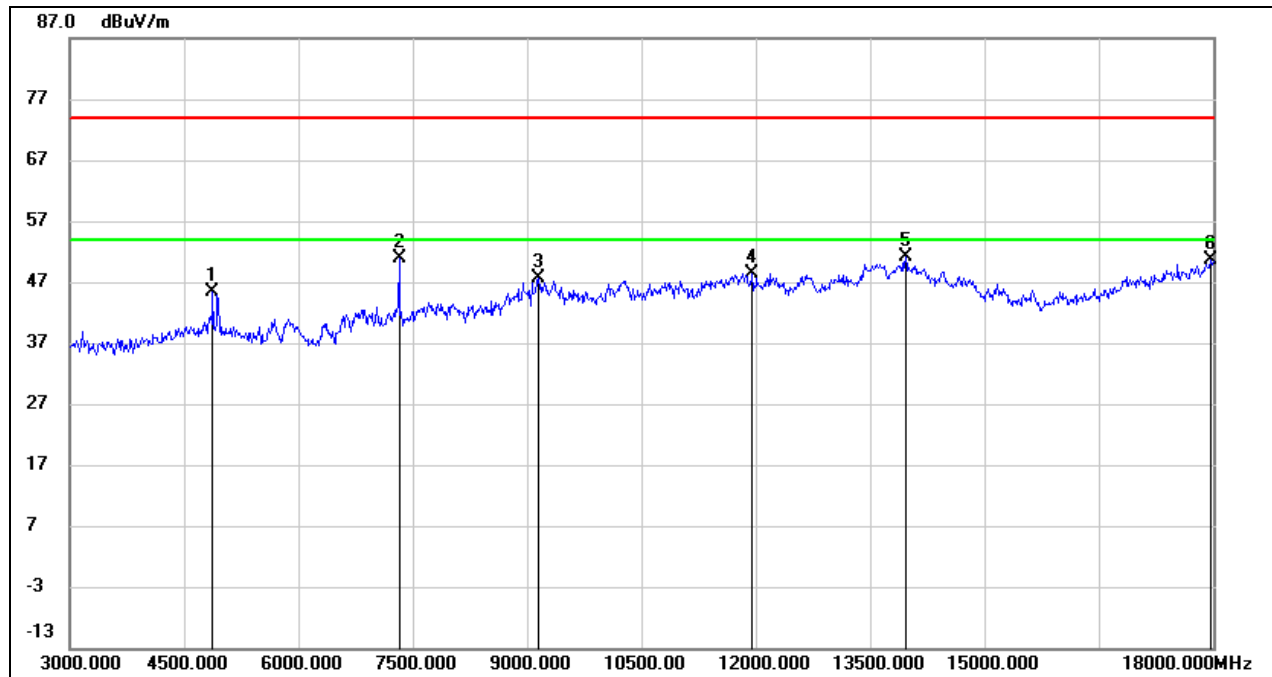

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	45.35	-0.03	45.32	74.00	-28.68	peak
2	7320.000	44.40	6.46	50.86	74.00	-23.14	peak
3	9150.000	37.02	10.54	47.56	74.00	-26.44	peak
4	11955.000	30.67	17.83	48.50	74.00	-25.50	peak
5	13965.000	29.23	21.89	51.12	74.00	-22.88	peak
6	17970.000	25.12	25.51	50.63	74.00	-23.37	peak




Test Mode:	GFSK	Channel:	2441
Polarity:	Vertical	Test Voltage:	DC 5 V

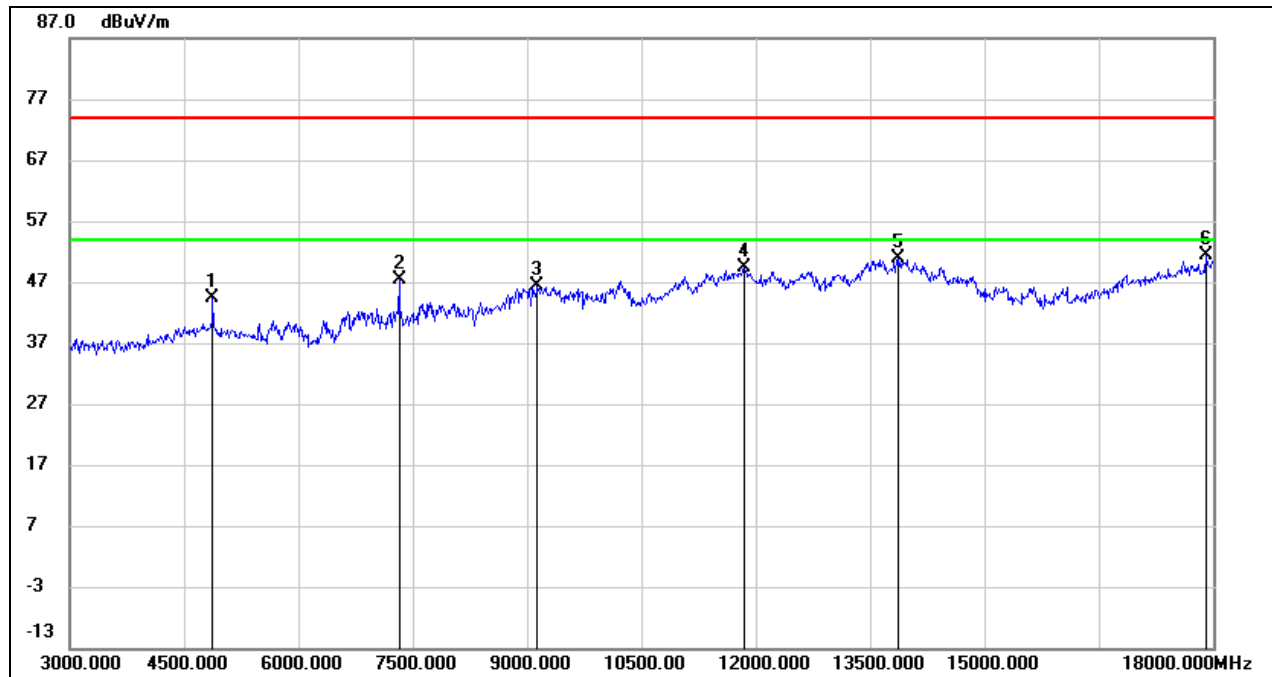

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.45	-0.03	44.42	74.00	-29.58	peak
2	7320.000	40.84	6.46	47.30	74.00	-26.70	peak
3	9135.000	35.78	10.55	46.33	74.00	-27.67	peak
4	11850.000	31.88	17.56	49.44	74.00	-24.56	peak
5	13875.000	29.29	21.70	50.99	74.00	-23.01	peak
6	17910.000	26.17	25.16	51.33	74.00	-22.67	peak




Test Mode:	GFSK	Channel:	2480
Polarity:	Horizontal	Test Voltage:	DC 5 V

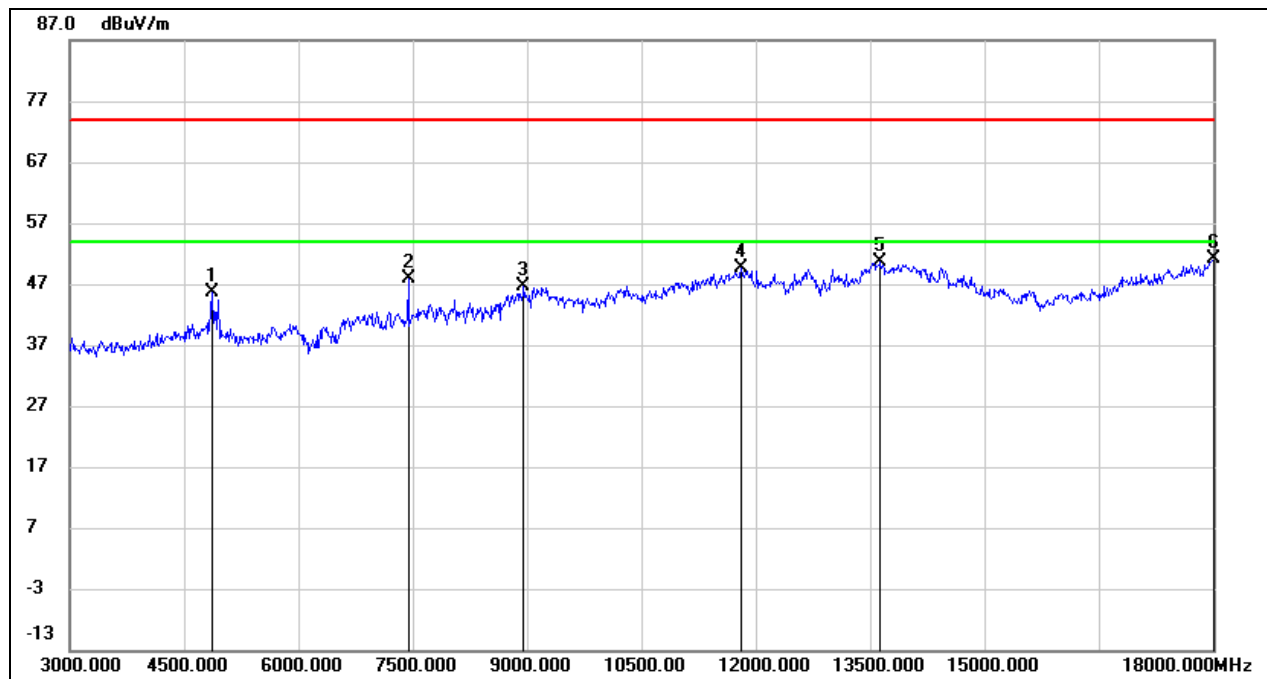

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	45.67	-0.09	45.58	74.00	-28.42	peak
2	7440.000	41.40	6.38	47.78	74.00	-26.22	peak
3	8955.000	36.48	10.16	46.64	74.00	-27.36	peak
4	11805.000	32.25	17.43	49.68	74.00	-24.32	peak
5	13635.000	29.38	21.19	50.57	74.00	-23.43	peak
6	18000.000	25.33	25.69	51.02	74.00	-22.98	peak




Test Mode:	GFSK	Channel:	2480
Polarity:	Vertical	Test Voltage:	DC 5 V

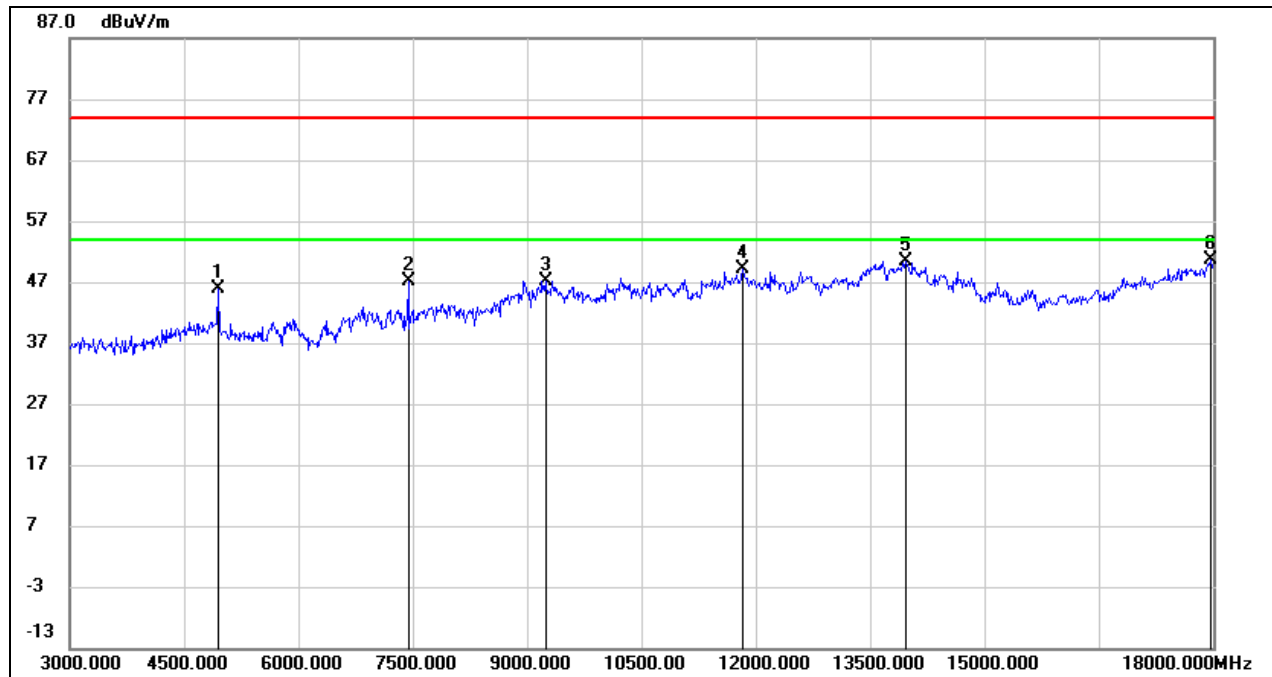

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	45.51	0.26	45.77	74.00	-28.23	peak
2	7440.000	40.72	6.38	47.10	74.00	-26.90	peak
3	9240.000	36.59	10.58	47.17	74.00	-26.83	peak
4	11835.000	31.55	17.51	49.06	74.00	-24.94	peak
5	13965.000	28.51	21.89	50.40	74.00	-23.60	peak
6	17970.000	25.23	25.51	50.74	74.00	-23.26	peak




Test Mode:	8DPSK	Channel:	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

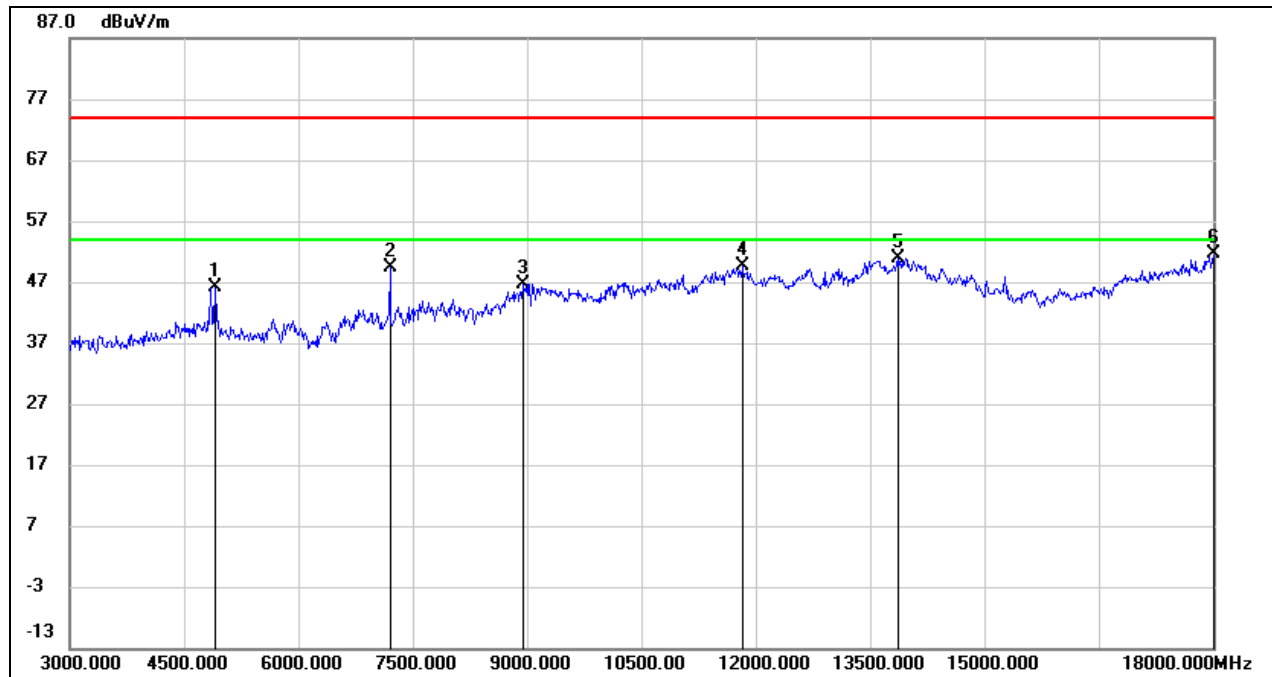

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	46.00	0.09	46.09	74.00	-27.91	peak
2	7200.000	42.95	6.55	49.50	74.00	-24.50	peak
3	8940.000	36.50	10.04	46.54	74.00	-27.46	peak
4	11820.000	32.25	17.47	49.72	74.00	-24.28	peak
5	13860.000	29.31	21.67	50.98	74.00	-23.02	peak
6	18000.000	25.96	25.69	51.65	74.00	-22.35	peak




Test Mode:	8DPSK	Channel:	2402
Polarity:	Vertical	Test Voltage:	DC 5 V

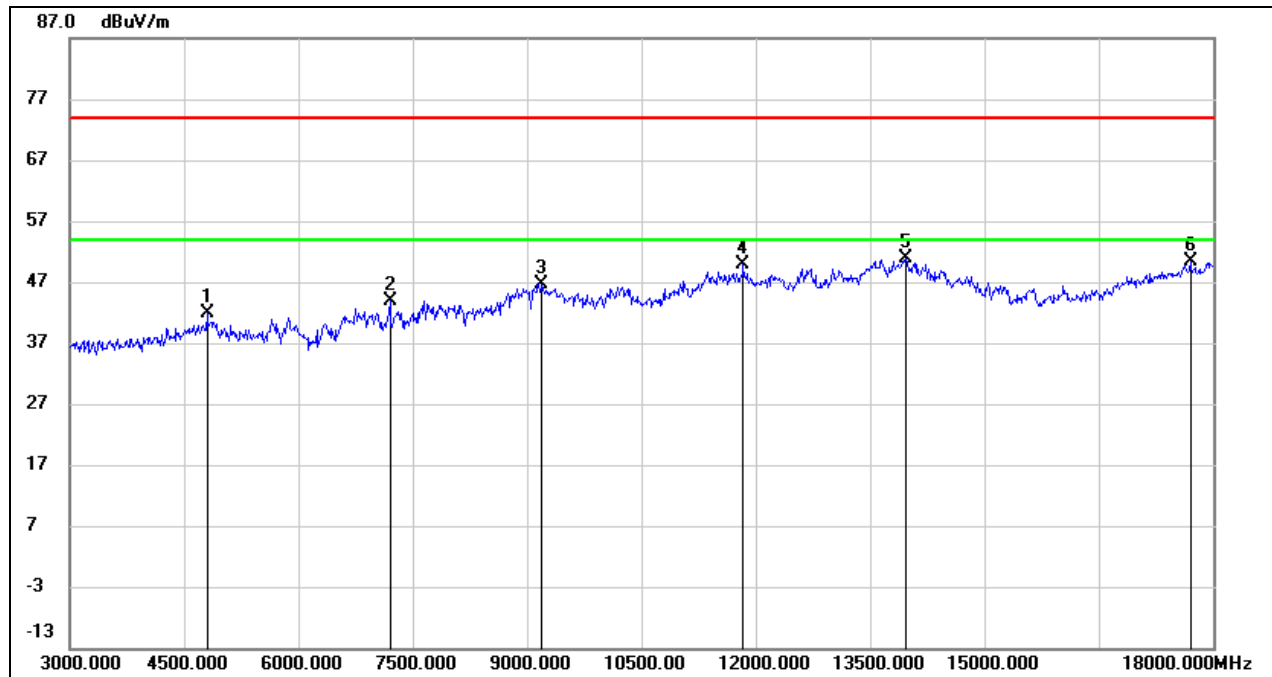

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	42.28	-0.31	41.97	74.00	-32.03	peak
2	7200.000	37.34	6.55	43.89	74.00	-30.11	peak
3	9195.000	36.07	10.56	46.63	74.00	-27.37	peak
4	11835.000	32.48	17.51	49.99	74.00	-24.01	peak
5	13965.000	28.88	21.89	50.77	74.00	-23.23	peak
6	17700.000	26.59	23.91	50.50	74.00	-23.50	peak



Test Mode:	8DPSK	Channel:	2441
Polarity:	Horizontal	Test Voltage:	DC 5 V

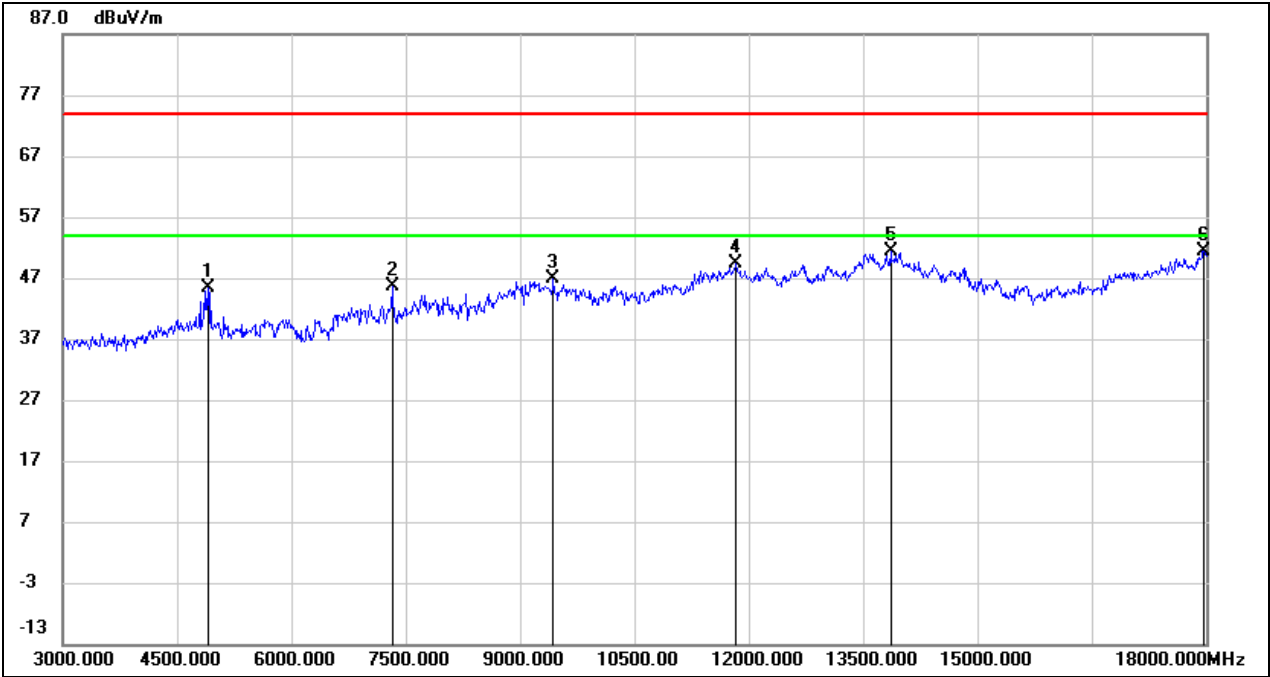


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	45.19	0.09	45.28	74.00	-28.72	peak
2	7320.000	39.24	6.46	45.70	74.00	-28.30	peak
3	9435.000	36.25	10.67	46.92	74.00	-27.08	peak
4	11835.000	31.99	17.51	49.50	74.00	-24.50	peak
5	13860.000	29.60	21.67	51.27	74.00	-22.73	peak
6	17970.000	25.90	25.51	51.41	74.00	-22.59	peak






Test Mode:	8DPSK	Channel:	2441
Polarity:	Vertical	Test Voltage:	DC 5 V

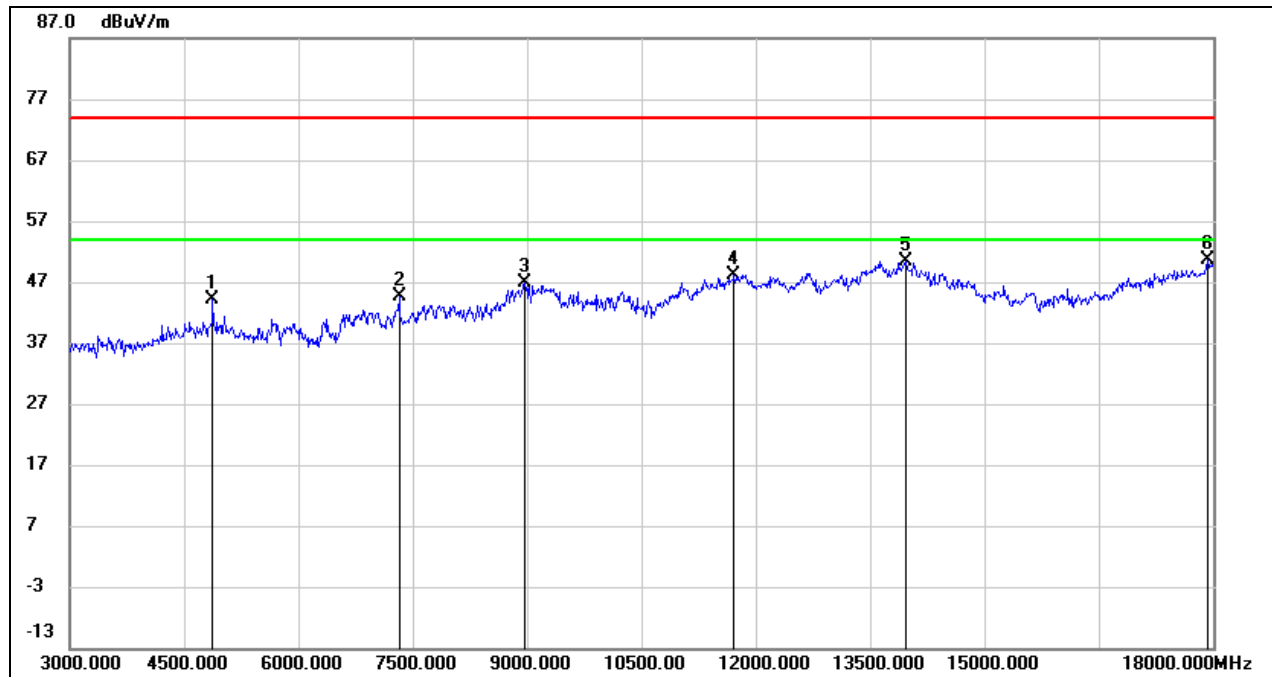

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.18	-0.03	44.15	74.00	-29.85	peak
2	7320.000	38.16	6.46	44.62	74.00	-29.38	peak
3	8970.000	36.50	10.26	46.76	74.00	-27.24	peak
4	11715.000	31.06	17.19	48.25	74.00	-25.75	peak
5	13965.000	28.56	21.89	50.45	74.00	-23.55	peak
6	17925.000	25.26	25.25	50.51	74.00	-23.49	peak




Test Mode:	8DPSK	Channel:	2480
Polarity:	Horizontal	Test Voltage:	DC 5 V

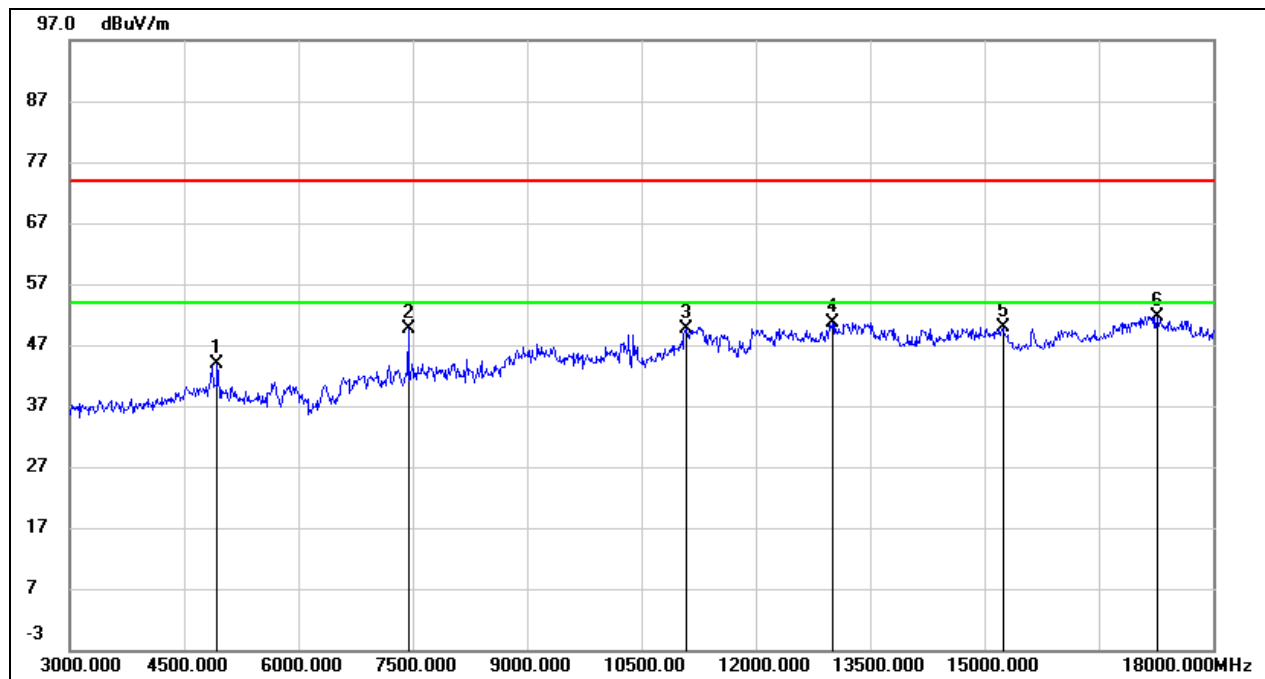

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4935.000	43.72	0.20	43.92	74.00	-30.08	peak
2	7440.000	43.15	6.38	49.53	74.00	-24.47	peak
3	11085.000	34.51	15.08	49.59	74.00	-24.41	peak
4	13005.000	31.86	18.74	50.60	74.00	-23.40	peak
5	15240.000	32.26	17.65	49.91	74.00	-24.09	peak
6	17265.000	29.77	21.86	51.63	74.00	-22.37	peak



Test Mode:	8DPSK	Channel:	2480
Polarity:	Vertical	Test Voltage:	DC 5 V

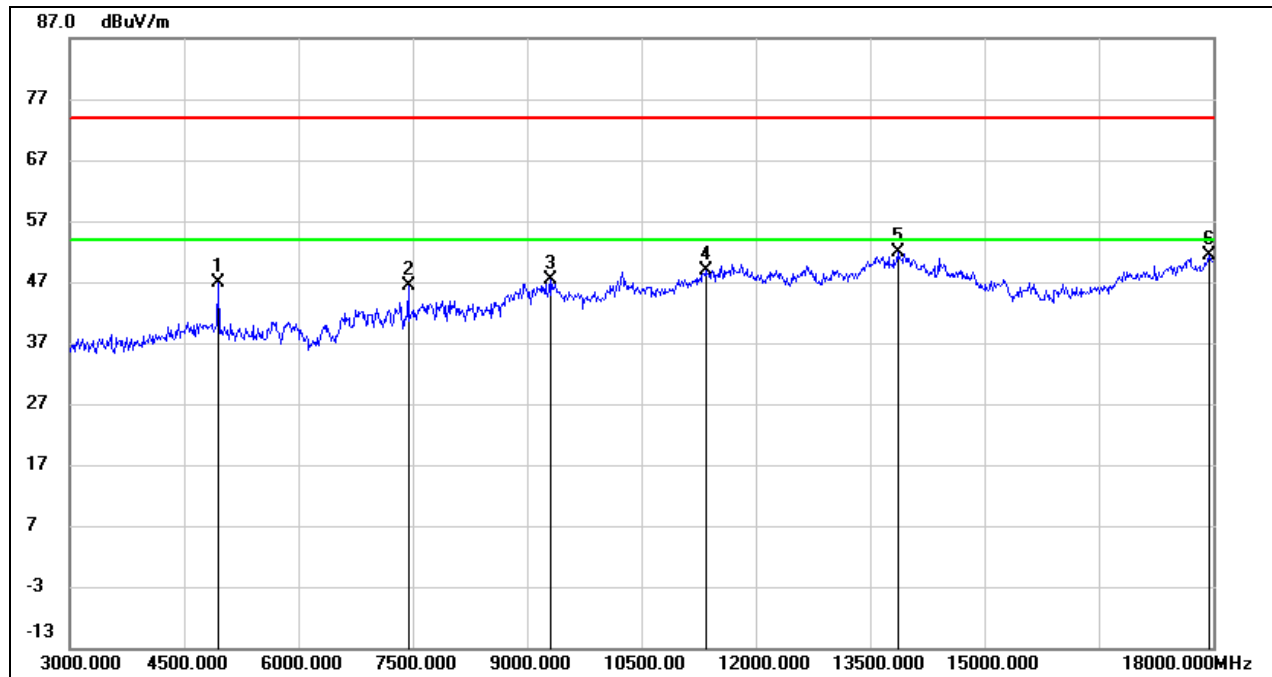


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	46.51	0.26	46.77	74.00	-27.23	peak
2	7440.000	39.94	6.38	46.32	74.00	-27.68	peak
3	9300.000	36.89	10.61	47.50	74.00	-26.50	peak
4	11340.000	32.81	16.01	48.82	74.00	-25.18	peak
5	13860.000	30.24	21.67	51.91	74.00	-22.09	peak
6	17940.000	26.09	25.34	51.43	74.00	-22.57	peak



#### 8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)


Test Mode:	GFSK	Channel:	2402
Polarity:	FACE ON	Test Voltage:	DC 5 V

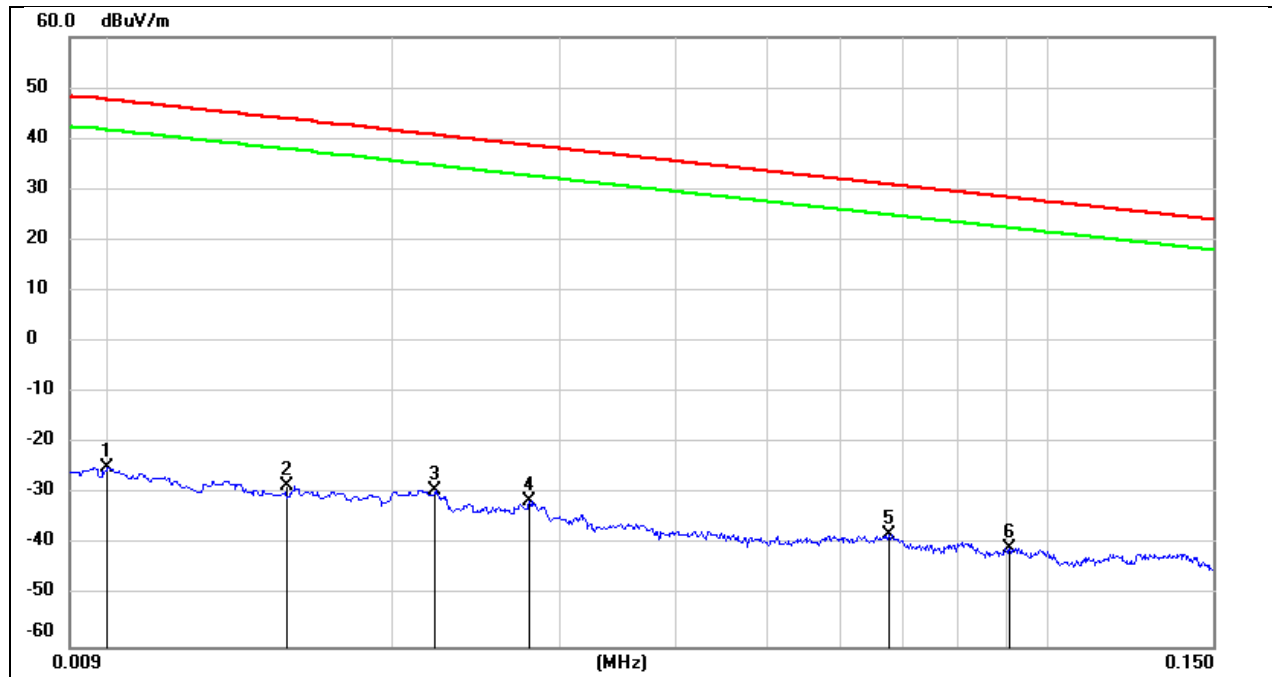

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	76.72	-101.40	-24.68	47.60	-76.18	-3.90	-72.28	peak
2	0.0154	72.94	-101.37	-28.43	43.85	-79.93	-7.65	-72.28	peak
3	0.0221	72.13	-101.35	-29.22	40.71	-80.72	-10.79	-69.93	peak
4	0.0279	70.17	-101.38	-31.21	38.69	-82.71	-12.81	-69.90	peak
5	0.0675	63.64	-101.56	-37.92	31.02	-89.42	-20.48	-68.94	peak
6	0.0911	61.11	-101.72	-40.61	28.41	-92.11	-23.09	-69.02	peak




Test Mode:	GFSK	Channel:	2402
Polarity:	FACE ON	Test Voltage:	DC 5 V

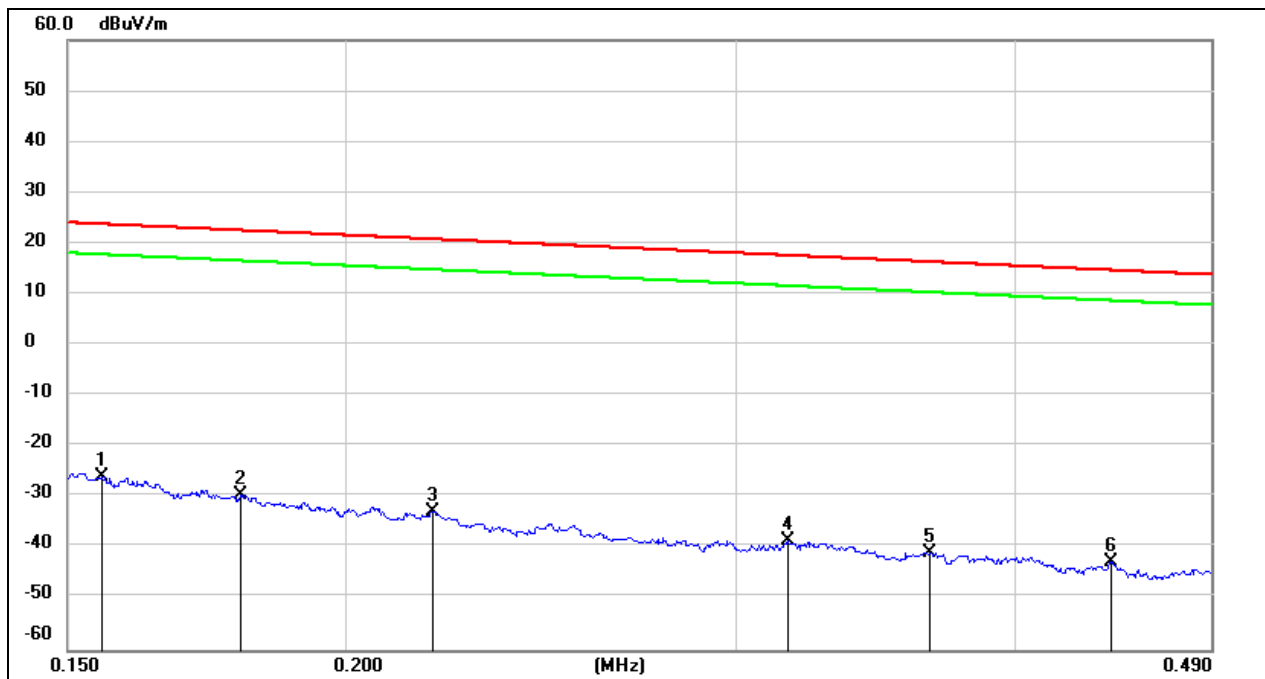

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1554	75.77	-101.65	-25.88	23.77	-77.38	-27.73	-49.65	peak
2	0.1794	72.27	-101.68	-29.41	22.53	-80.91	-28.97	-51.94	peak
3	0.2190	68.77	-101.75	-32.98	20.79	-84.48	-30.71	-53.77	peak
4	0.3163	63.20	-101.87	-38.67	17.60	-90.17	-33.90	-56.27	peak
5	0.3662	61.08	-101.93	-40.85	16.33	-92.35	-35.17	-57.18	peak
6	0.4415	59.35	-102.01	-42.66	14.70	-94.16	-36.80	-57.36	peak



Test Mode:	GFSK	Channel:	2402
Polarity:	FACE ON	Test Voltage:	DC 5 V

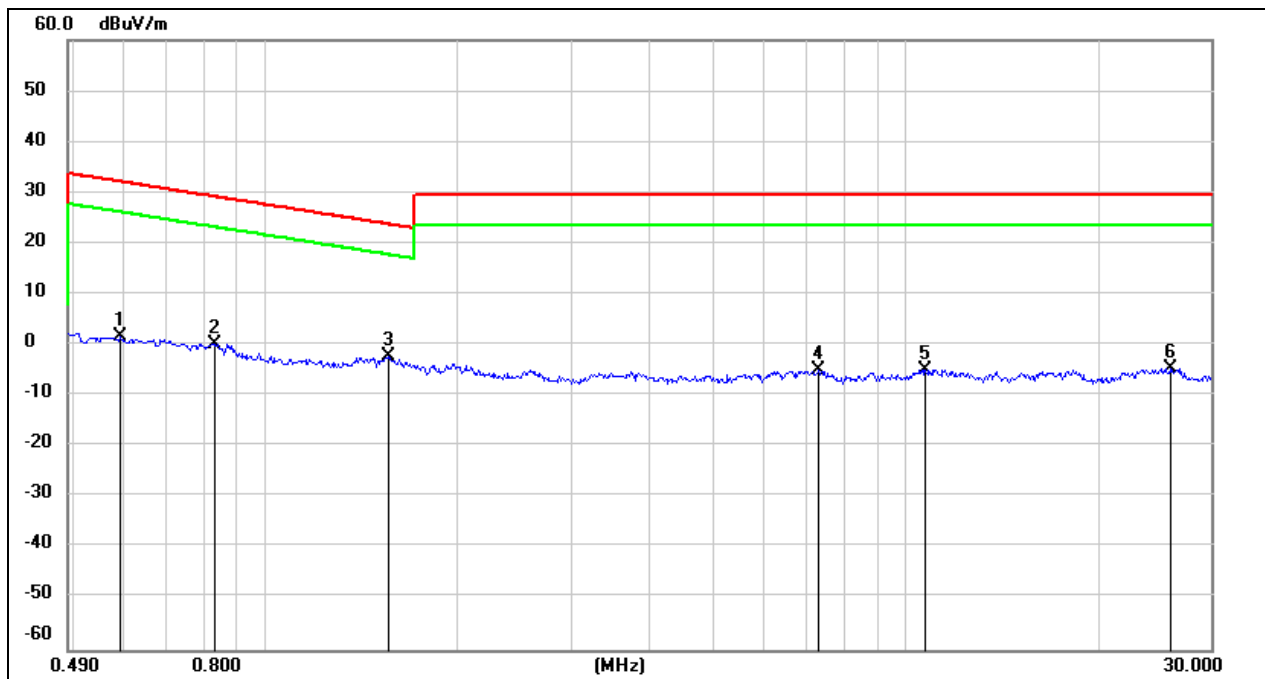


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5917	63.74	-62.08	1.66	32.16	-49.84	-19.34	-30.50	peak
2	0.8296	62.44	-62.17	0.27	29.23	-51.23	-22.27	-28.96	peak
3	1.5564	59.68	-62.02	-2.34	23.76	-53.84	-27.74	-26.10	peak
4	7.3361	56.08	-61.17	-5.09	29.54	-56.59	-21.96	-34.63	peak
5	10.7299	55.98	-60.83	-4.85	29.54	-56.35	-21.96	-34.39	peak
6	25.8978	55.76	-60.36	-4.60	29.54	-56.10	-21.96	-34.14	peak



### 8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)


Test Mode:	GFSK	Channel:	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

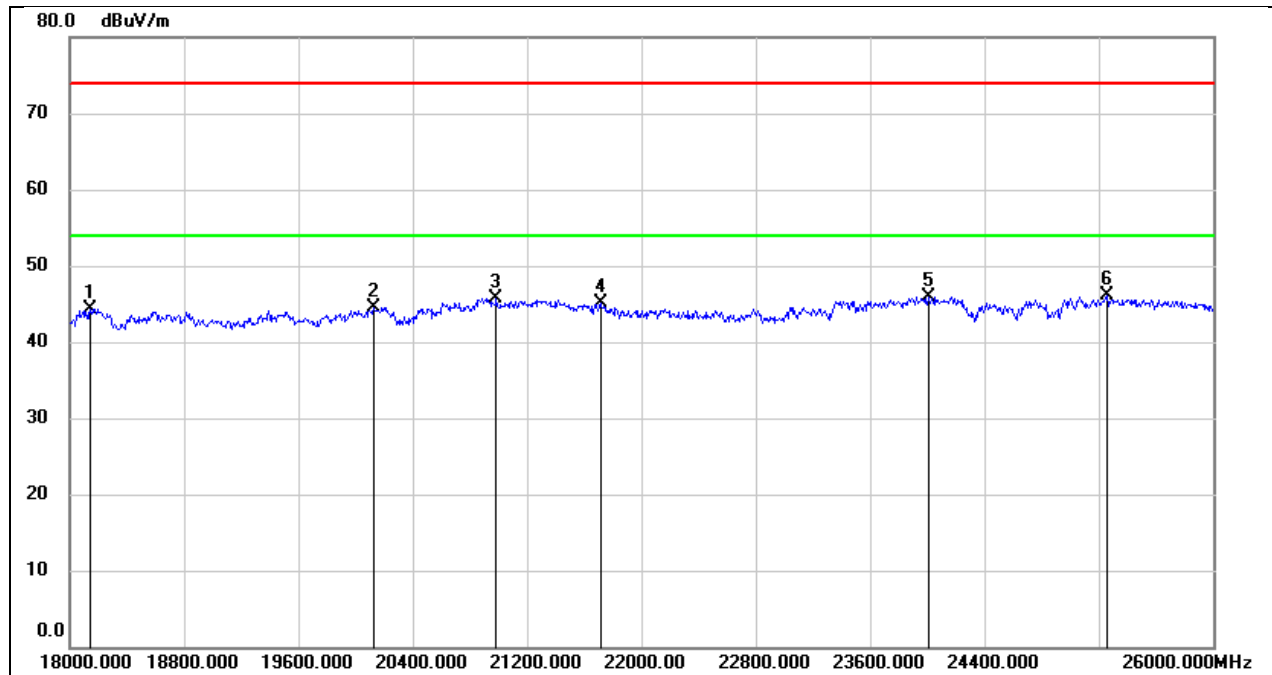

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18144.000	49.77	-5.48	44.29	74.00	-29.71	peak
2	20128.000	50.12	-5.53	44.59	74.00	-29.41	peak
3	20984.000	50.56	-4.89	45.67	74.00	-28.33	peak
4	21712.000	49.44	-4.38	45.06	74.00	-28.94	peak
5	24008.000	48.64	-2.75	45.89	74.00	-28.11	peak
6	25256.000	47.79	-1.67	46.12	74.00	-27.88	peak



Test Mode:	GFSK	Channel:	2402
Polarity:	Vertical	Test Voltage:	DC 5 V

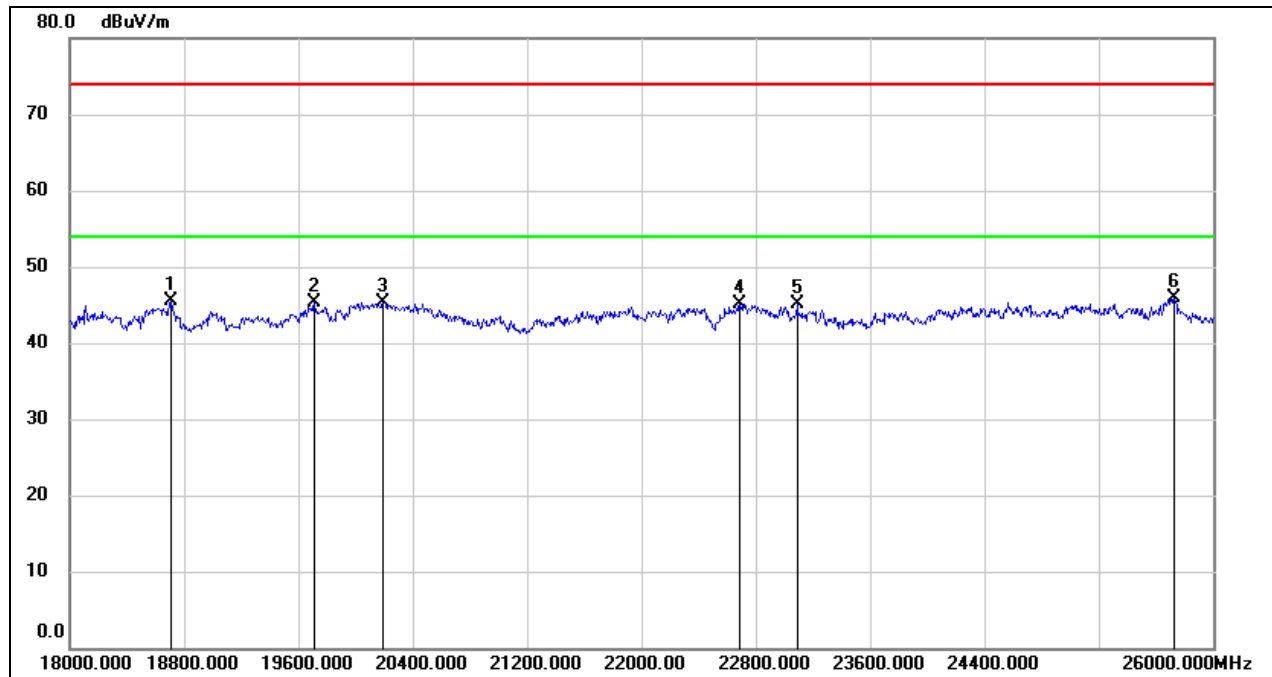


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18712.000	50.90	-5.40	45.50	74.00	-28.50	peak
2	19712.000	50.51	-5.29	45.22	74.00	-28.78	peak
3	20192.000	50.87	-5.57	45.30	74.00	-28.70	peak
4	22688.000	48.82	-3.74	45.08	74.00	-28.92	peak
5	23088.000	48.52	-3.41	45.11	74.00	-28.89	peak
6	25728.000	46.61	-0.72	45.89	74.00	-28.11	peak





## 8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)


Test Mode:	GFSK	Channel:	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

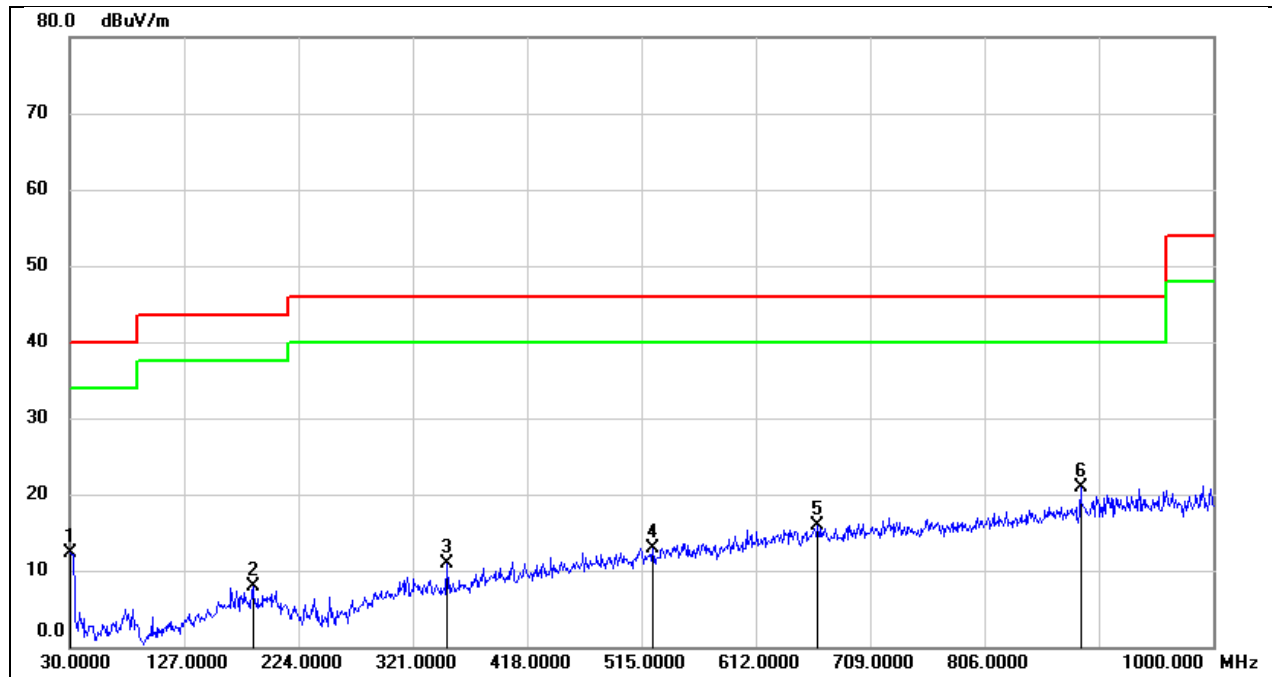

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	31.33	-19.04	12.29	40.00	-27.71	QP
2	185.2000	24.72	-16.75	7.97	43.50	-35.53	QP
3	350.1000	25.21	-14.32	10.89	46.00	-35.11	QP
4	524.7000	23.94	-10.96	12.98	46.00	-33.02	QP
5	664.3800	24.52	-8.66	15.86	46.00	-30.14	QP
6	887.4800	26.19	-5.32	20.87	46.00	-25.13	QP




Test Mode:	GFSK	Channel:	2402
Polarity:	Vertical	Test Voltage:	DC 5 V

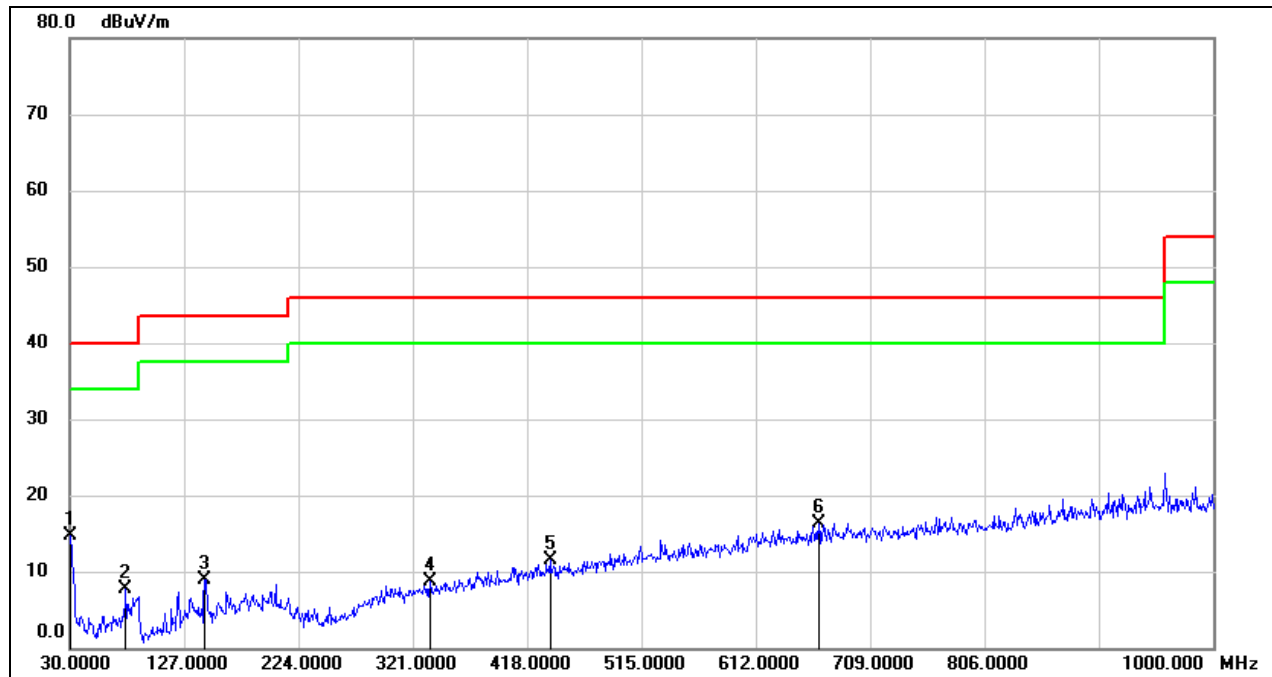

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	33.77	-19.04	14.73	40.00	-25.27	QP
2	77.5300	28.87	-21.14	7.73	40.00	-32.27	QP
3	144.4600	27.60	-18.60	9.00	43.50	-34.50	QP
4	335.5500	23.16	-14.54	8.62	46.00	-37.38	QP
5	437.4000	24.17	-12.60	11.57	46.00	-34.43	QP
6	665.3500	24.98	-8.66	16.32	46.00	-29.68	QP

**TEST RESULTS FOR LEFT BLUETOOTH EARPHONE****8.7. RESTRICTED BANDEGE**


Test Mode:	GFSK PK	Channel:	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

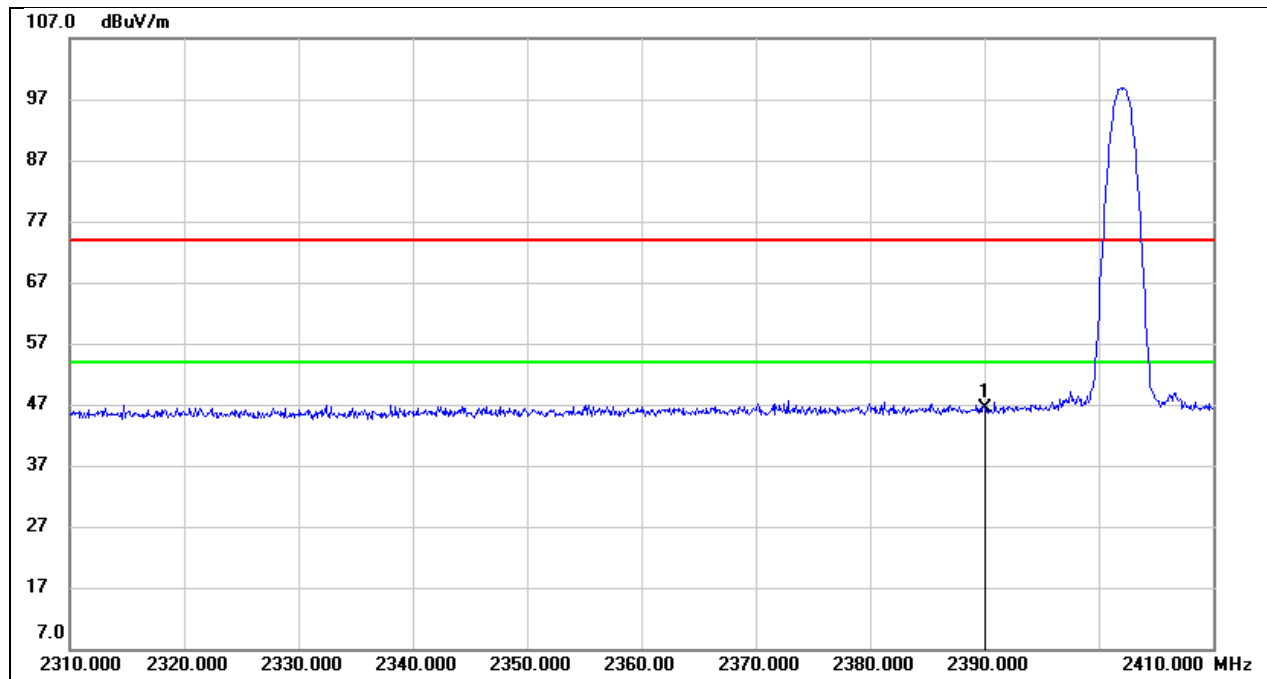

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	14.19	32.16	46.35	74.00	-27.65	peak




Test Mode:	GFSK PK	Channel:	2480
Polarity:	Horizontal	Test Voltage:	DC 5 V

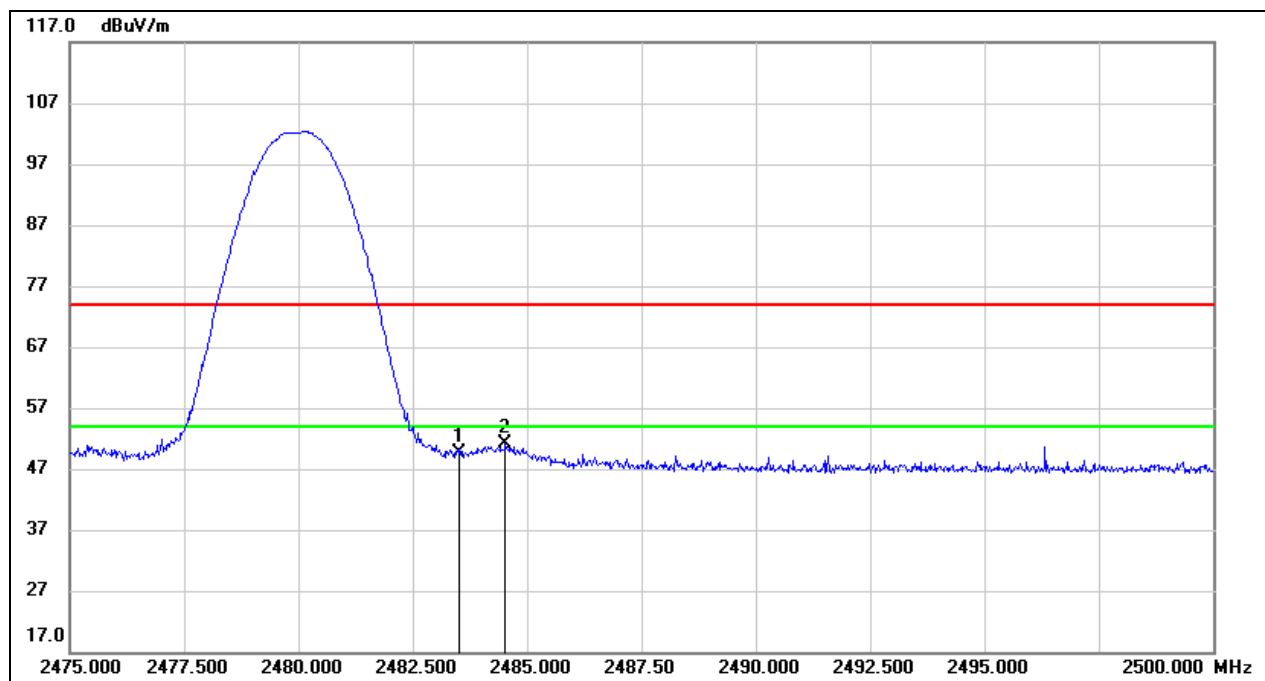

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.22	32.44	49.66	74.00	-24.34	peak
2	2484.525	18.63	32.44	51.07	74.00	-22.93	peak




Test Mode:	8DPSK PK	Channel:	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

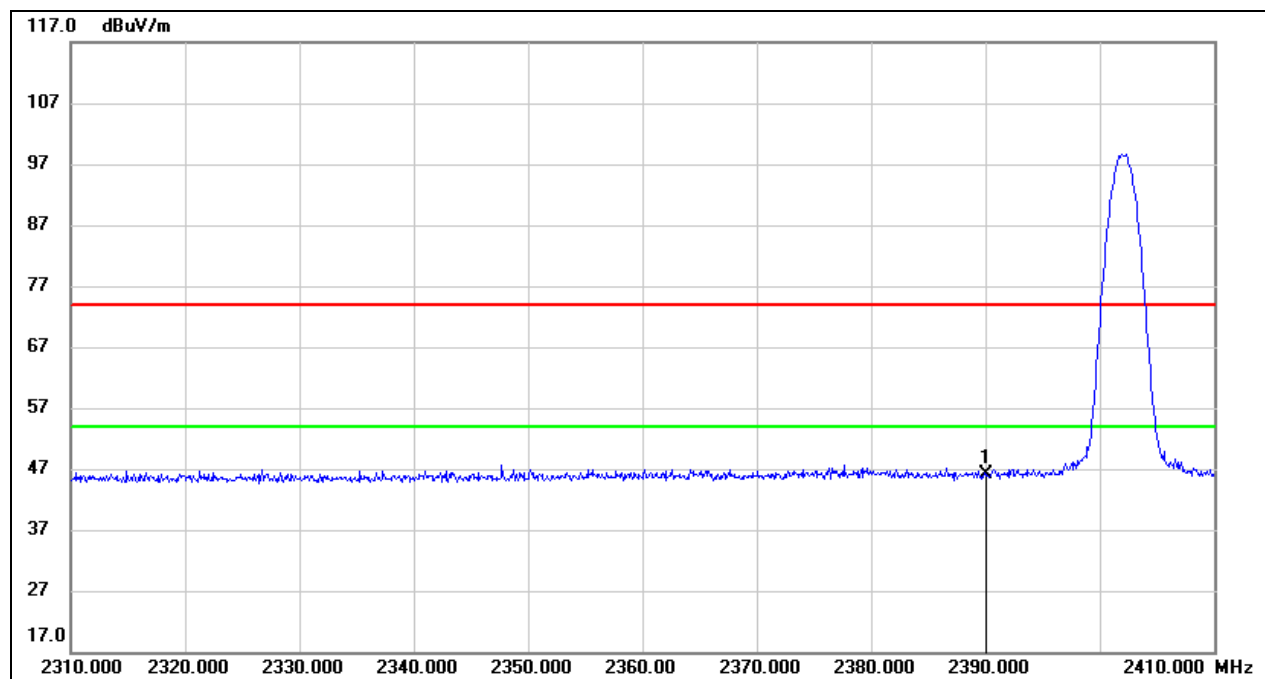

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	13.91	32.16	46.07	74.00	-27.93	peak



Test Mode:	8DPSK PK	Channel:	2480
Polarity:	Horizontal	Test Voltage:	DC 5 V

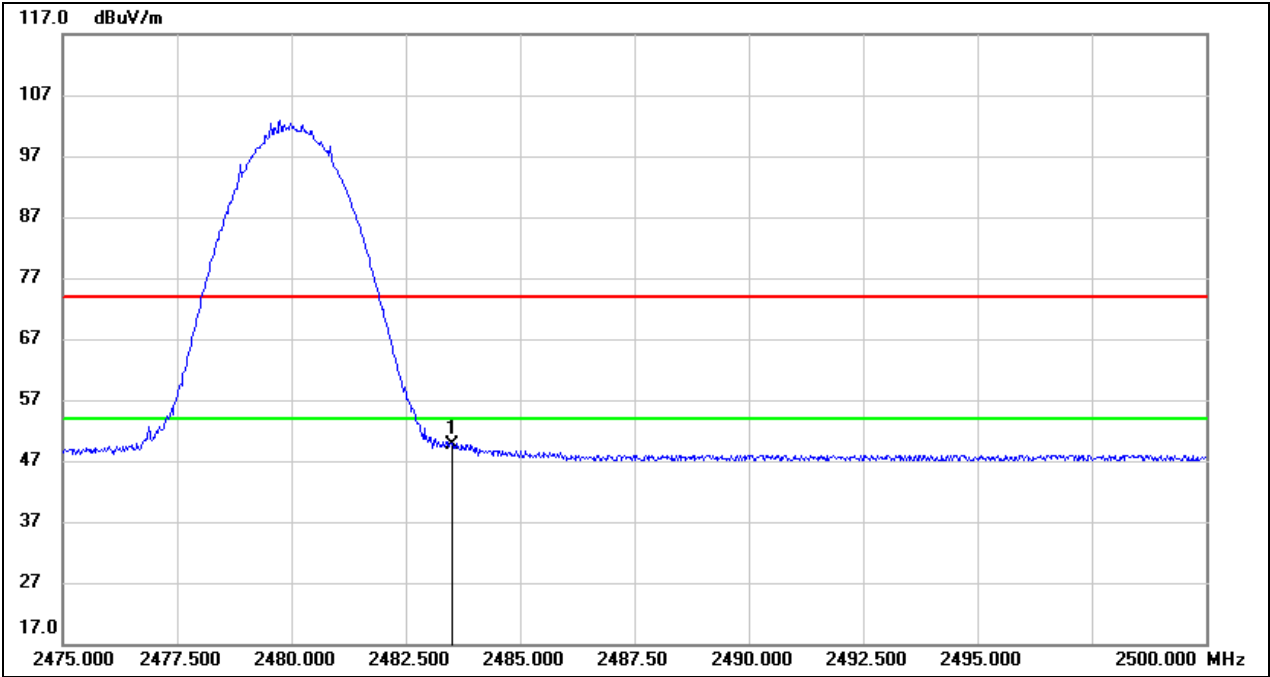


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.15	32.44	49.59	74.00	-24.41	peak



## 8.8. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)


Test Mode:	GFSK	Channel:	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

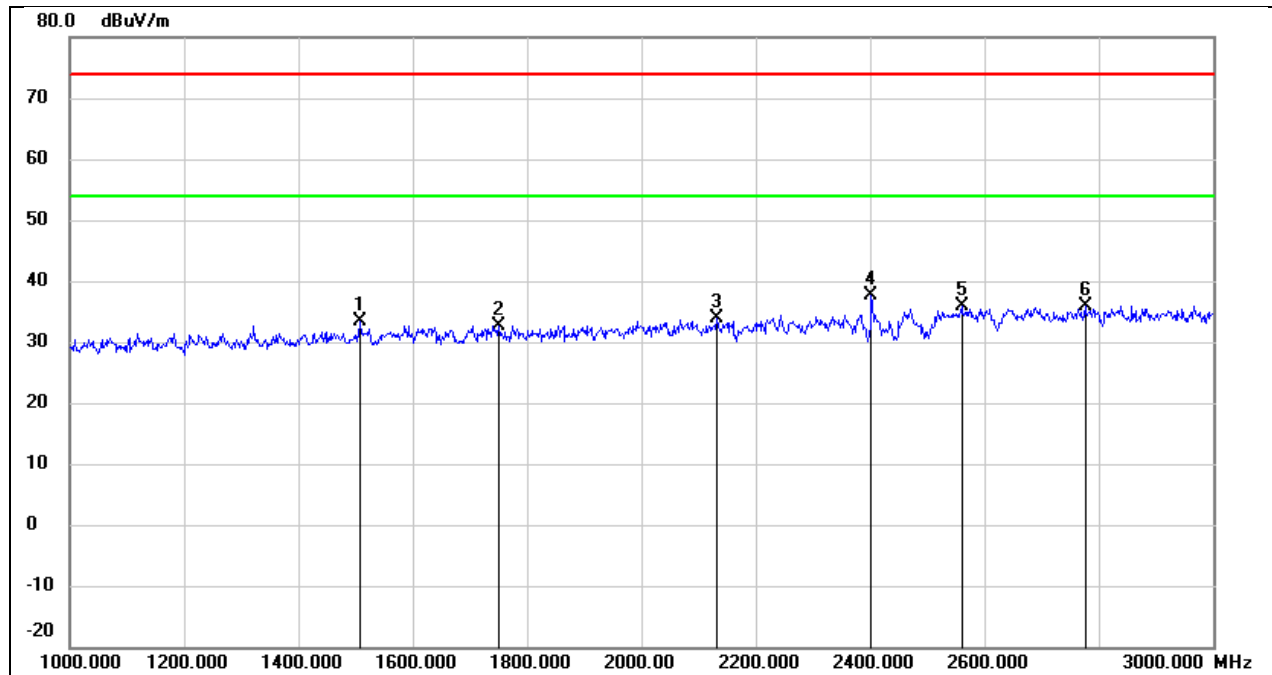

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1508.000	46.10	-12.68	33.42	74.00	-40.58	peak
2	1750.000	44.57	-11.89	32.68	74.00	-41.32	peak
3	2132.000	44.16	-10.39	33.77	74.00	-40.23	peak
4	2402.000	46.62	-8.99	37.63	74.00	-36.37	peak
5	2560.000	44.27	-8.31	35.96	74.00	-38.04	peak
6	2776.000	43.60	-7.66	35.94	74.00	-38.06	peak



Test Mode:	GFSK	Channel:	2402
Polarity:	Vertical	Test Voltage:	DC 5 V

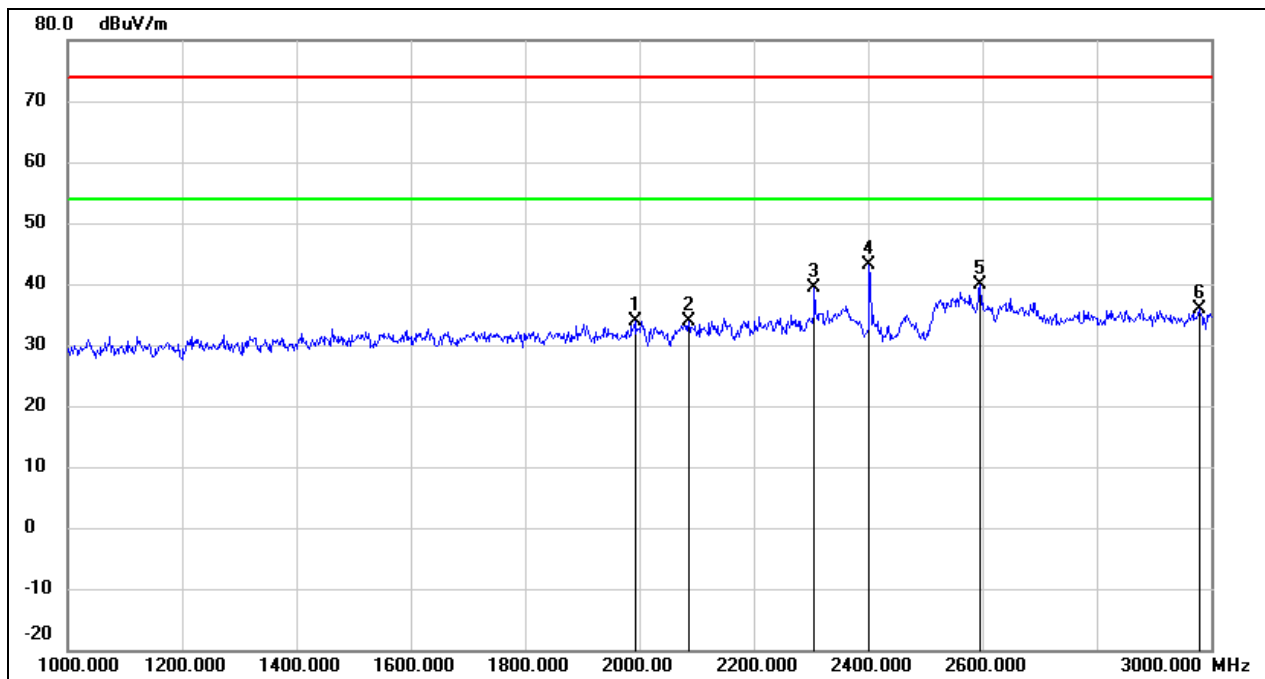


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1992.000	44.89	-11.09	33.80	74.00	-40.20	peak
2	2086.000	44.52	-10.62	33.90	74.00	-40.10	peak
3	2306.000	48.82	-9.49	39.33	74.00	-34.67	peak
4	2402.000	52.21	-8.99	43.22	74.00	-30.78	peak
5	2596.000	47.98	-8.20	39.78	74.00	-34.22	peak
6	2980.000	42.89	-7.04	35.85	74.00	-38.15	peak






Test Mode:	GFSK	Channel:	2441
Polarity:	Horizontal	Test Voltage:	DC 5 V

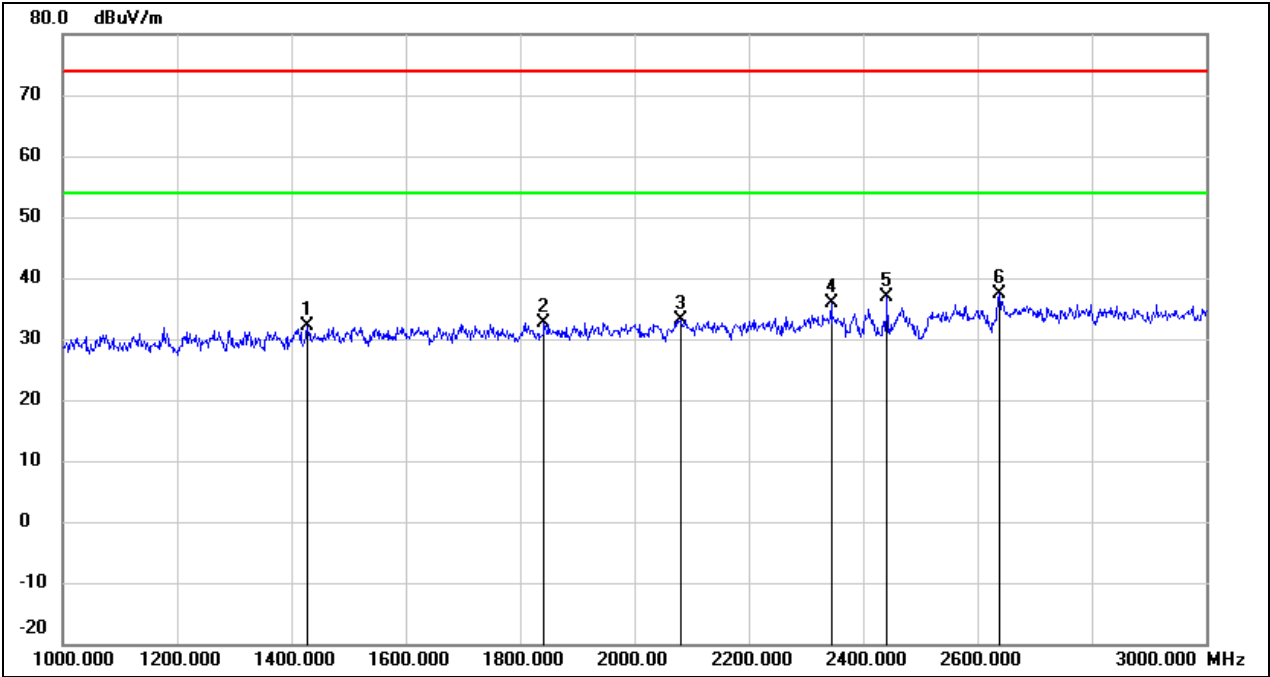

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1428.000	45.12	-13.04	32.08	74.00	-41.92	peak
2	1842.000	44.26	-11.58	32.68	74.00	-41.32	peak
3	2082.000	43.86	-10.64	33.22	74.00	-40.78	peak
4	2344.000	45.09	-9.30	35.79	74.00	-38.21	peak
5	2442.000	45.78	-8.79	36.99	74.00	-37.01	peak
6	2638.000	45.52	-8.07	37.45	74.00	-36.55	peak




Test Mode:	GFSK	Channel:	2441
Polarity:	Vertical	Test Voltage:	DC 5 V

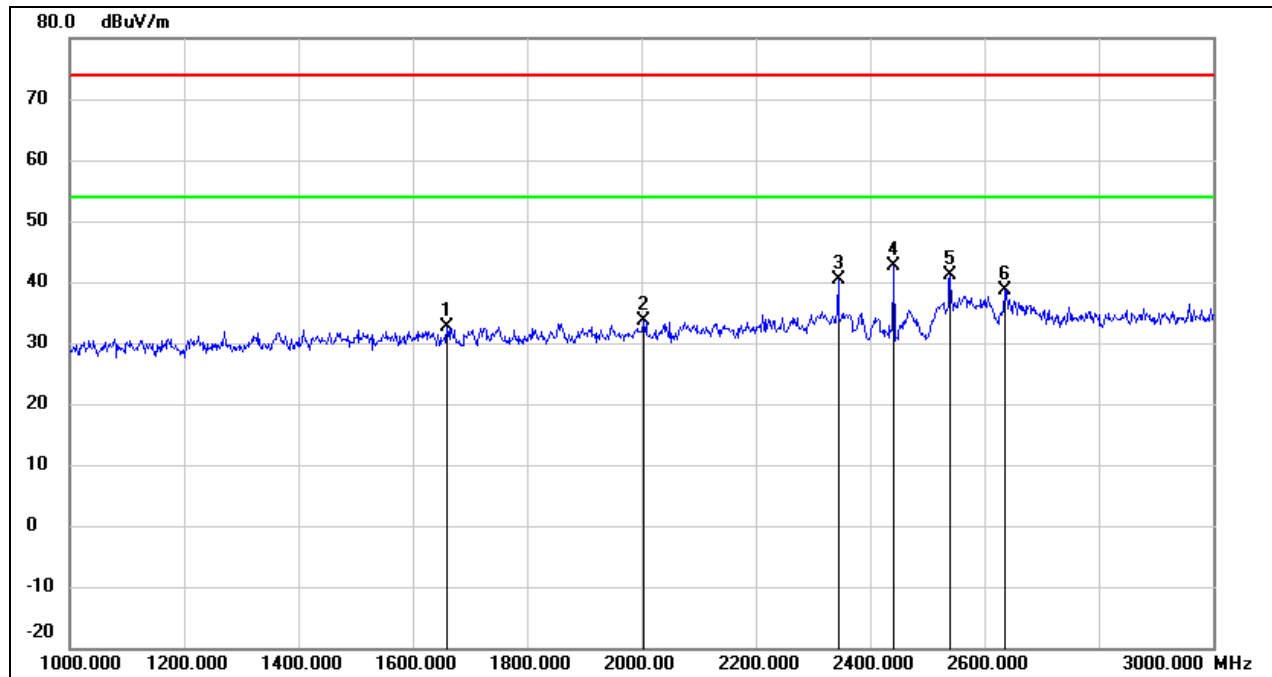

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1660.000	44.82	-12.19	32.63	74.00	-41.37	peak
2	2004.000	44.59	-11.04	33.55	74.00	-40.45	peak
3	2344.000	49.72	-9.30	40.42	74.00	-33.58	peak
4	2442.000	51.47	-8.79	42.68	74.00	-31.32	peak
5	2540.000	49.38	-8.37	41.01	74.00	-32.99	peak
6	2636.000	46.79	-8.08	38.71	74.00	-35.29	peak




Test Mode:	GFSK	Channel:	2480
Polarity:	Horizontal	Test Voltage:	DC 5 V

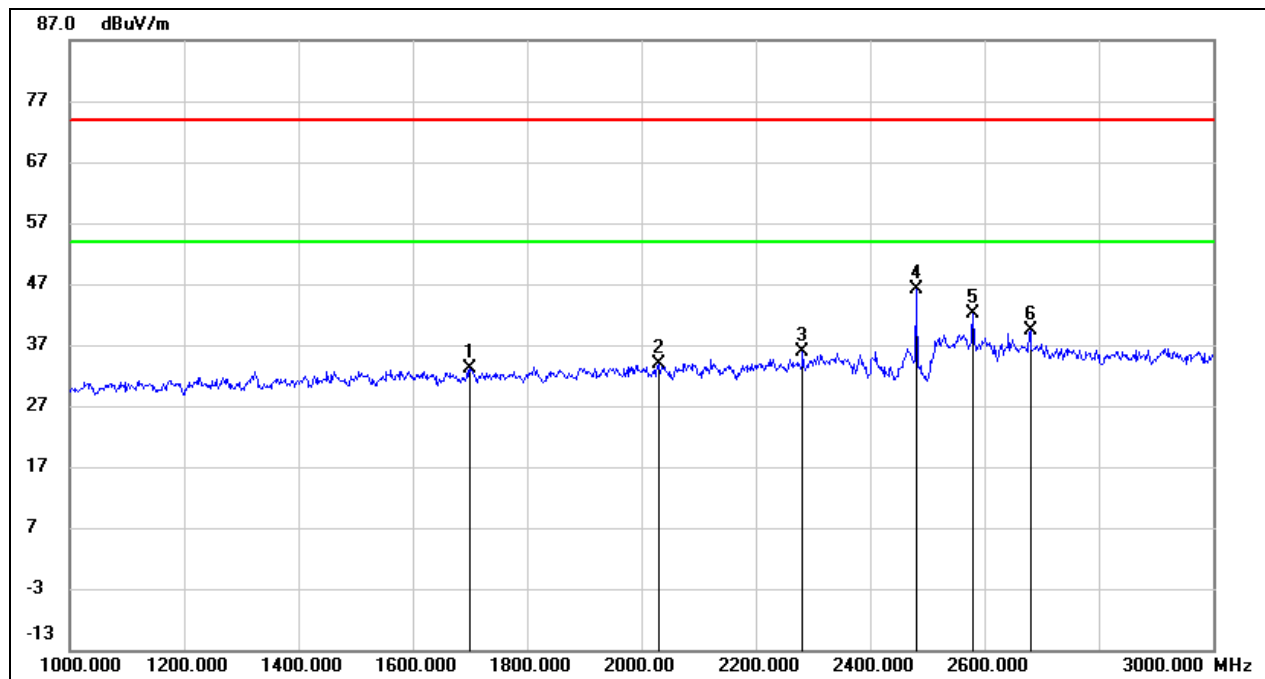

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1700.000	45.28	-12.05	33.23	74.00	-40.77	peak
2	2030.000	44.73	-10.90	33.83	74.00	-40.17	peak
3	2282.000	45.47	-9.61	35.86	74.00	-38.14	peak
4	2480.000	54.65	-8.59	46.06	74.00	-27.94	peak
5	2580.000	50.42	-8.25	42.17	74.00	-31.83	peak
6	2680.000	47.26	-7.95	39.31	74.00	-34.69	peak



Test Mode:	GFSK	Channel:	2480
Polarity:	Vertical	Test Voltage:	DC 5 V

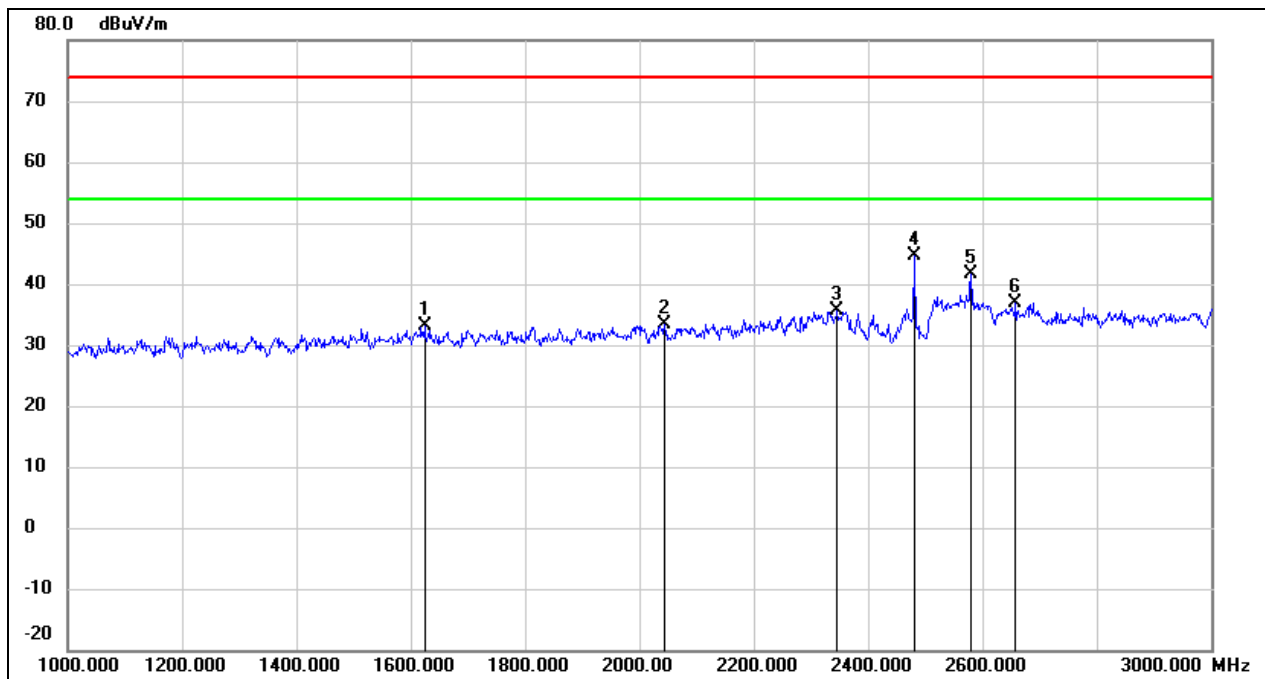


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1624.000	45.32	-12.30	33.02	74.00	-40.98	peak
2	2044.000	44.25	-10.84	33.41	74.00	-40.59	peak
3	2346.000	44.90	-9.28	35.62	74.00	-38.38	peak
4	2480.000	53.27	-8.59	44.68	74.00	-29.32	peak
5	2580.000	49.94	-8.25	41.69	74.00	-32.31	peak
6	2658.000	44.93	-8.02	36.91	74.00	-37.09	peak



## 8.9. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)


Test Mode:	GFSK	Channel:	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

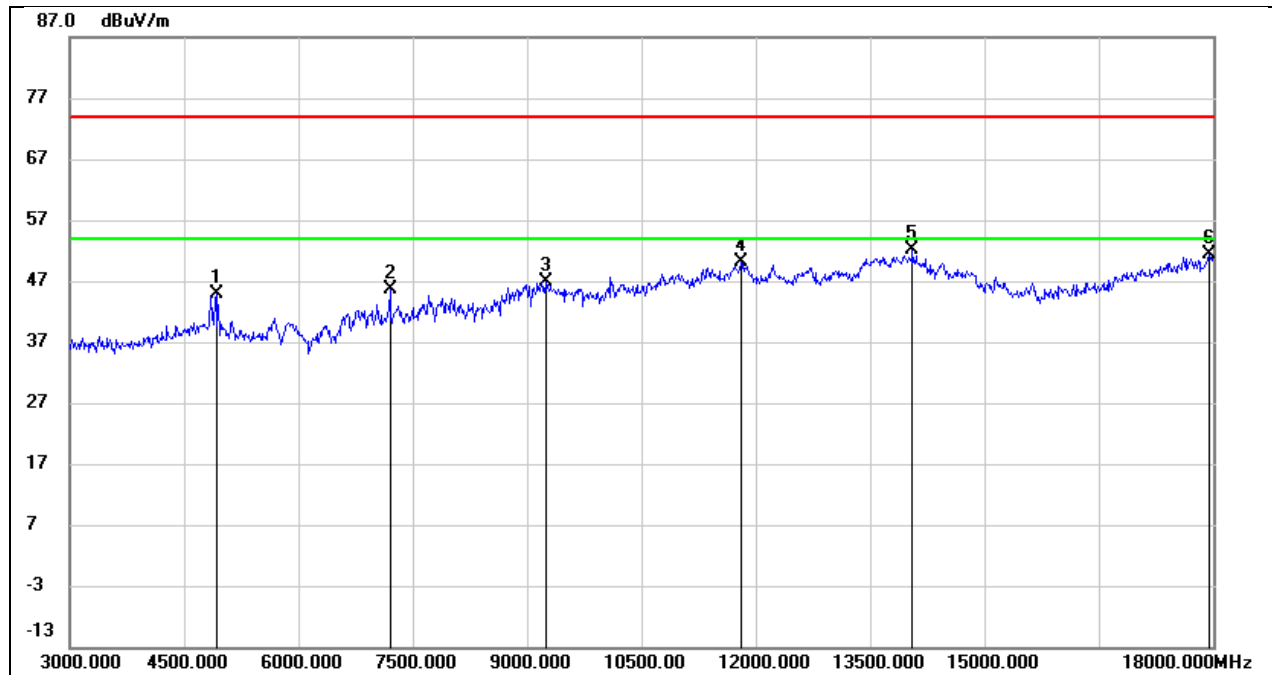

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	44.63	0.14	44.77	74.00	-29.23	peak
2	7200.000	38.99	6.55	45.54	74.00	-28.46	peak
3	9240.000	36.38	10.58	46.96	74.00	-27.04	peak
4	11805.000	32.72	17.43	50.15	74.00	-23.85	peak
5	14055.000	30.28	21.73	52.01	74.00	-21.99	peak
6	17940.000	26.05	25.34	51.39	74.00	-22.61	peak




Test Mode:	GFSK	Channel:	2402
Polarity:	Vertical	Test Voltage:	DC 5 V

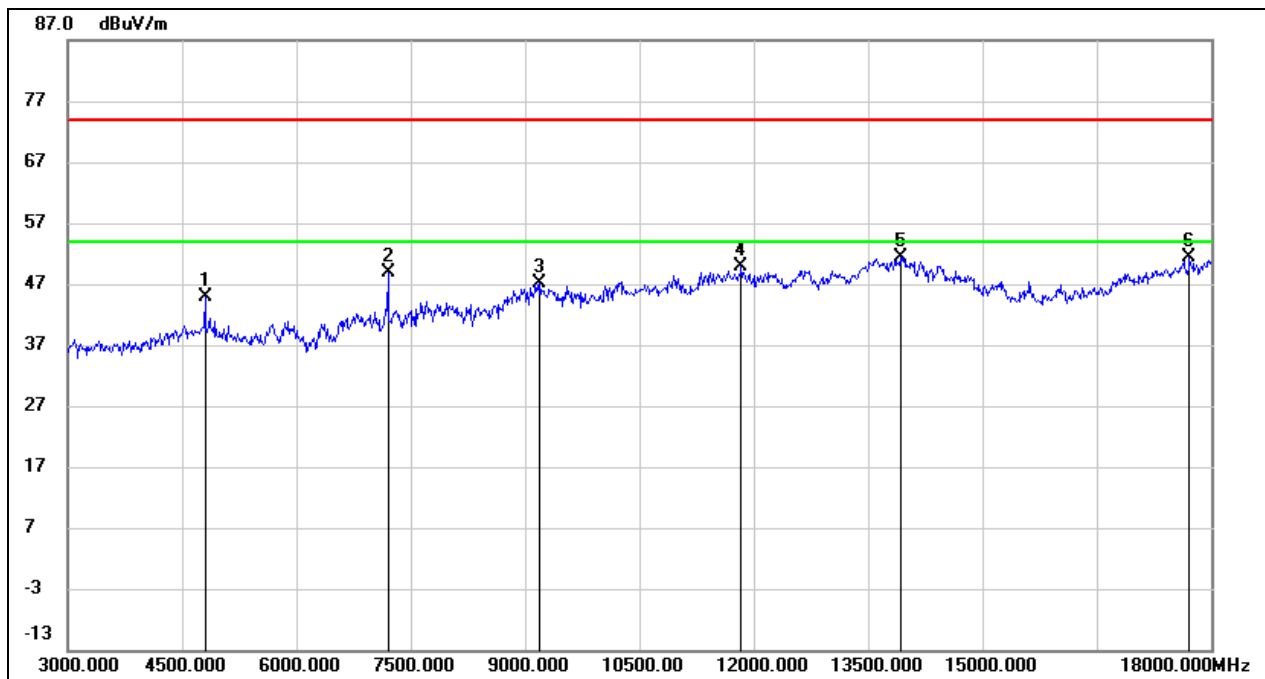

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	45.10	-0.31	44.79	74.00	-29.21	peak
2	7200.000	42.40	6.55	48.95	74.00	-25.05	peak
3	9195.000	36.45	10.56	47.01	74.00	-26.99	peak
4	11835.000	32.33	17.51	49.84	74.00	-24.16	peak
5	13920.000	29.57	21.79	51.36	74.00	-22.64	peak
6	17715.000	27.45	24.00	51.45	74.00	-22.55	peak




Test Mode:	GFSK	Channel:	2441
Polarity:	Horizontal	Test Voltage:	DC 5 V

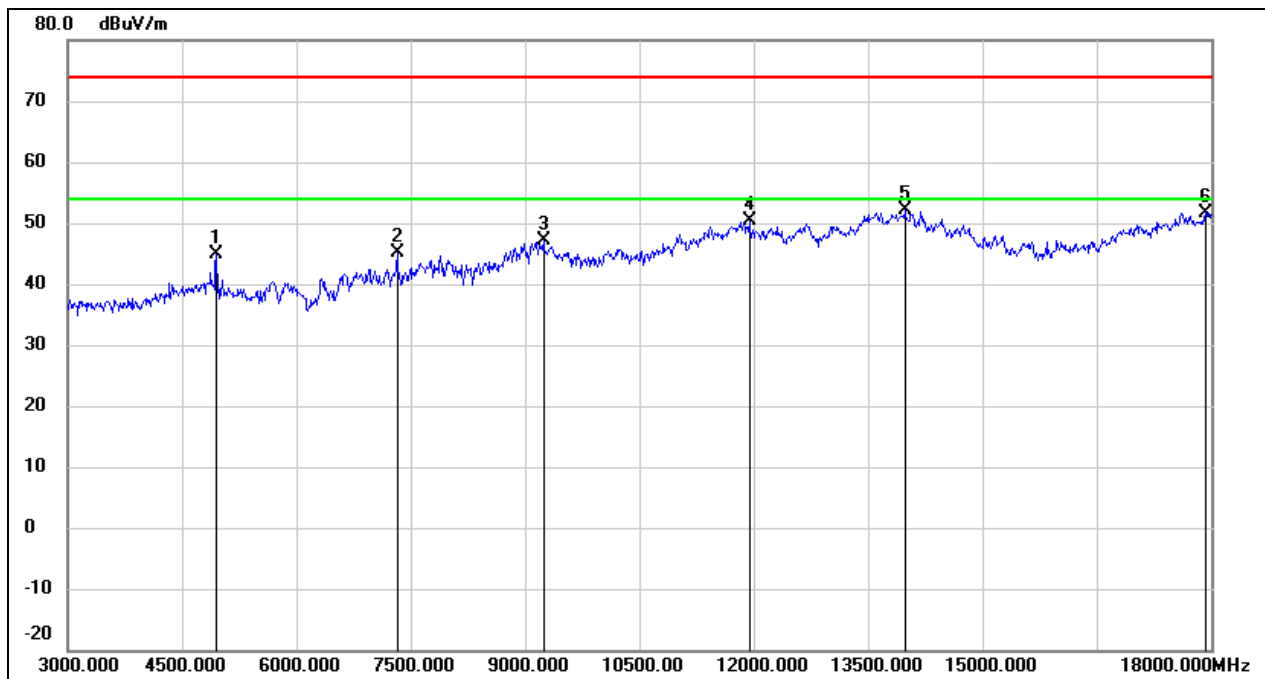

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	44.59	0.26	44.85	74.00	-29.15	peak
2	7320.000	38.76	6.46	45.22	74.00	-28.78	peak
3	9240.000	36.56	10.58	47.14	74.00	-26.86	peak
4	11940.000	32.66	17.80	50.46	74.00	-23.54	peak
5	13980.000	30.23	21.92	52.15	74.00	-21.85	peak
6	17925.000	26.50	25.25	51.75	74.00	-22.25	peak



Test Mode:	GFSK	Channel:	2441
Polarity:	Vertical	Test Voltage:	DC 5 V

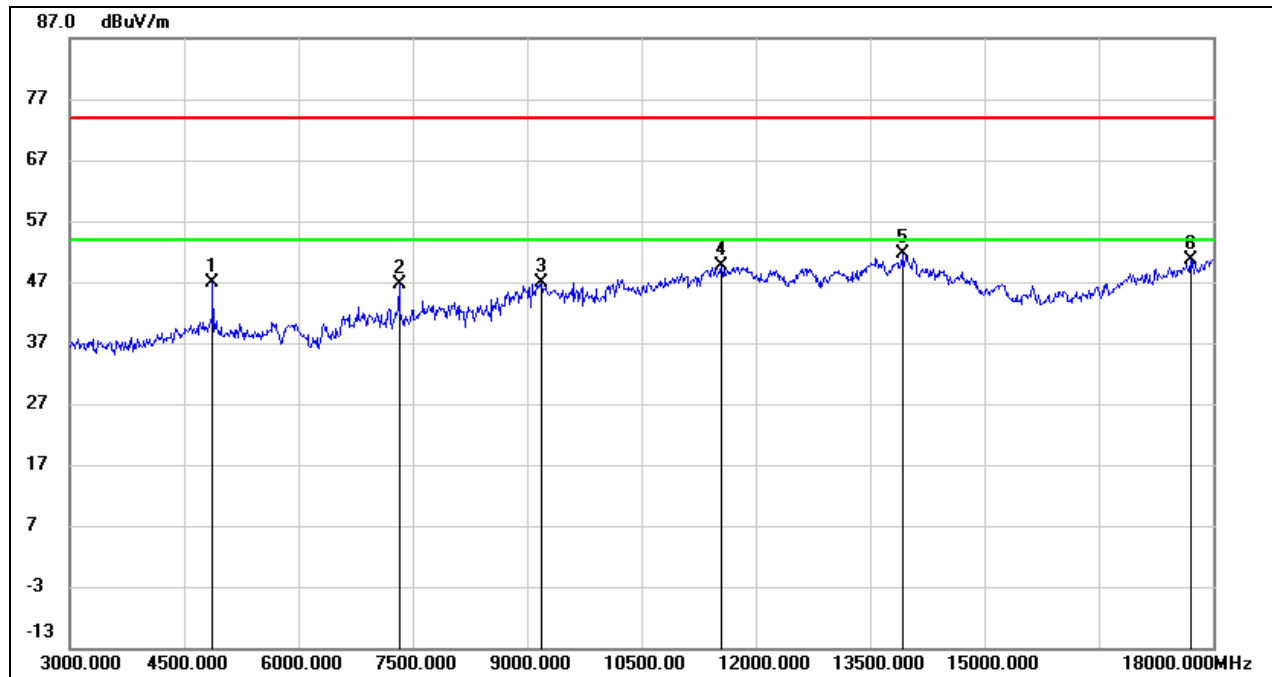


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	47.03	-0.03	47.00	74.00	-27.00	peak
2	7320.000	40.16	6.46	46.62	74.00	-27.38	peak
3	9195.000	36.26	10.56	46.82	74.00	-27.18	peak
4	11550.000	32.81	16.74	49.55	74.00	-24.45	peak
5	13920.000	29.86	21.79	51.65	74.00	-22.35	peak
6	17700.000	26.69	23.91	50.60	74.00	-23.40	peak






Test Mode:	GFSK	Channel:	2480
Polarity:	Horizontal	Test Voltage:	DC 5 V

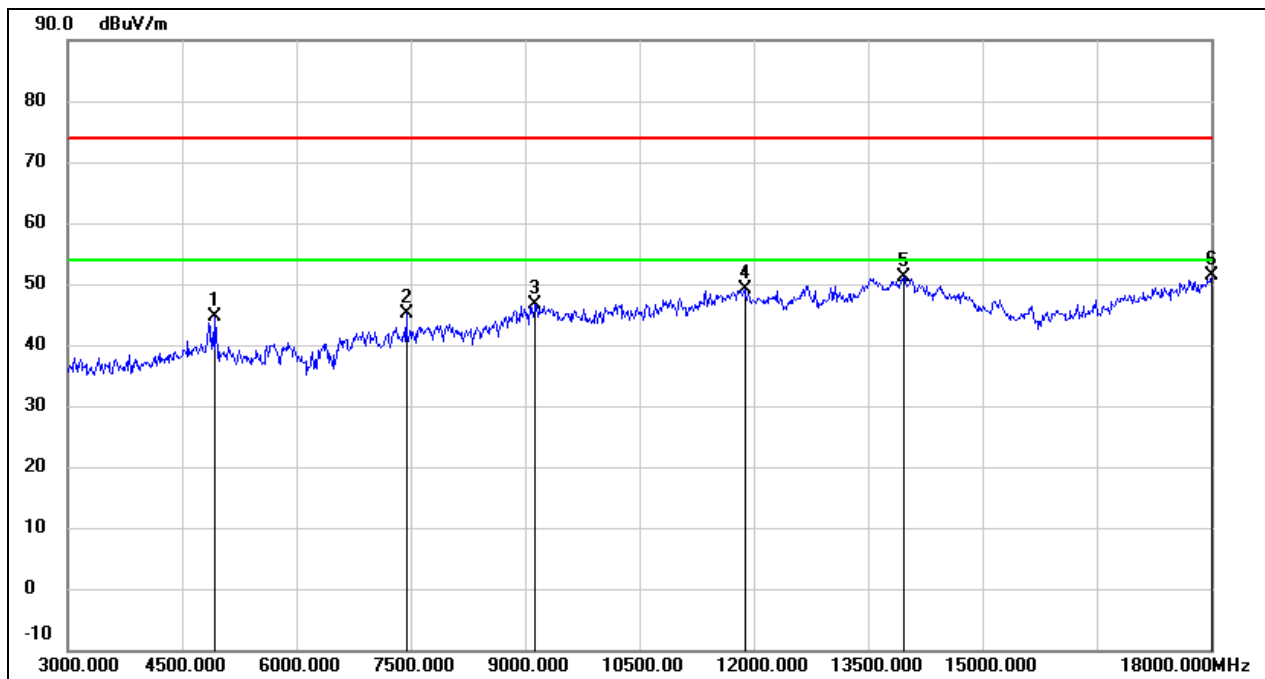

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	44.44	0.14	44.58	74.00	-29.42	peak
2	7440.000	38.64	6.38	45.02	74.00	-28.98	peak
3	9135.000	36.11	10.55	46.66	74.00	-27.34	peak
4	11880.000	31.46	17.63	49.09	74.00	-24.91	peak
5	13965.000	29.17	21.89	51.06	74.00	-22.94	peak
6	18000.000	25.62	25.69	51.31	74.00	-22.69	peak




Test Mode:	GFSK	Channel:	2480
Polarity:	Vertical	Test Voltage:	DC 5 V

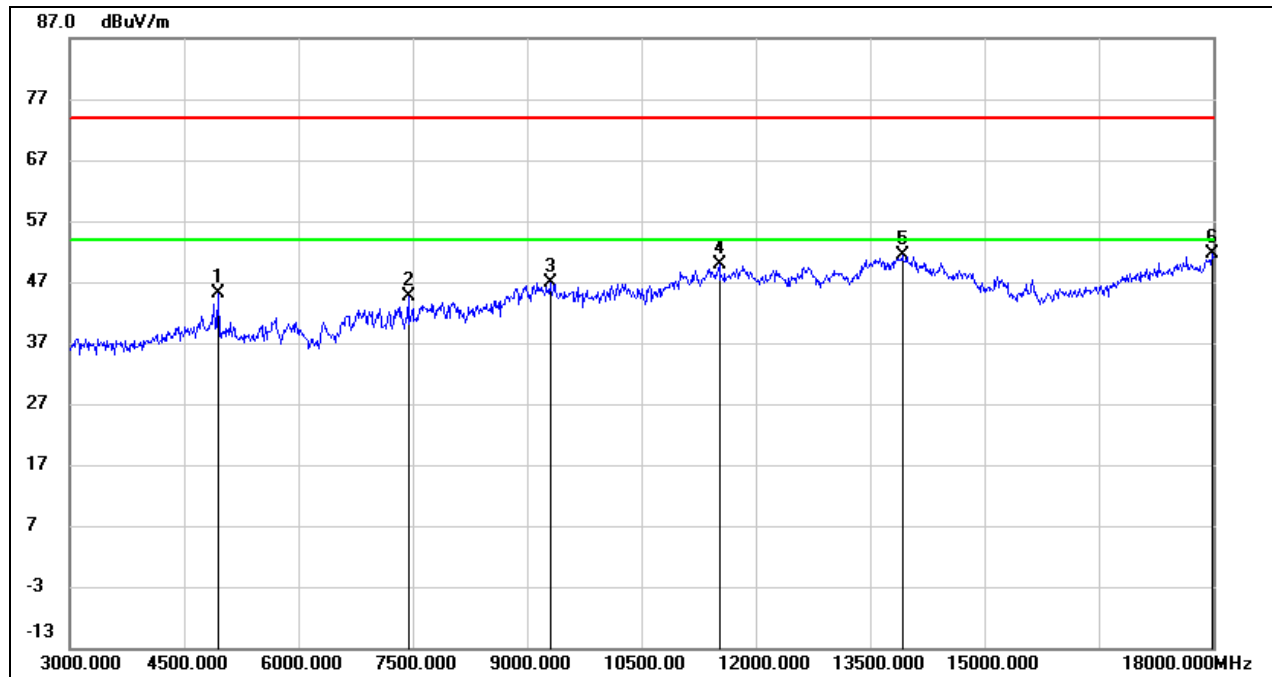

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	44.81	0.26	45.07	74.00	-28.93	peak
2	7440.000	38.20	6.38	44.58	74.00	-29.42	peak
3	9300.000	36.34	10.61	46.95	74.00	-27.05	peak
4	11520.000	33.31	16.65	49.96	74.00	-24.04	peak
5	13920.000	29.64	21.79	51.43	74.00	-22.57	peak
6	17985.000	26.13	25.60	51.73	74.00	-22.27	peak




Test Mode:	8DPSK	Channel:	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

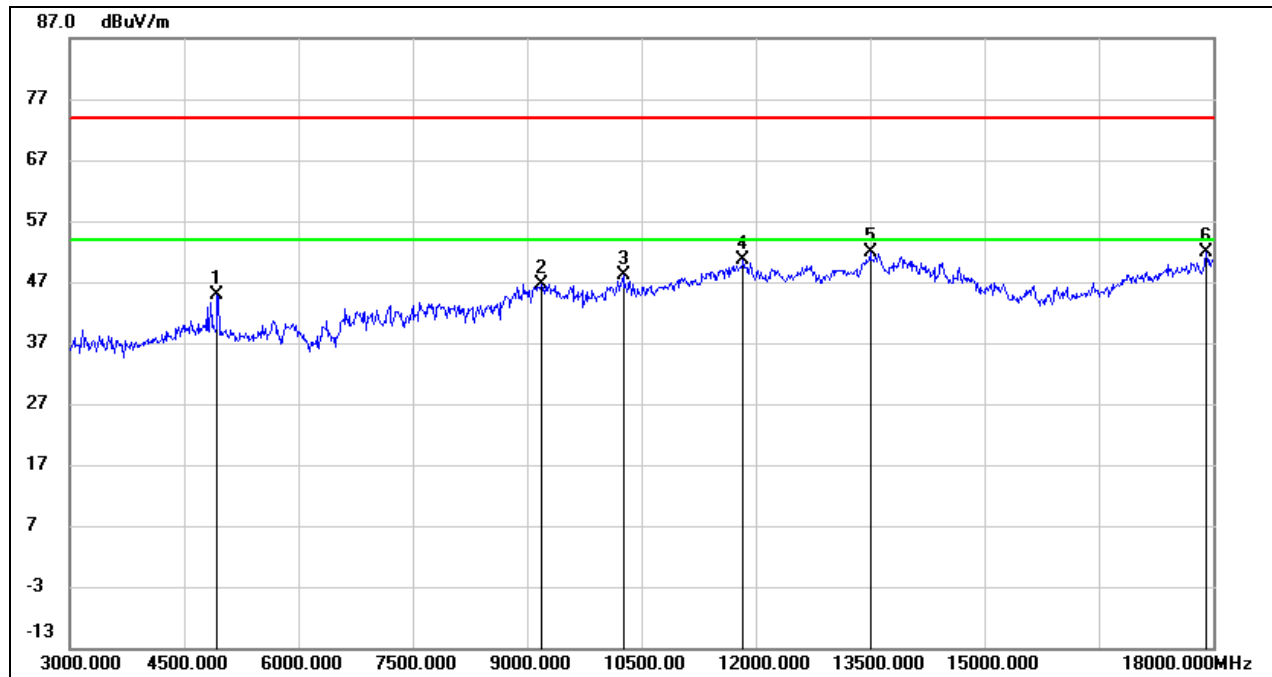

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4935.000	44.79	0.20	44.99	74.00	-29.01	peak
2	9195.000	36.16	10.56	46.72	74.00	-27.28	peak
3	10260.000	35.51	12.52	48.03	74.00	-25.97	peak
4	11835.000	33.02	17.51	50.53	74.00	-23.47	peak
5	13500.000	30.93	20.90	51.83	74.00	-22.17	peak
6	17910.000	26.76	25.16	51.92	74.00	-22.08	peak




Test Mode:	8DPSK	Channel:	2402
Polarity:	Vertical	Test Voltage:	DC 5 V

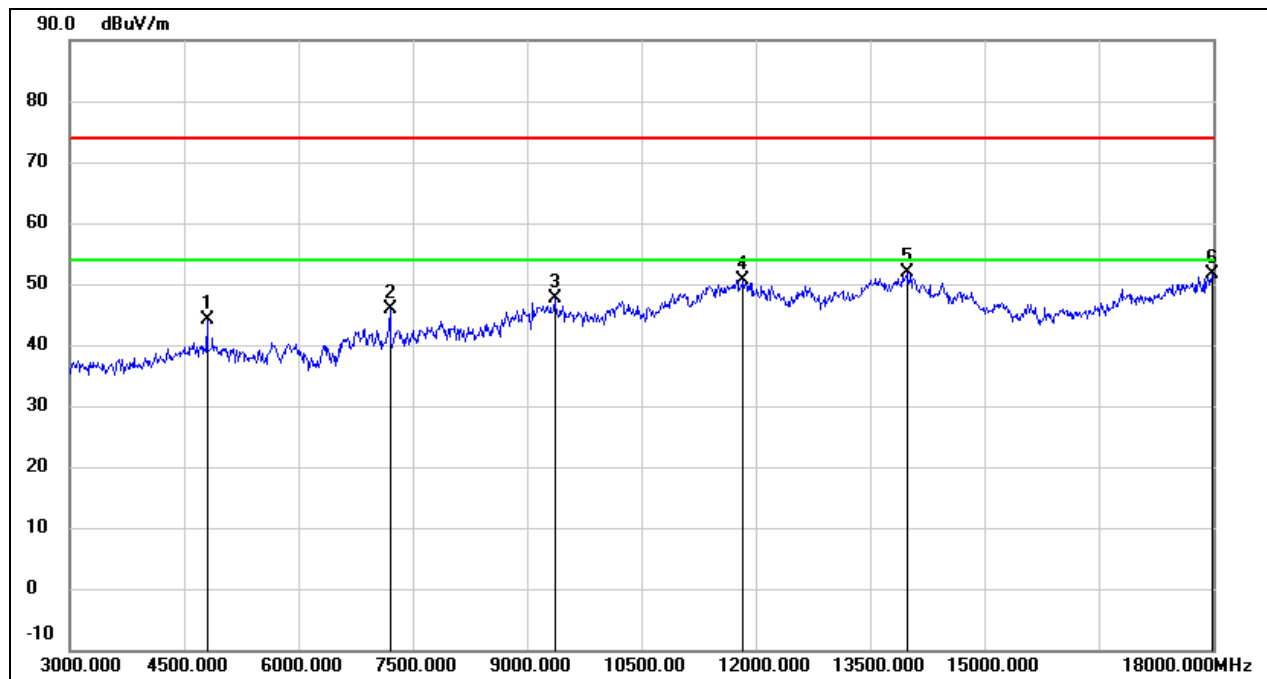

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	44.41	-0.31	44.10	74.00	-29.90	peak
2	7200.000	39.36	6.55	45.91	74.00	-28.09	peak
3	9360.000	37.07	10.64	47.71	74.00	-26.29	peak
4	11835.000	33.10	17.51	50.61	74.00	-23.39	peak
5	13980.000	29.90	21.92	51.82	74.00	-22.18	peak
6	17985.000	25.93	25.60	51.53	74.00	-22.47	peak




Test Mode:	8DPSK	Channel:	2441
Polarity:	Horizontal	Test Voltage:	DC 5 V

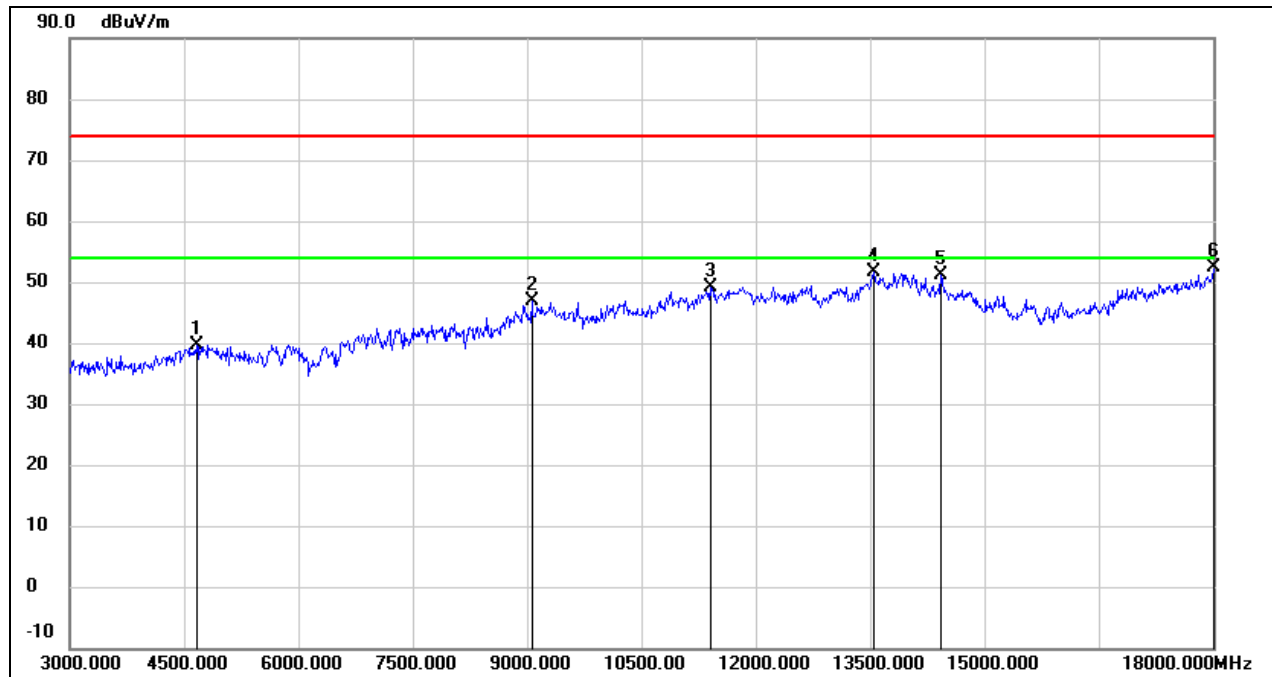

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4665.000	40.55	-0.83	39.72	74.00	-34.28	peak
2	9060.000	36.40	10.51	46.91	74.00	-27.09	peak
3	11400.000	33.00	16.23	49.23	74.00	-24.77	peak
4	13545.000	30.57	20.99	51.56	74.00	-22.44	peak
5	14430.000	30.82	20.20	51.02	74.00	-22.98	peak
6	18000.000	26.58	25.69	52.27	74.00	-21.73	peak




Test Mode:	8DPSK	Channel:	2441
Polarity:	Vertical	Test Voltage:	DC 5 V

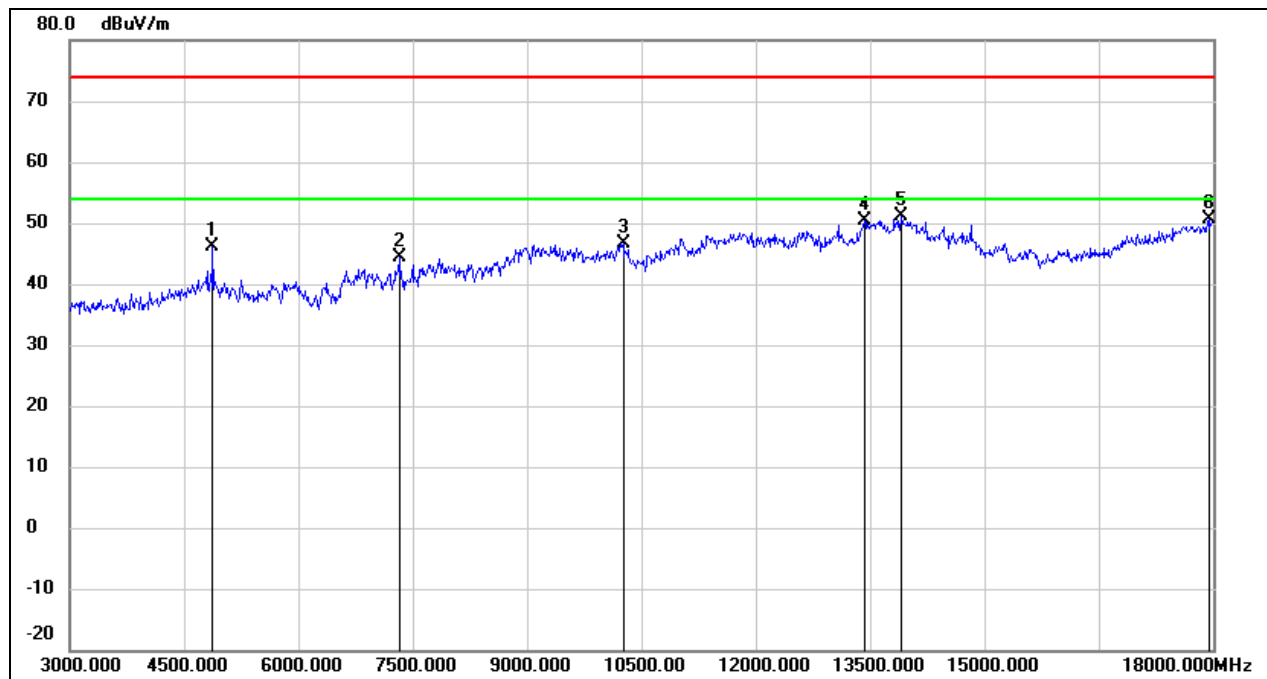

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	46.07	-0.03	46.04	74.00	-27.96	peak
2	7320.000	37.93	6.46	44.39	74.00	-29.61	peak
3	10260.000	34.14	12.52	46.66	74.00	-27.34	peak
4	13425.000	29.90	20.58	50.48	74.00	-23.52	peak
5	13905.000	29.40	21.76	51.16	74.00	-22.84	peak
6	17940.000	25.23	25.34	50.57	74.00	-23.43	peak




Test Mode:	8DPSK	Channel:	2480
Polarity:	Horizontal	Test Voltage:	DC 5 V

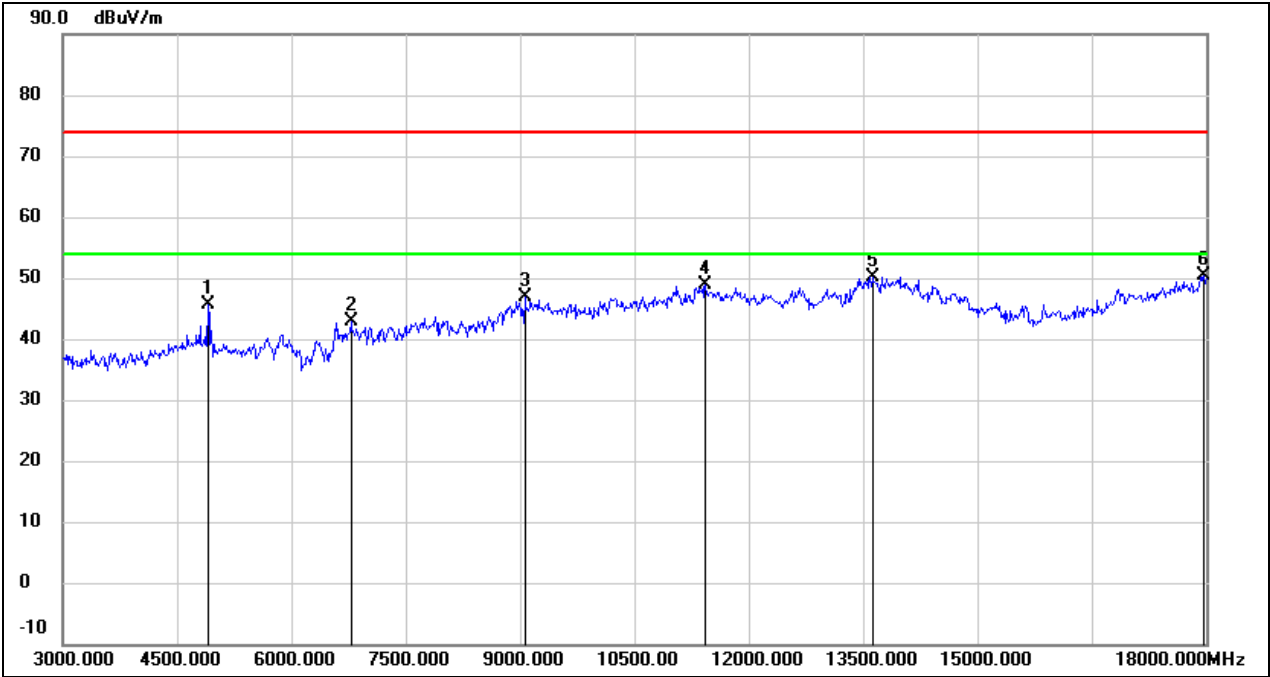

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	45.48	0.09	45.57	74.00	-28.43	peak
2	6780.000	37.37	5.60	42.97	74.00	-31.03	peak
3	9060.000	36.49	10.51	47.00	74.00	-27.00	peak
4	11430.000	32.51	16.34	48.85	74.00	-25.15	peak
5	13620.000	29.02	21.15	50.17	74.00	-23.83	peak
6	17970.000	24.88	25.51	50.39	74.00	-23.61	peak



Test Mode:	8DPSK	Channel:	2480
Polarity:	Vertical	Test Voltage:	DC 5 V

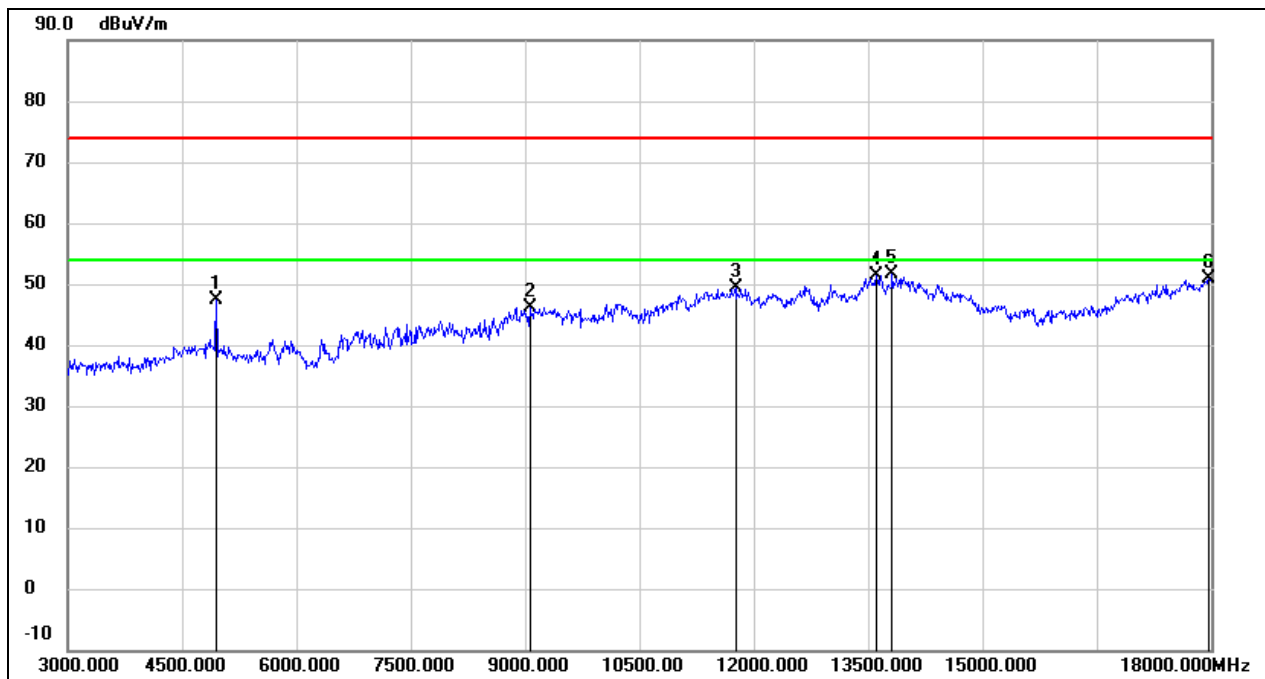


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	47.09	0.26	47.35	74.00	-26.65	peak
2	9060.000	35.74	10.51	46.25	74.00	-27.75	peak
3	11760.000	32.10	17.31	49.41	74.00	-24.59	peak
4	13605.000	30.26	21.12	51.38	74.00	-22.62	peak
5	13815.000	30.12	21.56	51.68	74.00	-22.32	peak
6	17970.000	25.46	25.51	50.97	74.00	-23.03	peak



**8.10. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)**


Test Mode:	GFSK	Channel:	2402
Polarity:	FACE ON	Test Voltage:	DC 5 V

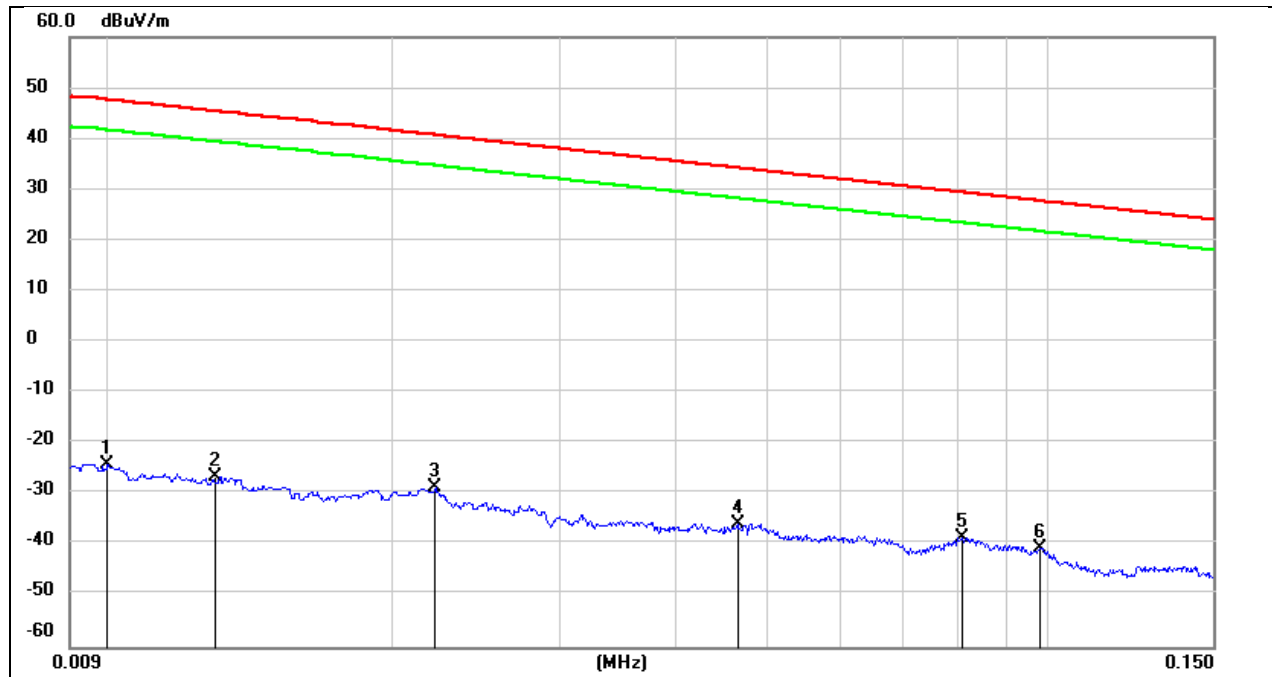

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	77.22	-101.40	-24.18	47.60	-75.68	-3.90	-71.78	peak
2	0.0129	74.75	-101.38	-26.63	45.39	-78.13	-6.11	-72.02	peak
3	0.0221	72.63	-101.35	-28.72	40.71	-80.22	-10.79	-69.43	peak
4	0.0466	65.67	-101.46	-35.79	34.23	-87.29	-17.27	-70.02	peak
5	0.0806	63.18	-101.63	-38.45	29.47	-89.95	-22.03	-67.92	peak
6	0.0981	61.27	-101.78	-40.51	27.77	-92.01	-23.73	-68.28	peak




Test Mode:	GFSK	Channel:	2402
Polarity:	FACE ON	Test Voltage:	DC 5 V

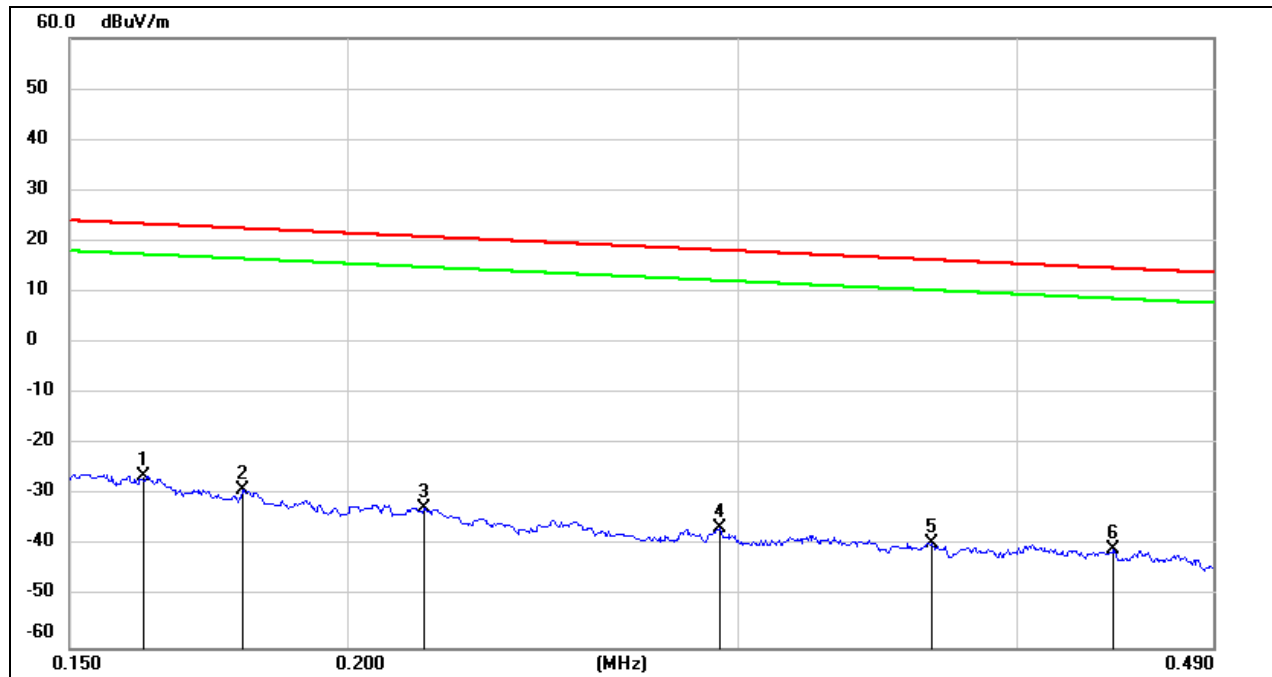

No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.1621	75.42	-101.65	-26.23	23.41	-77.73	-28.09	-49.64	peak
2	0.1794	72.77	-101.68	-28.91	22.53	-80.41	-28.97	-51.44	peak
3	0.2164	69.27	-101.75	-32.48	20.90	-83.98	-30.60	-53.38	peak
4	0.2942	65.32	-101.85	-36.53	18.23	-88.03	-33.27	-54.76	peak
5	0.3662	62.58	-101.93	-39.35	16.33	-90.85	-35.17	-55.68	peak
6	0.4420	61.33	-102.01	-40.68	14.69	-92.18	-36.81	-55.37	peak




Test Mode:	GFSK	Channel:	2402
Polarity:	FACE ON	Test Voltage:	DC 5 V

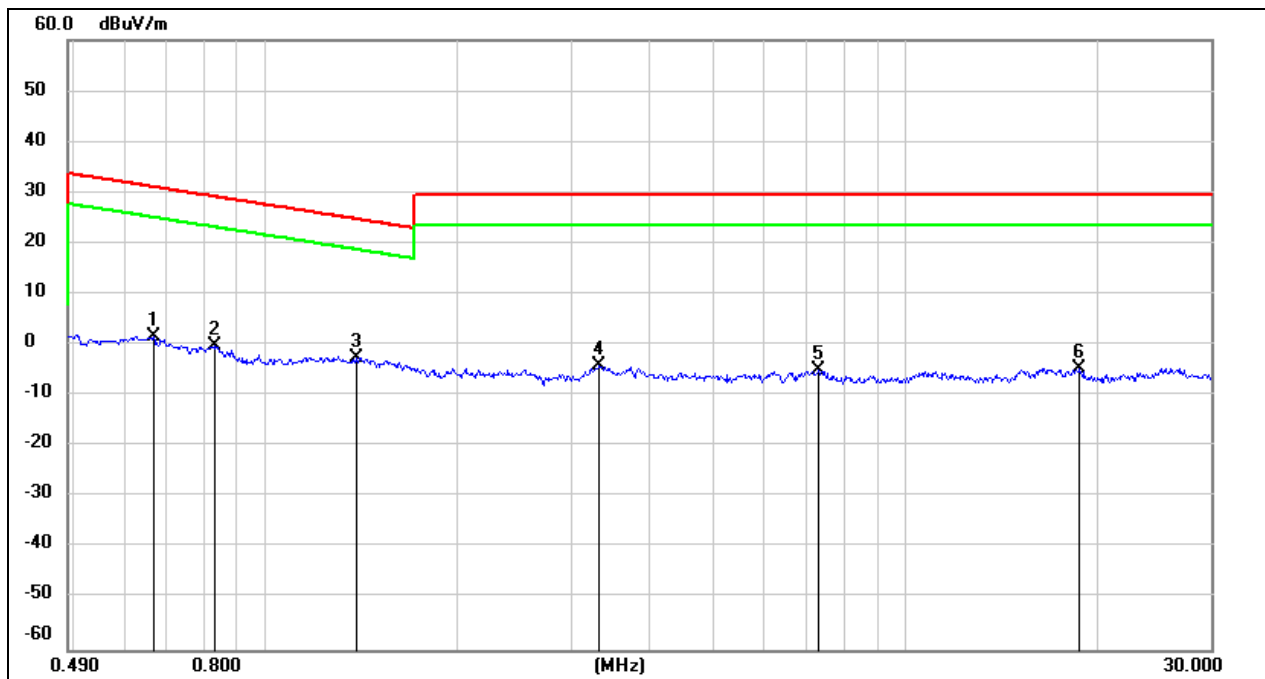

No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.6671	63.75	-62.10	1.65	31.12	-49.85	-20.38	-29.47	peak
2	0.8296	61.94	-62.17	-0.23	29.23	-51.73	-22.27	-29.46	peak
3	1.3810	59.47	-62.10	-2.63	24.80	-54.13	-26.70	-27.43	peak
4	3.3229	57.39	-61.50	-4.11	29.54	-55.61	-21.96	-33.65	peak
5	7.3361	56.08	-61.17	-5.09	29.54	-56.59	-21.96	-34.63	peak
6	18.7271	56.29	-60.88	-4.59	29.54	-56.09	-21.96	-34.13	peak

**8.11. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)**


Test Mode:	GFSK	Channel:	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

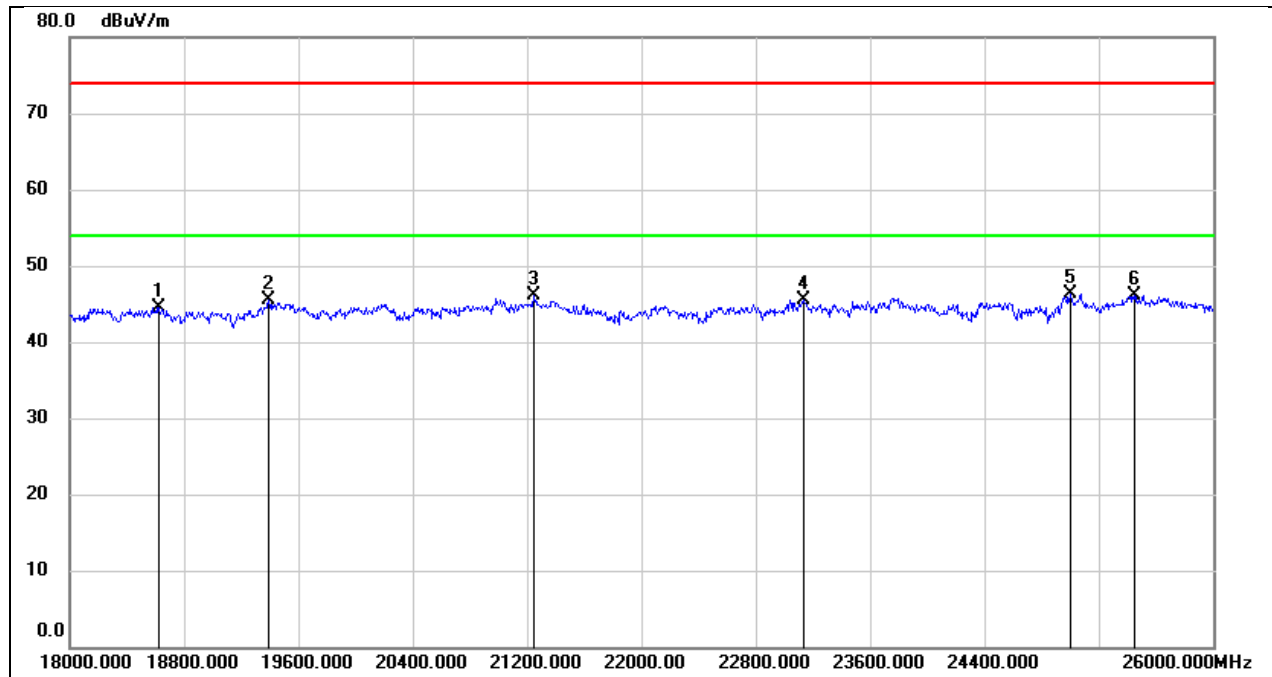

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18624.000	49.89	-5.34	44.55	74.00	-29.45	peak
2	19392.000	51.12	-5.57	45.55	74.00	-28.45	peak
3	21248.000	50.79	-4.77	46.02	74.00	-27.98	peak
4	23136.000	48.93	-3.40	45.53	74.00	-28.47	peak
5	25000.000	48.36	-2.10	46.26	74.00	-27.74	peak
6	25448.000	47.83	-1.76	46.07	74.00	-27.93	peak




Test Mode:	GFSK	Channel:	2402
Polarity:	Vertical	Test Voltage:	DC 5 V

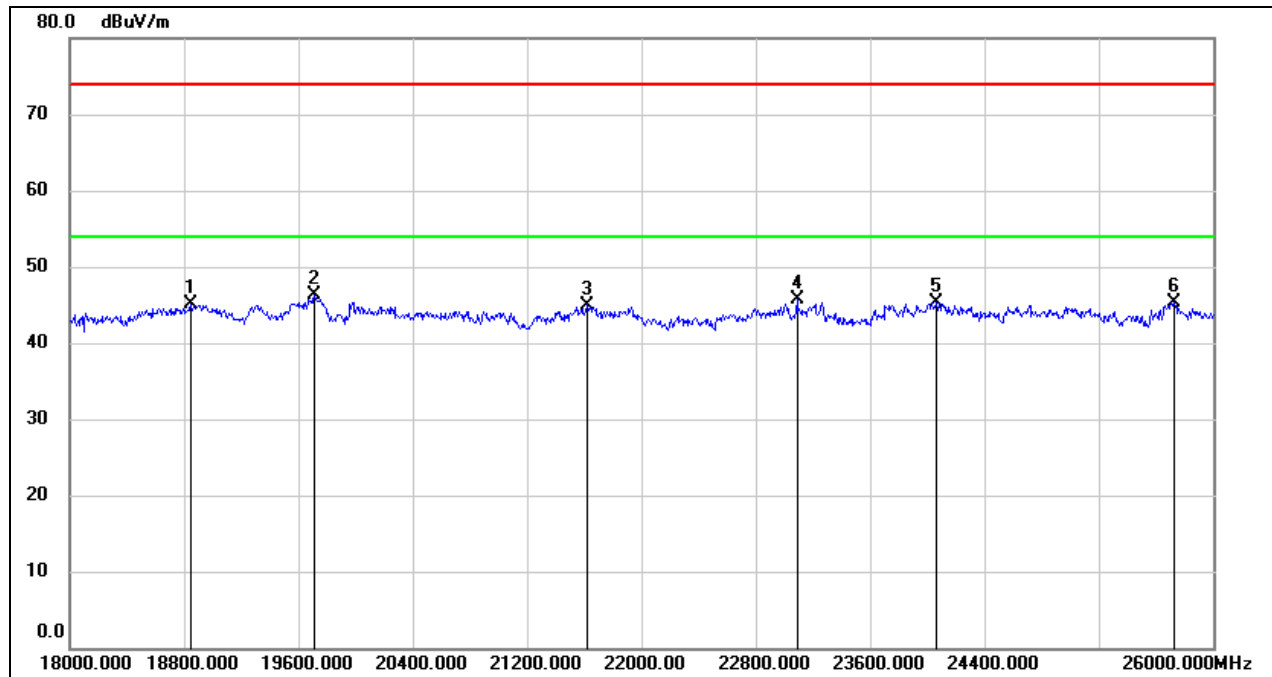

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18848.000	50.38	-5.35	45.03	74.00	-28.97	peak
2	19712.000	51.51	-5.29	46.22	74.00	-27.78	peak
3	21624.000	49.51	-4.51	45.00	74.00	-29.00	peak
4	23088.000	49.02	-3.41	45.61	74.00	-28.39	peak
5	24064.000	48.14	-2.77	45.37	74.00	-28.63	peak
6	25728.000	46.11	-0.72	45.39	74.00	-28.61	peak

**8.12. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)**


Test Mode:	GFSK	Channel:	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

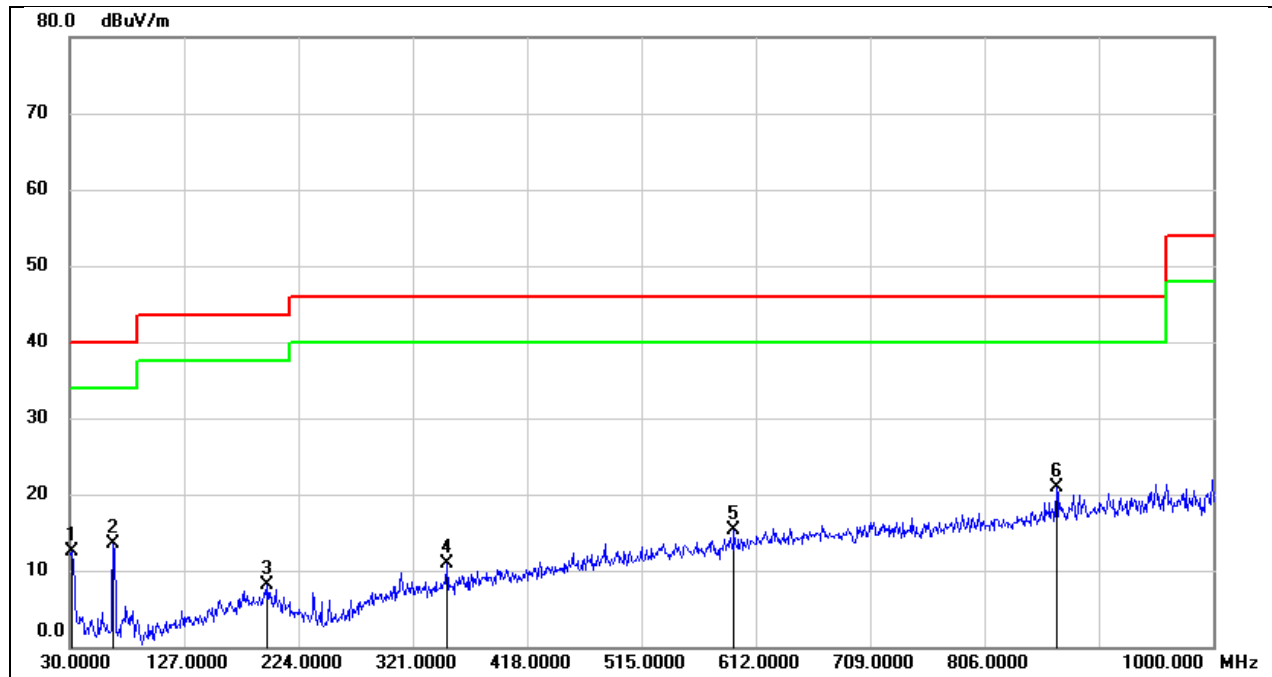

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31.9400	31.70	-19.13	12.57	40.00	-27.43	QP
2	66.8600	34.07	-20.56	13.51	40.00	-26.49	QP
3	197.8100	24.45	-16.41	8.04	43.50	-35.46	QP
4	350.1000	25.25	-14.32	10.93	46.00	-35.07	QP
5	593.5700	24.93	-9.72	15.21	46.00	-30.79	QP
6	867.1100	26.79	-5.82	20.97	46.00	-25.03	QP



Test Mode:	GFSK	Channel:	2402
Polarity:	Vertical	Test Voltage:	DC 5 V

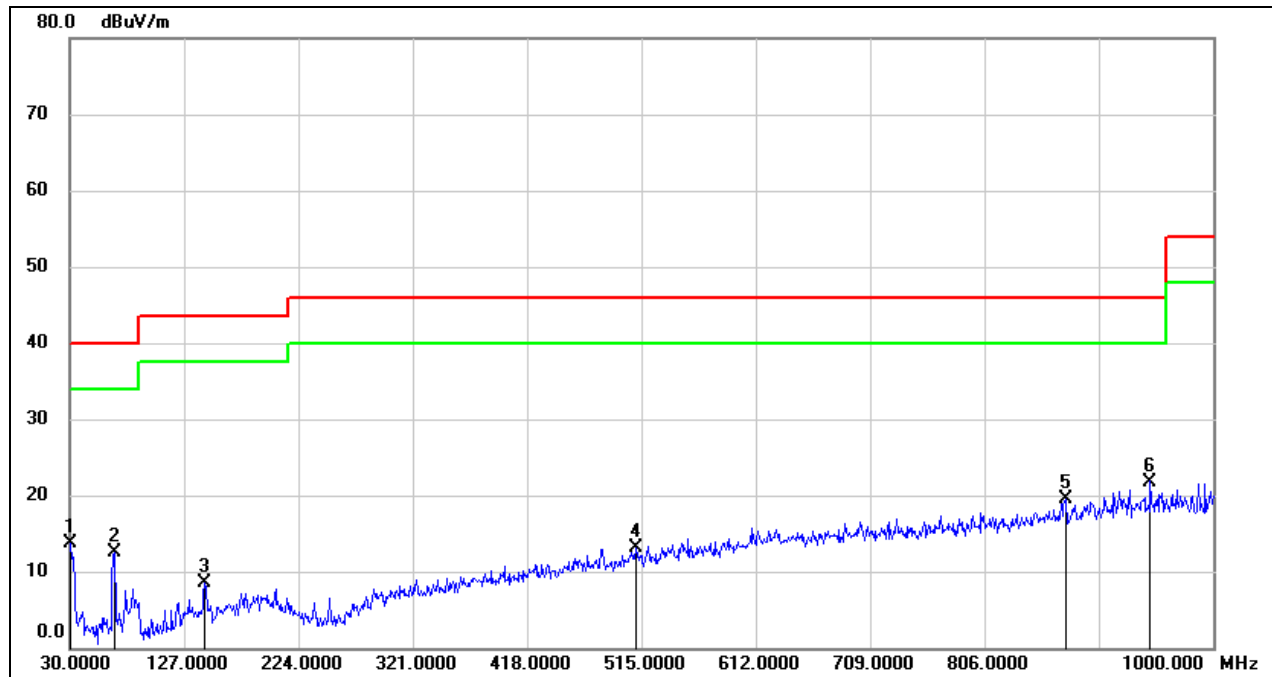

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	32.70	-19.04	13.66	40.00	-26.34	QP
2	67.8300	33.11	-20.55	12.56	40.00	-27.44	QP
3	144.4600	27.10	-18.60	8.50	43.50	-35.00	QP
4	510.1500	24.26	-11.24	13.02	46.00	-32.98	QP
5	874.8700	25.12	-5.64	19.48	46.00	-26.52	QP
6	946.6500	26.24	-4.44	21.80	46.00	-24.20	QP

## 9. ANTENNA REQUIREMENT

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### RESULTS

Complies



## 10. AC POWER LINE CONDUCTED EMISSION

### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST PROCEDURE


#### TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST SETUP

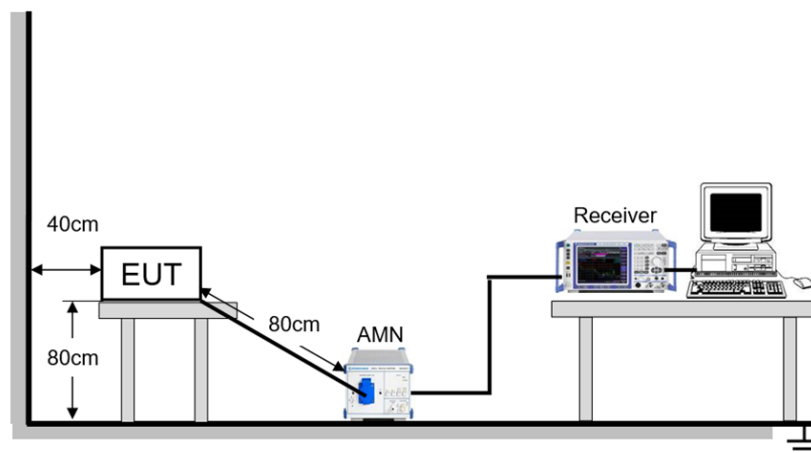


**TEST ENVIRONMENT**

Temperature	23.9°C	Relative Humidity	69.0%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

**TEST RESULTS**

Test Mode:	GFSK	Channel:	2402
Line:	Line	Test Voltage	AC 120 V, 60 Hz

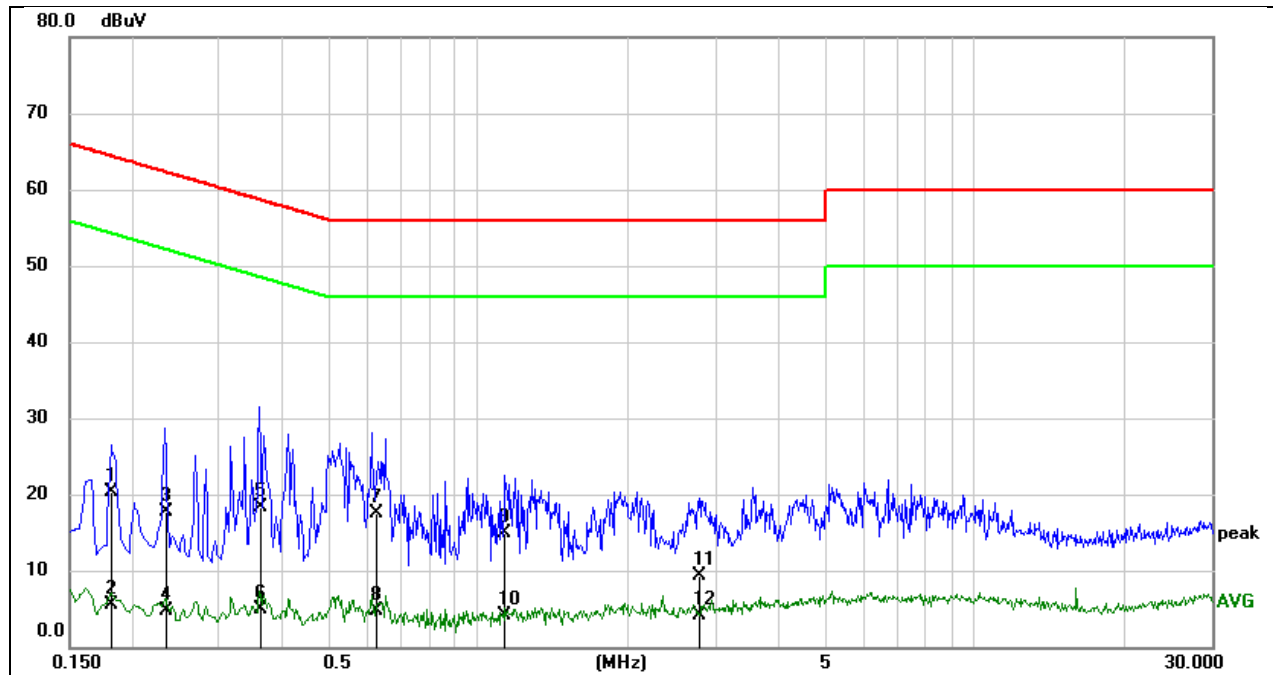

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1824	10.71	9.59	20.30	64.38	-44.08	QP
2	0.1824	-4.10	9.59	5.49	54.38	-48.89	AVG
3	0.2349	8.21	9.55	17.76	62.27	-44.51	QP
4	0.2349	-4.86	9.55	4.69	52.27	-47.58	AVG
5	0.3636	8.84	9.43	18.27	58.65	-40.38	QP
6	0.3636	-4.43	9.43	5.00	48.65	-43.65	AVG
7	0.6223	8.09	9.48	17.57	56.00	-38.43	QP
8	0.6223	-4.74	9.48	4.74	46.00	-41.26	AVG
9	1.1350	5.27	9.61	14.88	56.00	-41.12	QP
10	1.1350	-5.44	9.61	4.17	46.00	-41.83	AVG
11	2.7957	-0.31	9.62	9.31	56.00	-46.69	QP
12	2.7957	-5.42	9.62	4.20	46.00	-41.80	AVG


Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.



Test Mode:	GFSK	Channel:	2402
Line:	Neutral	Test Voltage	AC 120 V, 60 Hz

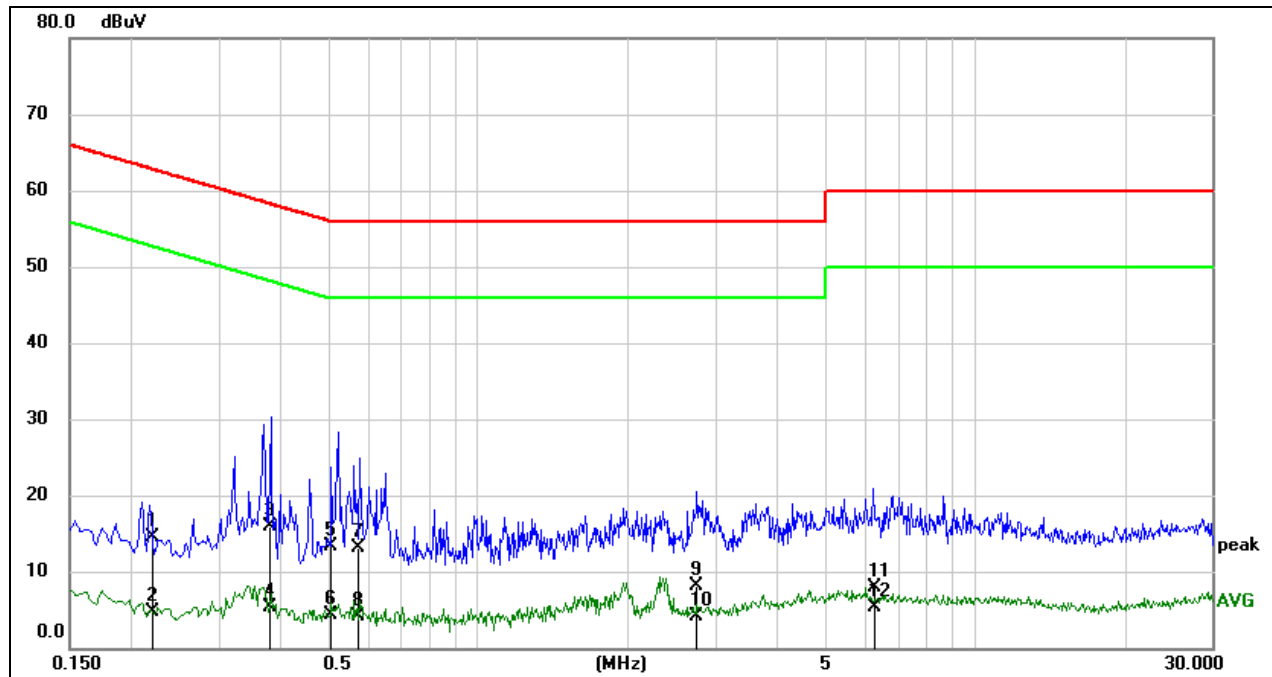

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2214	4.87	9.57	14.44	62.77	-48.33	QP
2	0.2214	-4.80	9.57	4.77	52.77	-48.00	AVG
3	0.3786	6.45	9.41	15.86	58.31	-42.45	QP
4	0.3786	-4.15	9.41	5.26	48.31	-43.05	AVG
5	0.5056	3.94	9.31	13.25	56.00	-42.75	QP
6	0.5056	-5.06	9.31	4.25	46.00	-41.75	AVG
7	0.5728	3.61	9.41	13.02	56.00	-42.98	QP
8	0.5728	-5.33	9.41	4.08	46.00	-41.92	AVG
9	2.7674	-1.54	9.62	8.08	56.00	-47.92	QP
10	2.7674	-5.59	9.62	4.03	46.00	-41.97	AVG
11	6.3095	-1.81	9.64	7.83	60.00	-52.17	QP
12	6.3095	-4.29	9.64	5.35	50.00	-44.65	AVG

## Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.




## 11. TEST DATA FOR RIGHT BLUETOOTH EARPHONE


### 11.1. APPENDIX A: 20DB EMISSION BANDWIDTH

#### 11.1.1. Test Result

Test Mode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Verdict
DH5	Ant1	2402	0.966	2401.541	2402.507	PASS
		2441	0.927	2440.499	2441.426	PASS
		2480	0.993	2479.475	2480.468	PASS
3DH5	Ant1	2402	1.167	2401.421	2402.588	PASS
		2441	1.233	2440.370	2441.603	PASS
		2480	1.170	2479.430	2480.600	PASS

## 11.1.2. Test Graphs

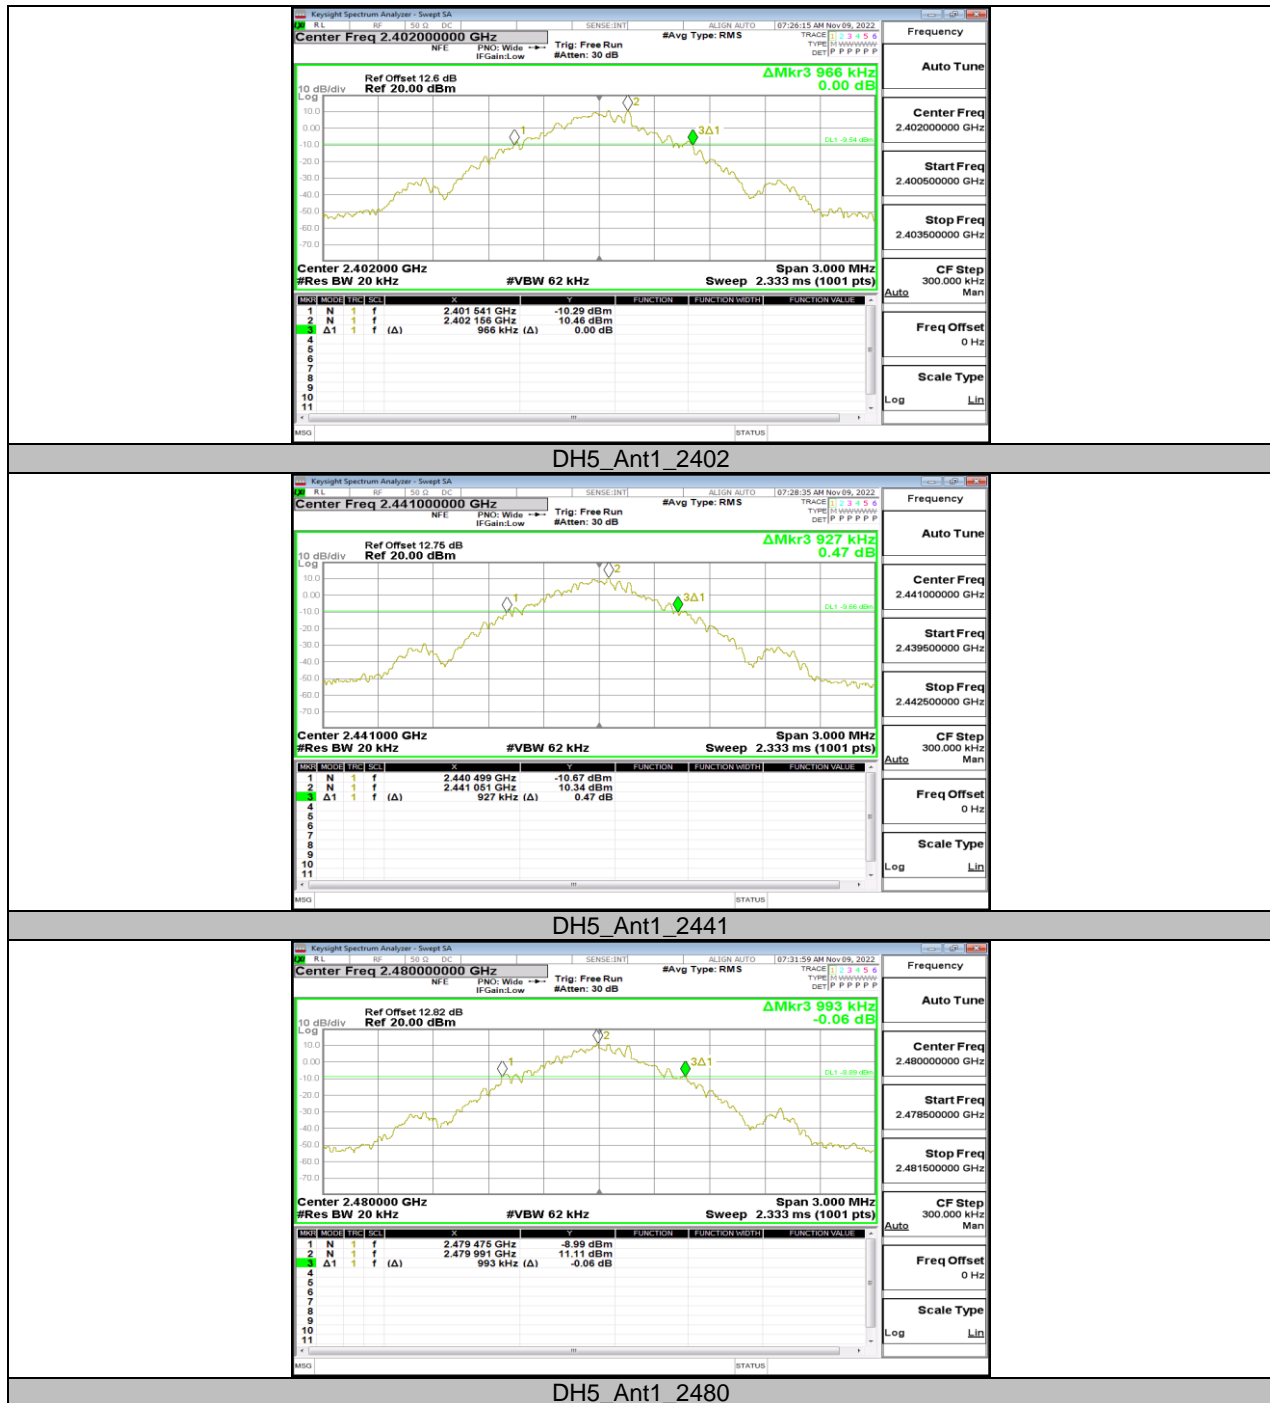

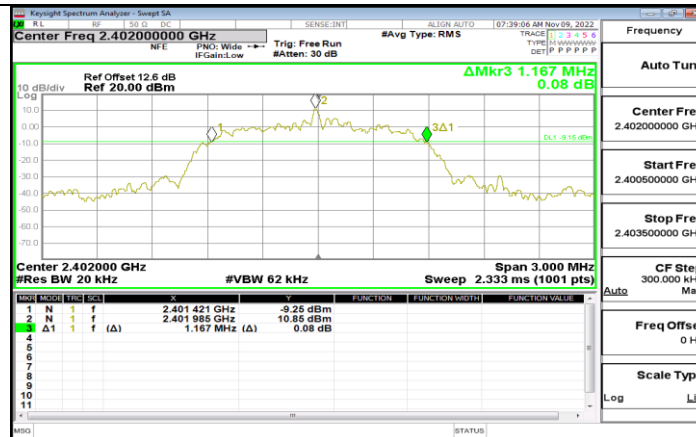



## 11.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH

### 11.2.1. Test Result

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
DH5	Ant1	2402	0.91371	2401.5357	2402.4494	PASS
		2441	0.87557	2440.5488	2441.4244	PASS
		2480	0.88724	2479.5430	2480.4303	PASS
3DH5	Ant1	2402	1.1604	2401.4118	2402.5722	PASS
		2441	1.1593	2440.4122	2441.5715	PASS
		2480	1.1617	2479.4132	2480.5749	PASS

## 11.2.2. Test Graphs









### 11.3. APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER

#### 11.3.1. Test Result

Test Mode	Antenna	Channel	PEAK Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	13.44	≤30	PASS
		2441	13.70	≤30	PASS
		2480	13.71	≤30	PASS
3DH5	Ant1	2402	13.51	≤21	PASS
		2441	13.76	≤21	PASS
		2480	13.70	≤21	PASS

Test Mode	Antenna	Channel	AVG Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	13.09	≤30	PASS
		2441	12.81	≤30	PASS
		2480	13.05	≤30	PASS
3DH5	Ant1	2402	10.10	≤21	PASS
		2441	10.15	≤21	PASS
		2480	9.89	≤21	PASS

Note: 1. Conducted Power=Meas. Level+ Correction Factor

2. The Duty Cycle Factor (refer to section 7.7) had already compensated to the test data in AVG-Result.



## 11.4. APPENDIX D: CARRIER FREQUENCY SEPARATION

### 11.4.1. Test Result

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.004	$\geq 0.993$	PASS
3DH5	Ant1	Hop	1.172	$\geq 0.822$	PASS

## 11.4.2. Test Graphs



## 11.5. APPENDIX E: TIME OF OCCUPANCY

### 11.5.1. Test Result

FHSS Mode						
Test Mode	Antenna	Channel	BurstWidth [ms]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.384	0.123	$\leq 0.4$	PASS
DH3	Ant1	Hop	1.639	0.262	$\leq 0.4$	PASS
DH5	Ant1	Hop	2.888	0.308	$\leq 0.4$	PASS
3DH1	Ant1	Hop	0.393	0.126	$\leq 0.4$	PASS
3DH3	Ant1	Hop	1.643	0.263	$\leq 0.4$	PASS
3DH5	Ant1	Hop	2.893	0.309	$\leq 0.4$	PASS

AFHSS Mode						
Test Mode	Antenna	Channel	BurstWidth [ms]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.384	0.061	$\leq 0.4$	PASS
DH3	Ant1	Hop	1.639	0.131	$\leq 0.4$	PASS
DH5	Ant1	Hop	2.888	0.154	$\leq 0.4$	PASS
3DH1	Ant1	Hop	0.393	0.063	$\leq 0.4$	PASS
3DH3	Ant1	Hop	1.643	0.131	$\leq 0.4$	PASS
3DH5	Ant1	Hop	2.893	0.154	$\leq 0.4$	PASS



## 11.5.2. Test Graphs








## 11.6. APPENDIX F: NUMBER OF HOPPING CHANNELS

### 11.6.1. Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	$\geq 15$	PASS
3DH5	Ant1	Hop	79	$\geq 15$	PASS



## 11.6.2. Test Graphs

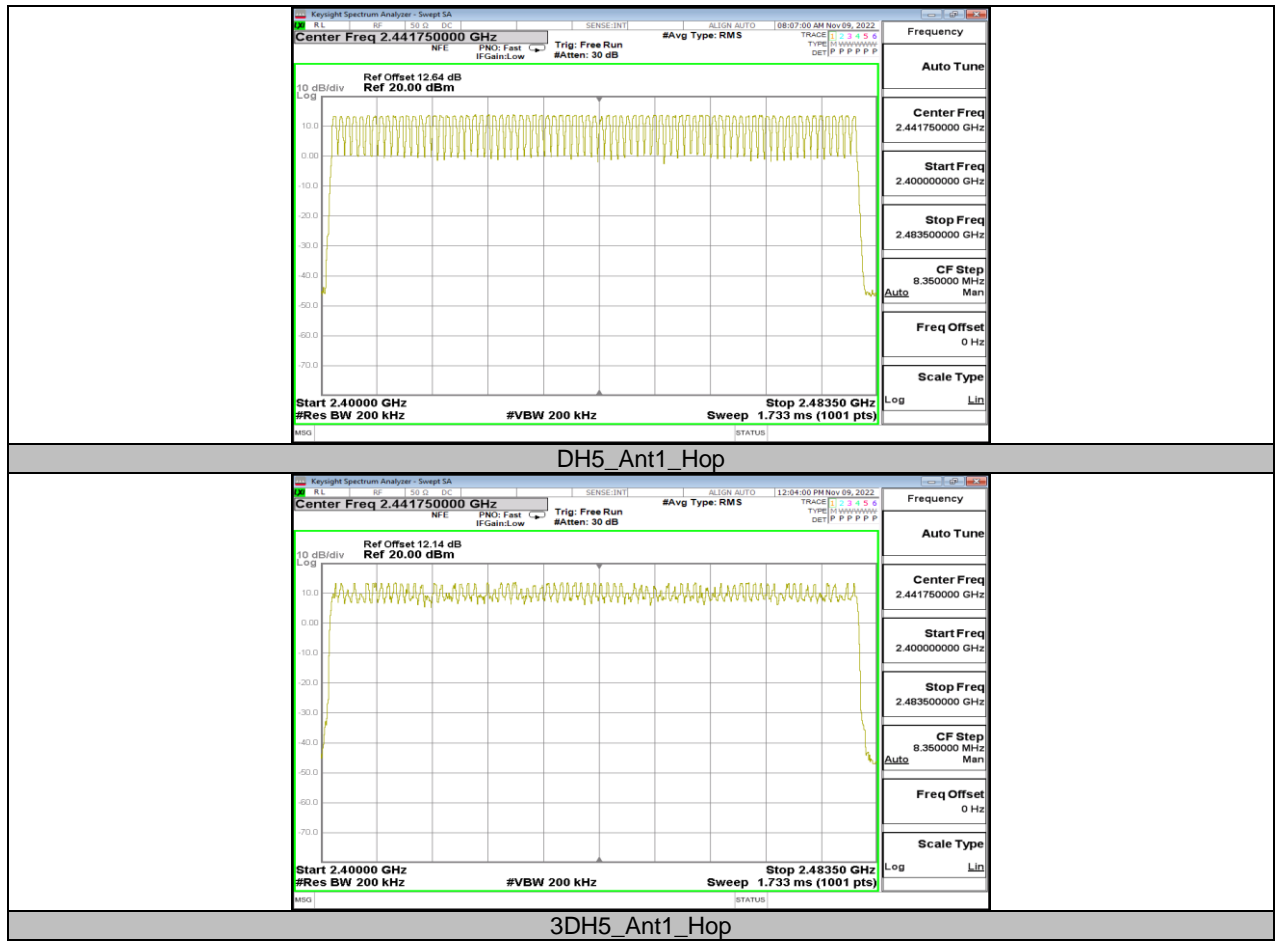



## 11.7. APPENDIX G: BAND EDGE MEASUREMENTS

### 11.7.1. Test Result

Test Mode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	13.82	-45.3	$\leq -6.18$	PASS
		High	2480	13.91	-45.92	$\leq -6.09$	PASS
		Low	Hop_2402	13.00	-45.98	$\leq -7.00$	PASS
		High	Hop_2480	13.61	-46.32	$\leq -6.39$	PASS
3DH5	Ant1	Low	2402	13.37	-45.83	$\leq -6.63$	PASS
		High	2480	13.54	-47.05	$\leq -6.46$	PASS
		Low	Hop_2402	13.38	-45.28	$\leq -6.62$	PASS
		High	Hop_2480	13.47	-46.51	$\leq -6.53$	PASS



## 11.7.2. Test Graphs

