

FCC TEST REPORT

REPORT NO.: RF910703R01

MODEL NO.: WLL030M
WLL030

RECEIVED: June 26, 2002

TESTED: June 28 ~ July 2, 2002

APPLICANT: ASKEY COMPUTER CORP.

ADDRESS: 2/FL, No. 2, Lane 497 Chung Cheng Road,
Hsin Tien, Taipei, Taiwan R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 58 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0

Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS.....	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	7
3.4	DESCRIPTION OF SUPPORT UNITS.....	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST PROCEDURES.....	10
4.1.4	TEST SETUP	10
4.1.5	EUT OPERATING CONDITIONS.....	11
4.1.6	TEST RESULTS (A).....	12
4.1.7	TEST RESULTS (B).....	18
4.2	RADIATED EMISSION MEASUREMENT	24
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	24
4.2.2	TEST INSTRUMENTS	25
4.2.3	TEST PROCEDURES.....	26
4.2.4	TEST SETUP	27
4.2.5	EUT OPERATING CONDITIONS.....	27
4.2.6	TEST RESULTS (A).....	28
4.2.7	TEST RESULTS (B).....	32
4.3	6dB BANDWIDTH MEASUREMENT	36
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	36
4.3.2	TEST INSTRUMENTS	36
4.3.3	TEST PROCEDURE	37
4.3.4	TEST SETUP	37
4.3.5	EUT OPERATING CONDITIONS.....	37
4.3.6	TEST RESULTS.....	38
4.4	MAXIMUM PEAK OUTPUT POWER	42
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	42
4.4.2	TEST INSTRUMENTS	42
4.4.3	TEST PROCEDURES.....	43



4.4.4	TEST SETUP.....	43
4.4.5	EUT OPERATING CONDITIONS.....	43
4.4.6	TEST RESULTS.....	44
4.5	POWER SPECTRAL DENSITY MEASUREMENT	45
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	45
4.5.2	TEST INSTRUMENTS	45
4.5.3	TEST PROCEDURE	46
4.5.4	TEST SETUP.....	46
4.5.5	EUT OPERATING CONDITIONS.....	46
4.5.6	TEST RESULTS.....	47
4.6	BAND EDGES MEASUREMENT	51
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	51
4.6.2	TEST INSTRUMENTS	51
4.6.3	TEST PROCEDURE	51
4.6.4	EUT OPERATING CONDITION	52
4.6.5	TEST RESULTS.....	52
4.7	ANTENNA REQUIREMENT.....	55
4.7.1	STANDARD APPLICABLE.....	55
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	55
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	56
6	INFORMATION ON THE TESTING LABORATORIES	58



1 CERTIFICATION

PRODUCT : Mini PCI Combo Card
BRAND NAME : Askey
MODEL NO. : WLL030M
WLL030
APPLICANT : ASKEY COMPUTER CORP.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from June 28 to July 2, 2002. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY : Emily Lu , DATE : July 15, 2002
Emily Lu

APPROVED BY : Alan Lane , DATE : July 15, 2002
Dr. Alan Lane, Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission Limit: 48dBuV	PASS	Meet the requirement of limit Minimum passing margin is -13.58dBuV at 0.193MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -2.00dBuV at 233.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Mini PCI Combo Card
MODEL NO.	WLL030M, WLL030
POWER SUPPLY	3.3VDC from host equipment
MODULATION TYPE	CCK, DBPSK, DQPSK
RADIO TECHNOLOGY	DSSS
TRANSFER RATE	1/2/5.5/11Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	14.94dBm
ANTENNA TYPE	Dipole Antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. Model WLL030M and WLL030 are identical except for model number and the model WLL030 is designed without modem part.
2. This report is prepared for FCC class II permissive change. Another Dipole antenna was added to this EUT for the test.
3. For a more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. The test result A is for model WLL030M and the test result B is for model WLL030.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Mini PCI Combo Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C. (15.247)

ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	IBM	THMKPAD A20M	NA	NA
2	PRINTER	EPSON	LQ-300+	DCGY017096	FCC DoC APPROVED
3	MODEM	ACEEX	1414	980020503	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.8 m unshielded, DC connector, with core.
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS30	845552/004	June 19, 2003
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH2-Z5	828075/003	July 19, 2002
ROHDE & SCHWARZ 200-A Four-line V-Network	ENV4200	830326/018	Oct. 25, 2002
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Dec. 2, 2002
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/018	Dec. 2, 2002
EMCO-L.I.S.N. (for peripheral)	3825/2	90031627	July 19, 2002
Software	Cond-V2L	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C05.01	July 19, 2002
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-305	Feb. 20, 2003
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-306	Feb. 20, 2003
Shielded Room	Site 5	ADT-C05	NA
VCCI Site Registration No.	Site 5	C-1093	NA

NOTE: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.


2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

3. “*”: These equipment are used for conducted telecom port test only (if tested).

4.1.3 TEST PROCEDURES

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

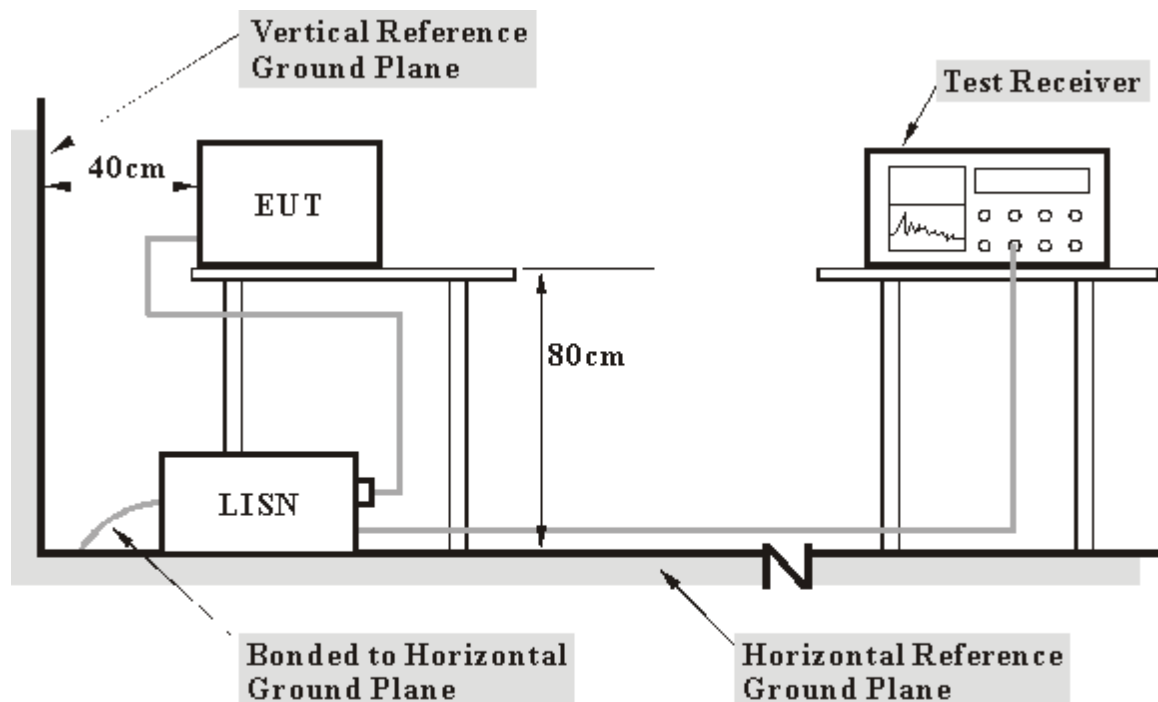

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.5 EUT OPERATING CONDITIONS

- a. Plug the EUT into the PCI extender which connected to a computer system placed on a testing table.
- b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.


4.1.6 TEST RESULTS (A)

EUT	Mini PCI Combo Card	MODEL	WLL030M
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 1005 hPa	TESTED BY: Bunny Yao	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.10	50.23	-	50.33	-	63.91	53.91	-13.58	-
2	1.113	0.20	37.03	-	37.23	-	56.00	46.00	-18.77	-
3	6.668	0.49	30.88	-	31.37	-	60.00	50.00	-28.63	-
4	7.664	0.52	29.57	-	30.09	-	60.00	50.00	-29.91	-
5	8.152	0.54	29.82	-	30.36	-	60.00	50.00	-29.64	-
6	16.008	0.76	29.12	-	29.88	-	60.00	50.00	-30.12	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

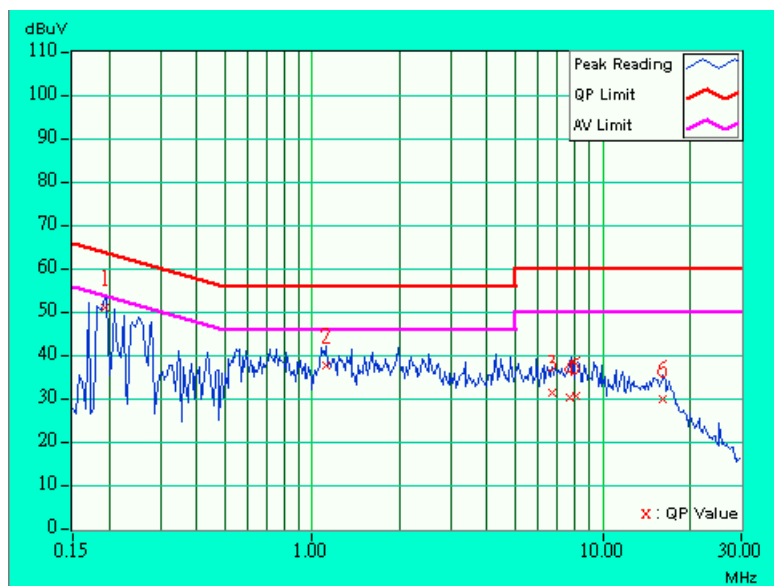


EUT	Mini PCI Combo Card	MODEL	WLL030M
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 1005 hPa	TESTED BY: Bunny Yao	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.10	45.66	-	45.76	-	64.08	54.08	-18.32	-
2	0.580	0.13	34.31	-	34.44	-	56.00	46.00	-21.56	-
3	2.020	0.20	34.40	-	34.60	-	56.00	46.00	-21.40	-
4	4.809	0.31	28.81	-	29.12	-	56.00	46.00	-26.88	-
5	14.285	0.49	30.74	-	31.23	-	60.00	50.00	-28.77	-
6	22.273	0.75	27.27	-	28.02	-	60.00	50.00	-31.98	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

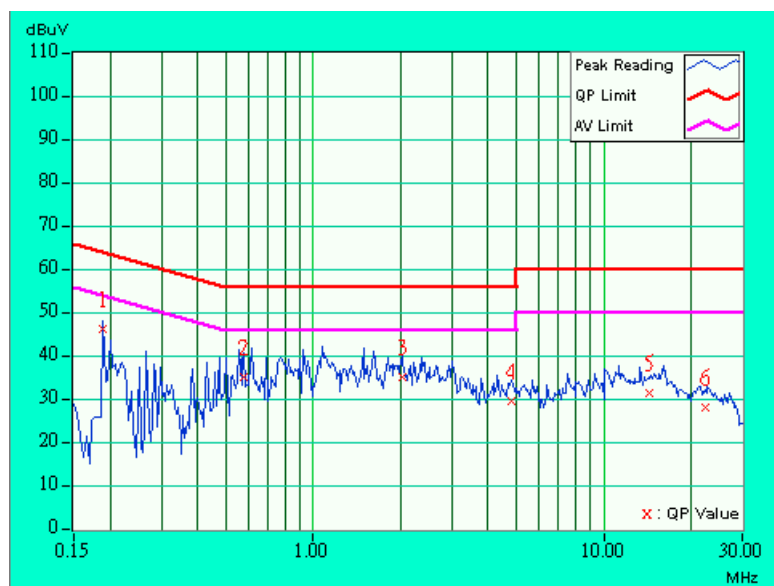


EUT	Mini PCI Combo Card	MODEL	WLL030M
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 1005 hPa	TESTED BY: Bunny Yao	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.205	0.10	47.65	-	47.75	-	63.42	53.42	-15.67	-
2	0.420	0.10	35.45	-	35.55	-	57.46	47.46	-21.90	-
3	0.736	0.16	35.42	-	35.58	-	56.00	46.00	-20.42	-
4	4.441	0.41	30.97	-	31.38	-	56.00	46.00	-24.62	-
5	16.285	0.78	29.69	-	30.47	-	60.00	50.00	-29.53	-
6	21.195	1.05	17.50	-	18.55	-	60.00	50.00	-41.45	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

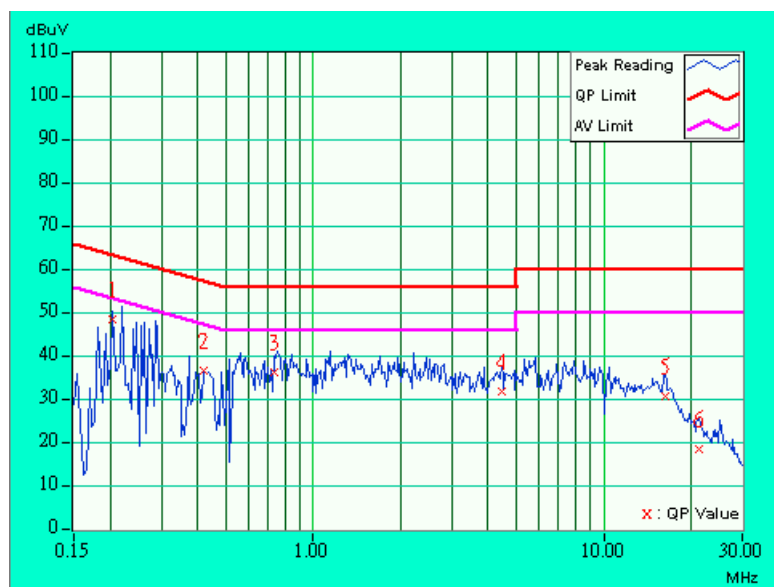


EUT	Mini PCI Combo Card	MODEL	WLL030M
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 1005 hPa	TESTED BY: Bunny Yao	

No	Freq.	Corr. Factor	Reading Value [dB (Uv)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.10	42.18	-	42.28	-	63.58	53.58	-21.30	-
2	0.556	0.13	37.03	-	37.16	-	56.00	46.00	-18.84	-
3	1.645	0.20	32.87	-	33.07	-	56.00	46.00	-22.93	-
4	5.391	0.32	26.40	-	26.72	-	60.00	50.00	-33.28	-
5	10.770	0.42	31.09	-	31.51	-	60.00	50.00	-28.49	-
6	10.770	0.42	31.01	-	31.43	-	60.00	50.00	-28.57	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

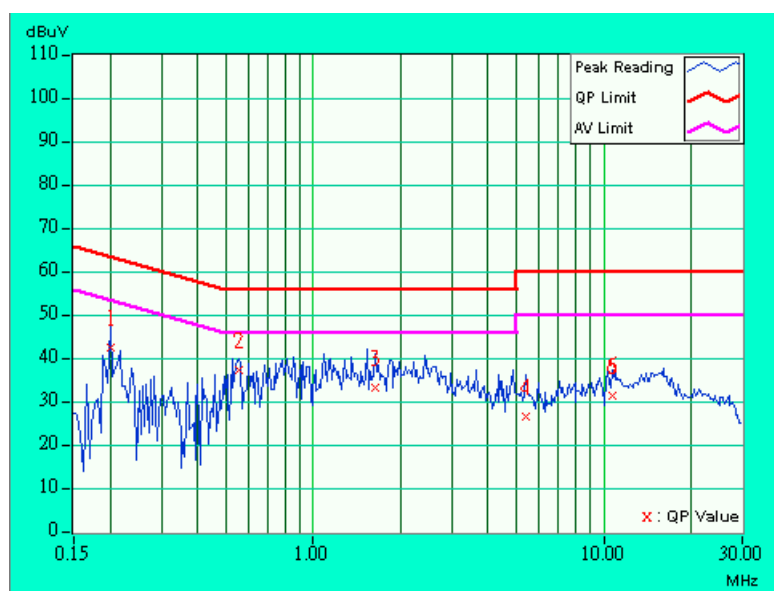


EUT	Mini PCI Combo Card	MODEL	WLL030M
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 1005 hPa	TESTED BY: Bunny Yao	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.10	49.13	-	49.23	-	64.43	54.43	-15.20	-
2	0.552	0.13	37.77	-	37.90	-	56.00	46.00	-18.10	-
3	1.105	0.20	36.73	-	36.93	-	56.00	46.00	-19.07	-
4	2.281	0.23	32.94	-	33.17	-	56.00	46.00	-22.83	-
5	7.477	0.52	31.49	-	32.01	-	60.00	50.00	-27.99	-
6	15.965	0.76	28.77	-	29.53	-	60.00	50.00	-30.47	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

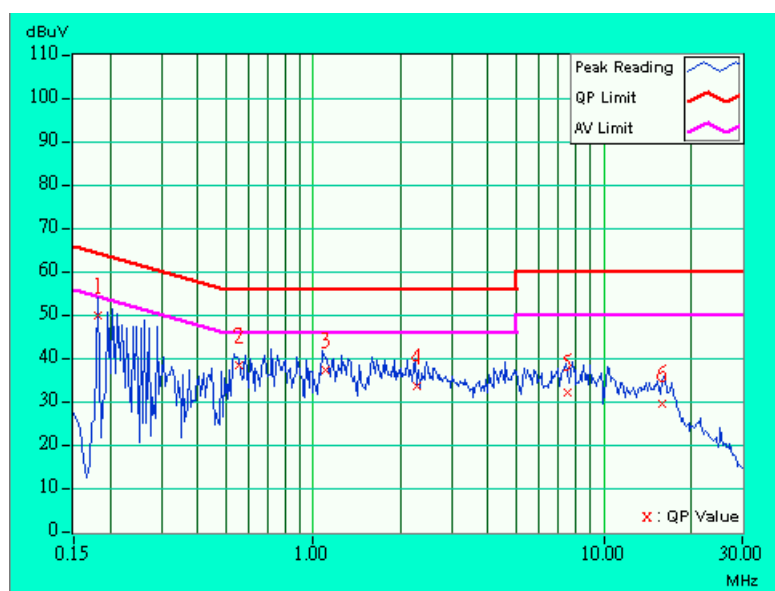


EUT	Mini PCI Combo Card	MODEL	WLL030M
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 1005 hPa	TESTED BY: Bunny Yao	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.10	46.94	-	47.04	-	64.25	54.25	-17.21	-
2	0.552	0.13	36.77	-	36.90	-	56.00	46.00	-19.10	-
3	2.441	0.22	32.91	-	33.13	-	56.00	46.00	-22.87	-
4	7.539	0.36	29.19	-	29.55	-	60.00	50.00	-30.45	-
5	15.996	0.56	31.10	-	31.66	-	60.00	50.00	-28.34	-
6	23.805	0.72	25.95	-	26.67	-	60.00	50.00	-33.33	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

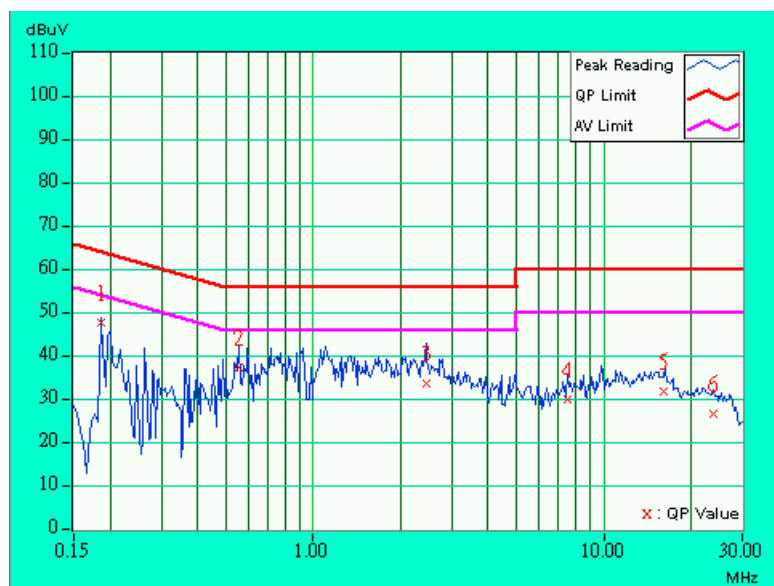


4.1.7 TEST RESULTS (B)

EUT	Mini PCI Combo Card	MODEL	WLL030
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 1005 hPa	TESTED BY: Bunny Yao	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.10	48.04	-	48.14	-	63.58	53.58	-15.44	-
2	0.685	0.15	36.45	-	36.60	-	56.00	46.00	-19.40	-
3	1.727	0.20	34.37	-	34.57	-	56.00	46.00	-21.43	-
4	5.402	0.45	30.97	-	31.42	-	60.00	50.00	-28.58	-
5	10.816	0.62	27.56	-	28.18	-	60.00	50.00	-31.82	-
6	19.980	1.00	19.72	-	20.72	-	60.00	50.00	-39.28	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

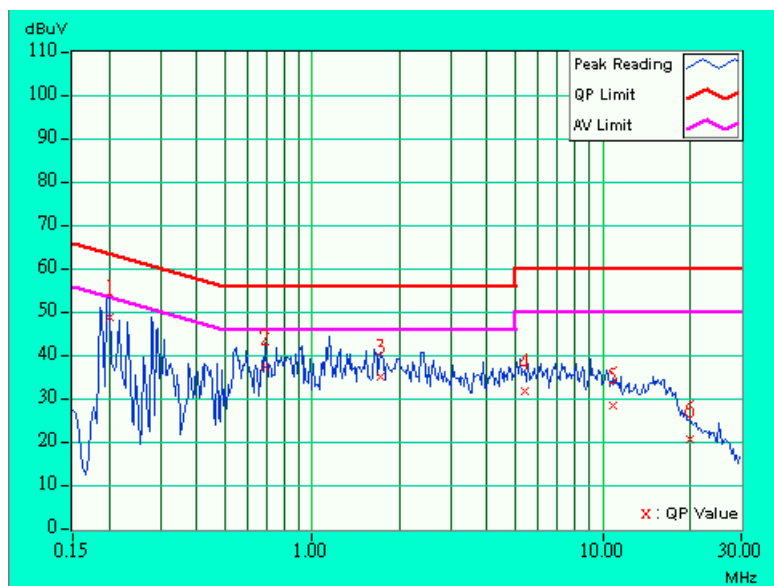


EUT	Mini PCI Combo Card	MODEL	WLL030
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 1005 hPa	TESTED BY: Bunny Yao	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.10	46.80	-	46.90	-	64.25	54.25	-17.35	-
2	0.330	0.10	30.27	-	30.37	-	59.46	49.46	-29.09	-
3	0.591	0.13	33.31	-	33.44	-	56.00	46.00	-22.56	-
4	1.859	0.20	34.25	-	34.45	-	56.00	46.00	-21.55	-
5	6.398	0.34	24.07	-	24.41	-	60.00	50.00	-35.59	-
6	22.699	0.75	26.94	-	27.69	-	60.00	50.00	-32.31	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

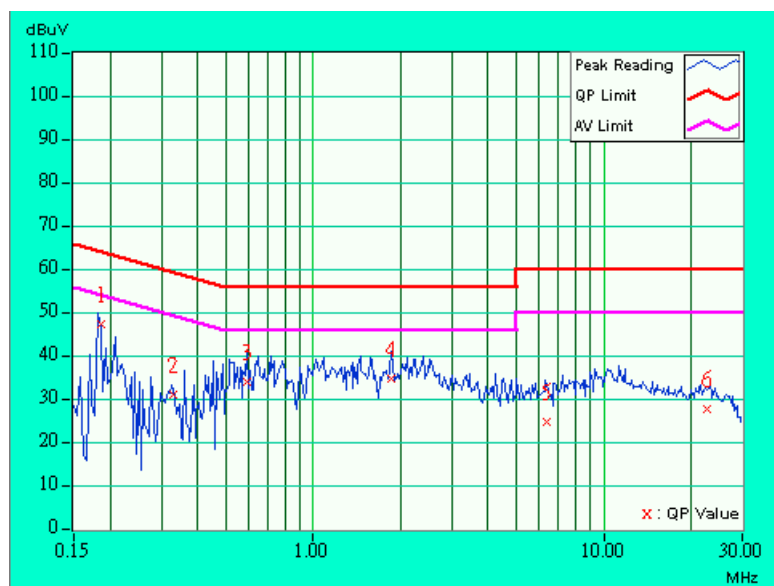


EUT	Mini PCI Combo Card	MODEL	WLL030
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 1005 hPa	TESTED BY: Bunny Yao	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.209	0.10	47.73	-	47.83	-	63.26	53.26	-15.43	-
2	0.584	0.13	36.59	-	36.72	-	56.00	46.00	-19.28	-
3	1.141	0.20	37.09	-	37.29	-	56.00	46.00	-18.71	-
4	2.512	0.25	34.53	-	34.78	-	56.00	46.00	-21.22	-
5	7.512	0.52	31.27	-	31.79	-	60.00	50.00	-28.21	-
6	16.063	0.76	28.94	-	29.70	-	60.00	50.00	-30.30	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

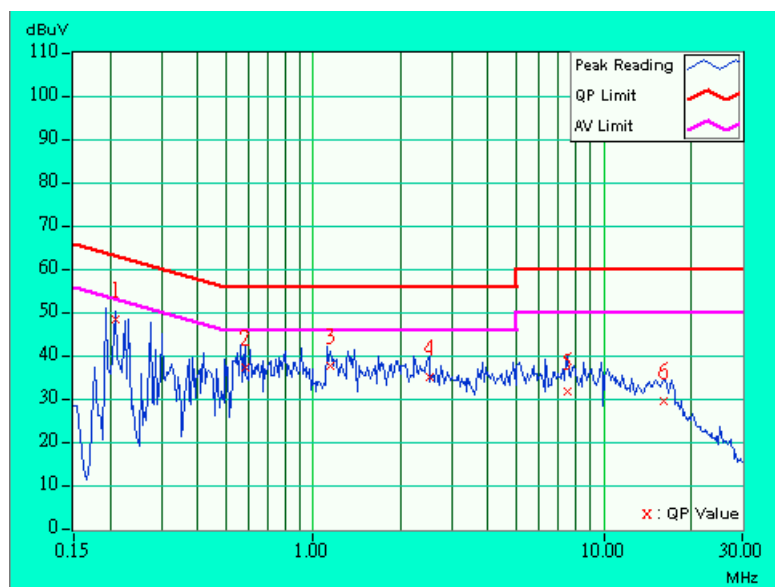


EUT	Mini PCI Combo Card	MODEL	WLL030
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 1005 hPa	TESTED BY: Bunny Yao	

No	Freq.	Corr. Factor	Reading Value [dB (Uv)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.10	44.49	-	44.59	-	63.91	53.91	-19.32	-
2	0.611	0.14	38.07	-	38.21	-	56.00	46.00	-17.79	-
3	3.449	0.27	28.52	-	28.79	-	56.00	46.00	-27.21	-
4	4.789	0.31	26.83	-	27.14	-	56.00	46.00	-28.86	-
5	10.414	0.41	31.52	-	31.93	-	60.00	50.00	-28.07	-
6	18.559	0.71	27.68	-	28.39	-	60.00	50.00	-31.61	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

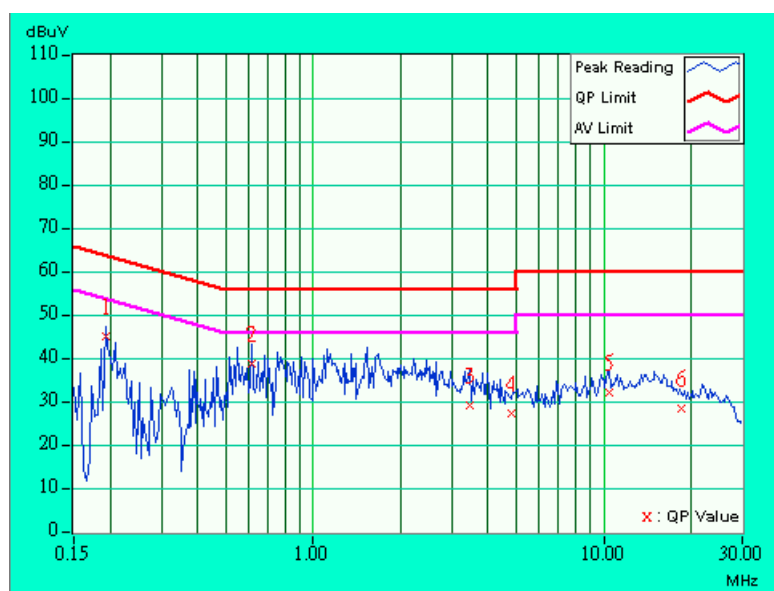


EUT	Mini PCI Combo Card	MODEL	WLL030
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 1005 hPa	TESTED BY: Bunny Yao	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.216	0.10	48.28	-	48.38	-	62.96	52.96	-14.58	-
2	0.560	0.13	39.13	-	39.26	-	56.00	46.00	-16.74	-
3	1.586	0.20	33.73	-	33.93	-	56.00	46.00	-22.07	-
4	4.297	0.41	31.01	-	31.42	-	56.00	46.00	-24.58	-
5	8.301	0.54	26.95	-	27.49	-	60.00	50.00	-32.51	-
6	15.637	0.74	28.65	-	29.39	-	60.00	50.00	-30.61	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

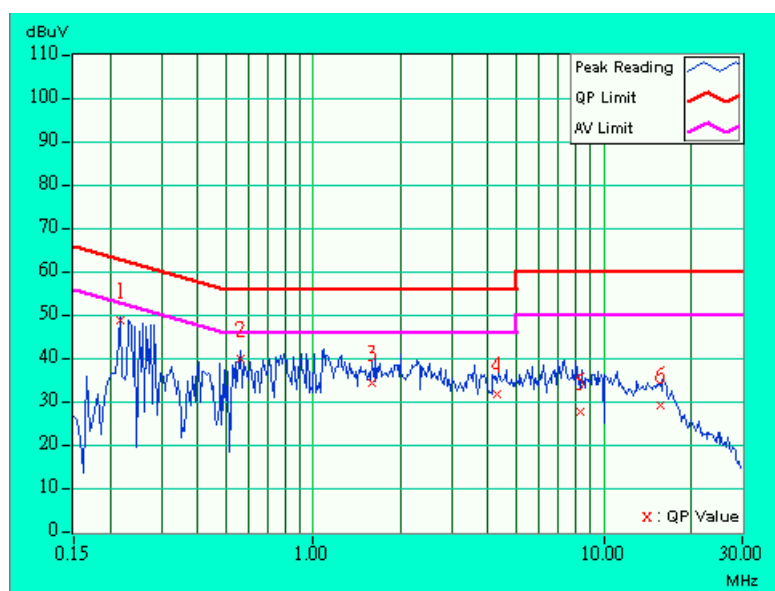


EUT	Mini PCI Combo Card	MODEL	WLL030
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	30 deg. C, 60%RH, 1005 hPa	TESTED BY: Bunny Yao	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.197	0.10	43.11	-	43.21	-	63.74	53.74	-20.53	-
2	0.525	0.12	34.70	-	34.82	-	56.00	46.00	-21.18	-
3	0.740	0.16	36.34	-	36.50	-	56.00	46.00	-19.50	-
4	4.973	0.32	27.67	-	27.99	-	56.00	46.00	-28.01	-
5	17.266	0.64	29.31	-	29.95	-	60.00	50.00	-30.05	-
6	28.125	0.76	23.65	-	24.41	-	60.00	50.00	-35.59	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

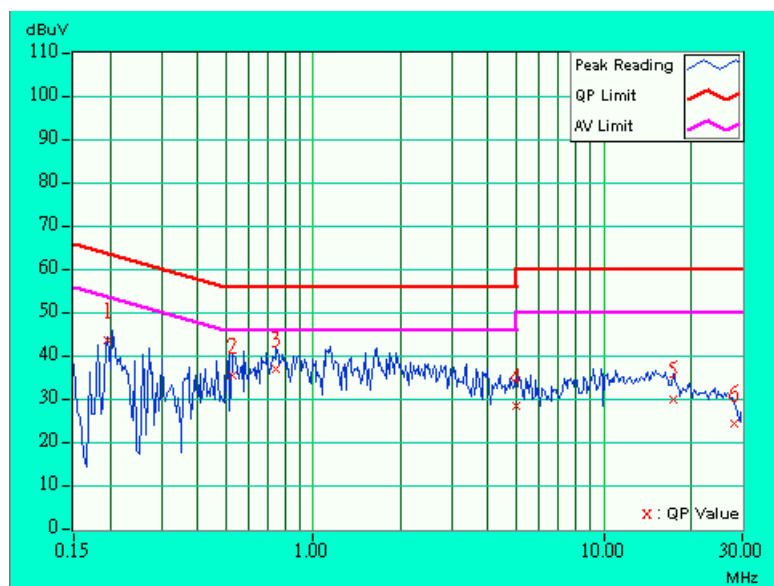

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	uV/m	dBuV/m
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	May 13, 2003
* HP Preamplifier	8447D	2944A08485	Oct. 30, 2002
* HP Preamplifier	8449B	3008A01201	Dec. 06, 2002
* HP Preamplifier	8449B	3008A01292	Aug. 21, 2002
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 27, 2003
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2002
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 2, 2002
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 3, 2003
* EMCO Horn Antenna	3115	9312-4192	April 9, 2003
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	AS61D4	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Aug. 2, 2002
* TIMES RF cable	LMR-600	CABLE-ST5-01	Aug. 2, 2002
Open Field Test Site	Site 5	ADT-R05	July 28, 2002
VCCI Site Registration No.	Site 5	R-1039	NA

NOTE: 1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

3. "*" = These equipment are used for the final measurement.

4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.




4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

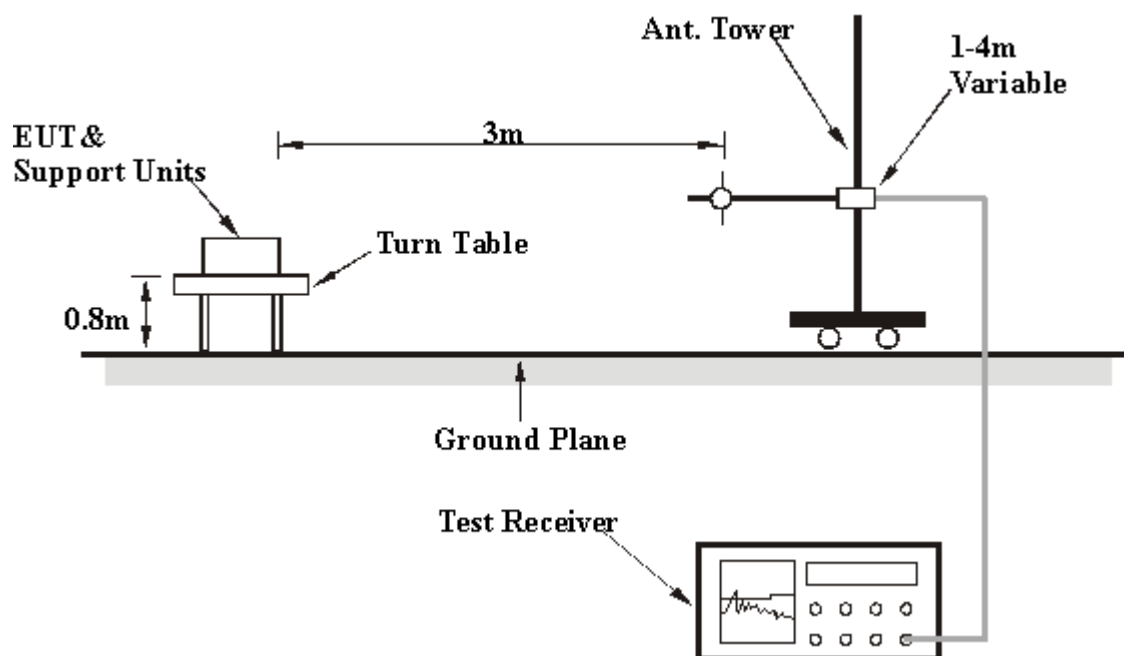

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.

4.2.6 TEST RESULTS (A)

EUT	Mini PCI Combo Card	MODEL	WLL030M
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	30 deg. C, 70%RH, 1050 hPa	TESTED BY: Bunny Yao	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	176.00	36.4 QP	43.50	-7.10	1.47H	34	25.95	9.08	1.37	0.00	-10.45
2	200.00	38.9 QP	43.50	-4.60	1.74H	6	28.52	8.98	1.40	0.00	-10.39
3	220.00	39.8 QP	46.00	-6.20	1.12H	152	28.16	10.12	1.53	0.00	-11.64
4	233.00	40.0 QP	46.00	-6.00	1.19H	315	27.40	10.98	1.62	0.00	-12.60
5	264.00	41.5 QP	46.00	-4.50	1.00H	105	26.88	12.89	1.73	0.00	-14.62
6	308.00	33.9 QP	46.00	-12.10	1.11H	328	18.64	13.38	1.92	0.00	-15.30
7	352.00	39.4 QP	46.00	-6.60	1.11H	279	22.97	14.31	2.12	0.00	-16.43
8	396.00	32.6 QP	46.00	-13.40	1.01H	40	14.48	15.96	2.17	0.00	-18.12
9	400.00	32.0 QP	46.00	-14.00	1.87H	193	13.72	16.11	2.17	0.00	-18.28
10	440.00	30.5 QP	46.00	-15.50	1.00H	228	11.88	16.32	2.31	0.00	-18.62
11	528.00	28.0 QP	46.00	-18.00	1.87H	3	7.76	17.62	2.62	0.00	-20.24
12	767.00	28.9 QP	46.00	-17.10	1.06H	348	5.19	20.36	3.35	0.00	-23.71
13	865.70	33.7 QP	46.00	-12.30	1.01H	335	9.49	20.59	3.63	0.00	-24.21

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	176.00	37.8 QP	43.50	-5.70	1.43V	150	27.35	9.08	1.37	0.00	-10.45
2	220.00	30.8 QP	46.00	-15.20	1.24V	15	19.16	10.12	1.53	0.00	-11.64
3	233.00	40.5 QP	46.00	-5.50	1.26V	329	27.90	10.98	1.62	0.00	-12.60
4	264.00	36.6 QP	46.00	-9.40	1.40V	147	21.98	12.89	1.73	0.00	-14.62
5	352.00	34.6 QP	46.00	-11.40	1.84V	5	18.17	14.31	2.12	0.00	-16.43
6	396.00	30.7 QP	46.00	-15.30	1.37V	83	12.58	15.96	2.17	0.00	-18.12
7	433.00	33.8 QP	46.00	-12.20	1.15V	333	15.24	16.28	2.28	0.00	-18.56
8	440.00	29.6 QP	46.00	-16.40	1.22V	231	10.94	16.32	2.31	0.00	-18.62
9	528.00	27.1 QP	46.00	-18.90	1.50V	342	6.86	17.62	2.62	0.00	-20.24
10	765.00	33.4 QP	46.00	-12.60	1.49V	166	9.72	20.33	3.35	0.00	-23.68
11	832.00	29.5 QP	46.00	-16.50	1.42V	291	5.42	20.55	3.53	0.00	-24.08
12	865.00	29.5 QP	46.00	-16.50	1.41V	18	5.30	20.57	3.62	0.00	-24.21

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.

EUT	Mini PCI Combo Card	MODEL	WLL030M
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30 deg. C, 70%RH, 1050 hPa	TESTED BY: Bunny Yao	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2038.00	46.9 AV	54.00	-7.10	1.16H	355	51.72	25.20	4.86	34.90	4.84
2	2038.00	48.0 PK	74.00	-26.00	1.16H	355	52.83	25.20	4.86	34.90	4.84
3	*2412.00	97.7 AV			1.66H	24	65.51	27.11	5.10	0.00	-32.22
4	*2412.00	104.5 PK			1.66H	24	72.30	27.11	5.10	0.00	-32.22
5	4076.00	37.0 AV	54.00	-17.00	1.01H	3	34.57	30.13	6.78	34.52	-2.39
6	4076.00	46.6 PK	74.00	-27.40	1.01H	3	44.20	30.13	6.78	34.52	-2.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (DbuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2038.00	51.0 AV	54.00	-3.00	1.08V	336	55.80	25.20	4.86	34.90	4.84
2	2038.00	52.3 PK	74.00	-21.70	1.08V	336	57.10	25.20	4.86	34.90	4.84
3	*2412.00	98.3 AV			1.12V	57	66.10	27.11	5.10	0.00	-32.22
4	*2412.00	104.2 PK			1.12V	57	72.00	27.11	5.10	0.00	-32.22
5	4076.00	43.5 AV	54.00	-10.50	1.10V	354	41.10	30.13	6.78	34.52	-2.39
6	4076.00	49.3 PK	74.00	-24.70	1.10V	354	46.90	30.13	6.78	34.52	-2.40

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " * " : Fundamental frequency
5. The other emission levels were very low against the limit.

EUT	Mini PCI Combo Card	MODEL	WLL030M
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30 deg. C, 70%RH, 1050 hPa	TESTED BY: Bunny Yao	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2063.00	51.3 AV	54.00	-2.70	1.27H	6	55.86	25.41	4.96	34.90	4.53
2	2063.00	52.5 PK	74.00	-21.50	1.27H	6	57.00	25.41	4.96	34.90	4.53
3	*2437.00	97.9 AV			1.86H	340	65.50	27.33	5.08	0.00	-32.40
4	*2437.00	102.9 PK			1.86H	340	70.50	27.33	5.08	0.00	-32.40
5	4126.00	38.4 AV	54.00	-15.60	1.01H	351	35.90	30.32	6.70	34.56	-2.46
6	4126.00	48.2 PK	74.00	-25.80	1.01H	351	45.70	30.32	6.70	34.56	-2.47

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2063.00	49.9 AV	54.00	-4.10	1.12V	295	54.40	25.41	4.96	34.90	4.53
2	2063.00	51.5 PK	74.00	-22.50	1.12V	295	56.00	25.41	4.96	34.90	4.53
3	*2437.00	98.4 AV			1.16V	328	65.96	27.33	5.08	0.00	-32.40
4	*2437.00	104.6 PK			1.16V	328	72.20	27.33	5.08	0.00	-32.40
5	4126.00	40.3 AV	54.00	-13.70	1.45V	267	37.80	30.32	6.70	34.56	-2.46
6	4126.00	47.0 PK	74.00	-27.00	1.45V	267	44.50	30.32	6.70	34.56	-2.47

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " * " : Fundamental frequency
5. The other emission levels were very low against the limit.

EUT	Mini PCI Combo Card	MODEL	WLL030M
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30 deg. C, 70%RH, 1050 hPa	TESTED BY: Bunny Yao	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2088.00	47.9 AV	54.00	-6.10	1.21H	7	52.20	25.62	5.02	34.90	4.26
2	2088.00	49.7 PK	74.00	-24.30	1.21H	7	54.00	25.62	5.02	34.90	4.26
3	*2462.00	95.4 AV			1.46H	346	63.00	27.33	5.08	0.00	-32.40
4	*2462.00	100.6 PK			1.46H	346	68.20	27.33	5.08	0.00	-32.40
5	4176.00	37.9 AV	54.00	-16.10	1.09H	35	35.40	30.41	6.68	34.58	-2.51
6	4176.00	48.8 PK	74.00	-25.20	1.09H	35	46.30	30.41	6.68	34.58	-2.51

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (DbuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2088.00	51.0 PK	74.00	-23.00	1.16V	280	55.30	25.62	5.02	34.90	4.26
2	2088.00	49.9 AV	54.00	-4.10	1.16V	280	54.20	25.62	5.02	34.90	4.26
3	*2462.00	96.7 AV			1.16V	334	64.30	27.33	5.08	0.00	-32.41
4	*2462.00	102.8 PK			1.16V	334	70.40	27.33	5.08	0.00	-32.41
5	4176.00	38.5 AV	54.00	-15.50	1.40V	355	36.00	30.41	6.68	34.58	-2.51
6	4176.00	49.3 PK	74.00	-24.70	1.40V	355	46.80	30.41	6.68	34.58	-2.51

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " * " : Fundamental frequency
5. The other emission levels were very low against the limit.

4.2.7 TEST RESULTS (B)

EUT	Mini PCI Combo Card	MODEL	WLL030
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	30 deg. C, 70%RH, 1050 hPa	TESTED BY: Bunny Yao	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	176.00	34.5 QP	43.50	-9.00	1.02H	288	24.05	9.08	1.37	0.00	-10.45
2	220.00	30.6 QP	46.00	-15.40	1.57H	60	18.96	10.12	1.53	0.00	-11.64
3	233.00	44.0 QP	46.00	-2.00	1.12H	8	31.40	10.98	1.62	0.00	-12.61
4	264.00	40.2 QP	46.00	-5.80	1.54H	67	25.58	12.89	1.73	0.00	-14.62
5	308.00	35.2 QP	46.00	-10.80	1.23H	102	19.90	13.38	1.92	0.00	-15.30
6	352.00	43.1 QP	46.00	-2.90	1.09H	32	26.67	14.31	2.12	0.00	-16.43
7	396.00	30.2 QP	46.00	-15.80	1.00H	113	12.08	15.96	2.17	0.00	-18.12
8	440.00	30.2 QP	46.00	-15.80	1.10H	37	11.58	16.32	2.31	0.00	-18.62
9	528.00	28.2 QP	46.00	-17.80	1.51H	54	7.96	17.62	2.62	0.00	-20.24
10	633.00	25.3 QP	46.00	-20.70	1.35H	110	3.30	19.03	2.97	0.00	-22.00
11	732.00	26.4 QP	46.00	-19.60	1.12H	3	3.25	19.85	3.30	0.00	-23.15
12	865.00	28.9 QP	46.00	-17.10	1.25H	301	4.70	20.57	3.62	0.00	-24.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	176.00	38.4 QP	43.50	-5.10	1.12V	128	27.95	9.08	1.37	0.00	-10.45
2	233.00	43.0 QP	46.00	-3.00	1.07V	175	30.40	10.98	1.62	0.00	-12.60
3	264.00	36.9 QP	46.00	-9.10	1.56V	108	22.28	12.89	1.73	0.00	-14.62
4	308.00	32.0 QP	46.00	-14.00	1.84V	3	16.70	13.38	1.92	0.00	-15.30
5	352.00	34.6 QP	46.00	-11.40	1.19V	118	18.17	14.31	2.12	0.00	-16.43
6	352.00	28.5 QP	46.00	-17.50	1.32V	193	12.07	14.31	2.12	0.00	-16.43
7	396.00	26.8 QP	46.00	-19.20	1.13V	289	8.68	15.96	2.17	0.00	-18.12
8	400.00	34.6 QP	46.00	-11.40	1.26V	134	16.32	16.11	2.17	0.00	-18.28
9	433.00	29.7 QP	46.00	-16.30	1.60V	98	11.14	16.28	2.28	0.00	-18.57
10	440.00	28.6 QP	46.00	-17.40	1.59V	312	9.98	16.32	2.31	0.00	-18.63
11	633.00	24.8 QP	46.00	-21.20	1.06V	33	2.80	19.03	2.97	0.00	-22.00
12	732.00	33.3 QP	46.00	-12.70	1.22V	339	10.15	19.85	3.30	0.00	-23.15
13	865.00	27.5 QP	46.00	-18.50	1.12V	114	3.30	20.57	3.62	0.00	-24.20

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.

EUT	Mini PCI Combo Card	MODEL	WLL030
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30 deg. C, 70%RH, 1050 hPa	TESTED BY: Bunny Yao	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2038.00	50.3 AV	54.00	-3.70	1.17H	268	55.10	25.20	4.86	34.90	4.84
2	2038.00	51.4 PK	74.00	-22.60	1.17H	268	56.20	25.20	4.86	34.90	4.84
3	*2412.00	98.2 AV			1.26H	335	65.95	27.11	5.10	0.00	-32.21
4	*2412.00	104.3 PK			1.26H	335	72.10	27.11	5.10	0.00	-32.21
5	4076.00	39.1 AV	54.00	-14.90	1.31H	350	36.70	30.13	6.78	34.52	-2.39
6	4076.00	46.7 PK	74.00	-27.30	1.31H	350	44.30	30.13	6.78	34.52	-2.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (DbuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2038.00	47.1 AV	54.00	-6.90	1.01V	6	51.90	25.20	4.86	34.90	4.84
2	2038.00	48.6 PK	74.00	-25.40	1.01V	6	53.40	25.20	4.86	34.90	4.84
3	*2412.00	98.7 AV			1.21V	341	66.50	27.11	5.10	0.00	-32.21
4	*2412.00	105.1 PK			1.21V	341	72.90	27.11	5.10	0.00	-32.21
5	4076.00	40.2 AV	54.00	-13.80	1.03V	18	37.80	30.13	6.78	34.52	-2.39
6	4076.00	47.7 PK	74.00	-26.30	1.03V	18	45.30	30.13	6.78	34.52	-2.40

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " * " : Fundamental frequency
5. The other emission levels were very low against the limit.

EUT	Mini PCI Combo Card	MODEL	WLL030M
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30 deg. C, 70%RH, 1050 hPa	TESTED BY: Bunny Yao	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2063.00	50.0 PK	74.00	-24.00	1.25H	334	54.55	25.41	4.96	34.90	4.53
2	2063.00	48.0 AV	54.00	-6.00	1.25H	334	52.50	25.41	4.96	34.90	4.53
3	*2437.00	97.4 AV			1.75H	66	65.00	27.33	5.08	0.00	-32.41
4	*2437.00	103.4 PK			1.75H	66	70.98	27.33	5.08	0.00	-32.41
5	4126.00	39.4 AV	54.00	-14.60	1.31H	296	36.90	30.32	6.70	34.56	-2.46
6	4126.00	48.5 PK	74.00	-25.50	1.31H	296	46.00	30.32	6.70	34.56	-2.47

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2063.00	47.2 AV	54.00	-6.80	1.48V	3	51.70	25.41	4.96	34.90	4.53
2	2063.00	49.4 PK	74.00	-24.60	1.48V	3	53.90	25.41	4.96	34.90	4.53
3	*2437.00	98.5 AV			1.40V	343	66.10	27.33	5.08	0.00	-32.40
4	*2437.00	103.4 PK			1.40V	343	71.00	27.33	5.08	0.00	-32.40
5	4126.00	39.2 AV	54.00	-14.80	1.00V	18	36.70	30.32	6.70	34.56	-2.46
6	4126.00	48.5 PK	74.00	-25.50	1.00V	18	46.00	30.32	6.70	34.56	-2.47

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " * " : Fundamental frequency
5. The other emission levels were very low against the limit.

EUT	Mini PCI Combo Card	MODEL	WLL030M
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30 deg. C, 70%RH, 1050 hPa	TESTED BY: Bunny Yao	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2088.00	48.0 AV	54.00	-6.00	1.10H	293	52.30	25.62	5.02	34.90	4.26
2	2088.00	50.6 PK	74.00	-23.40	1.10H	293	54.90	25.62	5.02	34.90	4.26
3	*2462.00	94.9 AV			1.75H	78	62.50	27.33	5.08	0.00	-32.40
4	*2462.00	101.9 PK			1.75H	78	69.50	27.33	5.08	0.00	-32.40
5	4176.00	37.0 AV	54.00	-17.00	1.17H	304	34.50	30.41	6.68	34.58	-2.51
6	4176.00	47.1 PK	74.00	-26.90	1.17H	304	44.60	30.41	6.68	34.58	-2.51

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (DbuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2088.00	47.7 AV	54.00	-6.30	1.05V	285	52.00	25.62	5.02	34.90	4.26
2	2088.00	49.6 PK	74.00	-24.40	1.05V	285	53.90	25.62	5.02	34.90	4.26
3	*2462.00	97.3 AV			1.51V	353	64.90	27.33	5.08	0.00	-32.41
4	*2462.00	102.9 PK			1.51V	353	70.53	27.33	5.08	0.00	-32.41
5	4176.00	38.2 AV	54.00	-15.80	1.13V	315	35.70	30.41	6.68	34.58	-2.51
6	4176.00	47.3 PK	74.00	-26.70	1.13V	315	44.80	30.41	6.68	34.58	-2.51

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " * " : Fundamental frequency
5. The other emission levels were very low against the limit.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.6 TEST RESULTS

EUT	Mini PCI Combo Card	MODEL	WLL030M
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23 deg. C, 54%RH, 1005 hPa
TESTED BY: Steven Lu			

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.142	0.5	PASS
6	2437	11.182	0.5	PASS
11	2462	11.142	0.5	PASS

Delta 1 [T1] -0.40 dB
 Ref Lvl 21 dBm
 Unit dBm
 RBW 100 kHz
 VBW 100 kHz
 SWT 100 ms
 Center 2.412 GHz
 Span 20 MHz
 1VIEW
 1MA
 F1
 F2

CH6

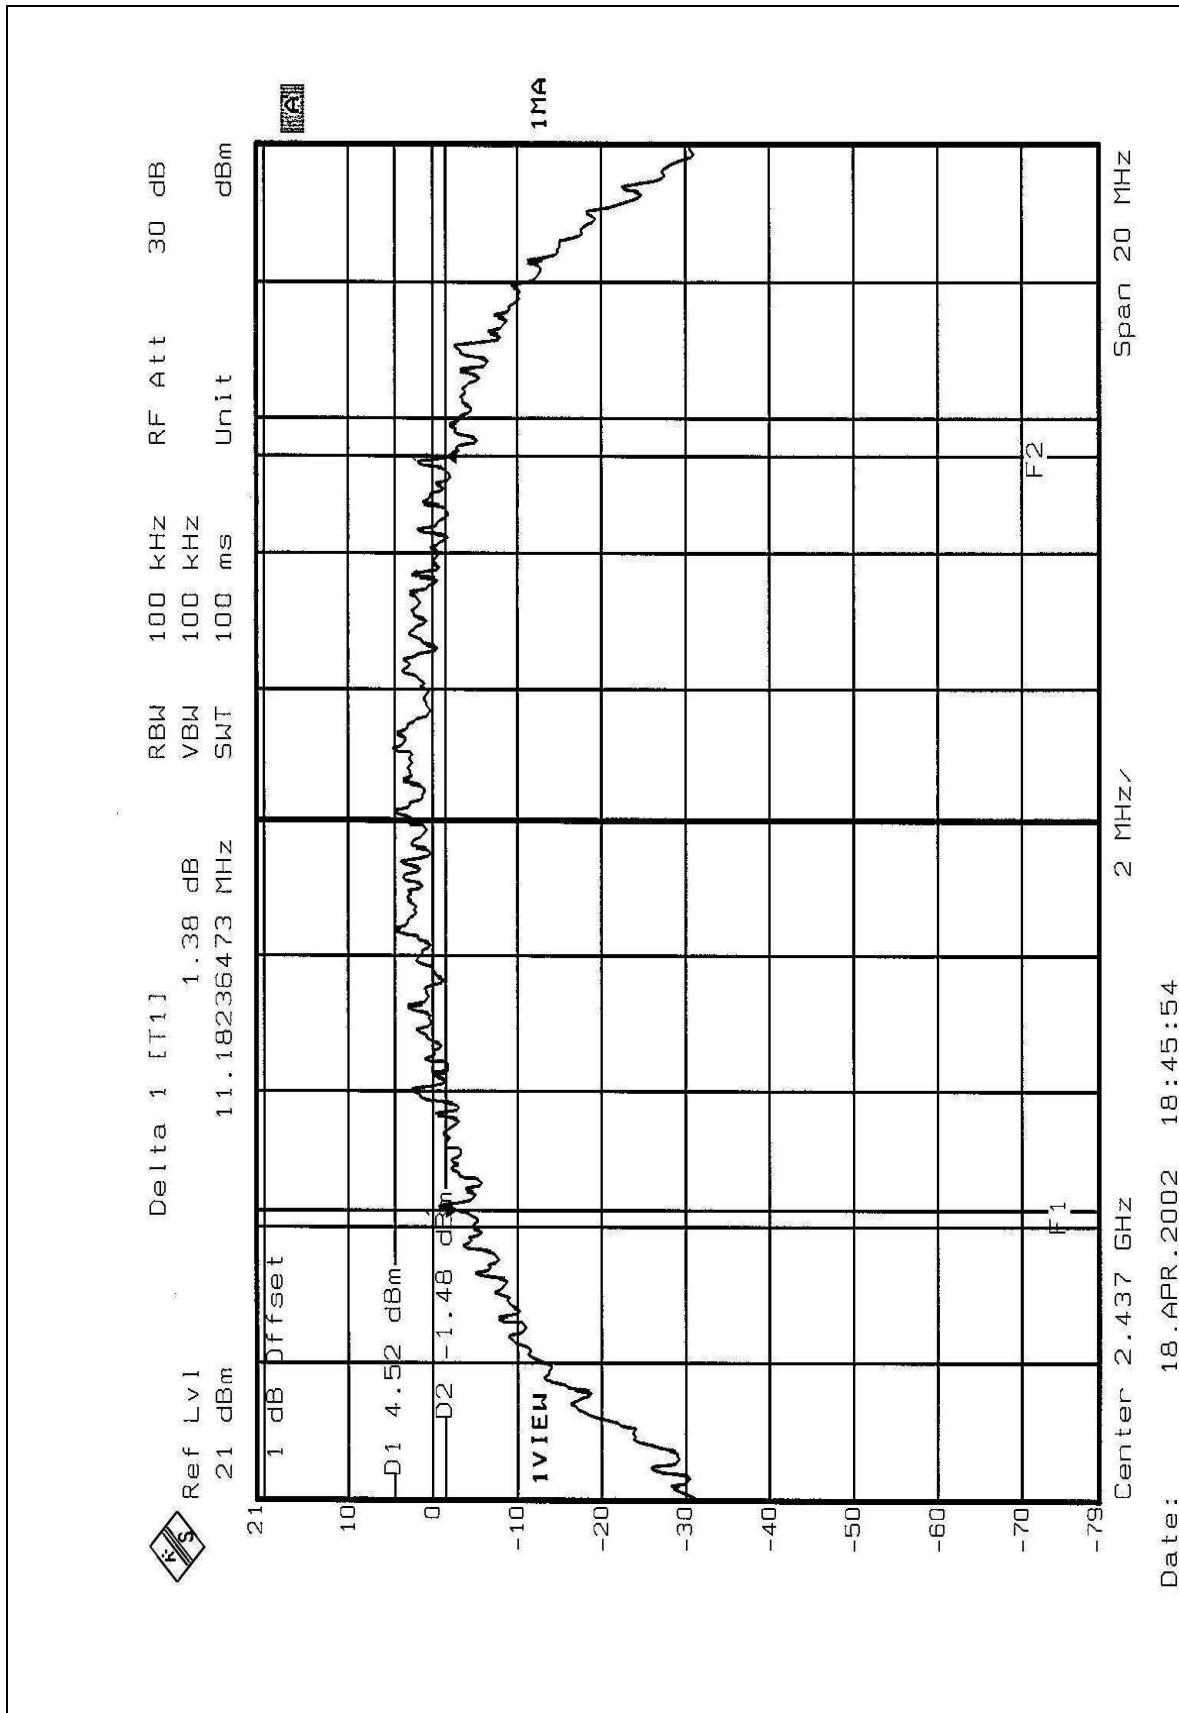

Delta 1 [F1] -0.39 dB
 11.14228457 MHz
 Ref Lvl 21 dBm
 1 dB Offset
 D1 4.81 dBm
 D2 -1.19 dBm
 1VIEW
 1MA
 RBW 100 kHz
 VBW 100 kHz
 SWT 100 ms
 Unit dBm
 RF Att 30 dB
 Span 20 MHz
 Center 2.462 GHz
 2 MHz
 F1
 F2

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
PEAK POWER SENSOR	NRV-Z32	100013	Feb. 21, 2003
POWER METER	NRVS	100026	Feb. 21, 2003

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

The transmitter output was connected to the peak power meter.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5

4.4.6 TEST RESULTS

EUT	Mini PCI Combo Card	MODEL	WLL030M
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23 deg. C, 54%RH, 1005 hPa
TESTED BY: Steven Lu			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	14.85	30	PASS
6	2437	14.82	30	PASS
11	2462	14.94	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002


NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITIONS


Same as 4.3.5

4.5.6 TEST RESULTS


EUT	Mini PCI Combo Card	MODEL	WLL030M
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23 deg. C, 54%RH, 1005 hPa
TESTED BY: Bunny Yao			

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-8.84	8	PASS
6	2437	-8.18	8	PASS
11	2462	-8.93	8	PASS


CH1

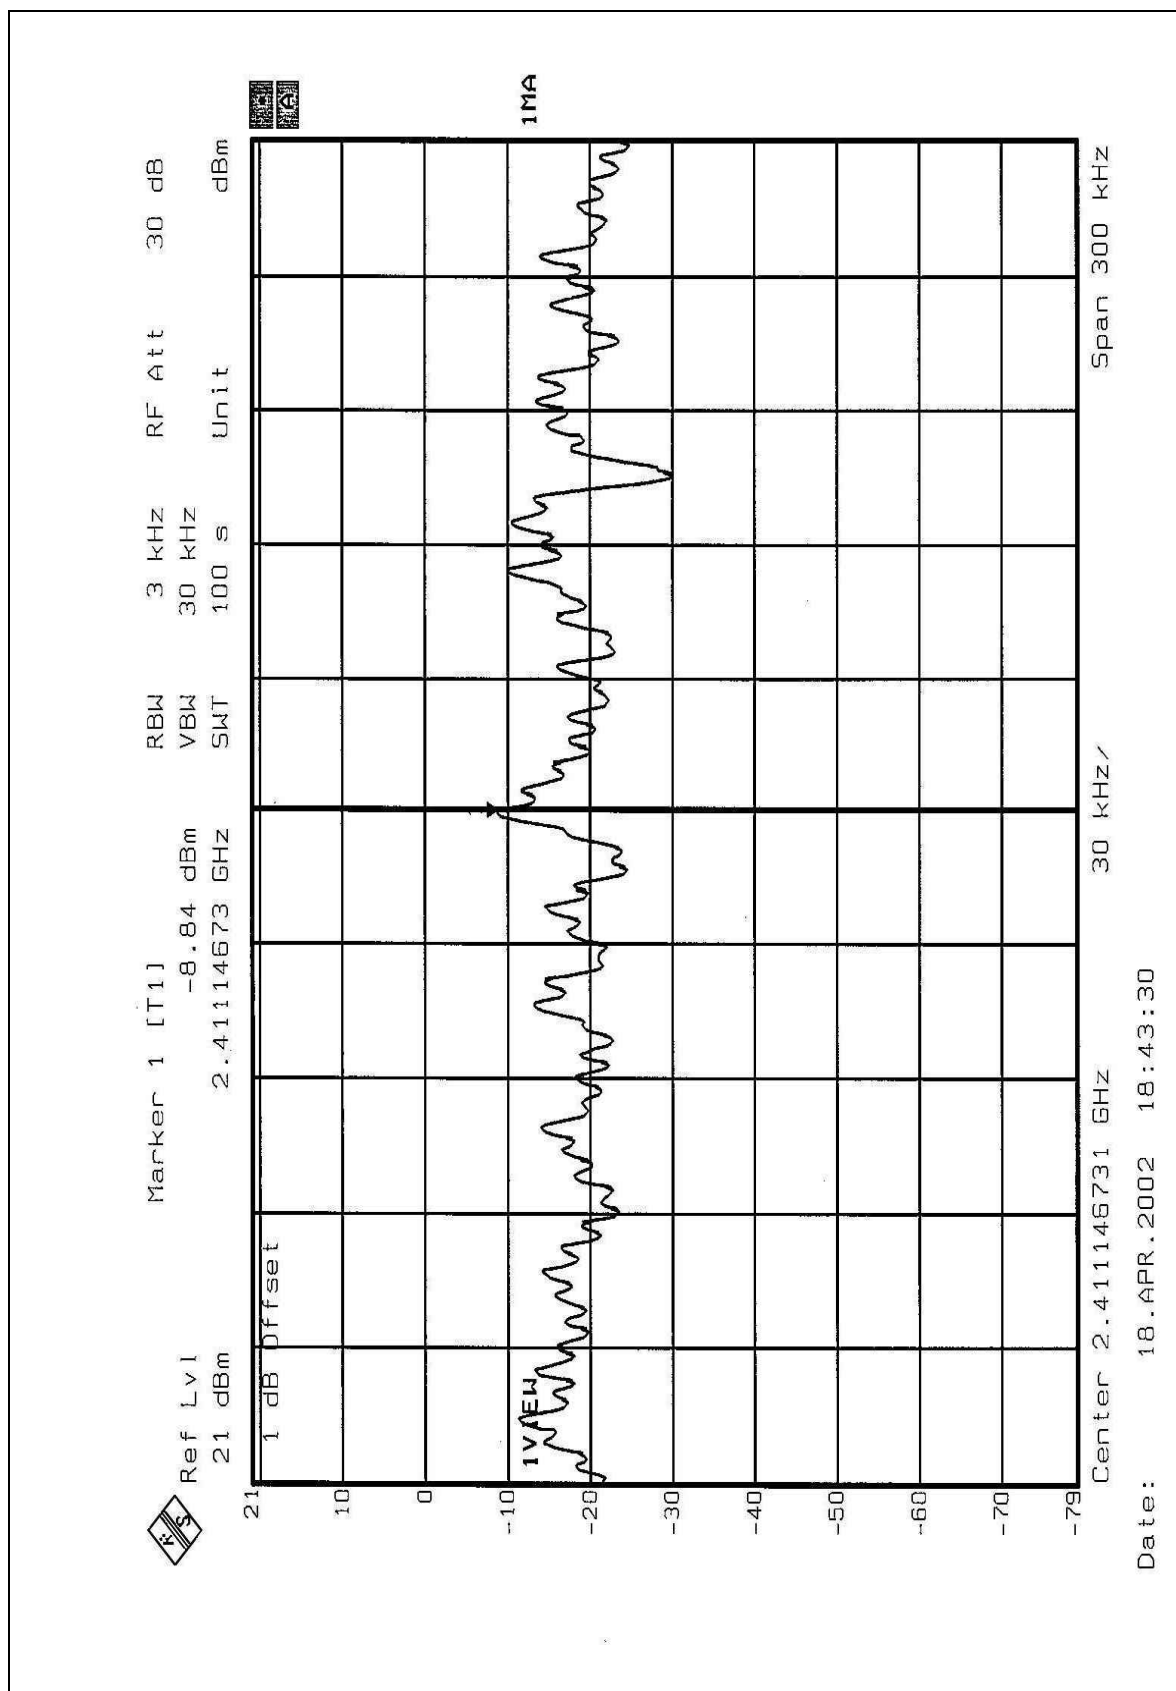

CH6

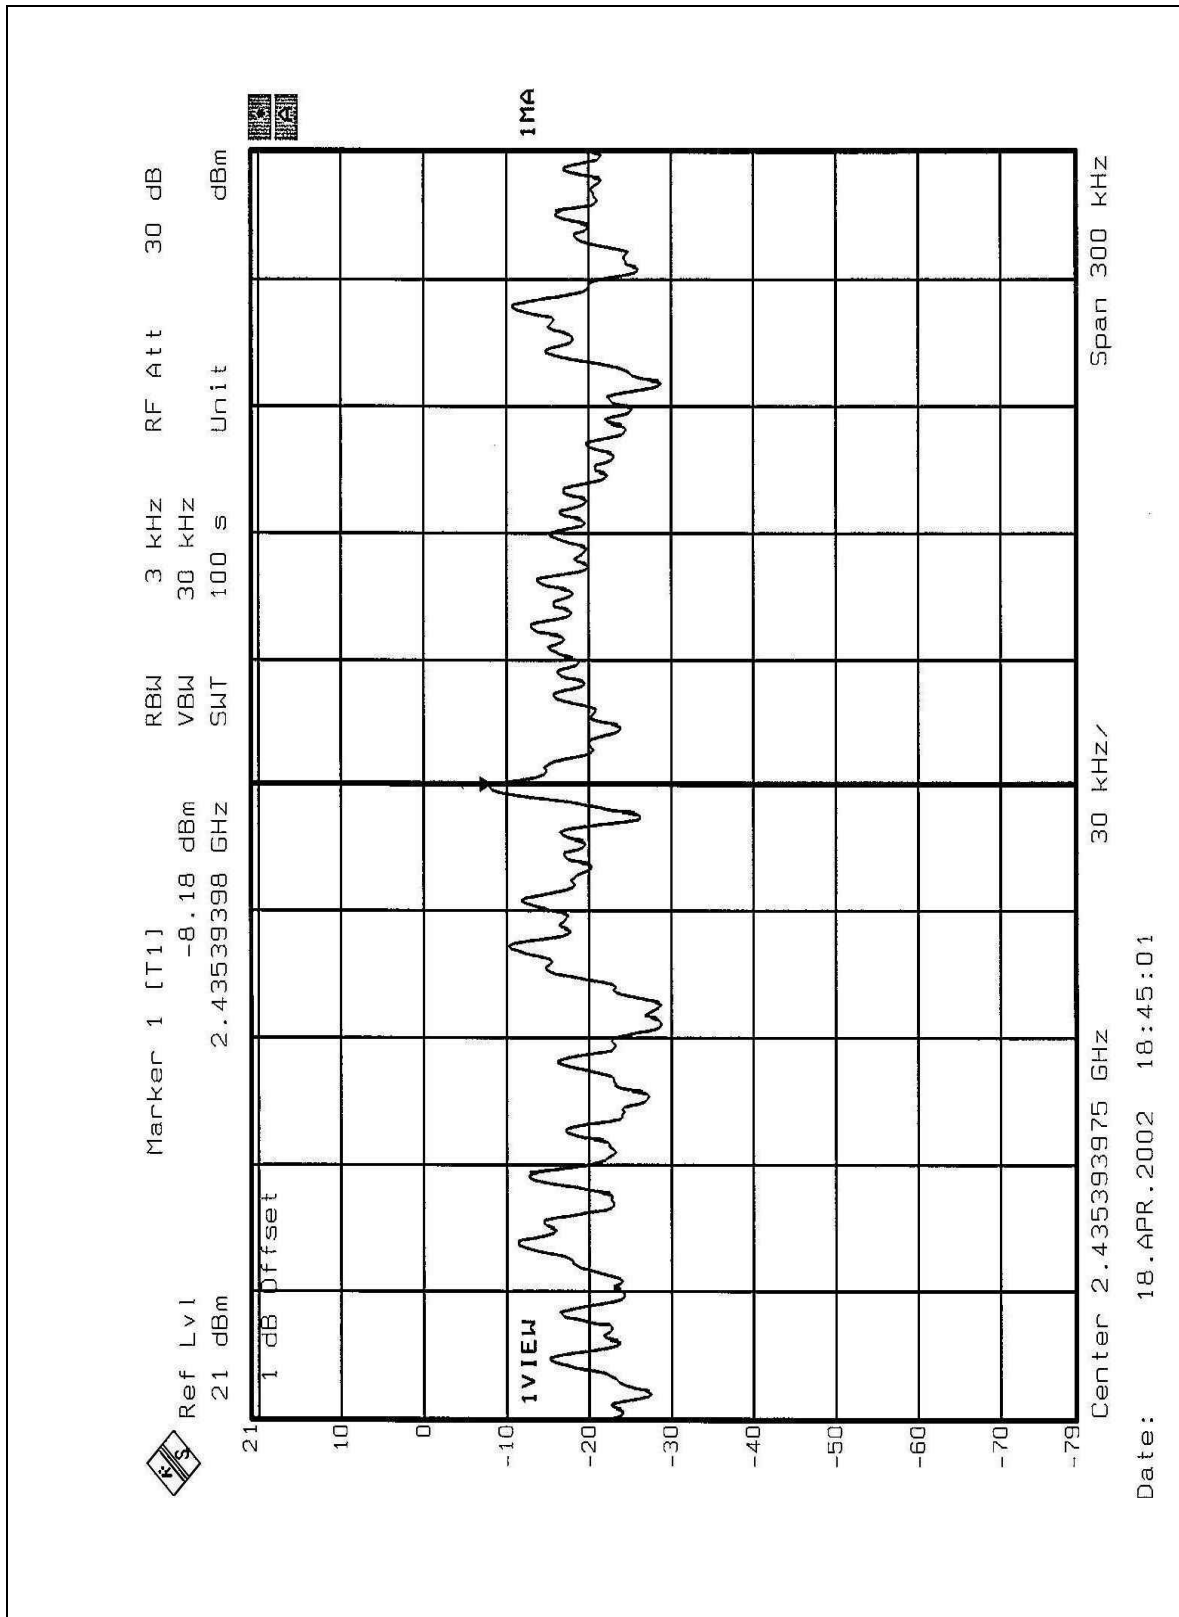

CH11

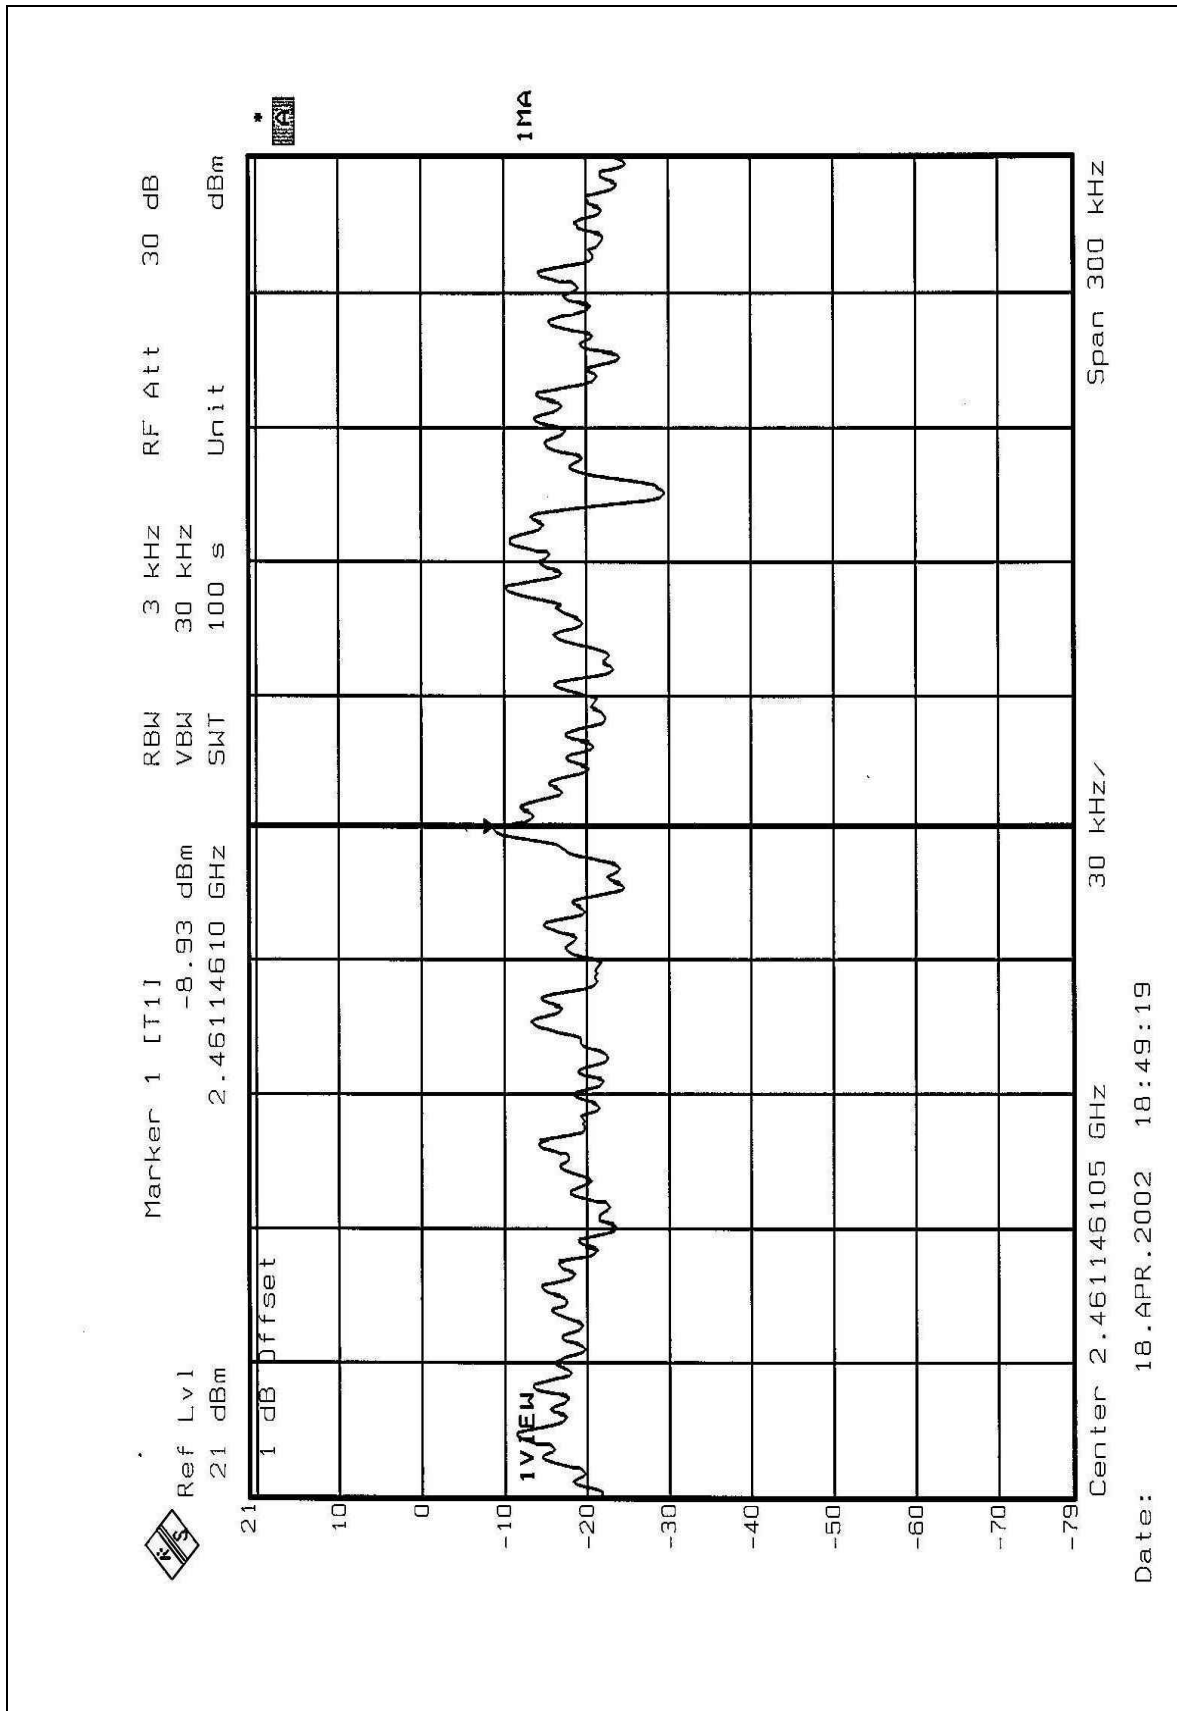

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.




4.6.4 EUT OPERATING CONDITION


Same as Item 4.3.5

4.6.5 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE: The band edge emission plot on the following 2 pages shows 48.58dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 (Page 35) is 97.3dBuV/m, so the maximum field strength in restrict band is $97.3 - 48.58 = 48.72$ dBuV/m which is under 54 dBuV/m limit.

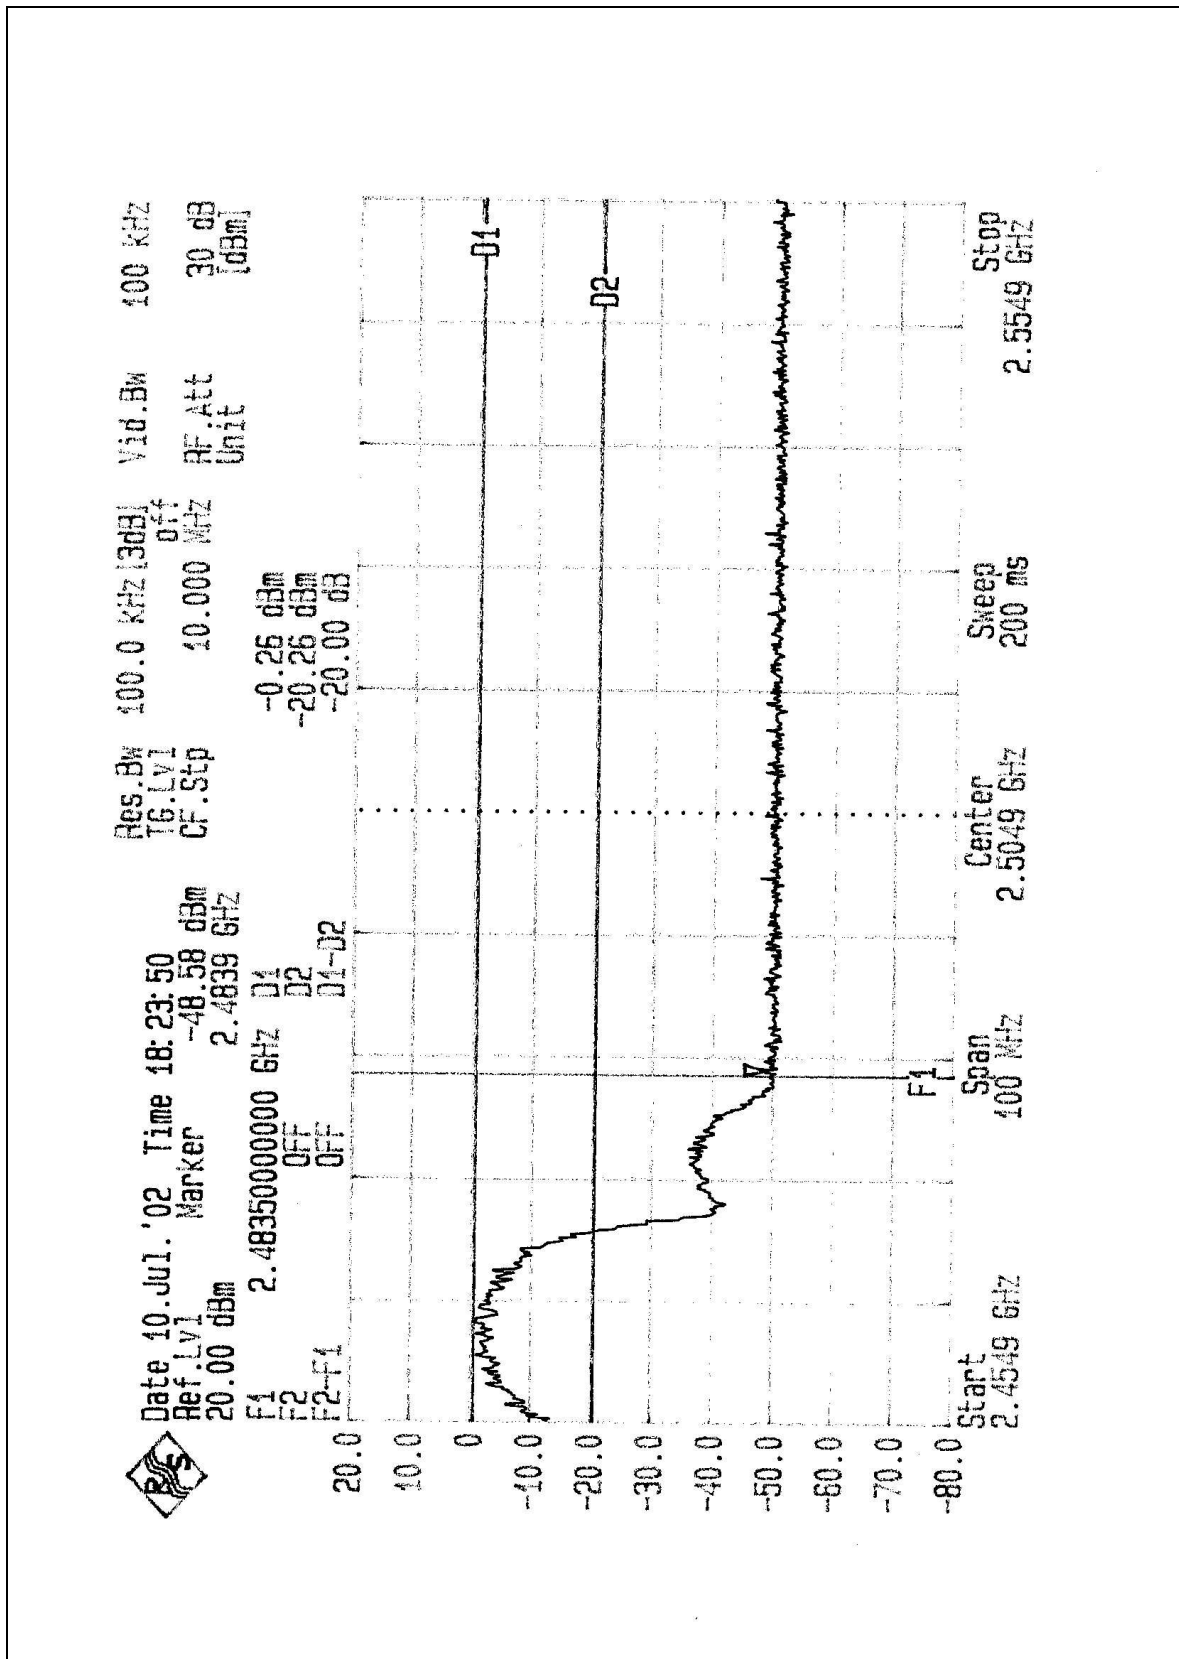

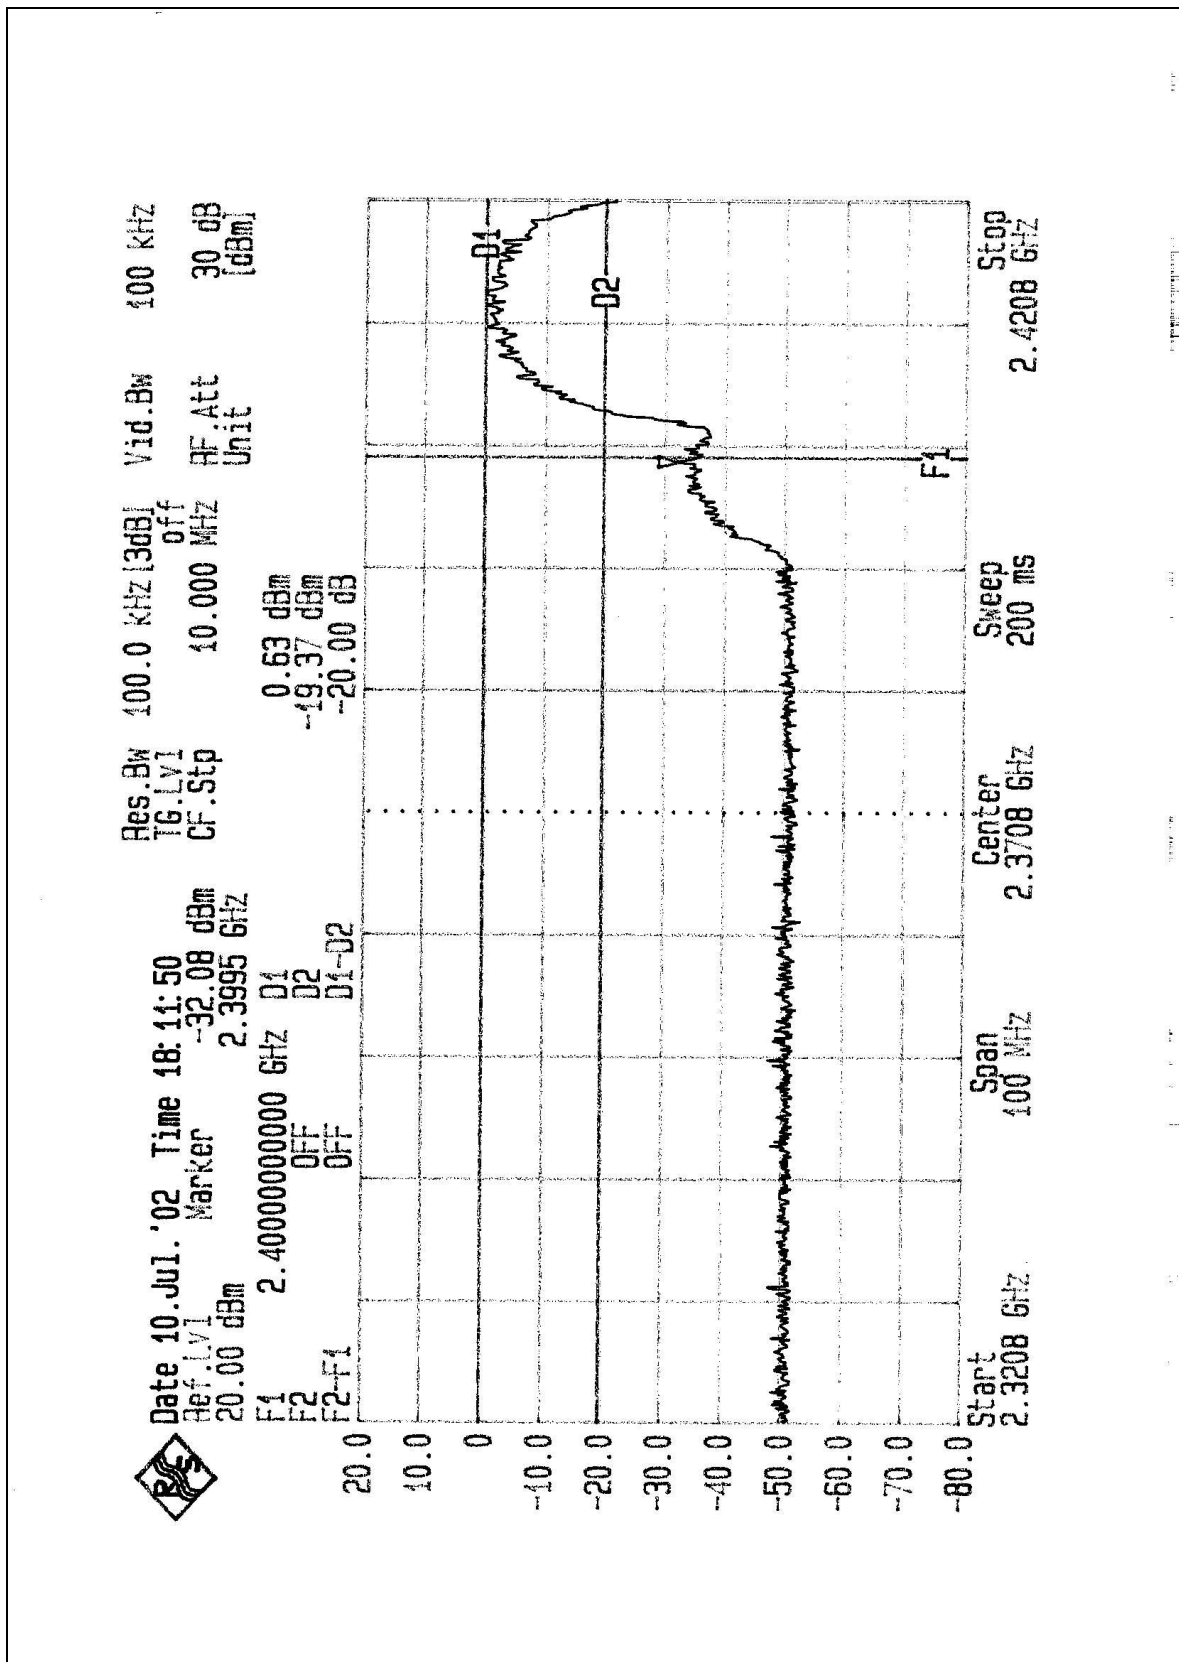



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The Antenna used in this EUT is Inverted F Antenna. The antenna connector type is UFL. And the maximum Gain of these antennas is only 3dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.