

# FCC PART 95



## EMI MEASUREMENT AND TEST REPORT

For

### Talent On Development Limited

Rm 11, 2/f, Block C, Hong Kong Industrial Centre, 489-491 Castle Peak Road,  
Lai Chi Kok, Kowloon, HK

**FCC ID: SXLI-FLEX8200**

<b>This Report Concerns:</b> <input checked="" type="checkbox"/> Original Report	<b>Equipment Type:</b> Walkie Talkie Watch
<b>Test Engineer:</b> Ming Jing / 	
<b>Report Number:</b> R0501141	
<b>Report Date:</b> 2005-02-17	
<b>Reviewed By:</b> Daniel Deng / 	
<b>Prepared By:</b> Bay Area Compliance Laboratory Corporation 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732 9164	

**Note:** The test report is specially limited to the use of the above client company and the product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. Government.

**TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
RELATED GRANT/SUBMISSION.....	4
TEST METHODOLOGY .....	4
TEST FACILITY .....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
JUSTIFICATION .....	6
EUT TEST CONFIGURATION .....	6
SPECIAL ACCESSORIES .....	6
SCHEMATICS / BLOCK DIAGRAM .....	6
EQUIPMENT MODIFICATIONS .....	6
CONFIGURATION OF TEST SYSTEM .....	6
TEST SETUP BLOCK DIAGRAM .....	7
<b>REQUIREMENTS OF PROVISIONS .....</b>	<b>8</b>
<b>§2.1046, §95.639(D), AND §95.639 (A)(1) - EFFECTIVE RADIATED POWER.....</b>	<b>9</b>
STANDARD APPLICABLE .....	9
TEST PROCEDURE .....	9
TEST EQUIPMENT .....	10
ENVIRONMENTAL CONDITIONS .....	10
TEST RESULTS .....	10
<b>§2.1046, §95.639(D), AND §95.639 (A)(1) – CONDUCTED OUTPUT POWER.....</b>	<b>11</b>
5.1 PROVISION APPLICABLE.....	11
5.2 TEST PROCEDURE .....	11
5.3 TEST EQUIPMENT .....	11
5.4 TEST RESULTS .....	11
<b>§2.1047, §95.631(D), §95.637(A), AND § 95.637(B) - MODULATION CHARACTERISTICS .....</b>	<b>13</b>
STANDARD APPLICABLE .....	13
TEST PROCEDURE .....	13
TEST EQUIPMENT .....	13
ENVIRONMENTAL CONDITIONS .....	14
TEST RESULTS .....	14
<b>§2.1049, §95.633(A), AND § 95.633(C) - OCCUPIED BANDWIDTH OF EMISSION.....</b>	<b>16</b>
STANDARD APPLICABLE .....	16
TEST PROCEDURE .....	16
TEST EQUIPMENT .....	16
ENVIRONMENTAL CONDITIONS .....	16
TEST RESULTS .....	16
<b>§2.1053, §95.635(B)(7) AND §15.109(A) - RADIATED EMISSION.....</b>	<b>19</b>
STANDARD APPLICABLE .....	19
TEST PROCEDURE .....	19
TEST EQUIPMENT .....	19
ENVIRONMENTAL CONDITIONS .....	20
TEST RESULT .....	20
<b>§95.635(B)(1), §95.635(B)(3), AND §95.635(B)(7) - SPURIOUS EMISSION.....</b>	<b>22</b>
STANDARD APPLICABLE .....	22
MEASUREMENT PROCEDURE.....	22
TEST EQUIPMENT .....	22
ENVIRONMENTAL CONDITIONS .....	22
TEST RESULT .....	23

---

<b>§2.1055, §95.621(B), AND §95.627(B) - FREQUENCY STABILITY MEASUREMENT .....</b>	<b>24</b>
STANDARD APPLICABLE .....	24
TEST PROCEDURE .....	24
TEST EQUIPMENT .....	24
ENVIRONMENTAL CONDITIONS .....	25
TEST RESULTS .....	25

---

## GENERAL INFORMATION

---

### Product Description for Equipment Under Test (EUT)

The *Talent On Development Limited* 's product, FCC ID: *SXLI-FLEX8200*, Model: *i-Flex 8200* or the "EUT" as referred to in this report is a 22 channel 2-Way radio Watch which measures approximately 68mmL x 62mmW x 30mmH.

The EUT operates at the frequency range of 462.55 - 462.725 MHz and 467.5625 - 467.7125 MHz, maximum output power ERP 24.50dBm (0.282W), frequency tolerance 2.5ppm and emission designator 11K0F3E (FRS) and 13K0F3E (GMRS).

*\* The test data gathered are from production sample, serial number: 81085003, provided by the manufacturer.*

### Objective

This report is prepared on behalf of *Talent On Development Limited* in accordance with Part 95 Subpart B and Subpart E of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for effective radiated power, modulation characteristics, occupied bandwidth, radiated spurious emissions, AC line conducted emissions and frequency stability.

### Related Grant/Submission

No Related Submittals.

### Test Methodology

Measurements contained in this report were also conducted with TIA/EIA Standard 603, Telecommunications Industry Association Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The Open Area Test site used by BACL to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234.

---

The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200367-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2001670.htm>

---

## SYSTEM TEST CONFIGURATION

---

### Justification

The EUT was tested according to TIA/EIA 603A to represent the worst-case results during the final qualification test.

### EUT Test Configuration

The EUT was powered and fully operated by pushing PTT (Push To Talk) button and then change the channel to Low, Middle, and High by using up and down buttons.

### Special Accessories

As shown in following test block diagram setup, interface cable used for compliance testing is shielded as normally supplied by customer and its respective support equipment manufacturers.


### Schematics / Block Diagram

Please refer to Appendix D.


### Equipment Modifications

No modifications were made to the EUT.

### Configuration of Test System

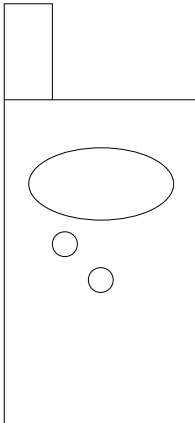

## Test Setup Block Diagram

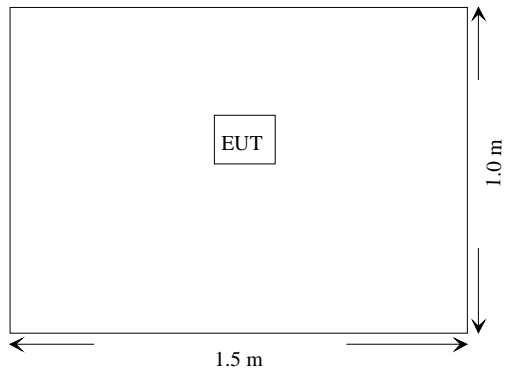

## REQUIREMENTS OF PROVISIONS

Results reported relate only to the product tested, serial number: 81085003.

FCC Rules	Rules Description	Requirement	Result
2.1046 95.639 (a) (1) 95.639 (d)	Effective Radiated Power	0.5W for FRS 50 W for GMRS	Complied
2.1047 95.631 (d) 95.637 (a) 95.637 (b)	Modulation Characteristics F3E analogy voice Peak Frequency Deviation Audio Frequency Response Over Modulation	Deviation < 2.5 kHz for FRS Deviation < 5 kHz for GMRS	Complied
2.1049 95.633 (a) 95.633 (c)	Occupied Bandwidth	20 kHz for GMRS 12.5 kHz for FRS	Complied
2.1053 95.635 (b) 15.109 (a)	Radiated Spurious Emission	Worst Case < -13dBm	Complied
95.635 (b)(1) 95.635 (b)(3) 95.635(b)(7)	Spurious Emission at Antenna Terminal	least $43 \pm 10 \log_{10} (T)$ dB	Complied
2.1055 95.621 (b) 95.627 (b)	Frequency Stability Vs. Temperature Vs. Voltage	Deviation < 5 ppm for GMRS Deviation < 2.5 ppm for FRS	Complied



---

**§2.1046, §95.639(d), and §95.639 (a)(1) - EFFECTIVE RADIATED POWER**

---

**Standard Applicable**

Per FCC §2.1046 and FCC § 95.639 (a) (1), no GMRS unit, under any condition of modulation, shall exceed 50W Carrier Power (average TP during one unmodulated RF cycle) when transmission type A1D, F1D, .G1D, A3E, F3E or G3E.

Per FCC §2.1046 and FCC § 95.639 (d), no FRS unit, under any condition of modulation, shall exceed 0.500W effective radiated power (ERP).

**Test Procedure**

1. On a test site, the EUT shall be placed at 1.5m height on a turn table, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3m from EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the quasi-peak detector is used for the measurement.
4. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a tuned dipole (substitution antenna).
10. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. In necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.

16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
17. The measure of the effective radiated power is the large of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.

## Test Equipment

Manufacturer	Description	Model	Serial Number	Cal. Date
Rohde & Schwarz	Signal Generator	SMIQ03	1125.5555.03	2004-07-10
Rohde & Schwarz	I/O Modulation Generator	AMIQ	1110.2003.02	2004-07-10
Agilent	Spectrum Analyzer	8564E	3943A01781	2004-10-04
Com-Power	Log Periodic Antenna	AL-100	16091	2004-05-01
Com-Power	Biconical Antenna	AB-100	14012	2004-11-02
A.H.System	Horn Antenna (700MHz-18GHz)	SAS-200/571	261	2004-05-30
Com-power	Standard Dipole	AD-100	02226	2004-09-26

\* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

## Environmental Conditions

Temperature:	18 °C
Relative Humidity:	45%
ATM Pressure:	1023 mbar

The testing was performed by Ming Jin on 2005-02-11.

## Test Results

The measured output power showed as follows:

FREQUENCY (MHZ)	SUBSTITUTION READING (dBm)	SUBSTITUTION ANTENNA GAIN	SUBSTITUTION CALBE LOSS (dB)	ERP (dBm)
462.5625	24.8	0	0.1	24.7
462.725	23.9	0	0.1	23.8
462.725	24.5	0	0.1	24.4

Sample calculation:

Absolute level = substitution reading + antenna gain - cable loss

For example:

$$24.8+0-0.1 = 24.7$$

## **§2.1046, §95.639(d), and §95.639 (a)(1) – CONDUCTED OUTPUT POWER**

### **5.1 Provision Applicable**

Per FCC §2.1046 and FCC § 95.639 (d), no FRS unit, under any condition of modulation, shall exceed 0.500W effective radiated power (ERP).

Per FCC §2.1046 and FCC § 95.639 (a) (1), no GMRS unit, under any condition of modulation, shall exceed 50W Carrier Power (average TP during one unmodulated RF cycle) when transmission type A1D, F1D, .G1D, A3E, F3E or G3E.

### **5.2 Test Procedure**

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

### **5.3 Test equipment**



Manufacturer	Description	Model	Serial Number	Cal. Date
Agilent	Spectrum Analyzer	8564E	3943A01781	2004-10-04
Hewlett Packard	Plotter	HP7470A	N/A	N/A

\* **Statement of Traceability:** **BACL Corp.** certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### **5.4 Test Results**

Frequency (MHz)	CH.	Output Power in dBm	Output Power in W	Limit (W, ERP)
462.5625	1	24.33	0.271	50
462.7250	22	24.50	0.282	50

Please refer to the following plots.

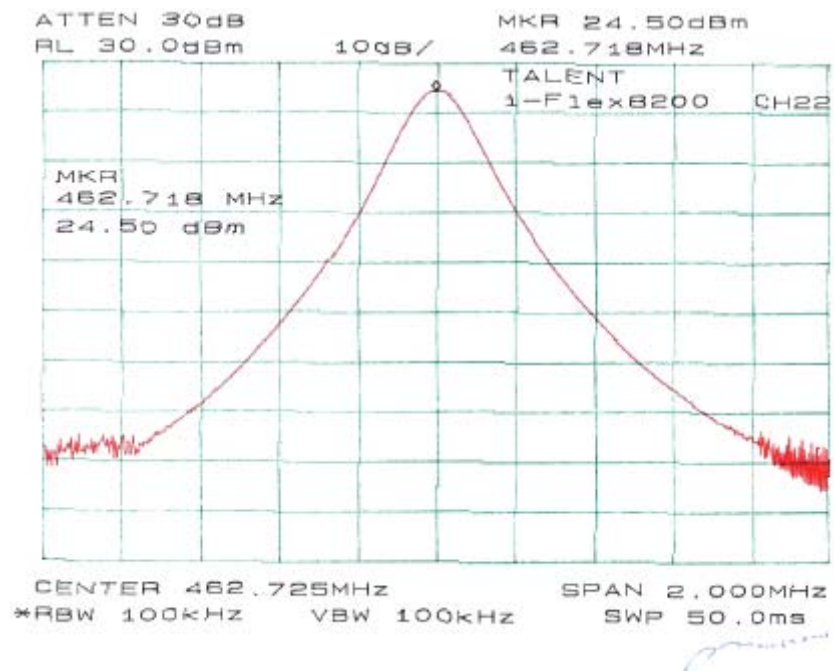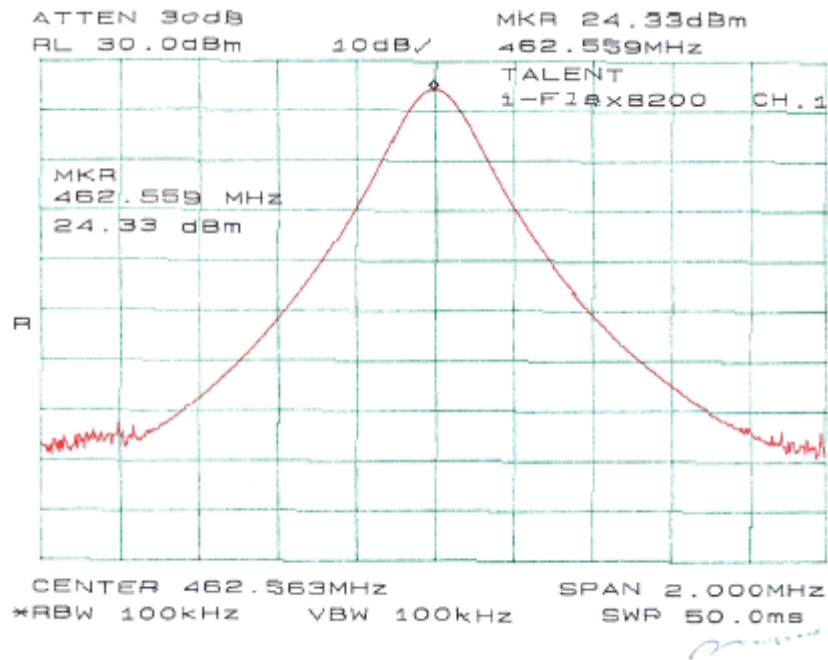

## §2.1047, §95.631(d), §95.637(a), and § 95.637(b) - MODULATION CHARACTERISTICS

### Standard Applicable

Per FCC § 2.1047 and FCC §95.637 (a), a GMRS transmitter that transmits emission types F3E must not exceed a peak frequency deviation of plus or minus 5 kHz. A FRS unit that transmits emission type F3E must not exceed a peak frequency deviation of plus or minus 2.5 kHz, and the audio frequency response must not exceed 3.125 kHz.

### Test Procedure

#### Audio Frequency Response

The RF output of the transceiver was connected to the input of a FM deviation meter through sufficient attenuation so as not to overload the meter or distort the reading. An audio signal generator was coupled into the external microphone jack of the transceiver, or alternatively, the microphone element was removed the generator output was connected to the microphone connectors.

The audio signal input level was adjusted to obtain 20% of the maximum rated system deviation at 1 kHz, and recorded as DEV<sub>REF</sub>. With the audio signal generator level unchanged, set the generator frequency between 100 Hz to 5000 Hz. The transmitter deviations (DEV<sub>FREQ</sub>) were measured and the audio frequency response was calculated as

$$20\log_{10} [\text{DEV}_{\text{FREQ}} / \text{DEV}_{\text{REF}}]$$

#### Audio Low-Pass Filter Response

An audio signal generator and an audio spectrum analyzer were connected to the input and output of the post limiter low pass filter respectively. The audio signal generator frequency was set between 1000 Hz and the upper low pass filter limit. The audio frequency response at test frequency was calculated as

$$\text{LEV}_{\text{FREQ}} - \text{LEV}_{\text{REF}}$$

#### Modulation Limiting

With the same setup as above, at three different modulating frequencies, the output level of the audio generator was varied and the FM deviation level was recorded.

### Test Equipment

Manufacturer	Description	Model	Serial Number	Cal. Date
Agilent	Spectrum Analyzer	8564E	3943A01781	2004-10-04
HP	Modulation Analyzer	8901A	2026A00847	2004-08-19
Nanyan	Audio Generator	NY2201	000420	Not Required

\* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.



## Environmental Conditions



Temperature:	18 °C
Relative Humidity:	45%
ATM Pressure:	1023 mbar

The testing was performed by Ming Jin on 2005-02-11.

## Test Results

The plot(s) of modulation characteristic is presented hereinafter as reference.

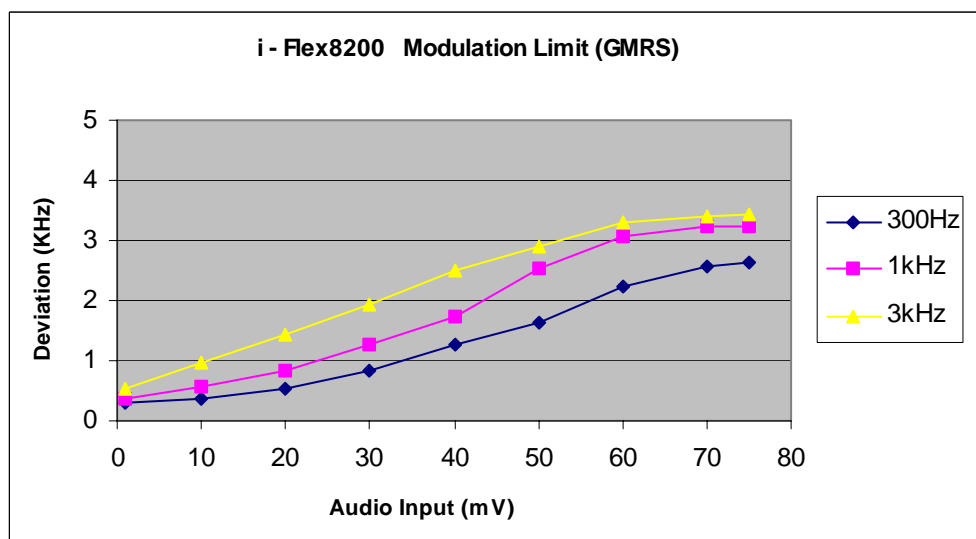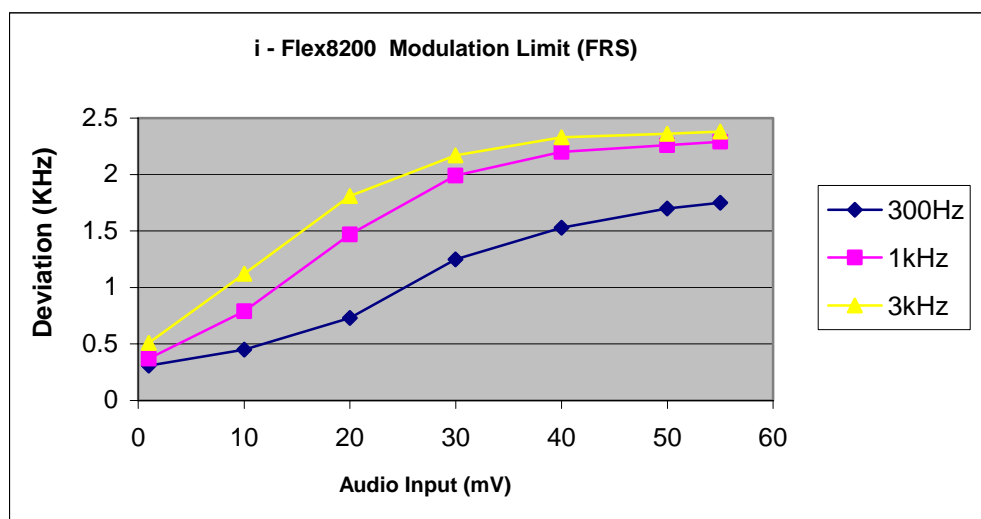

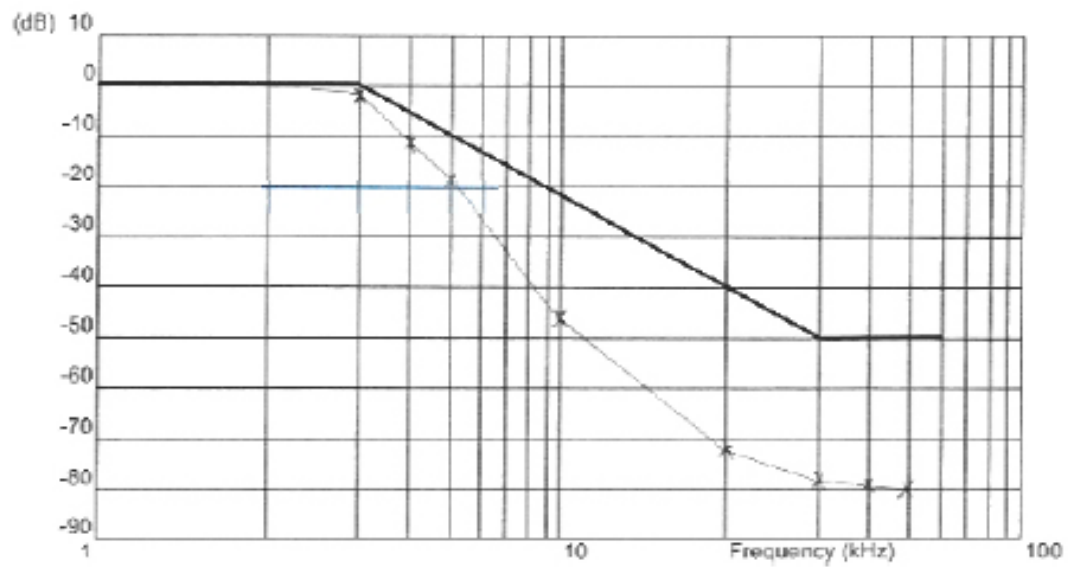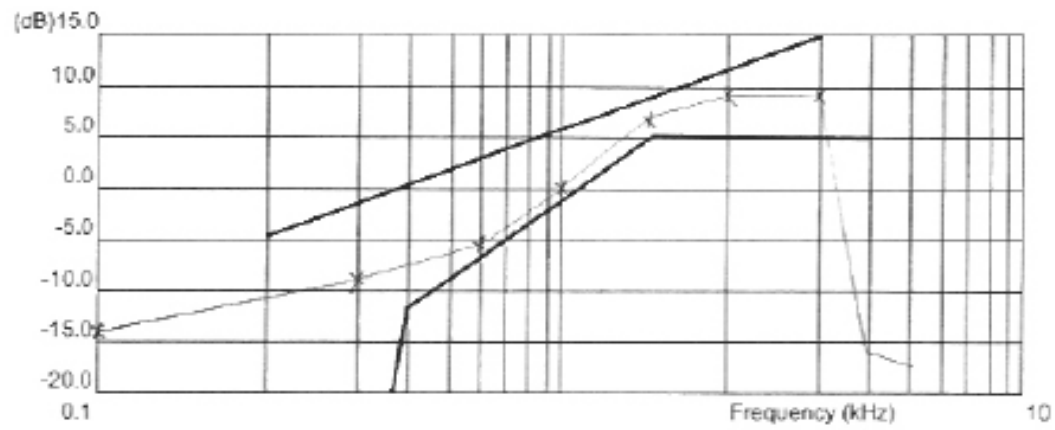

## **§2.1049, §95.633(a), and § 95.633(c) - OCCUPIED BANDWIDTH OF EMISSION**

### **Standard Applicable**

Per FCC §2.1049 and FCC §95.633 (a), the authorized bandwidth for emission type F3E transmitted is 20 kHz.

Per FCC §2.1049 and FCC §95.633 (c), the authorized bandwidth for emission type F3E transmitted by a FRS unit is 12.5 kHz.

### **Test Procedure**

The antenna was disconnected from the transmitter and the short cable was connected to the transmitter RF output.

The RF output was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set up at least 10 times higher than the authorized bandwidth of the transmitter. With the transmitter keyed, the level of the unmodulated carrier was set to the full scale reference line of the spectrum analyzer. This is used as a 0dB reference for emission mask measurements.

The transmitter was then modulated with a 2500 Hz tone at an input level 20 dB greater than the necessary to produce 50% of rated system deviation. The resolution bandwidth of the spectrum analyzer was set up to 300 Hz and the spectrum of the transmitting signal was recorded. This spectrum was compared to the required emission mask.

### **Test Equipment**

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Cal. Due Date</b>
Agilent	Spectrum Analyzer	8564E	3943A01781	2004-10-04
Nanyan	Audio Generator	NY2201	000420	Not Required

\* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

### **Environmental Conditions**

Temperature:	18 ° C
Relative Humidity:	45%
ATM Pressure:	1023 mbar



*The testing was performed by Ming Jin on 2005-02-11.*



### **Test Results**

Test Result: Pass

Please refer the following curve and plots.



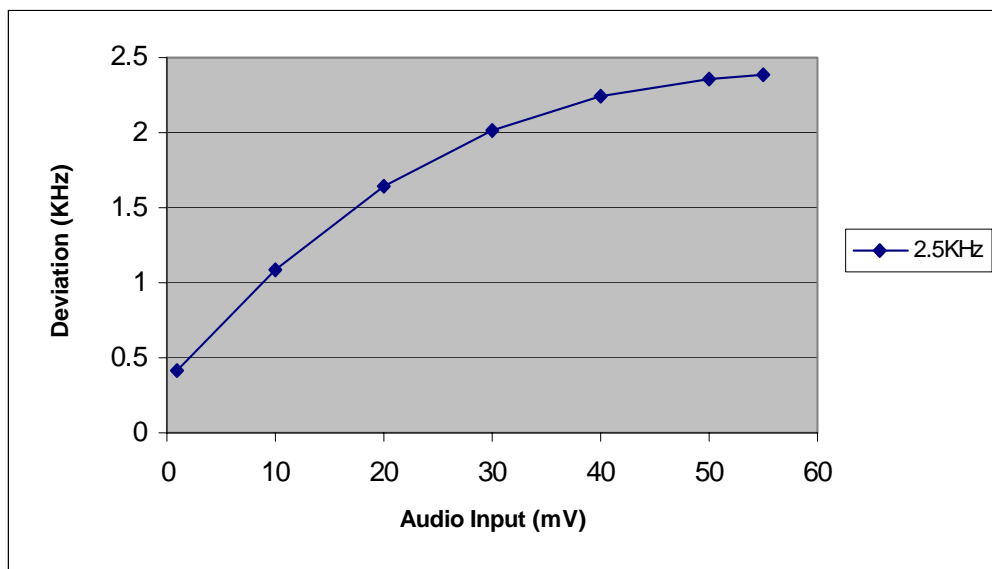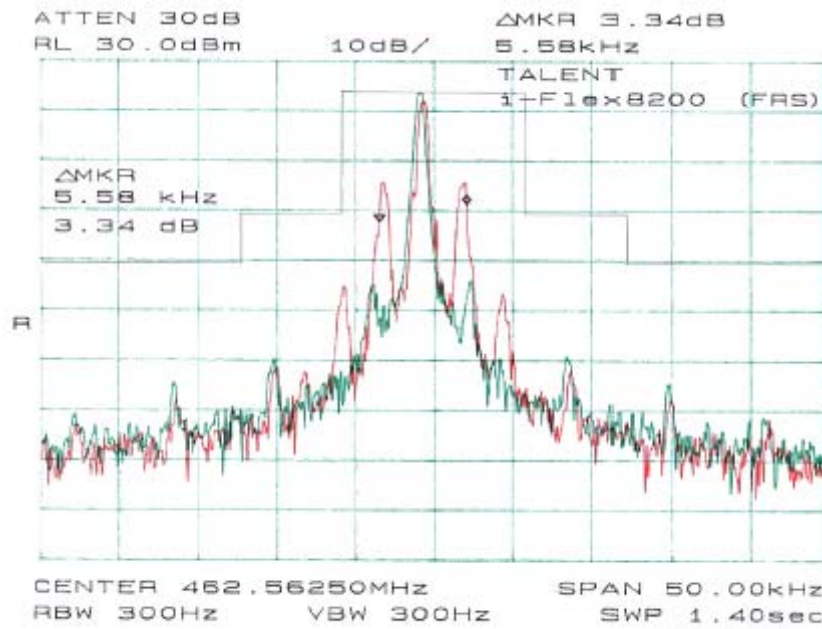

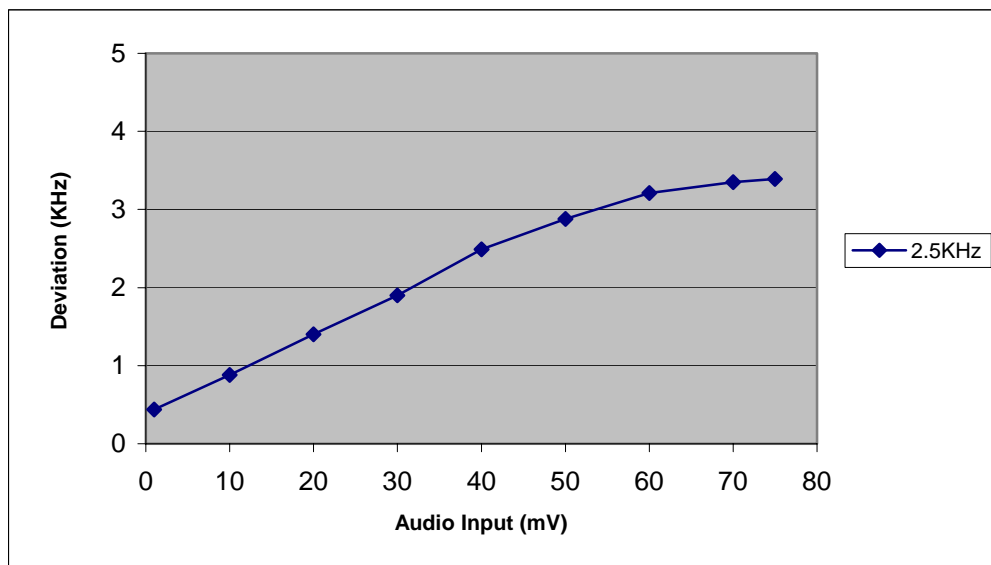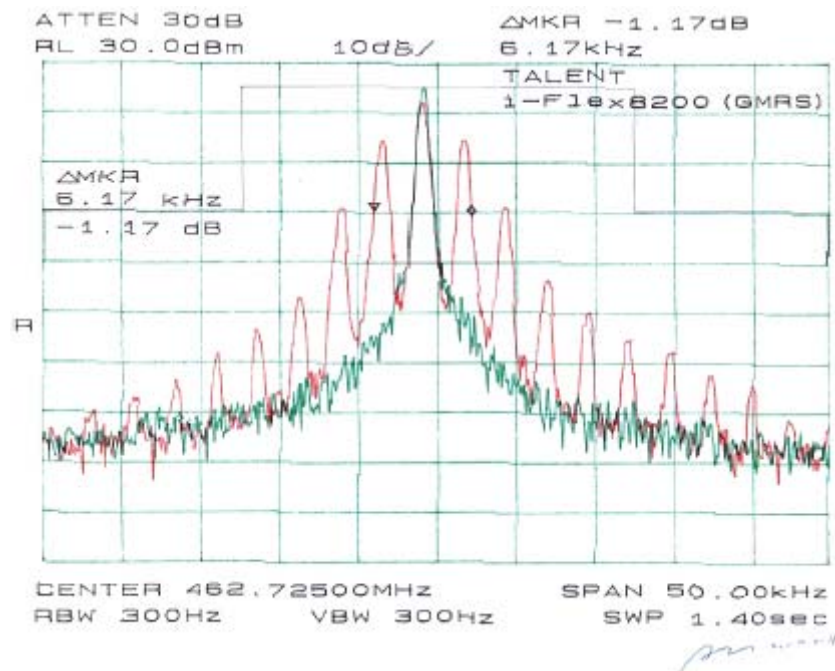

## §2.1053, §95.635(b)(7) and §15.109(a) - RADIATED EMISSION

### Standard Applicable

According to FCC §2.1053, measurements shall be made to detect spurious emission that may be radiated directly from the cabinet, control circuits, power leads, or intermediated circuit elements under normal condition of installation and operation. Information submitted shall include the relative radiated power of spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from a halfwave dipole antenna.

### Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =  $10 \lg (\text{TXpwr in Watts}/0.001)$  – the absolute level

Spurious attenuation limit in dB =  $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

### Test Equipment

Manufacturer	Description	Model	Serial Number	Cal. Date
Rohde & Schwarz	Signal Generator	SMIQ03	1125.5555.03	2004-07-10
Rohde & Schwarz	I/O Modulation Generator	AMIQ	1110.2003.02	2004-07-10
Agilent	Spectrum Analyzer	8564E	3943A01781	2004-10-04
Com-Power	Log Periodic Antenna	AL-100	16091	2004-05-01
Com-Power	Biconical Antenna	AB-100	14012	2004-11-02
A.H.System	Horn Antenna (700MHz-18GHz)	SAS-200/571	261	2004-05-30
Com-power	Standard Dipole	AD-100	02226	2004-09-26

\* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

## Environmental Conditions

Temperature:	18 °C
Relative Humidity:	45%
ATM Pressure:	1023 mbar

The testing was performed by Ming Jin on 2005-02-11.

## Test Result

Worst Case readings:

CH. 1: -17.9 dB at 925.1250 MHz in the Vertical polarization

CH. 14: -18.4 dB at 935.4250 MHz in the Vertical polarization

CH. 22: -18.1 dB at 925.4500 MHz in the Vertical polarization

Channel 1:

EUT					Generator						Standard	
Indicated		Table	Test Antenna		Substitution			Antenna	Cable	Absolute	FCC	FCC
Frequency MHz	Ampl. dBuV/m	Angle Degree	Height Meter	Polar H/V	Frequency MHz	Level dBm	Polar H/V	Gain Corrected	Loss dB	Level dBm	Limit dBm	Margin dB
462.5625	99.7	30	1.5	v	462.5625	24.8	v	0	0.1	24.7		
462.5625	85.1	180	1.5	h	462.5625	17.2	h	0	0.1	17.1		
925.1250	39.2	90	1.8	v	925.1250	-30.6	v	0	0.3	-30.9	-13	-17.9
1387.6875	38.5	0	1.5	v	1387.6875	-36.7	v	3.6	0.5	-33.6	-13	-20.6
925.1250	33.8	120	1.5	h	925.1250	-35.4	h	0	0.3	-35.7	-13	-22.7
1387.6875	36.2	210	2.2	h	1387.6875	-38.9	h	3.6	0.5	-35.8	-13	-22.8
440.7120	24.9	270	1.5	v	440.7120	-45.3	v	0	0.1	-45.4	-13	-32.4
440.7120	23.6	180	1.8	h	440.7120	-46.8	h	0	0.1	-46.9	-13	-33.9

Channel 14:

EUT					Generator						Standard	
Indicated		Table	Test Antenna		Substitution			Antenna	Cable	Absolute	FCC	FCC
Frequency MHz	Ampl. dBuV/m	Angle Degree	Height Meter	Polar H/V	Frequency MHz	Level dBm	Polar H/V	Gain Corrected	Loss dB	Level dBm	Limit dBm	Margin dB
467.7125	98.8	180	1.5	v	462.7250	23.9	v	0	0.1	23.8		
467.7125	84.2	130	1.8	h	462.7250	16.4	h	0	0.1	16.3		
935.4250	38.6	0	1.6	v	925.4500	-31.1	v	0	0.3	-31.4	-13	-18.4
1403.1375	37.9	210	1.5	v	1388.1750	-37.3	v	3.6	0.5	-34.2	-13	-21.2
1403.1375	36.2	30	1.5	h	1388.1750	-39.5	h	3.6	0.5	-36.4	-13	-23.4
935.4250	33.4	60	1.5	h	925.4500	-36.2	h	0	0.3	-36.5	-13	-23.5

## Channel 22:

EUT					Generator						Standard	
Indicated		Table	Test Antenna		Substitution			Antenna	Cable	Absolute	FCC	FCC
Frequency MHz	Ampl. dBuV/m	Angle Degree	Height Meter	Polar H/V	Frequency MHz	Level dBm	Polar H/V	Gain Corrected	Loss dB	Level dBm	Limit dBm	Margin dB
462.7250	99.4	0	2.2	v	462.7250	24.5	v	0	0.1	24.4		
462.7250	84.7	130	2.0	h	462.7250	16.9	h	0	0.1	16.8		
925.4500	38.8	0	1.8	v	925.4500	-30.8	v	0	0.3	-31.1	-13	-18.1
1388.1750	38.2	180	2.0	v	1388.1750	-36.8	v	3.6	0.5	-33.7	-13	-20.7
1388.1750	35.7	90	1.8	h	1388.1750	-39.2	h	3.6	0.5	-36.1	-13	-23.1
925.4500	33.6	180	1.5	h	925.4500	-35.9	h	0	0.3	-36.2	-13	-23.2
440.7760	24.7	200	2.0	v	440.7760	-45.5	v	0	0.1	-45.6	-13	-32.6
440.7760	23.4	120	2.2	h	440.7760	-47.1	h	0	0.1	-47.2	-13	-34.2

**Compliance Statement:**

According to FCC Part 15, at 3-meter distance the emission from an intentional radiator shall not exceed the field strength level 40 dBuV/m within 30-88 MHz, 43.5 dBuV/m within 88-216 MHz, 46dBuV/m within 226-960 MHz, 54BuV/m above 960 MHz. The level of any unwanted emissions shall not exceed the level of the fundamental frequency.

The levels of unwanted emission of this device were below the above limits. This device was compliant with the FCC Part 15.

## **§95.635(b)(1), §95.635(b)(3), and §95.635(b)(7) - SPURIOUS EMISSION**

### **Standard Applicable**

Per FCC §95.635 (b)(1), at least 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.

Per FCC §95.635 (b)(3), at least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.

Per FCC §95.635 (b)(7), at least  $43 \pm 10 \log_{10}(T)$  dB on any frequency removed from the center of the authorized bandwidth by more than 250%.

### **Measurement Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.
6. Spurious attenuation limits in dB =  $43 + 10\log_{10}(\text{power out in Watts})$

### **Test Equipment**

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	8564E	3943A01781	2004-10-04
Nanyan	Audio Generator	NY2201	000420	Not Required

\* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.



### **Environmental Conditions**

Temperature:	18 °C
Relative Humidity:	45%
ATM Pressure:	1023 mbar

*The testing was performed by Daniel Deng on 2005-02-11.*

## Test Result

Please refer to the following plot(s).

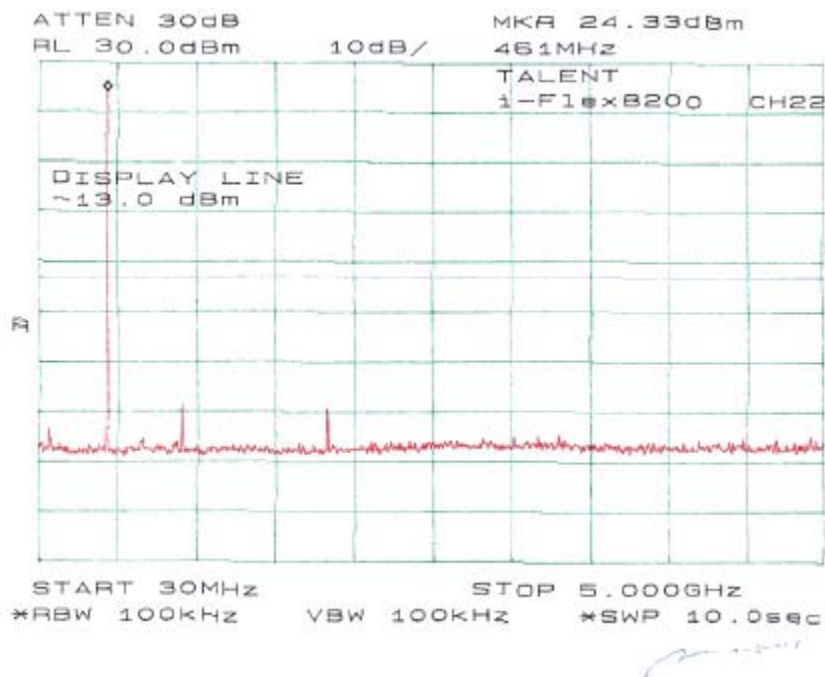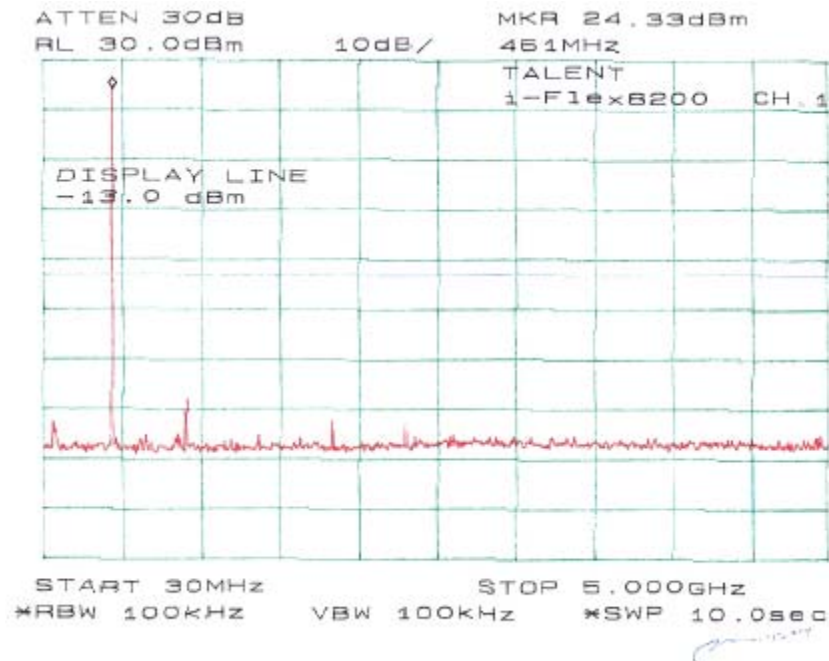

## **§2.1055, §95.621(b), and §95.627(b) - FREQUENCY STABILITY MEASUREMENT**

### **Standard Applicable**

According to FCC §2.1055(a)(1), the frequency stability shall be measure with variation of ambient temperature from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$ , and according to FCC 2.1055(d)(2), the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point which is specified by the manufacturer.

According to FCC §95.621 (a), the GMRS transmitter channel frequencies (reference frequencies from which the carrier frequency, suppressed or otherwise, may not deviate by more than the specified frequency to tolerance) are 462.5500, 462.5625, 462.5750, 462.5875, 462.6000, 462.6125, 462.6250, 462.6375, 462.6500, 462.6625, 462.6750, 462.6875, 462.7000, 462.7125, 462.7250, 467.5500, 467.5750, 467.6000, 467.6250, 467.6500, 467.6750, 467.7000 and 467.7250.

According to FCC §95.621 (b), each GMRS transmitter for mobile station, small base station and control station operation must be maintained within a frequency tolerance of 0.0005%. Each GMRS transmitter for base station (except small base), mobile rely station or fixed station operation must be maintained within a frequency tolerance of 0.00025%.

According to FCC §95.627, each FRS unit must be maintained within a frequency tolerance of 0.00025%.

### **Test Procedure**

#### **Frequency stability versus environmental temperature**

The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feedthrough attenuators. The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency of the output signal was recorded from the counter.

#### **Frequency Stability versus Input Voltage**

At room temperature ( $25\pm 5^{\circ}\text{C}$ ), an external variable DC power supply was connected to the EUT. The frequency of the transmitter was measured for 115%, 100% and 85% of the nominal operating input voltage.

### **Test Equipment**

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	8564E	3943A01781	2004-10-04
Nanyan	Audio Generator	NY2201	000420	Not Required
Tenney	Oven, Temperature	Versa Tenn	12.431-8	2004-06-04
HP	DC Power Supply	6236B	22112-19	N/A

\* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.



## Environmental Conditions

Temperature:	18 °C
Relative Humidity:	45%
ATM Pressure:	1023 mbar

The testing was performed by Ming Jin on 2005-02-11.

## Test Results

Reference Frequency: 462.5625 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapsed	
		MCF (MHz)	PPM Error
50	3.7	462.5636	2.38
40	3.7	462.5631	1.29
30	3.7	462.5628	0.65
20	3.7	462.5628	0.65
10	3.7	462.5626	0.22
0	3.7	462.5621	-0.86
-10	3.7	462.5619	-1.29
-20	3.7	462.5617	-1.73
-30	3.7	462.5617	-1.73

### Frequency Stability Versus Input Voltage

Reference Frequency: 462.5625 MHz, Limit: 2.5ppm		
Power Supplied (Vdc)	Frequency Measured with Time Elapsed	
	MCF (MHz)	Error (ppm)
3.2	462.5628	0.65

End Point = 3.2 Vdc

Conclusion: The EUT complied with the applicable Frequency Stability Limits.