



**CFR 47 FCC PART 15 SUBPART C  
ISED RSS-247 ISSUE 2**

**CERTIFICATION TEST REPORT**

*For*

**WIFI+BT Module**

**MODEL NUMBER: WXT21M2511B**

**FCC ID: 2AC23-WXT21**

**IC: 12290A-WXT21**

**REPORT NUMBER: 4790244590-3**

**ISSUE DATE: March 9, 2022**

*Prepared for*

**Hui Zhou Gaoshengda Technology Co.,LTD  
NO.75 Zhongkai Development Area, Huizhou, Guangdong, China**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	3/9/2022	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Results
1	6dB Bandwidth and 99% Occupied Bandwidth	FCC Part 15.247 (a) (2) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7	Pass
2	Conducted Output Power	FCC Part 15.247 (b) (3) RSS-247 Clause 5.4 (d)	Pass
3	Power Spectral Density	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d) RSS-247 Clause 5.5	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
6	Conducted Emission Test for AC Power Port	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
7	Antenna Requirement	FCC Part 15.203 RSS-GEN Clause 6.8	Pass
<p>Note:</p> <p>1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.</p> <p>2. The measurement result for the sample received is &lt;Pass&gt; according to &lt; CFR 47 FCC PART 15 SUBPART C &gt; &lt; ISED RSS-247 &gt; when &lt;Accuracy Method&gt; decision rule is applied.</p>			



## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>6</b>
<b>2. TEST METHODOLOGY .....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>8</b>
4.1. MEASURING INSTRUMENT CALIBRATION .....	8
4.2. MEASUREMENT UNCERTAINTY .....	8
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>9</b>
5.1. DESCRIPTION OF EUT .....	9
5.2. CHANNEL LIST .....	9
5.3. MAXIMUM OUTPUT POWER .....	10
5.4. TEST CHANNEL CONFIGURATION .....	10
5.5. THE WORSE CASE POWER SETTING PARAMETER .....	10
5.6. THE WORSE CASE CONFIGURATIONS .....	11
5.7. DESCRIPTION OF AVAILABLE ANTENNAS .....	12
5.8. DESCRIPTION OF TEST SETUP .....	13
<b>6. MEASURING INSTRUMENT AND SOFTWARE USED .....</b>	<b>14</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>16</b>
7.1. ON TIME AND DUTY CYCLE .....	16
7.2. 6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH .....	17
7.3. CONDUCTED OUTPUT POWER .....	19
7.4. POWER SPECTRAL DENSITY .....	20
7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS .....	22
<b>8. RADIATED TEST RESULTS .....</b>	<b>24</b>
8.1. RESTRICTED BANDEDGE .....	30
8.1.1. 802.11b SISO MODE .....	30
8.1.2. 802.11g SISO MODE .....	34
8.1.3. 802.11n HT20 MIMO MODE .....	38
8.1.4. 802.11n HT40 MIMO MODE .....	42
8.1.5. 802.11ax HE20 MIMO MODE .....	46
8.1.6. 802.11ax HE40 MIMO MODE .....	50
8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz) .....	54
8.2.1. 802.11 b MIMO MODE .....	54
8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz) .....	60
8.3.1. 802.11b SISO MODE .....	60
8.3.2. 802.11g SISO MODE .....	66



8.3.3.	802.11n HT20 MIMO MODE.....	72
8.3.4.	802.11n HT40 MIMO MODE.....	78
8.3.5.	802.11ax HE20 MIMO MODE.....	84
8.3.6.	802.11ax HE40 MIMO MODE.....	90
8.5.	SPURIOUS EMISSIONS (18 GHz ~ 26 GHz).....	96
8.5.1.	802.11ax HE40 MIMO MODE.....	96
8.6.	SPURIOUS EMISSIONS (30 MHz ~ 1 GHz).....	98
8.6.1.	802.11ax HE40 MIMO MODE.....	98
8.7.	SPURIOUS EMISSIONS BELOW 30 MHz .....	100
8.7.1.	802.11ax HE40 MIMO MODE.....	100
<b>9.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>103</b>
9.1.1.	802.11ax HE40 MIMO MODE.....	104
<b>10.</b>	<b>ANTENNA REQUIREMENTS .....</b>	<b>106</b>
<b>11.</b>	<b>Appendix.....</b>	<b>107</b>
11.1.	Appendix A: DTS Bandwidth .....	107
11.1.1.	Test Result.....	107
11.1.2.	Test Graphs .....	108
11.2.	Appendix B: Occupied Channel Bandwidth .....	120
11.2.1.	Test Result.....	120
11.2.2.	Test Graphs .....	121
11.3.	Appendix C: Maximum conducted output power.....	133
11.3.1.	Test Result.....	133
11.4.	Appendix D: Maximum power spectral density .....	134
11.4.1.	Test Result.....	134
11.4.2.	Test Graphs .....	135
11.5.	Appendix E: Band edge measurements .....	147
11.5.1.	Test Result.....	147
11.5.2.	Test Graphs .....	148
11.6.	Appendix F: Conducted Spurious Emission.....	156
11.6.1.	Test Result.....	156
11.6.2.	Test Graphs .....	158
11.7.	Appendix G: Duty Cycle .....	194
11.7.1.	Test Result.....	194
11.7.2.	Test Graphs .....	195



## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD  
Address: NO.75 Zhongkai Development Area, Huizhou, Guangdong, China

### Manufacturer Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD  
Address: No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou City,Guangdong,China

### EUT Information

EUT Name: WIFI+BT Module  
Model: WXT21M2511B  
Sample Received Date: Jan 12, 2022  
Sample Status: Normal  
Sample ID: 4576654  
Date of Tested: Jan 12~Mar 10, 2022

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-247 Issue 2	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:

Checked By:

Kebo Zhang  
Project Engineer

Shawn Wen  
Laboratory Leader

Approved By:

Stephen Guo  
Laboratory Manager



## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name:	WIFI+BT Module
Model Name:	WXT21M2511B
Radio Technology	IEEE802.11b/g/n HT20/n HT40/ax HE20/ax HE40
Operation frequency	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40: 2422MHz—2452MHz IEEE 802.11ax HE20: 2412MHz—2462MHz IEEE 802.11ax HE40: 2422MHz—2452MHz
Modulation	IEEE 802.11b: DSSS(CCK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ax HE20: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ax HE40: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK,BPSK)
Power Supply	DC 5 V

### 5.2. CHANNEL LIST

Channel List for 802.11b/g/n/ax (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List for 802.11n/ax (40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/



### 5.3. MAXIMUM OUTPUT POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)
b	2412 ~ 2462	1-11[11]	14.59
g	2412 ~ 2462	1-11[11]	13.87
n HT20	2412 ~ 2462	1-11[11]	16.80
n HT40	2422 ~ 2452	3-9[7]	15.91
ax HE20	2412 ~ 2462	1-11[11]	15.98
ax HE40	2422 ~ 2452	3-9[7]	15.97

### 5.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel	Frequency
b	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
g	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
n HT20	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
n HT40	CH 3, CH 6, CH 9/ Low, Middle, High	2422MHz, 2437MHz, 2452MHz
ax HE20	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
ax HE40	CH 3, CH 6, CH 9/ Low, Middle, High	2422MHz, 2437MHz, 2452MHz

### 5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		QA Tool					
IEEE Std. 802.11	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
b	1	15.5	15.5	15.5	/		
	2	15.5	15.5	15.5			
g	1	14	14	14			
	2	14	14	14			
n HT20	1	14	14	14			
	2	14	14	14			
n HT40	1	/			13	13	13
	2	/			13	13	13
ax HE20	1	15.5	15.5	15.5	/		
	2	15.5	15.5	15.5			
ax HE40	1	/			13	13	13
	2	/			13	13	13

## 5.6. THE WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20 mode: MCS0

802.11n HT40 mode: MCS0

802.11ax HE20 mode: MCS0

802.11ax HE40 mode: MCS0

SISO mode and MIMO mode have the same power setting, so only the worst case power mode (MIMO) will be record in the report.

The EUT has 2 separate antennas which correspond to 2 separate antenna ports. Core 1 and Core 2 correspond to antenna 1 and antenna 2 respectively.

Antenna 1 and Antenna 2 have the same power setting, but the power test data are different. (Declared by customer.)

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

The EUT support Cyclic Shift Diversity (CDD), Space Time Coding (STBC), Spatial Division Multiplexing (SDM) modes. They use the same conducted power per chain in any given mode, CDD mode have the maximum power setting, so we only chose the worst case mode CDD for final testing.

## 5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2462	PCB	3
2	2412-2462	PCB	3

The EUT support Cyclic Shift Diversity(CDD) mode.

MIMO output power port and MIMO PSD port summing was performed in accordance with KDB 662911 D01. For the CDD results the Directional Gain was calculated in accordance with clause F)2)f)(i).

For output power measurements:

Directional gain=  $G_{ANT} + \text{Array Gain} = 3\text{dBi}$

$G_{ANT}$  : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$

For power spectral density (PSD) measurements:

Directional gain=  $G_{ANT} + \text{Array Gain} = 6\text{ dBi}$

Array Gain =  $10 \log(N_{ANT}/N_{SS})\text{ dB}$ .

$N_{ANT}$  : number of transmit antennas

$N_{SS}$  : number of spatial streams, The worst case directional gain will occur when  $N_{SS} = 1$

IEEE Std. 802.11	Transmit and Receive Mode	Description
b	☒2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
g	☒2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
n HT20	☒2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
n HT40	☒2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
ax HE20	☒2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
ax HE40	☒2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
Note: 1. BT&WLAN 2.4G, BT & WLAN 5G, WLAN 2.4G & WLAN 5G can't transmit simultaneously. (Declared by client) 2. The value of the antenna gain was declared by customer.		



## 5.8. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	Laptop	Lenovo	E42-80	R303U5AG
2	UART	/	/	/

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/

### ACCESSORIES


Item	Accessory	Brand Name	Model Name	Description
1	/	/	/	/

Note: The cable is provided by customer.

### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

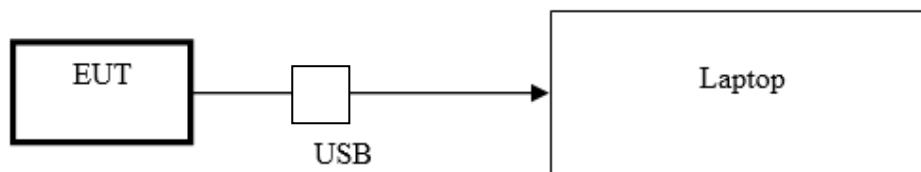



## 6. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.30, 2021	Oct.29, 2022
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.30, 2021	Oct.29, 2022
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.30, 2021	Oct.29, 2022
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.30, 2021	Oct.29, 2022
EMI Measurement Receiver	R&S	ESR26	101377	Oct.30, 2021	Oct.29, 2022
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.30, 2021	Oct.29, 2022
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.31, 2021	Oct.30, 2022
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.31, 2021	Oct.30, 2022
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.31, 2021	Oct.30, 2022
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01201941	Oct.31, 2021	Oct.30, 2022
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.31, 2021	Oct.30, 2022
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Oct.31, 2021	Oct.30, 2022
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Oct.31, 2021	Oct.30, 2022
Software					



Description	Manufacturer	Name	Version
Test Software for Radiated Emissions	Farad	EZ-EMC	Ver. UL-3A1

Other instruments					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer	R&S	FSV40	101117	Oct.31, 2021	Oct.30, 2022
Dual Channel Power Meter	Keysight	N1912A	MY55416024	Oct.30, 2021	Oct.29, 2022
Power Sensor	Keysight	USB Wideband Power Sensor	MY5100022	Oct.30, 2021	Oct.29, 2022



## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE


#### LIMITS

None; for reporting purposes only

#### PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	24.6 °C	Relative Humidity	58 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

#### RESULTS

Please refer to appendix G.





## 7.2. 6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	$\geq 500$ kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

### TEST PROCEDURE


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### TEST SETUP





### **TEST ENVIRONMENT**

Temperature	24.6 °C	Relative Humidity	58 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

### **RESULTS**

Please refer to appendix A & B.



### 7.3. CONDUCTED OUTPUT POWER

#### LIMITS


CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

#### TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	24.6 °C	Relative Humidity	58 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

#### RESULTS

Please refer to appendix C.



## 7.4. POWER SPECTRAL DENSITY

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm/3 kHz	2400-2483.5

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	PEAK
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### TEST SETUP



### TEST ENVIRONMENT

Temperature	24.6 °C	Relative Humidity	58 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V



## **RESULTS**

Please refer to appendix D.



## 7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.


Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.



### TEST SETUP



### TEST ENVIRONMENT

Temperature	24.6 °C	Relative Humidity	58 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

### RESULTS

Please refer to appendix E & F.



## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISSED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISSED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.





ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

**Note 1:** Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

## TEST SETUP AND PROCEDURE

Below 30 MHz

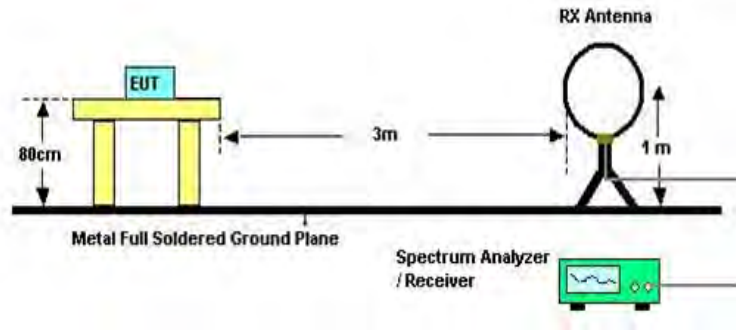


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377 \Omega$ ; For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to  $Y-51.5 = Z$  dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

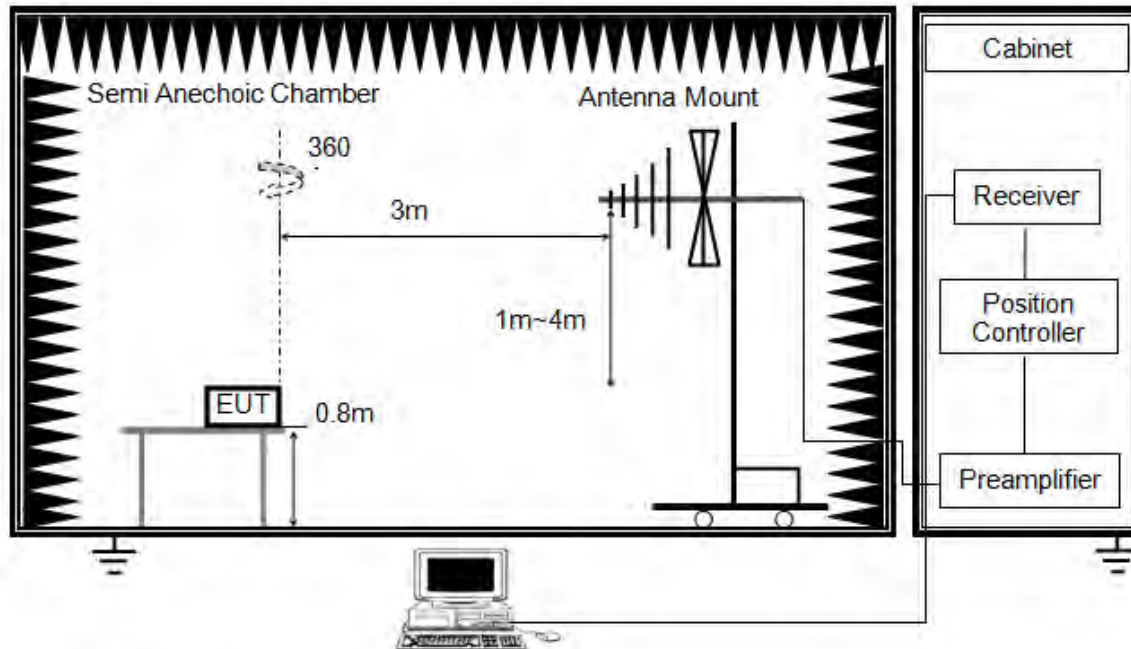


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

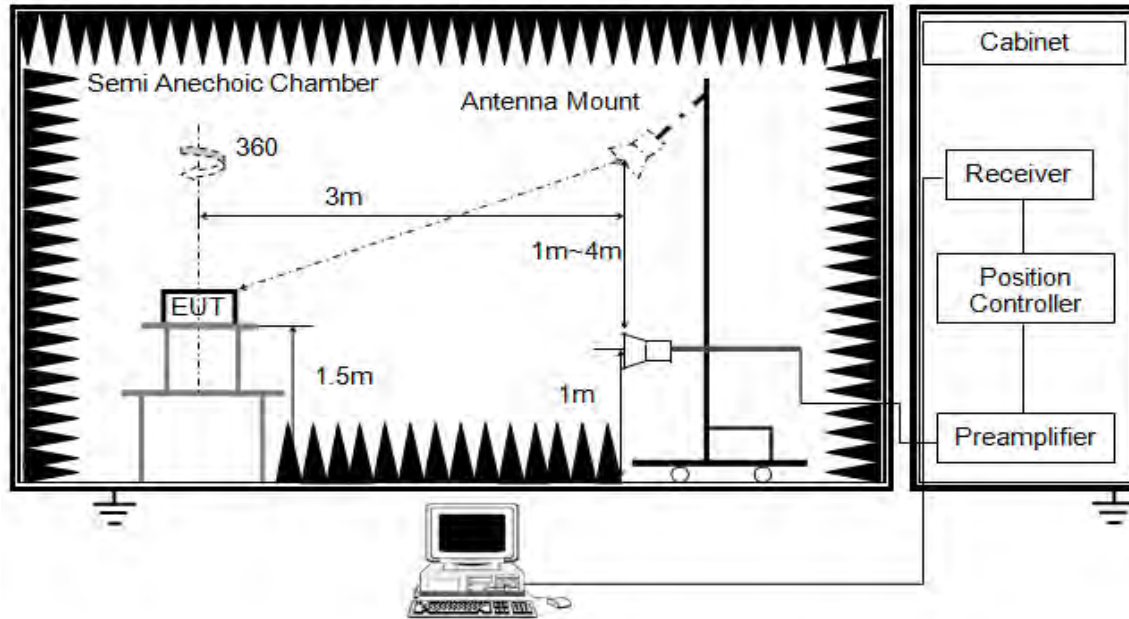


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

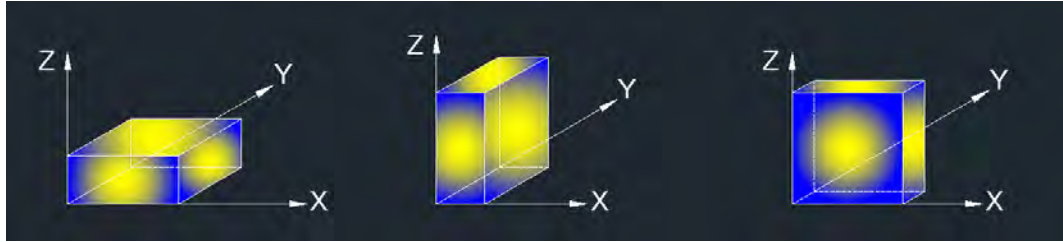

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

### TEST ENVIRONMENT

Temperature	20.1 °C	Relative Humidity	57.3 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

### RESULTS


## 8.1. RESTRICTED BANDEDGE

### 8.1.1. 802.11b SISO MODE

#### ANTENNA 1 TEST RESULTS (WORST CASE)

#### RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

#### PEAK

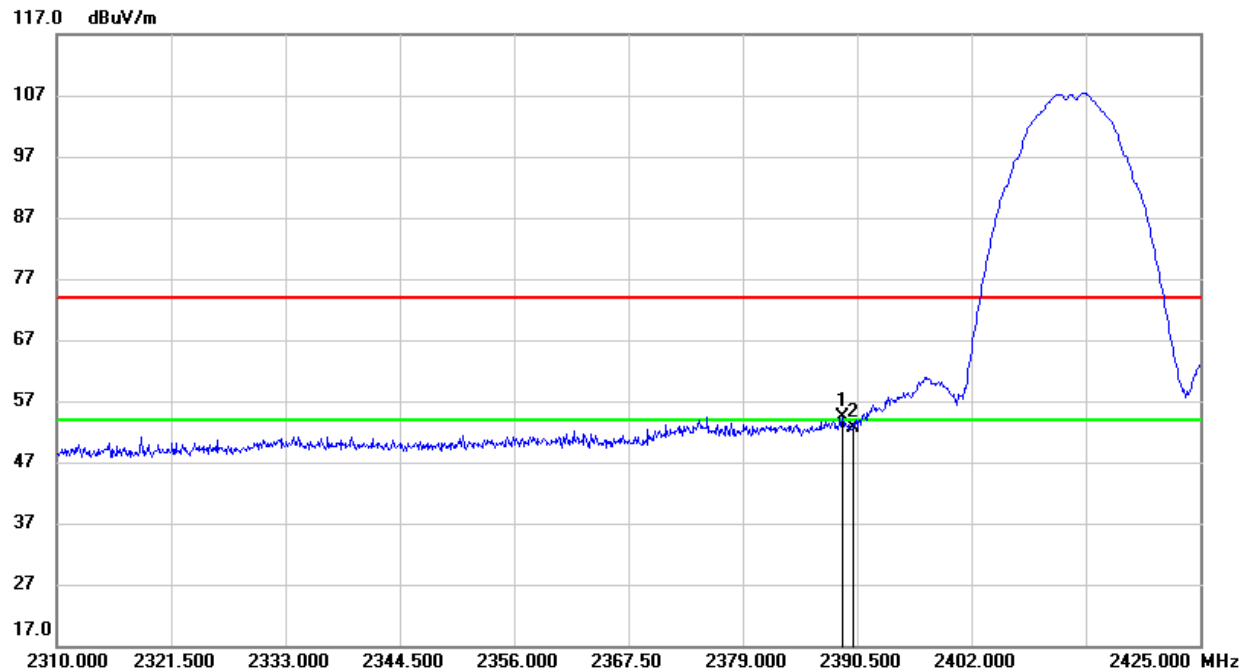


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.005	21.77	32.66	54.43	74.00	-19.57	peak
2	2390.000	19.94	32.66	52.60	74.00	-21.40	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

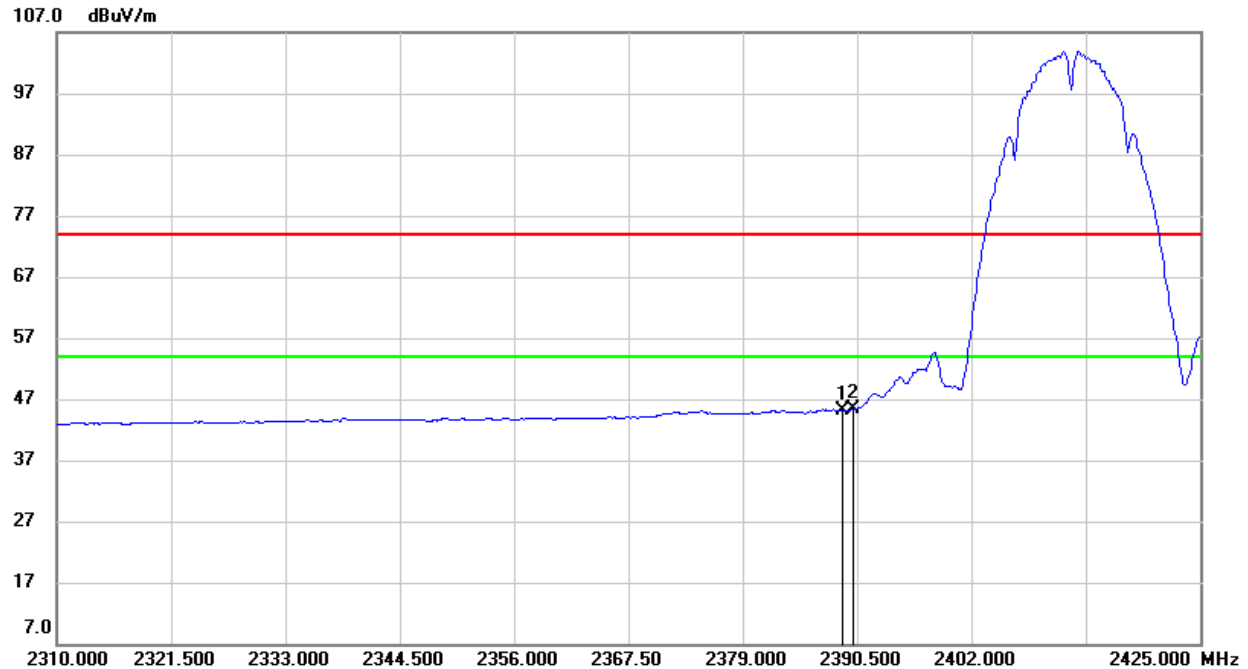**AVG**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.005	12.48	32.66	45.14	54.00	-8.86	AVG
2	2390.000	12.60	32.66	45.26	54.00	-8.74	AVG

Note: 1. Measurement = Reading Level + Correct Factor.

2. AVG:  $VBW=1/Ton$ , where:  $Ton$  is the transmitting duration.

3. For the transmitting duration, please refer to clause 7.1.

4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

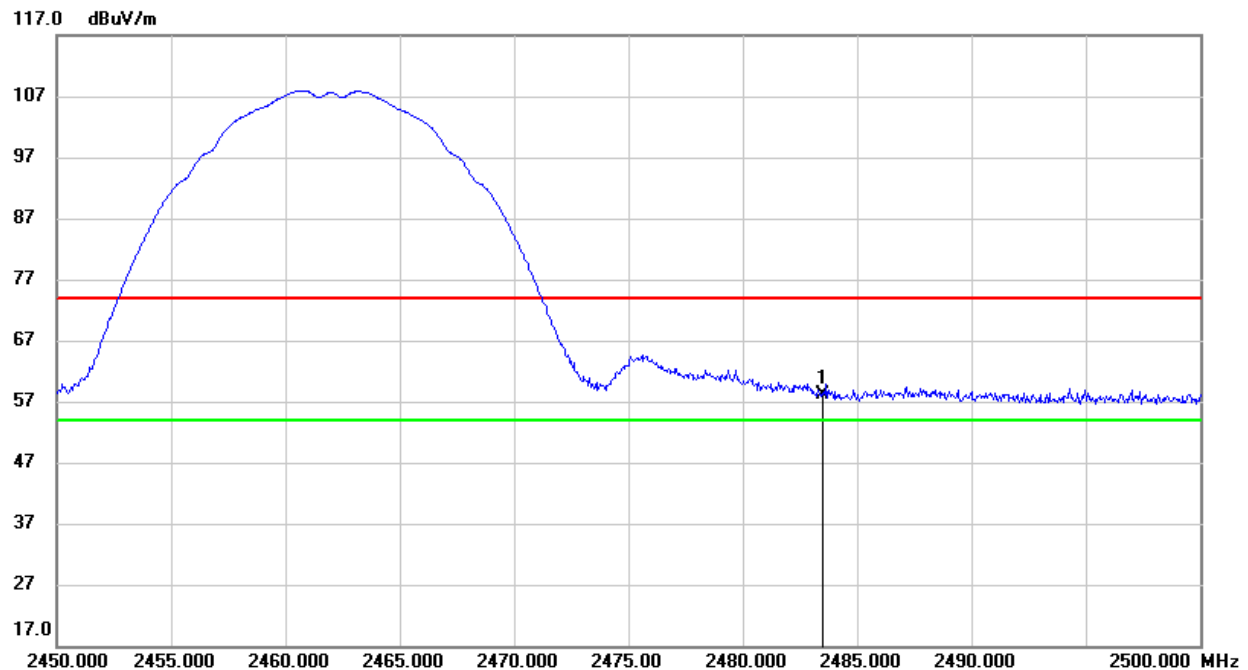**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	25.13	33.10	58.23	74.00	-15.77	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.


3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) and antennas had been tested, only the worst data was recorded in the report.

Note: Both antennas have been tested, only the worst data was recorded in the report.



### AVG

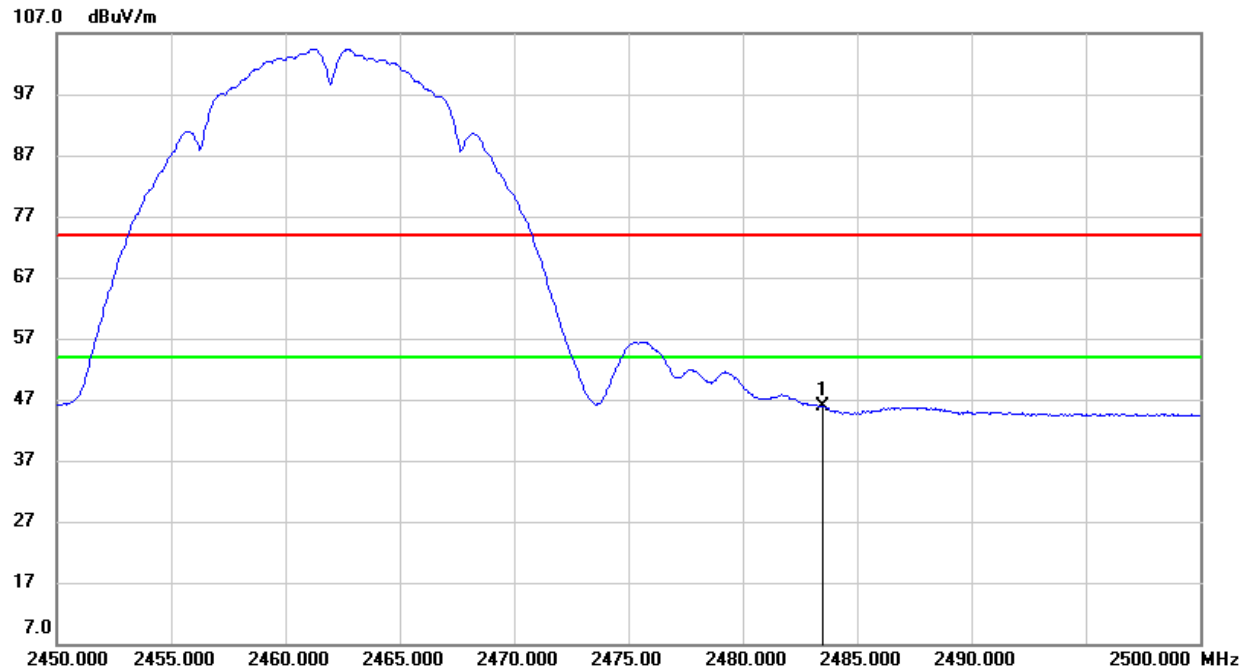

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	12.81	33.10	45.91	54.00	-8.09	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
3. For the transmitting duration, please refer to clause 7.1.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) and antennas had been tested, only the worst data was recorded in the report.


Note: Both antennas have been tested, only the worst data was recorded in the report.

## 8.1.2. 802.11g SISO MODE

### ANTENNA 1 TEST RESULTS (WORST CASE)

#### RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

#### PEAK

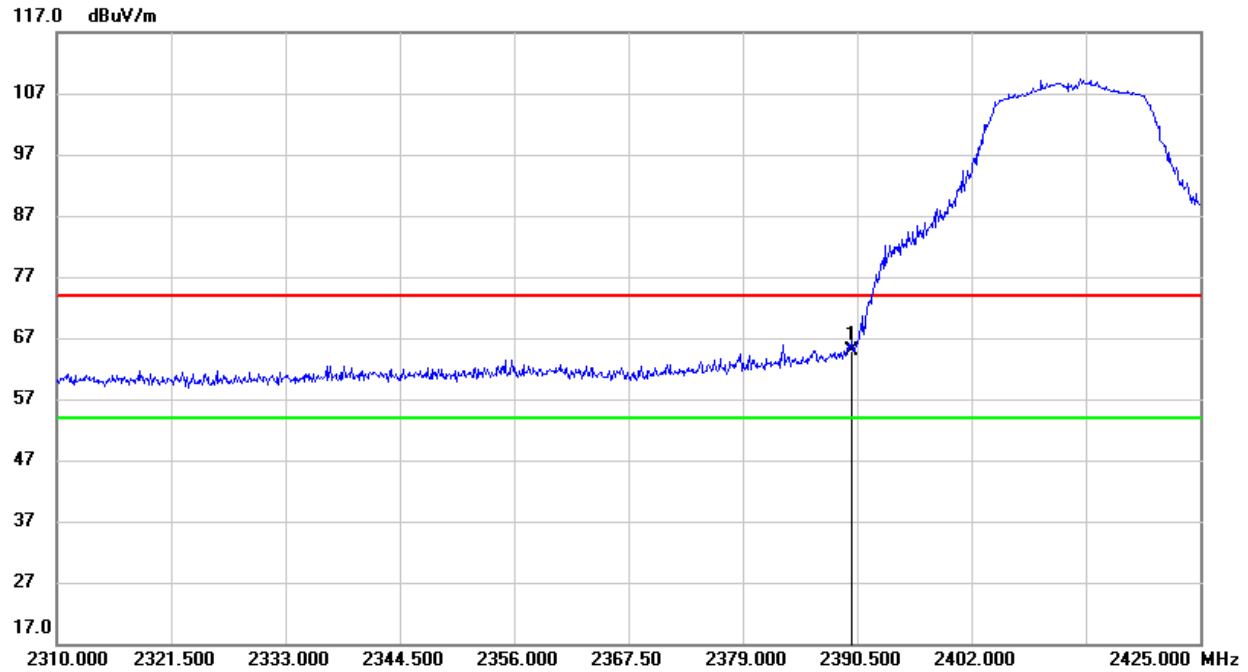


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	32.16	32.66	64.82	74.00	-9.18	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.


3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

### AVG

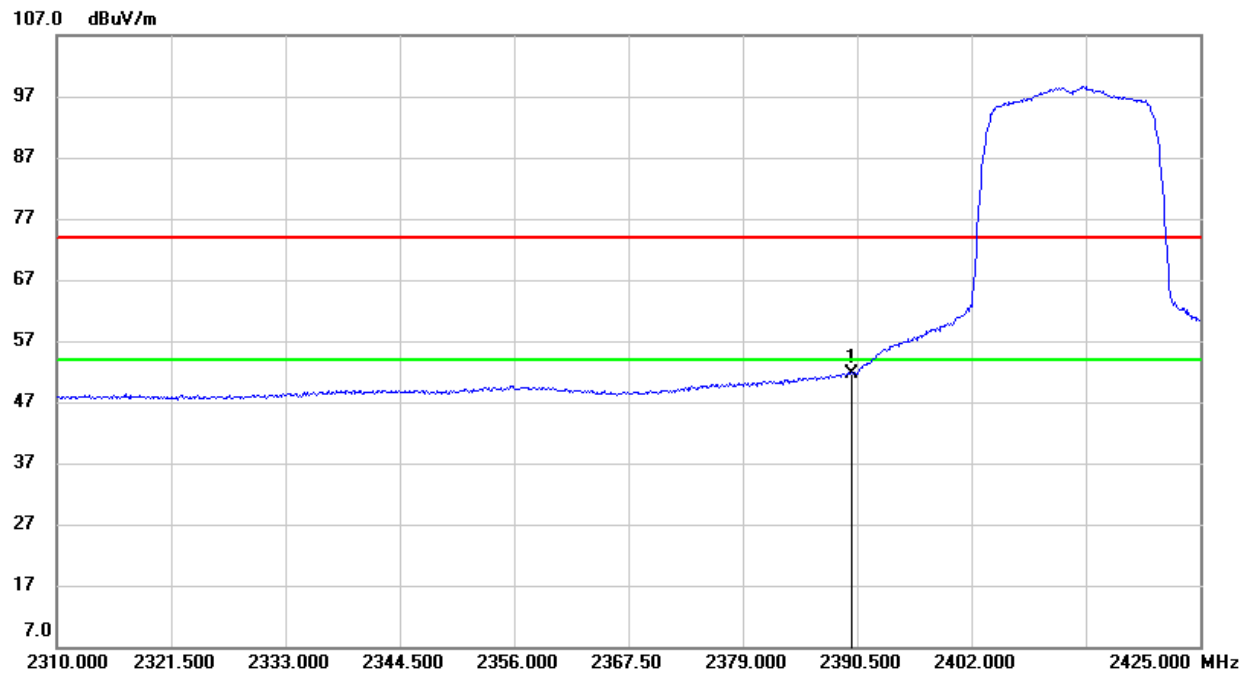

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	18.99	32.66	51.65	54.00	-2.35	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
3. For the transmitting duration, please refer to clause 7.1.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

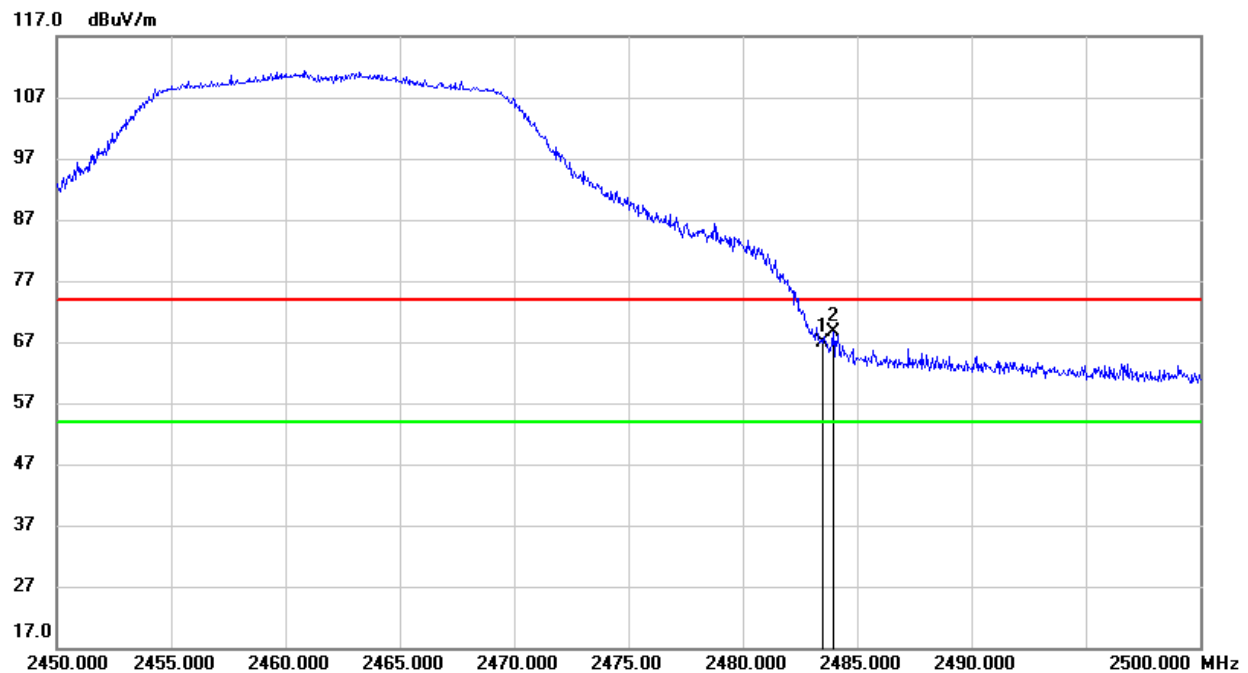**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)****PEAK**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	33.73	33.10	66.83	74.00	-7.17	peak
2	2483.950	35.55	33.10	68.65	74.00	-5.35	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

### AVG

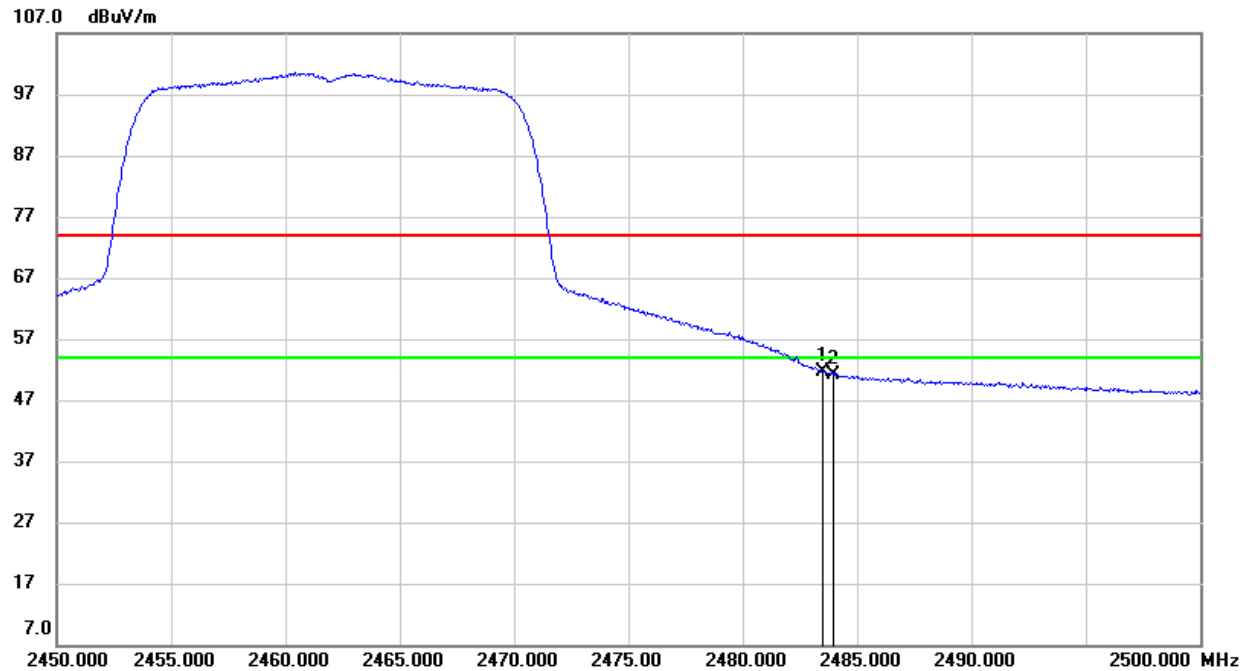

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.46	33.10	51.56	54.00	-2.44	AVG
2	2483.950	18.10	33.10	51.20	54.00	-2.80	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
3. For the transmitting duration, please refer to clause 7.1.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Note: All the polarities (Vertical & Horizontal) and antennas had been tested, only the worst data was recorded in the report.

Note: Both antennas have been tested, only the worst data was recorded in the report.

### 8.1.3. 802.11n HT20 MIMO MODE

#### RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

#### PEAK

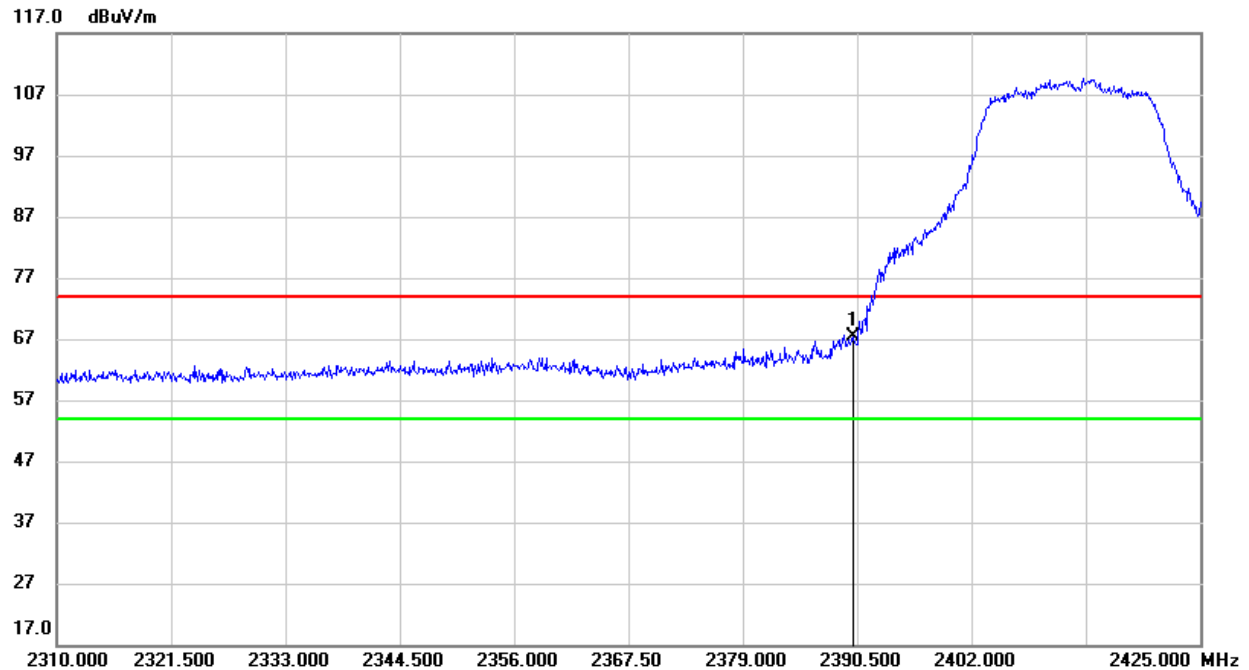


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	34.69	32.66	67.35	74.00	-6.65	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

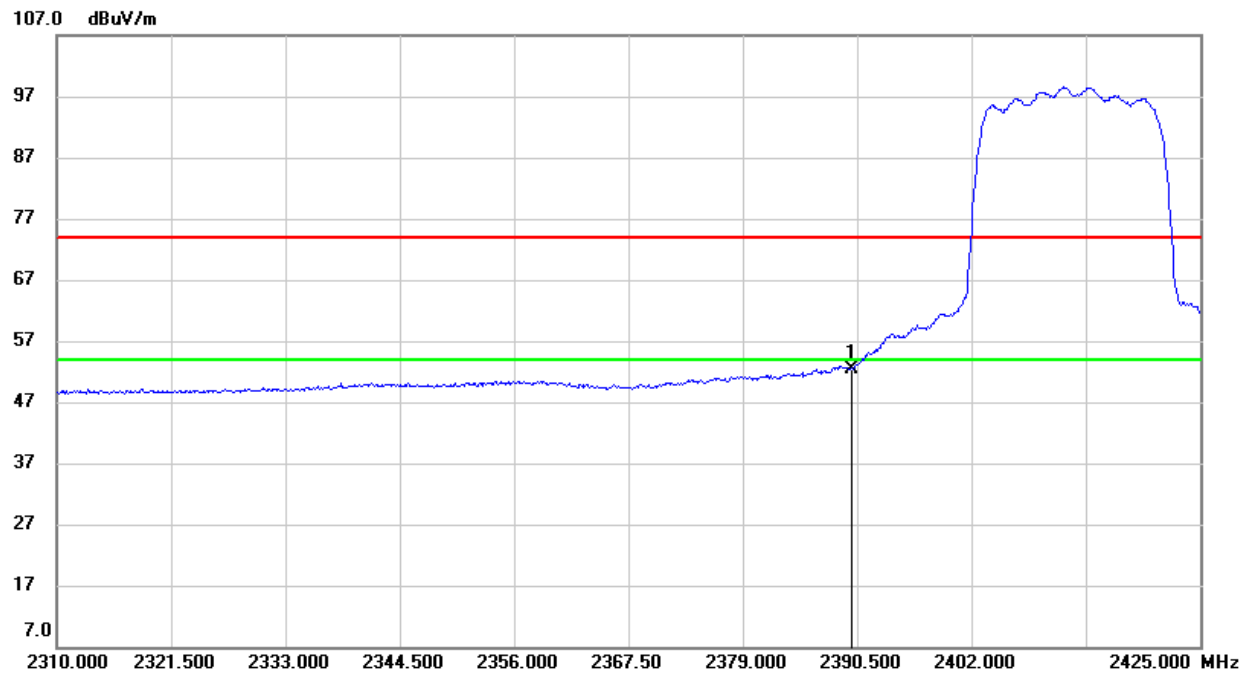**AVG**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	19.79	32.66	52.45	54.00	-1.55	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
3. For the transmitting duration, please refer to clause 7.1.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

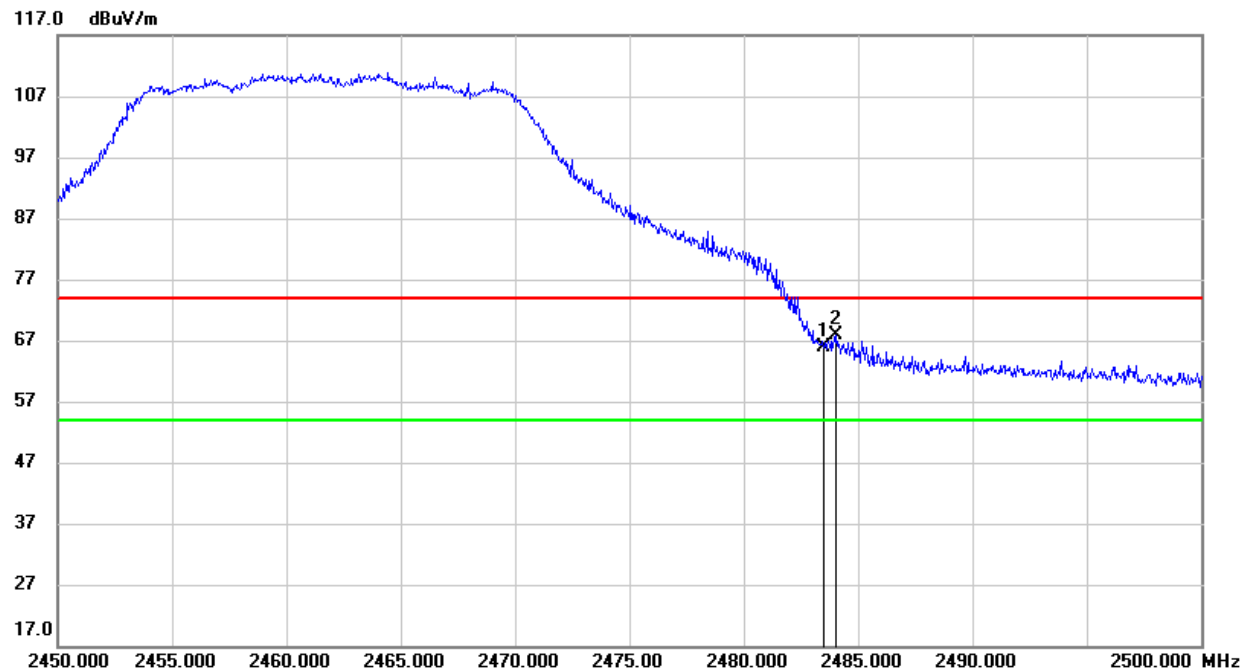**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	32.89	33.10	65.99	74.00	-8.01	peak
2	2484.050	34.70	33.10	67.80	74.00	-6.20	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



### AVG

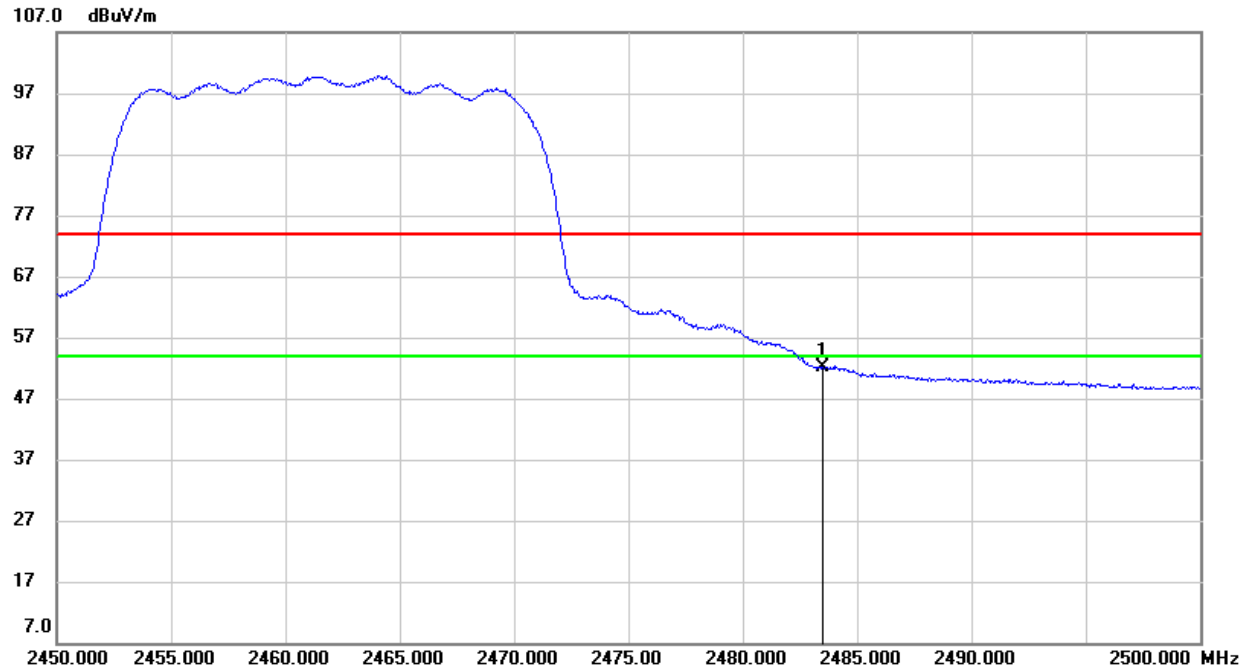

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.06	33.10	52.16	54.00	-1.84	AVG

Note: 1. Measurement = Reading Level + Correct Factor.

2. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.

3. For the transmitting duration, please refer to clause 7.1.


4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

# 8.1.4. 802.11n HT40 MIMO MODE

## RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

### PEAK

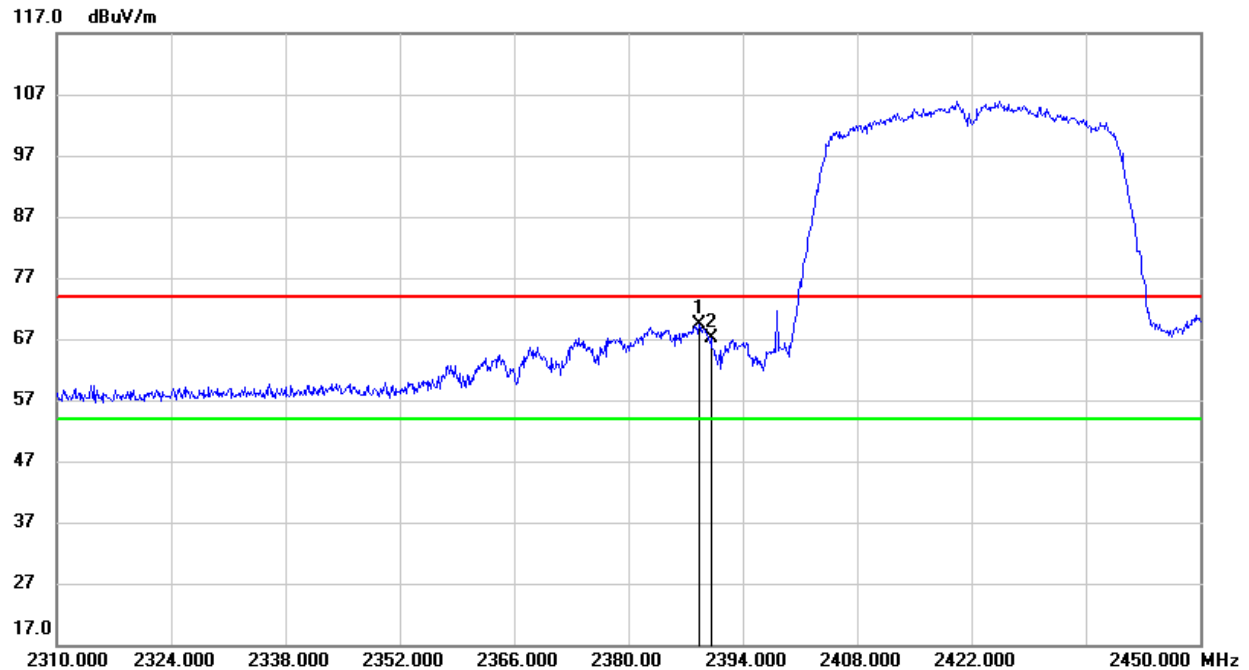


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.680	36.70	32.65	69.35	74.00	-4.65	peak
2	2390.000	34.50	32.66	67.16	74.00	-6.84	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

### AVG

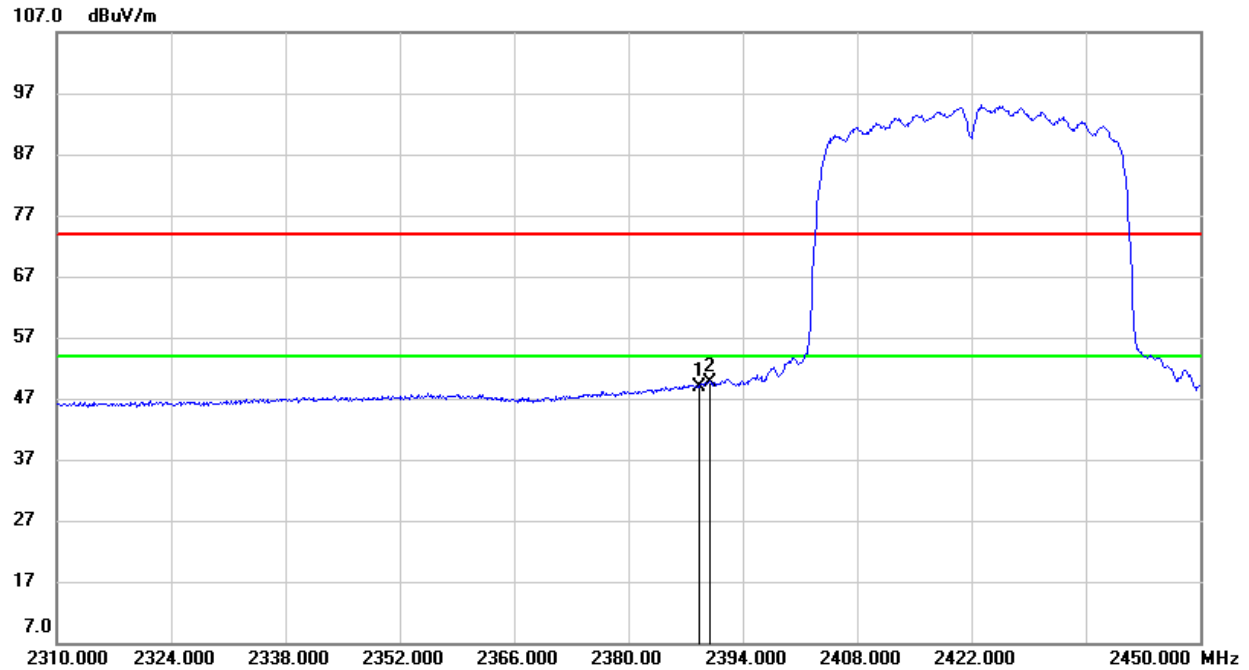


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.680	16.32	32.65	48.97	54.00	-5.03	AVG
2	2390.000	16.95	32.66	49.61	54.00	-4.39	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.  
3. For the transmitting duration, please refer to clause 7.1.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**


**PEAK**

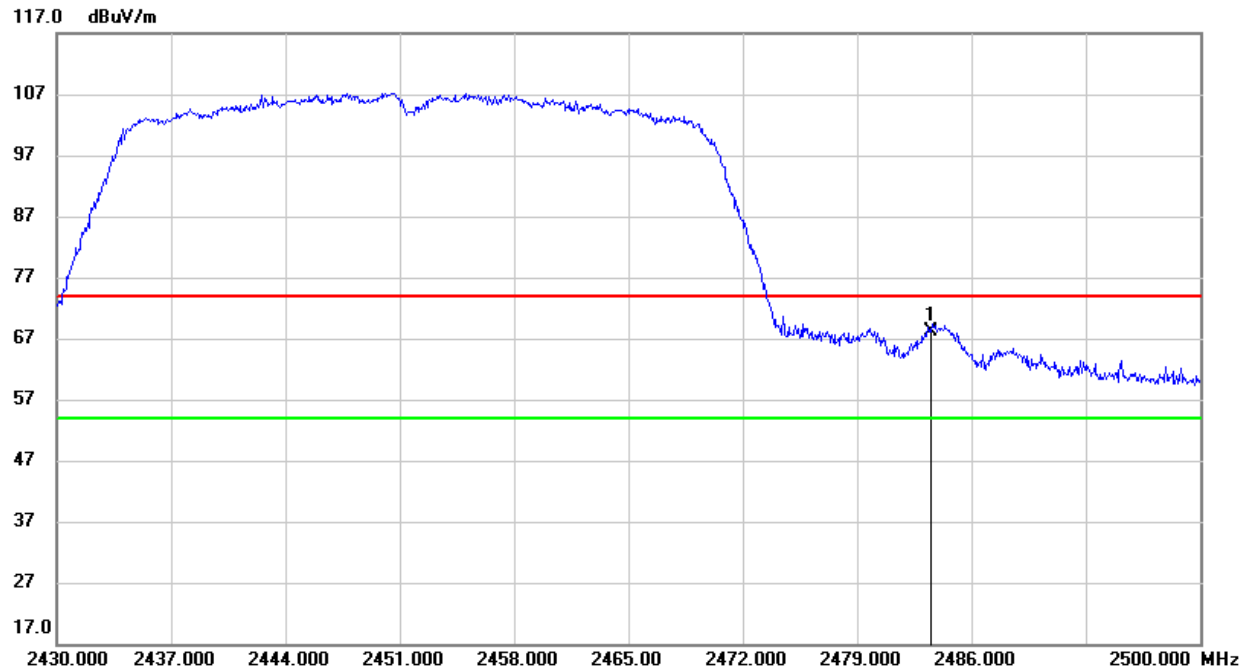

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.530	34.91	33.10	68.01	74.00	-5.99	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. Peak: Peak detector.  
 3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

### AVG

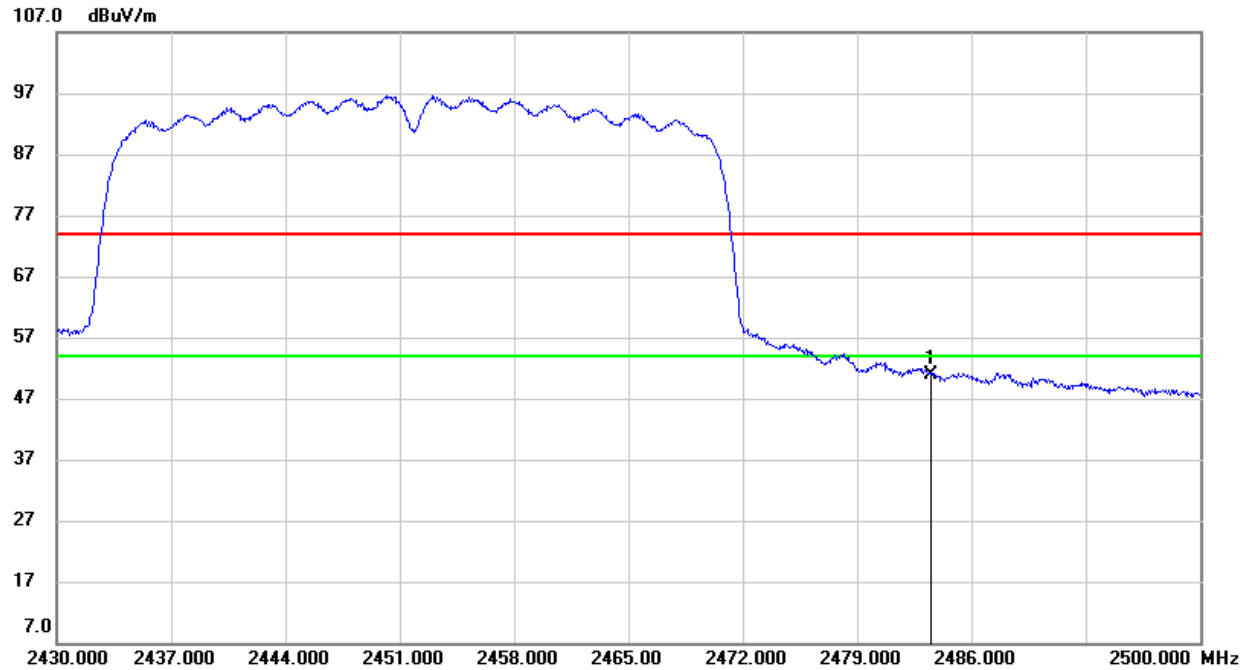

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.68	33.10	50.78	54.00	-3.22	AVG


Note: 1. Measurement = Reading Level + Correct Factor.  
2. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
3. For the transmitting duration, please refer to clause 7.1.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

### 8.1.5. 802.11ax HE20 MIMO MODE

#### RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

#### PEAK

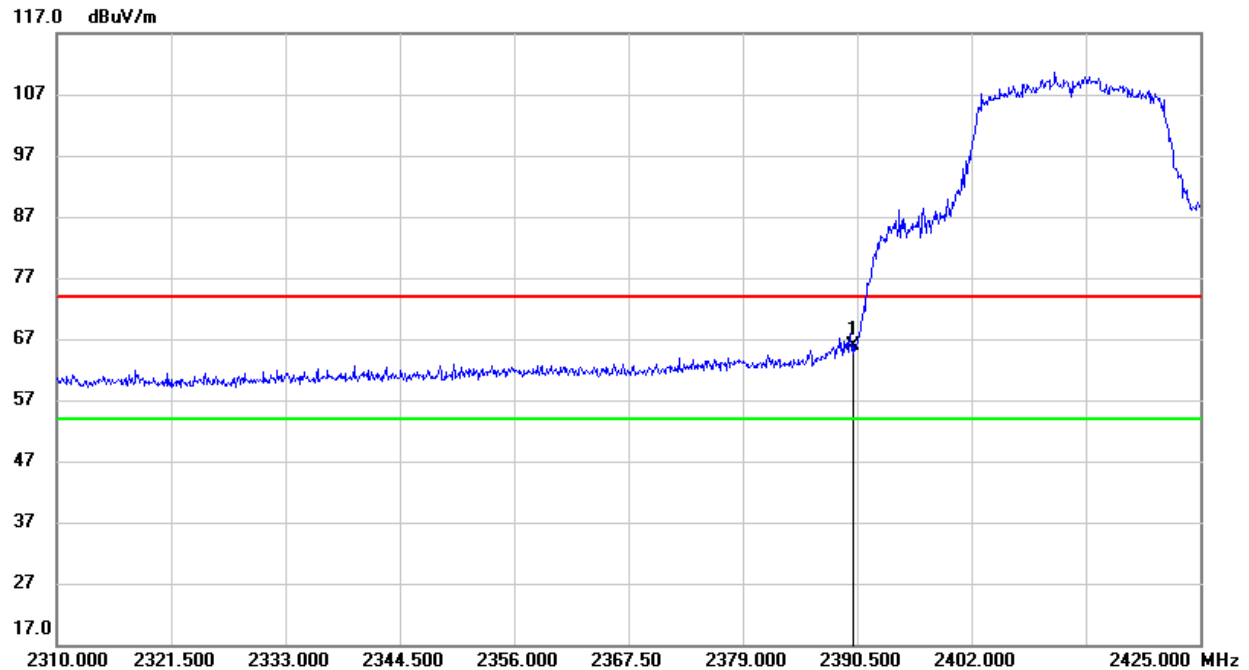


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	33.21	32.66	65.87	74.00	-8.13	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

### AVG

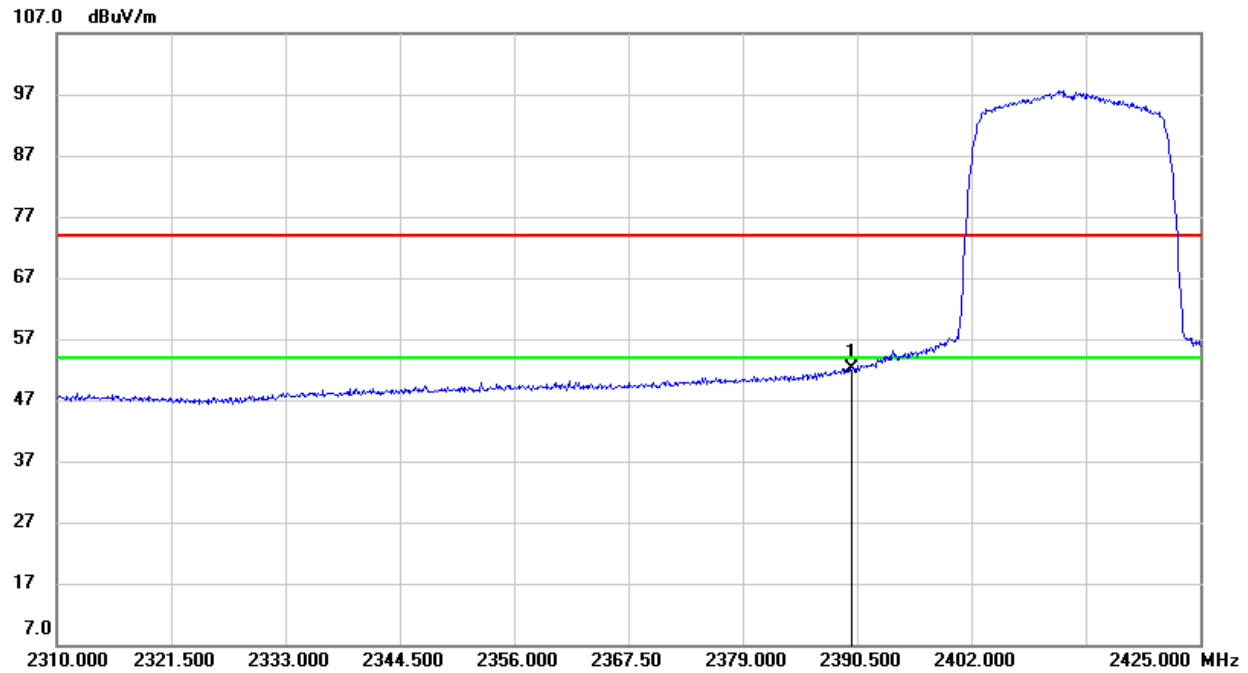


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	19.46	32.66	52.12	54.00	-1.88	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
3. For the transmitting duration, please refer to clause 7.1.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

# RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

## PEAK

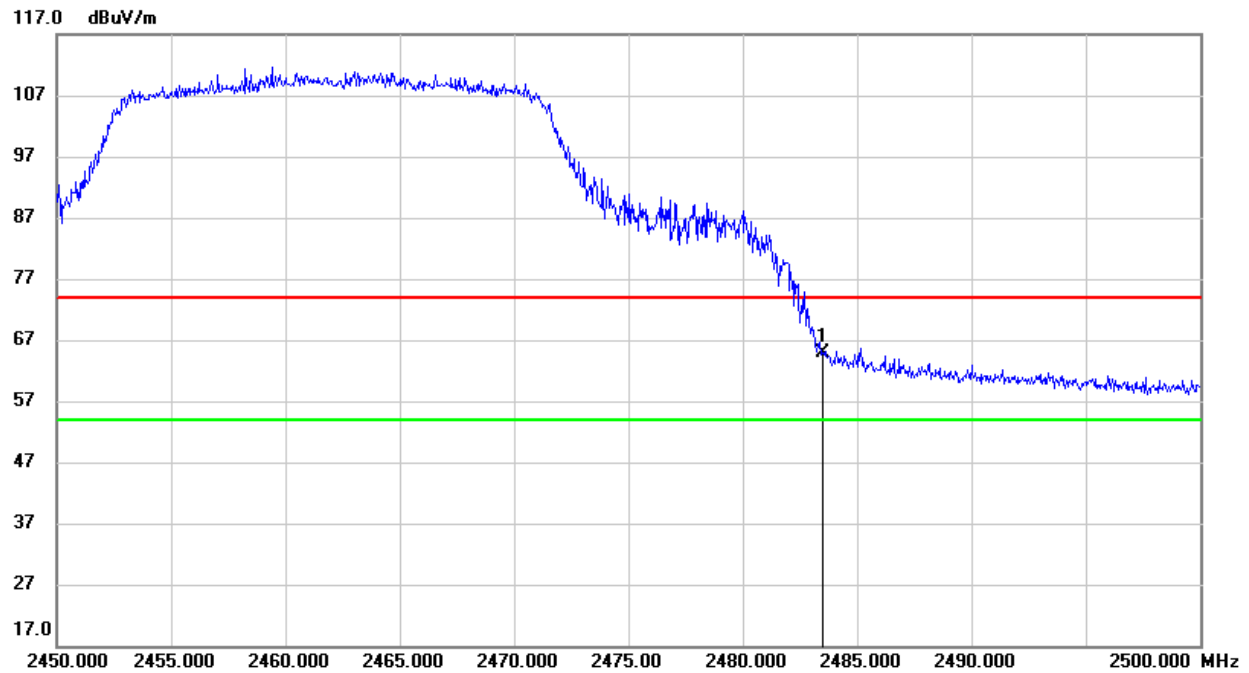

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	31.80	33.10	64.90	74.00	-9.10	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




### AVG

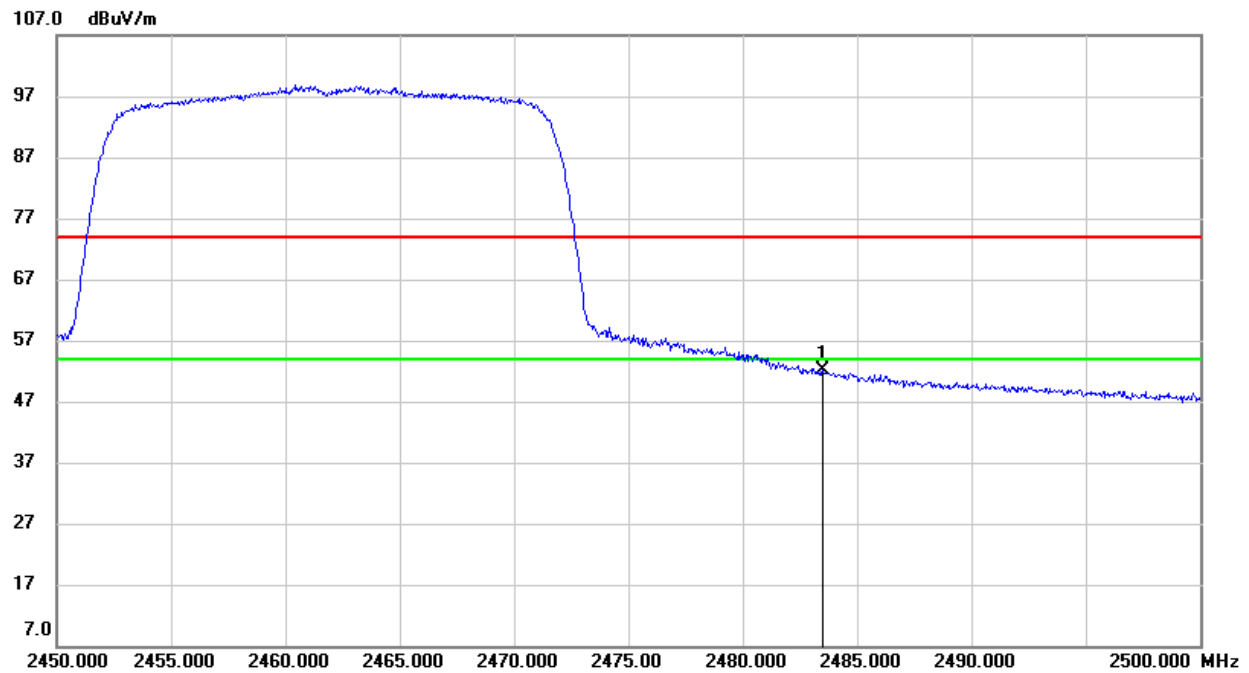

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.11	33.10	52.21	54.00	-1.79	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
3. For the transmitting duration, please refer to clause 7.1.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

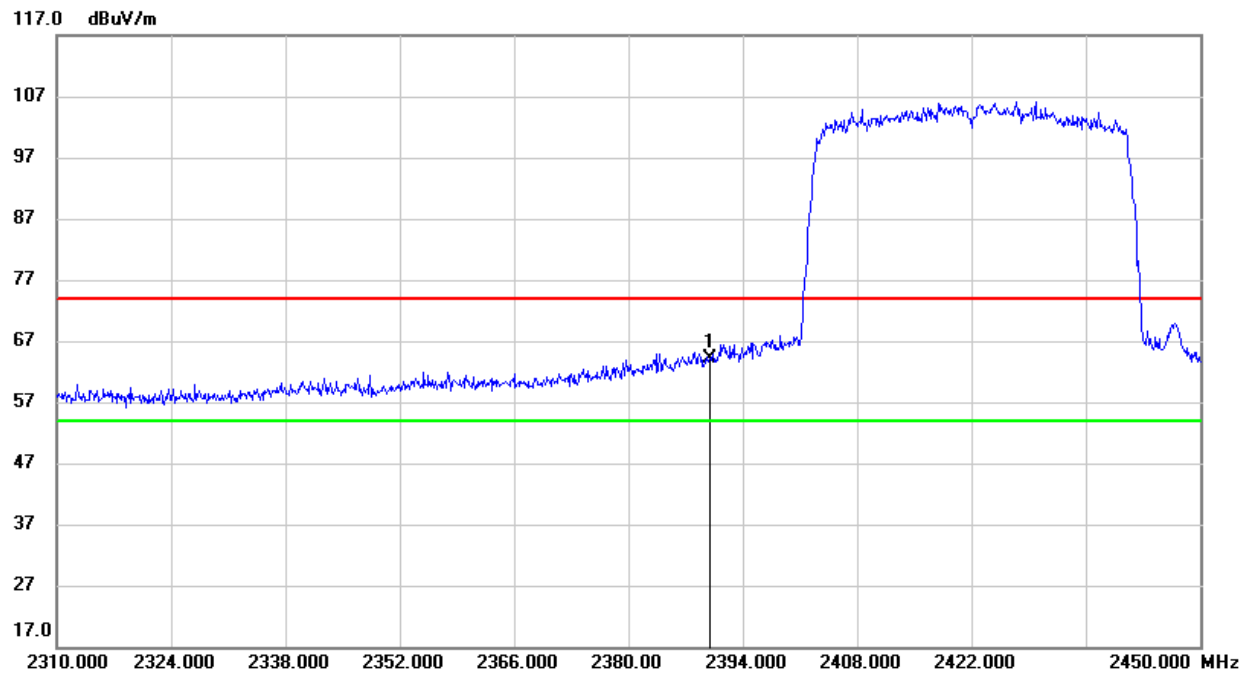**8.1.6. 802.11ax HE40 MIMO MODE****RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	31.53	32.66	64.19	74.00	-9.81	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




**AVG**

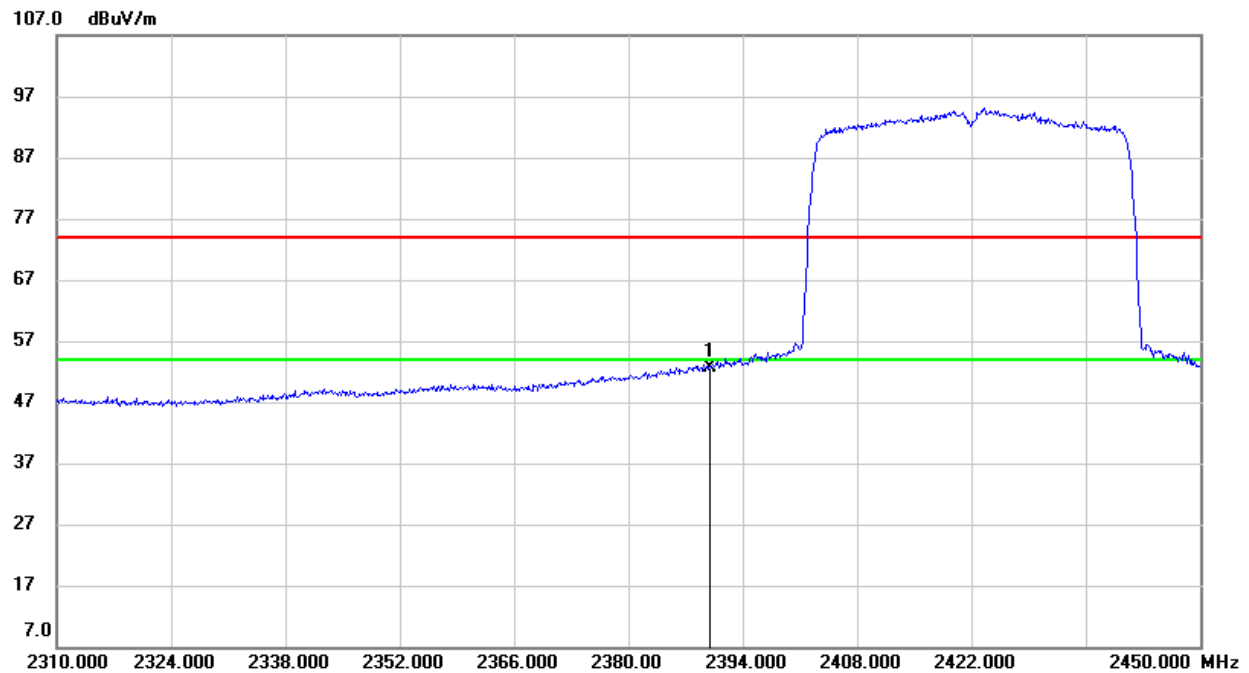

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	19.88	32.66	52.54	54.00	-1.46	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
3. For the transmitting duration, please refer to clause 7.1.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

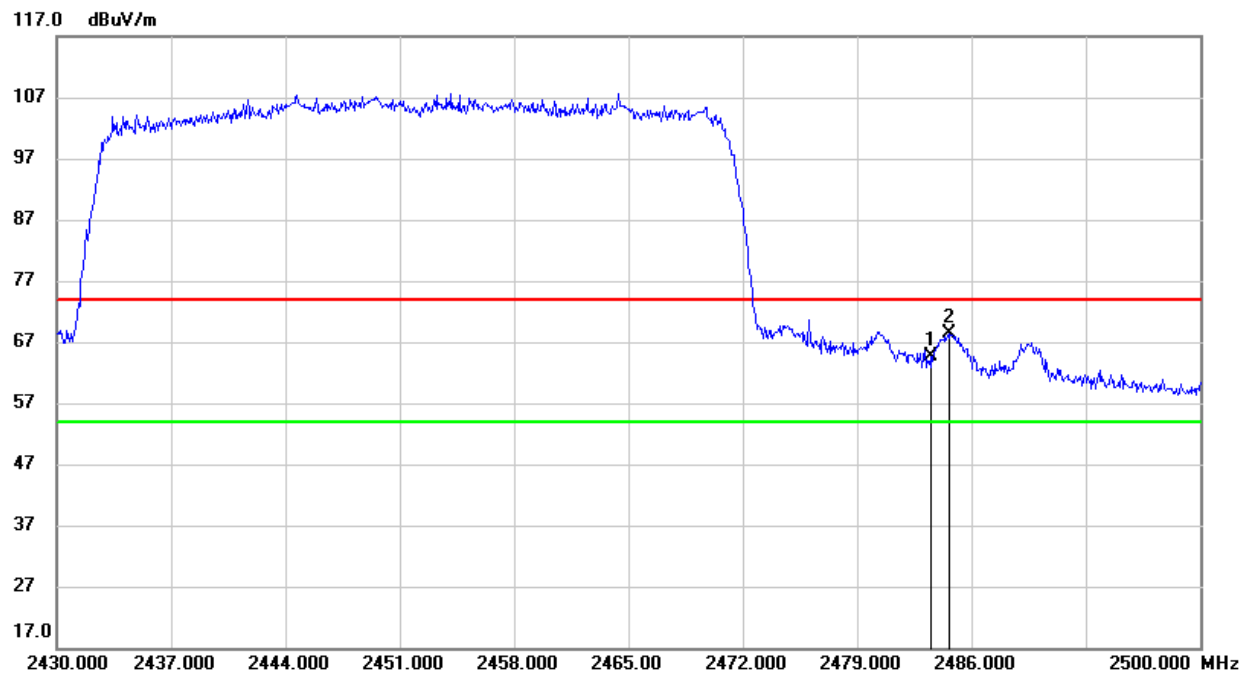**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)****PEAK**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	31.59	33.10	64.69	74.00	-9.31	peak
2	2484.670	35.36	33.10	68.46	74.00	-5.54	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

### AVG

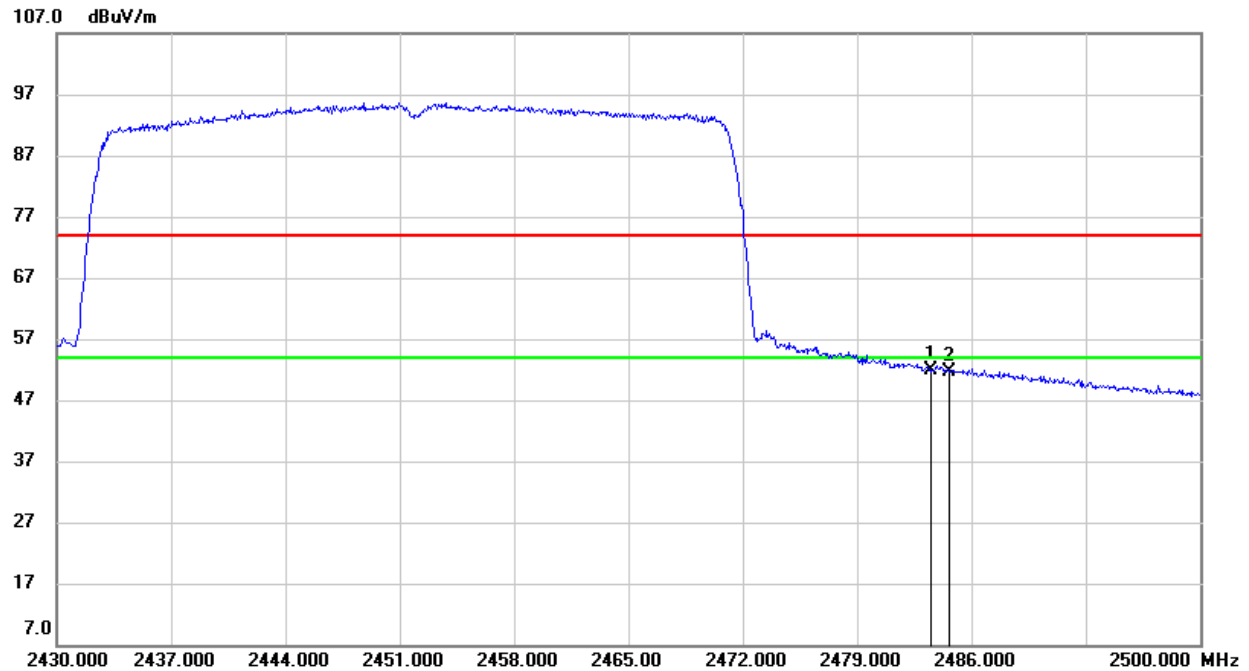

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.85	33.10	51.95	54.00	-2.05	AVG
2	2484.670	18.57	33.10	51.67	54.00	-2.33	AVG


Note: 1. Measurement = Reading Level + Correct Factor.  
2. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
3. For the transmitting duration, please refer to clause 7.1.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

## 8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)

### 8.2.1. 802.11 b MIMO MODE


#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

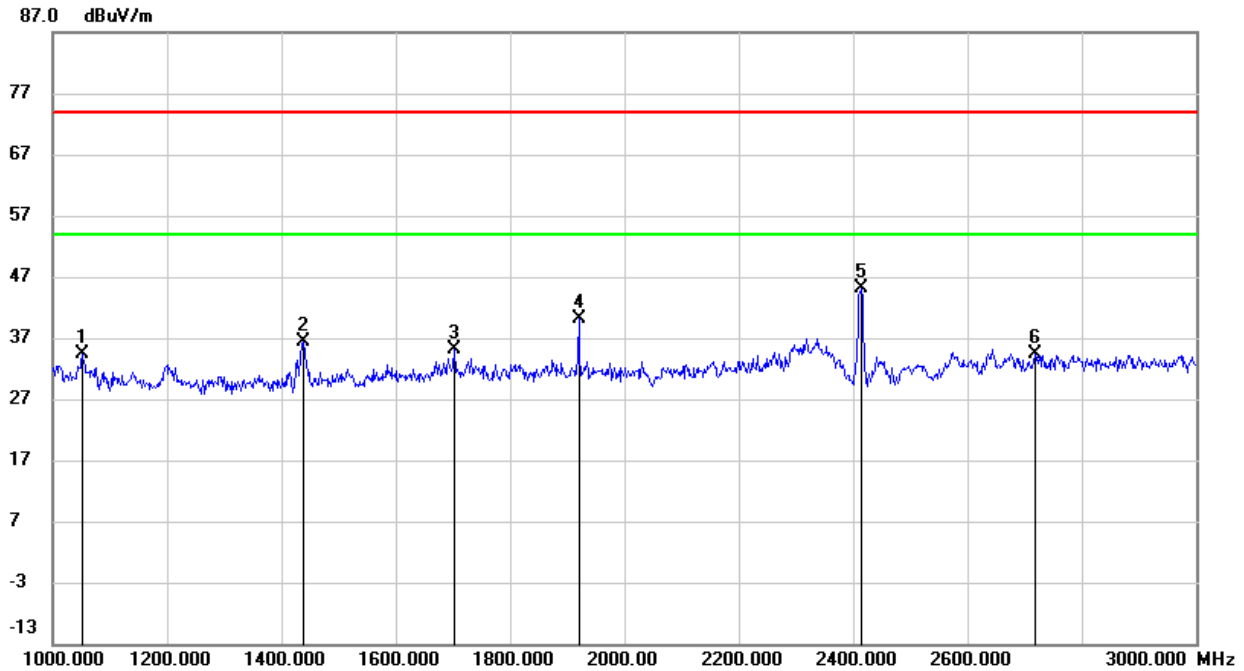

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1052.000	49.12	-14.71	34.41	74.00	-39.59	peak
2	1438.000	49.27	-12.81	36.46	74.00	-37.54	peak
3	1702.000	46.40	-11.21	35.19	74.00	-38.81	peak
4	1920.000	50.96	-10.81	40.15	74.00	-33.85	peak
5	2414.000	54.08	-8.91	45.17	74.00	-28.83	peak
6	2718.000	42.42	-8.04	34.38	74.00	-39.62	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

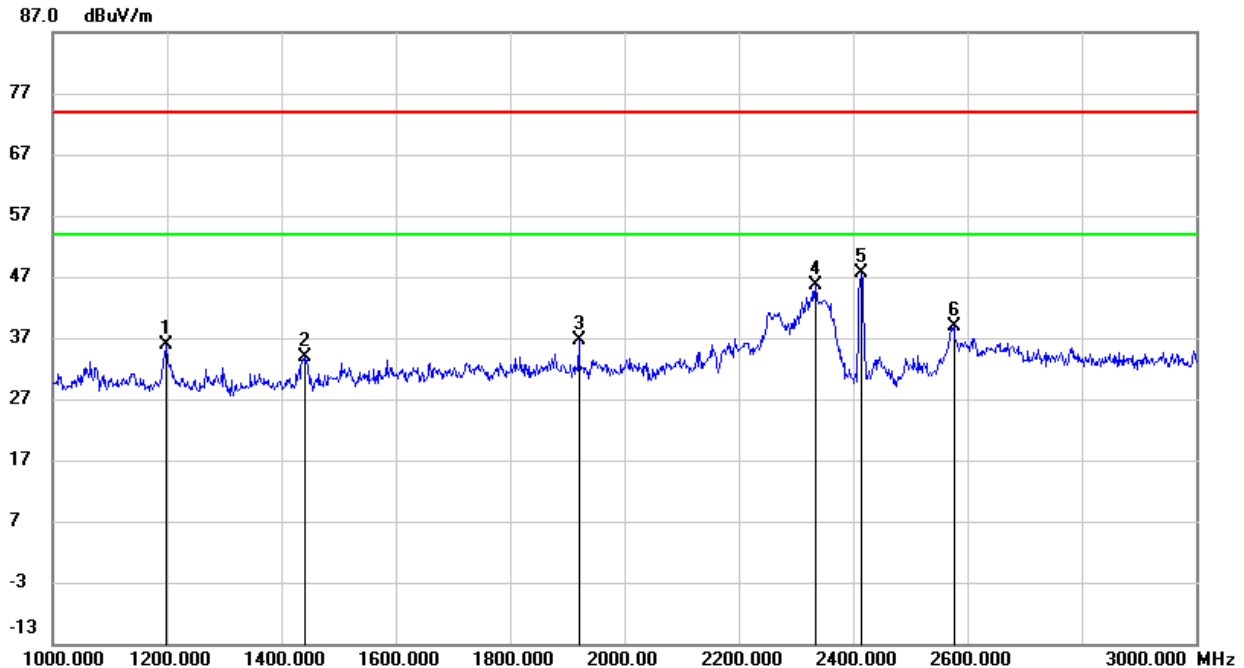

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1198.000	49.50	-13.73	35.77	74.00	-38.23	peak
2	1440.000	46.68	-12.79	33.89	74.00	-40.11	peak
3	1920.000	47.37	-10.81	36.56	74.00	-37.44	peak
4	2334.000	54.90	-9.20	45.70	74.00	-28.30	peak
5	2414.000	56.57	-8.91	47.66	74.00	-26.34	peak
6	2576.000	47.41	-8.61	38.80	74.00	-35.20	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

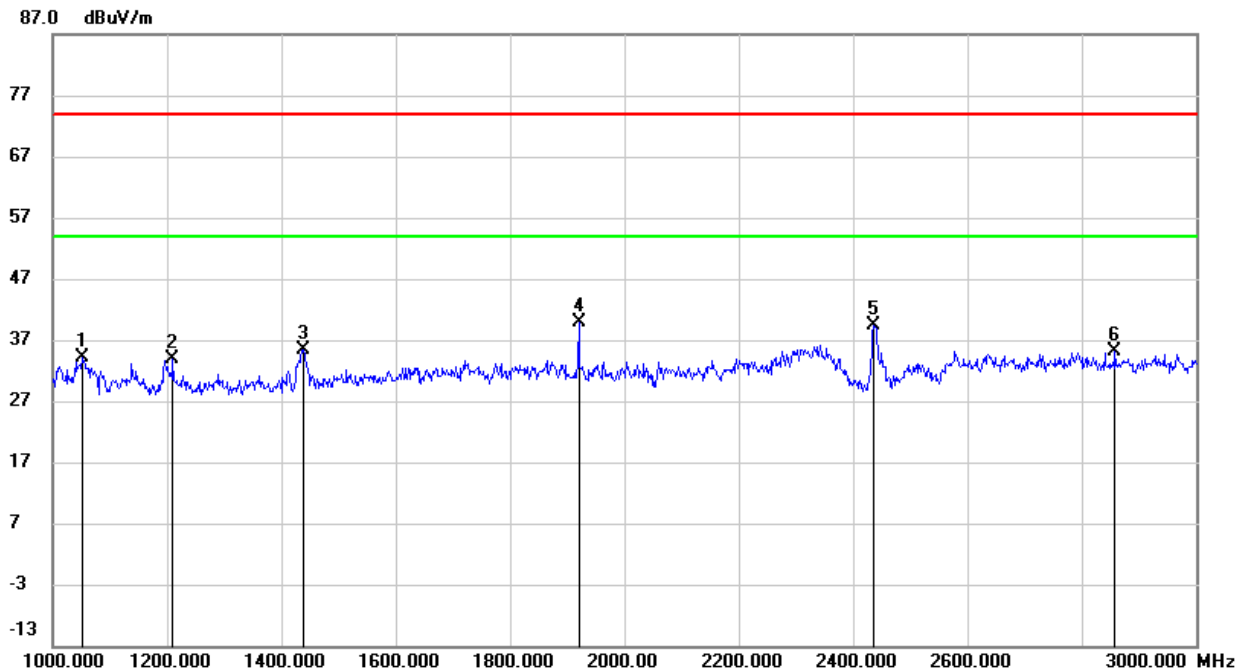**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1052.000	48.79	-14.71	34.08	74.00	-39.92	peak
2	1210.000	47.68	-13.68	34.00	74.00	-40.00	peak
3	1438.000	48.27	-12.81	35.46	74.00	-38.54	peak
4	1920.000	50.79	-10.81	39.98	74.00	-34.02	peak
5	2436.000	48.15	-8.87	39.28	74.00	-34.72	peak
6	2858.000	42.53	-7.52	35.01	74.00	-38.99	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

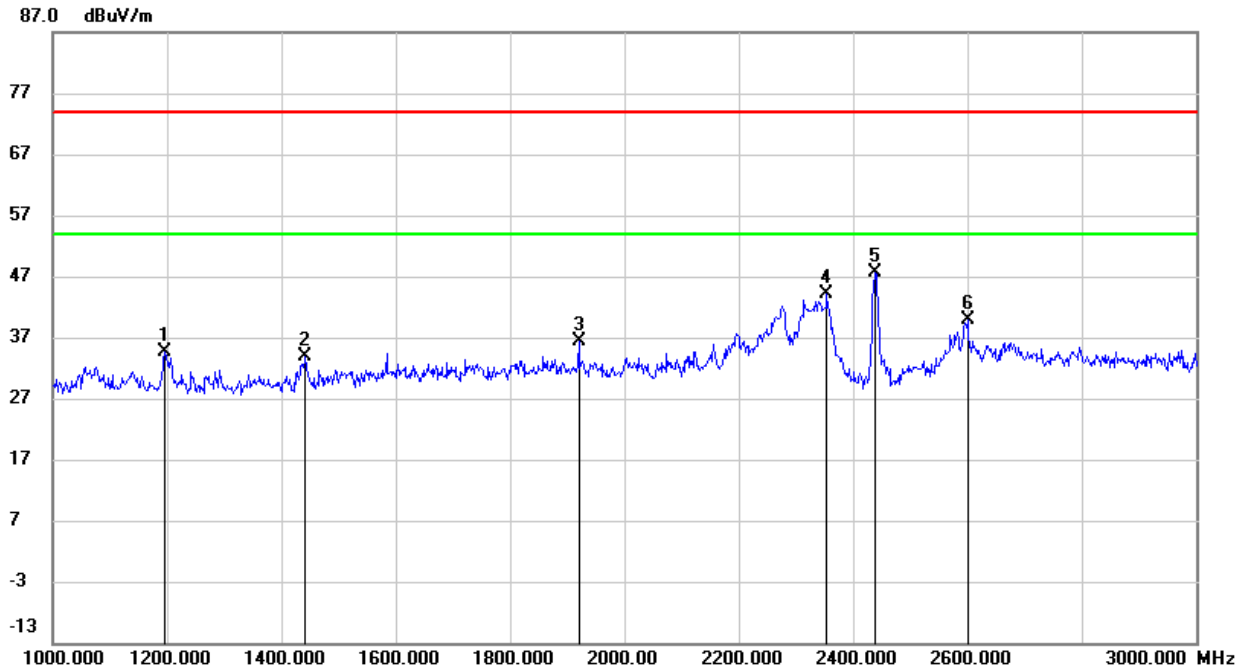


**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1196.000	48.26	-13.73	34.53	74.00	-39.47	peak
2	1442.000	46.76	-12.79	33.97	74.00	-40.03	peak
3	1920.000	47.14	-10.81	36.33	74.00	-37.67	peak
4	2354.000	53.16	-9.12	44.04	74.00	-29.96	peak
5	2438.000	56.61	-8.86	47.75	74.00	-26.25	peak
6	2600.000	48.43	-8.57	39.86	74.00	-34.14	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

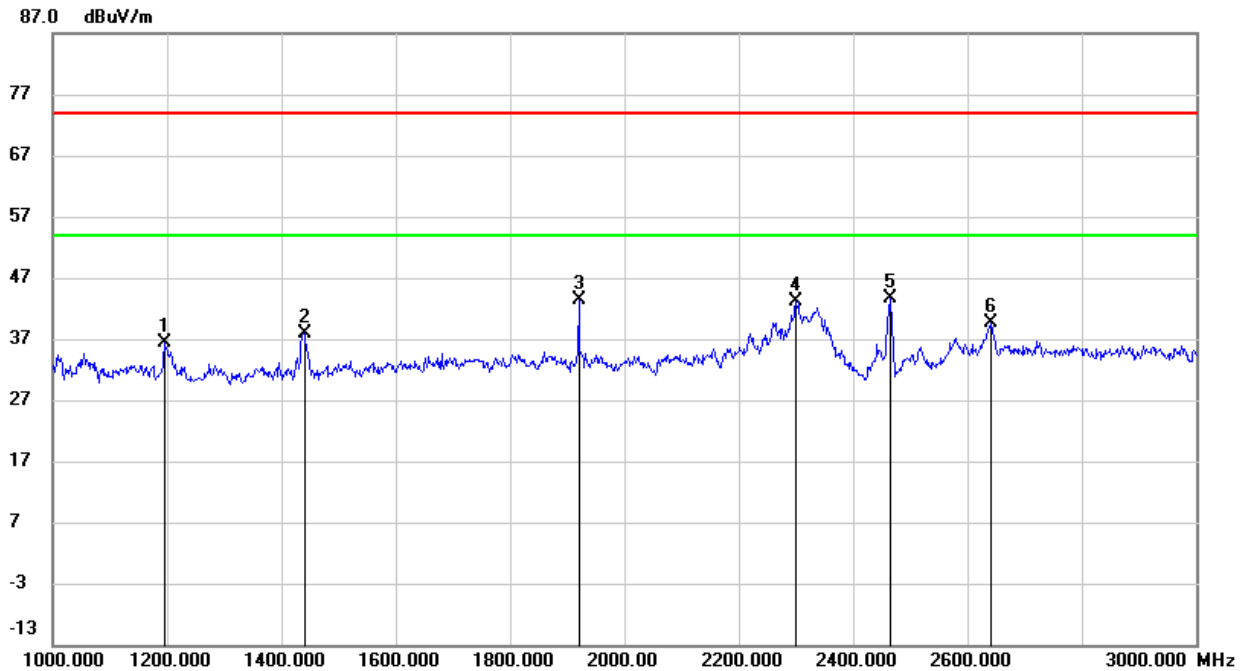

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1196.000	50.05	-13.73	36.32	74.00	-37.68	peak
2	1440.000	50.79	-12.79	38.00	74.00	-36.00	peak
3	1920.000	54.08	-10.81	43.27	74.00	-30.73	peak
4	2300.000	52.34	-9.33	43.01	74.00	-30.99	peak
5	2464.000	52.47	-8.80	43.67	74.00	-30.33	peak
6	2642.000	47.99	-8.38	39.61	74.00	-34.39	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
  5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

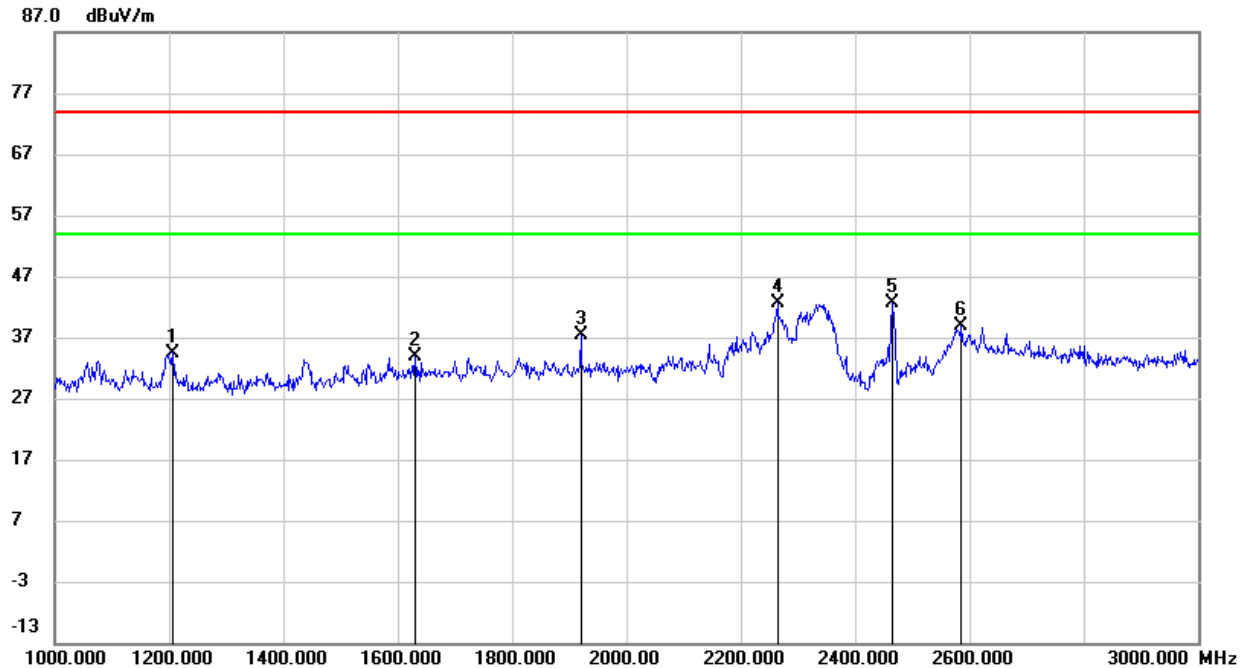**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1206.000	48.19	-13.69	34.50	74.00	-39.50	peak
2	1630.000	45.56	-11.66	33.90	74.00	-40.10	peak
3	1920.000	48.07	-10.81	37.26	74.00	-36.74	peak
4	2264.000	52.02	-9.47	42.55	74.00	-31.45	peak
5	2464.000	51.41	-8.80	42.61	74.00	-31.39	peak
6	2586.000	47.38	-8.60	38.78	74.00	-35.22	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


Note: All modes and channels have been tested, only the worst data was recorded in the report.

### 8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)

#### 8.3.1. 802.11b SISO MODE

##### ANTENNA 1 TEST RESULTS (WORST CASE)

##### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

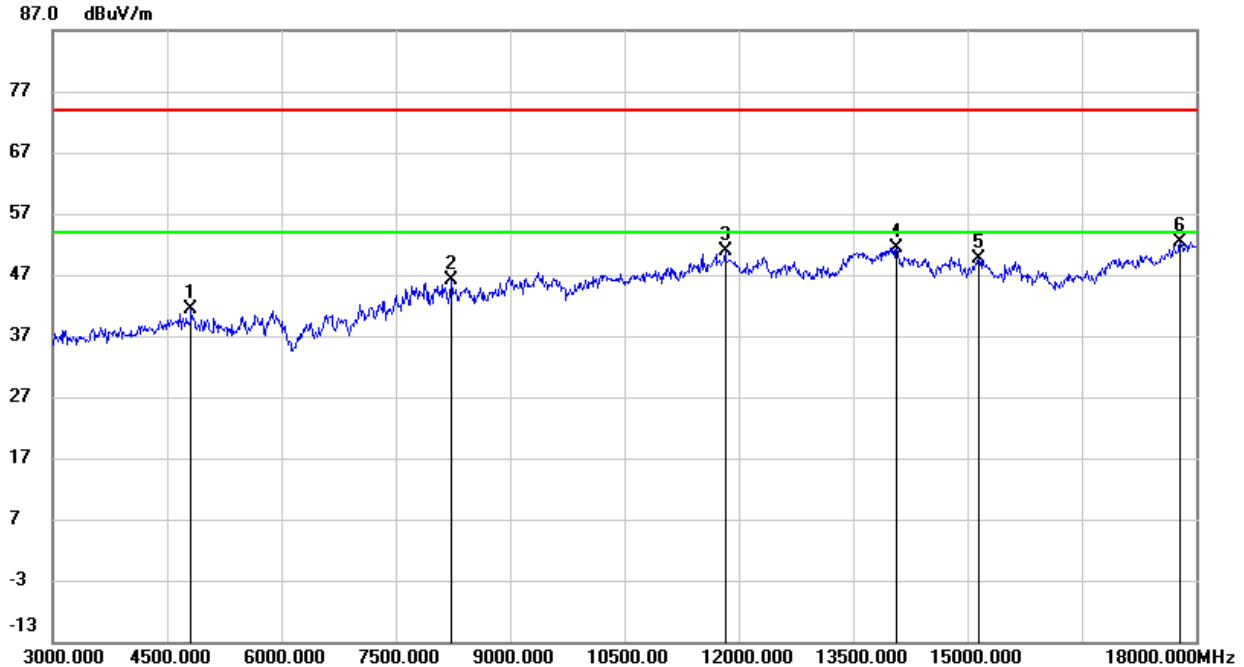

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	41.83	-0.37	41.46	74.00	-32.54	peak
2	8235.000	38.58	7.67	46.25	74.00	-27.75	peak
3	11820.000	33.88	16.92	50.80	74.00	-23.20	peak
4	14070.000	30.43	21.01	51.44	74.00	-22.56	peak
5	15150.000	33.16	16.53	49.69	74.00	-24.31	peak
6	17790.000	27.97	24.43	52.40	74.00	-21.60	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

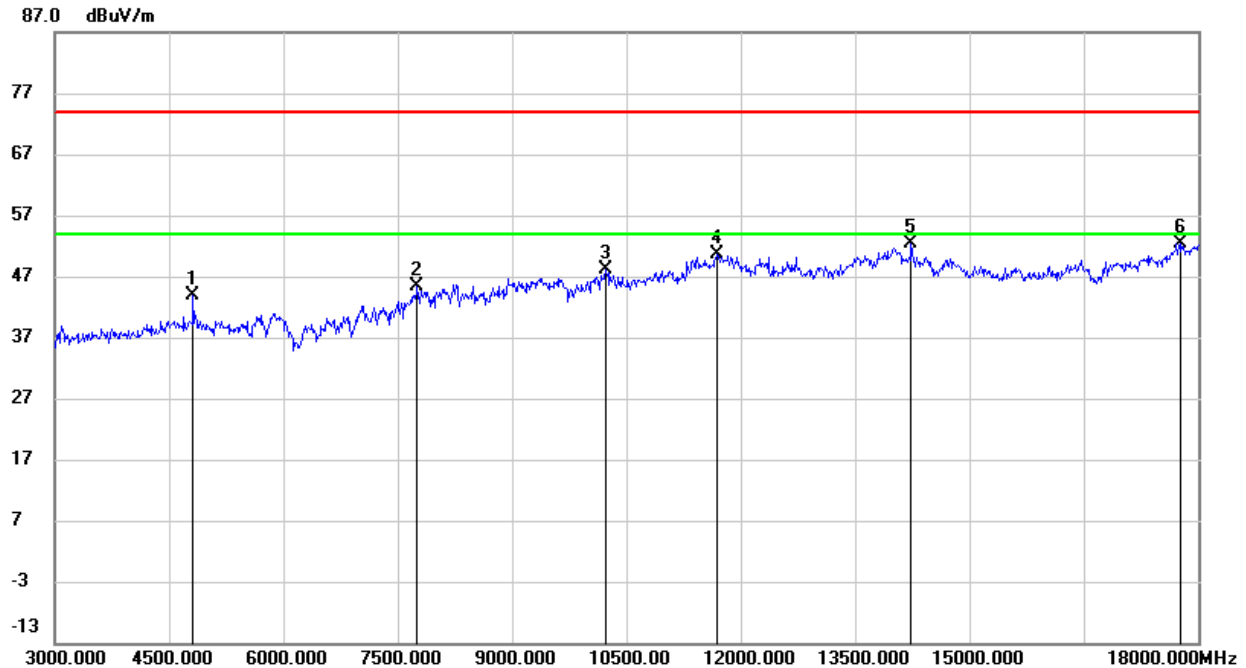

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	44.32	-0.37	43.95	74.00	-30.05	peak
2	7755.000	38.49	6.80	45.29	74.00	-28.71	peak
3	10230.000	36.47	11.73	48.20	74.00	-25.80	peak
4	11685.000	33.84	16.76	50.60	74.00	-23.40	peak
5	14235.000	31.71	20.71	52.42	74.00	-21.58	peak
6	17775.000	28.13	24.31	52.44	74.00	-21.56	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

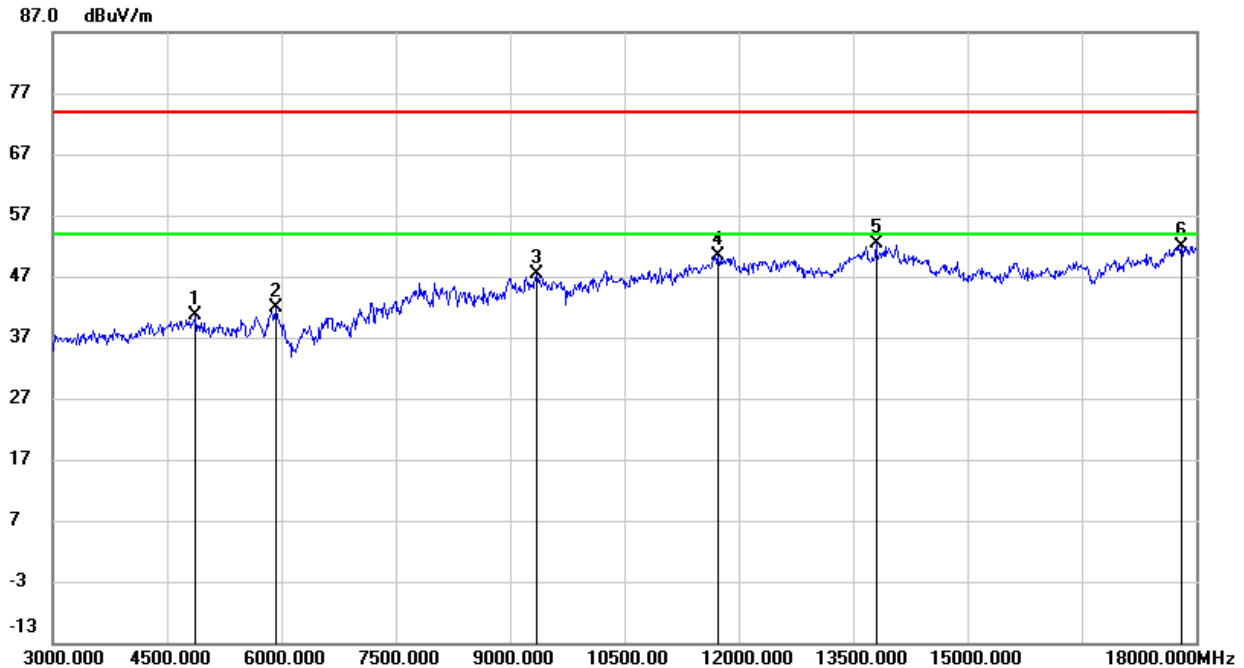

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	41.25	-0.52	40.73	74.00	-33.27	peak
2	5925.000	39.46	2.48	41.94	74.00	-32.06	peak
3	9345.000	37.39	9.96	47.35	74.00	-26.65	peak
4	11730.000	33.47	16.86	50.33	74.00	-23.67	peak
5	13800.000	31.26	21.15	52.41	74.00	-21.59	peak
6	17805.000	27.29	24.53	51.82	74.00	-22.18	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

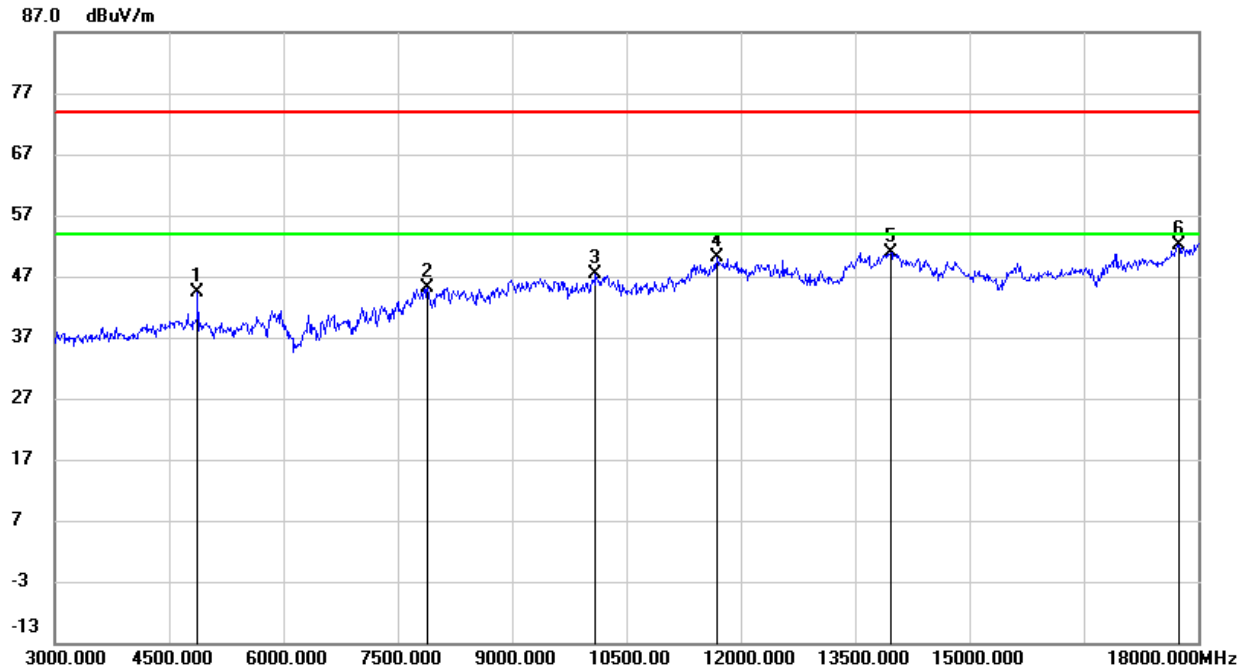**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.82	-0.52	44.30	74.00	-29.70	peak
2	7890.000	38.42	6.67	45.09	74.00	-28.91	peak
3	10095.000	35.96	11.37	47.33	74.00	-26.67	peak
4	11685.000	33.27	16.76	50.03	74.00	-23.97	peak
5	13965.000	29.55	21.37	50.92	74.00	-23.08	peak
6	17745.000	28.01	24.06	52.07	74.00	-21.93	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

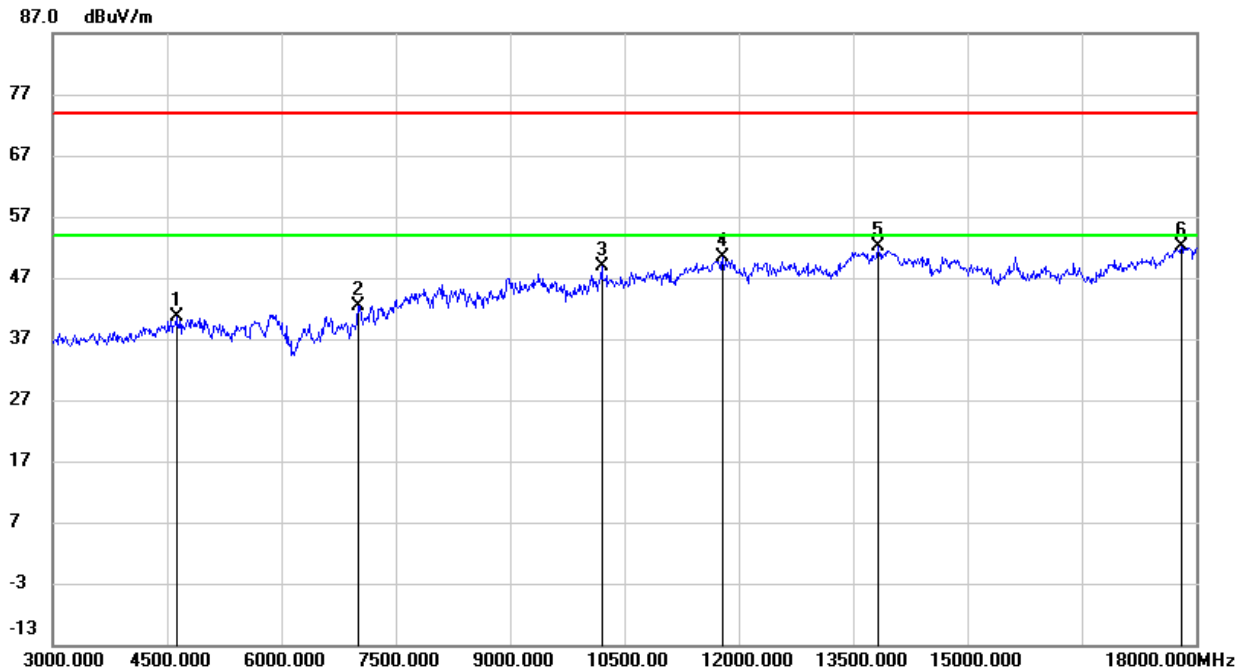

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4620.000	41.74	-1.21	40.53	74.00	-33.47	peak
2	7005.000	36.57	5.80	42.37	74.00	-31.63	peak
3	10200.000	37.24	11.67	48.91	74.00	-25.09	peak
4	11790.000	33.55	16.85	50.40	74.00	-23.60	peak
5	13830.000	30.96	21.16	52.12	74.00	-21.88	peak
6	17805.000	27.61	24.53	52.14	74.00	-21.86	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

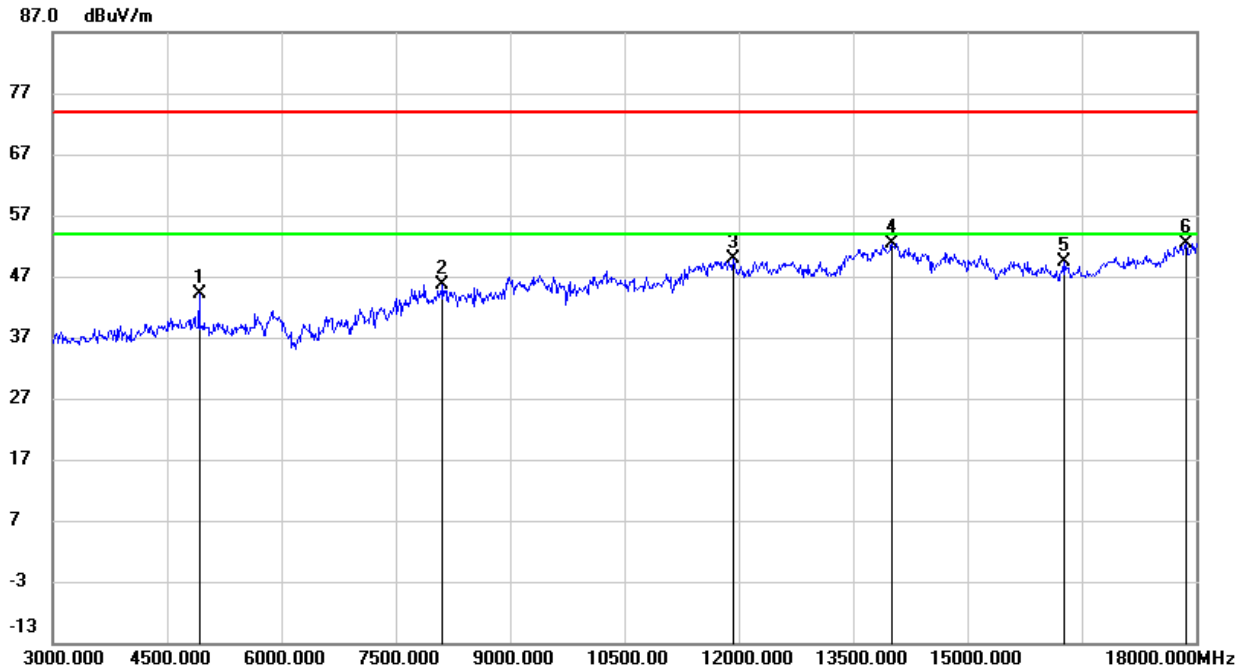

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	44.70	-0.45	44.25	74.00	-29.75	peak
2	8115.000	37.75	7.92	45.67	74.00	-28.33	peak
3	11925.000	32.53	17.24	49.77	74.00	-24.23	peak
4	14010.000	31.06	21.40	52.46	74.00	-21.54	peak
5	16260.000	32.04	17.44	49.48	74.00	-24.52	peak
6	17865.000	27.82	24.59	52.41	74.00	-21.59	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All modes and channels have been tested, only the worst data was recorded in the report.

Note: Both antennas have been tested, only the worst data was recorded in the report.

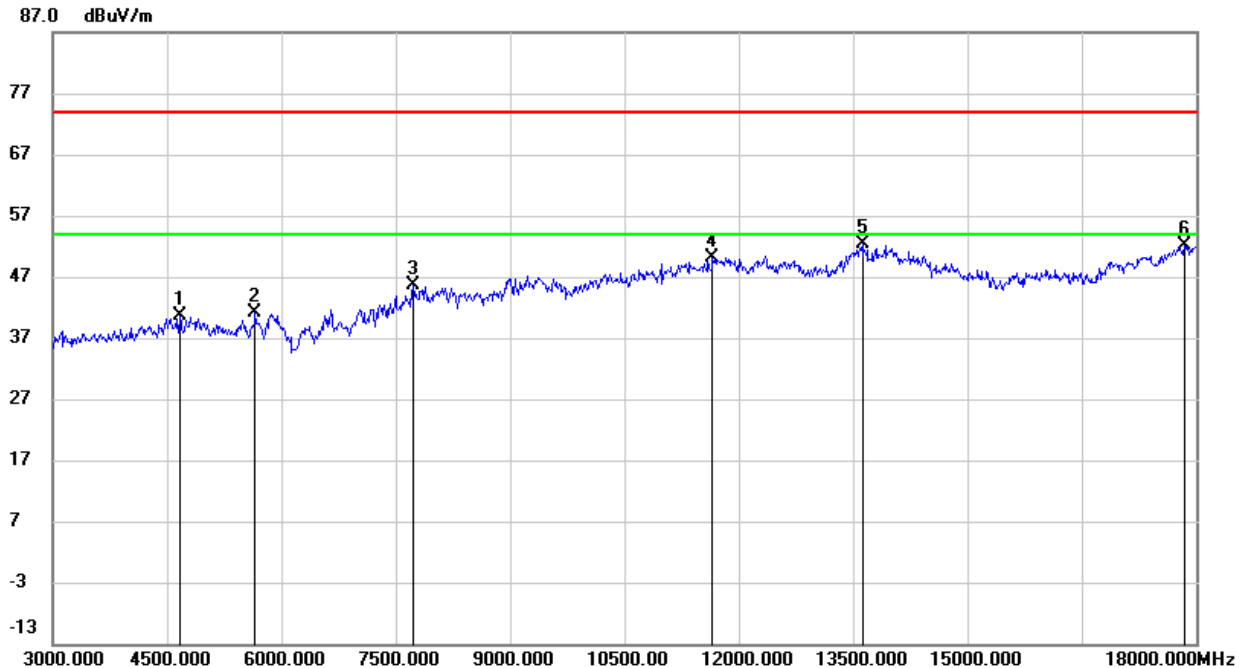**8.3.2. 802.11g SISO MODE****ANTENNA 1 TEST RESULTS (WORST CASE)****HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4665.000	41.98	-1.27	40.71	74.00	-33.29	peak
2	5655.000	39.87	1.26	41.13	74.00	-32.87	peak
3	7725.000	39.04	6.55	45.59	74.00	-28.41	peak
4	11655.000	33.51	16.54	50.05	74.00	-23.95	peak
5	13620.000	31.77	20.51	52.28	74.00	-21.72	peak
6	17850.000	27.43	24.58	52.01	74.00	-21.99	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

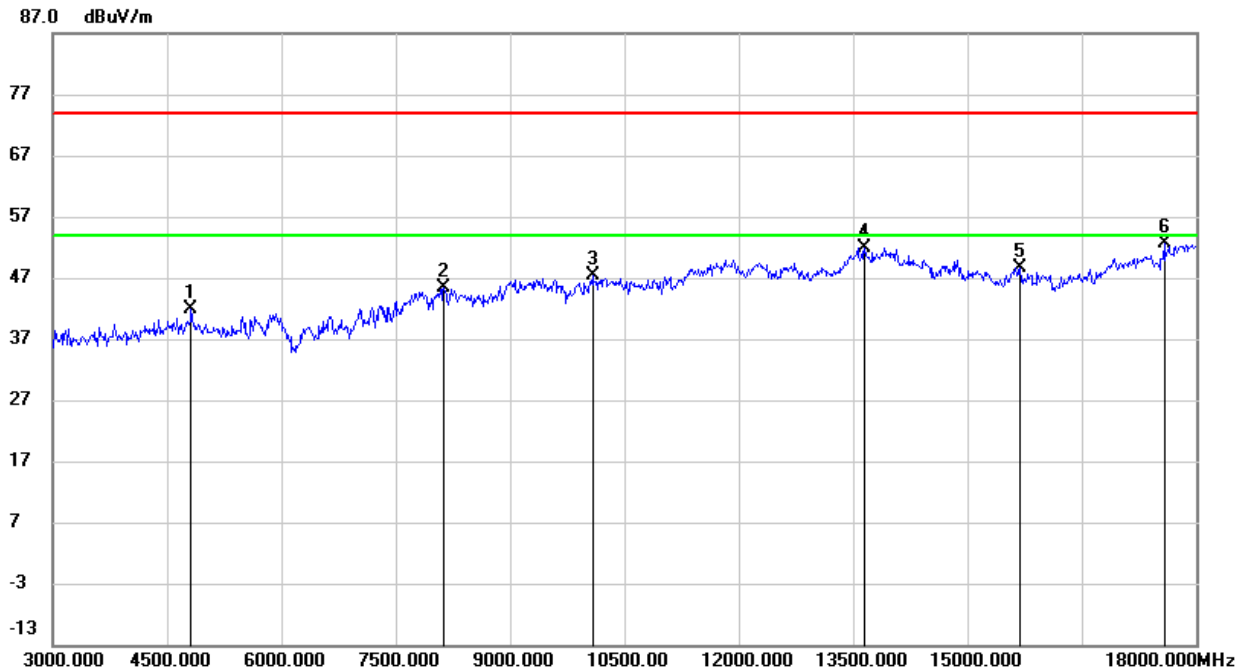**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	42.27	-0.37	41.90	74.00	-32.10	peak
2	8130.000	37.43	7.87	45.30	74.00	-28.70	peak
3	10080.000	36.00	11.35	47.35	74.00	-26.65	peak
4	13650.000	31.25	20.70	51.95	74.00	-22.05	peak
5	15690.000	32.28	16.41	48.69	74.00	-25.31	peak
6	17580.000	30.24	22.48	52.72	74.00	-21.28	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

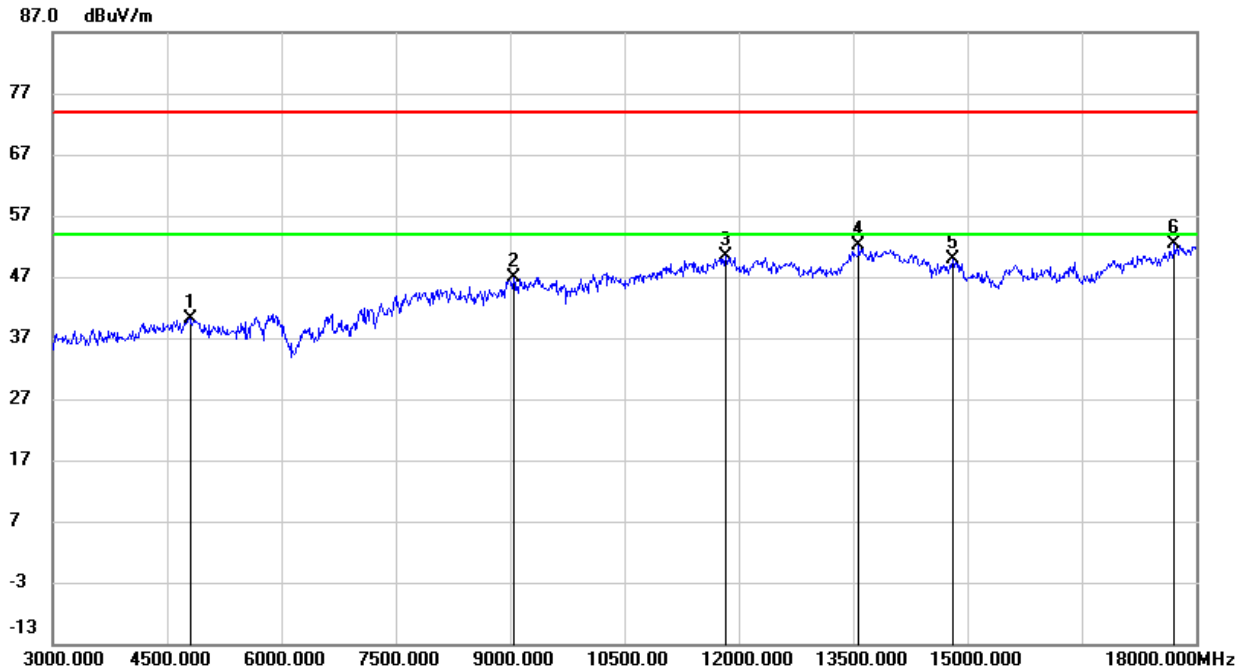

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	40.42	-0.33	40.09	74.00	-33.91	peak
2	9045.000	37.08	9.72	46.80	74.00	-27.20	peak
3	11820.000	33.34	16.92	50.26	74.00	-23.74	peak
4	13575.000	31.67	20.39	52.06	74.00	-21.94	peak
5	14805.000	31.36	18.45	49.81	74.00	-24.19	peak
6	17715.000	28.61	23.81	52.42	74.00	-21.58	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

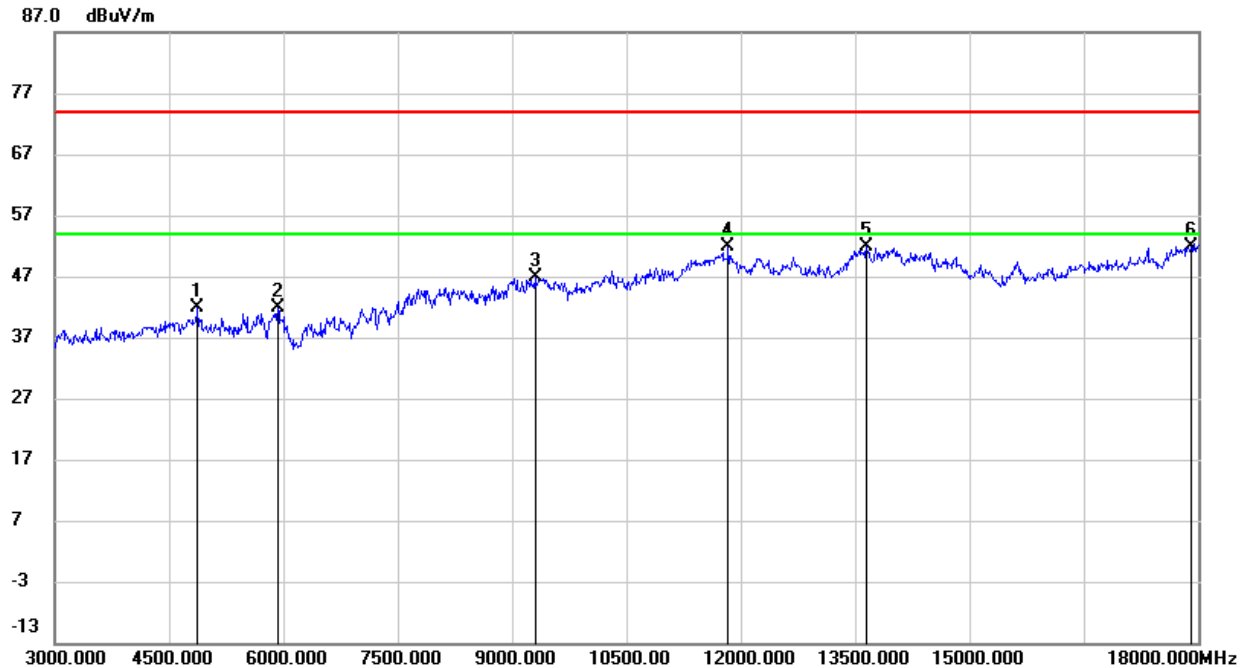

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	42.38	-0.52	41.86	74.00	-32.14	peak
2	5925.000	39.33	2.48	41.81	74.00	-32.19	peak
3	9300.000	37.15	9.65	46.80	74.00	-27.20	peak
4	11835.000	34.88	16.98	51.86	74.00	-22.14	peak
5	13650.000	31.09	20.70	51.79	74.00	-22.21	peak
6	17910.000	27.22	24.70	51.92	74.00	-22.08	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

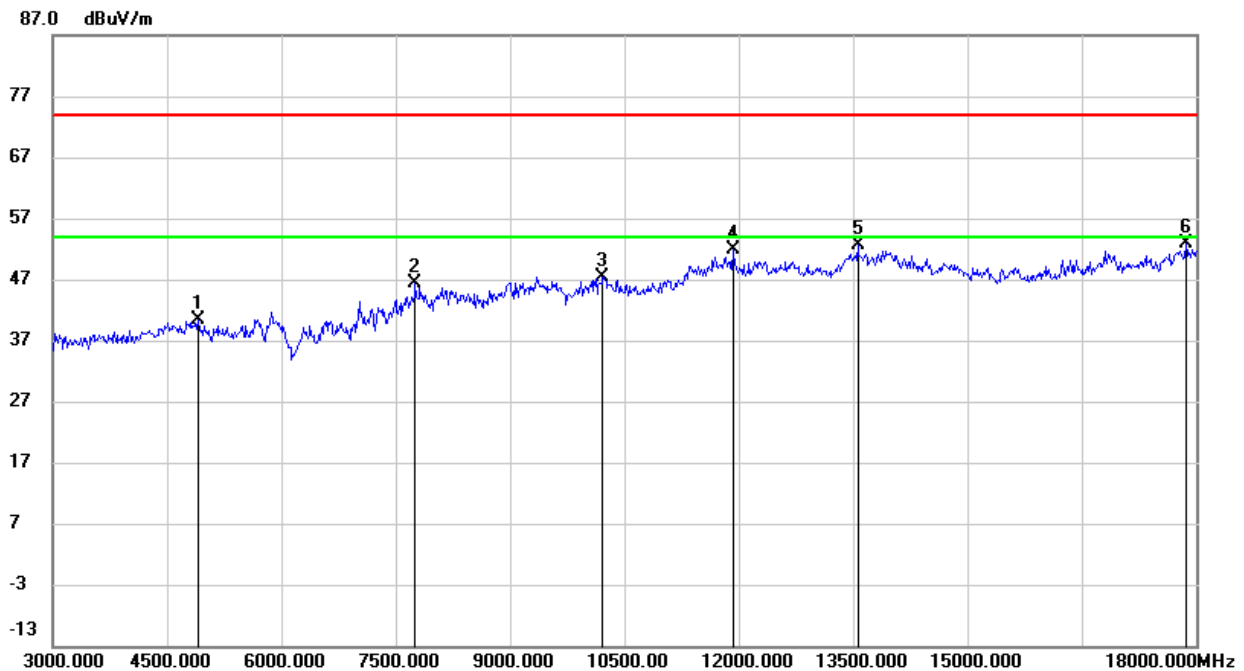**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	40.96	-0.55	40.41	74.00	-33.59	peak
2	7755.000	39.46	6.80	46.26	74.00	-27.74	peak
3	10215.000	35.77	11.70	47.47	74.00	-26.53	peak
4	11925.000	34.58	17.24	51.82	74.00	-22.18	peak
5	13560.000	32.22	20.40	52.62	74.00	-21.38	peak
6	17865.000	28.19	24.59	52.78	74.00	-21.22	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

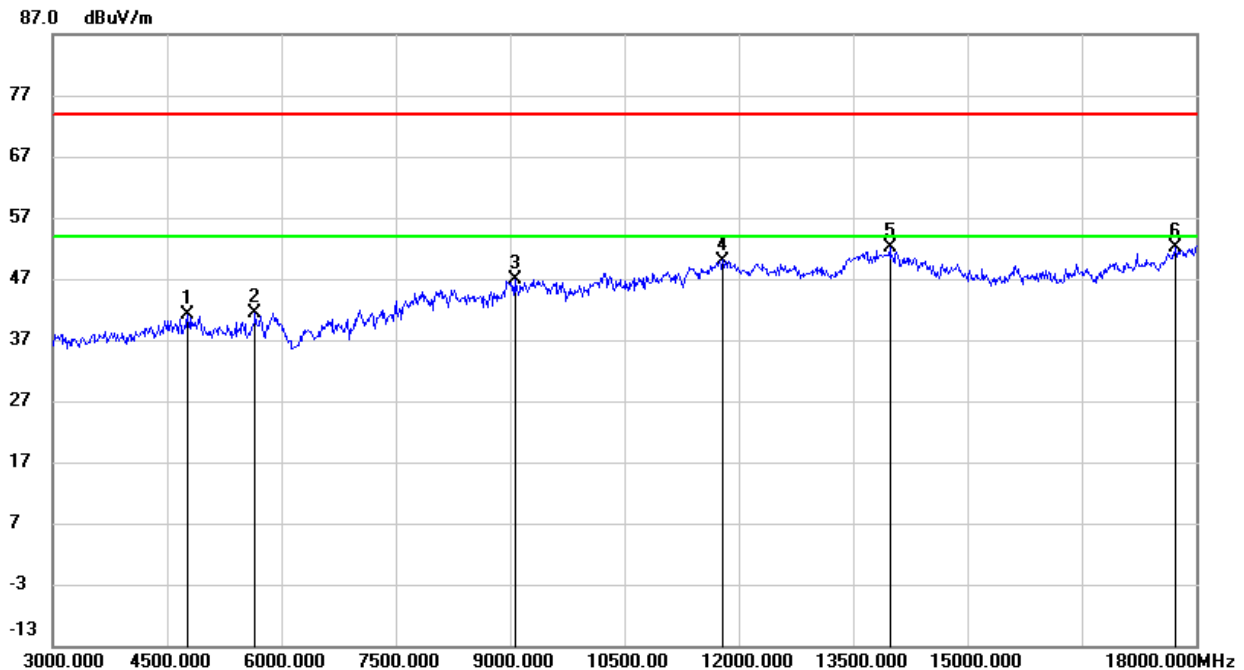**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4770.000	41.69	-0.62	41.07	74.00	-32.93	peak
2	5655.000	40.15	1.26	41.41	74.00	-32.59	peak
3	9060.000	37.36	9.57	46.93	74.00	-27.07	peak
4	11790.000	33.15	16.85	50.00	74.00	-24.00	peak
5	13980.000	30.62	21.41	52.03	74.00	-21.97	peak
6	17730.000	28.19	23.93	52.12	74.00	-21.88	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.


5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All modes and channels have been tested, only the worst data was recorded in the report.

Note: Both antennas have been tested, only the worst data was recorded in the report.

### 8.3.3. 802.11n HT20 MIMO MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

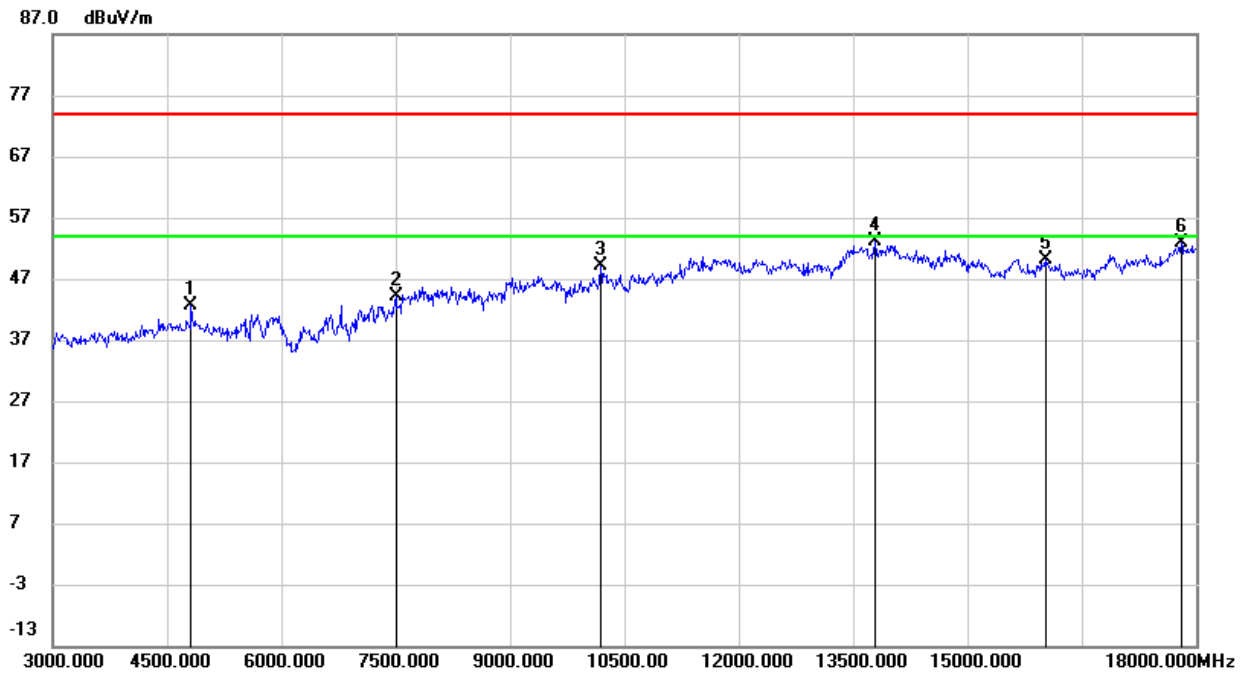

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	42.90	-0.37	42.53	74.00	-31.47	peak
2	7500.000	37.75	6.42	44.17	74.00	-29.83	peak
3	10185.000	37.41	11.63	49.04	74.00	-24.96	peak
4	13785.000	32.02	21.14	53.16	74.00	-20.84	peak
5	16020.000	33.69	16.56	50.25	74.00	-23.75	peak
6	17805.000	28.45	24.53	52.98	74.00	-21.02	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

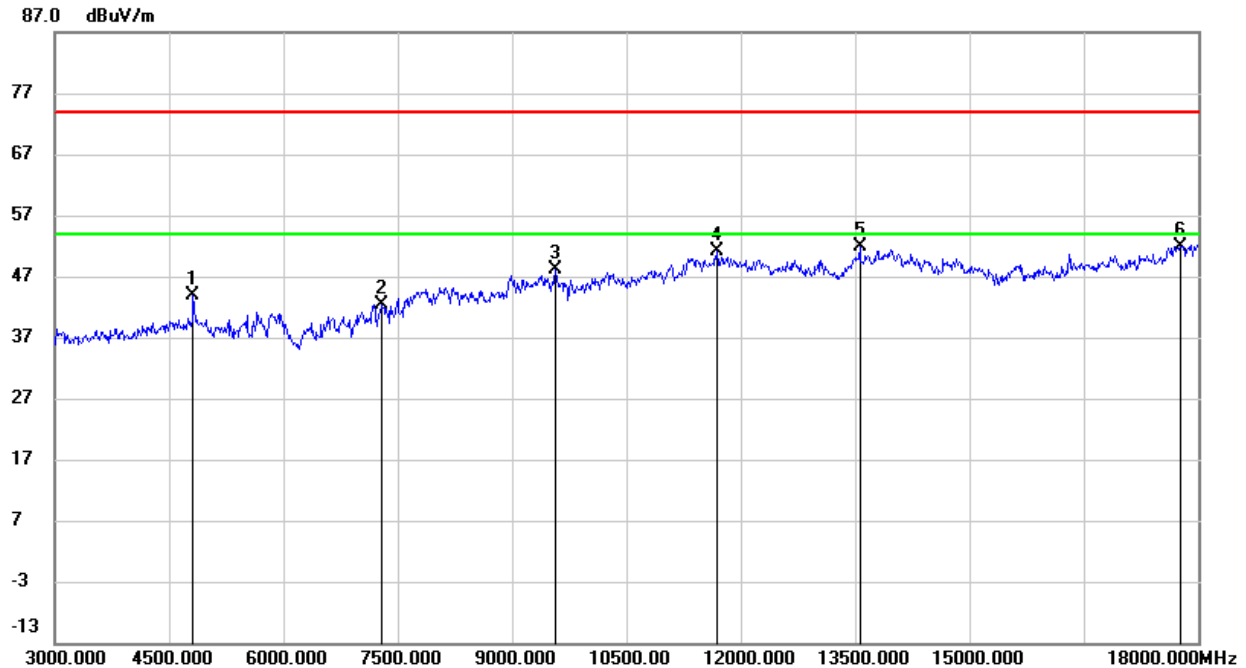

**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	44.13	-0.37	43.76	74.00	-30.24	peak
2	7290.000	37.25	5.23	42.48	74.00	-31.52	peak
3	9570.000	37.59	10.49	48.08	74.00	-25.92	peak
4	11685.000	34.33	16.76	51.09	74.00	-22.91	peak
5	13560.000	31.57	20.40	51.97	74.00	-22.03	peak
6	17760.000	27.76	24.18	51.94	74.00	-22.06	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

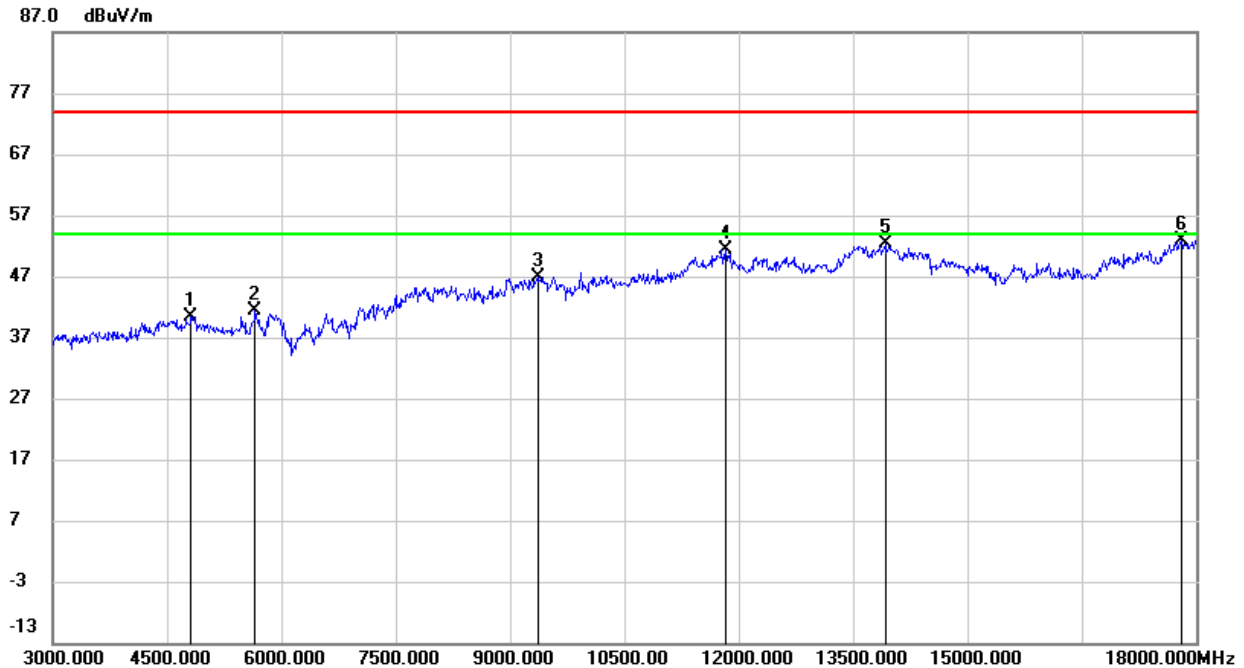

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	40.75	-0.37	40.38	74.00	-33.62	peak
2	5655.000	40.07	1.26	41.33	74.00	-32.67	peak
3	9375.000	36.78	10.17	46.95	74.00	-27.05	peak
4	11835.000	34.50	16.98	51.48	74.00	-22.52	peak
5	13920.000	31.21	21.24	52.45	74.00	-21.55	peak
6	17805.000	28.43	24.53	52.96	74.00	-21.04	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

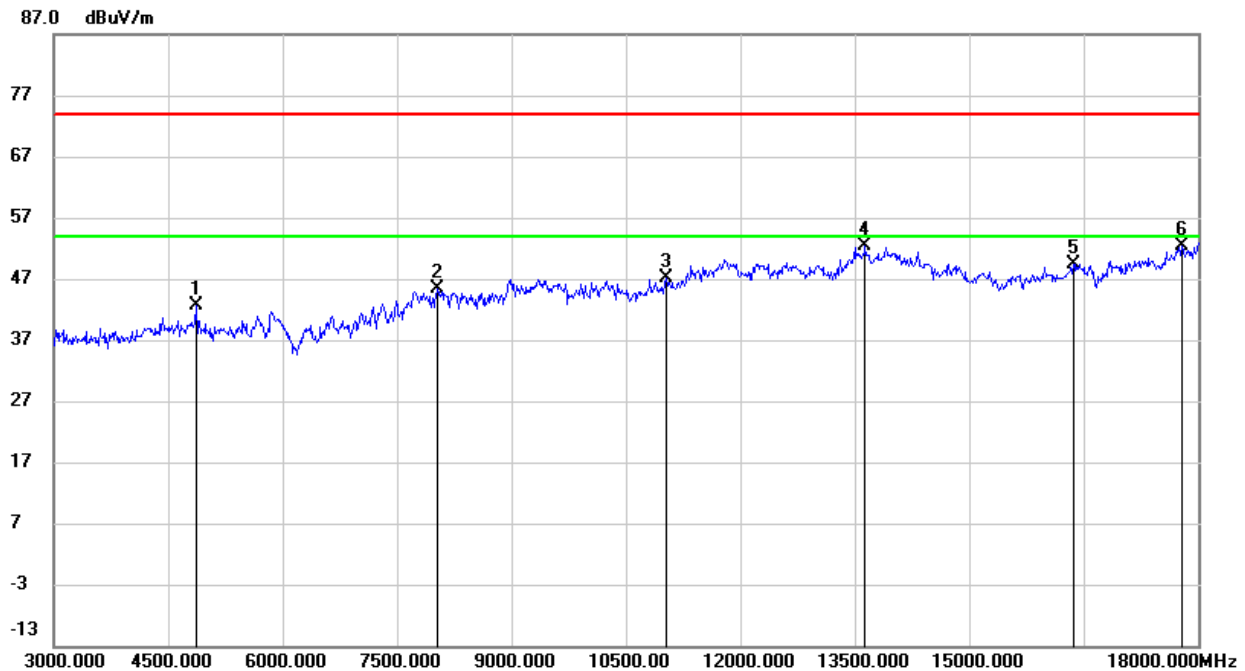**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	43.08	-0.52	42.56	74.00	-31.44	peak
2	8025.000	38.54	6.73	45.27	74.00	-28.73	peak
3	11025.000	33.76	13.41	47.17	74.00	-26.83	peak
4	13635.000	31.83	20.61	52.44	74.00	-21.56	peak
5	16365.000	31.53	17.87	49.40	74.00	-24.60	peak
6	17790.000	27.98	24.43	52.41	74.00	-21.59	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

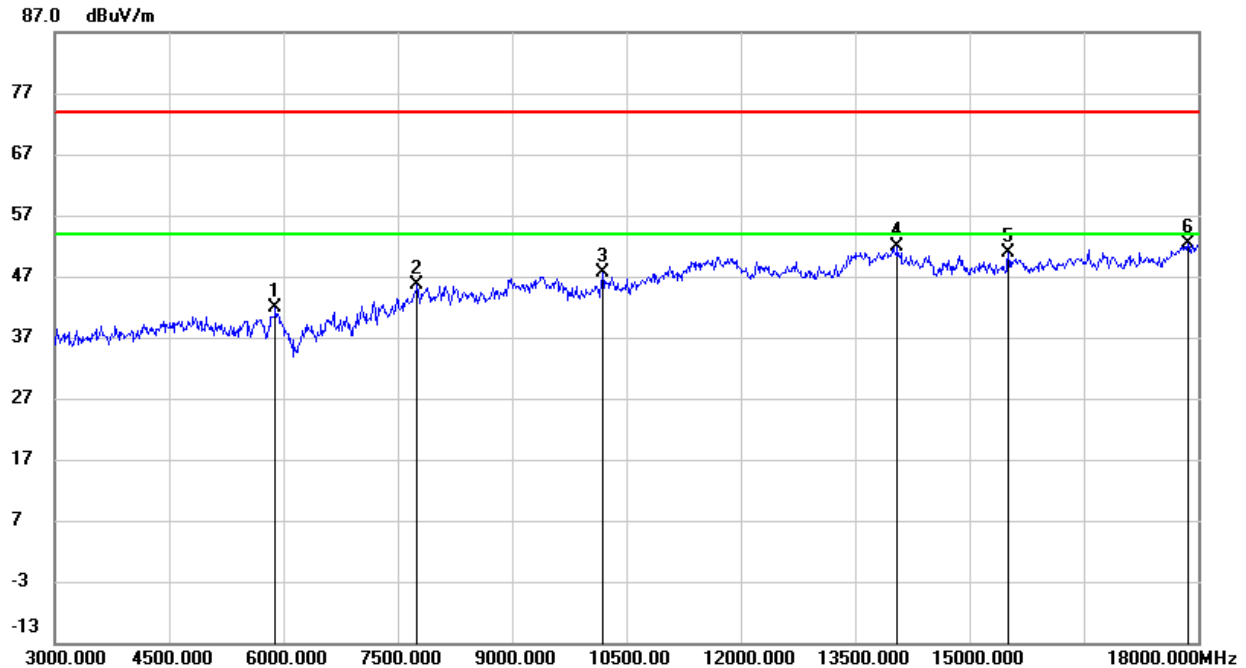**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5895.000	39.30	2.58	41.88	74.00	-32.12	peak
2	7755.000	38.79	6.80	45.59	74.00	-28.41	peak
3	10185.000	35.95	11.63	47.58	74.00	-26.42	peak
4	14055.000	30.81	21.11	51.92	74.00	-22.08	peak
5	15510.000	35.00	15.96	50.96	74.00	-23.04	peak
6	17865.000	27.68	24.59	52.27	74.00	-21.73	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

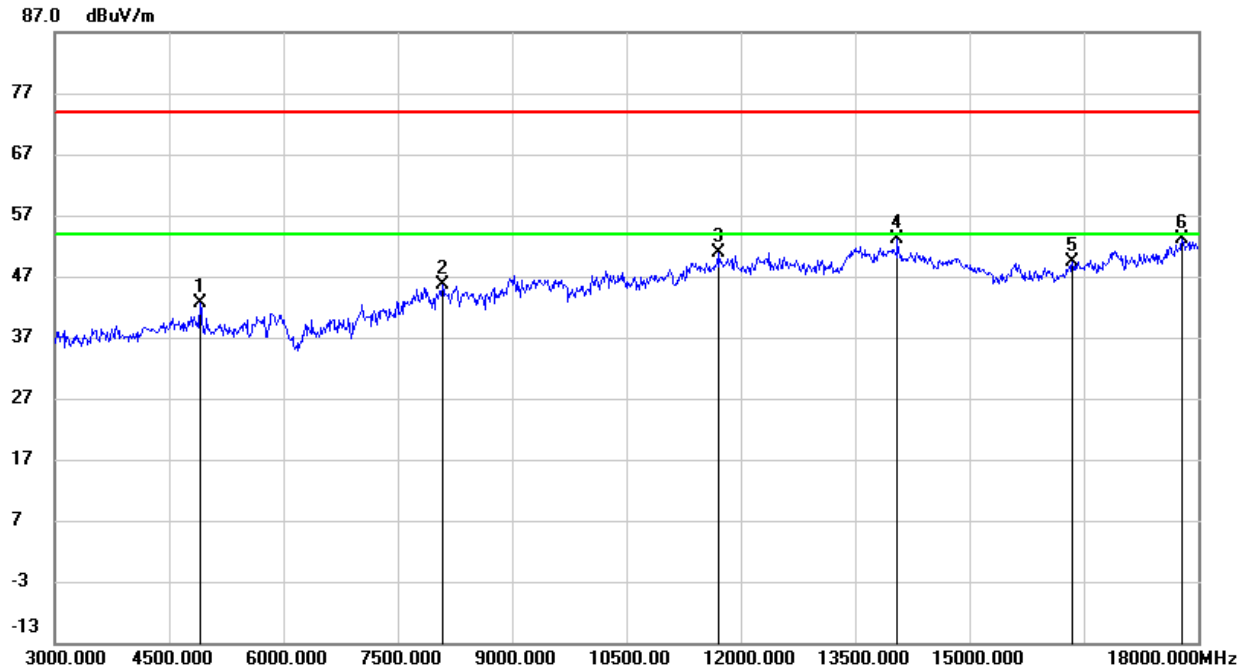**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	43.28	-0.55	42.73	74.00	-31.27	peak
2	8085.000	37.87	7.71	45.58	74.00	-28.42	peak
3	11700.000	33.91	16.87	50.78	74.00	-23.22	peak
4	14055.000	31.93	21.11	53.04	74.00	-20.96	peak
5	16350.000	31.50	17.86	49.36	74.00	-24.64	peak
6	17790.000	28.74	24.43	53.17	74.00	-20.83	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### 8.3.4. 802.11n HT40 MIMO MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

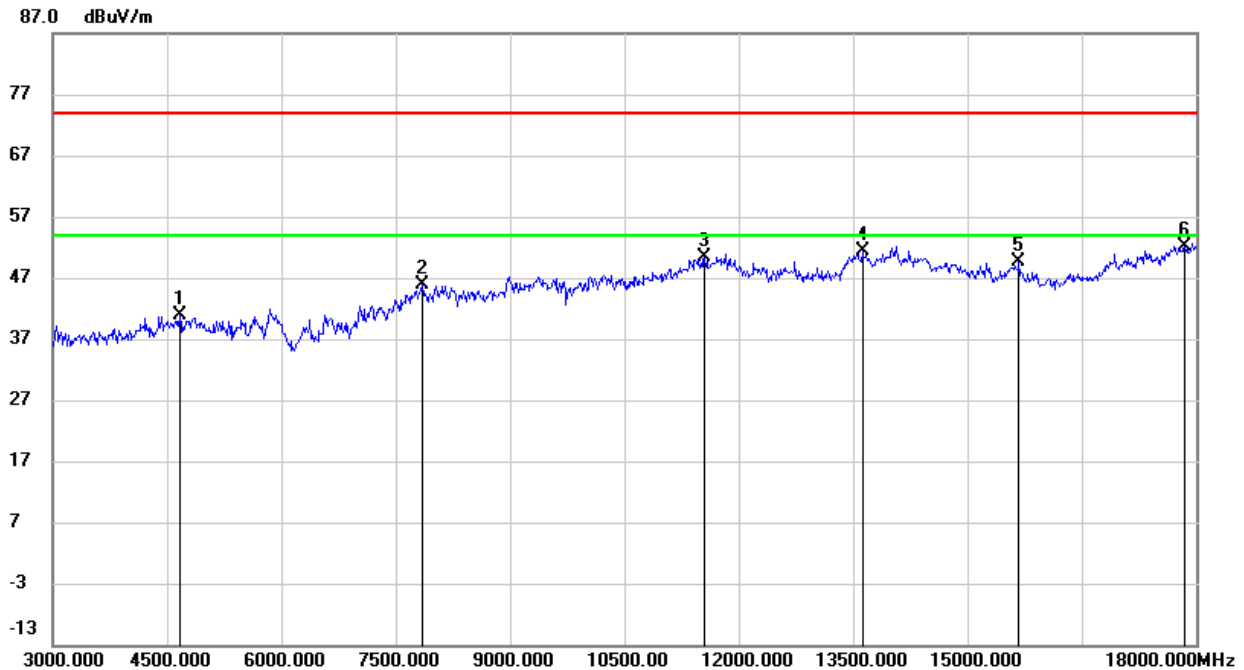

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4665.000	42.25	-1.27	40.98	74.00	-33.02	peak
2	7845.000	39.05	6.94	45.99	74.00	-28.01	peak
3	11550.000	34.41	16.08	50.49	74.00	-23.51	peak
4	13620.000	30.90	20.51	51.41	74.00	-22.59	peak
5	15675.000	33.20	16.41	49.61	74.00	-24.39	peak
6	17850.000	27.47	24.58	52.05	74.00	-21.95	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

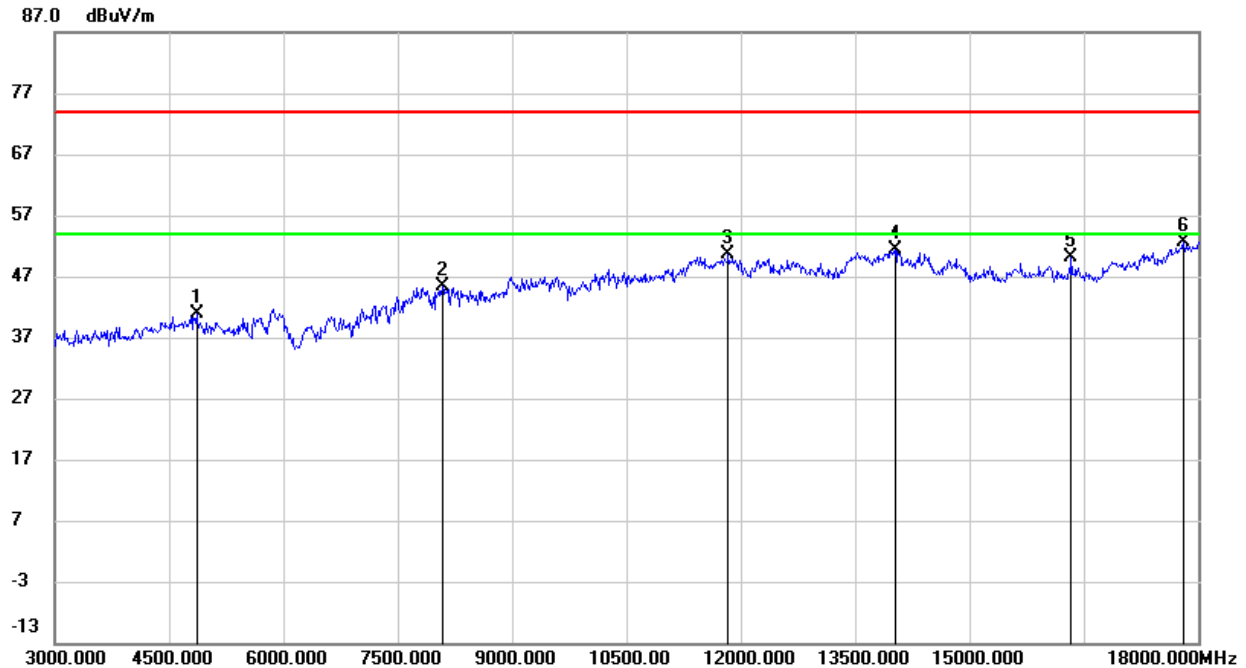**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	41.34	-0.49	40.85	74.00	-33.15	peak
2	8085.000	37.60	7.71	45.31	74.00	-28.69	peak
3	11835.000	33.65	16.98	50.63	74.00	-23.37	peak
4	14025.000	30.10	21.30	51.40	74.00	-22.60	peak
5	16335.000	32.16	17.85	50.01	74.00	-23.99	peak
6	17805.000	28.13	24.53	52.66	74.00	-21.34	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

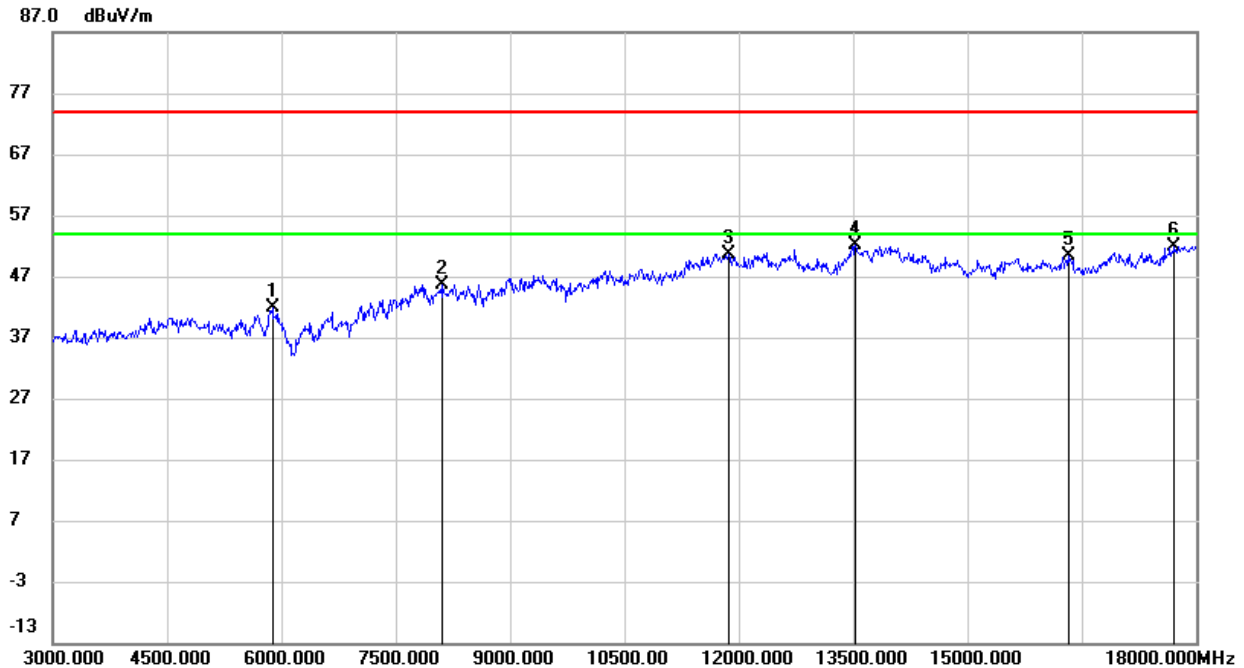**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	39.38	2.43	41.81	74.00	-32.19	peak
2	8115.000	37.81	7.92	45.73	74.00	-28.27	peak
3	11865.000	33.56	17.08	50.64	74.00	-23.36	peak
4	13530.000	31.72	20.39	52.11	74.00	-21.89	peak
5	16320.000	32.50	17.83	50.33	74.00	-23.67	peak
6	17715.000	28.09	23.81	51.90	74.00	-22.10	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



### HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

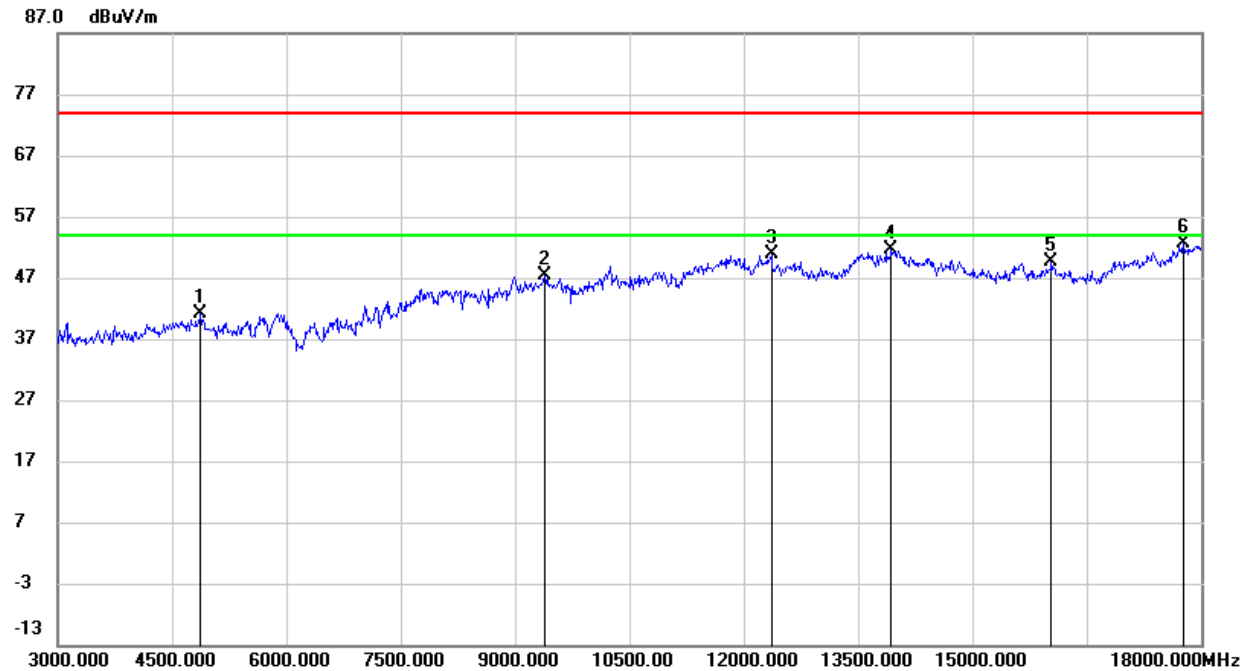

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	41.59	-0.52	41.07	74.00	-32.93	peak
2	9390.000	37.19	10.27	47.46	74.00	-26.54	peak
3	12360.000	33.33	17.55	50.88	74.00	-23.12	peak
4	13935.000	30.25	21.29	51.54	74.00	-22.46	peak
5	16035.000	33.10	16.57	49.67	74.00	-24.33	peak
6	17760.000	28.57	24.18	52.75	74.00	-21.25	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

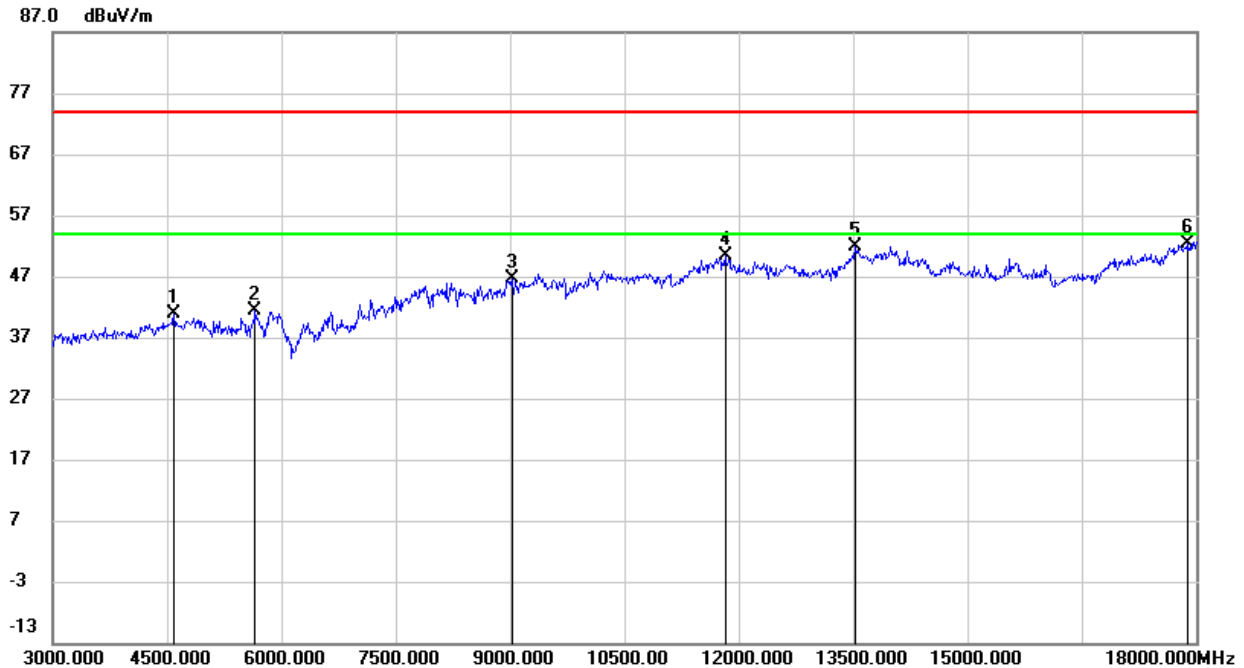

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4590.000	42.03	-1.23	40.80	74.00	-33.20	peak
2	5655.000	40.07	1.26	41.33	74.00	-32.67	peak
3	9030.000	36.87	9.87	46.74	74.00	-27.26	peak
4	11820.000	33.44	16.92	50.36	74.00	-23.64	peak
5	13530.000	31.51	20.39	51.90	74.00	-22.10	peak
6	17895.000	27.70	24.62	52.32	74.00	-21.68	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

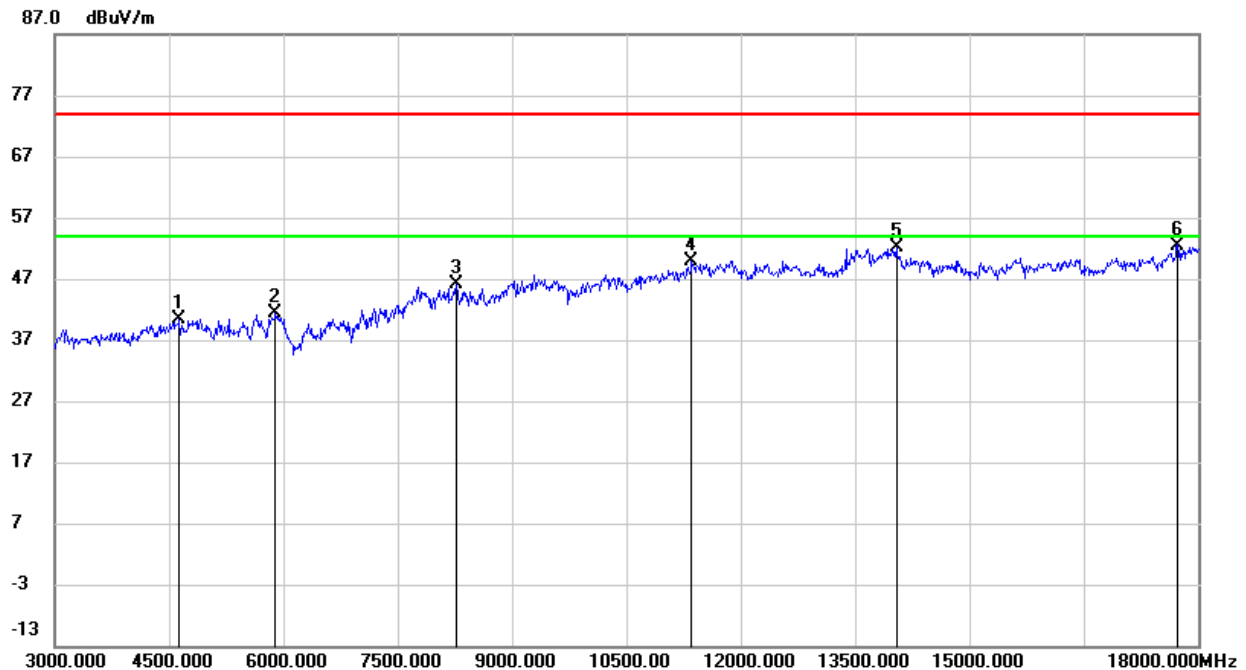**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4635.000	41.51	-1.23	40.28	74.00	-33.72	peak
2	5895.000	38.90	2.58	41.48	74.00	-32.52	peak
3	8265.000	38.42	7.65	46.07	74.00	-27.93	peak
4	11355.000	34.64	15.27	49.91	74.00	-24.09	peak
5	14040.000	30.88	21.20	52.08	74.00	-21.92	peak
6	17730.000	28.57	23.93	52.50	74.00	-21.50	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### 8.3.5. 802.11ax HE20 MIMO MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

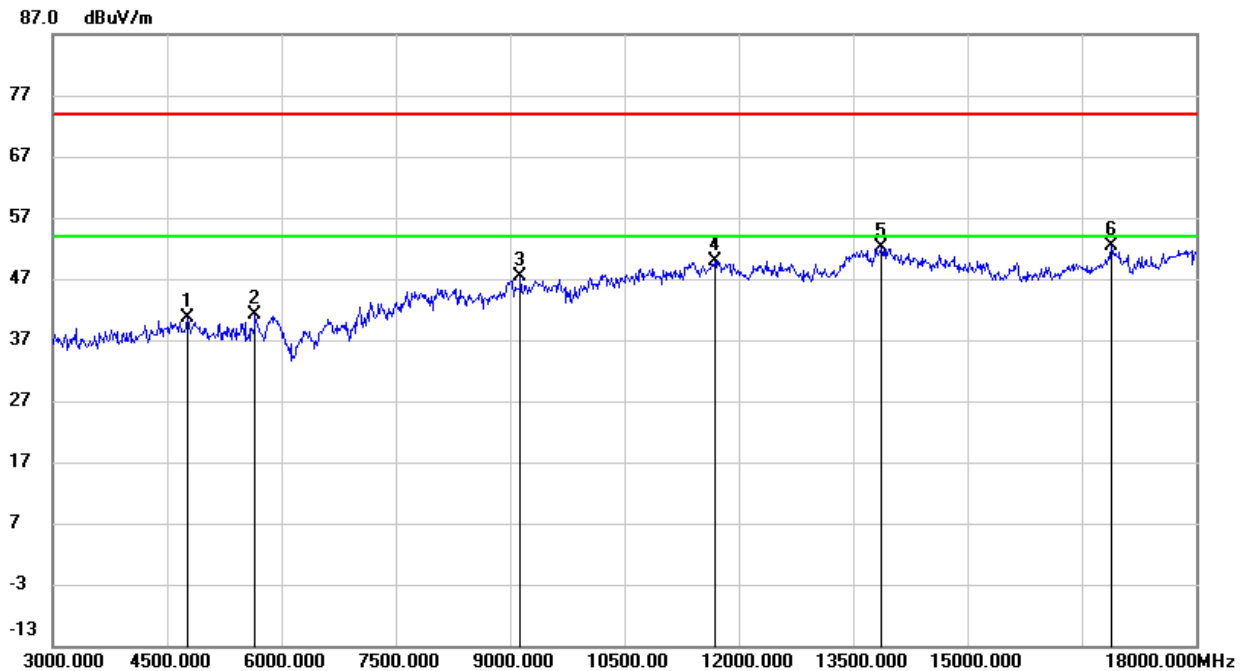

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4770.000	41.21	-0.62	40.59	74.00	-33.41	peak
2	5655.000	39.93	1.26	41.19	74.00	-32.81	peak
3	9135.000	38.19	9.13	47.32	74.00	-26.68	peak
4	11685.000	33.18	16.76	49.94	74.00	-24.06	peak
5	13860.000	30.90	21.18	52.08	74.00	-21.92	peak
6	16890.000	32.35	20.10	52.45	74.00	-21.55	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.

5. For the transmitting duration, please refer to clause 7.1.

6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.


7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

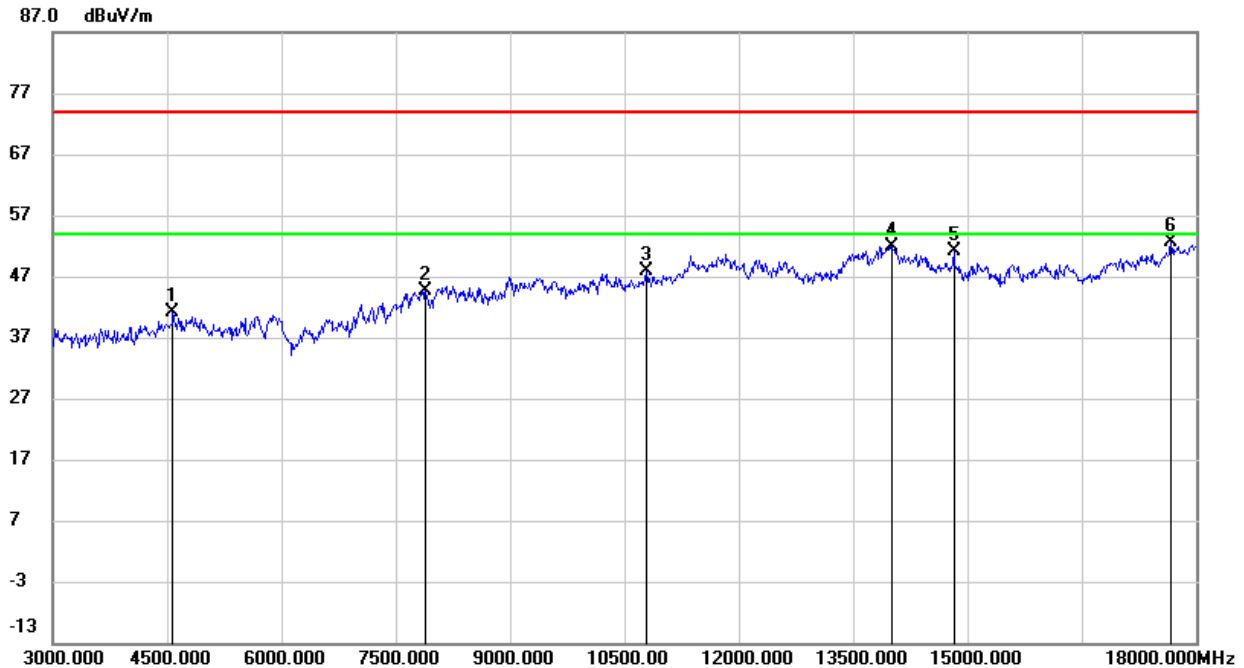**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4575.000	42.50	-1.30	41.20	74.00	-32.80	peak
2	7890.000	37.99	6.67	44.66	74.00	-29.34	peak
3	10785.000	35.01	12.89	47.90	74.00	-26.10	peak
4	14010.000	30.55	21.40	51.95	74.00	-22.05	peak
5	14820.000	32.73	18.30	51.03	74.00	-22.97	peak
6	17670.000	29.32	23.37	52.69	74.00	-21.31	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
5. For the transmitting duration, please refer to clause 7.1.  
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

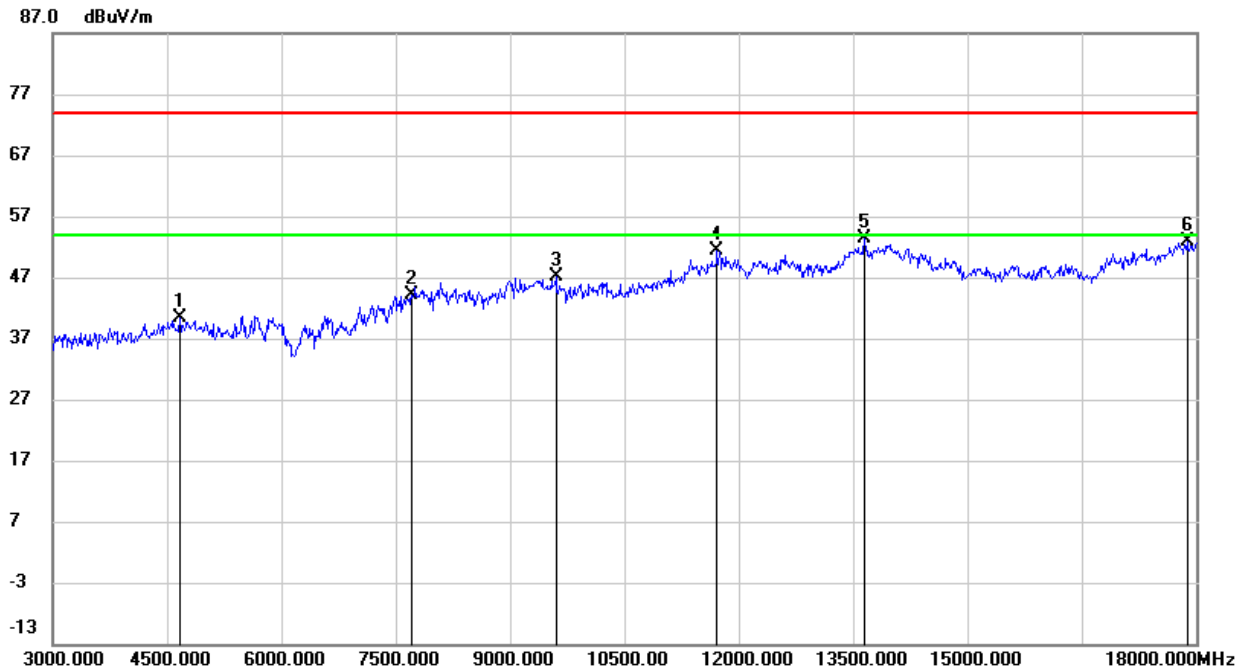

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4665.000	41.62	-1.27	40.35	74.00	-33.65	peak
2	7710.000	37.68	6.44	44.12	74.00	-29.88	peak
3	9600.000	36.35	10.69	47.04	74.00	-26.96	peak
4	11715.000	34.41	16.87	51.28	74.00	-22.72	peak
5	13650.000	32.63	20.70	53.33	74.00	-20.67	peak
6	17880.000	28.24	24.61	52.85	74.00	-21.15	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

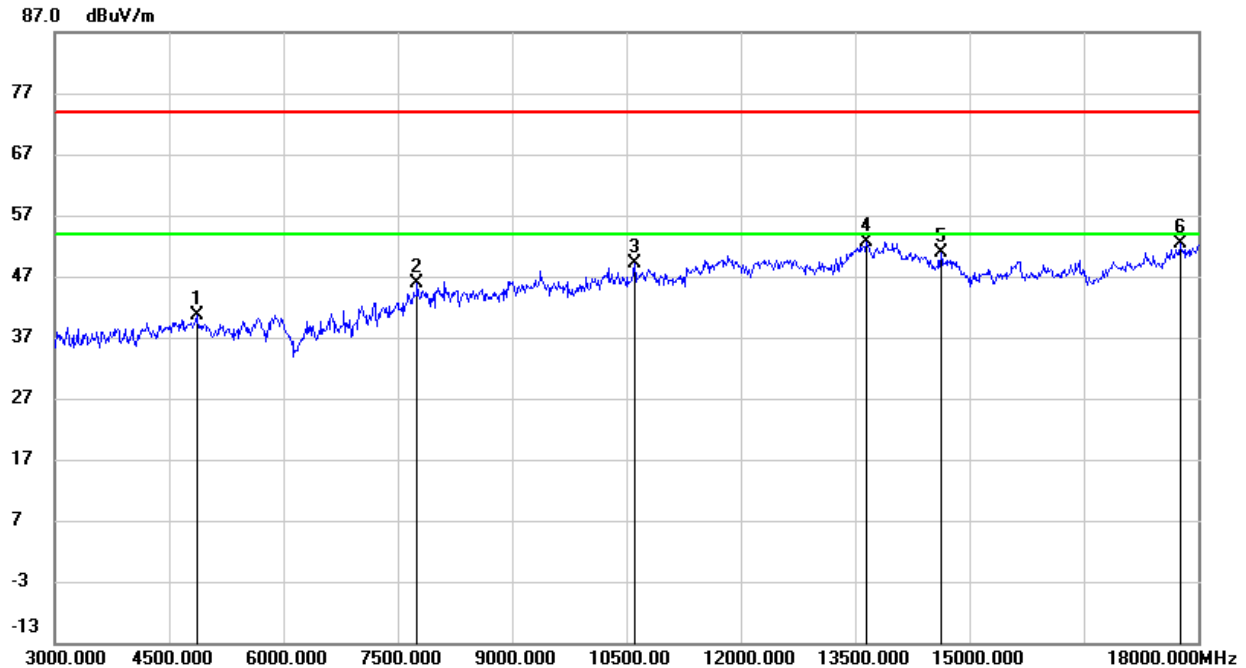**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	41.04	-0.49	40.55	74.00	-33.45	peak
2	7755.000	38.99	6.80	45.79	74.00	-28.21	peak
3	10605.000	36.42	12.59	49.01	74.00	-24.99	peak
4	13650.000	32.01	20.70	52.71	74.00	-21.29	peak
5	14625.000	32.29	18.62	50.91	74.00	-23.09	peak
6	17760.000	28.30	24.18	52.48	74.00	-21.52	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

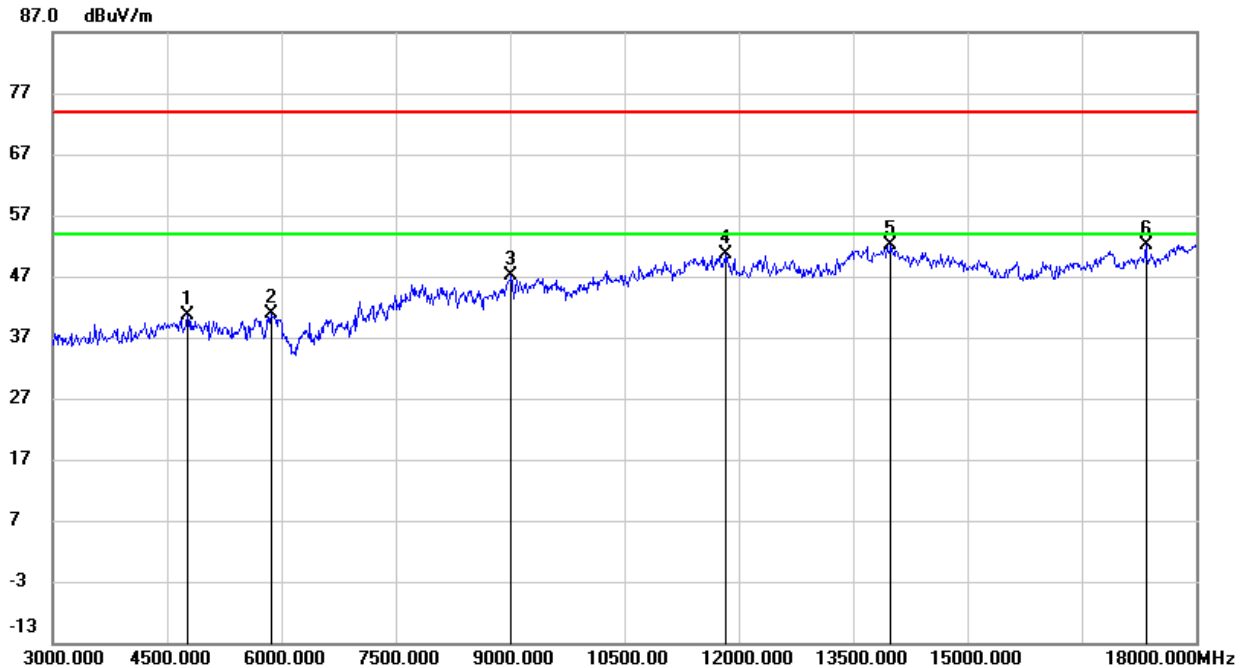**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4770.000	41.18	-0.62	40.56	74.00	-33.44	peak
2	5865.000	38.62	2.29	40.91	74.00	-33.09	peak
3	9015.000	37.02	10.02	47.04	74.00	-26.96	peak
4	11835.000	33.53	16.98	50.51	74.00	-23.49	peak
5	13995.000	30.62	21.44	52.06	74.00	-21.94	peak
6	17340.000	30.46	21.68	52.14	74.00	-21.86	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



### HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

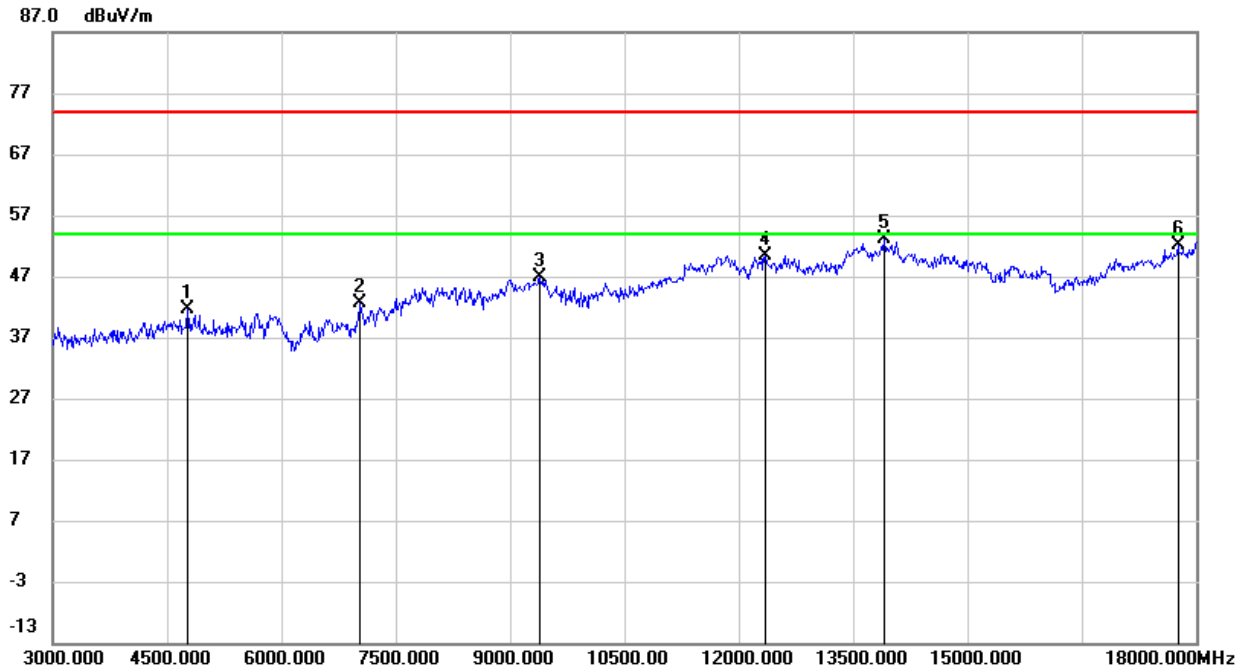

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4770.000	42.26	-0.62	41.64	74.00	-32.36	peak
2	7035.000	36.84	5.80	42.64	74.00	-31.36	peak
3	9390.000	36.66	10.27	46.93	74.00	-27.07	peak
4	12345.000	32.87	17.59	50.46	74.00	-23.54	peak
5	13905.000	31.87	21.21	53.08	74.00	-20.92	peak
6	17760.000	27.95	24.18	52.13	74.00	-21.87	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.


5. For the transmitting duration, please refer to clause 7.1.

6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### 8.3.6. 802.11ax HE40 MIMO MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

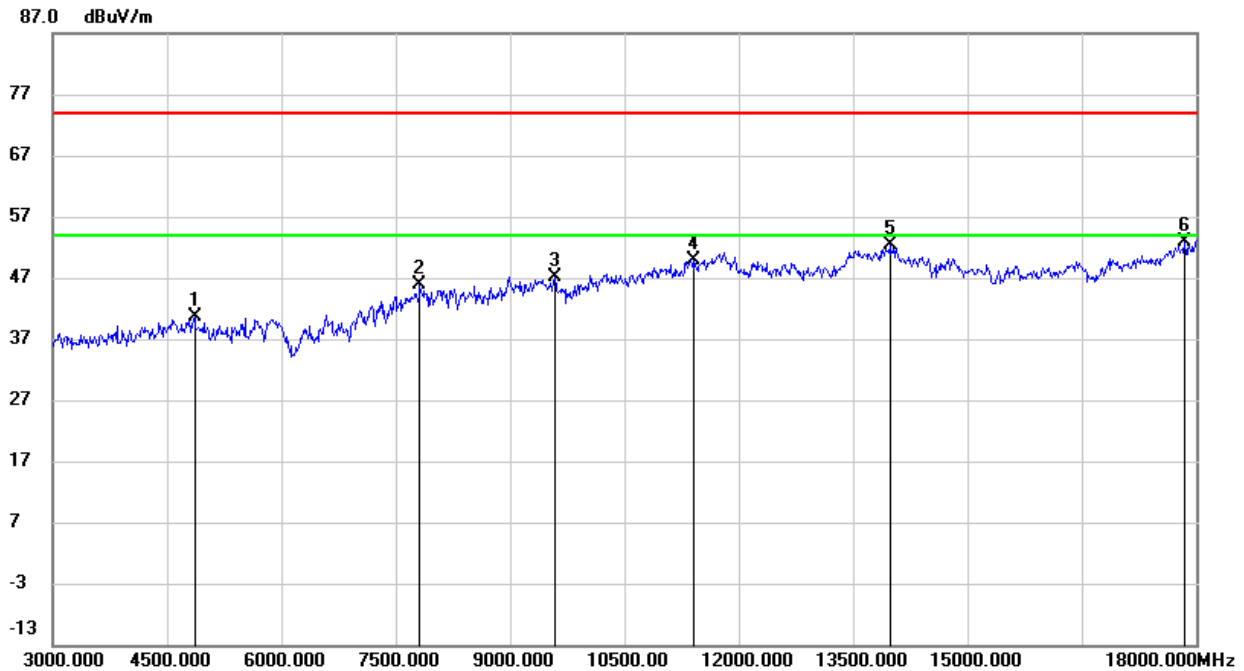

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	41.01	-0.49	40.52	74.00	-33.48	peak
2	7815.000	38.70	7.10	45.80	74.00	-28.20	peak
3	9585.000	36.51	10.60	47.11	74.00	-26.89	peak
4	11415.000	34.01	15.85	49.86	74.00	-24.14	peak
5	13980.000	30.89	21.41	52.30	74.00	-21.70	peak
6	17850.000	28.23	24.58	52.81	74.00	-21.19	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

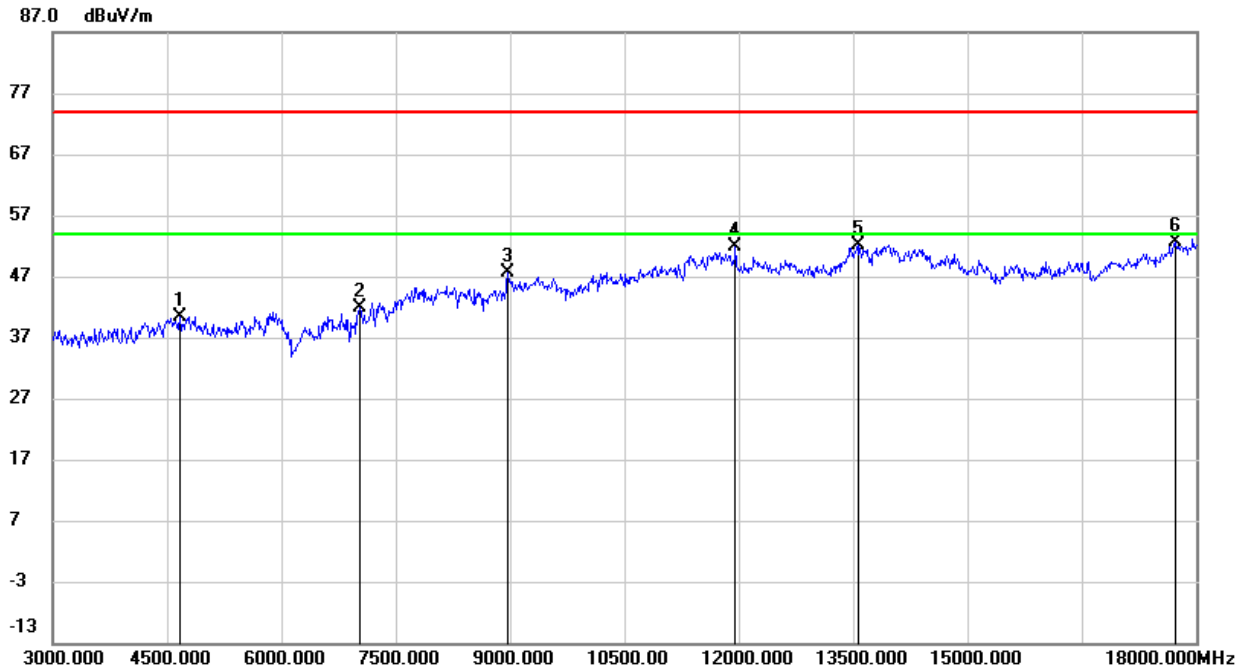**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4665.000	41.54	-1.27	40.27	74.00	-33.73	peak
2	7035.000	36.19	5.80	41.99	74.00	-32.01	peak
3	8970.000	38.09	9.55	47.64	74.00	-26.36	peak
4	11955.000	34.58	17.28	51.86	74.00	-22.14	peak
5	13560.000	31.64	20.40	52.04	74.00	-21.96	peak
6	17730.000	28.78	23.93	52.71	74.00	-21.29	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

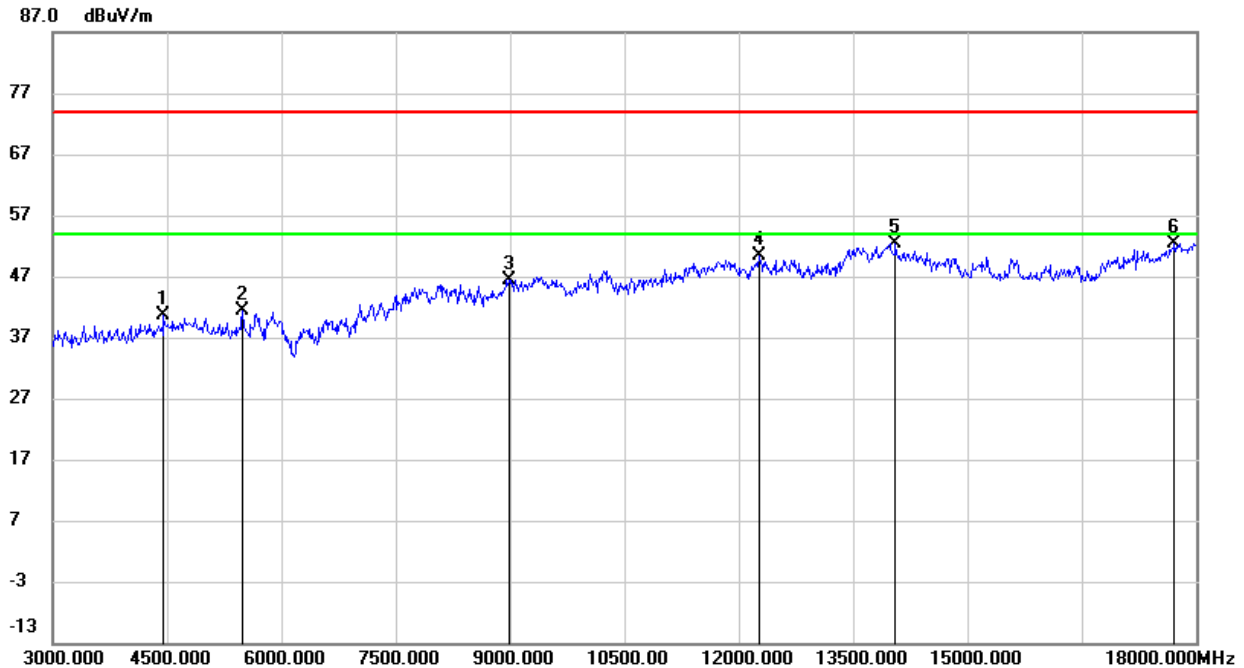

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4455.000	42.41	-1.86	40.55	74.00	-33.45	peak
2	5490.000	39.71	1.59	41.30	74.00	-32.70	peak
3	8985.000	36.60	9.86	46.46	74.00	-27.54	peak
4	12270.000	32.77	17.66	50.43	74.00	-23.57	peak
5	14055.000	31.29	21.11	52.40	74.00	-21.60	peak
6	17715.000	28.53	23.81	52.34	74.00	-21.66	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

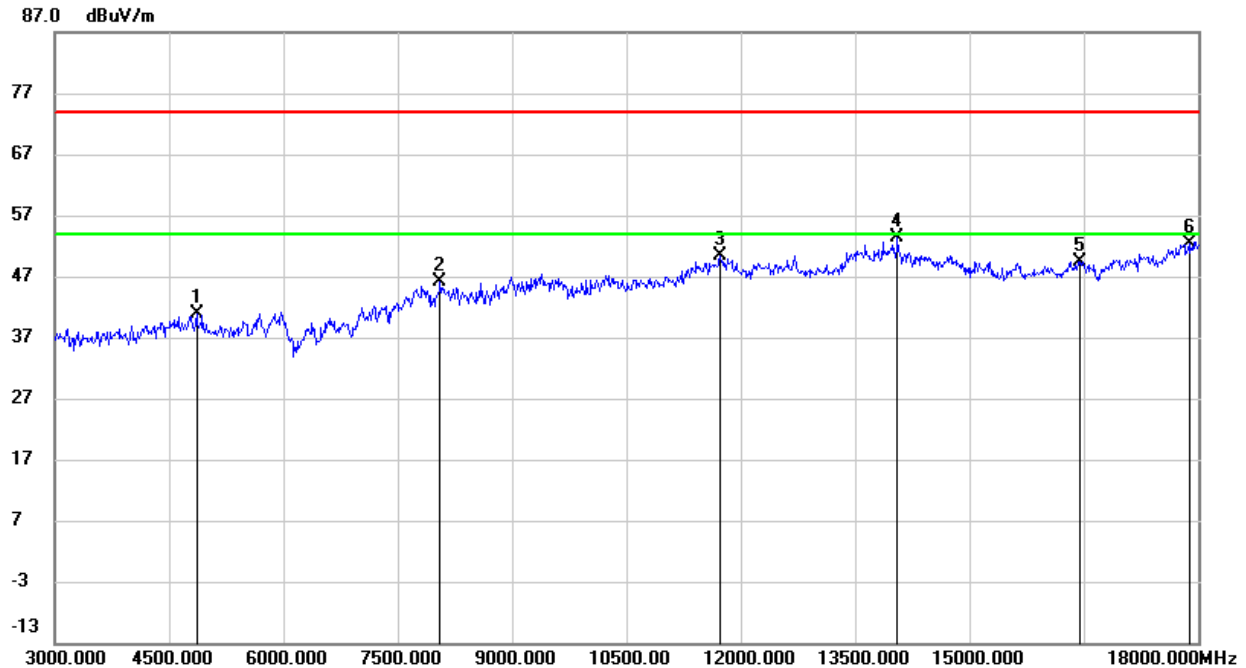**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	41.29	-0.49	40.80	74.00	-33.20	peak
2	8055.000	38.80	7.22	46.02	74.00	-27.98	peak
3	11730.000	33.60	16.86	50.46	74.00	-23.54	peak
4	14055.000	32.31	21.11	53.42	74.00	-20.58	peak
5	16440.000	31.55	17.91	49.46	74.00	-24.54	peak
6	17880.000	27.65	24.61	52.26	74.00	-21.74	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

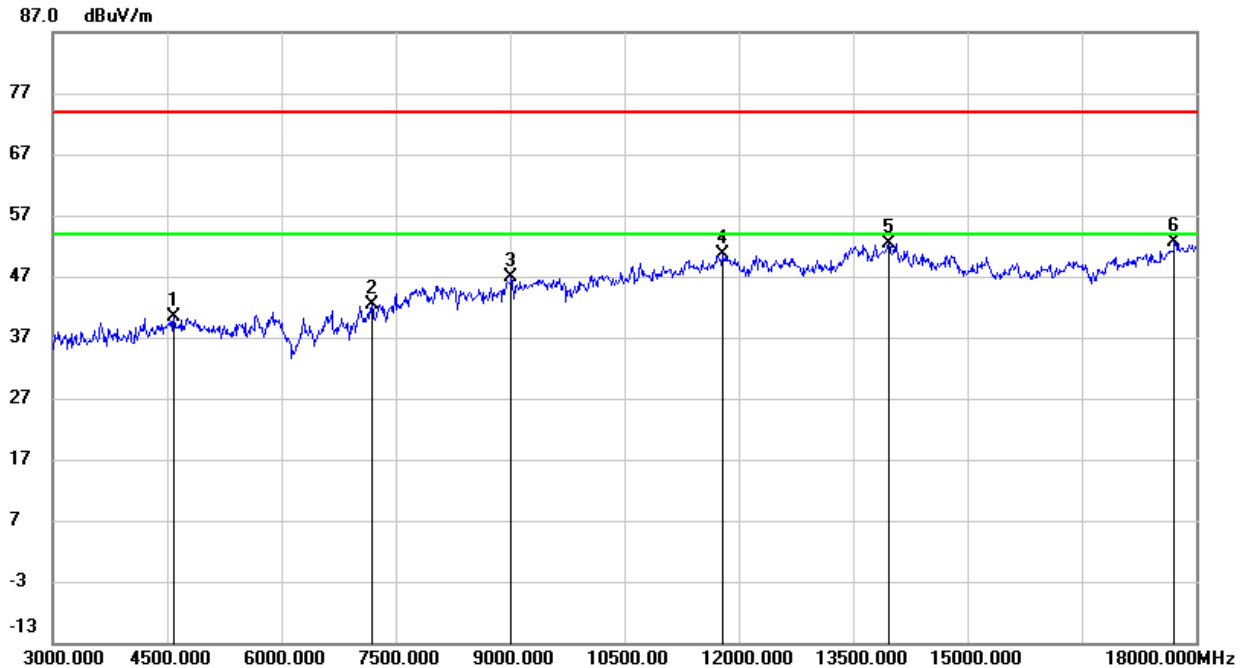

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4590.000	41.50	-1.23	40.27	74.00	-33.73	peak
2	7185.000	36.84	5.54	42.38	74.00	-31.62	peak
3	9015.000	36.74	10.02	46.76	74.00	-27.24	peak
4	11790.000	33.88	16.85	50.73	74.00	-23.27	peak
5	13965.000	31.07	21.37	52.44	74.00	-21.56	peak
6	17715.000	28.80	23.81	52.61	74.00	-21.39	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

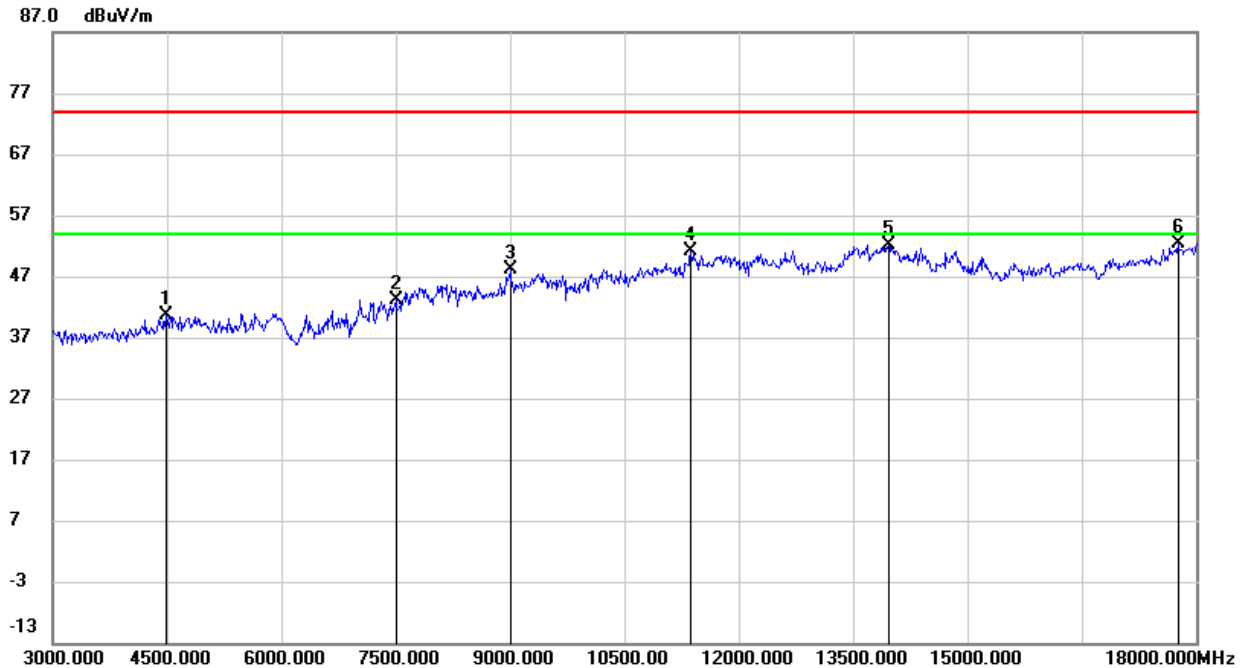**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4485.000	42.27	-1.72	40.55	74.00	-33.45	peak
2	7500.000	36.78	6.42	43.20	74.00	-30.80	peak
3	9000.000	37.88	10.17	48.05	74.00	-25.95	peak
4	11370.000	35.59	15.46	51.05	74.00	-22.95	peak
5	13965.000	30.67	21.37	52.04	74.00	-21.96	peak
6	17760.000	28.30	24.18	52.48	74.00	-21.52	peak

Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

## 8.5. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)

### 8.5.1. 802.11ax HE40 MIMO MODE

#### SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

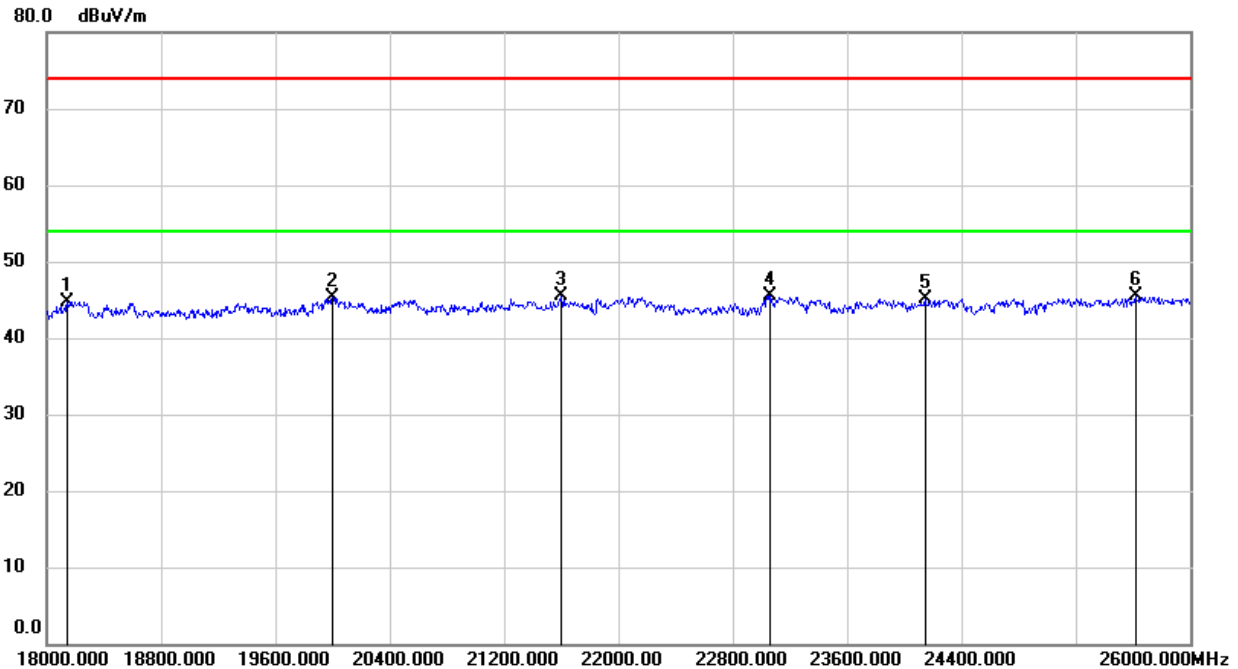

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18144.000	50.27	-5.48	44.79	74.00	-29.21	peak
2	20000.000	50.81	-5.45	45.36	74.00	-28.64	peak
3	21600.000	50.02	-4.54	45.48	74.00	-28.52	peak
4	23064.000	48.99	-3.42	45.57	74.00	-28.43	peak
5	24144.000	47.91	-2.79	45.12	74.00	-28.88	peak
6	25616.000	46.68	-1.24	45.44	74.00	-28.56	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.



### SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

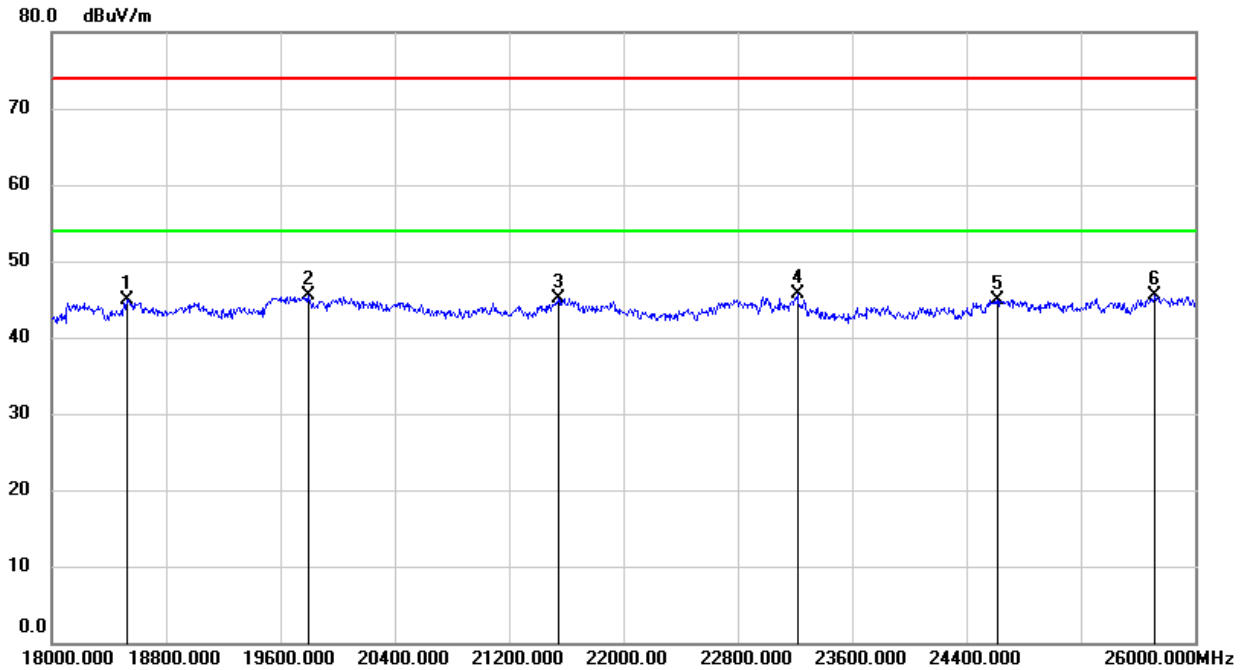

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18528.000	50.11	-5.26	44.85	74.00	-29.15	peak
2	19792.000	50.70	-5.29	45.41	74.00	-28.59	peak
3	21544.000	49.76	-4.63	45.13	74.00	-28.87	peak
4	23216.000	49.01	-3.38	45.63	74.00	-28.37	peak
5	24616.000	47.30	-2.33	44.97	74.00	-29.03	peak
6	25720.000	46.25	-0.75	45.50	74.00	-28.50	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

Note: All the modes had been tested, but only the worst data was recorded in the report.

## 8.6. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)

### 8.6.1. 802.11ax HE40 MIMO MODE

#### SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

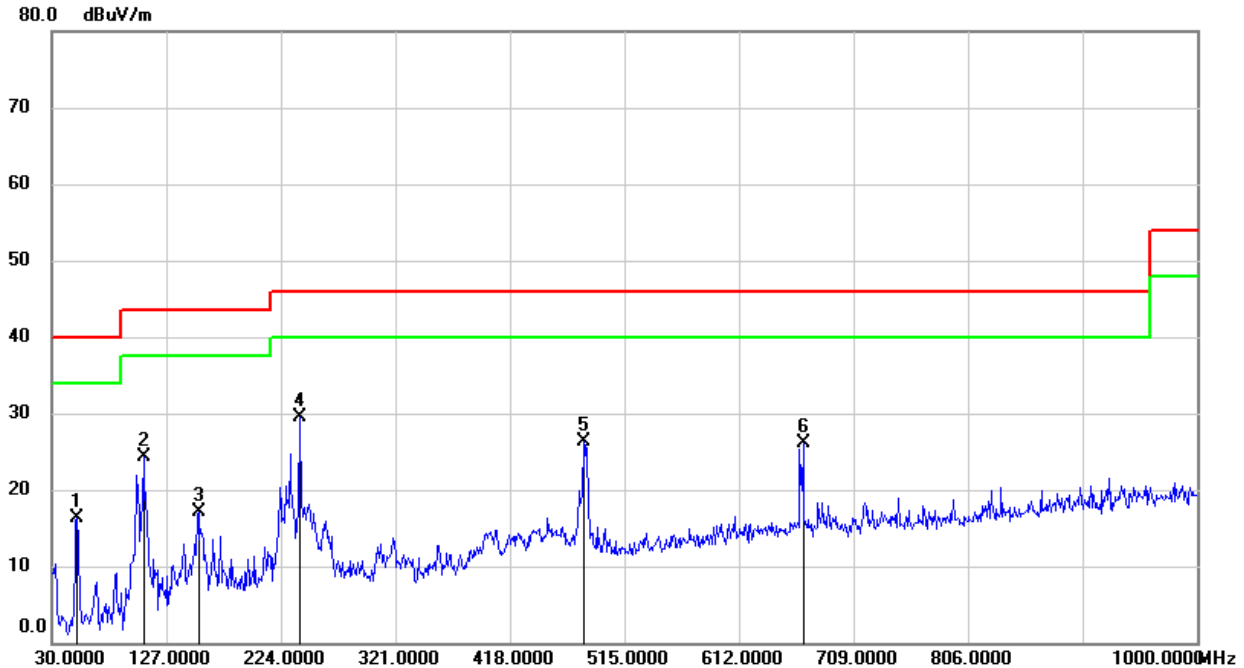


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	51.3400	36.99	-20.73	16.26	40.00	-23.74	QP
2	107.6000	44.83	-20.58	24.25	43.50	-19.25	QP
3	154.1600	35.25	-18.06	17.19	43.50	-26.31	QP
4	239.5200	48.70	-19.16	29.54	46.00	-16.46	QP
5	480.0800	38.03	-11.79	26.24	46.00	-19.76	QP
6	666.3200	34.84	-8.65	26.19	46.00	-19.81	QP

Note: 1. Result Level = Read Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

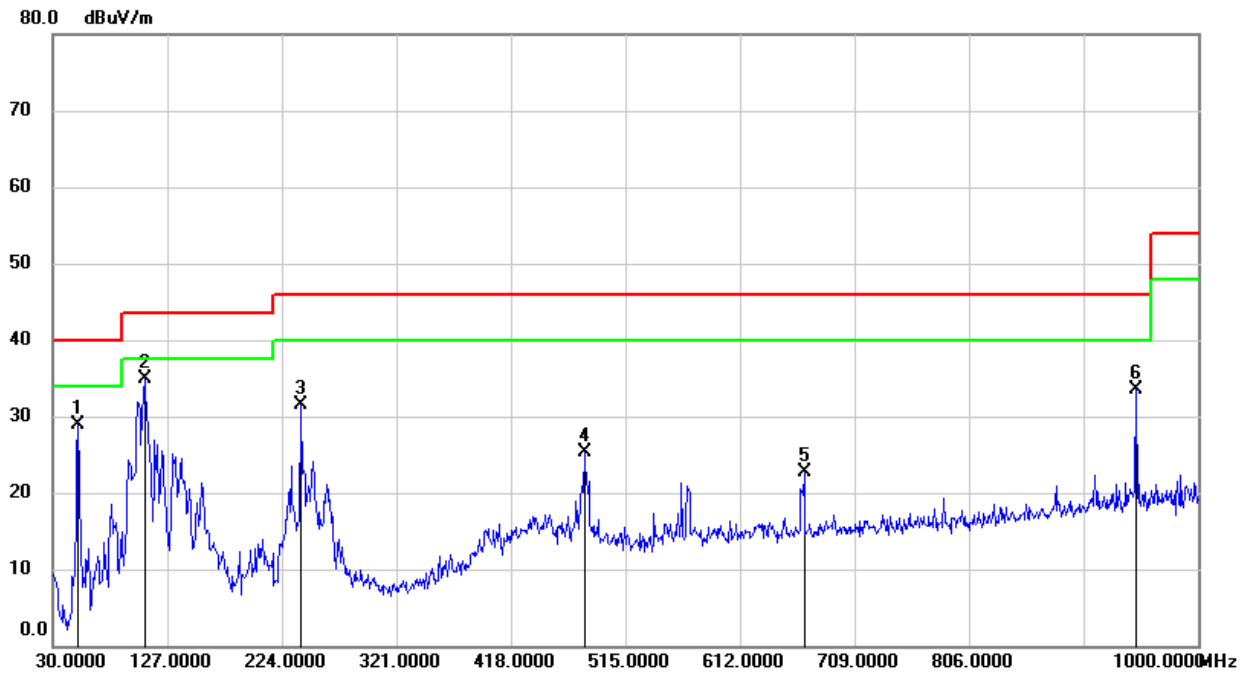**SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

Note: 1. Result Level = Read Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto


Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

## 8.7. SPURIOUS EMISSIONS BELOW 30 MHz

### 8.7.1. 802.11ax HE40 MIMO MODE

#### SPURIOUS EMISSIONS (MID CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9 kHz ~ 150 kHz

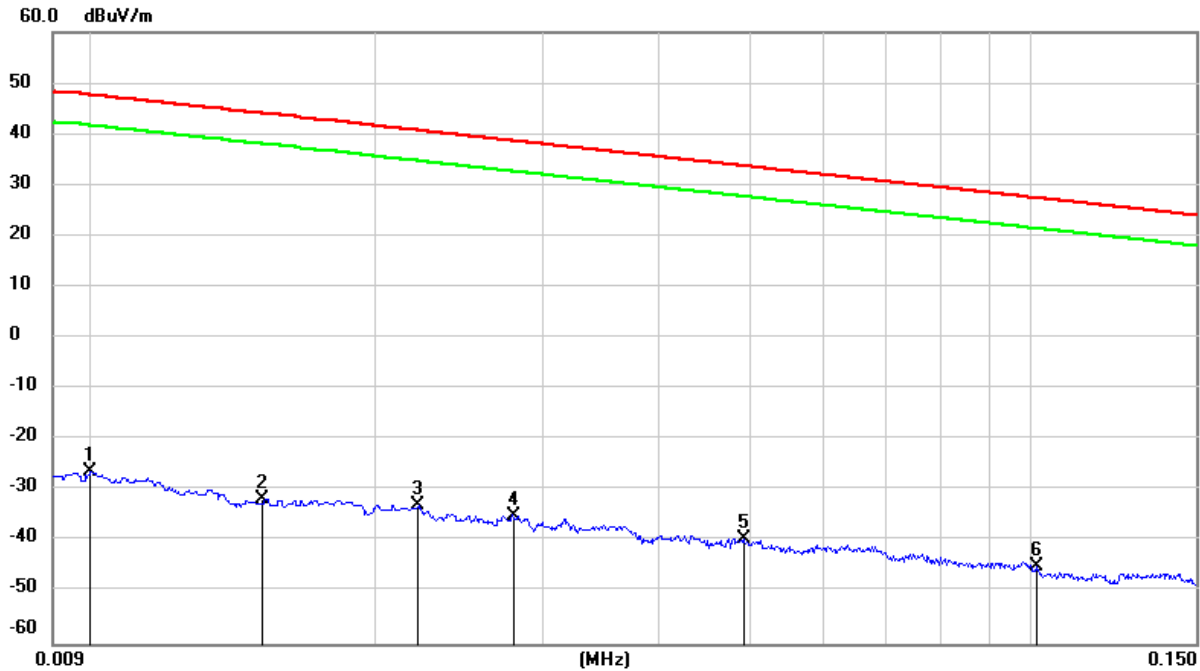


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	75.22	-101.40	-26.18	47.6	-77.68	-3.90	-73.78	peak
2	0.0151	69.71	-101.37	-31.66	44.02	-83.16	-7.48	-75.68	peak
3	0.0221	68.63	-101.35	-32.72	40.71	-84.22	-10.79	-73.43	peak
4	0.0280	66.29	-101.38	-35.09	38.66	-86.59	-12.84	-73.75	peak
5	0.0492	62.05	-101.47	-39.42	33.76	-90.92	-17.74	-73.18	peak
6	0.1014	57.06	-101.79	-44.73	27.48	-96.23	-24.02	-72.21	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

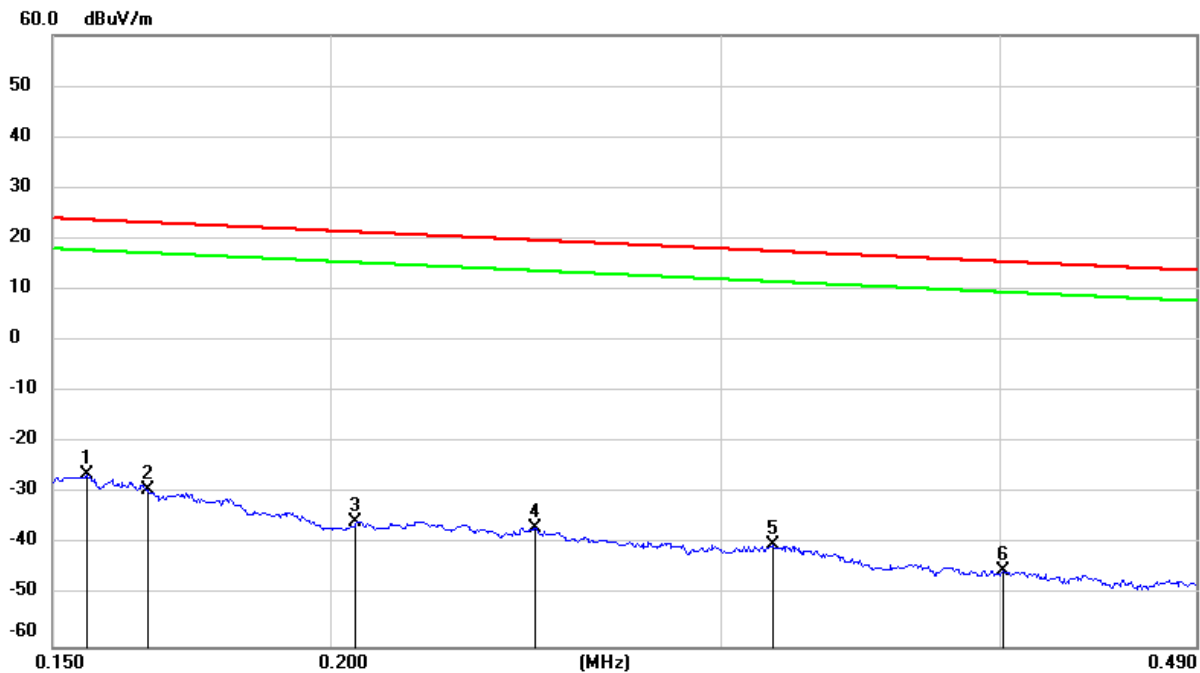150 kHz ~ 490 kHz


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1554	75.27	-101.65	-26.38	23.77	-77.88	-27.73	-50.15	peak
2	0.1655	72.33	-101.66	-29.33	23.23	-80.83	-28.27	-52.56	peak
3	0.2053	66.29	-101.73	-35.44	21.35	-86.94	-30.15	-56.79	peak
4	0.2472	64.95	-101.80	-36.85	19.74	-88.35	-31.76	-56.59	peak
5	0.3163	61.70	-101.87	-40.17	17.6	-91.67	-33.90	-57.77	peak
6	0.4012	56.81	-101.96	-45.15	15.53	-96.65	-35.97	-60.68	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120 $\pi$ ] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

### 490 kHz ~ 30 MHz

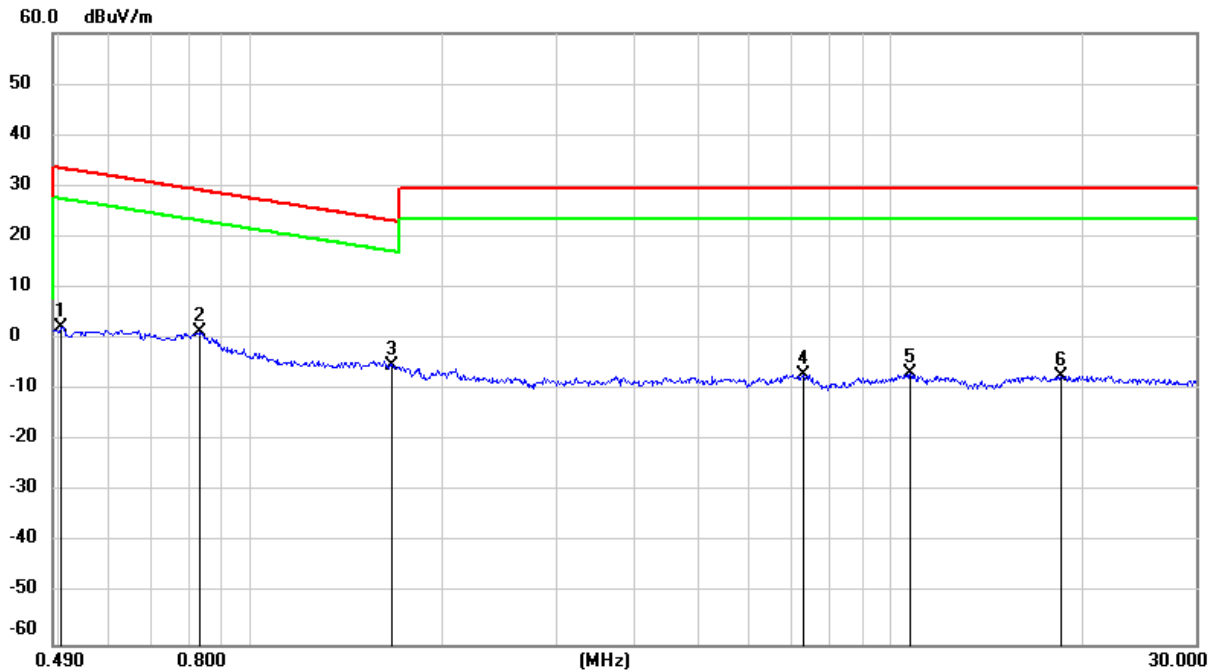

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5039	64.44	-62.07	2.37	33.56	-49.13	-17.94	-31.19	peak
2	0.8296	63.44	-62.17	1.27	29.23	-50.23	-22.27	-27.96	peak
3	1.6631	56.72	-61.97	-5.25	23.18	-56.75	-28.32	-28.43	peak
4	7.3361	54.08	-61.17	-7.09	29.54	-58.59	-21.96	-36.63	peak
5	10.7299	53.98	-60.83	-6.85	29.54	-58.35	-21.96	-36.39	peak
6	18.4908	53.56	-60.89	-7.33	29.54	-58.83	-21.96	-36.87	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

## 9. AC POWER LINE CONDUCTED EMISSIONS


### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

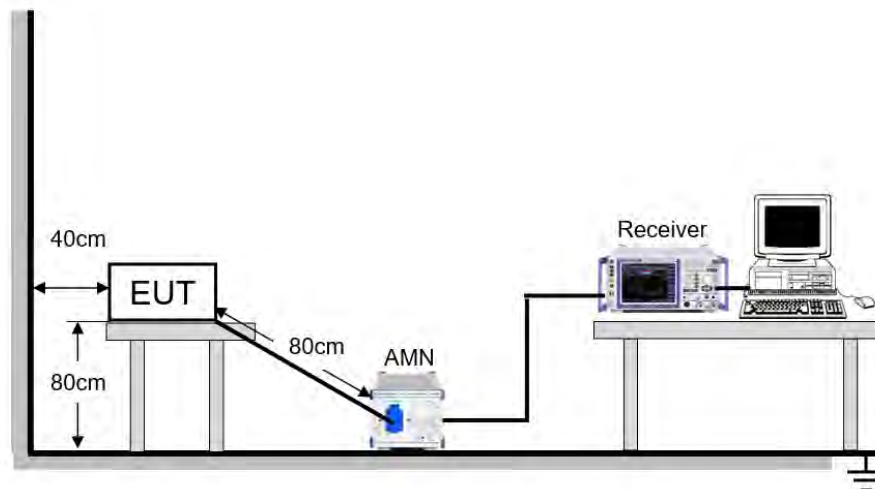


The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST ENVIRONMENT

Temperature	20.6 °C	Relative Humidity	62.1 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

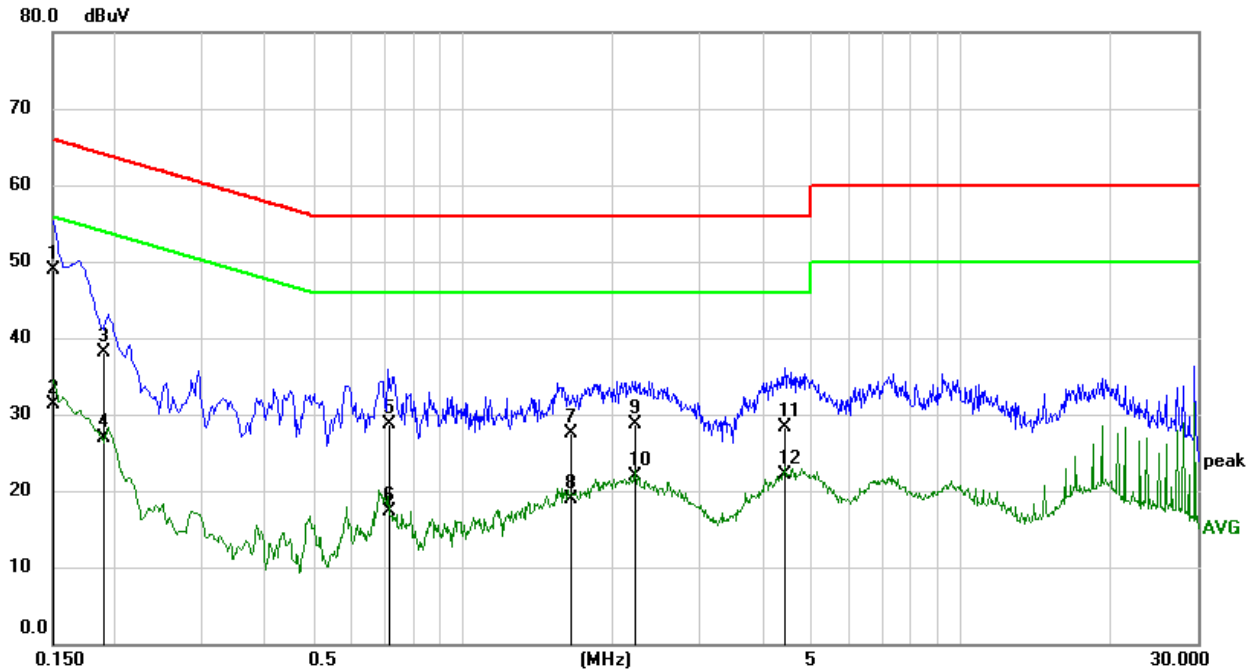**RESULTS****9.1.1. 802.11ax HE40 MIMO MODE****LINE L RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1507	39.36	9.59	48.95	65.96	-17.01	QP
2	0.1507	21.71	9.59	31.30	55.96	-24.66	AVG
3	0.1900	28.53	9.59	38.12	64.04	-25.92	QP
4	0.1900	17.23	9.59	26.82	54.04	-27.22	AVG
5	0.7163	19.05	9.60	28.65	56.00	-27.35	QP
6	0.7163	7.63	9.60	17.23	46.00	-28.77	AVG
7	1.6424	17.79	9.62	27.41	56.00	-28.59	QP
8	1.6424	9.28	9.62	18.90	46.00	-27.10	AVG
9	2.2238	19.01	9.63	28.64	56.00	-27.36	QP
10	2.2238	12.21	9.63	21.84	46.00	-24.16	AVG
11	4.4476	18.74	9.61	28.35	56.00	-27.65	QP
12	4.4476	12.49	9.61	22.10	46.00	-23.90	AVG

Note: 1. Result = Reading +Correct Factor.


2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.



### LINE N RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)

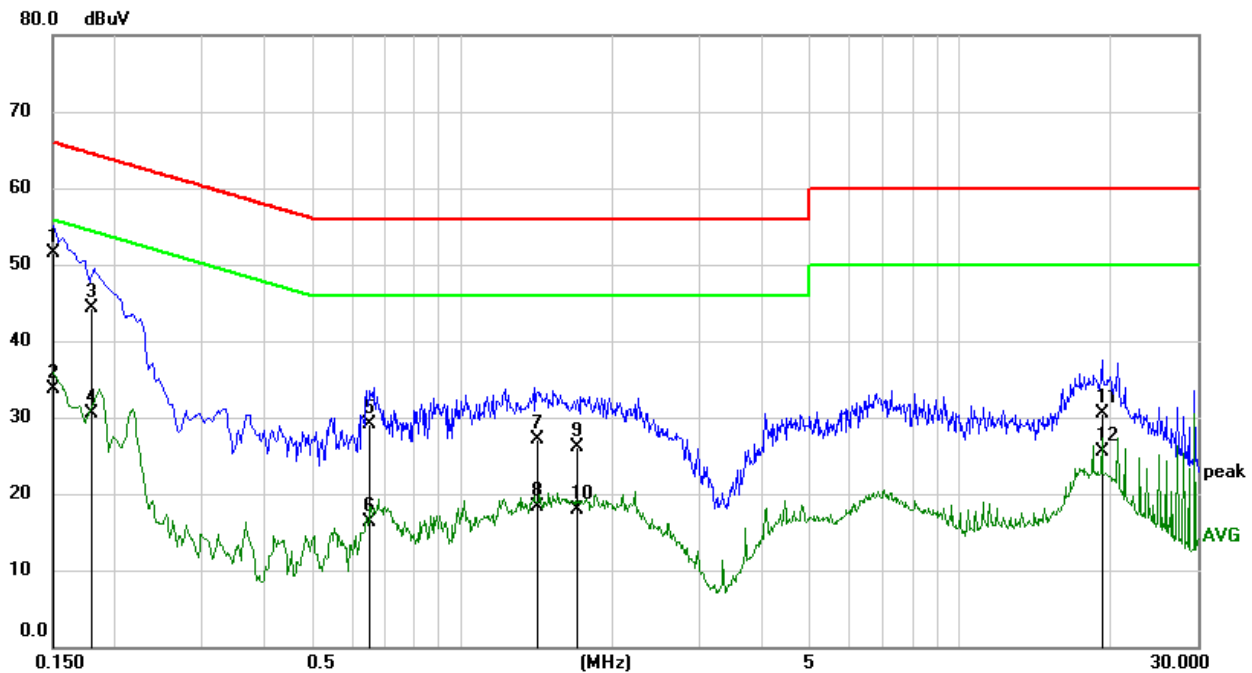

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1504	41.93	9.59	51.52	65.98	-14.46	QP
2	0.1504	24.09	9.59	33.68	55.98	-22.30	AVG
3	0.1795	34.81	9.59	44.40	64.51	-20.11	QP
4	0.1795	20.95	9.59	30.54	54.51	-23.97	AVG
5	0.6540	19.63	9.53	29.16	56.00	-26.84	QP
6	0.6540	6.70	9.53	16.23	46.00	-29.77	AVG
7	1.4083	17.56	9.62	27.18	56.00	-28.82	QP
8	1.4083	8.77	9.62	18.39	46.00	-27.61	AVG
9	1.7044	16.54	9.62	26.16	56.00	-29.84	QP
10	1.7044	8.24	9.62	17.86	46.00	-28.14	AVG
11	19.2564	20.70	9.74	30.44	60.00	-29.56	QP
12	19.2564	15.83	9.74	25.57	50.00	-24.43	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

## 10. ANTENNA REQUIREMENTS

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### RESULTS

Complies



## 11. Appendix


### 11.1. Appendix A: DTS Bandwidth

#### 11.1.1. Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.040	2408.000	2416.040	0.5	PASS
	Ant2	2412	8.040	2408.000	2416.040	0.5	PASS
	Ant1	2437	7.560	2433.480	2441.040	0.5	PASS
	Ant2	2437	8.040	2433.000	2441.040	0.5	PASS
	Ant1	2462	8.040	2458.000	2466.040	0.5	PASS
	Ant2	2462	8.040	2458.000	2466.040	0.5	PASS
11G	Ant1	2412	15.800	2404.120	2419.920	0.5	PASS
	Ant2	2412	15.680	2404.120	2419.800	0.5	PASS
	Ant1	2437	15.320	2429.240	2444.560	0.5	PASS
	Ant2	2437	15.520	2429.120	2444.640	0.5	PASS
	Ant1	2462	15.720	2453.880	2469.600	0.5	PASS
	Ant2	2462	15.720	2453.840	2469.560	0.5	PASS
11N20MIMO	Ant1	2412	15.720	2404.440	2420.160	0.5	PASS
	Ant2	2412	17.560	2403.240	2420.800	0.5	PASS
	Ant1	2437	16.240	2428.880	2445.120	0.5	PASS
	Ant2	2437	17.520	2428.240	2445.760	0.5	PASS
	Ant1	2462	15.120	2454.440	2469.560	0.5	PASS
	Ant2	2462	16.920	2453.240	2470.160	0.5	PASS
11N40MIMO	Ant1	2422	35.040	2404.480	2439.520	0.5	PASS
	Ant2	2422	35.040	2404.480	2439.520	0.5	PASS
	Ant1	2437	35.040	2419.480	2454.520	0.5	PASS
	Ant2	2437	35.040	2419.480	2454.520	0.5	PASS
	Ant1	2452	31.280	2434.480	2465.760	0.5	PASS
	Ant2	2452	35.040	2434.480	2469.520	0.5	PASS
11AX20MIMO	Ant1	2412	17.280	2403.920	2421.200	0.5	PASS
	Ant2	2412	17.960	2402.680	2420.640	0.5	PASS
	Ant1	2437	18.240	2427.960	2446.200	0.5	PASS
	Ant2	2437	17.720	2428.280	2446.000	0.5	PASS
	Ant1	2462	17.720	2452.760	2470.480	0.5	PASS
	Ant2	2462	17.480	2452.560	2470.040	0.5	PASS
11AX40MIMO	Ant1	2422	36.800	2403.200	2440.000	0.5	PASS
	Ant2	2422	35.040	2404.480	2439.520	0.5	PASS
	Ant1	2437	36.400	2418.200	2454.600	0.5	PASS
	Ant2	2437	36.320	2419.480	2455.800	0.5	PASS
	Ant1	2452	33.840	2433.200	2467.040	0.5	PASS
	Ant2	2452	35.120	2434.480	2469.600	0.5	PASS

## 11.1.2. Test Graphs



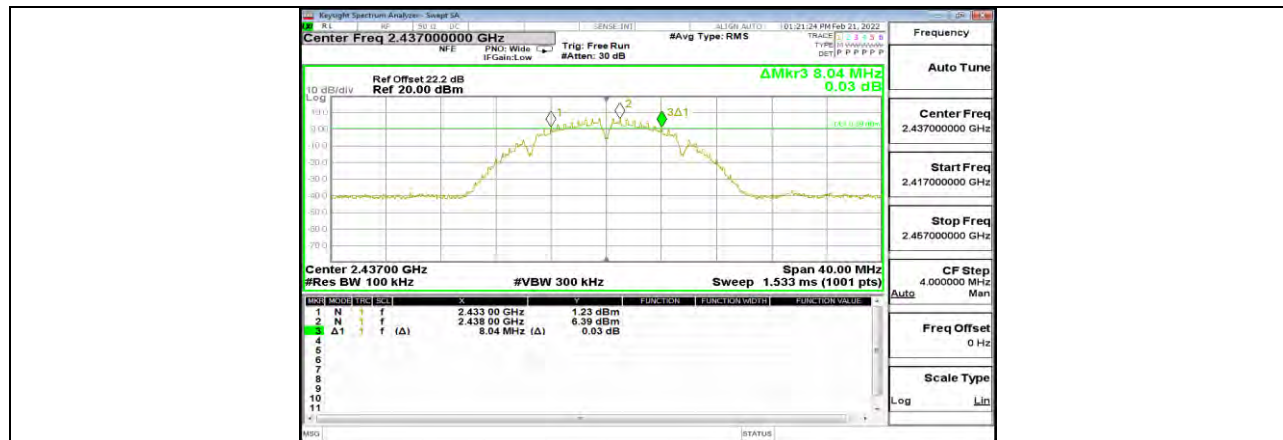

11B\_Ant2\_2437




11B\_Ant1\_2462



11B\_Ant2\_2462



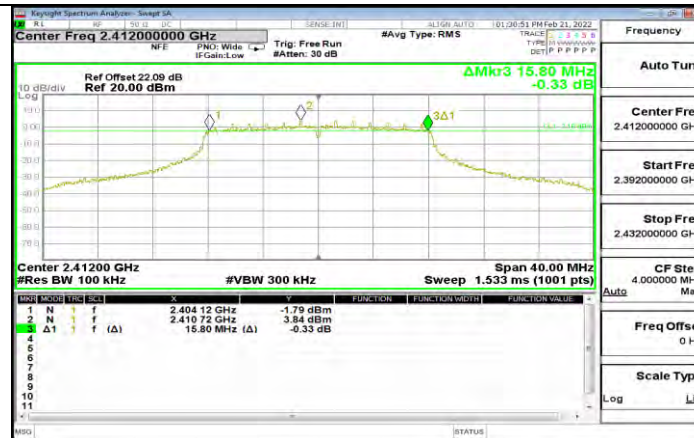

11G Ant1 2412



11G Ant2 2412



11G Ant1 2437



11G\_Ant2\_2437



11G\_Ant1\_2462



11G\_Ant2\_2462



11N20MIMO Ant1 2412




11N20MIMO Ant2 2412



11N20MIMO Ant1 2437






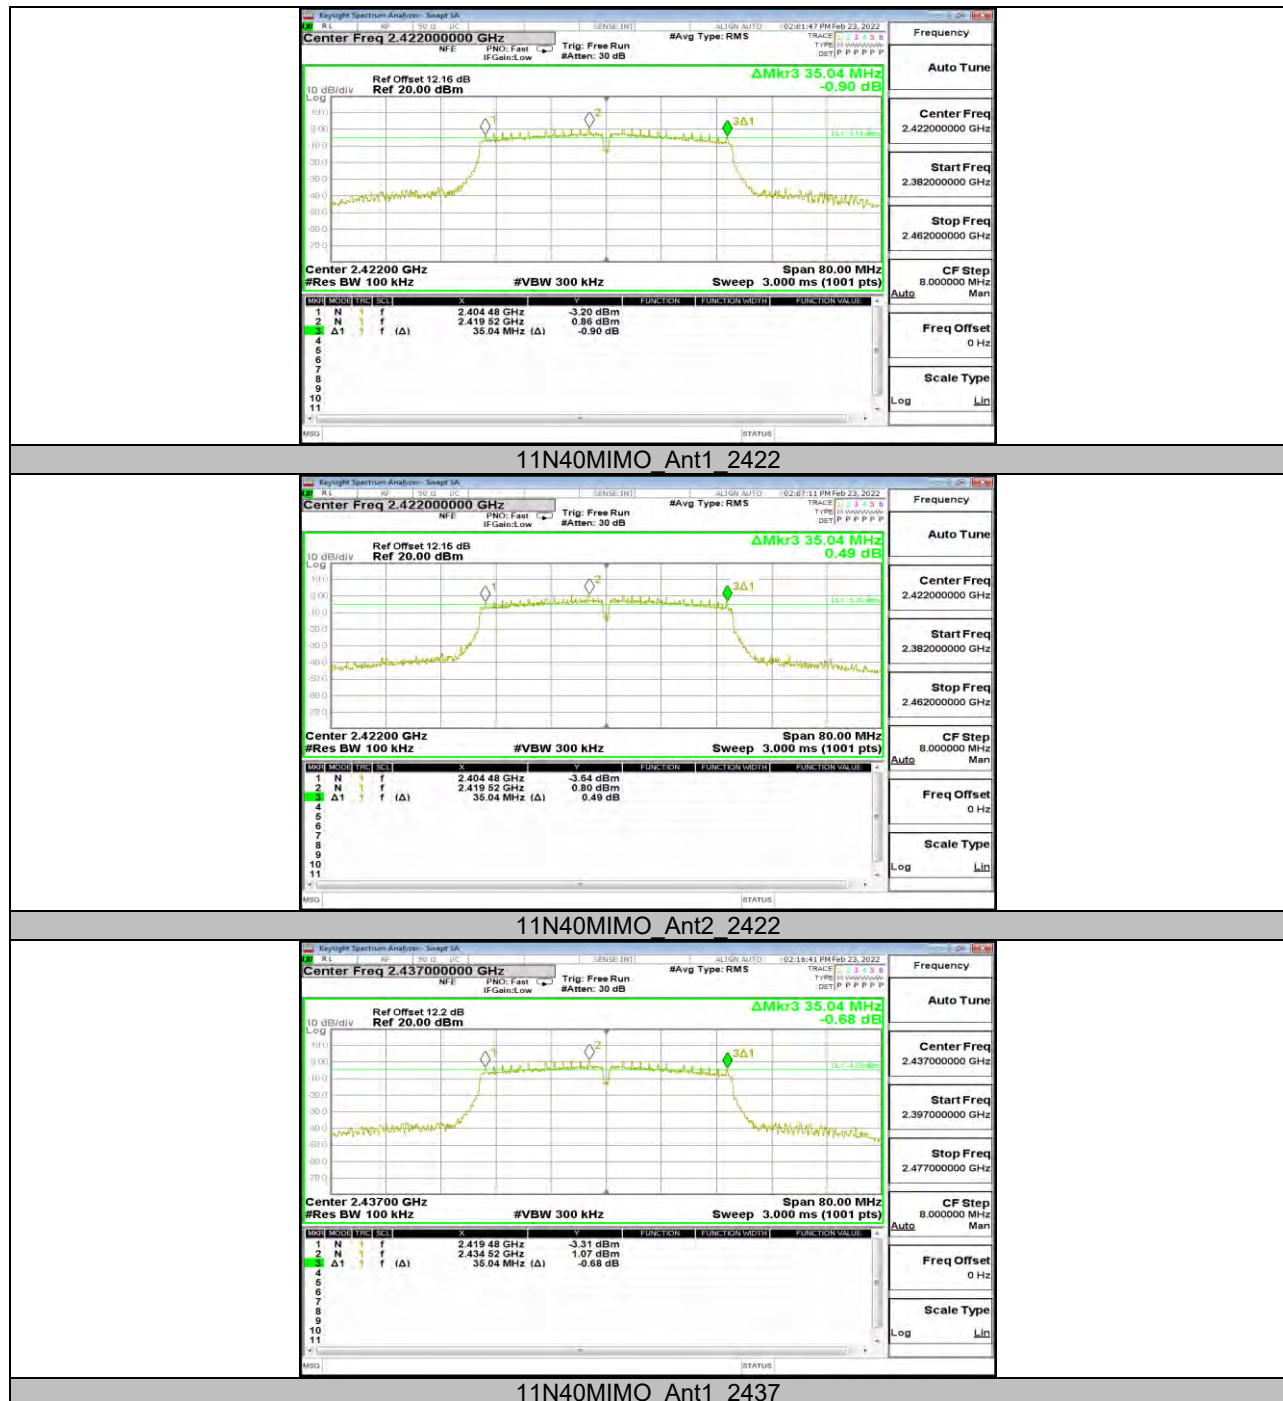







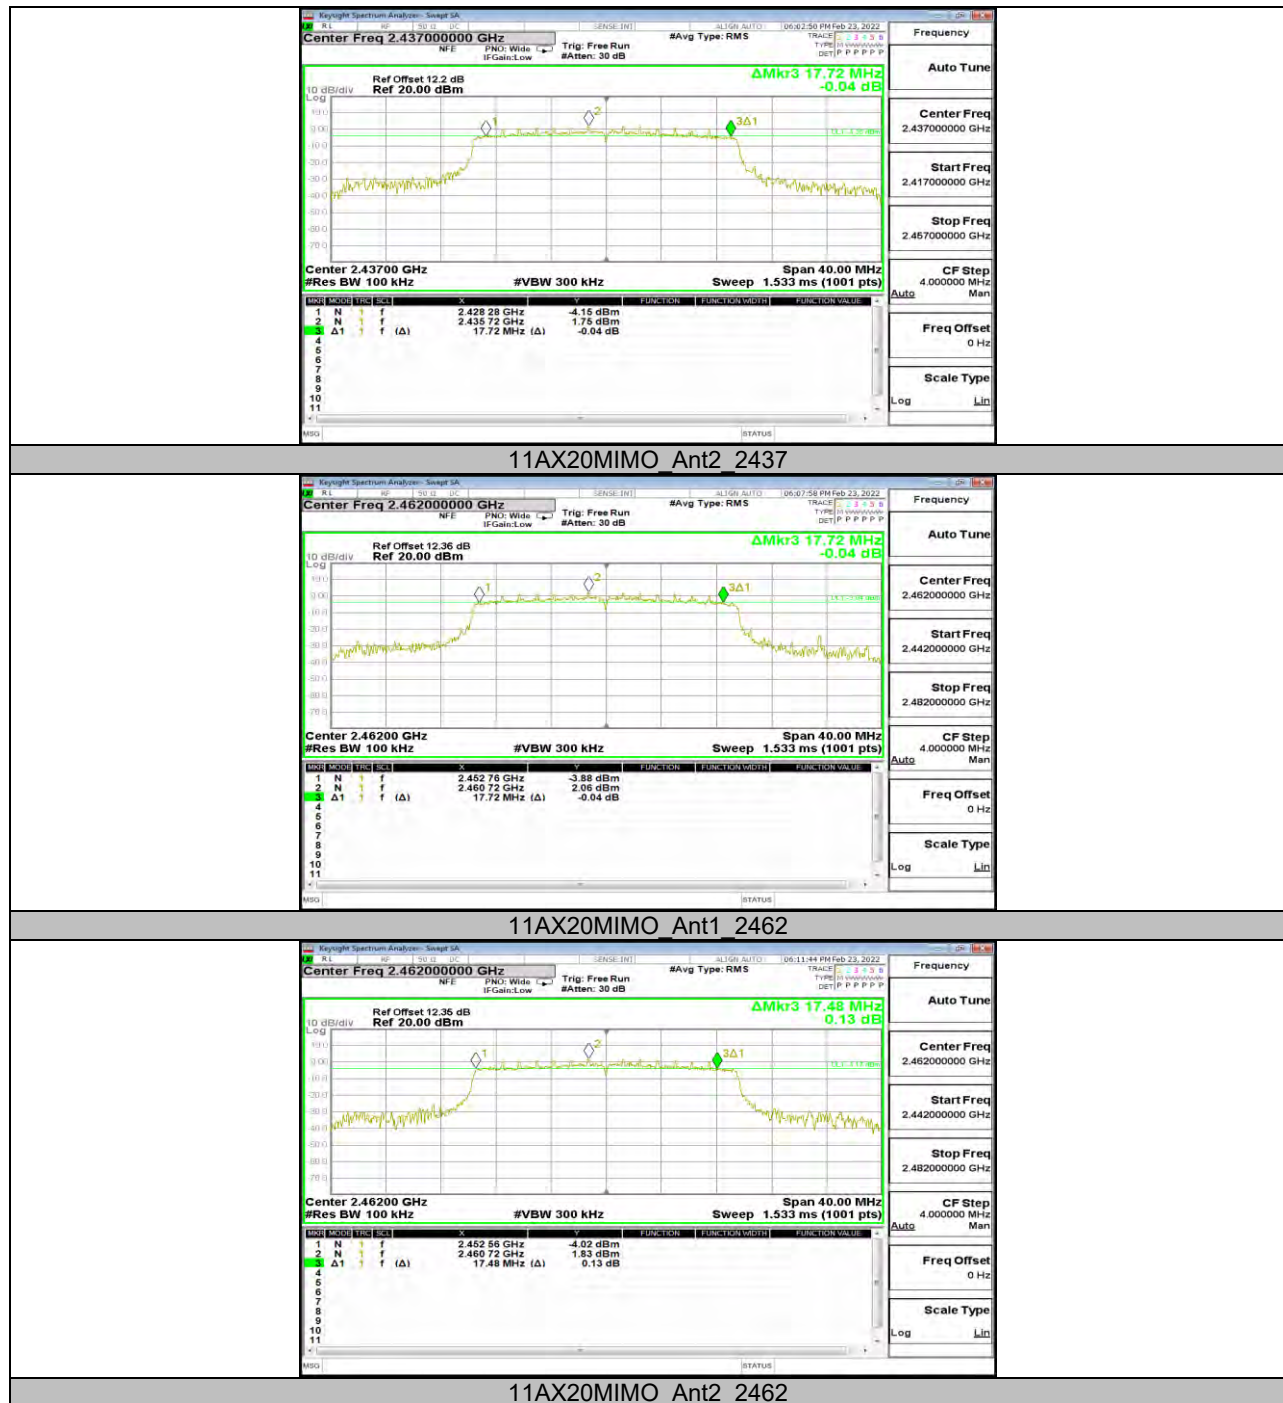







**11.2. Appendix B: Occupied Channel Bandwidth****11.2.1. Test Result**

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11B	Ant1	2412	12.700	2405.703	2418.403	PASS
	Ant2	2412	12.756	2405.675	2418.431	PASS
	Ant1	2437	12.649	2430.711	2443.360	PASS
	Ant2	2437	12.727	2430.645	2443.372	PASS
	Ant1	2462	12.632	2455.702	2468.334	PASS
	Ant2	2462	12.676	2455.676	2468.352	PASS
11G	Ant1	2412	17.576	2403.271	2420.847	PASS
	Ant2	2412	17.664	2403.059	2420.723	PASS
	Ant1	2437	17.577	2428.201	2445.778	PASS
	Ant2	2437	17.655	2428.112	2445.767	PASS
	Ant1	2462	17.782	2453.028	2470.810	PASS
	Ant2	2462	17.551	2453.020	2470.571	PASS
11N20MIMO	Ant1	2412	18.659	2402.675	2421.334	PASS
	Ant2	2412	18.319	2402.749	2421.068	PASS
	Ant1	2437	18.689	2427.629	2446.318	PASS
	Ant2	2437	18.224	2427.893	2446.117	PASS
	Ant1	2462	18.557	2452.690	2471.247	PASS
	Ant2	2462	18.256	2452.778	2471.034	PASS
11N40MIMO	Ant1	2422	36.090	2403.958	2440.048	PASS
	Ant2	2422	36.051	2403.991	2440.042	PASS
	Ant1	2437	35.989	2418.979	2454.968	PASS
	Ant2	2437	36.170	2418.977	2455.147	PASS
	Ant1	2452	35.914	2433.813	2469.727	PASS
	Ant2	2452	36.110	2433.961	2470.071	PASS
11AX20MIMO	Ant1	2412	19.023	2402.447	2421.470	PASS
	Ant2	2412	18.994	2402.424	2421.418	PASS
	Ant1	2437	19.063	2427.453	2446.516	PASS
	Ant2	2437	19.088	2427.416	2446.504	PASS
	Ant1	2462	19.043	2452.426	2471.469	PASS
	Ant2	2462	19.048	2452.456	2471.504	PASS
11AX40MIMO	Ant1	2422	37.729	2403.281	2441.010	PASS
	Ant2	2422	37.661	2403.189	2440.850	PASS
	Ant1	2437	37.573	2418.234	2455.807	PASS
	Ant2	2437	37.600	2418.222	2455.822	PASS
	Ant1	2452	37.511	2433.050	2470.561	PASS
	Ant2	2452	37.536	2433.290	2470.826	PASS





## 11.2.2. Test Graphs











