



FCC RF Test Report

APPLICANT : FUJITSU LIMITED
EQUIPMENT : FUJITSU LIFEBOOK Q series
BRAND NAME : FUJITSU
MODEL NAME : Q775
FCC ID : EJE-WB0090
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

This is a partial report which is included the RF conducted power, radiated band edges, and spurious emission measurement test items. The product was received on Nov. 11, 2014 and testing was completed on Dec. 01, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager

**SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : EJE-WB0090

Page Number : 1 of 27

Report Issued Date : Dec. 08, 2014

Report Version : Rev. 01

Report Template No.: BU5-FR15CWL Version 1.0



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification subjective to this standard	6
1.5 Modification of EUT	7
1.6 Testing Location	7
1.7 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Pre-Scanned RF Power	9
2.3 Test Mode	12
2.4 Connection Diagram of Test System	13
2.5 Support Unit used in test configuration and system	14
2.6 EUT Operation Test Setup	14
2.7 Measurement Results Explanation Example	14
3 TEST RESULT	15
3.1 Radiated Band Edges and Spurious Emission Measurement	15
3.2 AC Conducted Emission Measurement	20
3.3 Antenna Requirements	24
4 LIST OF MEASURING EQUIPMENT	26
5 UNCERTAINTY OF EVALUATION	27
APPENDIX A. TEST RESULT OF RADIATED TEST RESULTS	
APPENDIX B. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4N1171C	Rev. 01	Initial issue of report	Dec. 08, 2014



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.57 dB at 2389.920 MHz
3.2	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 12.20 dB at 20.814 MHz
3.3	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

FUJITSU LIMITED

1-1, Kamikonadaka 4-chome, Nakahara-ku, Kawasaki, 211-8588 Japan

1.2 Manufacturer

FUJITSU LIMITED

1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki, 211-8588 Japan

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	FUJITSU LIFEBOOK Q series
Brand Name	FUJITSU
Model Name	Q775
FCC ID	EJE-WB0090
Integrated WLAN Module	Brand Name: Intel Model Name: 7265NGW
EUT supports Radios application	WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth v4.0 EDR/LE
EUT Stage	Pre-Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5745~5825MHz.
Maximum Output Power to antenna	<Ant. 1> <2412 MHz ~ 2462 MHz> 802.11b : 17.47 dBm (0.0558 W) 802.11g : 20.48 dBm (0.1117 W) <5745 MHz ~ 5825 MHz> 802.11a : 19.66 dBm (0.0925 W) <Ant. 2> <2412 MHz ~ 2462 MHz> 802.11b : 17.46 dBm (0.0557 W) 802.11g : 20.47 dBm (0.1114 W) <5745 MHz ~ 5825 MHz> 802.11a : 19.22 dBm (0.0836 W) SISO <Ant. 1> <2412 MHz ~ 2462 MHz> 802.11n HT20 : 20.59 dBm (0.1146 W) 802.11n HT40 : 20.26 dBm (0.1062 W) <5745 MHz ~ 5825 MHz> 802.11n HT20 : 19.91 dBm (0.0979 W) 802.11n HT40 : 19.53 dBm (0.0897 W) 802.11ac VHT80 : 22.54 dBm (0.1795 W) SISO <Ant. 2> <2412 MHz ~ 2462 MHz> 802.11n HT20 : 20.58 dBm (0.1143 W) 802.11n HT40 : 20.01 dBm (0.1002 W) <5745 MHz ~ 5825 MHz> 802.11n HT20 : 19.24 dBm (0.0839 W) 802.11n HT40 : 19.52 dBm (0.0895 W) 802.11ac VHT80 : 22.35 dBm (0.1718 W) MIMO <Ant. 1+2> <2412 MHz ~ 2462 MHz> 802.11n HT20 : 20.49 dBm (0.1119 W) 802.11n HT40 : 20.08 dBm (0.1019 W) <5745 MHz ~ 5825 MHz> 802.11n HT20 : 20.46 dBm (0.1112 W) 802.11n HT40 : 20.08 dBm (0.1019 W) 802.11ac VHT80 : 23.32 dBm (0.2148 W)
Antenna Type	<Ant 1> 802.11b/g/n : PIFA Antenna type with gain 0.52 dBi 802.11a/n/ac : PIFA Antenna type with gain 0.33 dBi <Ant 2> 802.11b/g/n : PIFA Antenna type with gain -1.61 dBi 802.11a/n/ac : PIFA Antenna type with gain 1.89 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

Product Specification subjective to this standard			
Antenna Function for Transmitter		Ant. 1	Ant. 2
	802.11 a/b/g	V	V
	802.11 n/ac SISO	V	V
	802.11 n/ac MIMO	V	V

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		
	TH02-HY	CO05-HY	03CH05-HY

Note: The test site complies with ANSI C63.4 2009 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- FCC KDB 644545 D01 Guidance for IEEE 802 11ac Old Rules v01r02
- ANSI C63.10-2009

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane for 2.4GHz Ant. 1; Y plane for 2.4GHz Ant. 2; X plane for 2.4GHz Ant. 1+2; Y plane for 5GHz Ant. 1, Ant. 2, and Ant. 1+2) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4	149	5745	157	5785
	151	5755	159	5795
	153	5765	161	5805
	155	5775	165	5825



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

<Ant. 1>

	802.11b			802.11g		
Channel	01	06	11	01	06	11
Frequency (MHz)	2412	2437	2462	2412	2437	2462
Peak Power (dBm)	17.43	17.44	17.47	17.20	20.48	16.25

	802.11a		
Channel	149	157	165
Frequency (MHz)	5745	5785	5825
Peak Power (dBm)	19.66	19.60	19.51

<Ant. 2>

	802.11b			802.11g		
Channel	01	06	11	01	06	11
Frequency (MHz)	2412	2437	2462	2412	2437	2462
Peak Power (dBm)	17.42	17.46	17.45	18.04	20.47	16.24

	802.11a		
Channel	149	157	165
Frequency (MHz)	5745	5785	5825
Peak Power (dBm)	18.97	19.22	19.20



SISO <Ant. 1>

	802.11n HT20			802.11n HT40		
Channel	01	06	11	03	06	09
Frequency (MHz)	2412	2437	2462	2422	2437	2452
Peak Power (dBm)	17.58	20.59	16.55	16.52	20.26	15.45

	5GHz 802.11n HT20		
Channel	149	157	165
Frequency (MHz)	5745	5785	5825
Peak Power (dBm)	19.51	19.50	19.91

	5GHz 802.11n HT40		802.11ac VHT80
Channel	151	159	155
Frequency (MHz)	5755	5795	5775
Peak Power (dBm)	19.53	19.41	22.54

SISO <Ant. 2>

	802.11n HT20			802.11n HT40		
Channel	01	06	11	03	06	09
Frequency (MHz)	2412	2437	2462	2422	2437	2452
Peak Power (dBm)	18.46	20.58	16.51	16.51	20.01	14.82

	5GHz 802.11n HT20		
Channel	149	157	165
Frequency (MHz)	5745	5785	5825
Peak Power (dBm)	19.11	19.24	19.23

	5GHz 802.11n HT40		802.11ac VHT80
Channel	151	159	155
Frequency (MHz)	5755	5795	5775
Peak Power (dBm)	19.35	19.52	22.35

**MIMO <Ant. 1+2>**

	802.11n HT20			802.11n HT40		
Channel	01	06	11	03	06	09
Frequency (MHz)	2412	2437	2462	2422	2437	2452
Peak Power (dBm)	18.79	20.49	19.06	15.70	20.08	15.71

	5GHz 802.11n HT20		
Channel	149	157	165
Frequency (MHz)	5745	5785	5825
Peak Power (dBm)	20.41	20.46	20.24

	5GHz 802.11n HT40		802.11ac VHT80
Channel	151	159	155
Frequency (MHz)	5755	5795	5775
Peak Power (dBm)	19.82	20.08	23.32

Note: MIMO Ant. 1+2 is a calculated result from sum of the power MIMO Ant. 1 and MIMO Ant. 2.

2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.

<2.4GHz>

Test Cases					
Radiated TCs	Test Items	Mode	Data Rate	Test Channel	Remark
	Radiated Band Edge	802.11b	1 Mbps	1/11	<Ant. 1>&<Ant. 2>
		802.11g	6 Mbps	1/11	<Ant. 1>
		802.11n HT20	MCS0	1/6/11	SISO <Ant. 1> & MIMO <Ant. 1+2>
		802.11n HT40	MCS0	3/6/9	SISO <Ant. 1> & SISO <Ant. 2> & MIMO <Ant. 1+2>
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11	<Ant. 1>&<Ant. 2>
		802.11g	6 Mbps	1/6/11	<Ant. 1>
		802.11n HT20	MCS0	1/6/11	SISO <Ant. 1> & MIMO <Ant. 1+2>
		802.11n HT40	MCS0	3/6/9	SISO <Ant. 1> & SISO <Ant. 2> & MIMO <Ant. 1+2>


<5GHz>

Test Cases					
Radiated TCs	Test Items	Mode	Data Rate	Test Channel	
	Radiated Spurious Emission	802.11a	6 Mbps	149/157/165	<Ant. 1>&<Ant. 2>
		802.11n HT20	MCS0	149/157/165	SISO <Ant. 1> & MIMO <Ant. 1+2>
		802.11n HT40	MCS0	151/159	SISO <Ant. 1> & MIMO <Ant. 1+2>
		802.11ac VHT80	MCS0	155	SISO <Ant. 1> & MIMO <Ant. 1+2>


Test Cases	
AC Conducted	Mode 1 : WLAN (2.4GHz) Link + Bluetooth Link + TC+ TF
Emission	Mode 2 : WLAN (5GHz) Link + Bluetooth Link + TC+ TF
Remark: - The worst case of conducted emission is mode 2; only the test data of it was reported. - TC stands for Test Configuration, and consists of LCD Monitor, Earphone, USB HD, Adapter, and SD Card. - TF stands for Test Function, and consists of MPEG4, Camera and H-Pattern.	

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

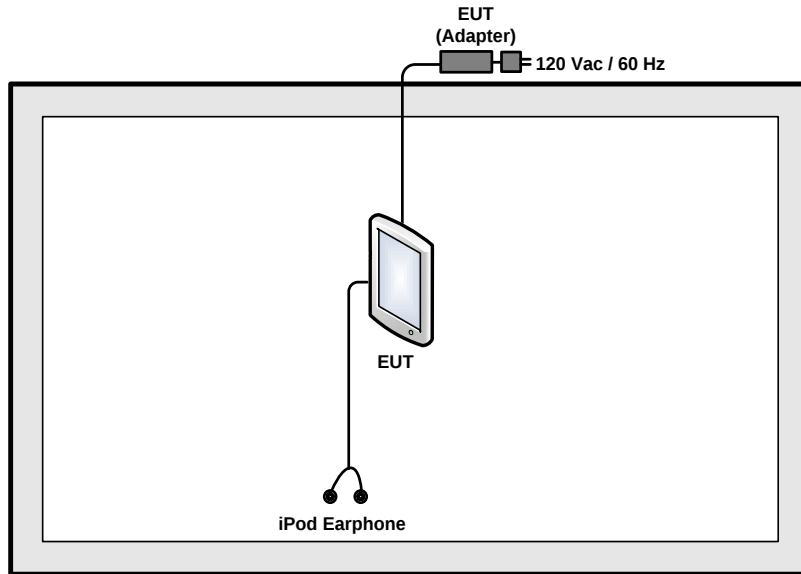

<AC Conducted Emission Mode>

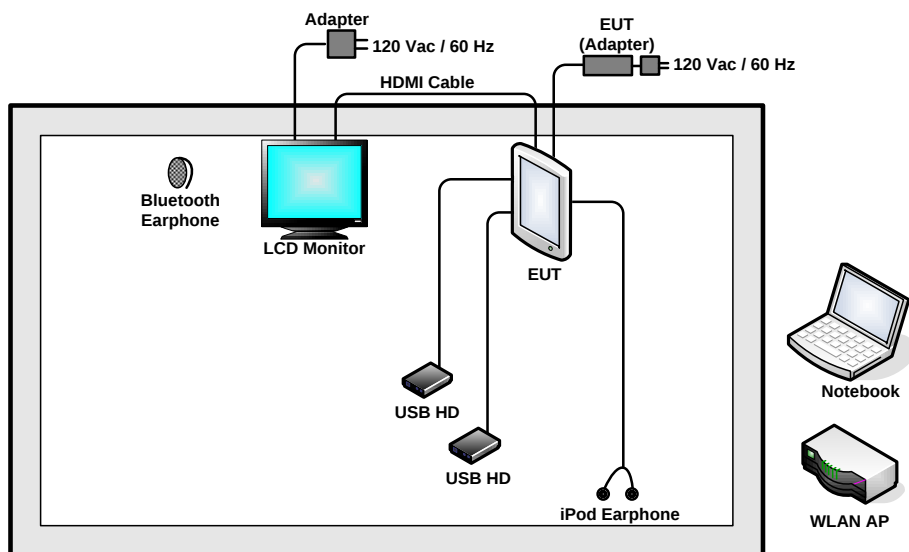

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	D-Link	DIR-865L	KA2IR865LA1	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	LCD Monitor	DELL	U2410	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
6.	USB HD	Pqi	H568V	FCC DoC	Unshielded, 0.5 m	N/A
7.	iPod Earphone	Apple	N/A	N/A	Unshielded, 1.15m	N/A
8.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.6 EUT Operation Test Setup

The programmed RF utility “TX Tool”, is installed in EUT to provide channel selection, power level, data rate and the application type. RF Utility can send transmitting signal for all testing. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)



3 Test Result

3.1 Radiated Band Edges and Spurious Emission Measurement

3.1.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.1.3 Test Procedure


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1	802.11b	98.96	-	-	10Hz
2	802.11b	98.70	-	-	
1	802.11g	98.57	-	-	
2	802.11g	98.57	-	-	
1	2.4GHz 802.11n HT20	98.77	-	-	
2	2.4GHz 802.11n HT20	98.46	-	-	
1	2.4GHz 802.11n HT40	97.44	950.00	1.05	3kHz
2	2.4GHz 802.11n HT40	96.93	948.00	1.05	
1+2	2.4GHz 802.11n HT20 for Ant 1	98.46	-	-	10Hz
1+2	2.4GHz 802.11n HT20 for Ant 2	98.46	-	-	
1+2	2.4GHz 802.11n HT40 for Ant 1	96.93	948.00	1.05	3kHz
1+2	2.4GHz 802.11n HT40 for Ant 2	96.93	948.00	1.05	
1	802.11a	98.57	-	-	10Hz
2	802.11a	98.57	-	-	
1	5GHz 802.11n HT20	98.47	-	-	
2	5GHz 802.11n HT20	98.46	-	-	
1	5GHz 802.11n HT40	96.93	948.00	1.05	3kHz
2	5GHz 802.11n HT40	96.93	948.00	1.05	
1	5GHz 802.11n VHT80	93.22	440.00	2.27	
2	5GHz 802.11n VHT80	94.07	444.00	2.25	
1+2	5GHz 802.11n HT20 for Ant 1	98.46	-	-	10Hz
1+2	5GHz 802.11n HT20 for Ant 2	98.47	-	-	
1+2	5GHz 802.11n HT40 for Ant 1	96.93	948.00	1.05	3kHz
1+2	5GHz 802.11n HT40 for Ant 2	96.93	948.00	1.05	
1+2	5GHz 802.11n VHT80	89.58	258.00	3.88	10kHz
1+2	5GHz 802.11n VHT80	90.28	260.00	3.85	

3.1.4 Test Setup


For radiated emissions below 30MHz

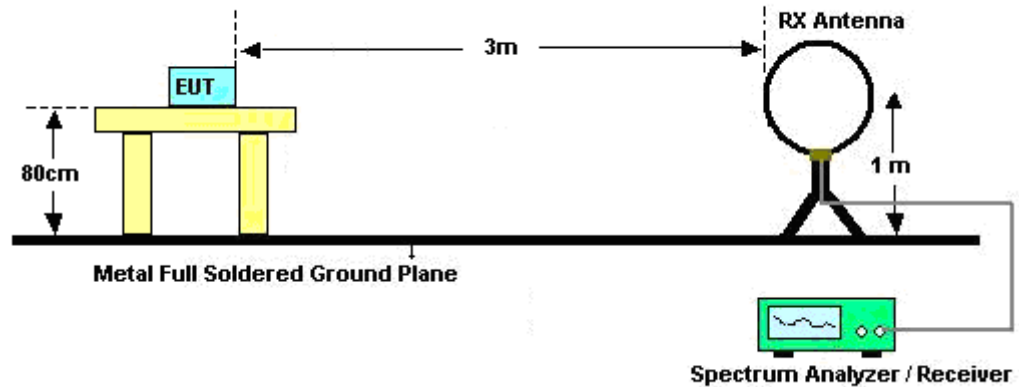

For radiated emissions from 30MHz to 1GHz

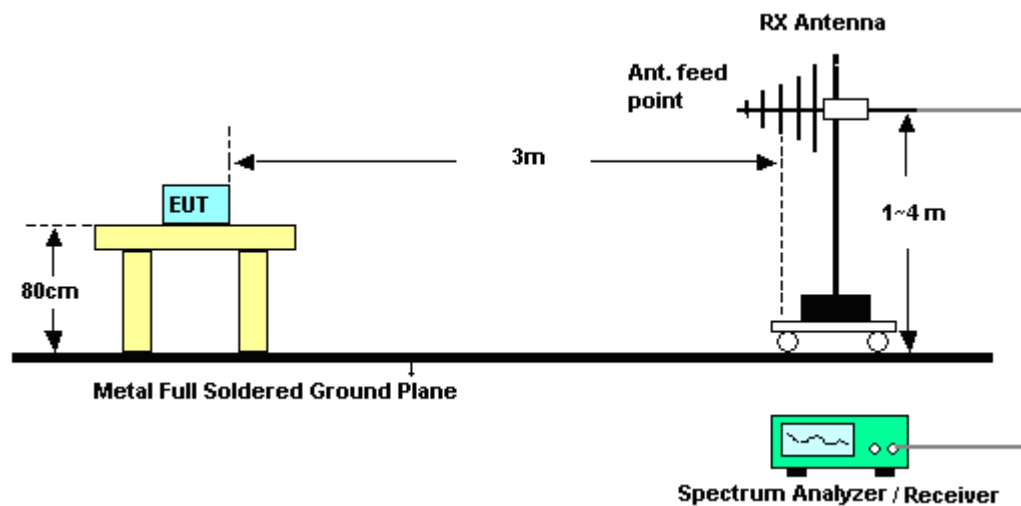

For radiated emissions above 1GHz

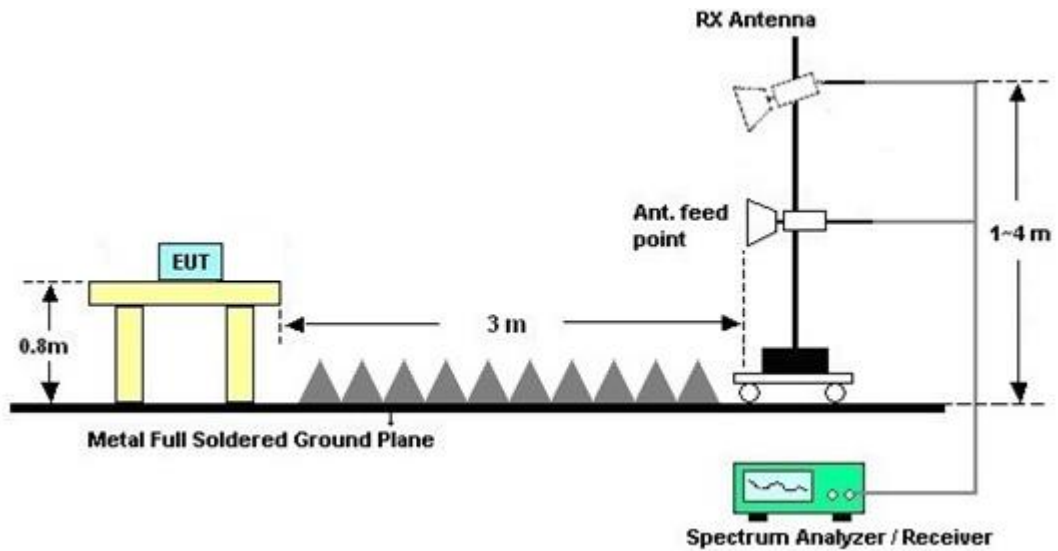

3.1.5 Test Results of Radiated Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.1.6 Test Result

Please refer to Appendix A.

3.2 AC Conducted Emission Measurement

3.2.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.2.4 Test Setup

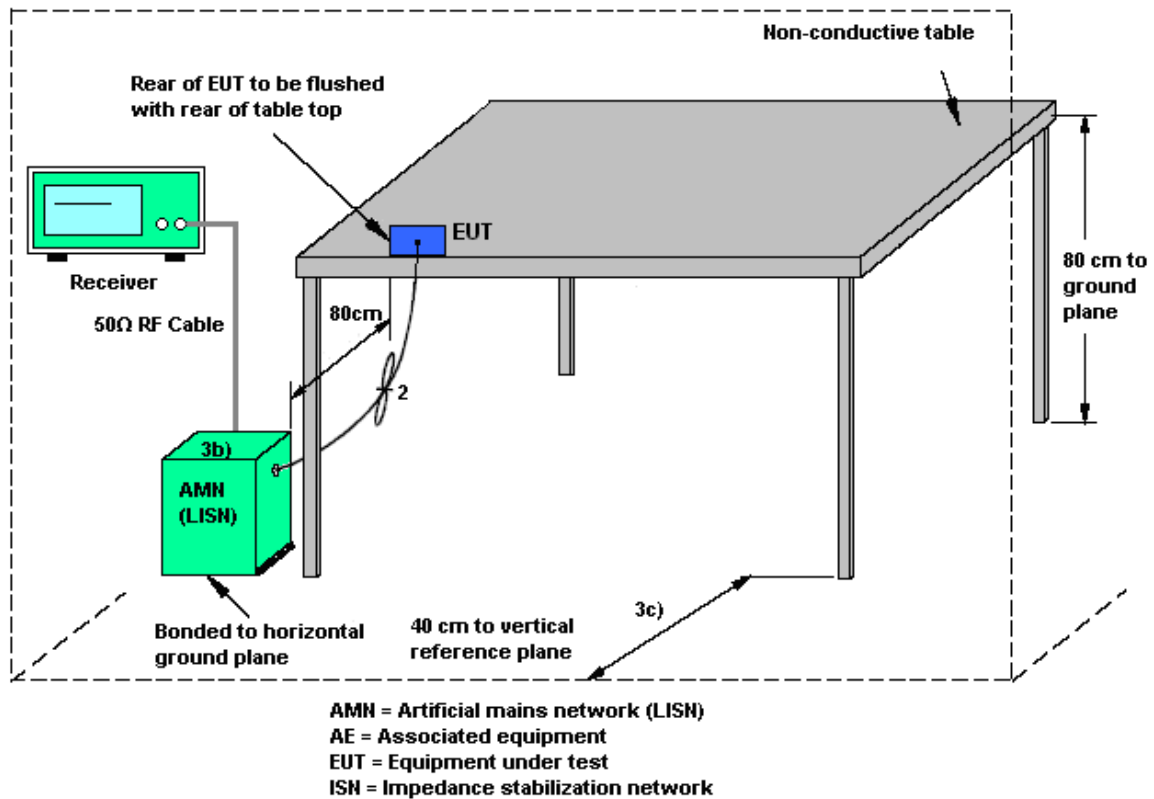

3.2.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	21~23℃
Test Engineer :	Eric Jeng	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN (5GHz) Link + Bluetooth Link + TC+ TF		

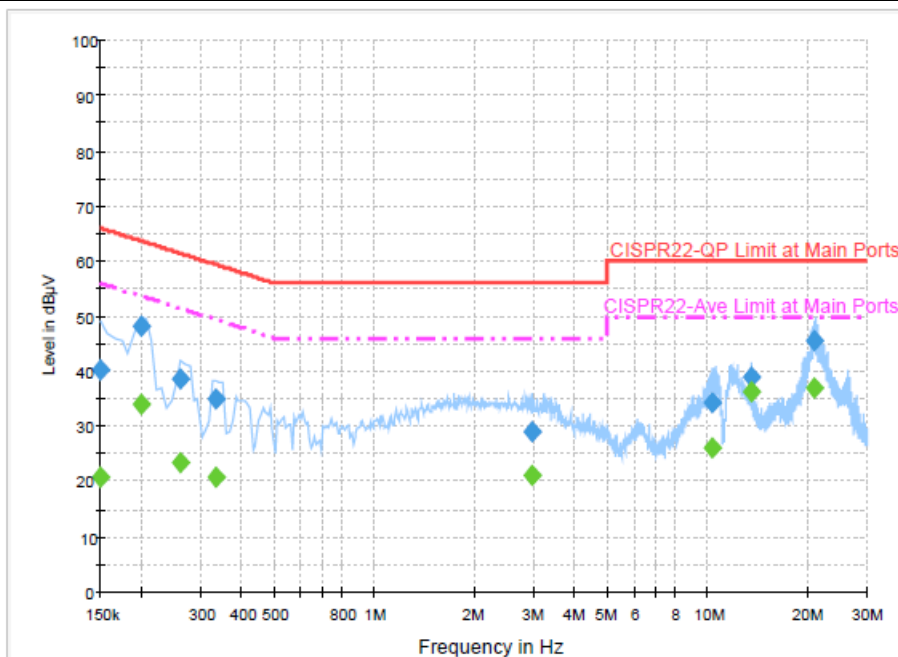

Final Result : QuasiPeak


Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	40.2	Off	L1	19.4	25.8	66.0
0.198000	48.2	Off	L1	19.4	15.5	63.7
0.262000	38.6	Off	L1	19.5	22.8	61.4
0.334000	34.9	Off	L1	19.5	24.5	59.4
2.974000	28.9	Off	L1	19.5	27.1	56.0
10.310000	34.4	Off	L1	19.6	25.6	60.0
13.558000	39.1	Off	L1	19.7	20.9	60.0
20.878000	45.4	Off	L1	19.8	14.6	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	20.8	Off	L1	19.4	35.2	56.0
0.198000	33.9	Off	L1	19.4	19.8	53.7
0.262000	23.5	Off	L1	19.5	27.9	51.4
0.334000	20.7	Off	L1	19.5	28.7	49.4
2.974000	21.0	Off	L1	19.5	25.0	46.0
10.310000	26.2	Off	L1	19.6	23.8	50.0
13.558000	36.3	Off	L1	19.7	13.7	50.0
20.878000	37.0	Off	L1	19.8	13.0	50.0



Test Mode :	Mode 2	Temperature :	21~23℃
Test Engineer :	Eric Jeng	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN (5GHz) Link + Bluetooth Link + TC+ TF		

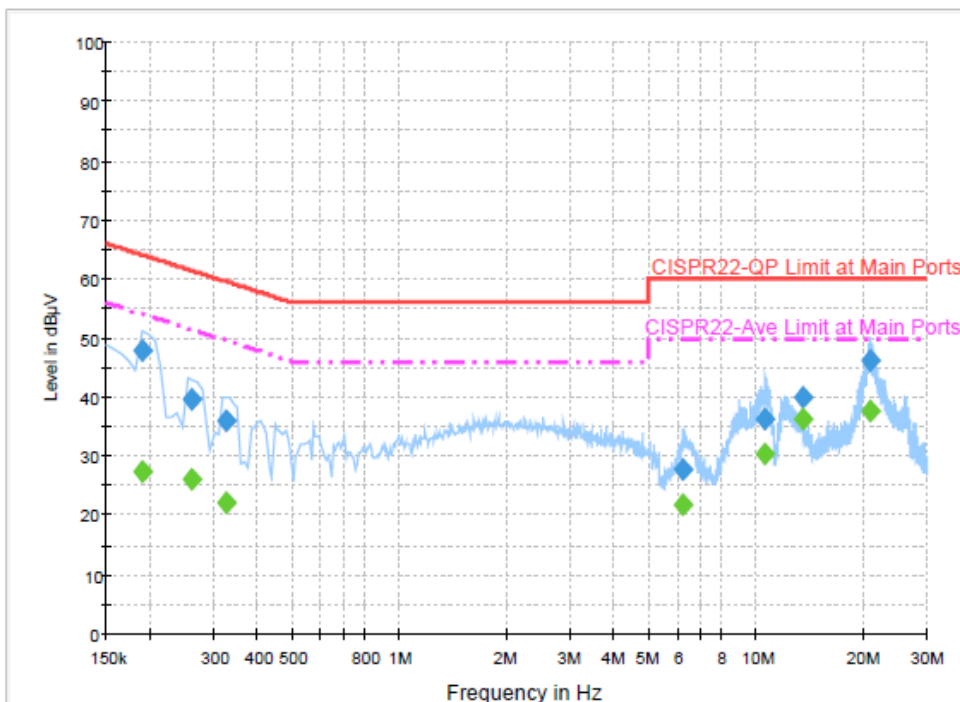

Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190000	47.9	Off	N	19.5	16.1	64.0
0.262000	39.5	Off	N	19.5	21.9	61.4
0.326000	35.9	Off	N	19.5	23.7	59.6
6.238000	27.7	Off	N	19.6	32.3	60.0
10.606000	36.3	Off	N	19.7	23.7	60.0
13.558000	40.0	Off	N	19.7	20.0	60.0
20.814000	46.1	Off	N	19.8	13.9	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190000	27.5	Off	N	19.5	26.5	54.0
0.262000	26.1	Off	N	19.5	25.3	51.4
0.326000	22.1	Off	N	19.5	27.5	49.6
6.238000	21.9	Off	N	19.6	28.1	50.0
10.606000	30.5	Off	N	19.7	19.5	50.0
13.558000	36.2	Off	N	19.7	13.8	50.0
20.814000	37.8	Off	N	19.8	12.2	50.0

3.3 Antenna Requirements

3.3.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the Antenna exceeds 6 dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

For CDD and beamforming transmissions, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;

G_k is the gain in dBi of the k th antenna.



The EUT supports CDD mode and beamforming.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant. 1	Ant. 2	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
2.4 GHz	0.52	-1.61	2.53	2.53	0.00	0.00
5 GHz	0.33	1.89	4.16	4.16	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1036004	300MHz~40GHz	Aug. 09, 2014	Nov. 14, 2014 ~ Nov. 16, 2014	Aug. 08, 2015	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Aug. 09, 2014	Nov. 14, 2014 ~ Nov. 16, 2014	Aug. 08, 2015	Conducted (TH02-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Nov. 12, 2014	Dec. 01, 2014	Nov. 11, 2015	Conduction (CO05-HY)
LISN (for auxiliary equipment)	Rohde & Schwarz	ENV216	100081	9kHz ~ 30MHz	Dec. 12, 2013	Dec. 01, 2014	Dec. 11, 2014	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz ~ 30MHz	Dec. 04, 2013	Dec. 01, 2014	Dec. 03, 2014	Conduction (CO05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Dec. 01, 2014	N/A	Conduction (CO05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Nov. 21, 2014 ~ Nov. 29, 2014	Jun. 08, 2015	Radiation (03CH05-HY)
Bilog Antenna	Schaffner	CBL6111C	2725	30MHz~1GHz	Sep. 27, 2014	Nov. 21, 2014 ~ Nov. 29, 2014	Sep. 26, 2015	Radiation (03CH05-HY)
Double Ridged Guide Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-124 1	1GHz~18GHz	Apr. 16, 2014	Nov. 21, 2014 ~ Nov. 29, 2014	Apr. 15, 2015	Radiation (03CH05-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 251	18GHz~40GHz	Oct. 02, 2014	Nov. 21, 2014 ~ Nov. 29, 2014	Oct. 01, 2015	Radiation (03CH05-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	100kHz~18GHz	Jul. 07, 2014	Nov. 21, 2014 ~ Nov. 29, 2014	Jul. 06, 2015	Radiation (03CH05-HY)
Preamplifier	EMCI	EMC011830	980148	DC~18GHz	Jun. 23, 2014	Nov. 21, 2014 ~ Nov. 29, 2014	Jun. 22, 2015	Radiation (03CH05-HY)
Preamplifier	COM-POWER	PA-103	161075	9kHz~30MHz	Apr. 15, 2014	Nov. 21, 2014 ~ Nov. 29, 2014	Apr. 14, 2015	Radiation (03CH05-HY)
Preamplifier	Miteq	TTA0204	1872107	18GHz~40GHz	May 23, 2014	Nov. 21, 2014 ~ Nov. 29, 2014	May 22, 2015	Radiation (03CH05-HY)
Turn Table	HD	HD100	420/611	0 - 360 degree	N/A	Nov. 21, 2014 ~ Nov. 29, 2014	N/A	Radiation (03CH05-HY)
Antenna Mast	HD	HD100	240/666	1 m - 4 m	N/A	Nov. 21, 2014 ~ Nov. 29, 2014	N/A	Radiation (03CH05-HY)
Loop Antenna	R&S	HFH2-Z2	100315	9 kHz~30 MHz	Jul. 28, 2014	Nov. 21, 2014 ~ Nov. 29, 2014	Jul. 27, 2015	Radiation (03CH05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1
---	-----