


Test Mode	Channel	Polarization	Verdict
11A	5240	Horizontal	PASS

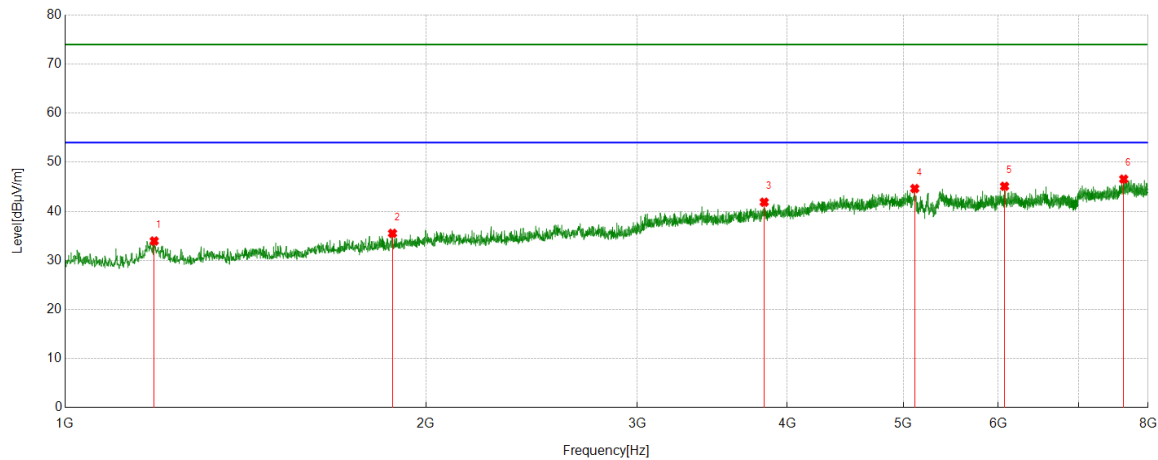


#### PK Result:

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1186.6874	55.54	-21.58	33.96	74.00	-40.04	Horizontal
2	1875.0972	52.59	-17.07	35.52	74.00	-38.48	Horizontal
3	3828.3143	48.58	-6.71	41.87	74.00	-32.13	Horizontal
4	5111.0123	46.74	-2.10	44.64	74.00	-29.36	Horizontal
5	6073.2304	45.81	-0.71	45.10	74.00	-28.90	Horizontal
6	7634.4038	43.93	2.63	46.56	74.00	-27.44	Horizontal

- Remark:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
  4. Peak: Peak detector.
  5. AVG: VBW refer to section 6.2.
  6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.
  7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
  8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5240	Vertical	PASS

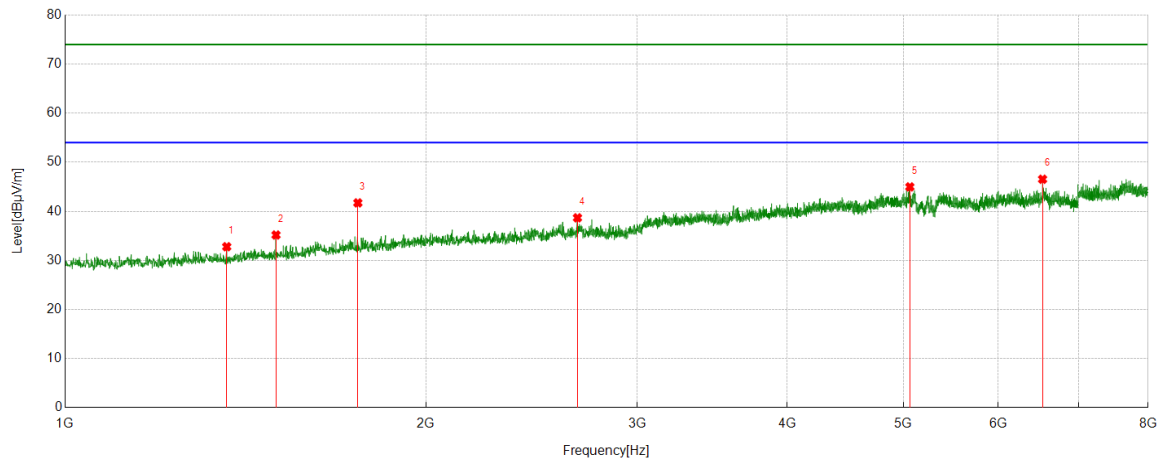


#### PK Result:

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1364.0404	53.04	-20.25	32.79	74.00	-41.21	Vertical
2	1499.3888	54.70	-19.52	35.18	74.00	-38.82	Vertical
3	1754.5283	59.34	-17.62	41.72	74.00	-32.28	Vertical
4	2674.7416	51.16	-12.48	38.68	74.00	-35.32	Vertical
5	5063.5626	47.30	-2.32	44.98	74.00	-29.02	Vertical
6	6532.9481	46.98	-0.44	46.54	74.00	-27.46	Vertical

- Remark:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
  4. Peak: Peak detector.
  5. AVG: VBW refer to section 6.2.
  6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.
  7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
  8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5745	Horizontal	PASS

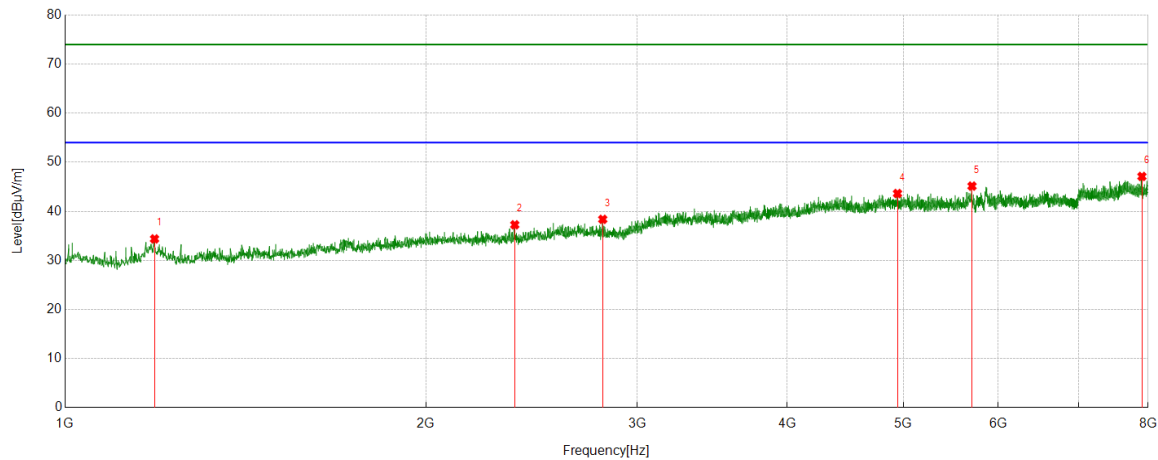


#### PK Result:

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1187.4653	55.89	-21.51	34.38	74.00	-39.62	Horizontal
2	2371.3746	51.77	-14.51	37.26	74.00	-36.74	Horizontal
3	2807.7564	51.10	-12.73	38.37	74.00	-35.63	Horizontal
4	4944.5494	46.80	-3.17	43.63	74.00	-30.37	Horizontal
5	5705.3006	46.39	-1.25	45.14	74.00	-28.86	Horizontal
6	7905.8784	44.37	2.74	47.11	74.00	-26.89	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5745	Vertical	PASS

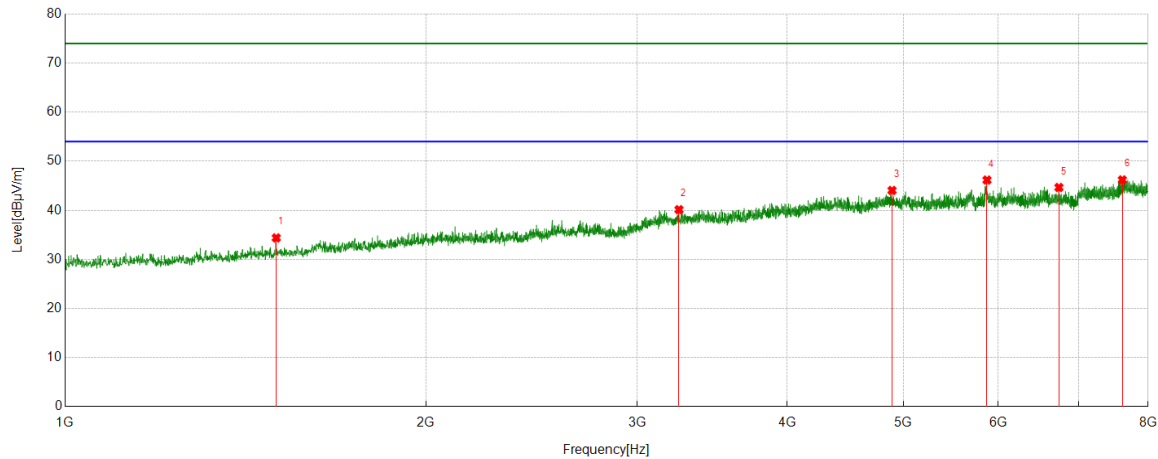


#### PK Result:

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1500.1667	53.89	-19.50	34.39	74.00	-39.61	Vertical
2	3250.3612	49.66	-9.53	40.13	74.00	-33.87	Vertical
3	4893.2104	47.01	-2.96	44.05	74.00	-29.95	Vertical
4	5871.7635	46.19	-0.02	46.17	74.00	-27.83	Vertical
5	6741.4157	44.31	0.35	44.66	74.00	-29.34	Vertical
6	7614.1794	43.90	2.30	46.20	74.00	-27.80	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5785	Horizontal	PASS

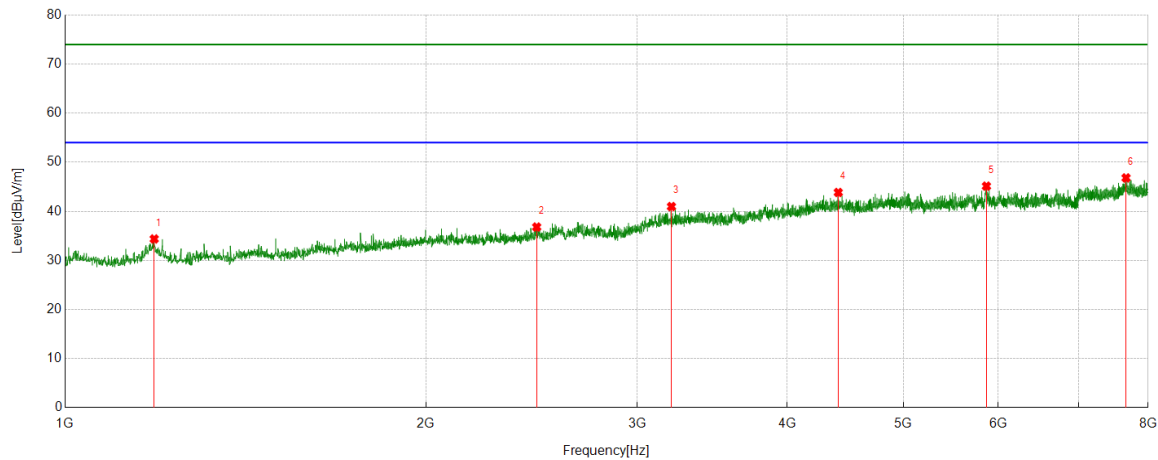


#### PK Result:

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1186.6874	55.87	-21.50	34.37	74.00	-39.63	Horizontal
2	2473.2748	50.56	-13.76	36.80	74.00	-37.20	Horizontal
3	3203.6893	50.76	-9.79	40.97	74.00	-33.03	Horizontal
4	4413.2681	48.13	-4.29	43.84	74.00	-30.16	Horizontal
5	5865.5406	45.06	0.07	45.13	74.00	-28.87	Horizontal
6	7668.6298	44.52	2.29	46.81	74.00	-27.19	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5785	Vertical	PASS

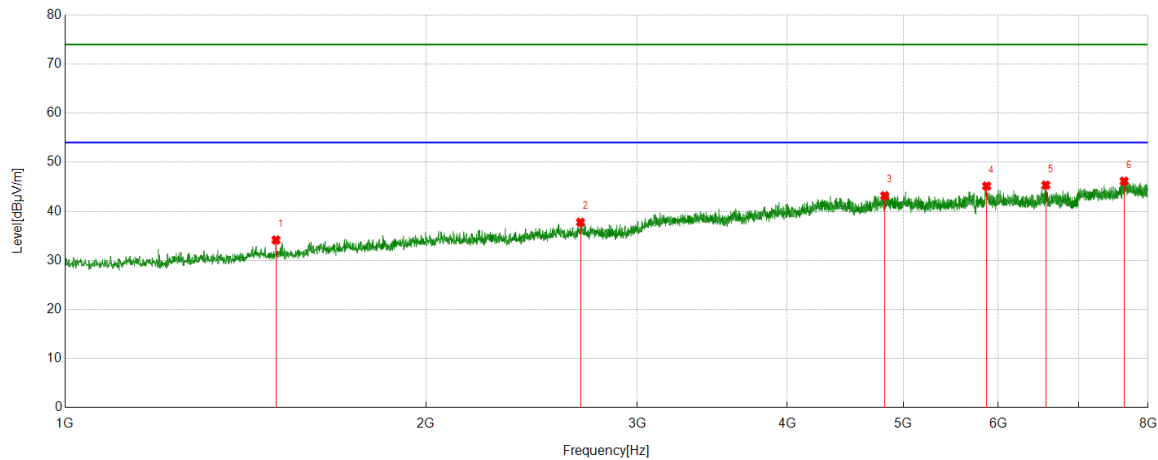


#### PK Result:

o.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1499.3888	53.66	-19.51	34.15	74.00	-39.85	Vertical
2	2690.2989	50.22	-12.45	37.77	74.00	-36.23	Vertical
3	4824.7583	46.55	-3.36	43.19	74.00	-30.81	Vertical
4	5867.8742	45.05	0.10	45.15	74.00	-28.85	Vertical
5	6574.1749	45.42	-0.08	45.34	74.00	-28.66	Vertical
6	7639.8489	43.66	2.48	46.14	74.00	-27.86	Vertical

- Remark:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
  4. Peak: Peak detector.
  5. AVG: VBW refer to section 6.2.
  6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.
  7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
  8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5825	Horizontal	PASS

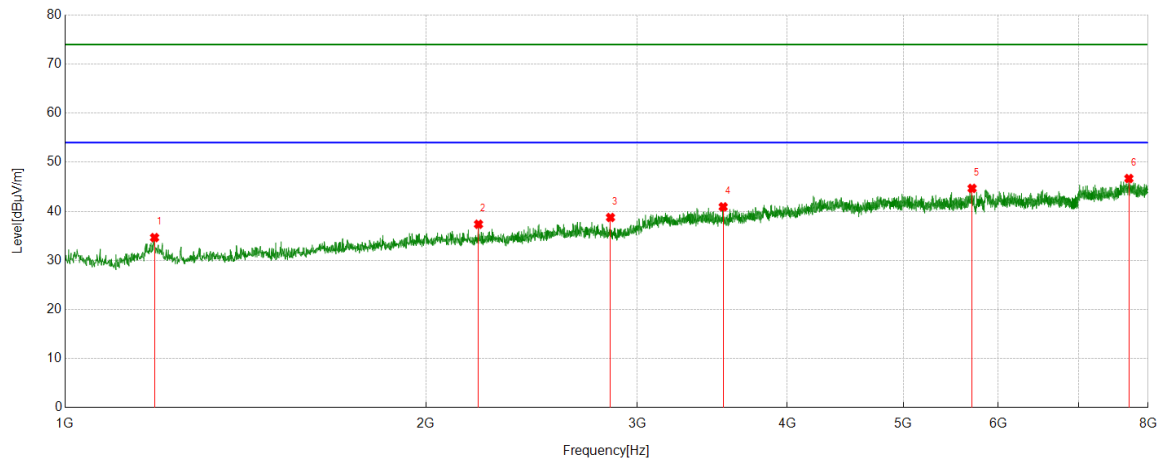


#### PK Result:

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1187.4653	56.16	-21.51	34.65	74.00	-39.35	Horizontal
2	2211.9124	52.83	-15.46	37.37	74.00	-36.63	Horizontal
3	2849.7611	51.20	-12.45	38.75	74.00	-35.25	Horizontal
4	3538.1709	49.24	-8.33	40.91	74.00	-33.09	Horizontal
5	5706.0785	45.92	-1.25	44.67	74.00	-29.33	Horizontal
6	7710.6345	44.31	2.37	46.68	74.00	-27.32	Horizontal

- Remark:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
  4. Peak: Peak detector.
  5. AVG: VBW refer to section 6.2.
  6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.
  7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
  8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5825	Vertical	PASS

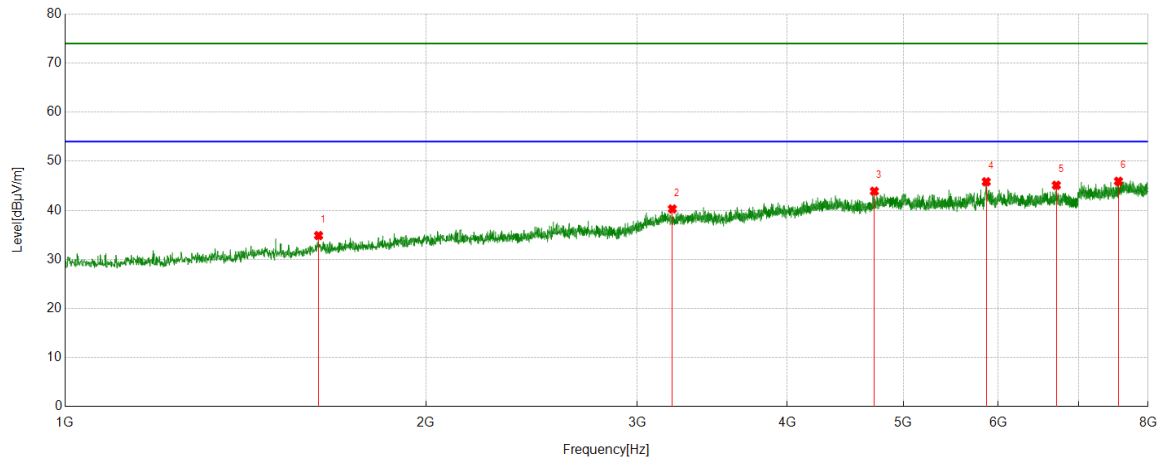


#### PK Result:

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1626.9586	53.14	-18.28	34.86	74.00	-39.14	Vertical
2	3209.1343	50.03	-9.75	40.28	74.00	-33.72	Vertical
3	4729.8589	47.17	-3.28	43.89	74.00	-30.11	Vertical
4	5863.207	45.77	0.05	45.82	74.00	-28.18	Vertical
5	6707.9676	44.82	0.29	45.11	74.00	-28.89	Vertical
6	7557.3953	44.40	1.52	45.92	74.00	-28.08	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5180	Horizontal	PASS

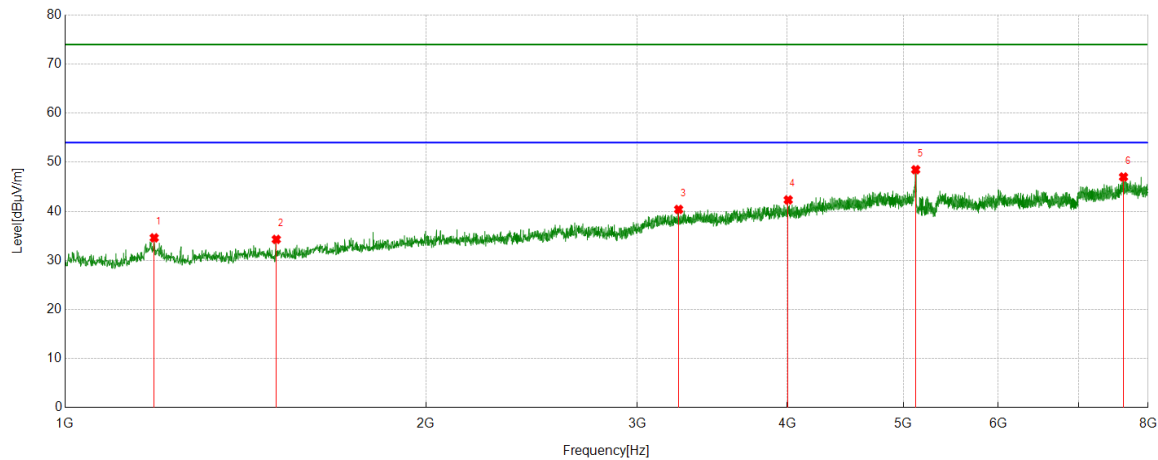


#### PK Result:

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1186.6874	56.18	-21.58	34.60	74.00	-39.40	Horizontal
2	1500.1667	53.79	-19.51	34.28	74.00	-39.72	Horizontal
3	3248.0276	49.87	-9.48	40.39	74.00	-33.61	Horizontal
4	4008.7788	48.37	-6.05	42.32	74.00	-31.68	Horizontal
5	5120.3467	50.63	-2.15	48.48	74.00	-25.52	Horizontal
6	7631.2924	44.34	2.66	47.00	74.00	-27.00	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5180	Vertical	PASS

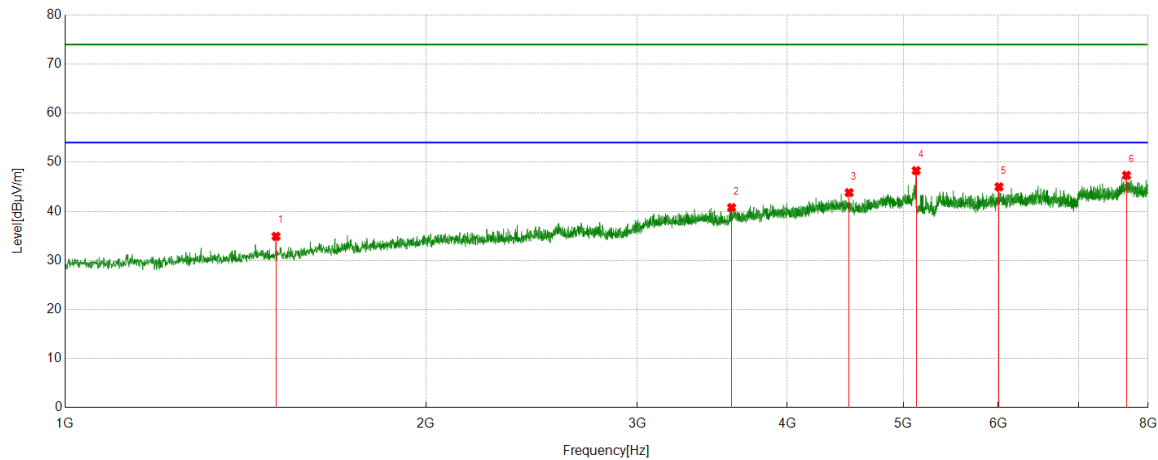


#### PK Result:

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1499.3888	54.42	-19.52	34.90	74.00	-39.10	Vertical
2	3595.7329	48.55	-7.80	40.75	74.00	-33.25	Vertical
3	4505.834	48.46	-4.65	43.81	74.00	-30.19	Vertical
4	5125.0139	50.47	-2.18	48.29	74.00	-25.71	Vertical
5	6008.6676	46.39	-1.40	44.99	74.00	-29.01	Vertical
6	7675.6306	45.16	2.18	47.34	74.00	-26.66	Vertical

- Remark:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
  4. Peak: Peak detector.
  5. AVG: VBW refer to section 6.2.
  6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.
  7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
  8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5200	Horizontal	PASS

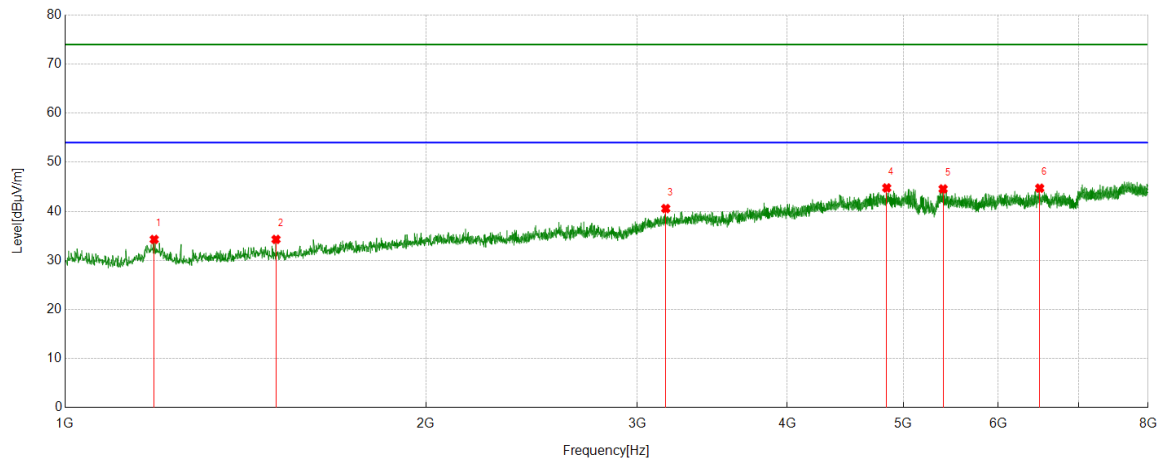


#### PK Result:

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1186.6874	55.86	-21.58	34.28	74.00	-39.72	Horizontal
2	1499.3888	53.80	-19.52	34.28	74.00	-39.72	Horizontal
3	3168.6854	49.66	-9.10	40.56	74.00	-33.44	Horizontal
4	4843.427	47.64	-2.87	44.77	74.00	-29.23	Horizontal
5	5397.2664	46.37	-1.81	44.56	74.00	-29.44	Horizontal
6	6497.1664	45.31	-0.60	44.71	74.00	-29.29	Horizontal

- Remark:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
  4. Peak: Peak detector.
  5. AVG: VBW refer to section 6.2.
  6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.
  7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
  8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5200	Vertical	PASS

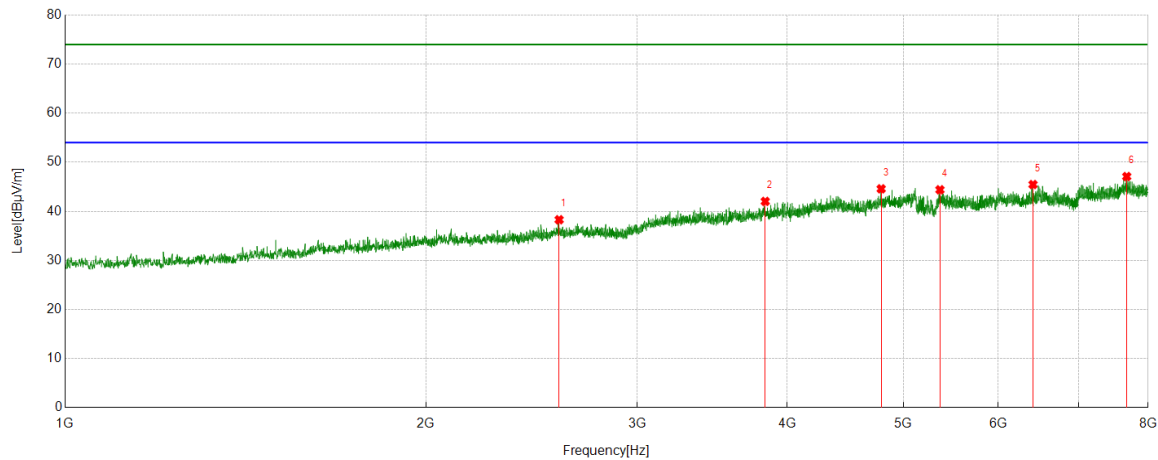


#### PK Result:

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2582.1758	51.35	-13.06	38.29	74.00	-35.71	Vertical
2	3836.0929	48.85	-6.83	42.02	74.00	-31.98	Vertical
3	4792.088	47.29	-2.71	44.58	74.00	-29.42	Vertical
4	5364.5961	46.27	-1.88	44.39	74.00	-29.61	Vertical
5	6413.9349	46.24	-0.78	45.46	74.00	-28.54	Vertical
6	7678.7421	44.92	2.17	47.09	74.00	-26.91	Vertical

- Remark:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
  4. Peak: Peak detector.
  5. AVG: VBW refer to section 6.2.
  6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.
  7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
  8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5240	Horizontal	PASS

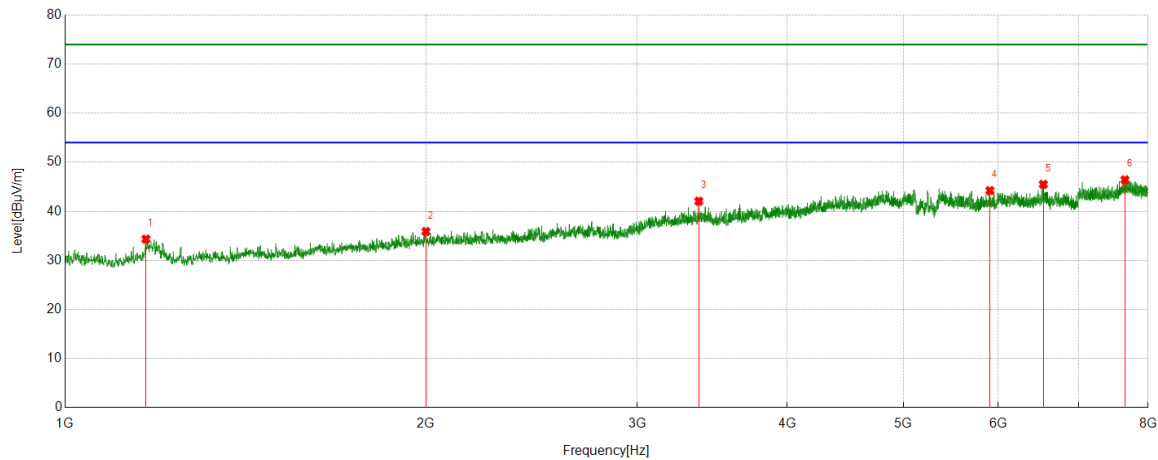


#### PK Result:

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1168.0187	55.57	-21.23	34.34	74.00	-39.66	Horizontal
2	1999.5555	51.81	-15.92	35.89	74.00	-38.11	Horizontal
3	3376.3752	51.02	-8.96	42.06	74.00	-31.94	Horizontal
4	5904.4338	45.63	-1.41	44.22	74.00	-29.78	Horizontal
5	6542.2825	45.64	-0.15	45.49	74.00	-28.51	Horizontal
6	7652.2947	44.42	2.00	46.42	74.00	-27.58	Horizontal

- Remark:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
  4. Peak: Peak detector.
  5. AVG: VBW refer to section 6.2.
  6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.
  7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
  8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5240	Vertical	PASS

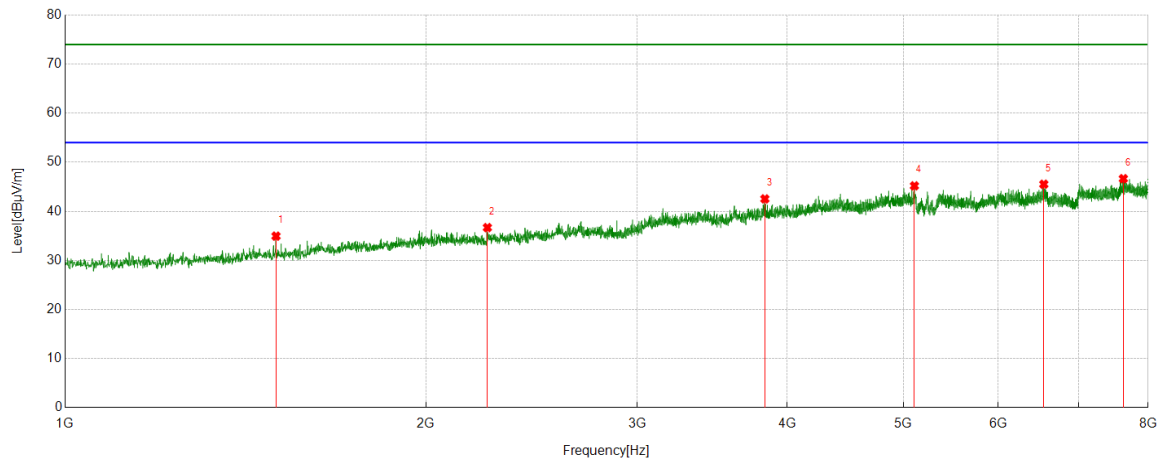


#### PK Result:

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1499.3888	54.47	-19.52	34.95	74.00	-39.05	Vertical
2	2250.0278	51.72	-15.03	36.69	74.00	-37.31	Vertical
3	3832.9814	49.26	-6.73	42.53	74.00	-31.47	Vertical
4	5107.9009	47.44	-2.25	45.19	74.00	-28.81	Vertical
5	6548.5054	45.73	-0.21	45.52	74.00	-28.48	Vertical
6	7628.9588	43.96	2.69	46.65	74.00	-27.35	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5745	Horizontal	PASS

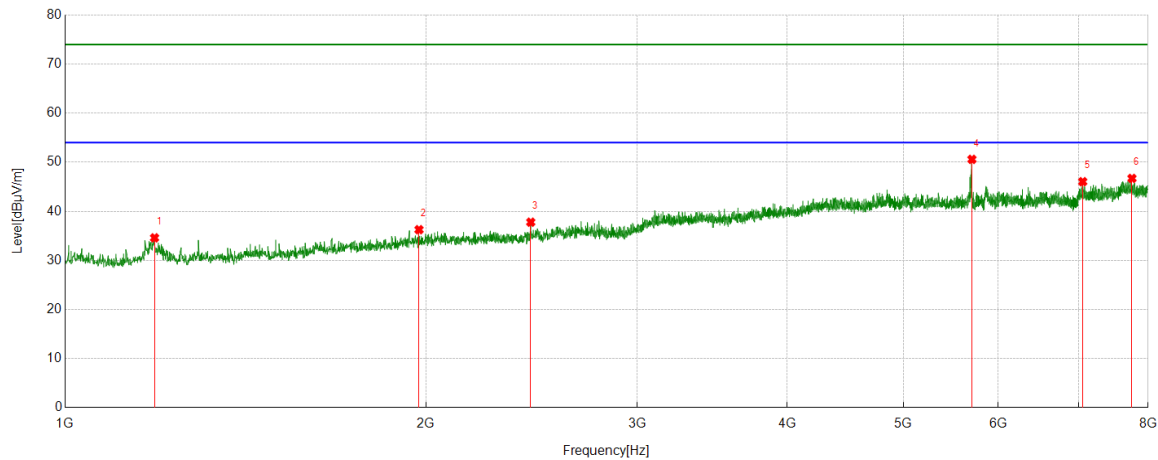


#### PK Result:

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1187.4653	56.11	-21.51	34.60	74.00	-39.40	Horizontal
2	1973.1081	52.47	-16.21	36.26	74.00	-37.74	Horizontal
3	2445.2717	52.02	-14.23	37.79	74.00	-36.21	Horizontal
4	5704.5227	51.85	-1.26	50.59	74.00	-23.41	Horizontal
5	7056.4507	45.02	1.02	46.04	74.00	-27.96	Horizontal
6	7756.5285	43.94	2.77	46.71	74.00	-27.29	Horizontal

- Remark:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
  4. Peak: Peak detector.
  5. AVG: VBW refer to section 6.2.
  6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.
  7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
  8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5745	Vertical	PASS

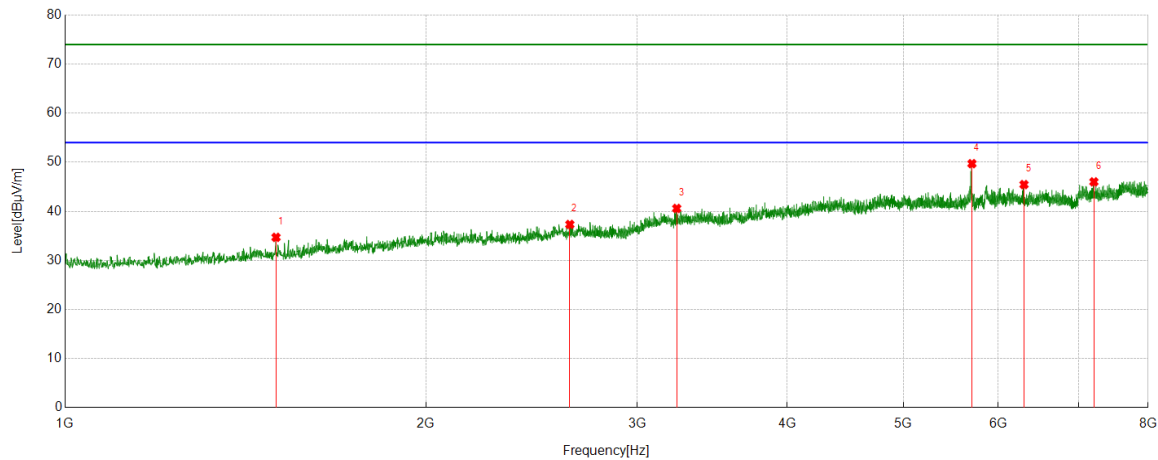


#### PK Result:

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1499.3888	54.21	-19.51	34.70	74.00	-39.30	Vertical
2	2635.8484	50.37	-13.04	37.33	74.00	-36.67	Vertical
3	3236.3596	50.06	-9.47	40.59	74.00	-33.41	Vertical
4	5704.5227	50.97	-1.26	49.71	74.00	-24.29	Vertical
5	6304.256	46.50	-1.05	45.45	74.00	-28.55	Vertical
6	7209.69	45.10	0.91	46.01	74.00	-27.99	Vertical

- Remark:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
  4. Peak: Peak detector.
  5. AVG: VBW refer to section 6.2.
  6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.
  7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
  8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5785	Horizontal	PASS

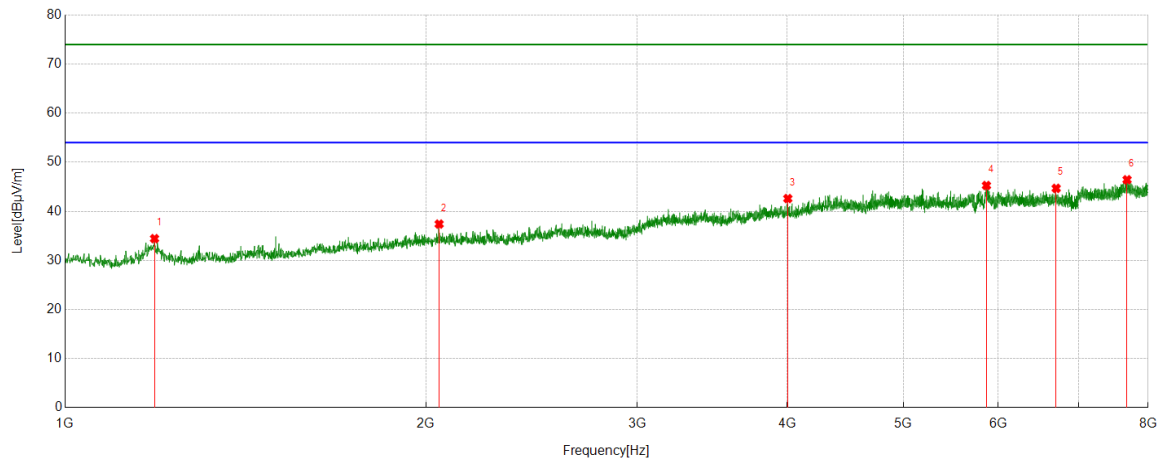


#### PK Result:

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1187.4653	55.95	-21.51	34.44	74.00	-39.56	Horizontal
2	2050.8945	53.01	-15.60	37.41	74.00	-36.59	Horizontal
3	4005.6673	48.56	-5.96	42.60	74.00	-31.40	Horizontal
4	5865.5406	45.19	0.07	45.26	74.00	-28.74	Horizontal
5	6705.634	44.43	0.25	44.68	74.00	-29.32	Horizontal
6	7683.4093	44.23	2.21	46.44	74.00	-27.56	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5785	Vertical	PASS

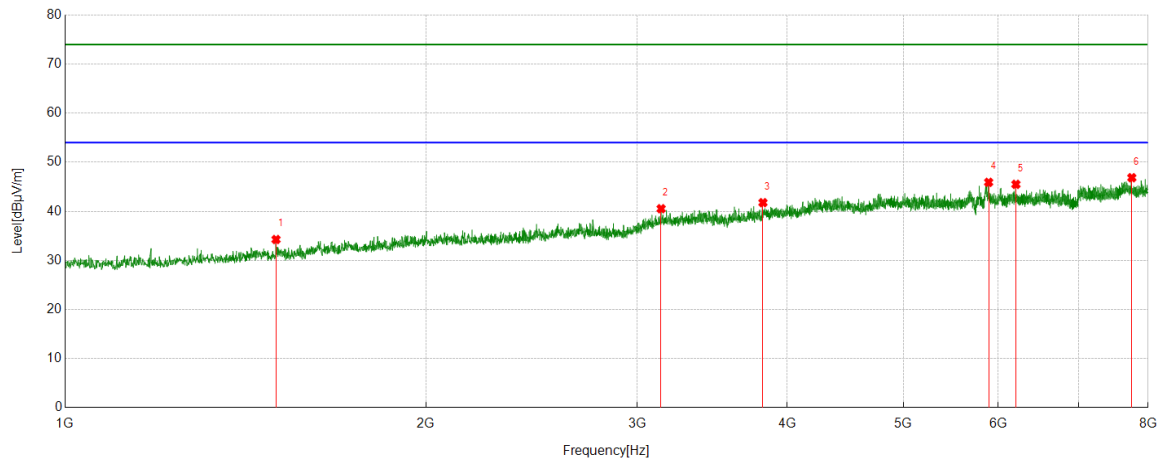


#### PK Result:

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1499.3888	53.77	-19.51	34.26	74.00	-39.74	Vertical
2	3140.6823	49.80	-9.27	40.53	74.00	-33.47	Vertical
3	3818.9799	48.69	-6.92	41.77	74.00	-32.23	Vertical
4	5890.4323	46.70	-0.79	45.91	74.00	-28.09	Vertical
5	6207.023	46.46	-0.96	45.50	74.00	-28.50	Vertical
6	7754.1949	44.09	2.76	46.85	74.00	-27.15	Vertical

- Remark:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
  4. Peak: Peak detector.
  5. AVG: VBW refer to section 6.2.
  6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.
  7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
  8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5825	Horizontal	PASS

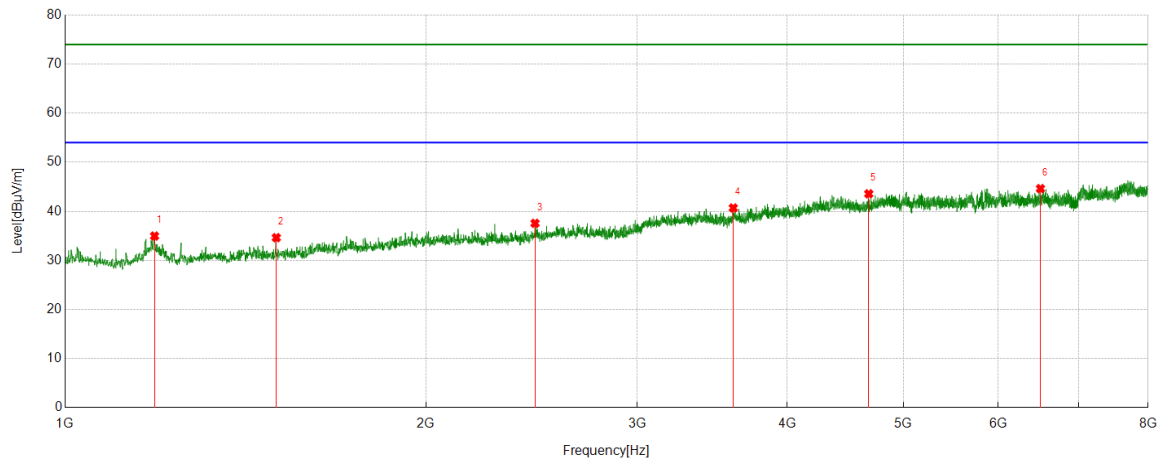


#### PK Result:

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1187.4653	56.48	-21.51	34.97	74.00	-39.03	Horizontal
2	1500.1667	54.13	-19.50	34.63	74.00	-39.37	Horizontal
3	2465.4962	51.40	-13.84	37.56	74.00	-36.44	Horizontal
4	3607.4008	48.84	-8.15	40.69	74.00	-33.31	Horizontal
5	4679.2977	48.17	-4.60	43.57	74.00	-30.43	Horizontal
6	6506.5007	44.56	0.07	44.63	74.00	-29.37	Horizontal

- Remark:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
  4. Peak: Peak detector.
  5. AVG: VBW refer to section 6.2.
  6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.
  7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
  8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC20	5825	Vertical	PASS

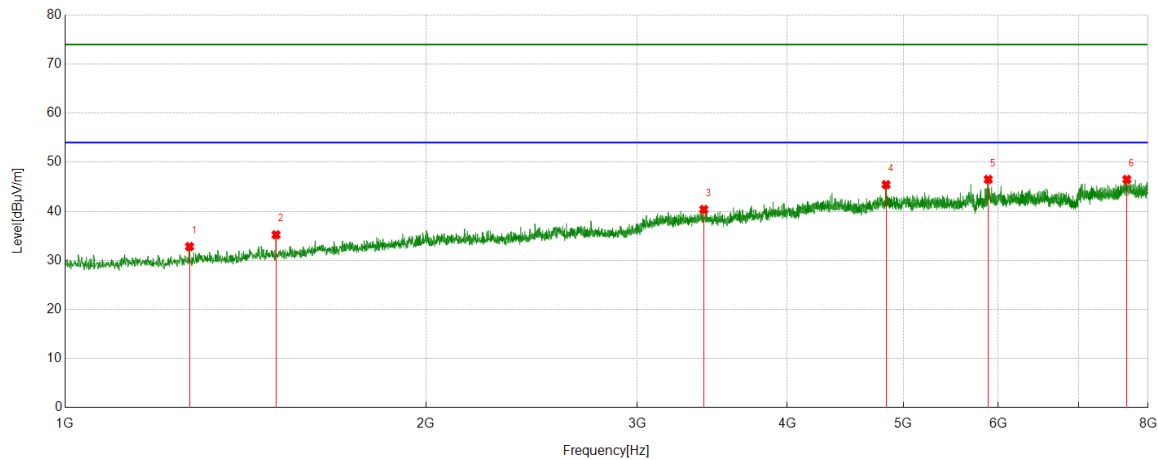

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1269.9189	53.23	-20.41	32.82	74.00	-41.18	Vertical
2	1499.3888	54.73	-19.51	35.22	74.00	-38.78	Vertical
3	3409.0454	49.42	-9.04	40.38	74.00	-33.62	Vertical
4	4837.2041	48.51	-3.08	45.43	74.00	-28.57	Vertical
5	5885.7651	47.25	-0.74	46.51	74.00	-27.49	Vertical
6	7680.2978	44.25	2.24	46.49	74.00	-27.51	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC40	5190	Horizontal	PASS

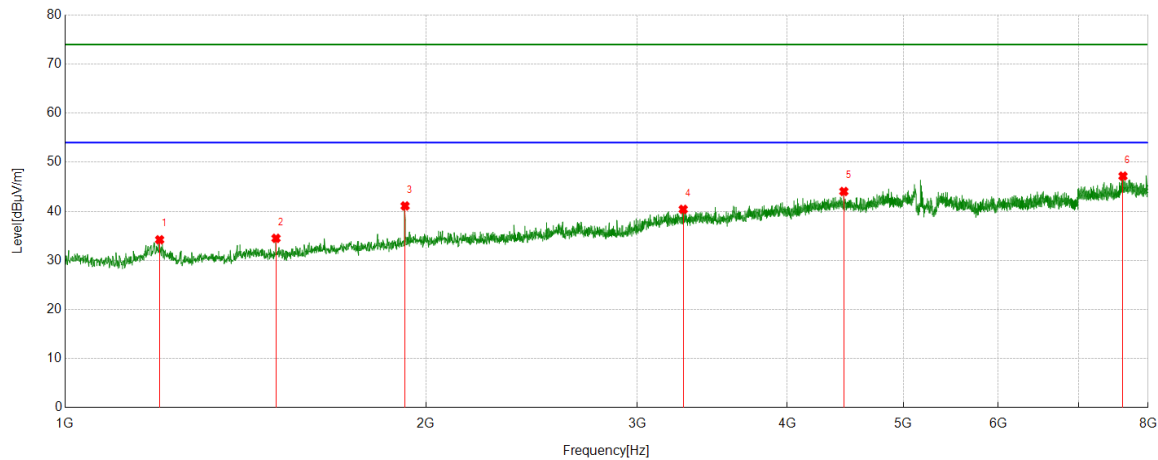

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1199.1332	55.93	-21.72	34.21	74.00	-39.79	Horizontal
2	1499.3888	54.02	-19.52	34.50	74.00	-39.50	Horizontal
3	1920.9912	57.77	-16.67	41.10	74.00	-32.90	Horizontal
4	3276.8085	49.11	-8.71	40.40	74.00	-33.60	Horizontal
5	4460.7179	48.36	-4.31	44.05	74.00	-29.95	Horizontal
6	7623.5137	44.44	2.74	47.18	74.00	-26.82	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC40	5190	Vertical	PASS

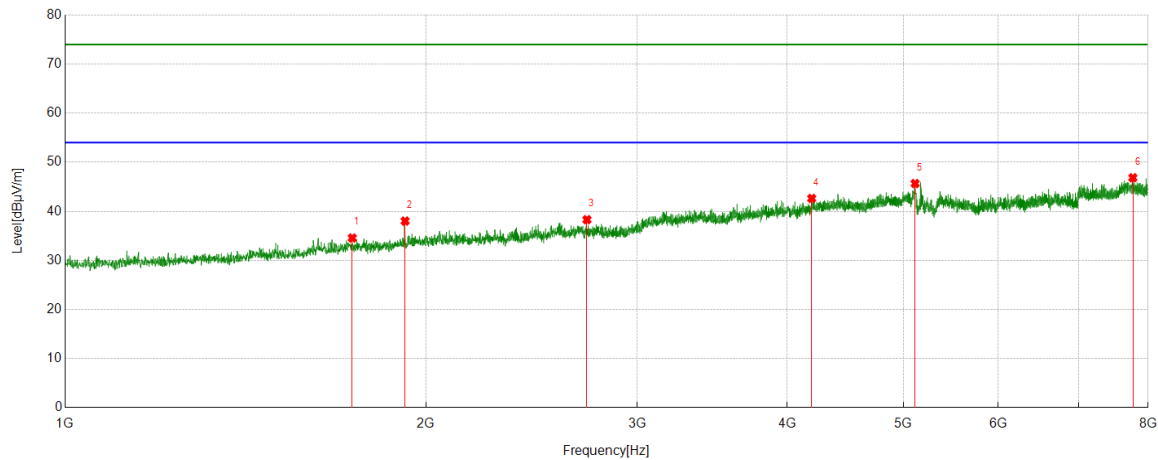

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1735.8595	52.22	-17.65	34.57	74.00	-39.43	Vertical
2	1920.9912	54.69	-16.67	38.02	74.00	-35.98	Vertical
3	2723.7471	50.30	-12.00	38.30	74.00	-35.70	Vertical
4	4193.9104	48.14	-5.51	42.63	74.00	-31.37	Vertical
5	5114.9017	47.79	-2.12	45.67	74.00	-28.33	Vertical
6	7769.7522	44.10	2.74	46.84	74.00	-27.16	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC40	5230	Horizontal	PASS

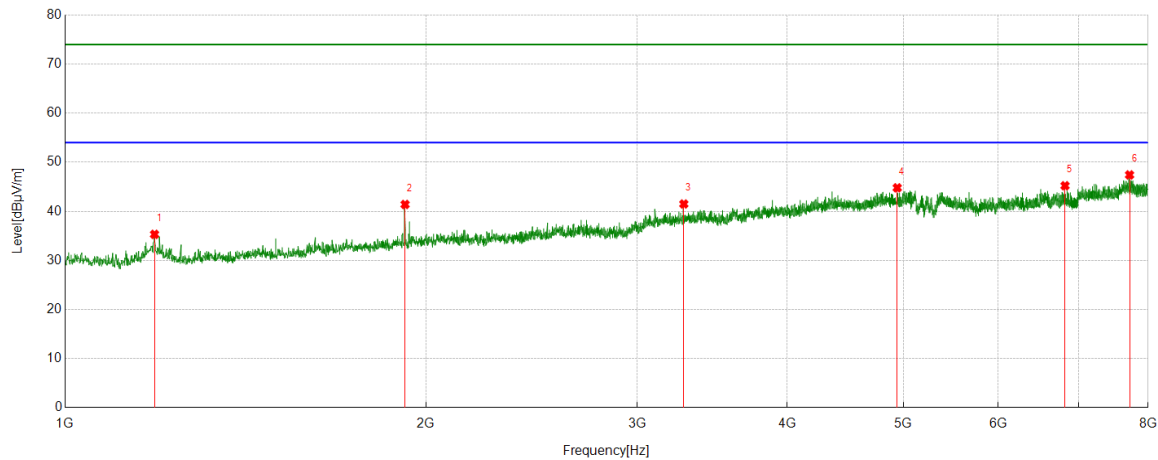

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1187.4653	56.90	-21.59	35.31	74.00	-38.69	Horizontal
2	1920.9912	58.07	-16.67	41.40	74.00	-32.60	Horizontal
3	3280.6979	50.17	-8.68	41.49	74.00	-32.51	Horizontal
4	4942.2158	47.86	-3.07	44.79	74.00	-29.21	Horizontal
5	6820.7579	44.76	0.45	45.21	74.00	-28.79	Horizontal
6	7720.7468	44.76	2.66	47.42	74.00	-26.58	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC40	5230	Vertical	PASS

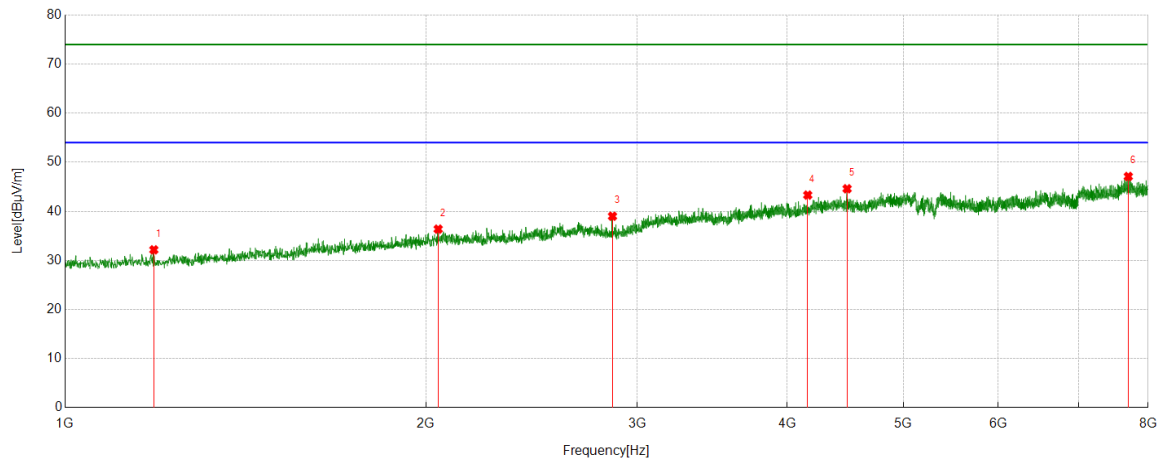


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1185.9095	53.74	-21.58	32.16	74.00	-41.84	Vertical
2	2047.0052	52.06	-15.68	36.38	74.00	-37.62	Vertical
3	2860.6512	51.65	-12.65	39.00	74.00	-35.00	Vertical
4	4162.018	49.04	-5.73	43.31	74.00	-30.69	Vertical
5	4488.721	49.26	-4.66	44.60	74.00	-29.40	Vertical
6	7702.078	44.68	2.42	47.10	74.00	-26.90	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.




Test Mode	Channel	Polarization	Verdict
11AC40	5755	Horizontal	PASS

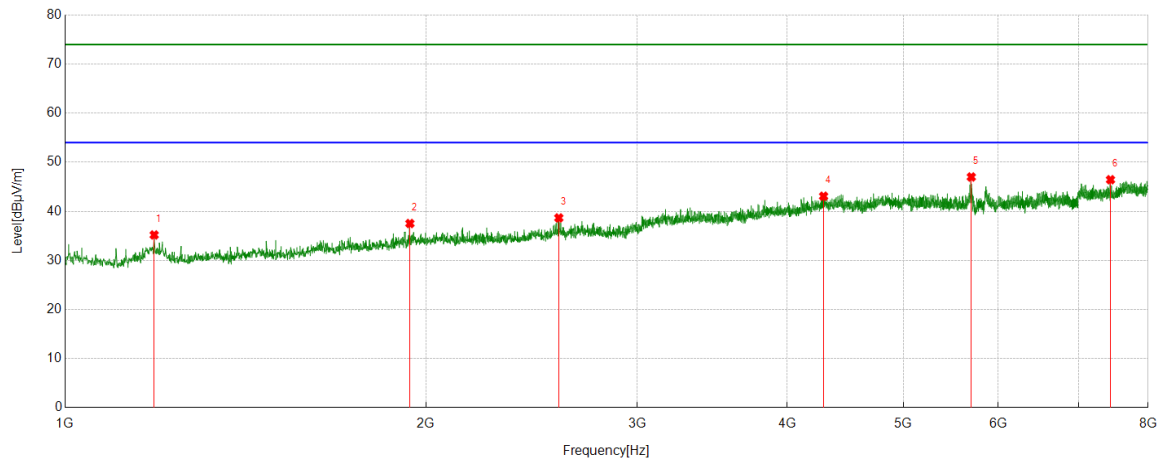

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1186.6874	56.69	-21.50	35.19	74.00	-38.81	Horizontal
2	1938.8821	54.29	-16.77	37.52	74.00	-36.48	Horizontal
3	2580.6201	51.88	-13.22	38.66	74.00	-35.34	Horizontal
4	4290.3656	47.13	-4.05	43.08	74.00	-30.92	Horizontal
5	5697.5219	48.32	-1.32	47.00	74.00	-27.00	Horizontal
6	7443.0492	44.61	1.83	46.44	74.00	-27.56	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC40	5755	Vertical	PASS

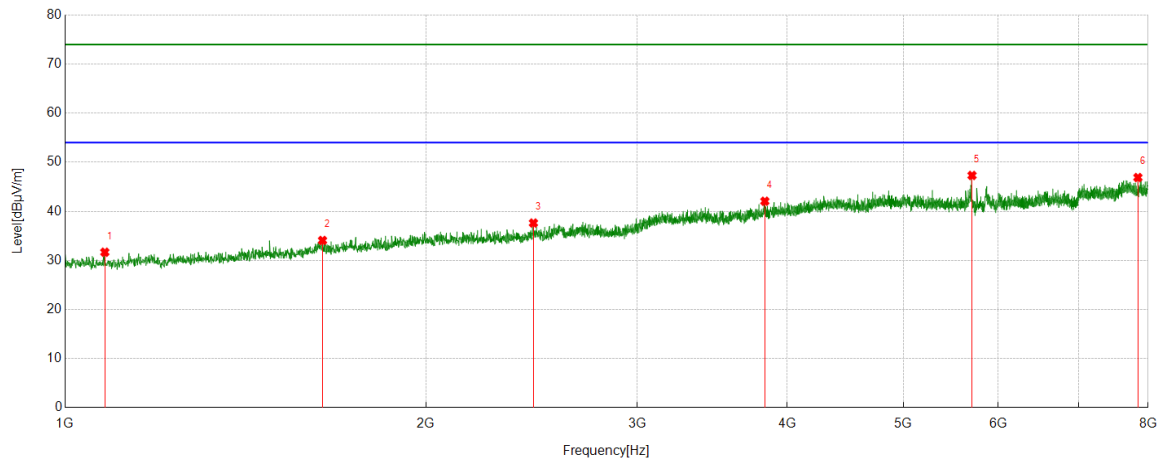

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1079.3421	53.14	-21.47	31.67	74.00	-42.33	Vertical
2	1639.4044	52.23	-18.16	34.07	74.00	-39.93	Vertical
3	2457.7175	51.64	-14.02	37.62	74.00	-36.38	Vertical
4	3832.9814	48.65	-6.59	42.06	74.00	-31.94	Vertical
5	5705.3006	48.56	-1.25	47.31	74.00	-26.69	Vertical
6	7845.205	45.05	1.84	46.89	74.00	-27.11	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC40	5795	Horizontal	PASS

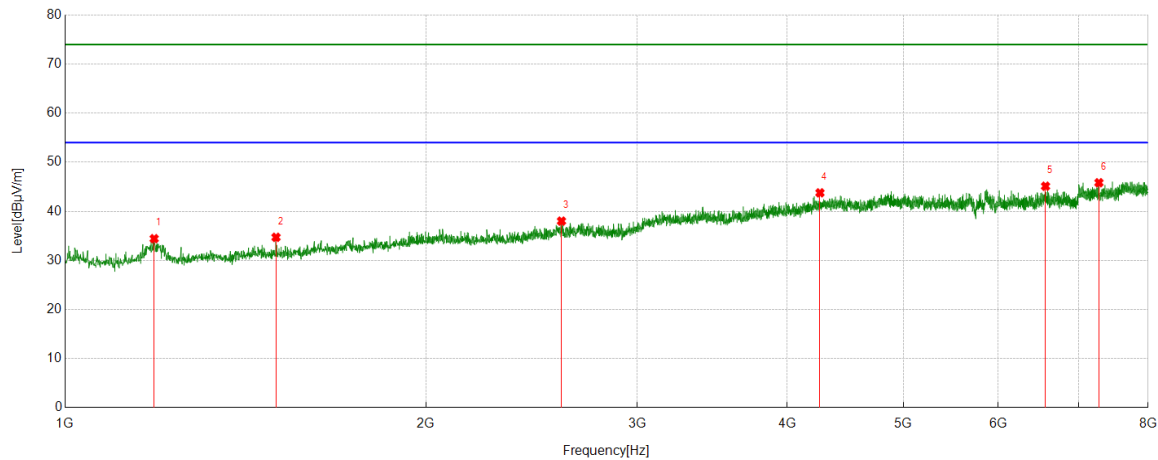

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1186.6874	55.93	-21.50	34.43	74.00	-39.57	Horizontal
2	1499.3888	54.22	-19.51	34.71	74.00	-39.29	Horizontal
3	2593.8438	51.18	-13.17	38.01	74.00	-35.99	Horizontal
4	4260.8068	48.65	-4.88	43.77	74.00	-30.23	Horizontal
5	6570.2856	45.21	-0.09	45.12	74.00	-28.88	Horizontal
6	7279.6977	45.22	0.61	45.83	74.00	-28.17	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC40	5795	Vertical	PASS

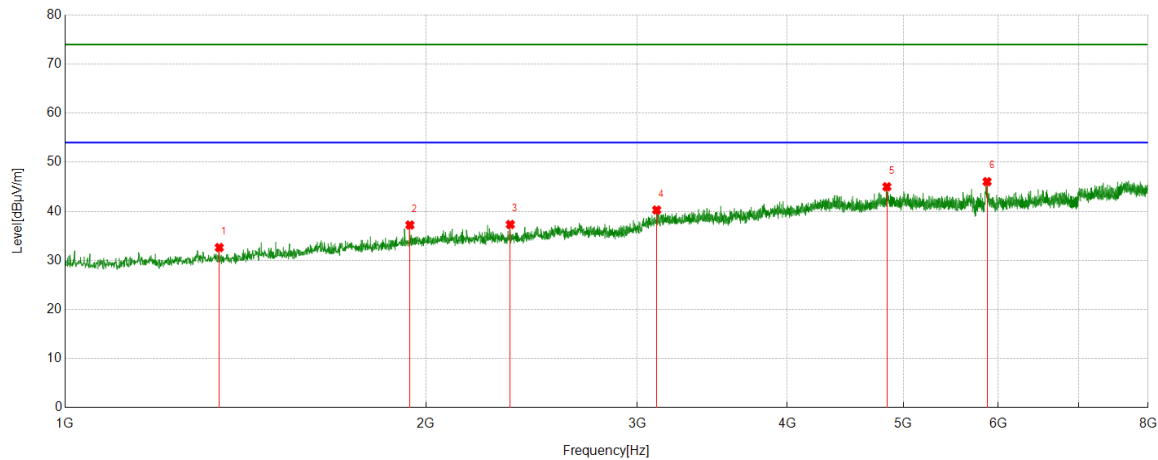

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1344.5938	52.97	-20.35	32.62	74.00	-41.38	Vertical
2	1938.8821	53.98	-16.77	37.21	74.00	-36.79	Vertical
3	2351.1501	51.92	-14.60	37.32	74.00	-36.68	Vertical
4	3114.2349	49.83	-9.56	40.27	74.00	-33.73	Vertical
5	4844.9828	47.99	-2.98	45.01	74.00	-28.99	Vertical
6	5872.5414	46.12	-0.08	46.04	74.00	-27.96	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC80	5210	Horizontal	PASS

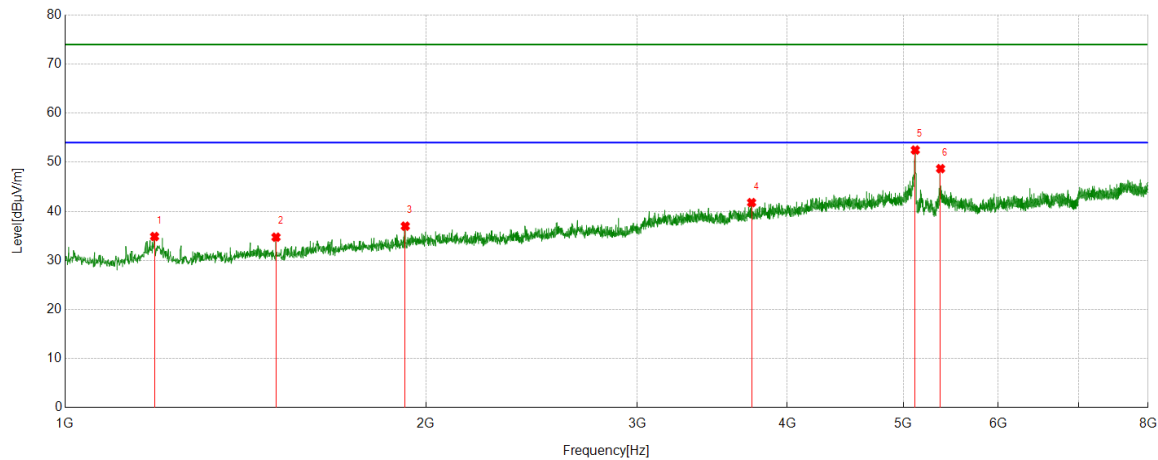

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1187.4653	56.46	-21.59	34.87	74.00	-39.13	Horizontal
2	1499.3888	54.25	-19.52	34.73	74.00	-39.27	Horizontal
3	1921.7691	53.65	-16.67	36.98	74.00	-37.02	Horizontal
4	3736.5263	48.71	-6.93	41.78	74.00	-32.22	Horizontal
5	5116.4574	54.62	-2.13	52.49	74.00	-21.51	Horizontal
6	5370.819	50.58	-1.89	48.69	74.00	-25.31	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC80	5210	Vertical	PASS

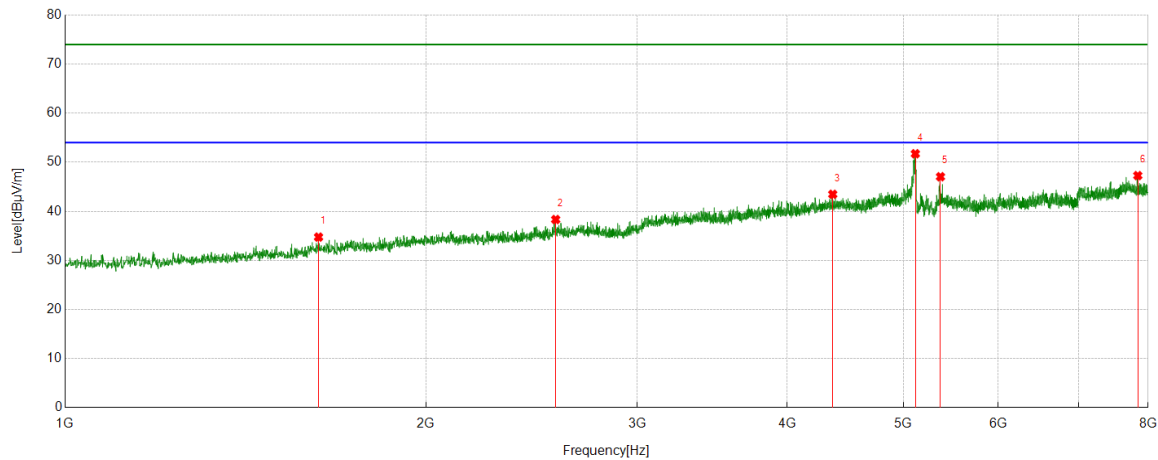

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1626.9586	53.01	-18.26	34.75	74.00	-39.25	Vertical
2	2565.0628	51.50	-13.17	38.33	74.00	-35.67	Vertical
3	4366.5963	48.39	-4.92	43.47	74.00	-30.53	Vertical
4	5117.2352	53.86	-2.13	51.73	74.00	-22.27	Vertical
5	5370.0411	48.94	-1.89	47.05	74.00	-26.95	Vertical
6	7843.6493	45.36	1.92	47.28	74.00	-26.72	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC80	5775	Horizontal	PASS

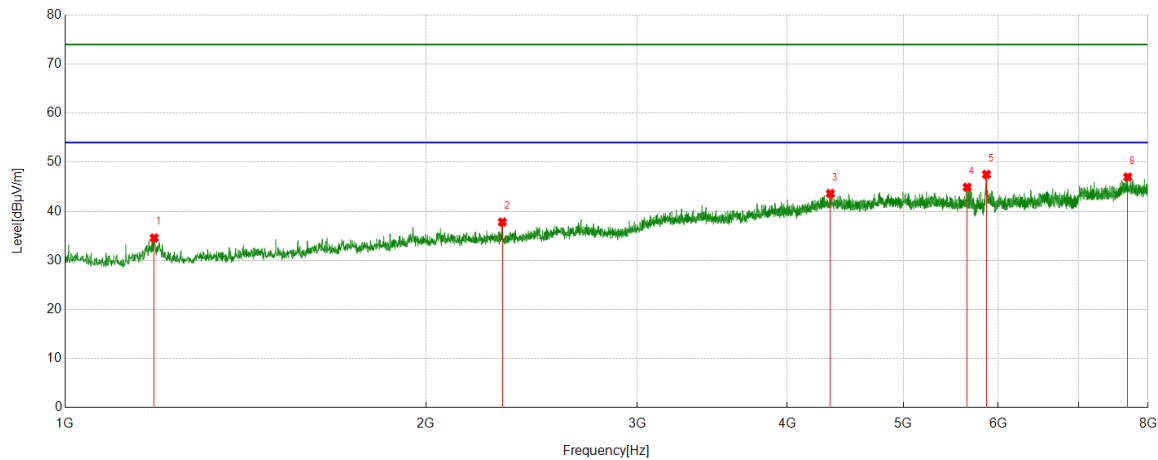

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1186.6874	56.08	-21.50	34.58	74.00	-39.42	Horizontal
2	2315.3684	52.86	-15.05	37.81	74.00	-36.19	Horizontal
3	4347.1497	48.51	-4.90	43.61	74.00	-30.39	Horizontal
4	5652.4058	46.77	-1.86	44.91	74.00	-29.09	Horizontal
5	5866.3185	47.44	0.08	47.52	74.00	-26.48	Horizontal
6	7693.5215	44.82	2.17	46.99	74.00	-27.01	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC80	5775	Vertical	PASS

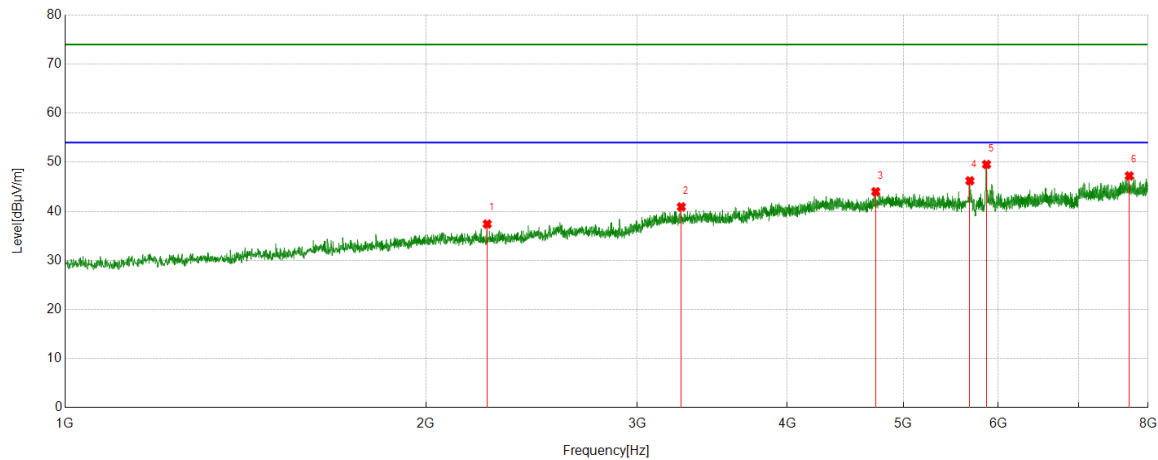


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2249.2499	52.45	-15.03	37.42	74.00	-36.58	Vertical
2	3265.1406	49.95	-9.04	40.91	74.00	-33.09	Vertical
3	4742.3047	47.37	-3.37	44.00	74.00	-30.00	Vertical
4	5681.9647	47.42	-1.20	46.22	74.00	-27.78	Vertical
5	5866.3185	49.47	0.08	49.55	74.00	-24.45	Vertical
6	7716.8574	44.93	2.29	47.22	74.00	-26.78	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.  
The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



**PART 2: 8GHz to 18GHz:**

Test Mode	Channel	Polarization	Verdict
11A	5180	Horizontal	PASS

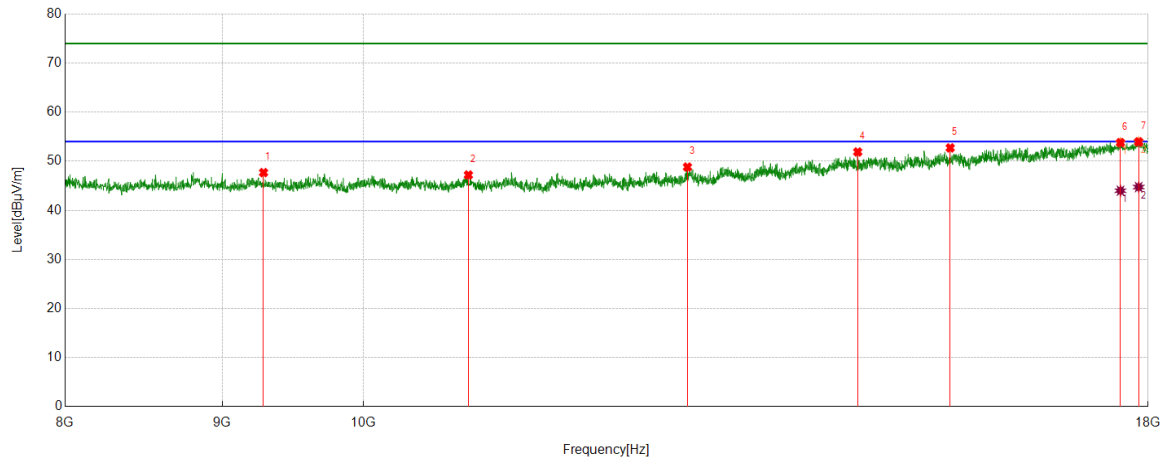
**PK Result:**


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9281.8803	44.59	3.10	47.69	74.00	-26.31	Horizontal
2	10820.4701	42.44	4.76	47.20	74.00	-26.80	Horizontal
3	12749.1249	41.30	7.52	48.82	74.00	-25.18	Horizontal
4	14482.7471	40.66	11.23	51.89	74.00	-22.11	Horizontal
5	15521.2535	39.84	12.88	52.72	74.00	-21.28	Horizontal
6	17631.6053	36.52	17.27	53.79	74.00	-20.21	Horizontal
7	17873.3122	35.27	18.68	53.95	74.00	-20.05	Horizontal

**AV Result:**

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17631.6053	26.73	17.27	44.00	54.00	-10.00	Horizontal
2	17873.3122	26.06	18.68	44.74	54.00	-9.26	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.  
8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5180	Vertical	PASS

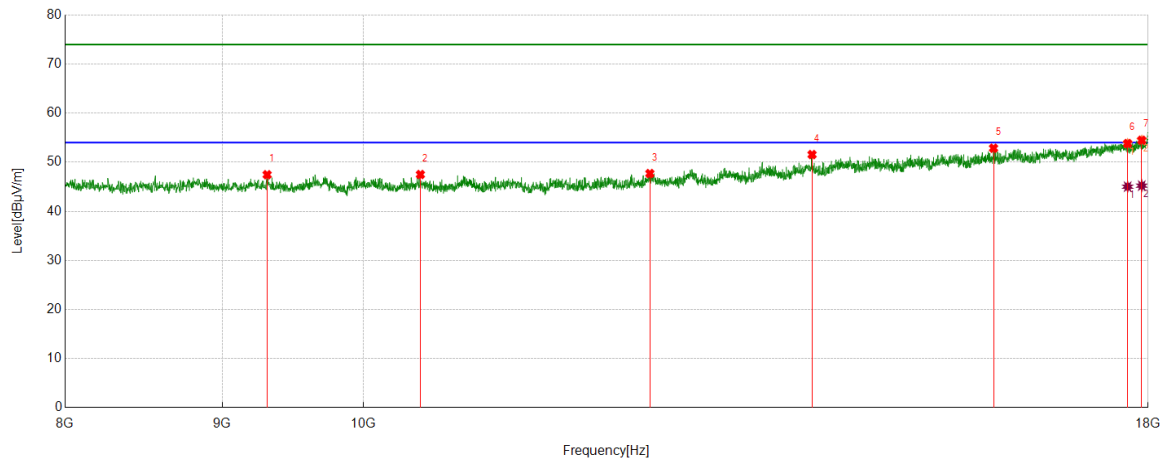

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9306.8845	44.26	3.20	47.46	74.00	-26.54	Vertical
2	10438.7398	43.31	4.19	47.50	74.00	-26.50	Vertical
3	12395.7326	40.76	6.94	47.70	74.00	-26.30	Vertical
4	13995.9993	40.71	10.85	51.56	74.00	-22.44	Vertical
5	16033.0055	39.22	13.64	52.86	74.00	-21.14	Vertical
6	17726.6211	36.31	17.50	53.81	74.00	-20.19	Vertical
7	17914.9858	35.82	18.66	54.48	74.00	-19.52	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17726.6211	27.52	17.50	45.02	54.00	-8.98	Vertical
2	17914.9858	26.57	18.66	45.23	54.00	-8.77	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5200	Horizontal	PASS

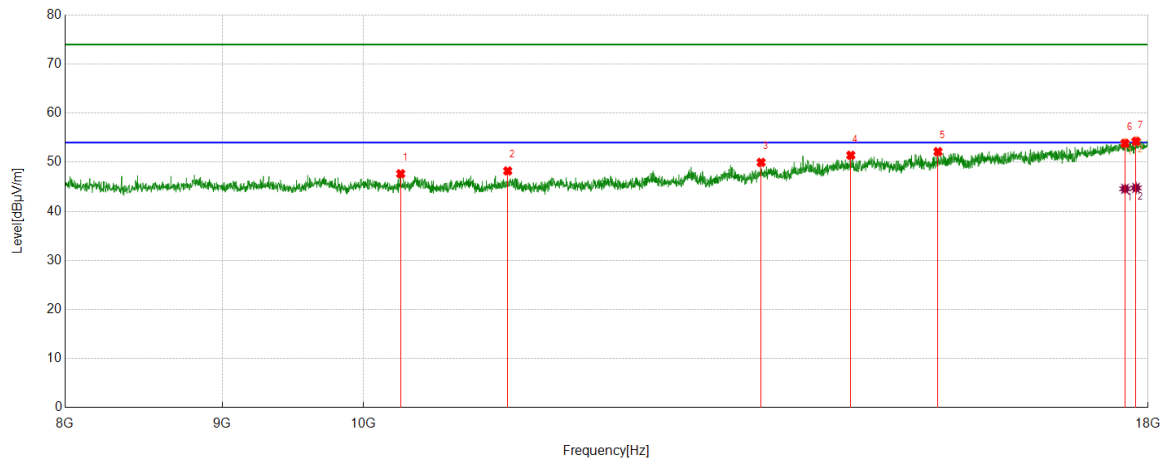

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	10285.3809	42.94	4.72	47.66	74.00	-26.34	Horizontal
2	11143.8573	43.20	5.03	48.23	74.00	-25.77	Horizontal
3	13472.5788	40.96	9.01	49.97	74.00	-24.03	Horizontal
4	14407.7346	40.03	11.39	51.42	74.00	-22.58	Horizontal
5	15379.5633	39.33	12.82	52.15	74.00	-21.85	Horizontal
6	17691.6153	36.44	17.41	53.85	74.00	-20.15	Horizontal
7	17838.3064	35.95	18.31	54.26	74.00	-19.74	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17691.6153	27.17	17.41	44.58	54.00	-9.42	Horizontal
2	17838.3064	26.46	18.31	44.77	54.00	-9.23	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5200	Vertical	PASS

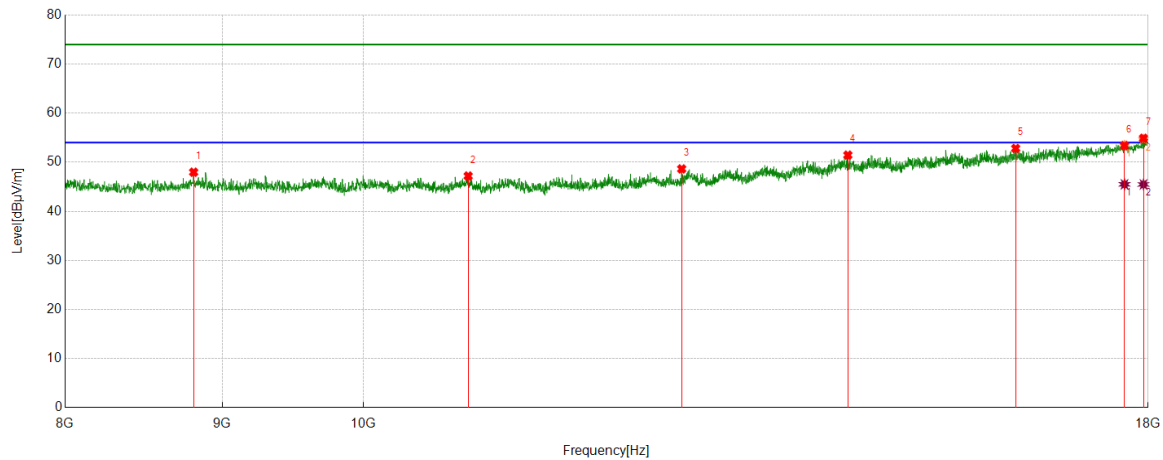

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8808.4681	44.05	3.92	47.97	74.00	-26.03	Vertical
2	10818.8031	42.44	4.76	47.20	74.00	-26.80	Vertical
3	12694.1157	41.49	7.15	48.64	74.00	-25.36	Vertical
4	14376.0627	40.17	11.28	51.45	74.00	-22.55	Vertical
5	16301.3836	39.02	13.79	52.81	74.00	-21.19	Vertical
6	17684.9475	36.04	17.37	53.41	74.00	-20.59	Vertical
7	17938.3231	36.25	18.63	54.88	74.00	-19.12	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17684.9475	28.13	17.37	45.50	54.00	-8.50	Vertical
2	17938.3231	26.85	18.63	45.48	54.00	-8.52	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5240	Horizontal	PASS

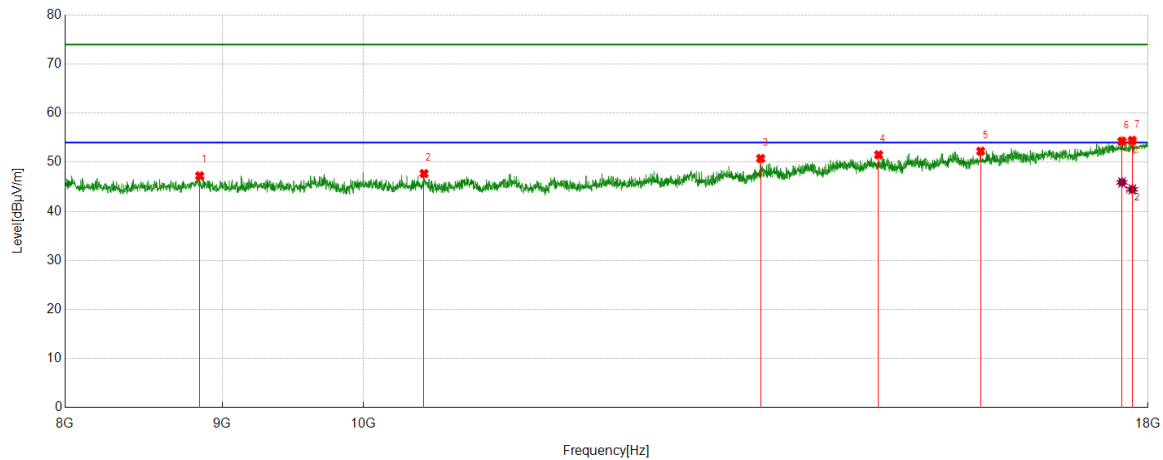

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8848.4747	43.43	3.80	47.23	74.00	-26.77	Horizontal
2	10467.0778	43.18	4.51	47.69	74.00	-26.31	Horizontal
3	13467.5779	41.75	9.01	50.76	74.00	-23.24	Horizontal
4	14711.1185	39.43	12.09	51.52	74.00	-22.48	Horizontal
5	15879.6466	38.91	13.34	52.25	74.00	-21.75	Horizontal
6	17651.6086	36.48	17.80	54.28	74.00	-19.72	Horizontal
7	17788.298	36.33	18.11	54.44	74.00	-19.56	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17651.6086	28.10	17.80	45.90	54.00	-8.10	Horizontal
2	17788.298	26.37	18.11	44.48	54.00	-9.52	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5240	Vertical	PASS

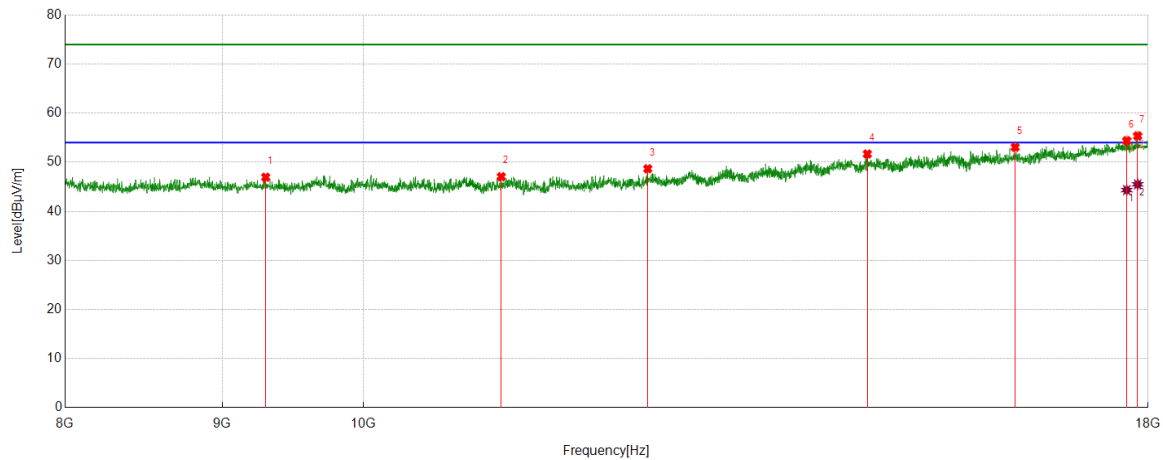

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9296.8828	43.74	3.21	46.95	74.00	-27.05	Vertical
2	11090.5151	41.69	5.36	47.05	74.00	-26.95	Vertical
3	12375.7293	41.68	6.99	48.67	74.00	-25.33	Vertical
4	14587.7646	39.69	11.99	51.68	74.00	-22.32	Vertical
5	16294.7158	39.19	13.86	53.05	74.00	-20.95	Vertical
6	17714.9525	36.80	17.58	54.38	74.00	-19.62	Vertical
7	17859.9767	36.44	18.92	55.36	74.00	-18.64	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17714.9525	26.75	17.58	44.33	54.00	-9.67	Vertical
2	17859.9767	26.58	18.92	45.50	54.00	-8.50	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5745	Horizontal	PASS

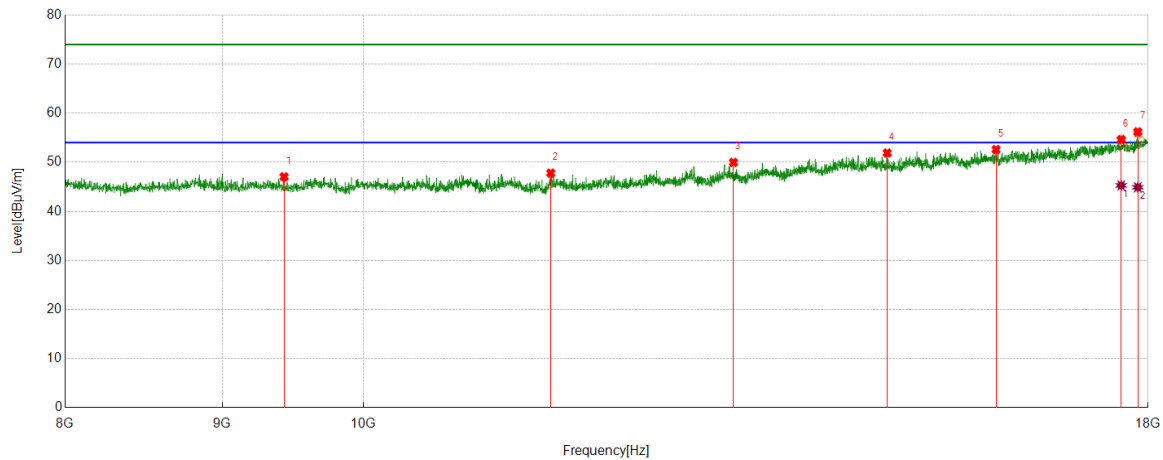

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9425.2375	43.46	3.57	47.03	74.00	-26.97	Horizontal
2	11508.9182	41.27	6.52	47.79	74.00	-26.21	Horizontal
3	13195.866	41.74	8.22	49.96	74.00	-24.04	Horizontal
4	14806.1344	40.42	11.46	51.88	74.00	-22.12	Horizontal
5	16063.0105	38.99	13.60	52.59	74.00	-21.41	Horizontal
6	17641.6069	36.73	17.88	54.61	74.00	-19.39	Horizontal
7	17861.6436	37.32	18.87	56.19	74.00	-17.81	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17641.6069	27.40	17.88	45.28	54.00	-8.72	Horizontal
2	17861.6436	26.03	18.87	44.90	54.00	-9.10	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5745	Vertical	PASS

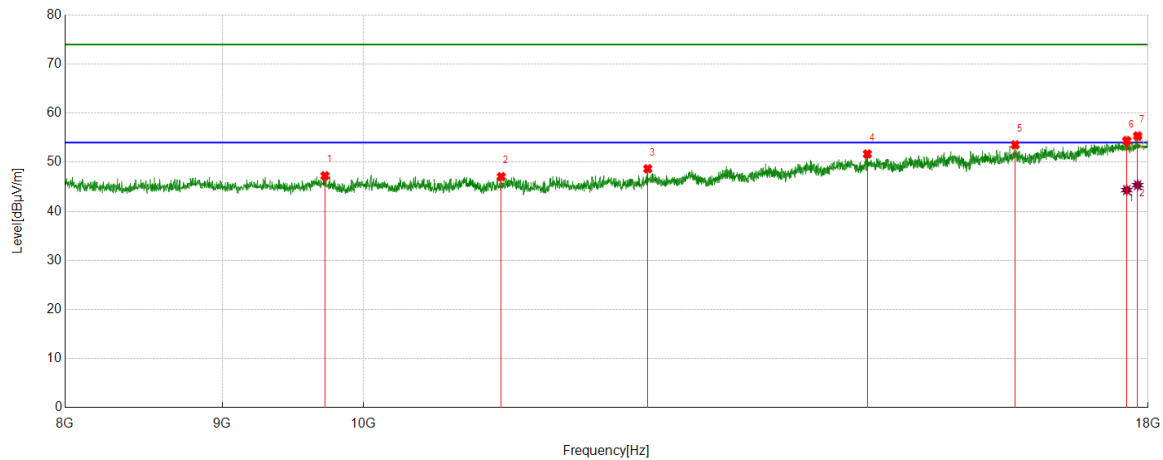

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9718.6198	42.63	4.61	47.24	74.00	-26.76	Vertical
2	11090.5151	41.69	5.36	47.05	74.00	-26.95	Vertical
3	12375.7293	41.68	6.99	48.67	74.00	-25.33	Vertical
4	14587.7646	39.69	11.99	51.68	74.00	-22.32	Vertical
5	16294.7158	39.69	13.86	53.55	74.00	-20.45	Vertical
6	17714.9525	36.80	17.58	54.38	74.00	-19.62	Vertical
7	17859.9767	36.44	18.92	55.36	74.00	-18.64	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17714.9525	26.75	17.58	44.33	54.00	-9.67	Vertical
2	17859.9767	26.42	18.92	45.34	54.00	-8.66	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5785	Horizontal	PASS

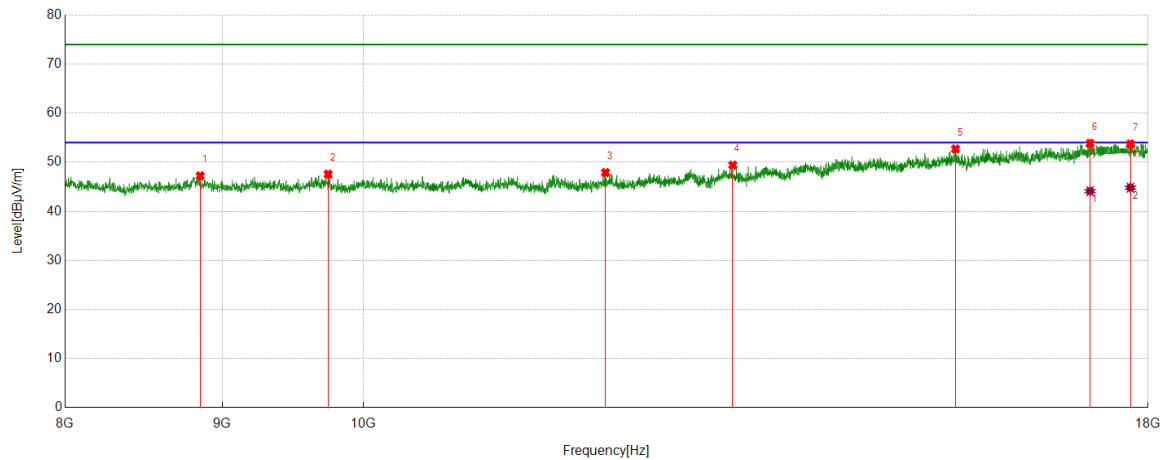

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8851.8086	43.44	3.79	47.23	74.00	-26.77	Horizontal
2	9741.957	43.10	4.46	47.56	74.00	-26.44	Horizontal
3	11990.6651	41.32	6.57	47.89	74.00	-26.11	Horizontal
4	13189.1982	41.25	8.16	49.41	74.00	-24.59	Horizontal
5	15582.9305	39.70	13.00	52.70	74.00	-21.30	Horizontal
6	17234.8725	37.70	16.12	53.82	74.00	-20.18	Horizontal
7	17763.2939	35.89	17.81	53.70	74.00	-20.30	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17234.8725	27.99	16.12	44.11	54.00	-9.89	Horizontal
2	17763.2939	27.01	17.81	44.82	54.00	-9.18	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5785	Vertical	PASS

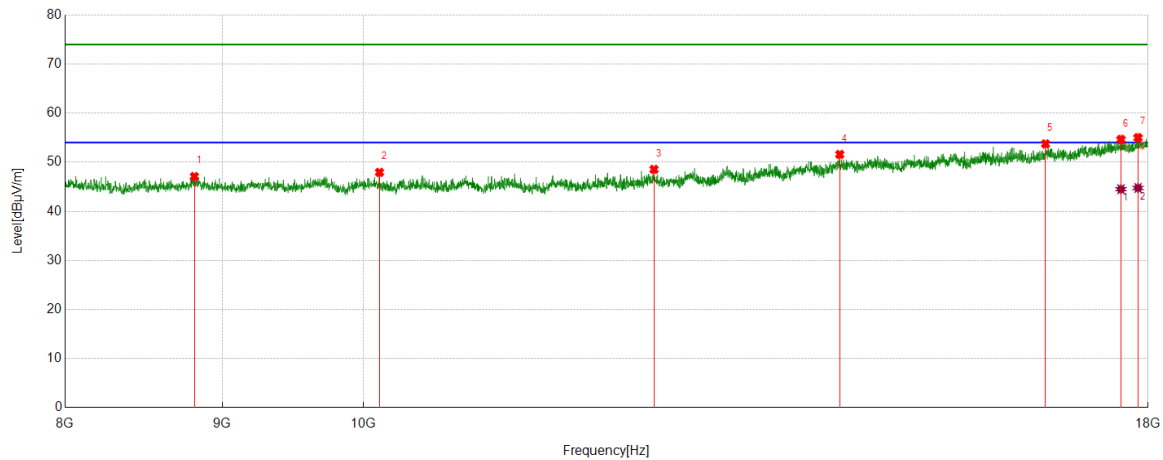

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8813.4689	43.24	3.85	47.09	74.00	-26.91	Vertical
2	10123.6873	43.70	4.24	47.94	74.00	-26.06	Vertical
3	12434.0723	41.49	7.06	48.55	74.00	-25.45	Vertical
4	14289.3816	40.08	11.51	51.59	74.00	-22.41	Vertical
5	16669.7783	39.01	14.73	53.74	74.00	-20.26	Vertical
6	17638.273	36.87	17.77	54.64	74.00	-19.36	Vertical
7	17864.9775	36.23	18.77	55.00	74.00	-19.00	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17638.273	26.74	17.77	44.51	54.00	-9.49	Vertical
2	17864.9775	25.99	18.77	44.76	54.00	-9.24	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5825	Horizontal	PASS

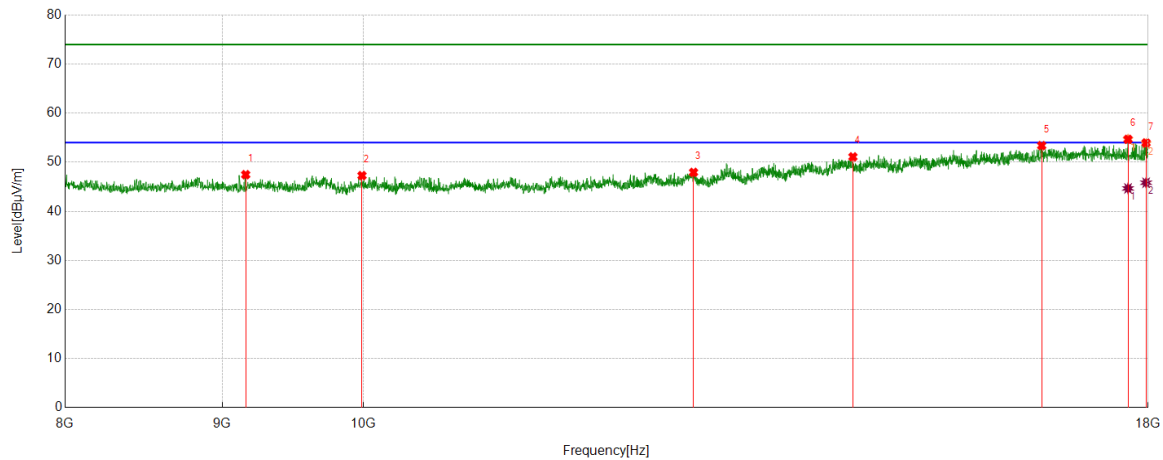

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9158.5264	44.41	3.06	47.47	74.00	-26.53	Horizontal
2	9991.9987	43.24	4.04	47.28	74.00	-26.72	Horizontal
3	12807.4679	40.65	7.29	47.94	74.00	-26.06	Horizontal
4	14431.0718	39.53	11.57	51.10	74.00	-22.90	Horizontal
5	16621.4369	38.21	15.18	53.39	74.00	-20.61	Horizontal
6	17731.6219	37.11	17.56	54.67	74.00	-19.33	Horizontal
7	17973.3289	35.27	18.67	53.94	74.00	-20.06	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17731.6219	27.11	17.56	44.67	54.00	-9.33	Horizontal
2	17973.3289	27.16	18.67	45.83	54.00	-8.17	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5825	Vertical	PASS

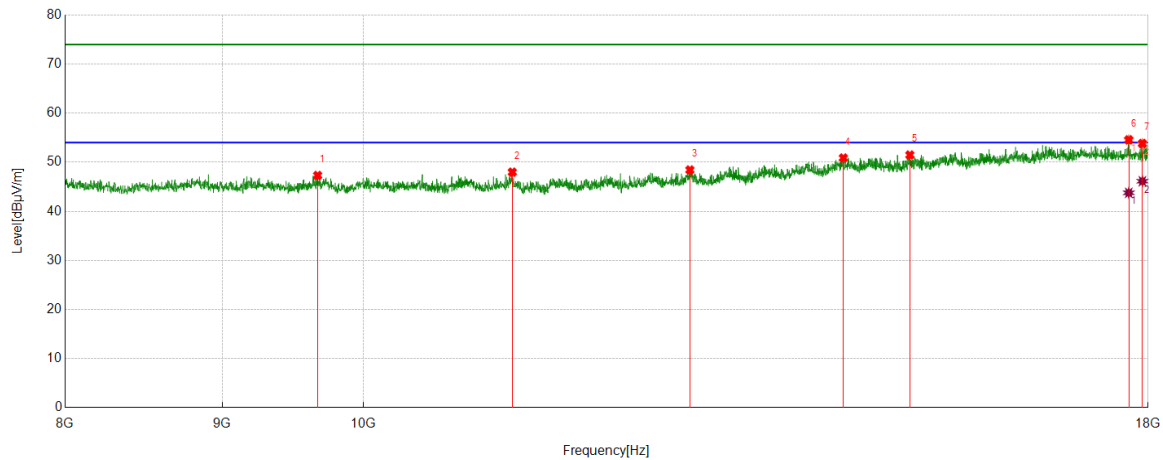

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9665.2775	43.49	3.82	47.31	74.00	-26.69	Vertical
2	11182.197	42.53	5.45	47.98	74.00	-26.02	Vertical
3	12772.4621	40.74	7.69	48.43	74.00	-25.57	Vertical
4	14327.7213	39.53	11.34	50.87	74.00	-23.13	Vertical
5	15059.5099	39.18	12.30	51.48	74.00	-22.52	Vertical
6	17741.6236	37.03	17.54	54.57	74.00	-19.43	Vertical
7	17923.3206	35.25	18.57	53.82	74.00	-20.18	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17741.6236	26.23	17.54	43.77	54.00	-10.23	Vertical
2	17923.3206	27.56	18.57	46.13	54.00	-7.87	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5180	Horizontal	PASS



#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8826.8045	43.33	3.70	47.03	74.00	-26.97	Horizontal
2	10360.3934	43.44	4.30	47.74	74.00	-26.26	Horizontal
3	13230.8718	40.85	8.61	49.46	74.00	-24.54	Horizontal
4	14394.3991	40.00	11.63	51.63	74.00	-22.37	Horizontal
5	16681.4469	37.89	15.34	53.23	74.00	-20.77	Horizontal
6	17681.6136	36.99	17.35	54.34	74.00	-19.66	Horizontal
7	17929.9883	36.86	18.63	55.49	74.00	-18.51	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17681.6136	26.78	17.35	44.13	54.00	-9.87	Horizontal
2	17929.9883	26.73	18.63	45.36	54.00	-8.64	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5180	Vertical	PASS

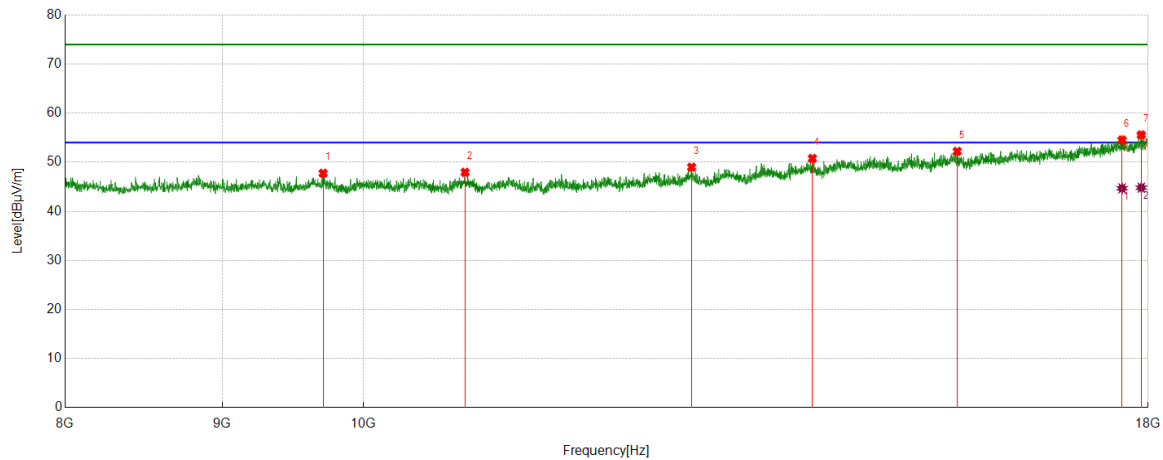

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9705.2842	43.43	4.32	47.75	74.00	-26.25	Vertical
2	10793.799	43.07	4.88	47.95	74.00	-26.05	Vertical
3	12789.1315	41.36	7.63	48.99	74.00	-25.01	Vertical
4	13999.3332	39.93	10.85	50.78	74.00	-23.22	Vertical
5	15602.9338	39.43	12.79	52.22	74.00	-21.78	Vertical
6	17653.2755	36.74	17.79	54.53	74.00	-19.47	Vertical
7	17908.3181	36.73	18.83	55.56	74.00	-18.44	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17653.2755	26.90	17.79	44.69	54.00	-9.31	Vertical
2	17908.3181	25.99	18.83	44.82	54.00	-9.18	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5200	Horizontal	PASS

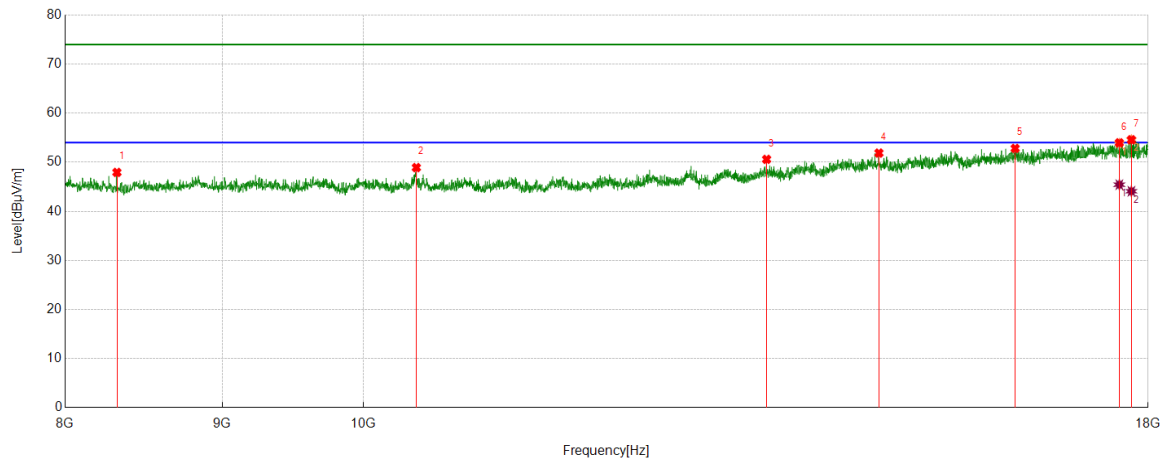

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8316.7195	45.06	2.87	47.93	74.00	-26.07	Horizontal
2	10407.0678	44.69	4.22	48.91	74.00	-25.09	Horizontal
3	13527.5879	41.39	9.20	50.59	74.00	-23.41	Horizontal
4	14714.4524	39.92	11.95	51.87	74.00	-22.13	Horizontal
5	16294.7158	38.96	13.86	52.82	74.00	-21.18	Horizontal
6	17616.6028	36.40	17.56	53.96	74.00	-20.04	Horizontal
7	17776.6294	36.61	17.97	54.58	74.00	-19.42	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17616.6028	27.87	17.56	45.43	54.00	-8.57	Horizontal
2	17776.6294	26.12	17.97	44.09	54.00	-9.91	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5200	Vertical	PASS

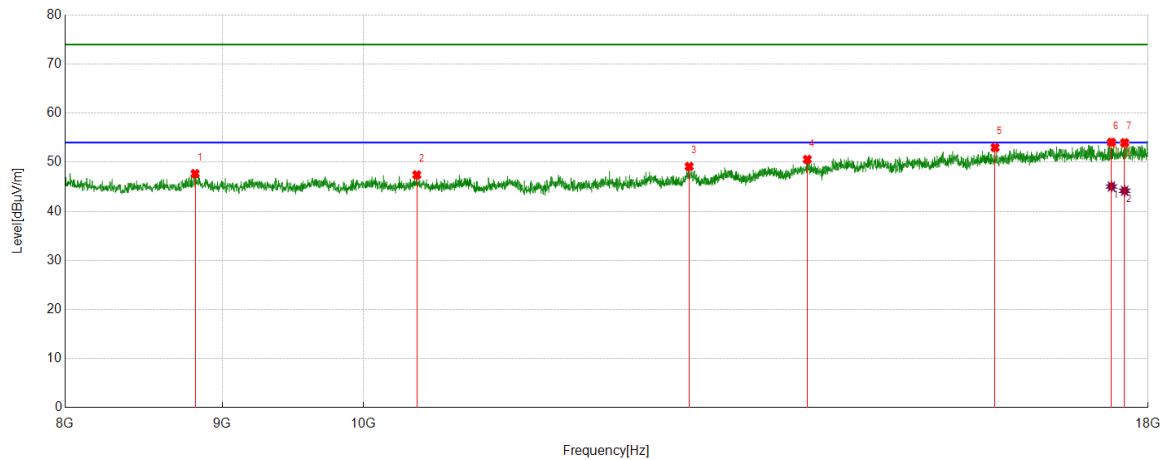

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8818.4697	44.03	3.66	47.69	74.00	-26.31	Vertical
2	10410.4017	43.22	4.21	47.43	74.00	-26.57	Vertical
3	12765.7943	41.55	7.58	49.13	74.00	-24.87	Vertical
4	13945.991	39.60	10.98	50.58	74.00	-23.42	Vertical
5	16051.3419	39.44	13.55	52.99	74.00	-21.01	Vertical
6	17513.2522	36.86	17.19	54.05	74.00	-19.95	Vertical
7	17686.6144	36.58	17.39	53.97	74.00	-20.03	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17513.2522	27.87	17.19	45.06	54.00	-8.94	Vertical
2	17686.6144	26.80	17.39	44.19	54.00	-9.81	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5240	Horizontal	PASS

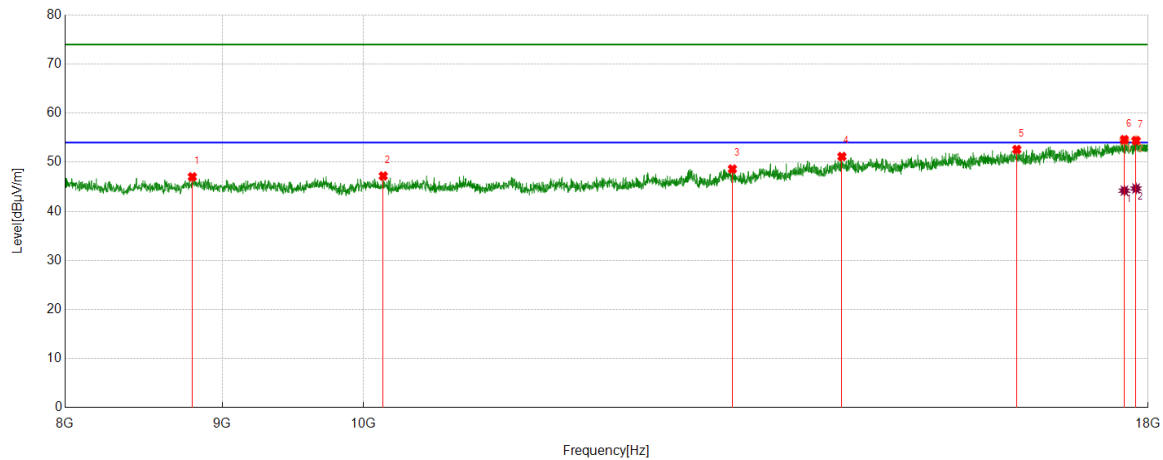

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8800.1334	43.41	3.62	47.03	74.00	-26.97	Horizontal
2	10152.0253	43.17	4.03	47.20	74.00	-26.80	Horizontal
3	13185.8643	40.45	8.17	48.62	74.00	-25.38	Horizontal
4	14312.7188	39.58	11.58	51.16	74.00	-22.84	Horizontal
5	16314.7191	38.59	14.00	52.59	74.00	-21.41	Horizontal
6	17683.2805	37.24	17.36	54.60	74.00	-19.40	Horizontal
7	17838.3064	36.10	18.31	54.41	74.00	-19.59	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17683.2805	26.85	17.36	44.21	54.00	-9.79	Horizontal
2	17838.3064	26.33	18.31	44.64	54.00	-9.36	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5240	Vertical	PASS

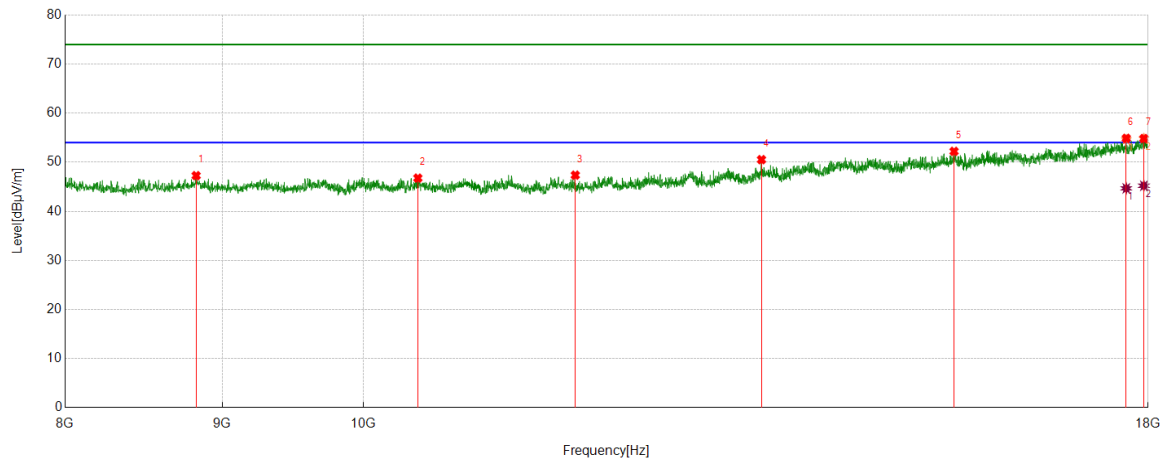

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8825.1375	43.59	3.68	47.27	74.00	-26.73	Vertical
2	10418.7365	42.32	4.45	46.77	74.00	-27.23	Vertical
3	11722.287	41.43	5.94	47.37	74.00	-26.63	Vertical
4	13475.9127	41.49	9.04	50.53	74.00	-23.47	Vertical
5	15566.261	39.46	12.76	52.22	74.00	-21.78	Vertical
6	17708.2847	37.13	17.74	54.87	74.00	-19.13	Vertical
7	17943.3239	36.30	18.52	54.82	74.00	-19.18	Vertical


#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17708.2847	26.94	17.74	44.68	54.00	-9.32	Vertical
2	17943.3239	26.69	18.52	45.21	54.00	-8.79	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- Peak: Peak detector.
- AVG: VBW refer to section 6.2.
- For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
- Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5745	Horizontal	PASS

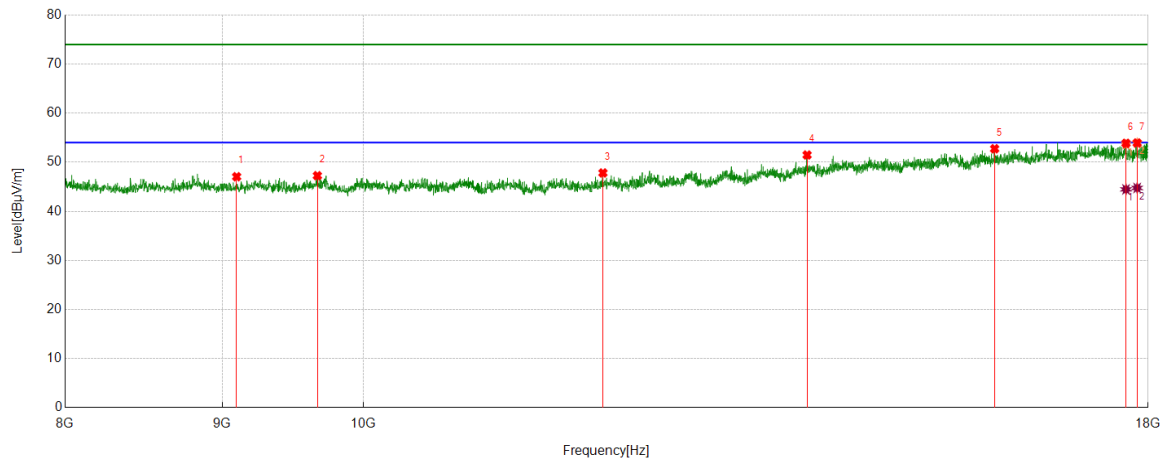

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9096.8495	43.97	3.08	47.05	74.00	-26.95	Horizontal
2	9663.6106	43.44	3.82	47.26	74.00	-26.74	Horizontal
3	11967.3279	41.47	6.35	47.82	74.00	-26.18	Horizontal
4	13944.3241	40.55	10.93	51.48	74.00	-22.52	Horizontal
5	16046.3411	39.23	13.51	52.74	74.00	-21.26	Horizontal
6	17704.9508	36.24	17.62	53.86	74.00	-20.14	Horizontal
7	17853.3089	35.21	18.72	53.93	74.00	-20.07	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17704.9508	26.85	17.62	44.47	54.00	-9.53	Horizontal
2	17853.3089	26.04	18.72	44.76	54.00	-9.24	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5745	Vertical	PASS

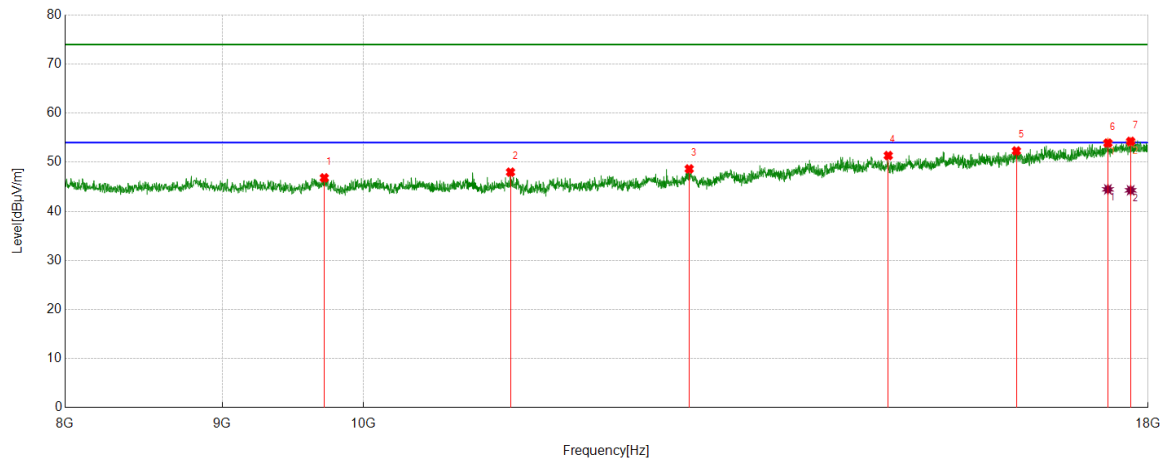

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9713.6189	42.28	4.54	46.82	74.00	-27.18	Vertical
2	11167.1945	42.63	5.35	47.98	74.00	-26.02	Vertical
3	12765.7943	41.06	7.58	48.64	74.00	-25.36	Vertical
4	14817.803	39.48	11.88	51.36	74.00	-22.64	Vertical
5	16309.7183	38.29	14.01	52.30	74.00	-21.70	Vertical
6	17466.5778	36.27	17.63	53.90	74.00	-20.10	Vertical
7	17766.6278	36.28	17.97	54.25	74.00	-19.75	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17466.5778	26.85	17.63	44.48	54.00	-9.52	Vertical
2	17766.6278	26.32	17.97	44.29	54.00	-9.71	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5785	Horizontal	PASS

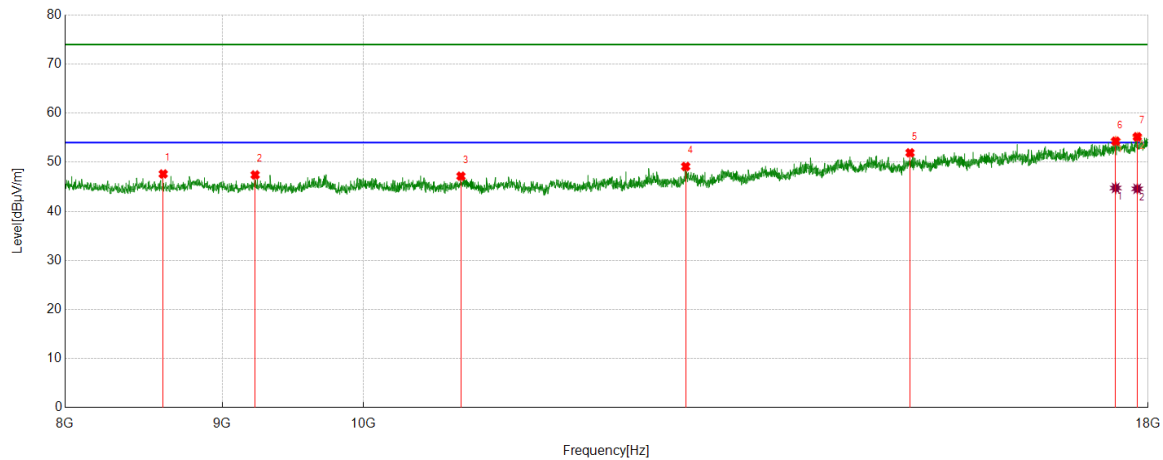

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8610.1017	44.65	2.96	47.61	74.00	-26.39	Horizontal
2	9223.5373	43.77	3.65	47.42	74.00	-26.58	Horizontal
3	10760.4601	42.77	4.39	47.16	74.00	-26.84	Horizontal
4	12732.4554	41.82	7.31	49.13	74.00	-24.87	Horizontal
5	15061.1769	39.65	12.27	51.92	74.00	-22.08	Horizontal
6	17568.2614	37.03	17.26	54.29	74.00	-19.71	Horizontal
7	17854.9758	36.42	18.76	55.18	74.00	-18.82	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17568.2614	27.50	17.26	44.76	54.00	-9.24	Horizontal
2	17854.9758	25.83	18.76	44.59	54.00	-9.41	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5785	Vertical	PASS

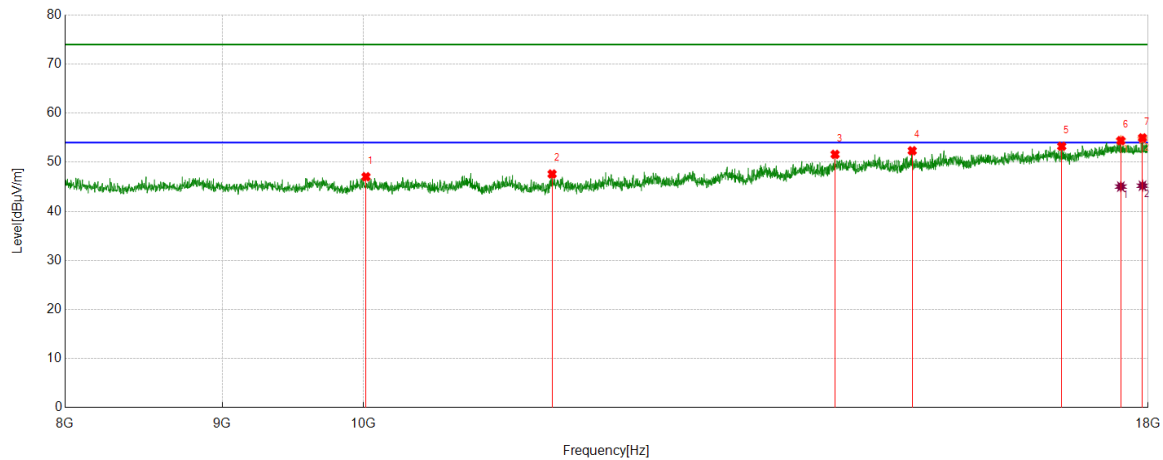

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	10022.0037	43.12	3.92	47.04	74.00	-26.96	Vertical
2	11520.5868	41.21	6.39	47.60	74.00	-26.40	Vertical
3	14239.3732	40.20	11.40	51.60	74.00	-22.40	Vertical
4	15086.181	40.08	12.26	52.34	74.00	-21.66	Vertical
5	16873.1455	37.61	15.64	53.25	74.00	-20.75	Vertical
6	17636.6061	36.75	17.65	54.40	74.00	-19.60	Vertical
7	17924.9875	36.38	18.58	54.96	74.00	-19.04	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17636.6061	27.39	17.65	45.04	54.00	-8.96	Vertical
2	17924.9875	26.63	18.58	45.21	54.00	-8.79	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5825	Horizontal	PASS

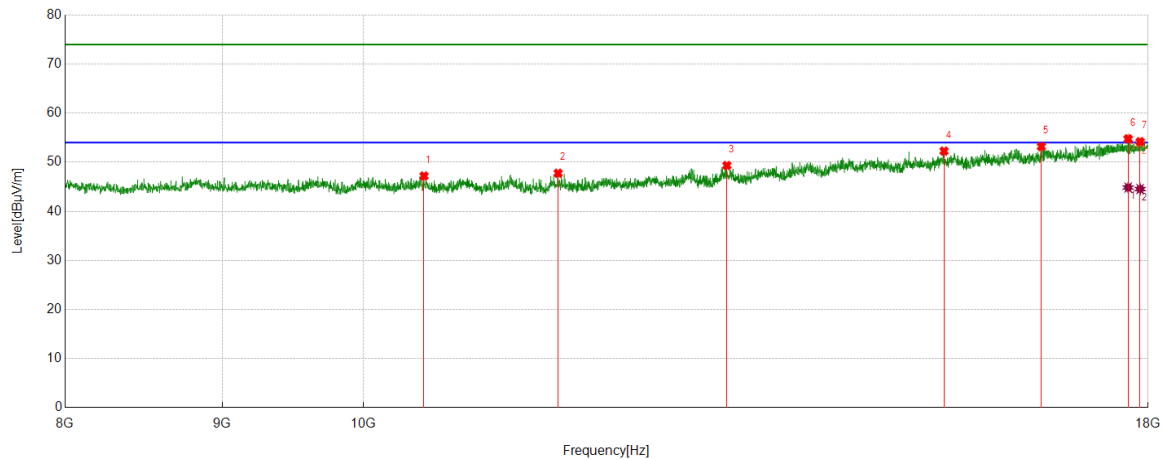

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	10467.0778	42.69	4.51	47.20	74.00	-26.80	Horizontal
2	11572.262	42.20	5.57	47.77	74.00	-26.23	Horizontal
3	13130.8551	40.71	8.63	49.34	74.00	-24.66	Horizontal
4	15449.5749	39.07	13.20	52.27	74.00	-21.73	Horizontal
5	16618.103	38.08	15.12	53.20	74.00	-20.80	Horizontal
6	17733.2889	37.19	17.57	54.76	74.00	-19.24	Horizontal
7	17893.3156	35.16	19.02	54.18	74.00	-19.82	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17733.2889	27.27	17.57	44.84	54.00	-9.16	Horizontal
2	17893.3156	25.52	19.02	44.54	54.00	-9.46	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5825	Vertical	PASS

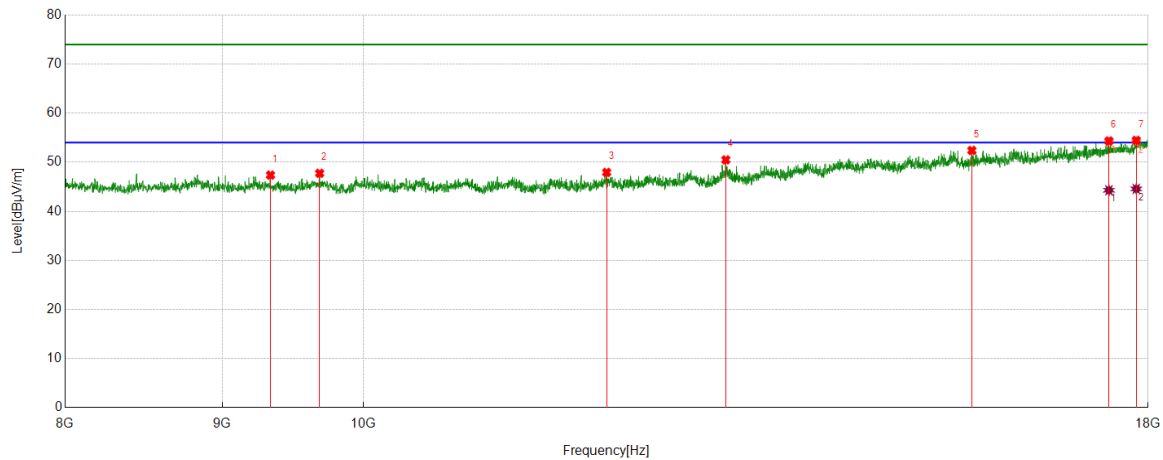

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9330.2217	43.78	3.60	47.38	74.00	-26.62	Vertical
2	9680.28	43.80	3.95	47.75	74.00	-26.25	Vertical
3	12000.6668	41.49	6.44	47.93	74.00	-26.07	Vertical
4	13120.8535	42.01	8.48	50.49	74.00	-23.51	Vertical
5	15774.6291	38.83	13.58	52.41	74.00	-21.59	Vertical
6	17479.9133	36.94	17.39	54.33	74.00	-19.67	Vertical
7	17841.6403	36.04	18.41	54.45	74.00	-19.55	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17479.9133	26.90	17.39	44.29	54.00	-9.71	Vertical
2	17841.6403	26.16	18.41	44.57	54.00	-9.43	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5190	Horizontal	PASS

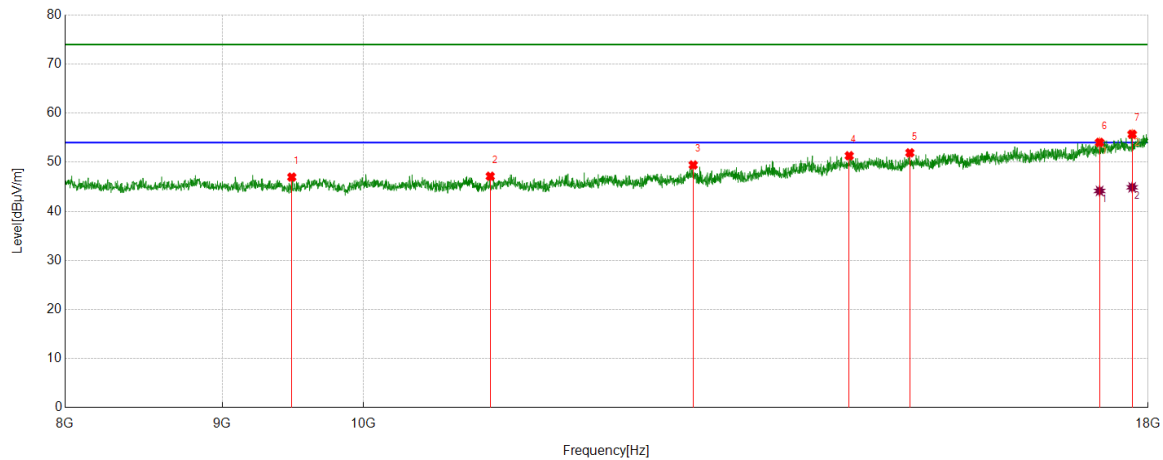

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9480.2467	43.42	3.55	46.97	74.00	-27.03	Horizontal
2	10998.8331	42.16	4.98	47.14	74.00	-26.86	Horizontal
3	12804.134	42.14	7.30	49.44	74.00	-24.56	Horizontal
4	14391.0652	39.60	11.72	51.32	74.00	-22.68	Horizontal
5	15059.5099	39.62	12.30	51.92	74.00	-22.08	Horizontal
6	17358.2264	37.41	16.62	54.03	74.00	-19.97	Horizontal
7	17786.6311	37.64	18.06	55.70	74.00	-18.30	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17358.2264	27.54	16.62	44.16	54.00	-9.84	Horizontal
2	17786.6311	26.83	18.06	44.89	54.00	-9.11	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC40	5190	Vertical	PASS

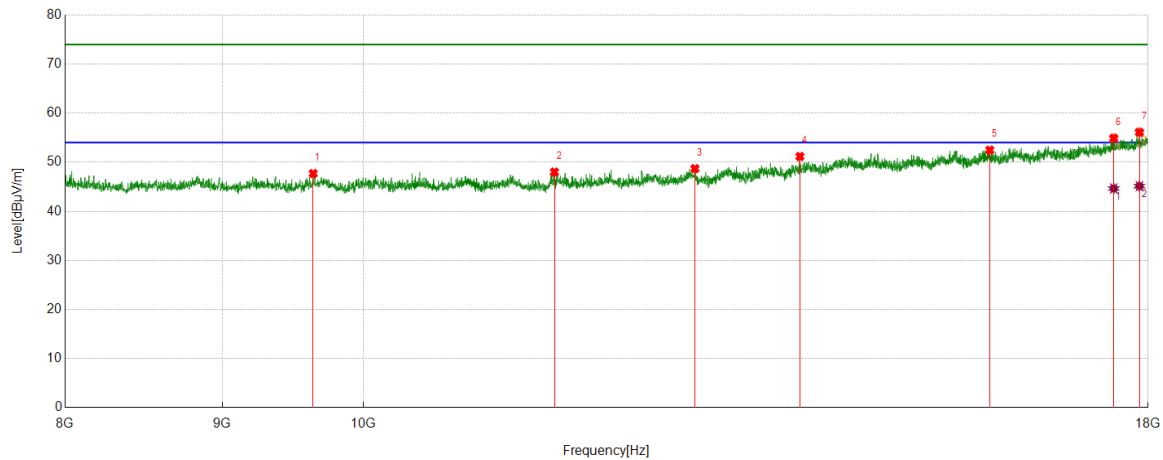

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9633.6056	44.02	3.68	47.70	74.00	-26.30	Vertical
2	11540.5901	41.95	6.05	48.00	74.00	-26.00	Vertical
3	12820.8035	41.20	7.50	48.70	74.00	-25.30	Vertical
4	13869.3116	40.95	10.23	51.18	74.00	-22.82	Vertical
5	15987.998	38.72	13.76	52.48	74.00	-21.52	Vertical
6	17543.2572	38.19	16.71	54.90	74.00	-19.10	Vertical
7	17883.3139	37.25	18.85	56.10	74.00	-17.90	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17543.2572	27.94	16.71	44.65	54.00	-9.35	Vertical
2	17883.3139	26.28	18.85	45.13	54.00	-8.87	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC40	5230	Horizontal	PASS

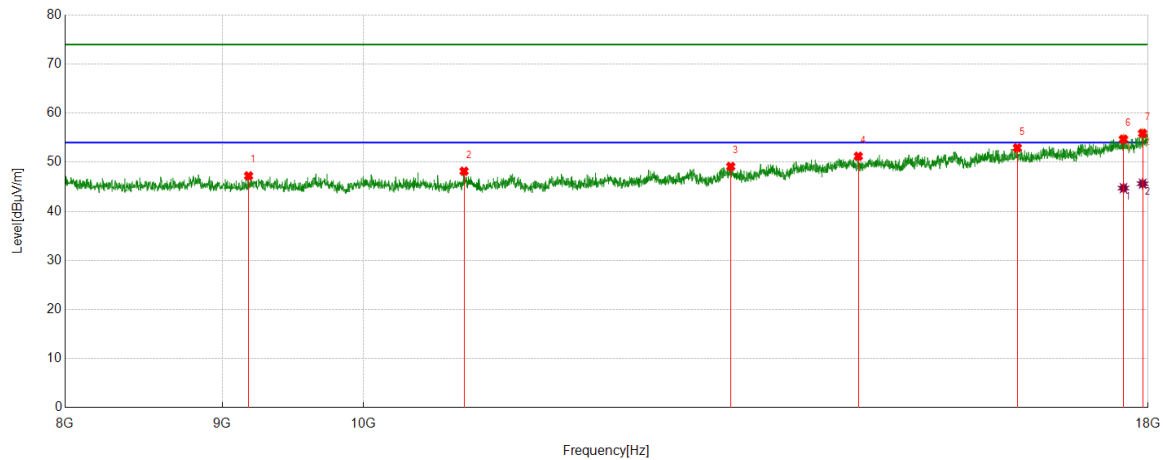

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9178.5298	43.69	3.53	47.22	74.00	-26.78	Horizontal
2	10785.4642	43.40	4.77	48.17	74.00	-25.83	Horizontal
3	13169.1949	40.75	8.38	49.13	74.00	-24.87	Horizontal
4	14489.4149	39.75	11.46	51.21	74.00	-22.79	Horizontal
5	16321.3869	38.99	13.94	52.93	74.00	-21.07	Horizontal
6	17671.6119	37.20	17.50	54.70	74.00	-19.30	Horizontal
7	17926.6544	37.29	18.60	55.89	74.00	-18.11	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17671.6119	27.23	17.50	44.73	54.00	-9.27	Horizontal
2	17926.6544	27.03	18.60	45.63	54.00	-8.37	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC40	5230	Vertical	PASS

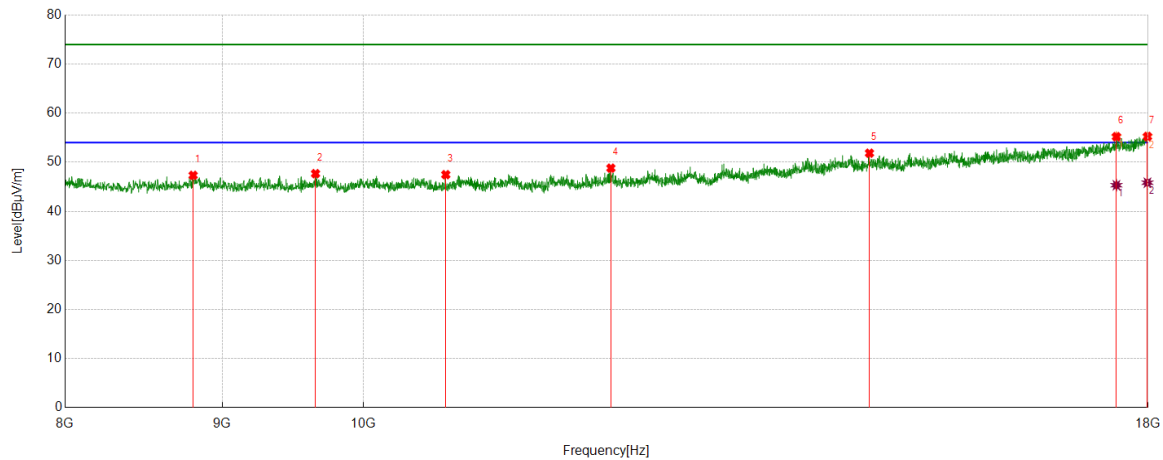

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8805.1342	43.53	3.80	47.33	74.00	-26.67	Vertical
2	9650.275	43.77	3.91	47.68	74.00	-26.32	Vertical
3	10638.7731	42.84	4.63	47.47	74.00	-26.53	Vertical
4	12039.0065	41.81	6.99	48.80	74.00	-25.20	Vertical
5	14611.1018	40.16	11.69	51.85	74.00	-22.15	Vertical
6	17578.263	37.86	17.35	55.21	74.00	-18.79	Vertical
7	17991.6653	36.70	18.55	55.25	74.00	-18.75	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17578.263	27.97	17.35	45.32	54.00	-8.68	Vertical
2	17991.6653	27.28	18.55	45.83	54.00	-8.17	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC40	5755	Horizontal	PASS

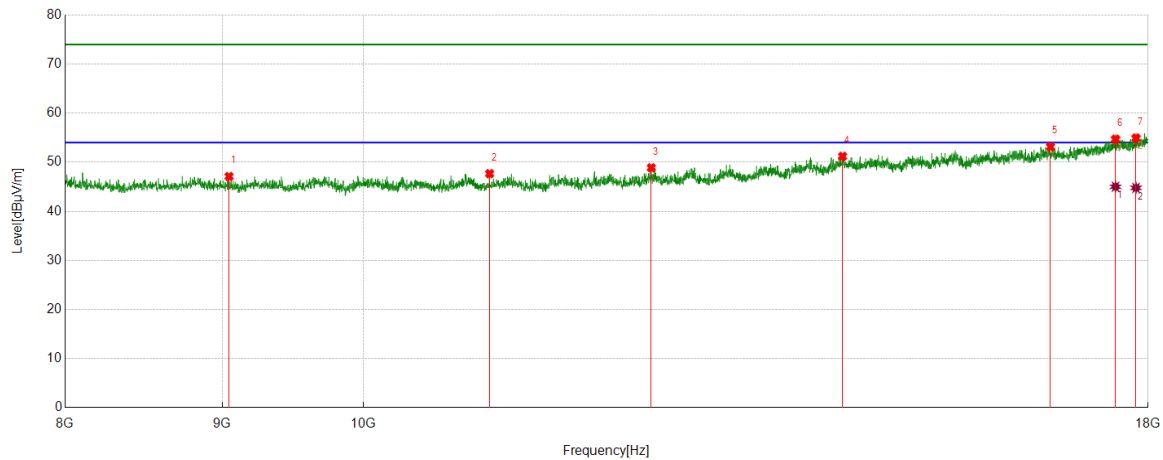

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9045.1742	43.69	3.41	47.10	74.00	-26.90	Horizontal
2	10993.8323	42.74	4.94	47.68	74.00	-26.32	Horizontal
3	12409.0682	42.08	6.80	48.88	74.00	-25.12	Horizontal
4	14319.3866	39.67	11.53	51.20	74.00	-22.80	Horizontal
5	16731.4552	38.06	15.09	53.15	74.00	-20.85	Horizontal
6	17566.5944	37.43	17.26	54.69	74.00	-19.31	Horizontal
7	17838.3064	36.62	18.31	54.93	74.00	-19.07	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17566.5944	27.75	17.26	45.01	54.00	-8.99	Horizontal
2	17838.3064	26.47	18.31	44.78	54.00	-9.22	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC40	5755	Vertical	PASS

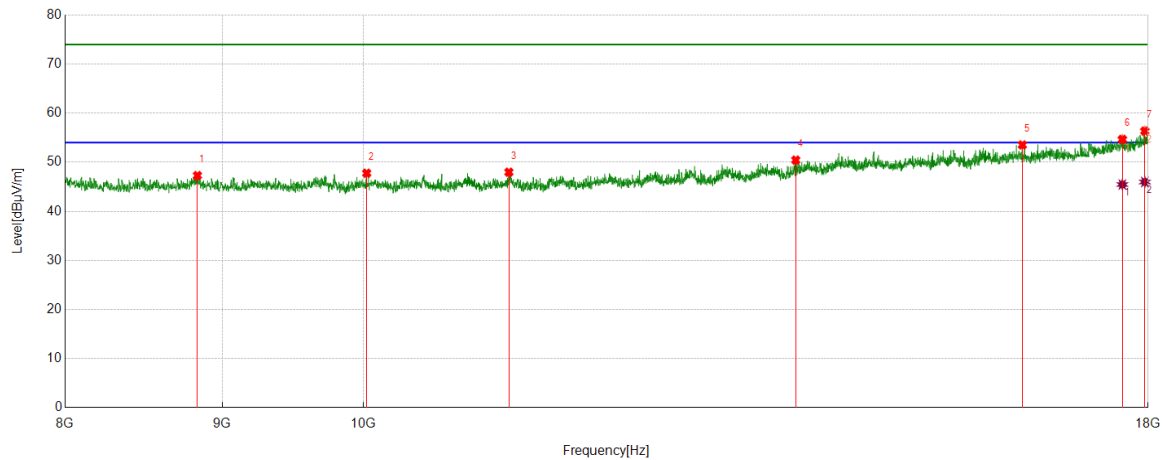

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8833.4722	43.58	3.71	47.29	74.00	-26.71	Vertical
2	10027.0045	43.71	4.06	47.77	74.00	-26.23	Vertical
3	11153.859	42.83	5.14	47.97	74.00	-26.03	Vertical
4	13825.971	39.99	10.45	50.44	74.00	-23.56	Vertical
5	16383.0638	39.03	14.50	53.53	74.00	-20.47	Vertical
6	17656.6094	36.86	17.80	54.66	74.00	-19.34	Vertical
7	17956.6594	37.97	18.39	56.36	74.00	-17.64	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17656.6094	27.66	17.80	45.46	54.00	-8.54	Vertical
2	17956.6594	27.58	18.39	45.97	54.00	-8.03	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since the non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.