



Report No.: 20240117G00773X-E-1

# FCC MPE REPORT

**Report No.:** 20240117G00773X-E-1  
**Product Name:** Microwave Oven  
**Trade Name:** Midea  
**Model Tested:** EM145AYY-P  
**FCC ID:** VG8XM145AXX-P  
**Applicant:** Guangdong Midea Kitchen Appliances Manufacturing Co., Ltd.  
**Received Date:** 2024.01.10  
**Test Data:** 2024.01.15  
**Issued by:** CCIC Southern Testing Co., Ltd.  
**Lab Location:** Electronic Testing Building, No.43, Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China  
**Tel:** 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **5** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



## MAXIMUM PERMISSIBLE EXPOSURE (MPE)

**Product Name**.....: Microwave Oven

**Model Tested** .....: EM145AYY-P

**Trade Name**.....: Midea

**Applicant**.....: Guangdong Midea Kitchen Appliances Manufacturing Co., Ltd.

**Applicant Address**.....: No.6, Yong An Road, Beijiao, Shunde, Foshan, China

**Manufacturer** .....: Guangdong Midea Kitchen Appliances Manufacturing Co., Ltd.

**Manufacturer Address** ...: No.6, Yong An Road, Beijiao, Shunde, Foshan, China

**Standard(s)** .....: FCC/OST MP-5(1986), OET Bulletin 56(1999)

**Test Result**.....: PASS

**Tested by** .....: Ruihong Xie

Ruihong Xie Test Engineer

2024.01.17

**Reviewed by** .....: Chris You

Chris You Senior Engineer

2024.01.17

**Approved by** .....: Yang Fan

Yang Fan, Manager

2024.01.17



## 1.1 Facilities and Accreditations

### 1.1.1 Facilities

#### FCC-Registration No.: CN1283

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until Sep.30, 2023.

#### A2LA Code: 5721.01

CCIC-SET is a third-party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

### 1.1.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

|                             |              |
|-----------------------------|--------------|
| Temperature (°C):           | 15°C- 35°C   |
| Relative Humidity (%):      | 25% -75%     |
| Atmospheric Pressure (kPa): | 86kPa-106kPa |

### 1.1.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

|                                       |                              |
|---------------------------------------|------------------------------|
| Uncertainty of Radiation Hazard Test: | $U_c = 2.4 \text{ dB (k=2)}$ |
|---------------------------------------|------------------------------|

## EQUIPMENTS LIST

### A. Equipment List:

| Description           | Manufacturer    | Model    | Serial No.  | Calibration Date | Calibration Due. Date |
|-----------------------|-----------------|----------|-------------|------------------|-----------------------|
| Portable Spectrometer | Rohde & Schwarz | FSH8     | A1140401672 | 2023.02.14       | 2024.02.13            |
| Probe                 | Rohde & Schwarz | TSEMF-B1 | A1140401671 | 2023.02.14       | 2024.02.13            |

## 1.2 RADIATION HAZARD TEST

### 1.2.1 Radiation Hazard (Health) Requirement

For ISM equipment operating on higher frequencies (above 900 MHz), in particular microwave ovens and medical diathermy equipment, radiation leakage should be measured in accordance with the current Bureau of Radiological Health standard, employing an electromagnetic radiation monitor. This test is made primarily to assure that personnel will not be exposed to radiation hazard in testing the equipment. Equipment submitted to the FCC which have radiation leakage apparently in excess of BRH limit will be reported to BRH for their evaluation. See FCC Bulletin OST 56, "Questions and Answers about Biological Effects and Potential Hazards of Radiofrequency Radiation".

### 1.2.2 Test Procedure

The EUT was set-up according to the FCC MP-5 and FCC Part 18 for radiation Hazard measurement. The measurement was using a microwave leakage meter to measure the radiation leakage in the as-received condition with the oven door closed. A 770mL water load in a breaker was located in the center of the oven and the microwave oven was set to maximum power. While the oven operating, the microwave meter will check the leakage and then record the maximum leakage.

### 1.2.3 Limit

Limits for General Population/Uncontrolled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/cm <sup>2</sup> ) | Averaging Time $ E ^2$ , $ H ^2$ or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|-----------------------------------------|-------------------------------------------------|
| 0.3-1.34              | 614                               | 1.63                              | (100)*                                  | 30                                              |
| 1.34-30               | 824/f                             | 2.19/f                            | (180/f <sup>2</sup> )*                  | 30                                              |
| 30-300                | 27.5                              | 0.073                             | 0.2                                     | 30                                              |
| 300-1500              | --                                | --                                | f/1500                                  | 30                                              |
| 1500-100,000          | --                                | --                                | 1.0                                     | 30                                              |

f = frequency in MHz

\*Plane-wave equivalent power density

NOTE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.


A maximum of  $1.0\text{mW}/\text{cm}^2$  is allowed in according with the applicable FCC standards

#### 1.2.4 Test results

| Test location: | Test result ( $\text{mW}/\text{cm}^2$ ) | Limit ( $\text{mW}/\text{cm}^2$ ) | Verdict |
|----------------|-----------------------------------------|-----------------------------------|---------|
| Left side      | 0.33                                    | 1.0                               | Pass    |
| Right side     | 0.36                                    | 1.0                               | Pass    |
| Front          | <b>0.42</b>                             | 1.0                               | Pass    |
| Rear           | 0.23                                    | 1.0                               | Pass    |

There was no microwave leakage exceeding a power level of  $0.42\text{ mW}/\text{cm}^2$  Observed at any point 5cm or more from the external surface of the oven.

#### 1.2.5 Test setup photo

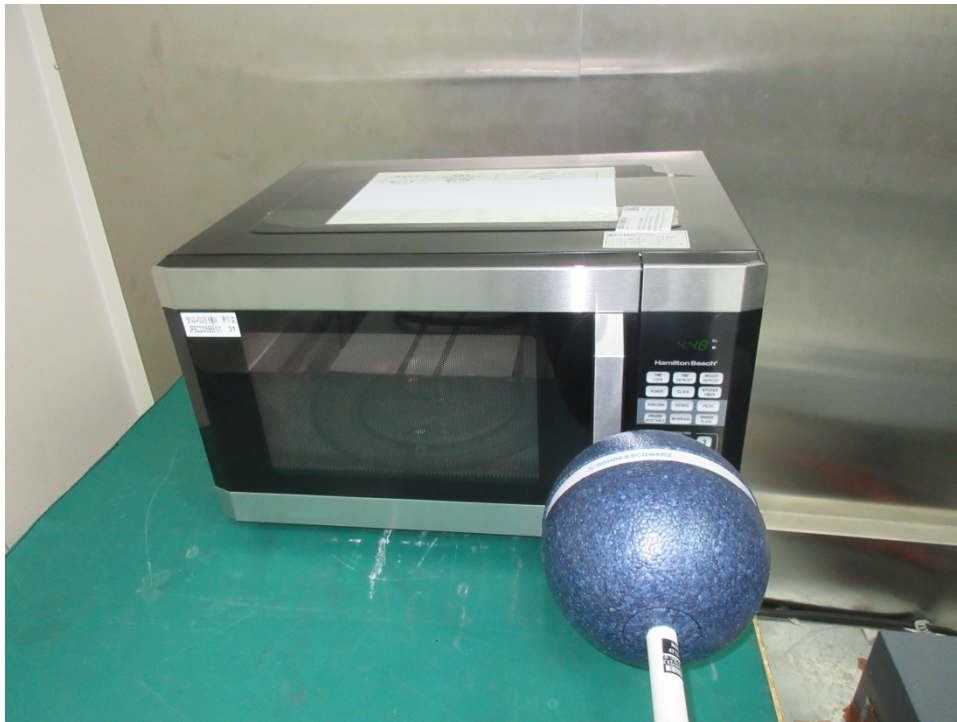

End of the report