

FCC Test Report

FCC ID : MXF-WVRTM127ACN

Equipment : Indoor Wi-Fi Router

Model No. : WVRTM-127ACN

Brand Name : Gemtek

Applicant : Gemtek Technology Co., Ltd.

Address : No. 15-1 Zhonghua Road, Hsinchu Industrial

Park, Hukou, Hsinchu, Taiwan, 30352.

Standard : 47 CFR FCC Part 15.247

Received Date : Fed. 23, 2017

Tested Date : Mar. 01 ~ Oct. 24, 2017

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Chen / Assistant Manager Gary Chang / Manager

Testing Laboratory

Report No.: FR7O1102AC Page: 1 of 64



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	
1.3	Test Setup Chart	
1.4	The Equipment List	g
1.5	Test Standards	10
1.6	Measurement Uncertainty	11
2	TEST CONFIGURATION	12
2.1	Testing Condition	12
2.2	The Worst Test Modes and Channel Details	12
3	TRANSMITTER TEST RESULTS	13
3.1	Conducted Emissions	13
3.2	6dB and Occupied Bandwidth	16
3.3	RF Output Power	
3.4	Power Spectral Density	21
3.5	Unwanted Emissions into Restricted Frequency Bands	23
3.6	Emissions in Non-Restricted Frequency Bands	
4	TEST LABORATORY INFORMATION	64



Release Record

Report No.	Version	Description	Issued Date
FR7O1102AC	Rev. 01	Initial issue	Nov. 13, 2017

Report No.: FR7O1102AC Page: 3 of 64



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.474MHz 38.28 (Margin -8.17dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 4874.00MHz 52.96 (Margin -1.04dB) - AV 2488.000MHz 52.96 (Margin -1.04dB) - AV	Pass
15.247(b)(3)	Maximum Output Power	Max Power [dBm]: 26.27	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Report No.: FR7O1102AC Page: 4 of 64



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information							
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS		
2400-2483.5	b	2412-2462	1-11 [11]	2	1-11 Mbps		
2400-2483.5	g	2412-2462	1-11 [11]	2	6-54 Mbps		
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	2	MCS 0-15		
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	2	MCS 0-15		

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.

Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Ant. No.	Model	Type	Operating Frequency (MHz) / Gain (dBi)			
Ant. No.	Wodei	Туре	Connector	2400~2483.5	5150~5250	5725~5850
1	BLACK	PIFA	IPEX	2.34	2.48	5.06
2	GRAY	PIFA	IPEX	2.4	2	4.14

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	56Vdc from adapter
-------------------	--------------------

Report No.: FR7O1102AC Page: 5 of 64



1.1.4 Accessories

	Accessories					
No.	Equipment	Description				
1	Adapter	Brand: PHIHONG Model: PSAA30R-560 Power Rating: I/P: 100-240Vac, 50-60Hz, 0.8A O/P: 56Vdc, 0.536A Power Line: 1.5m non-shielded without core				
2	Adapter	Brand: Gospell Model: G0753-560-054 Power Rating: I/P: 100-240Vac, 50-60Hz, 0.75A O/P: 56Vdc, 0.54A Power Line: 1.2m non-shielded without core				
3	RJ45 (EEKSONG)	1.4m non-shielded without core				
4	RJ45 (Tong-Li)	1.4m non-shielded without core				

1.1.5 Channel List

Frequency	band (MHz)	2400~	2483.5		
802.11 b /	g / n HT20	802.11	802.11n HT40		
Channel	Frequency(MHz)	Channel	Frequency(MHz)		
1	2412	3	2422		
2	2417	4	2427		
3	2422	5	2432		
4	2427	6	2437		
5	2432	7	2442		
6	2437	8	2447		
7	2442	9	2452		
8	2447				
9	2452				
10	2457				
11	2462				

Report No.: FR7O1102AC Page: 6 of 64



1.1.6 Test Tool and Duty Cycle

Test Tool	MT7603, version: 0.0.068					
	Mode	Duty cycle (%)	Duty factor (dB)			
	11b	100.00%	0.00			
Duty Cycle and Duty Factor	11g	98.49%	0.07			
	HT20	92.04%	0.36			
	HT40	89.74%	0.47			

1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)	Power Set
11b	2412	24
11b	2437	24
11b	2462	24
11g	2412	1F
11g	2437	28
11g	2462	1F
HT20	2412	1E
HT20	2437	28
HT20	2462	1E
HT40	2422	18
HT40	2437	21
HT40	2452	18


Report No.: FR7O1102AC Page: 7 of 64



1.2 Local Support Equipment List

	Support Equipment List								
No.	No. Equipment Brand Model FCC ID Signal cable / Length (m)								
1	Notebook	DELL	Latitude E6430	DoC	RJ45, 10m non-shielded.				
	Notebook	DELL	Latitude E6430	DoC	RJ45, 10m non-shielded.				
2	Phone	HTT	HTT-806		RJ11, 1.5m non-shielded.				
3	USB Flash	Kingston	DTSE9						

1.3 Test Setup Chart

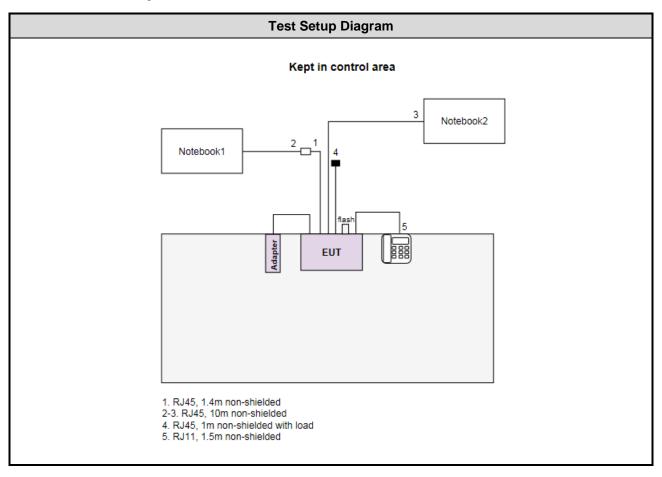

Report No.: FR7O1102AC Page: 8 of 64



1.4 The Equipment List

Test Item	Conducted Emission							
Test Site	Conduction room 1 / (Conduction room 1 / (CO01-WS)						
Tested Date	Oct. 24, 2017							
Instrument	Manufacturer	Manufacturer Model No. Serial No. Calibration Date Calibration Until						
Receiver	R&S	ESR3	101657	Dec. 21, 2016	Dec. 20, 2017			
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 08, 2016	Nov. 07, 2017			
RF Cable-CON	RF Cable-CON EMC EMCCFD300-BM-B 50821 Dec. 20, 2016 Dec. 19, 201							
Measurement Software								
Note: Calibration Interval of instruments listed above is one year.								

Test Item	Radiated Emission be	Radiated Emission below 1GHz									
Test Site	966 chamber 3 / (03C	66 chamber 3 / (03CH03-WS)									
Tested Date	Oct. 23, 2017	Oct. 23, 2017									
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until						
Receiver	Agilent	N9038A	MY53290044	Sep. 26, 2017	Sep. 25, 2018						
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 28, 2017	Apr. 27, 2018						
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 10, 2016	Nov. 09, 2017						
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 09, 2016	Dec. 08, 2017						
Preamplifier	EMC	EMC02325	980187	Sep. 04, 2017	Sep. 03, 2018						
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800 -001	Feb. 04, 2017	Feb. 03, 2018						
LF cable-3M	EMC	EMC8D-NM-NM-300 0	131103	Feb. 04, 2017	Feb. 03, 2018						
LF cable-13M	EMC	EMC8D-NM-NM-130 00	131104	Feb. 04, 2017	Feb. 03, 2018						
Measurement Software	AUDIX	e3	6.120210g	NA	NA						
Note: Calibration Inter	rval of instruments liste	d above is one year.									

Report No.: FR7O1102AC Page: 9 of 64



Test Item	Radiated Emission above 1GHz										
Test Site	966 chamber 3 / (03C	966 chamber 3 / (03CH03-WS)									
Tested Date	Mar. 01, 2017										
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until						
Spectrum Analyzer	Agilent	N9010A	MY53400091	Sep. 09, 2016	Sep. 08, 2017						
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Feb. 09, 2017	Feb. 08, 2018						
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 25, 2016	Oct. 24, 2017						
Preamplifier	Agilent	83017A	MY53270014	Aug. 22, 2016	Aug. 21, 2017						
Preamplifier	EMC	EMC184045B	980192	Aug. 24, 2016	Aug. 23, 2017						
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Feb. 04, 2017	Feb. 03, 2018						
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY22600/4	Feb. 04, 2017	Feb. 03, 2018						
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Feb. 04, 2017	Feb. 03, 2018						
Measurement Software	AUDIX	e3	6.120210g	NA	NA						
Note: Calibration Inte	rval of instruments listed	d above is one year.									

Test Item	RF Conducted	RF Conducted										
Test Site	(TH01-WS)	TH01-WS)										
Tested Date	Mar. 08, 2017	ar. 08, 2017										
Instrument	t Manufacturer Model No. Serial No. Calibration Date Calibrati											
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40	101486	Nov. 15, 2016	Nov. 14, 2017							
Power Meter	Anritsu	ML2495A	1241002	Oct. 06, 2016	Oct. 05, 2017							
Power Sensor	Anritsu	MA2411B	1207366	Oct. 06, 2016	Oct. 05, 2017							
AC POWER SOURCE	APC	AFC-500W	F312060012	Oct. 28, 2016	Oct. 27, 2017							
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA							
Note: Calibration Inte	Note: Calibration Interval of instruments listed above is one year.											

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 DTS Meas Guidance v04

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

Report No.: FR7O1102AC Page: 10 of 64



1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty							
Parameters	Uncertainty						
Bandwidth	±34.134 Hz						
Conducted power	±0.808 dB						
Power density	±0.463 dB						
Conducted emission	±2.670 dB						
AC conducted emission	±2.90 dB						
Radiated emission ≤ 1GHz	±3.66 dB						
Radiated emission > 1GHz	±5.37 dB						

Report No.: FR7O1102AC Page: 11 of 64



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	22°C / 56%	Alex Tsai
Radiated Emissions	03CH03-WS	22-25°C / 64-65%	Brad Wu Vincent Yeh
RF Conducted	TH01-WS	20°C / 65%	Brad Wu

FCC Designation No.: TW0009
 FCC site registration No.: 207696
 IC site registration No.: 10807C-1

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	11g	2437	6 Mbps	
Radiated Emissions ≤1GHz	11g	2437	6 Mbps	
Radiated Emissions >1GHz Maximum Output Power 6dB bandwidth Power spectral density	11b 11g HT20 HT40	2412 / 2437 / 2462 2412 / 2437 / 2462 2412 / 2437 / 2462 2422 / 2437 / 2452	1 Mbps 6 Mbps MCS 0 MCS 0	

NOTE:

- 1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.
- 2. Two RJ45 cables (EEKSONG & Tong-Li) had been covered during the pretest and found that **EEKSONG RJ45** cable was the worst case and was selected for final testing.
- Two adapters (PHIHONG & Gospell) had been covered during the pretest and found that PHIHONG adapter was the worst case for radiated emission test, and Gospell adapter was the worst case for conducted emission test.

Report No.: FR7O1102AC Page: 12 of 64



3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit									
Frequency Emission (MHz)	Quasi-Peak	Average							
0.15-0.5	66 - 56 *	56 - 46 *							
0.5-5	56	46							
5-30	60	50							
Note 1: * Decreases with the logarith	Note 1: * Decreases with the logarithm of the frequency.								

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V / 60Hz.

3.1.3 Test Setup

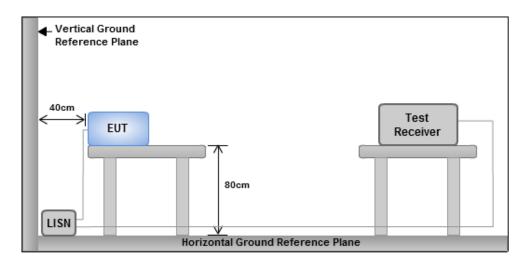


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR7O1102AC Page: 13 of 64




Test Result of Conducted Emissions 3.1.4

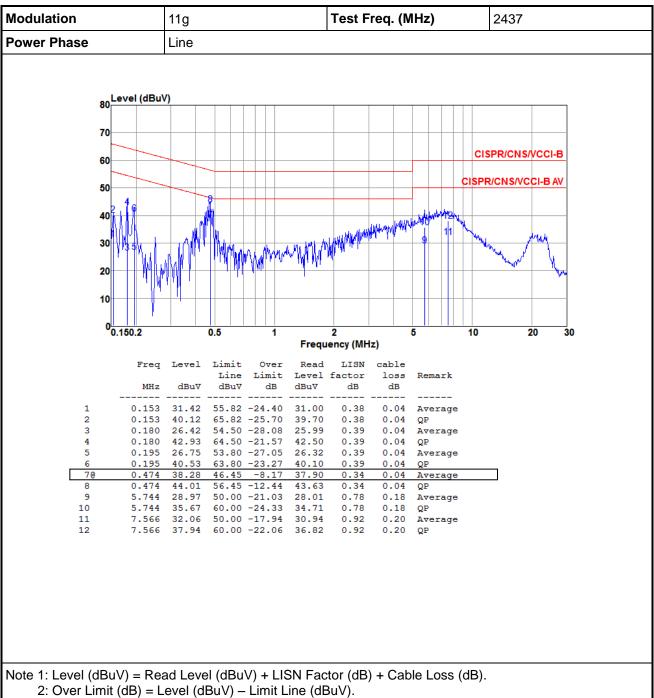

Report No.: FR7O1102AC Page: 14 of 64



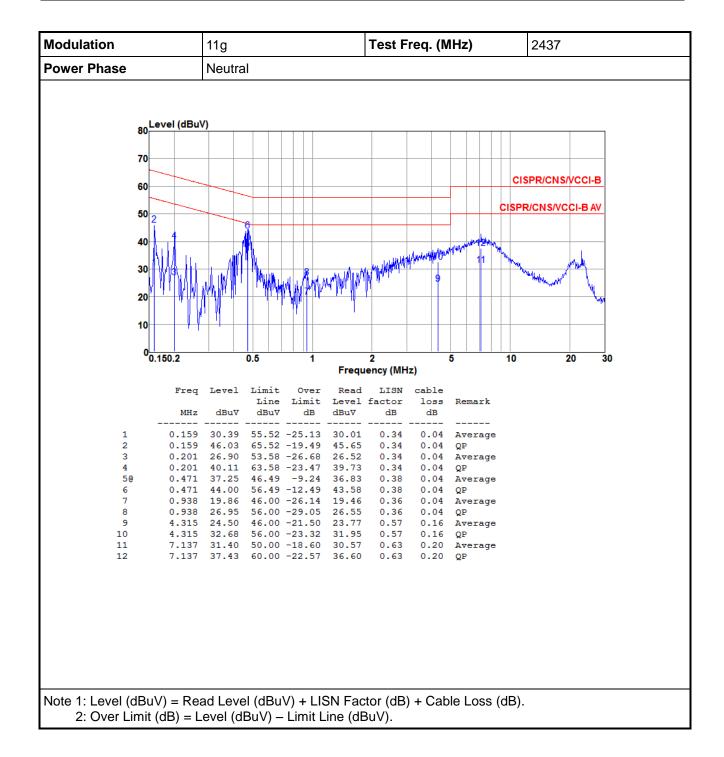

Report No.: FR7O1102AC Page: 15 of 64



3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

- 1. Set resolution bandwidth (RBW) = 1 MHz, Video bandwidth = 3 MHz.
- 2. Detector = Sample, Trace mode = max hold.
- 3 Sweep = auto couple, Allow the trace to stabilize.
- 4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup




Report No.: FR7O1102AC Page: 16 of 64



3.2.4 Test Result of 6dB and Occupied Bandwidth


Modulation	N	6dB Bandwidth (MHz)					
Mode	N _{TX}	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Limit (kHz)
11b	2	2412	9.57	9.10			500
11b	2	2437	10.03	8.58			500
11b	2	2462	9.04	9.57			500
11g	2	2412	13.86	15.36			500
11g	2	2437	15.13	15.07			500
11g	2	2462	13.86	15.13			500
HT20	2	2412	14.72	14.72			500
HT20	2	2437	15.13	15.13			500
HT20	2	2462	15.13	15.07			500
HT40	2	2422	35.13	35.01			500
HT40	2	2437	35.13	35.01			500
HT40	2	2452	35.13	35.01			500

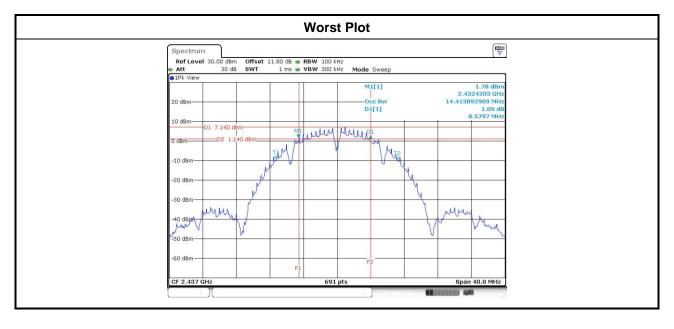

Report No.: FR7O1102AC Page: 17 of 64



Modulation	N.	Freq.		99% Occupied E	Bandwidth (MHz)	
Mode	N _{TX}	(MHz)	Chain 0	Chain 1	Chain 2	Chain 3
11b	2	2412	14.87	14.63		
11b	2	2437	14.84	14.48		
11b	2	2462	14.75	14.43		
11g	2	2412	16.89	16.63		
11g	2	2437	20.64	17.33		
11g	2	2462	16.95	16.53		
HT20	2	2412	17.76	17.63		
HT20	2	2437	21.77	18.35		
HT20	2	2462	17.77	17.56		
HT40	2	2422	35.97	36.19		
HT40	2	2437	36.37	36.37		
HT40	2	2452	36.00	36.19		

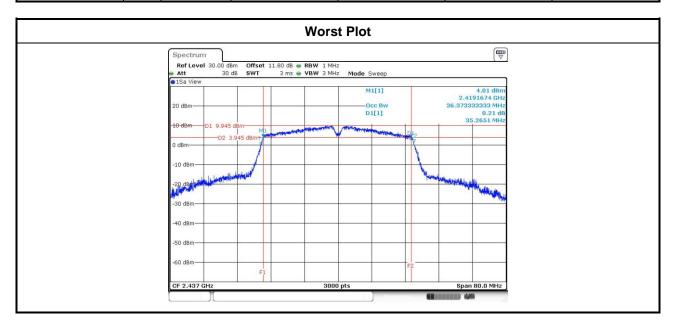

Report No.: FR7O1102AC Page: 18 of 64



3.3 RF Output Power

3.3.1 Limit of RF Output Power

Con	duct	ed power shall not exceed 1Watt.
\boxtimes	Ante	enna gain <= 6dBi, no any corresponding reduction is in output power limit.
	Ante	enna gain > 6dBi
		Non Fixed, point to point operations. The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB
		Fixed, point to point operations Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.
		Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations ,no any corresponding reduction is in transmitter peak output power

3.3.2 Test Procedures

Maximum Peak Conducted Output Power

- 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
- 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
- 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.

Nower meter

- A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power (For reference only)

Nower meter

 A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



Report No.: FR7O1102AC Page: 19 of 64



3.3.4 Test Result of Maximum Output Power

				Peak conducted Output Power (dBm)								FIDD
Modulation Mode	N _{TX}	N _{TX} Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Total Power (mW)	Total Power (dBm)	Limit (dBm)	Ant. Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
11b	2	2412	21.86	21.83			305.867	24.86	30.00	2.40	27.26	36.00
11b	2	2437	21.55	22.16			307.327	24.88	30.00	2.40	27.28	36.00
11b	2	2462	21.45	23.04			341.009	25.33	30.00	2.40	27.73	36.00
11g	2	2412	22.44	23.1			379.562	25.79	30.00	2.40	28.19	36.00
11g	2	2437	22.94	23.56			423.775	26.27	30.00	2.40	28.67	36.00
11g	2	2462	22.26	22.95			365.510	25.63	30.00	2.40	28.03	36.00
HT20	2	2412	21.96	22.75			345.401	25.38	30.00	2.40	27.78	36.00
HT20	2	2437	22.92	23.51			420.273	26.24	30.00	2.40	28.64	36.00
HT20	2	2462	21.85	22.69			338.889	25.30	30.00	2.40	27.70	36.00
HT40	2	2422	19.36	21.11			215.420	23.33	30.00	2.40	25.73	36.00
HT40	2	2437	22.15	23.04			365.431	25.63	30.00	2.40	28.03	36.00
HT40	2	2452	19.04	20.65			196.313	22.93	30.00	2.40	25.33	36.00

Modulation		Freq.	Condi	ucted (Average)	ed (Average) Output Power (dBm)			Total	Limit
Mode	N _{TX}	(MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Power (mW)	Power (dBm)	(dBm)
11b	2	2412	18.08	17.94			126.499	21.02	
11b	2	2437	17.84	18.56			132.593	21.23	
11b	2	2462	17.67	18.92			136.462	21.35	
11g	2	2412	15.81	17.48			94.082	19.74	
11g	2	2437	18.95	19.13			160.370	22.05	
11g	2	2462	15.64	16.95			86.189	19.35	
HT20	2	2412	15.29	16.82			81.890	19.13	
HT20	2	2437	18.93	19.12			159.821	22.04	
HT20	2	2462	15.24	16.55			78.605	18.95	
HT40	2	2422	11.95	13.62			38.682	15.88	
HT40	2	2437	16.17	17.64			99.476	19.98	
HT40	2	2452	11.69	13.14			35.363	15.49	

Note: Conducted average output power is for reference only.

Report No.: FR7O1102AC Page: 20 of 64



3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - Set the RBW = 3kHz, VBW = 10kHz.
 - Detector = Peak, Sweep time = auto couple.
 - 3. Trace mode = max hold, allow trace to fully stabilize.
 - 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - Set the RBW = 100kHz, VBW = 300 kHz.
 - 2. Detector = RMS, Sweep time = auto couple.
 - 3. Set the sweep time to: ≥ 10 x (number of measurement points in sweep) x (maximum data rate per stream).
 - 4. Perform the measurement over a single sweep.
 - 5. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup




Report No.: FR7O1102AC Page: 21 of 64



3.4.4 Test Result of Power Spectral Density

Modulation Mode	N _{TX}	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
11b	2	2412	-4.13	8.00
11b	2	2437	-4.59	8.00
11b	2	2462	-4.02	8.00
11g	2	2412	-8.27	8.00
11g	2	2437	-5.29	8.00
11g	2	2462	-8.66	8.00
HT20	2	2412	-7.32	8.00
HT20	2	2437	-5.20	8.00
HT20	2	2462	-8.03	8.00
HT40	2	2422	-13.77	8.00
HT40	2	2437	-9.99	8.00
HT40	2	2452	-14.17	8.00

Note: Test result is bin-by-bin summing measured value of each TX port.

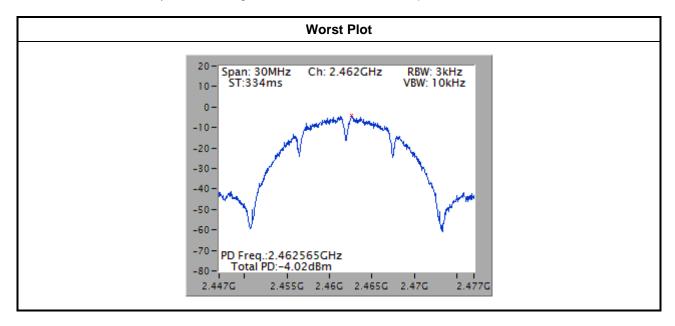

Report No.: FR7O1102AC Page: 22 of 64



3.5 Unwanted Emissions into Restricted Frequency Bands

3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

	Restricted Band	Emissions Limit	
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:**

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR7O1102AC Page: 23 of 64




3.5.3 Test Setup

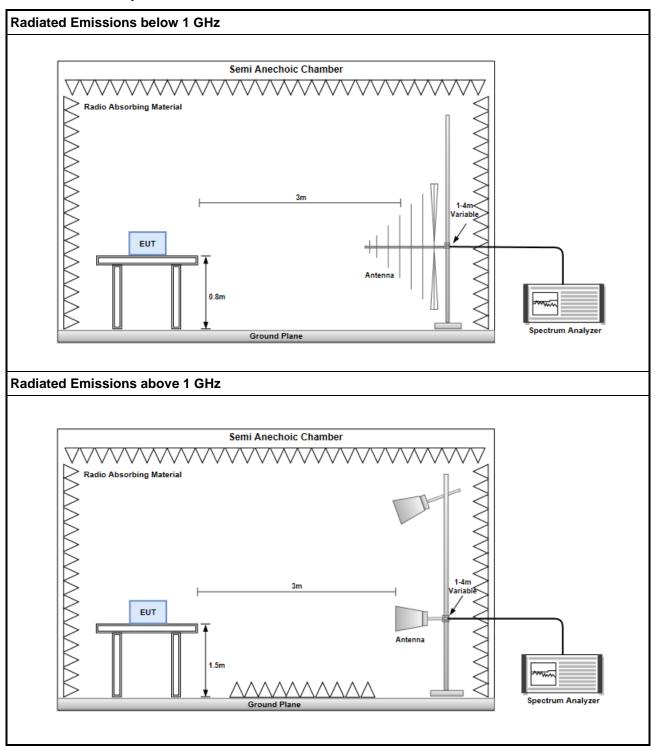

Report No.: FR7O1102AC Page: 24 of 64



3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

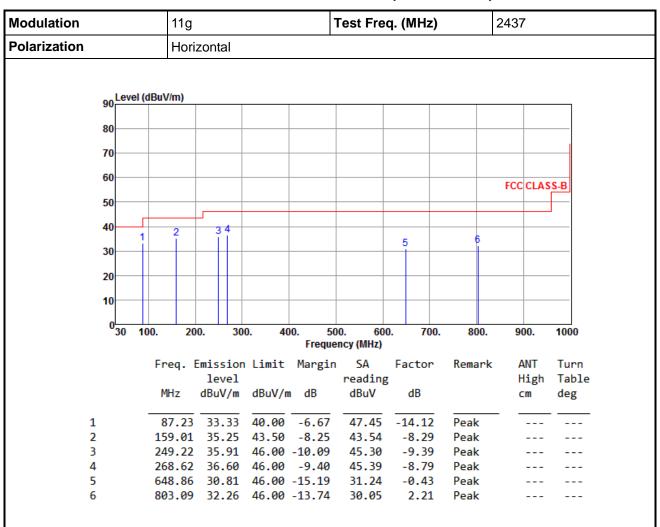

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR7O1102AC Page: 25 of 64



Modulation			11g			-	Test Fre	q. (MHz)											
Polarization			Verti	cal		-													
	90 ^{L6}	evel (dB	ıV/m)									_							
	80																		
	70-																		
	60									FCC	CLASS-E	3							
	50											-							
	40																		
			2	3 	4	ı t			6										
	30																		
	20											-							
	10											_							
	0 <mark></mark>	100.	200	0. 30	00. 4		00. 60 ency (MHz)	0. 700). 800.	90	0. 10	000							
		F	rea F	missio	n limit	Margin		Factor	Remark	. ΔΙ	NT T	urn							
			req. c	level	LIMIL	riai Sin	reading		remai i			able							
			MHz	dBuV/m	dBuV/	m dB	dBuV	dB		CI	m d	eg							
	1	_	43.62	38.93	40 00	-1.07	47.41	-8.48	QP .		100	113							
	2		64.83	35.78		-7.72	44.19		_										
	3		49.22	34.78		-11.22	44.17												
	4		89.87			-14.32	37.28												
	5 6		99.48	33.21 32.75		-12.79 -13.25	36.57 31.88												

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Page: 26 of 64 Report No.: FR7O1102AC



3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

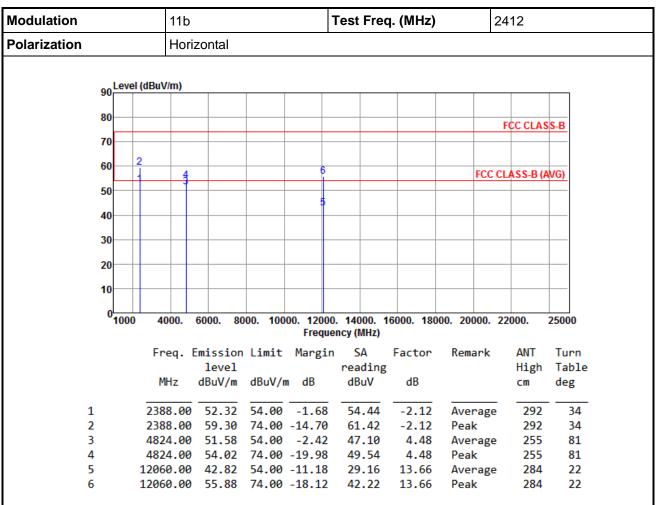

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 27 of 64



Modulation	11b	Test Freq. (MHz)	2412
Polarization	Vertical		

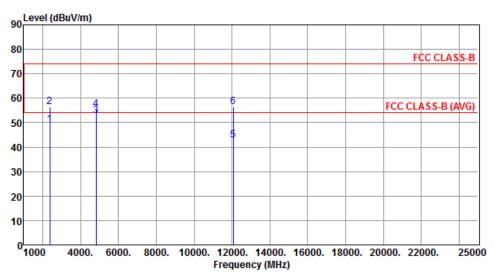

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ü	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
	2200 00	40.04		4.00					
1	2388.00	49.01	54.00	-4.99	51.13	-2.12	Average	292	28
2	2388.00	56.35	74.00	-17.65	58.47	-2.12	Peak	292	28
3	4824.00	52.95	54.00	-1.05	48.47	4.48	Average	228	36
4	4824.00	55.46	74.00	-18.54	50.98	4.48	Peak	228	36
5	12060.00	42.71	54.00	-11.29	29.05	13.66	Average	256	35
6	12060.00	56.47	74.00	-17.53	42.81	13.66	Peak	256	35

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 28 of 64



Modulation			11	b				Test Fre	q. (MHz)		2437	
Polarization			Н	oriz	ontal		•					
	90 <mark>.</mark>	evel	(dBuV/m))								
	00											
	80										FCC CLAS	S-B
	70	+										
	60											
	•		4	<u>g</u>	8					FCC	CLASS-B (A	(VG)
	50	٠,										
	40		3		1 7							
	40											
	30	_										
	20											
	20											
	10	\rightarrow										
	0											
	,	1000	4000	. 6	000. 8	000. 10		0. 14000. 1 ency (MHz)	16000. 180	00. 20000.	22000.	25000
			Frea	. En	issio	n Limit	Margir	n SA	Factor	Remark	ANT	Turn
					level			reading			High	Table
			MHz	C	lBuV/m	dBuV/	m dB	dBuV	dB		cm	deg
	L		2390.0	 00	38.60	54.00	-15.40	40.72	-2.12	Average	264	268
	2				51.22		-22.78	53.34	-2.12	Peak	264	268
	3		2483.	50	40.32	54.00	-13.68		-1.77	Average	e 264	268
4	1		2483.	50	52.04	74.00	-21.96	53.81	-1.77	Peak	264	268
	_											

47.87

49.53

33.12

4.58

4.58

9.13

9.13

Average

Average

Peak

Peak

141

141

238

238

134

134

163

163

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 29 of 64

Report Version: Rev. 01

5

6

7

4874.00


52.45 54.00 -1.55

7311.00 52.32 74.00 -21.68 43.19

4874.00 54.11 74.00 -19.89

7311.00 42.25 54.00 -11.75



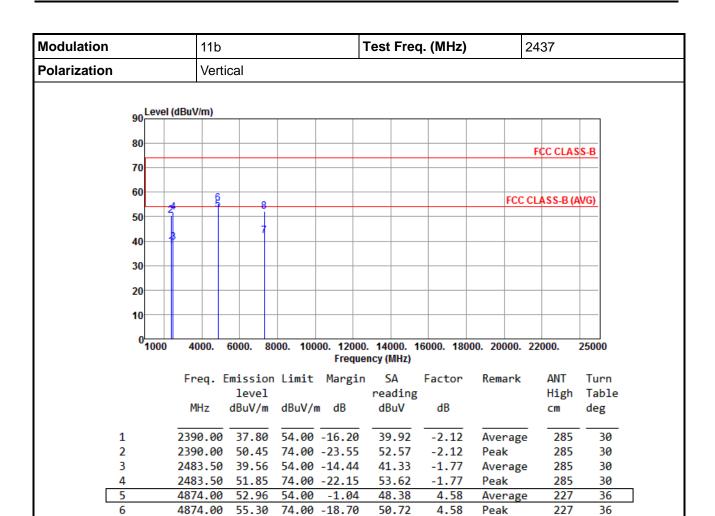

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 30 of 64

Report Version: Rev. 01

7

8

7311.00

42.14

7311.00 52.04 74.00 -21.96

54.00 -11.86

33.01

42.91

9.13

9.13

Average

Peak


242

242

115

115



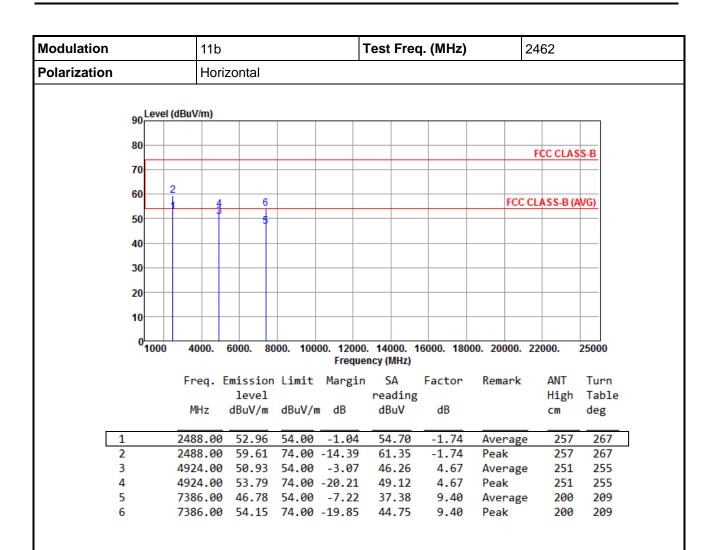

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 31 of 64



Modulation	11b	Test Freq. (MHz)	2462			
Polarization	Vertical					
90 Level (dBu	V/m)					

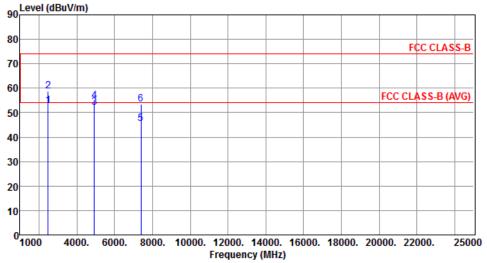

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2488.00	52.65	54.00	-1.35	54.39	-1.74	Average	279	31
2	2488.00	58.67	74.00	-15.33	60.41	-1.74	Peak	279	31
3	4924.00	52.25	54.00	-1.75	47.58	4.67	Average	223	38
4	4924.00	54.79	74.00	-19.21	50.12	4.67	Peak	223	38
5	7386.00	45.52	54.00	-8.48	36.12	9.40	Average	243	133
6	7386.00	53.59	74.00	-20.41	44.19	9.40	Peak	243	133


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 32 of 64



3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

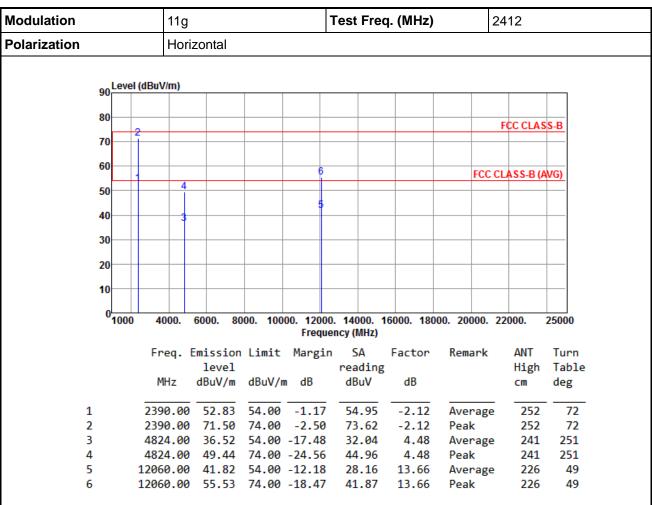

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 33 of 64



Modulation	odulation 11g			Test	Test Freq. (MHz)				2412			
Polarization		Vertical										
00	Level (dBu	V/m)										
90												

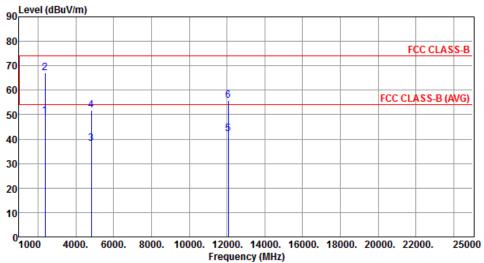


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	49.48	54.00	-4.52	51.60	-2.12	Average	286	109
2	2390.00	66.98	74.00	-7.02	69.10	-2.12	Peak	286	109
3	4824.00	38.19	54.00	-15.81	33.71	4.48	Average	205	3
4	4824.00	51.96	74.00	-22.04	47.48	4.48	Peak	205	3
5	12060.00	42.22	54.00	-11.78	28.56	13.66	Average	251	129
6	12060.00	55.63	74.00	-18.37	41.97	13.66	Peak	251	129

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 34 of 64



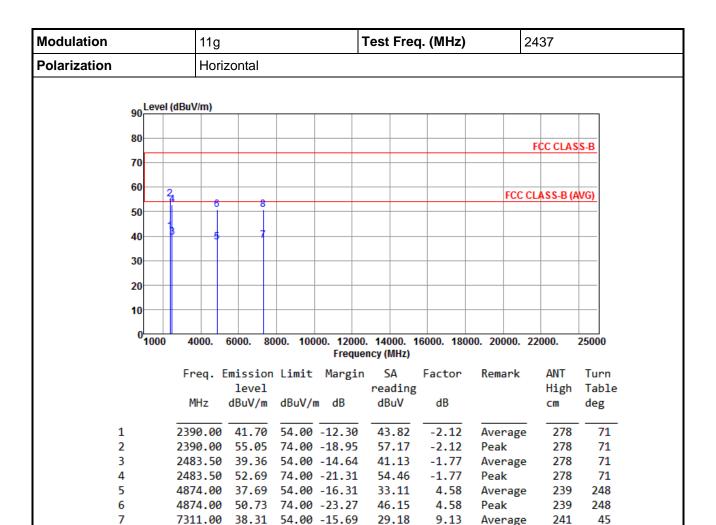

41.56

9.13

Peak

241

45

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

7311.00 50.69 74.00 -23.31

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Report No.: FR7O1102AC Page: 35 of 64

Report Version: Rev. 01

8



Modulation	11g	Test Freq. (MHz)	2437
Polarization	Vertical		
_ Level (dBu	//m)		

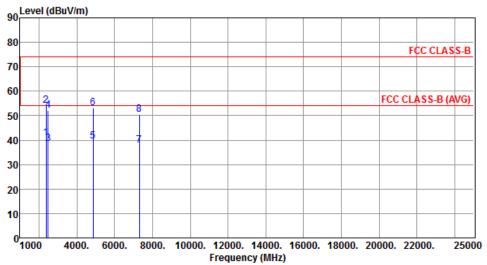


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	40.91	54.00	-13.09	43.03	-2.12	Average	288	110
2	2390.00	54.12	74.00	-19.88	56.24	-2.12	Peak	288	110
3	2483.50	38.44	54.00	-15.56	40.21	-1.77	Average	288	110
4	2483.50	52.03	74.00	-21.97	53.80	-1.77	Peak	288	110
5	4874.00	39.41	54.00	-14.59	34.83	4.58	Average	216	1
6	4874.00	53.17	74.00	-20.83	48.59	4.58	Peak	216	1
7	7311.00	38.02	54.00	-15.98	28.89	9.13	Average	269	81
8	7311.00	50.45	74.00	-23.55	41.32	9.13	Peak	269	81

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 36 of 64



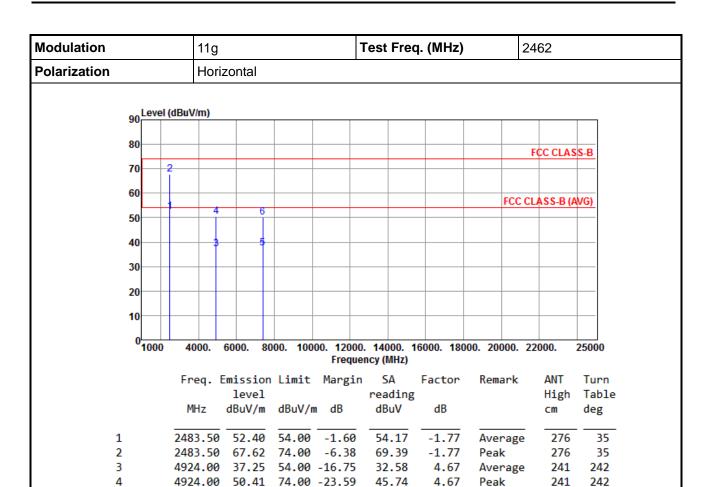

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 37 of 64

Report Version: Rev. 01

5

6

7386.00

37.54

7386.00 50.12 74.00 -23.88

54.00 -16.46

28.14

40.72

9.40

9.40

Average

Peak

245


245

46

46



Modulation	ation 11g			Test	Freq.	(MHz)	24	2462		
Polarization		Vertical								
an.	Level (dBu\	//m)								

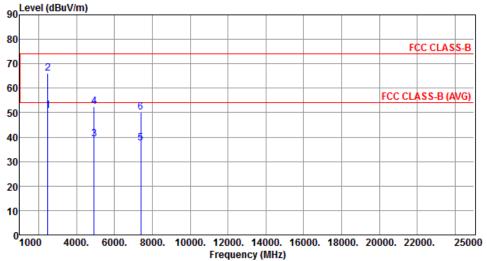


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2483.50	50.65	54.00	-3.35	52.42	-1.77	Average	288	108
2	2483.50	65.98	74.00	-8.02	67.75	-1.77	Peak	288	108
3	4924.00	39.15	54.00	-14.85	34.48	4.67	Average	216	6
4	4924.00	52.61	74.00	-21.39	47.94	4.67	Peak	216	6
5	7386.00	37.65	54.00	-16.35	28.25	9.40	Average	259	62
6	7386.00	50.11	74.00	-23.89	40.71	9.40	Peak	259	62

*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 38 of 64



3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

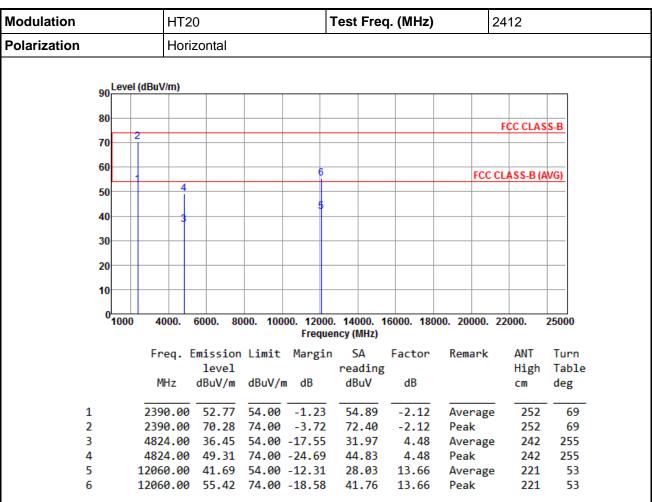

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 39 of 64



Modulation	HT20	Test Freq. (MHz)	2412
Polarization	Vertical		

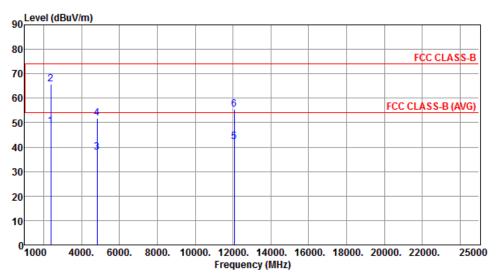


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	48.35	54.00	-5.65	50.47	-2.12	Average	281	112
2	2390.00	65.81	74.00	-8.19	67.93	-2.12	Peak	281	112
3	4824.00	38.02	54.00	-15.98	33.54	4.48	Average	210	11
4	4824.00	51.79	74.00	-22.21	47.31	4.48	Peak	210	11
5	12060.00	42.13	54.00	-11.87	28.47	13.66	Average	248	112
6	12060.00	55.49	74.00	-18.51	41.83	13.66	Peak	248	112

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 40 of 64



Modulation	HT20	Test Freq. (MHz)	2437
Polarization	Horizontal		

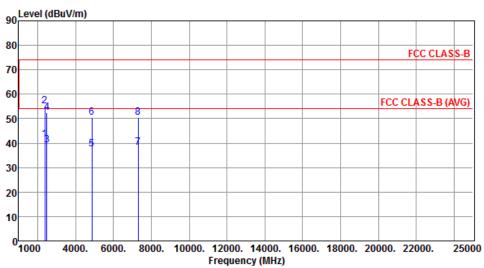


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	41.52	54.00	-12.48	43.64	-2.12	Average	275	68
2	2390.00	54.98	74.00	-19.02	57.10	-2.12	Peak	275	68
3	2483.50	39.24	54.00	-14.76	41.01	-1.77	Average	275	68
4	2483.50	52.51	74.00	-21.49	54.28	-1.77	Peak	275	68
5	4874.00	37.52	54.00	-16.48	32.94	4.58	Average	242	253
6	4874.00	50.61	74.00	-23.39	46.03	4.58	Peak	242	253
7	7311.00	38.25	54.00	-15.75	29.12	9.13	Average	243	51
8	7311.00	50.61	74.00	-23.39	41.48	9.13	Peak	243	51

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 41 of 64



Modulation	HT20	Test Freq. (MHz)	2437
Polarization	Vertical		

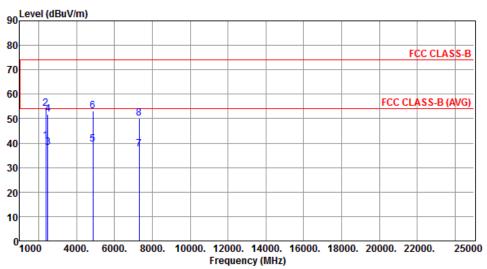

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	40.85	54.00	-13.15	42.97	-2.12	Average	289	108
2	2390.00	54.03	74.00	-19.97	56.15	-2.12	Peak	289	108
3	2483.50	38.29	54.00	-15.71	40.06	-1.77	Average	289	108
4	2483.50	51.96	74.00	-22.04	53.73	-1.77	Peak	289	108
5	4874.00	39.46	54.00	-14.54	34.88	4.58	Average	222	15
6	4874.00	53.22	74.00	-20.78	48.64	4.58	Peak	222	15
7	7311.00	37.69	54.00	-16.31	28.56	9.13	Average	265	54
8	7311.00	50.13	74.00	-23.87	41.00	9.13	Peak	265	54

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 42 of 64



odulation			HT	20				T	est F	req.	(MHz)	24	2462		
olarization			Hor	izonta	al			•								
			1													
	90 ^L	evel (dBu	V/m)													
	80													CC CLAS	SS-B	
	70	2													\vdash	
	60						-								<u> </u>	
	50	1	4		6								FCC CI	ASS-B (A	WG)	
	50															
	40		+		-5										_	
	30														-	
	20															
	10															
	01	000 4	4000.	6000.	800	00 10	000 1	2000	14000	160	00 18	000 2	20000. 2	2000	2500	
			+000.	0000.	000	70. 10		equen			00. 10		20000. 2		2300	


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2483.50	52.92	54.00	-1.08	54.69	-1.77	Average	275	64
2	2483.50	67.81	74.00	-6.19	69.58	-1.77	Peak	275	64
3	4924.00	37.12	54.00	-16.88	32.45	4.67	Average	243	238
4	4924.00	50.26	74.00	-23.74	45.59	4.67	Peak	243	238
5	7386.00	37.41	54.00	-16.59	28.01	9.40	Average	242	53
6	7386.00	49.85	74.00	-24.15	40.45	9.40	Peak	242	53

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 43 of 64



	Test Freq. (MHz)	2462
Polarization Vertical		

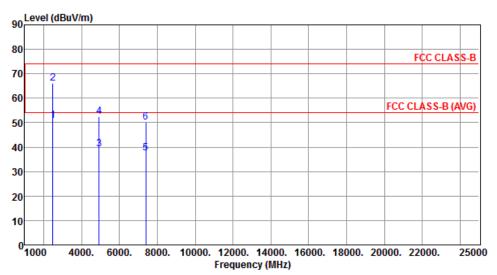


		Emission level		Ū	SA reading		Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2483.50	50.92	54.00	2 00	F2 60	1 77	A	285	106
1	2403.30	30.92	54.00	-3.08	52.69	-1.77	Average	200	100
2	2483.50	66.14	74.00	-7.86	67.91	-1.77	Peak	285	106
3	4924.00	39.06	54.00	-14.94	34.39	4.67	Average	215	12
4	4924.00	52.54	74.00	-21.46	47.87	4.67	Peak	215	12
5	7386.00	37.48	54.00	-16.52	28.08	9.40	Average	255	59
6	7386.00	50.06	74.00	-23.94	40.66	9.40	Peak	255	59

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 44 of 64



3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

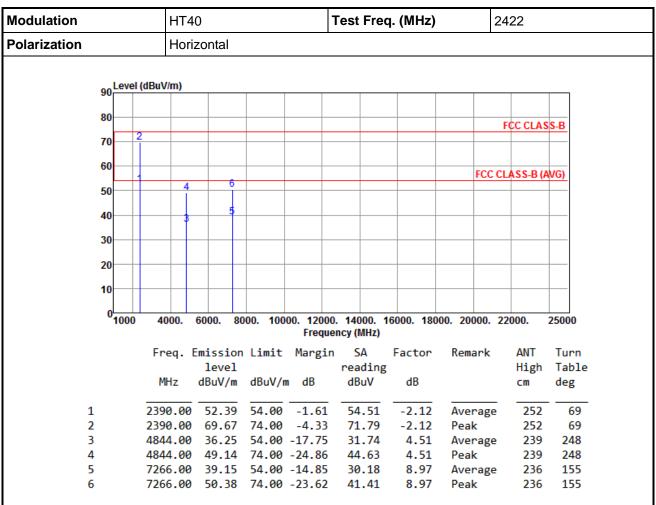

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 45 of 64



Modulation	HT40	Test Freq. (MHz)	2422
Polarization	Vertical		

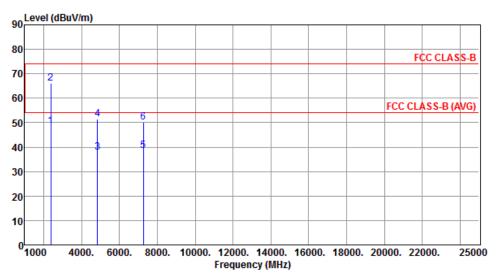

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High	Turn Table
	МПZ	ubuv/III	ubuv/III	ub	ubuv	ub		CM	deg
1	2390.00	48.56	54.00	-5.44	50.68	-2.12	Average	278	106
2	2390.00	66.13	74.00	-7.87	68.25	-2.12	Peak	278	106
3	4844.00	37.96	54.00	-16.04	33.45	4.51	Average	205	14
4	4844.00	51.62	74.00	-22.38	47.11	4.51	Peak	205	14
5	7266.00	38.51	54.00	-15.49	29.54	8.97	Average	208	35
6	7266.00	50.06	74.00	-23.94	41.09	8.97	Peak	208	35

*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 46 of 64



Modulation Polarization			HT	HT40			Test Freq. (MHz)			2437		
			Но	Horizontal								
	90 ^L	evel ((dBuV/m)									
	80										FCC CLAS	S-B
	70	2										
	60	l f	1									
	00	-								FCC	CLASS-B (A	(VG)
	50		В 6)	8							
	40				+							
	40											
	30				-							
	20											
	20											
	10				+							
	0											
	-1	000	4000.	6000.	80	00. 100		0. 14000. 1 ency (MHz)	16000. 180	00. 20000.	22000.	25000
			Frea.	Emissi	on	Limit	Margi	n SA	Factor	Remark	ANT	Turn
				leve				reading			High	Table
			MHz	dBuV/	m	dBuV/ı	n dB	dBuV	dB		cm	deg
					_							
1			2390.00				-1.55		-2.12	Average		61
2			2390.00			74.00	-7.51 -4.01		-2.12 -1.77	Peak	279 274	61 60
4							-4.01		-1.77	Average Peak	274	60
-			2405.5		_	74.00	10.75	04.50	-1.//	Cak	2,4	

32.84

28.99

45.98

4.58

4.58

9.13

9.13

Average

Average

Peak

Peak

245

245

246

246

251

251

55

55

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 47 of 64

Report Version: Rev. 01

5

6

7

4874.00

37.42 54.00 -16.58


7311.00 50.43 74.00 -23.57 41.30

4874.00 50.56 74.00 -23.44

7311.00 38.12 54.00 -15.88



Modulation	HT40	Test Freq. (MHz)	2437
Polarization	Vertical		

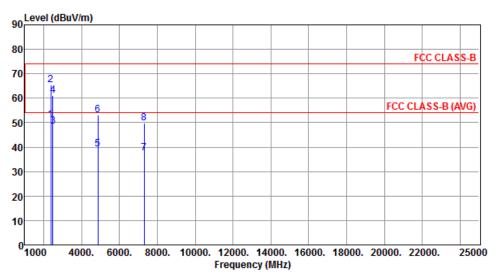


	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
		level			reading			High	Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	51.26	54.00	-2.74	53.38	-2.12	Average	286	110
2	2390.00	65.31	74.00	-8.69	67.43	-2.12	Peak	286	110
3	2483.50	48.52	54.00	-5.48	50.29	-1.77	Average	286	110
4	2483.50	61.05	74.00	-12.95	62.82	-1.77	Peak	286	110
5	4874.00	39.23	54.00	-14.77	34.65	4.58	Average	219	15
6	4874.00	53.04	74.00	-20.96	48.46	4.58	Peak	219	15
7	7311.00	37.42	54.00	-16.58	28.29	9.13	Average	253	61
8	7311.00	49.83	74.00	-24.17	40.70	9.13	Peak	253	61

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 48 of 64



Modulation	HT40	Test Freq. (MHz)	2452
Polarization	Horizontal		

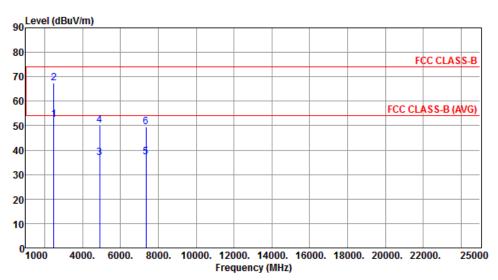


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2483.50	52.54	54.00	-1.46	54.31	-1.77	Average	267	61
2	2483.50	67.39	74.00	-6.61	69.16	-1.77	Peak	267	61
3	4904.00	36.95	54.00	-17.05	32.32	4.63	Average	241	233
4	4904.00	50.19	74.00	-23.81	45.56	4.63	Peak	241	233
5	7356.00	37.15	54.00	-16.85	27.86	9.29	Average	246	55
6	7356.00	49.62	74.00	-24.38	40.33	9.29	Peak	246	55

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 49 of 64



Modulation	HT40	Test Freq. (MHz)	2452
Polarization	Vertical		

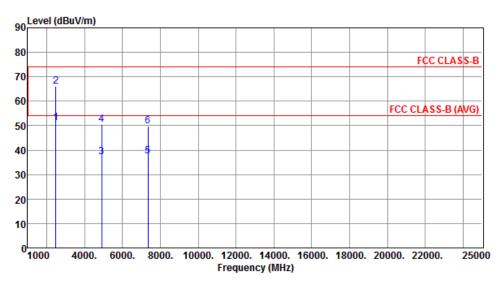

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2483.50	51.22	54.00	-2.78	52.99	-1.77	Average	286	101
2	2483.50	66.08	74.00	-7.92	67.85	-1.77	Peak	286	101
3	4904.00	37.22	54.00	-16.78	32.59	4.63	Average	206	23
4	4904.00	50.45	74.00	-23.55	45.82	4.63	Peak	206	23
5	7356.00	37.42	54.00	-16.58	28.13	9.29	Average	263	74
6	7356.00	49.92	74.00	-24.08	40.63	9.29	Peak	263	74

*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR7O1102AC Page: 50 of 64



3.6 Emissions in Non-Restricted Frequency Bands

3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures


Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level

3.6.4 Test Setup

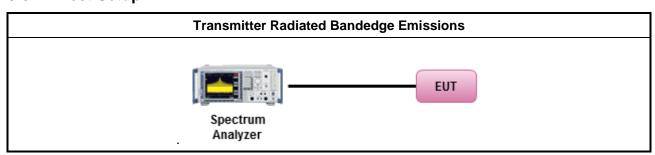

3.6.5 Test Result of Emissions in non-restricted frequency bands


This test item is performed on each TX output individually without summing or adding 10 $log(N_{ANT})$ since measurements are made relative to the in-band emissions on the individual outputs. Only worst test result of each operating mode is presented.

Report No.: FR7O1102AC Page: 51 of 64




3.6.6 Unwanted Emissions into Non-Restricted Frequency Bands

802.11b

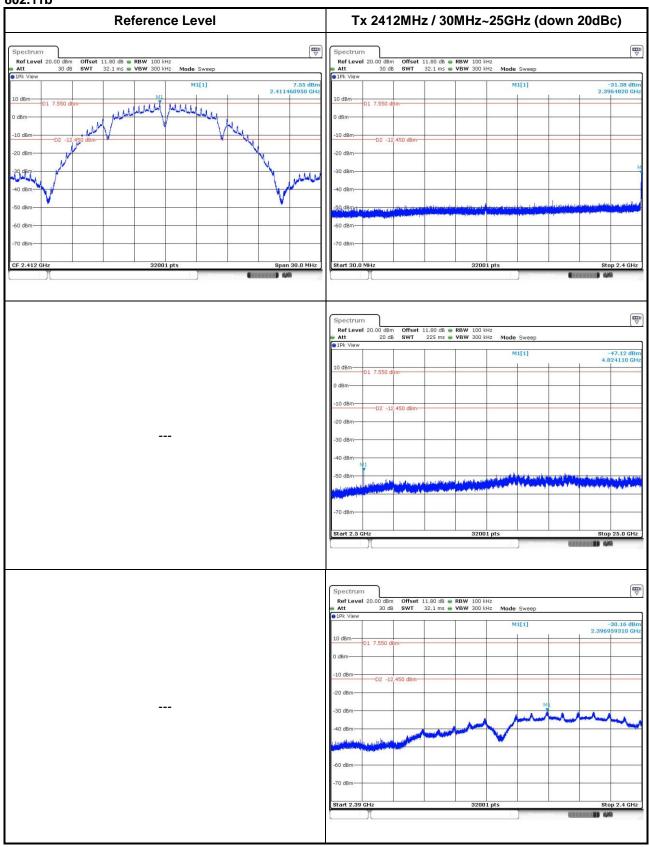


Report No.: FR7O1102AC Report Version: Rev. 01



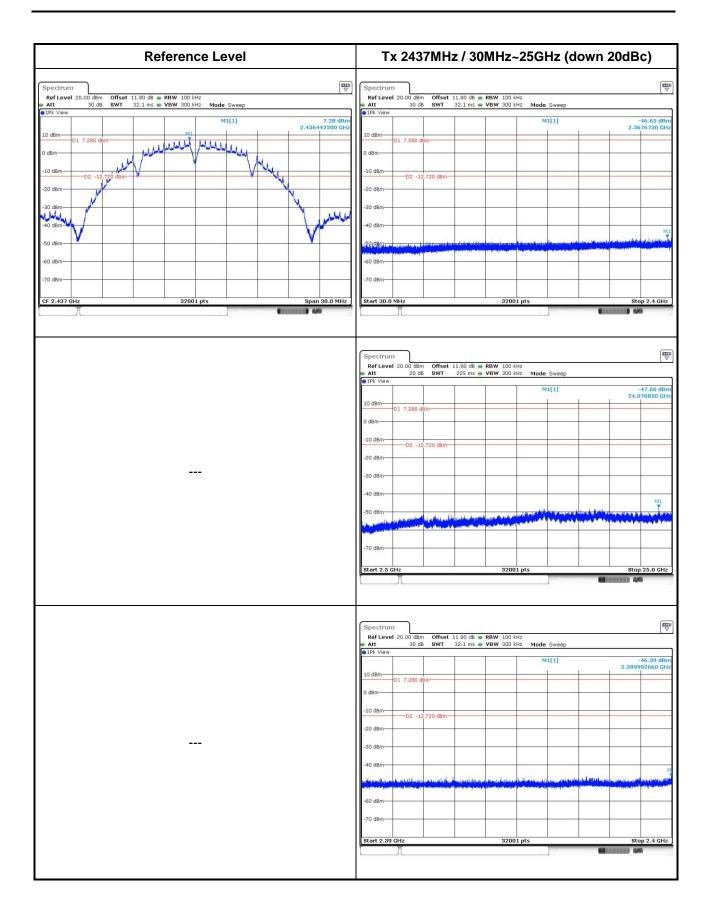


Report No.: FR7O1102AC Page: 53 of 64



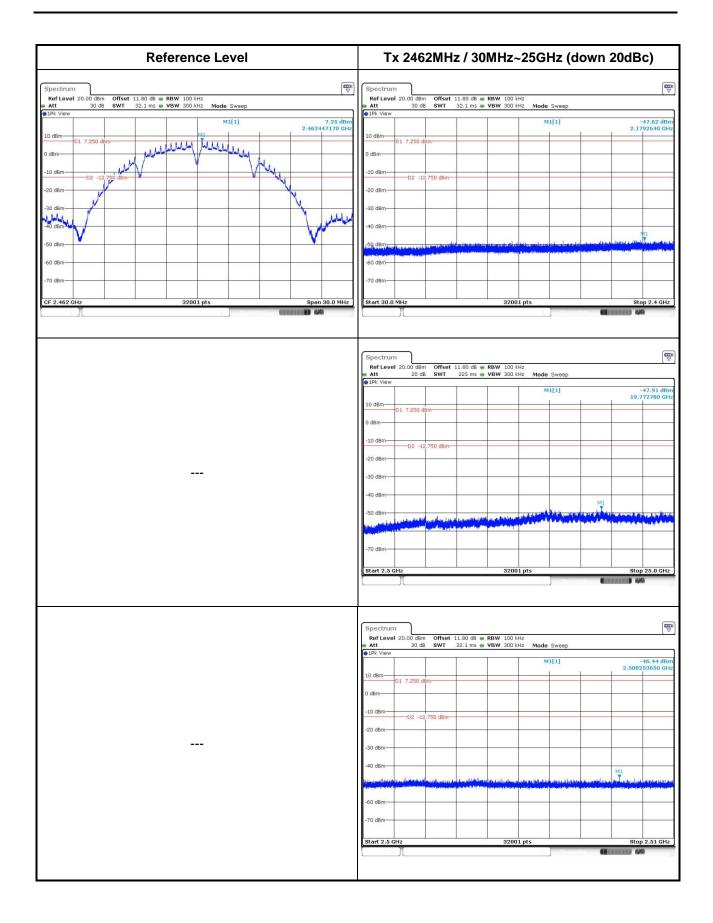


Report No.: FR7O1102AC Page: 54 of 64



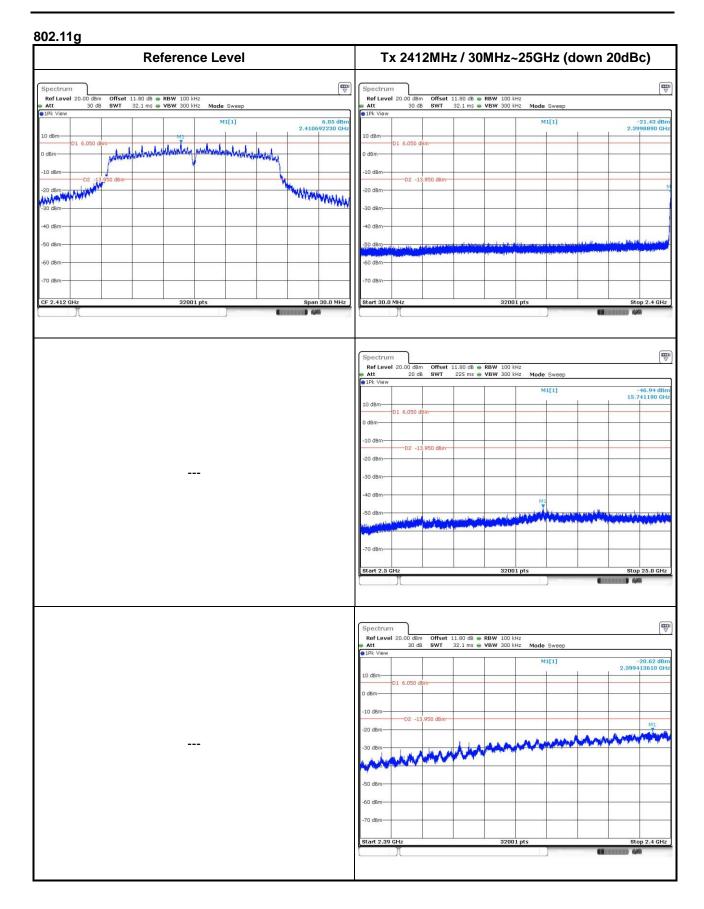


Report No.: FR7O1102AC Page: 55 of 64



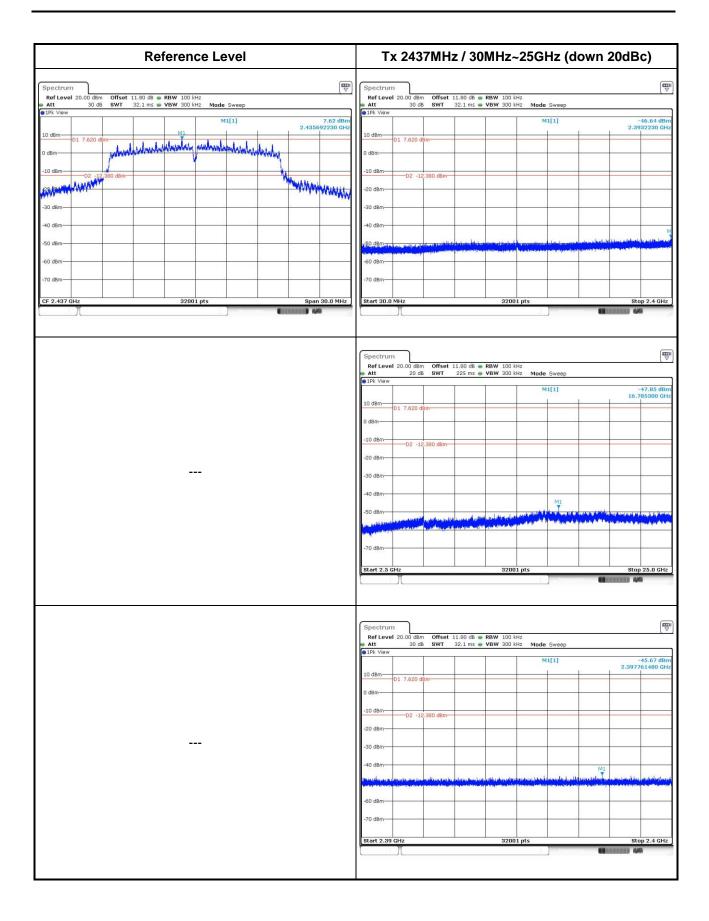

Report No.: FR7O1102AC Page: 56 of 64




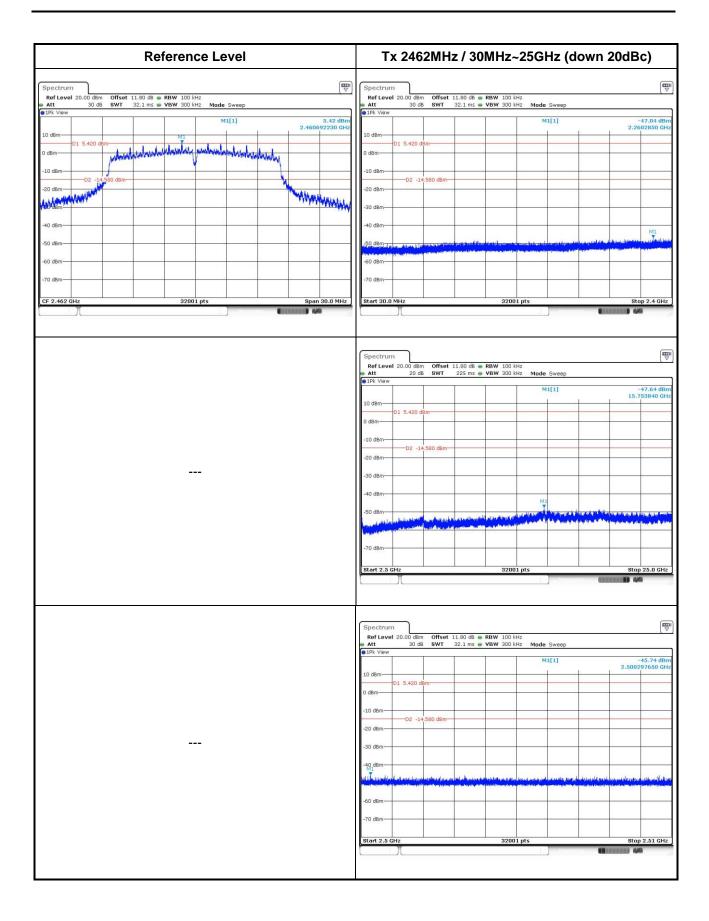

Report No.: FR7O1102AC Page: 57 of 64




802.11n HT20

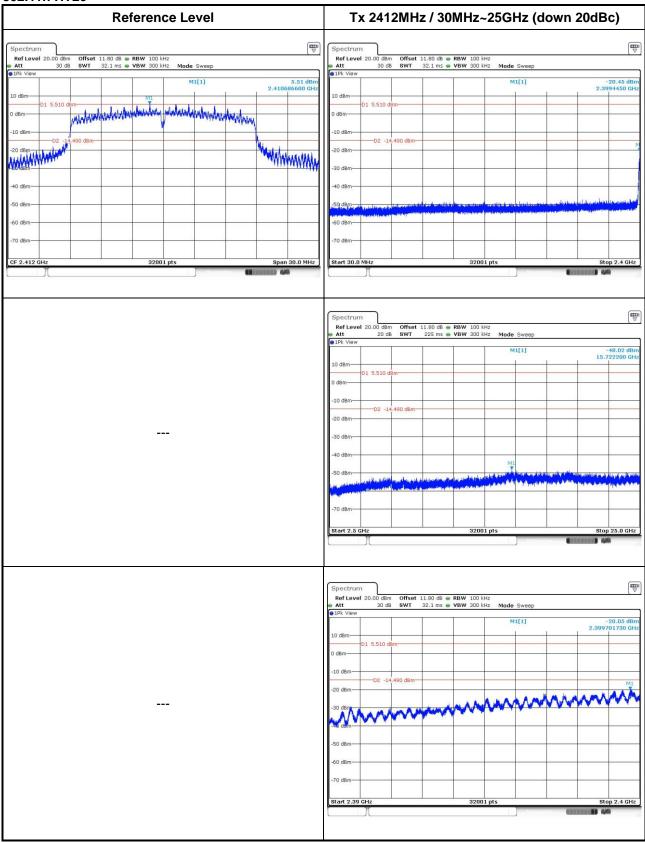


Report No.: FR7O1102AC Page: 58 of 64



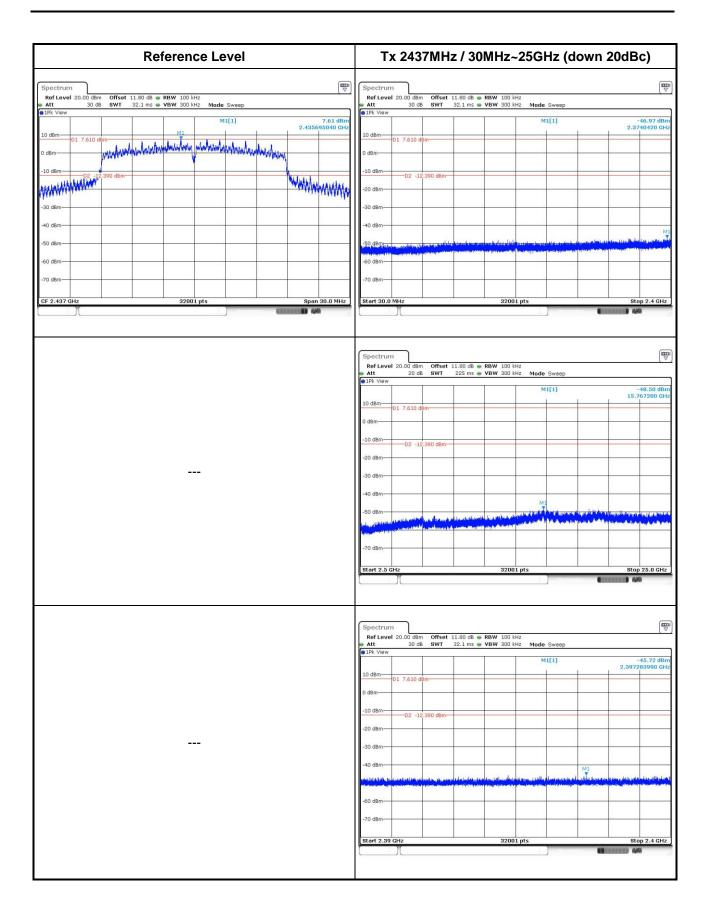

Report No.: FR7O1102AC Page: 59 of 64




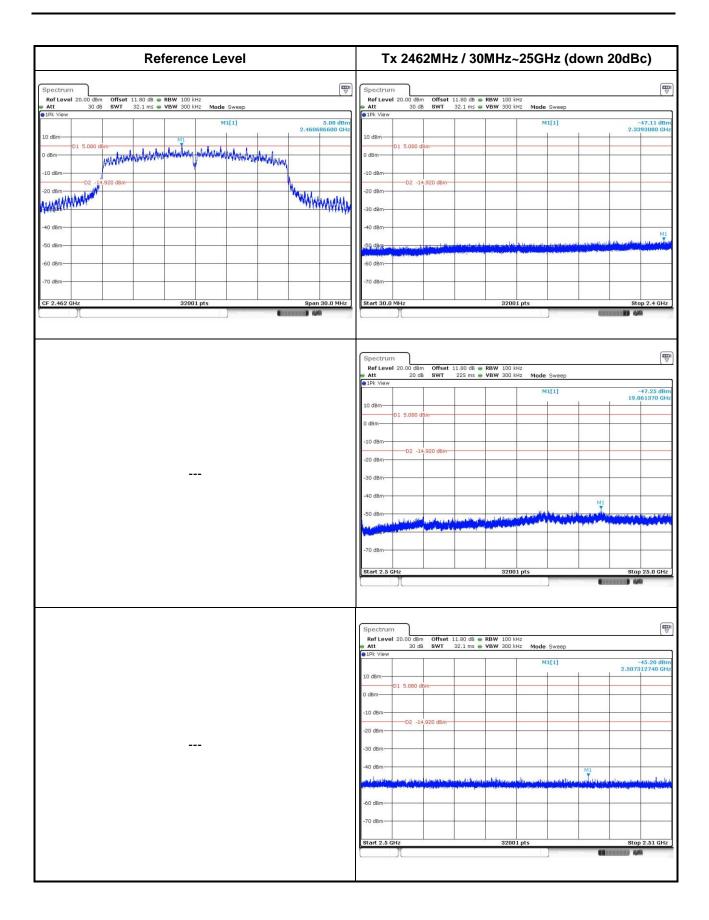

Report No.: FR7O1102AC Page: 60 of 64




802.11n HT40

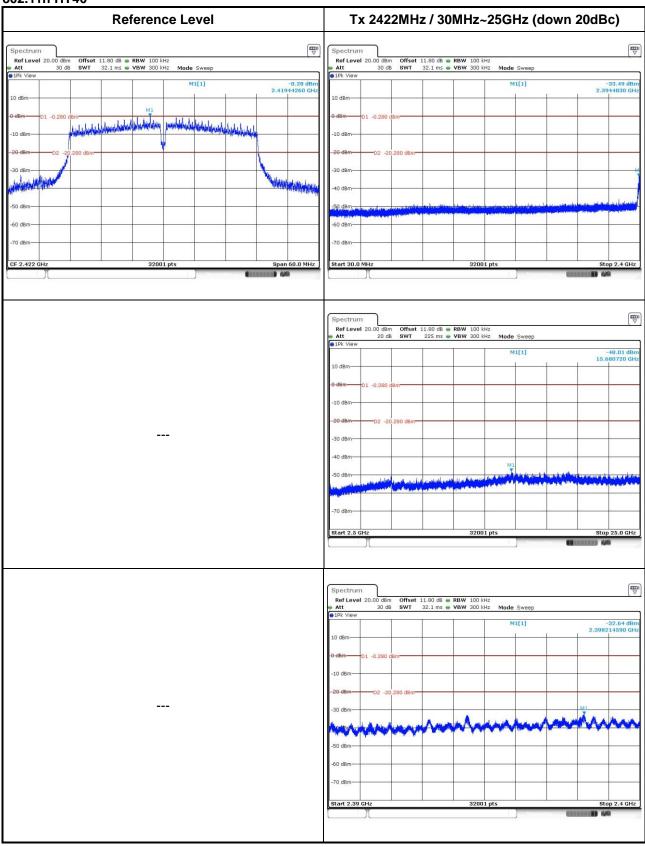

Report No.: FR7O1102AC


Page: 61 of 64



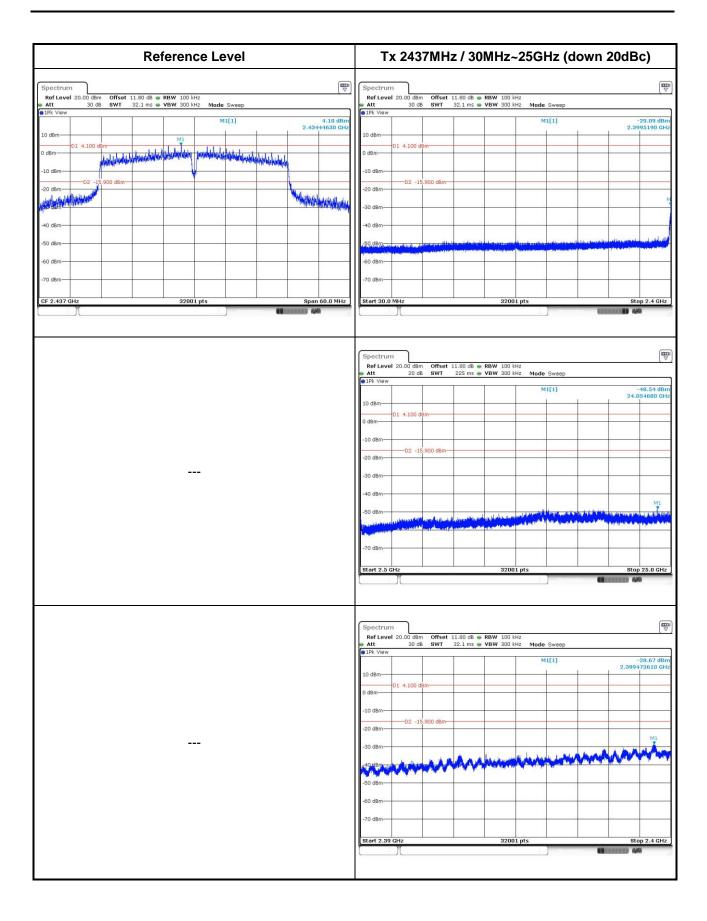

Report No.: FR7O1102AC Page: 62 of 64



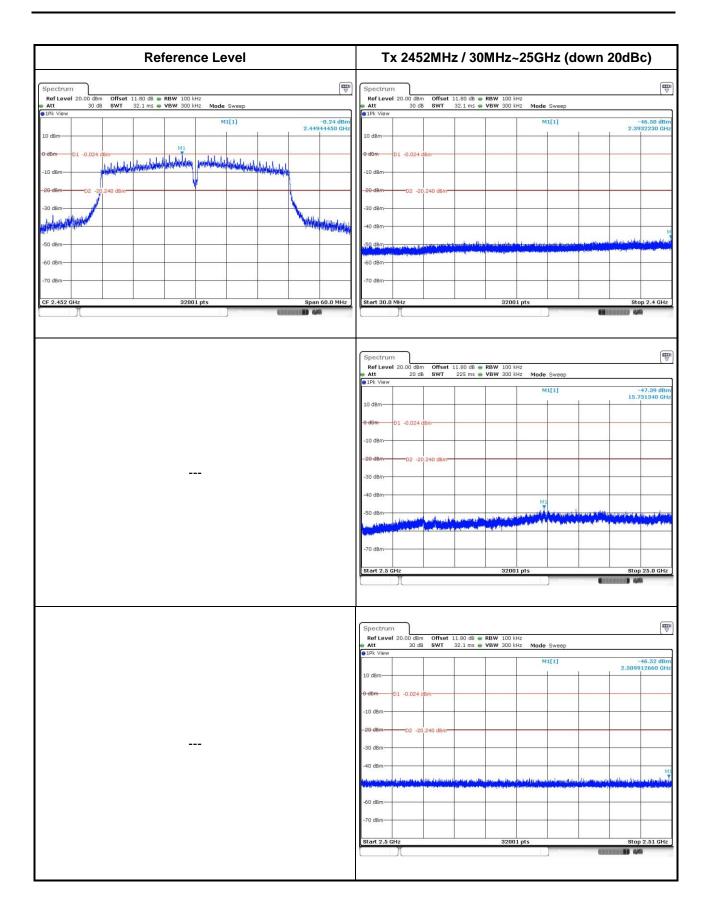

Report No.: FR7O1102AC

Page: 63 of 64



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website http://www.icertifi.com.tw.

Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City,

Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

<u>==END</u>==

Report No.: FR7O1102AC Page: 64 of 64