


FCC TEST REPORT

Report No.: NTC-ER2412045

Applicant's name.....: Huizhou MOSITOECO intelligence Lighting Technology
Co., Ltd

Address.....: C block 2 floor , No.10 East Hechang No.5
Road,Zhongkai Hi-tech industrial Development
Park,Huizhou ,Guangdong,China

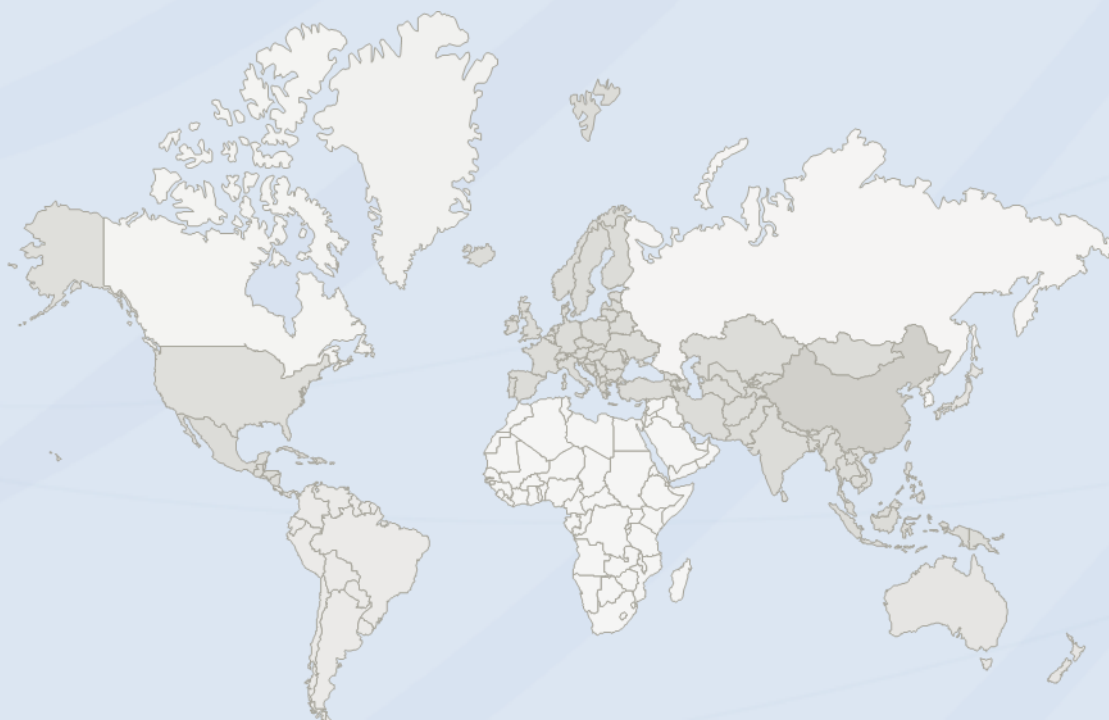

DONGGUAN NEW TESTING CENTRE CO., LTD

©Address: 3F, No. 1 the 1st North Industry Road, Songshan Lake Science & Technology Park, Dongguan, Guangdong, China, 523808

☎Tel: +86-769-22212079

🌐Web: <http://www.ntc-cert.com>

✉E-mail: dave@ntc-cert.com

TABLE OF CONTENTS

1. SUMMARY OF TEST RESULTS	3
2. GENERAL TEST INFORMATION	3
3. POWER LINE CONDUCTED EMISSION TEST	6
4. RADIATED EMISSION TEST	10
5. OUTPUT POWER	26
6. -6DB BANDWIDTH	32
7. BAND EDGES MEASUREMENT	38
8. CONDUCTED SPURIOUS EMISSION	46
9. CONDUCTED OUTPUT POWER SPECTRAL DENSITY	64
10. ANTENNA REQUIREMENT	70
11. TEST SETUP PHOTOGRAPH	71
12. PHOTOS OF THE EUT.....	73

TEST REPORT DECLARE

FCC ID	:	2AU7R-PAK41736M
Equipment under Test	:	Ceiling light
Model /Type	:	PAK41736M
Listed Models	:	PAK41736M
Trade Mark	:	N/A
Applicant	:	Huizhou MOSITOECO intelligence Lighting Technology Co., Ltd
Address	:	C block 2 floor , No.10 East Hechang No.5 Road,Zhongkai Hi-tech industrial Development Park,Huizhou ,Guangdong,China
Manufacturer	:	Huizhou MOSITOECO intelligence Lighting Technology Co., Ltd
Address	:	C block 2 floor , No.10 East Hechang No.5 Road,Zhongkai Hi-tech industrial Development Park,Huizhou ,Guangdong,China
Test Laboratory	:	Dongguan New Testing Centre Co., Ltd
Address	:	1F & 3F, No. 1 the 1st North Industry Road Songshan Lake Science & Technology Park Dongguan, People' s Republic of China 523808

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C: 15.247, ANSI C63.10:2020.

We Declare:

The equipment described above is tested by Dongguan New Testing Centre Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan New Testing Centre Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No.:	NTC-ER2412045		
Date of Test:	Jan.10,2025 to Jan.13,2025	Date of Report.:	Feb.14,2025

Prepared By:

Taylor Chen

Taylor Chen/Engineer

Approved By:



Dave Gao/LAB Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan New Testing Centre Co., Ltd

1. Summary of test results

Description of Test Item	Standard	Results
Antenna Requirement	Section 15.247(c)	PASS
Conduction Emissions	Section 15.207(a)	PASS
Radiated Emissions	Section 15.247(d)	PASS
Maximum Conducted Output Power	Section 15.247(b)	PASS
Band Edge Emissions	Section 15.247(d)	PASS
Power Spectral Density	Section 15.247(e)	PASS
6dB Bandwidth	Section 15.247(a)(2)	PASS
RF Exposure	Section 15.247(i)	PASS

2. General test information

Description of EUT

EUT* Name	:	Ceiling light
Test model	:	PAK41736M
EUT function description	:	Please reference user manual of this device
Power supply	:	120V,60Hz
Supported type:	:	802.11b/802.11g/802.11n(H20)
Modulation Technology:	:	802.11b: DSSS 802.11g/n: OFDM
Transmit Data Rate:	:	802.11b :1/2/5.5/11 Mbps 802.11g :6/9/12/18/24/36/48/54 Mbps 802.11n(HT20): 7.2/14.4/21.7/28.9/43.3/57.8/65/72.2 Mbps
Channel Separation:	:	5 MHz
Antenna Type	:	PCB Antenna
Gain:	:	Max 2.21dBi
Hardware Version:	:	V1.0
Software Version:	:	V1.0

Note: 1, EUT is the ab. of equipment under test.

Frequency list:

1. Test frequencies are lowest channel: 2412 MHz, middle channel: 2437 MHz and highest channel: 2462 MHz for 802.11b/g/n(HT20)

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

Description of test modes

No.	TEST Mode DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	Keeping TX mode
Note: Transmit by 802.11b with Data rate (1/2/5.5/11) Transmit by 802.11g with Data rate (6/9/12/18/24/36/48/54) Transmit by 802.11n (20MHz) with Data rate (6.5/13/19.5/26/39/52/58.5/65)	

Note:

- 1.The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the EUT is operating at its maximum duty cycle>or equal 98%
2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.
3. For Radiated Emission, 3 axis were chosen for testing for each applicable mode.

2.1. Detail models


Model	Rating	Note
PAK41736M	AC 120V,60Hz	/

2.2. Test Peripheral List

No.	Equipment	Manufacturer	Model No.	Serial No.	Note
1	Notebook	Lenovo	ThinkPadE450	PF-0LRXDH	--

2.3. Block diagram EUT configuration for test

For EUT Tx mode:



2.4. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-24°C
Humidity range:	40-75%
Pressure range:	86-106kPa

2.5. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	3.20 dB
Uncertainty for Radiation Emission test (30MHz – 1GHz)	4.60 dB (Polarize: V)
	4.60 dB (Polarize: H)
Uncertainty for Radiation Emission test (1GHz – 18GHz)	4.82 dB (Polarize: V)
	4.52 dB (Polarize: H)
Bandwidth	±1.2%
Stop Transmitting Time Test	±0.5%
Uncertainty for frequency error	5.8 x 10-8


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. Power Line Conducted Emission Test

3.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	R&S	ESPI	100146	2024-05-14	1 Year
2	LISN	R&S	ENV216	3650.6550.06	2024-05-14	1 Year
3	LISN	R&S	ENV4200	1107.2387.04	2024-05-14	1 Year
4	RF Cable	HUBER	SUCOFLEX100	30722/4E	2023-05-22	2 Year
5	MEASUREMENT SOFTWARE	FARAD	EZ-EMC(VER:1.1.4.2)	N/A	N/A	N/A

3.2. BLOCK DIAGRAM OF TEST SETUP

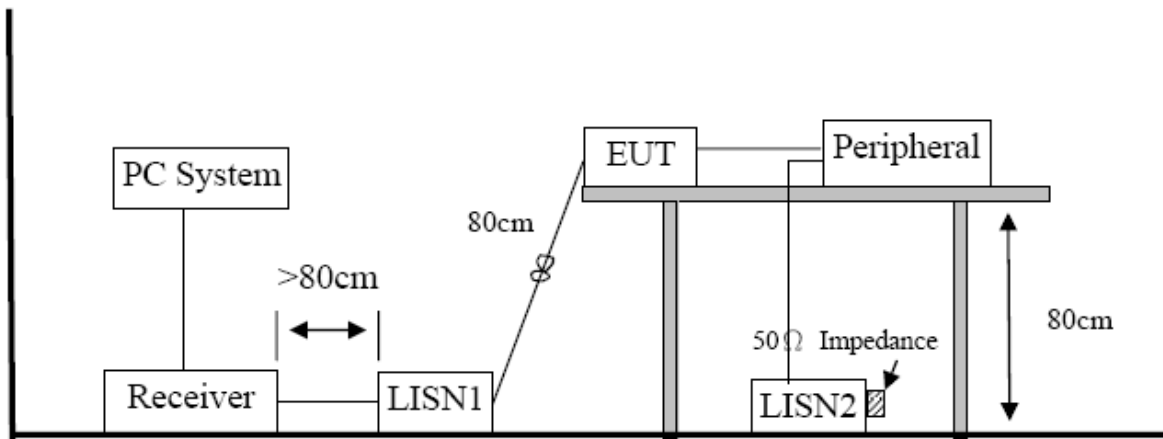

3.3. Power Line Conducted Emission Limits (Class B)

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

3.4. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.3 and test equipment as described in clause 3.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10. All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.3 were scanned during the preliminary test. After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded. The bandwidth of test receiver is set at 9 KHz.

3.5. Test Result


PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "-----" means Peak detection; "-----" means Average detection


Note3: Measurement = Reading Level + Factor, Margin= Measurement-Limit

Conducted Emission Test Result

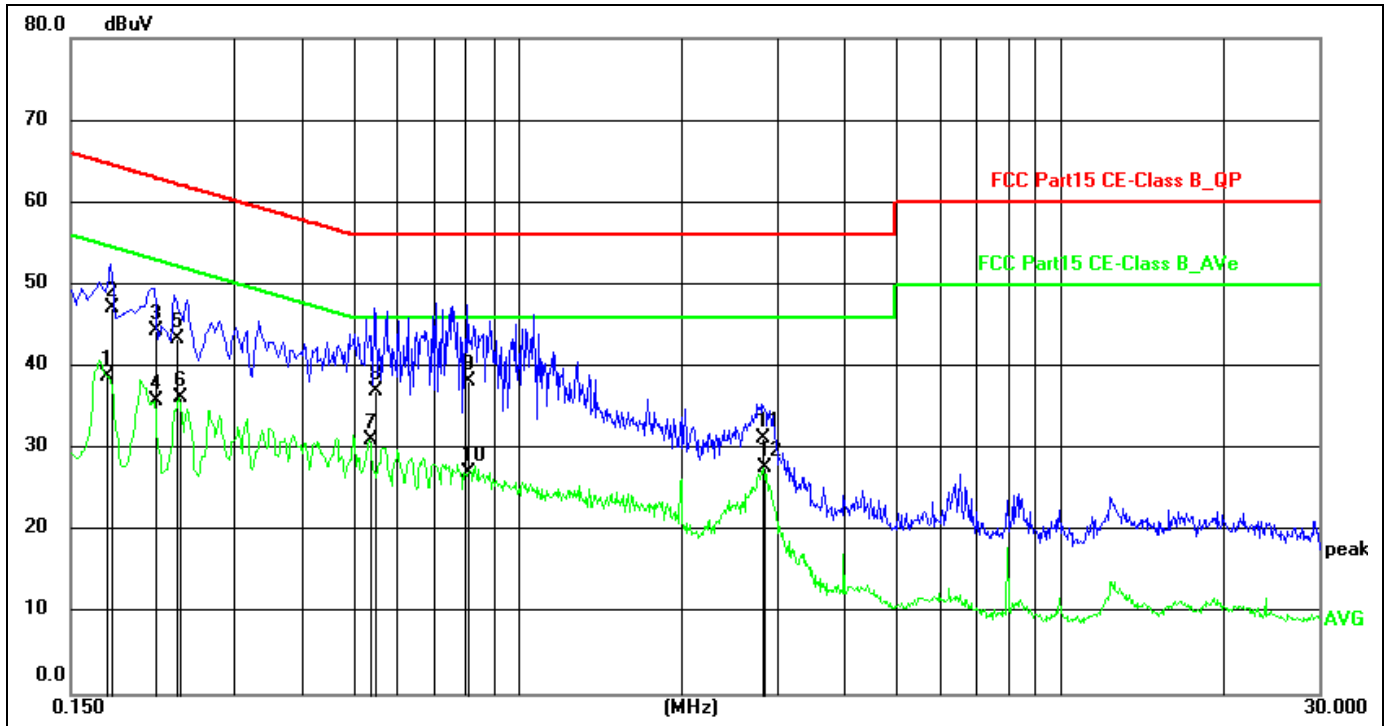

Site:	844LAB	Phase:L1	Temperature(C):24(C)
Limit:	FCC Part15 CE-Class B_QP		Humidity(%):63%
EUT:	LED Ceiling Light	Test Time:	2025/1/14 10:50:10
M/N.:	PAK41736M	Power Rating:	AC120V/60Hz
Mode:	Lighting	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Margin (dB)	Detector	Comment
1	0.1749	28.40	10.48	38.88	54.72	-15.84	AVG	
2	0.1780	36.66	10.49	47.15	64.58	-17.43	QP	
3	0.2140	33.95	10.50	44.45	63.05	-18.60	QP	
4	0.2140	25.30	10.50	35.80	53.05	-17.25	AVG	
5	0.2341	32.88	10.50	43.38	62.30	-18.92	QP	
6	0.2380	25.79	10.50	36.29	52.17	-15.88	AVG	
7 *	0.5340	20.57	10.54	31.11	46.00	-14.89	AVG	
8	0.5460	26.41	10.54	36.95	56.00	-19.05	QP	
9	0.8100	27.62	10.54	38.16	56.00	-17.84	QP	
10	0.8105	16.62	10.54	27.16	46.00	-18.84	AVG	
11	2.8300	20.59	10.59	31.18	56.00	-24.82	QP	
12	2.8420	17.07	10.59	27.66	46.00	-18.34	AVG	

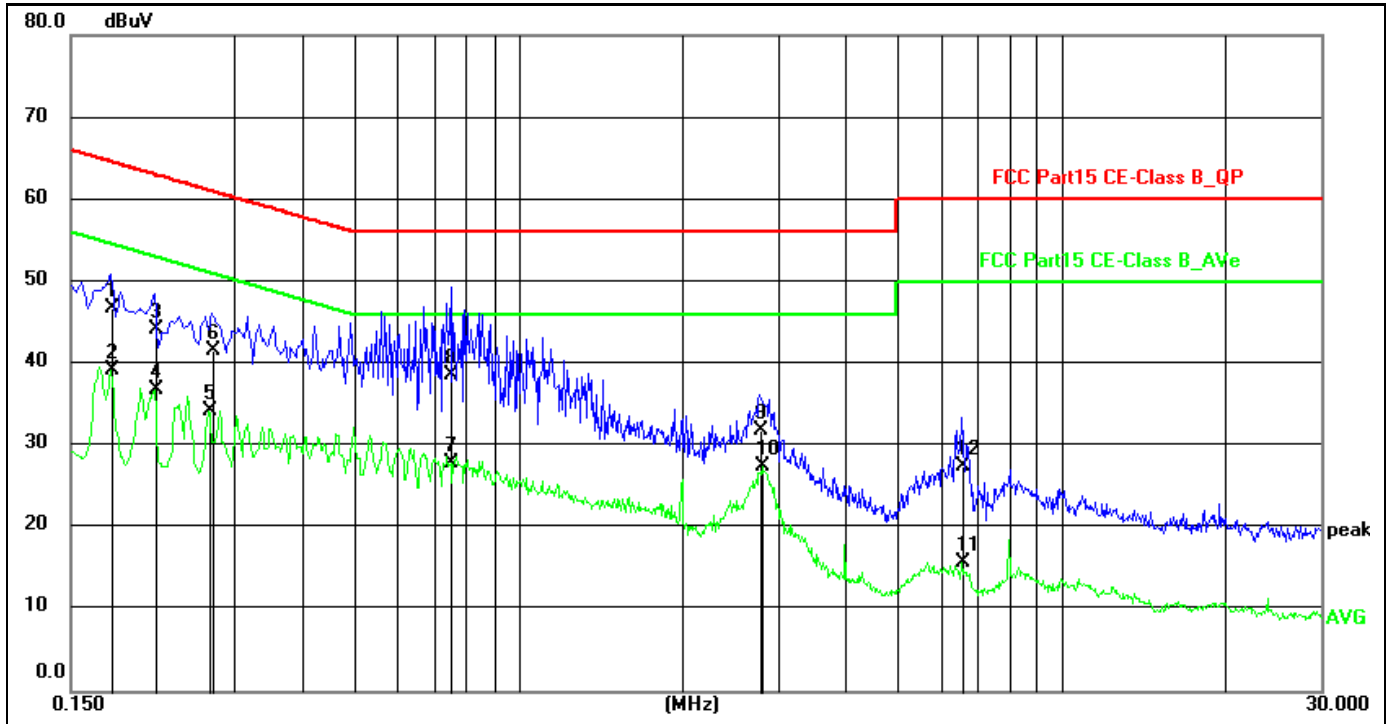

Site:	844LAB	Phase:	N	Temperature(C):	24(C)
Limit:	FCC Part15 CE-Class B_QP	Test Time:	2025/1/14 10:54:09	Humidity(%):	63%
EUT:	LED Ceiling Light	Power Rating:	AC120V/60Hz		
M/N.:	PAK41736M	Test Engineer:			
Mode:	Lighting				
Note:					

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Margin (dB)	Detector	Comment
1	0.1780	36.30	10.47	46.77	64.58	-17.81	QP	
2 *	0.1780	28.76	10.47	39.23	54.58	-15.35	AVG	
3	0.2140	33.62	10.48	44.10	63.05	-18.95	QP	
4	0.2140	26.31	10.48	36.79	53.05	-16.26	AVG	
5	0.2700	23.65	10.50	34.15	51.12	-16.97	AVG	
6	0.2740	31.09	10.50	41.59	61.00	-19.41	QP	
7	0.7518	17.38	10.50	27.88	46.00	-18.12	AVG	
8	0.7539	28.08	10.50	38.58	56.00	-17.42	QP	
9	2.7900	21.30	10.54	31.84	56.00	-24.16	QP	
10	2.8179	17.01	10.54	27.55	46.00	-18.45	AVG	
11	6.5579	5.20	10.56	15.76	50.00	-34.24	AVG	
12	6.5580	16.92	10.56	27.48	60.00	-32.52	QP	


4. Radiated emission test

4.1. Test equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	EMI Test Receiver	R&S	ESR26	7250-30406 7528	2024-05-14	1 Year
2	Trilog Broadband Antenna	Schwarzbeck	VULB9168	00969	2023-05-22	2 Year
3	Pre-amplifier	R&S	8449B	3113A04553	2024-05-14	1 Year
4	Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	2024-05-14	1 Year
5	Horn antenna	Schwarzbeck	BBHA9120D	453	2023-05-19	2 Year
6	Double Ridged Horn Antenna	A.H. System	SAS-574	584	2024-05-14	1 Year
7	Pre-amplifier	R&S	SCU18	105326	2024-05-14	1 Year
8	RF Cable	GORE	OSQ01Q010 78.7	SN1545847 3	2024-05-14	1 Year
9	RF Cable	GORE	OSQ01Q010 78.7	SN1545847 4	2024-05-14	1 Year
10	RF Cable	ESCO	ETS-LINGR EN	RFC-SMS-1 00-SMS-340 -IN	2024-05-14	1 Year
11	Measurement software	Farad	EZ-EMC(VE R:1.1.4.2)	N/A	N/A	N/A

4.2. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9KHz to 30MHz:

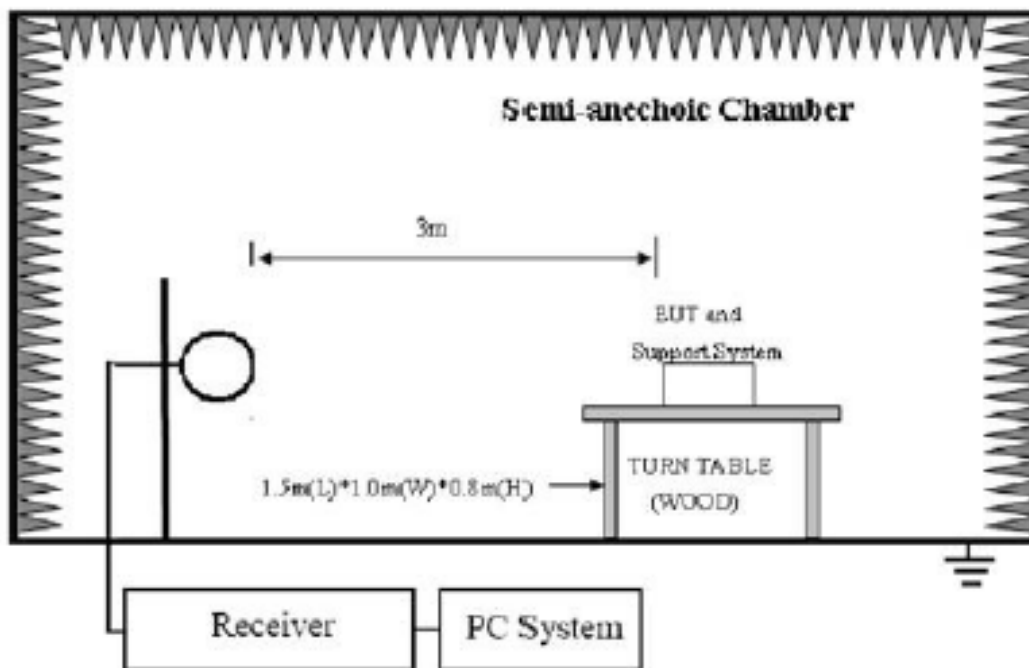

In 3m Anechoic Chamber Test Setup Diagram for 30MHz to 1GHz:

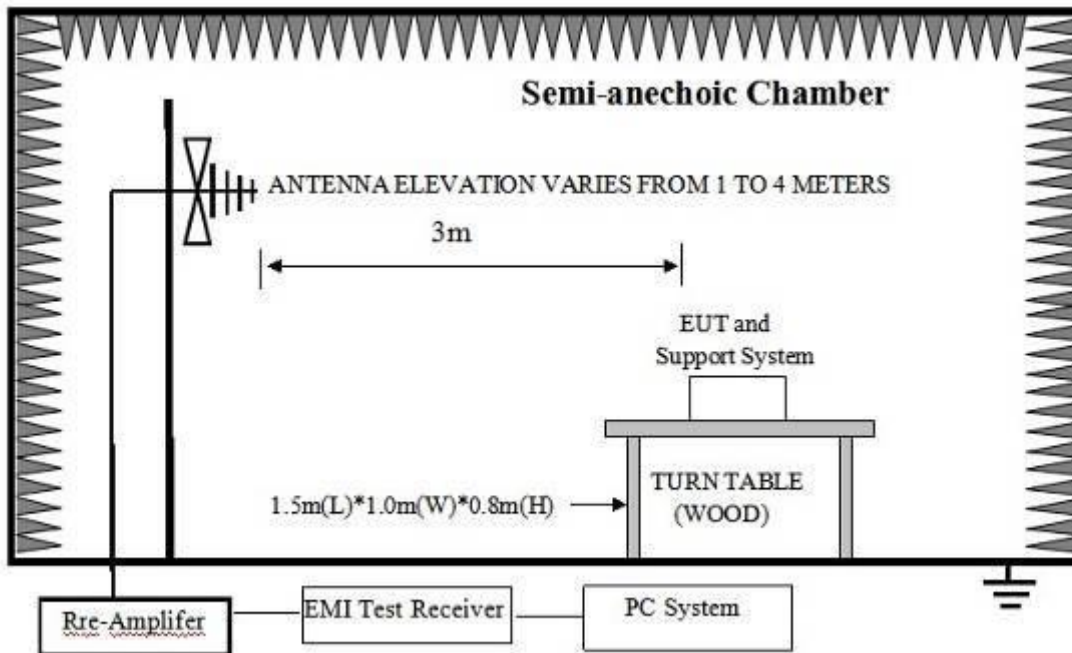

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz:

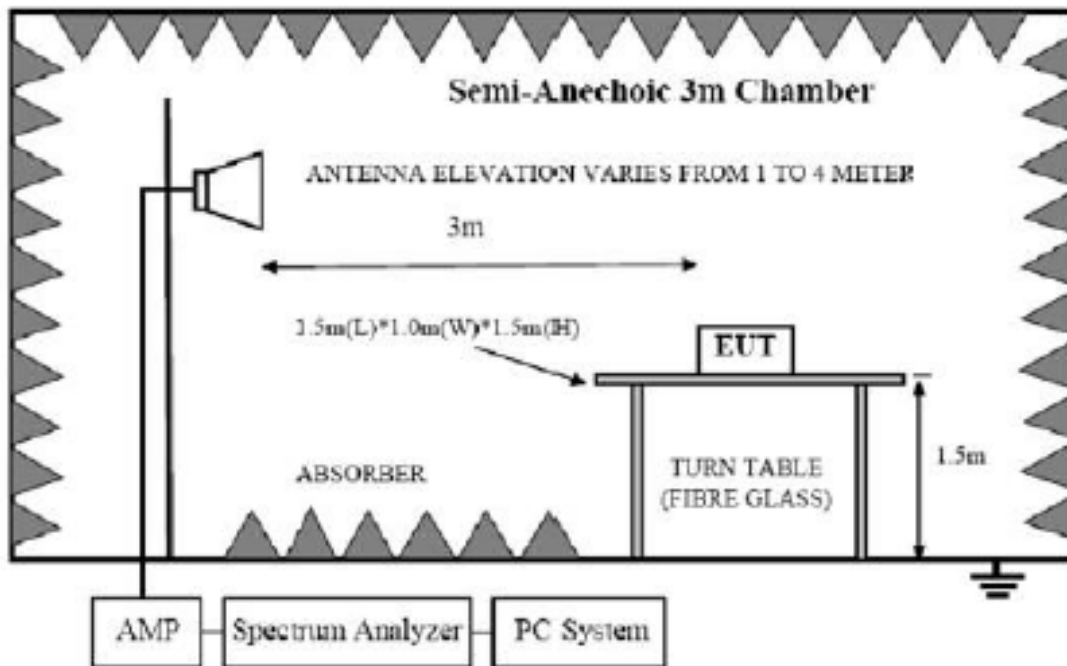

4.3. Limit

FCC 15.205 Restricted frequency band:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

FCC 15.209 Limit

Frequency (MHz)	Distance (Meters)	Field Strengths Limits dB(μV)/m
30--88	3	40.0
88--216	3	43.5
216--960	3	46.0
960--1000	3	54.0
Above 1GHz	3	Peak: 74.0
	3	Average: 54.0

Note: (1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

(3) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz and above 1000MHz. Radiated

emissions limits in these three bands are based on measurements employing an average detector.

(4) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula: $\text{Limit } 3\text{m(dBuV/m)} = \text{Limit } 30\text{m(dBuV/m)} + 40\text{Log}(30\text{m}/3\text{m})$

(5) All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.4. Test Procedure

Procedure of Preliminary Test

Configuration EUT to simulate typical usage as described in clause 2.3 and test equipment as described in clause 4.2 of this report.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No extension cords shall be used to mains receptacle.

EUT height should be 0.8m for below 1GHz and 1.5m for above 1GHz at ground with absorbers.

The antenna was placed at 3 meter away from the EUT as stated in ANSI C63.10. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Analyzer / Receiver quickly scanned from 30MHz to 25GHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

The X, Y, Z three axial are tested and the report only the worst case.

The emissions from 9KHz to 1GHz, QP or average values were measured with EMI receiver with below RBW:

Frequency band	RBW
9KHz-150KHz	200Hz
150KHz-30MHz	9KHz
30MHz-1GHz	120KHz

For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RMS detector RBW 1MHz VBW 3MHz for Average measure.


4.5. Test result

PASS. (See below detailed test result)

Radiated Emissions Test Data Below 30MHz:


No emission found between lowest internal used/generated frequencies to 30MHz.

Radiated Emission Test Result

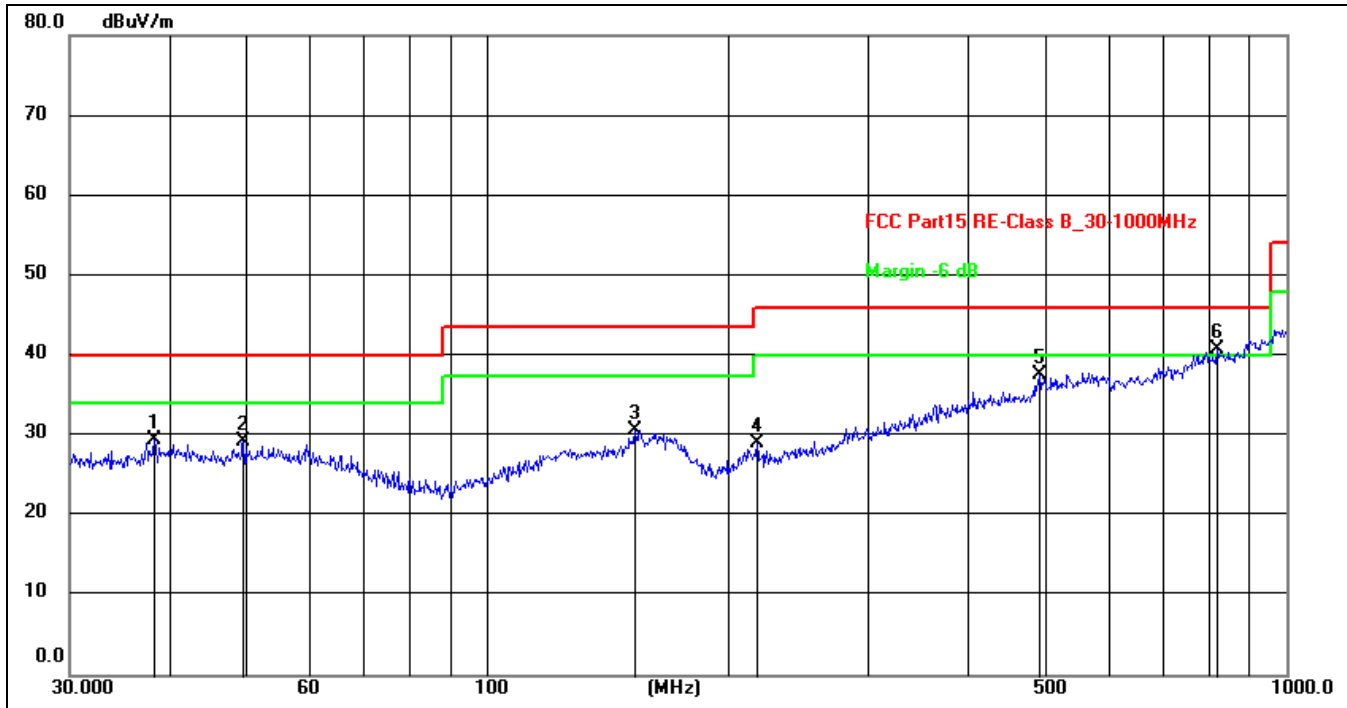

Site:	966LAB	Antenna::Horizontal	Temperature(C):24(C)
Limit:	FCC Part15 RE-Class B_30-1000MHz		Humidity(%):60%
EUT:	LED	Test Time:	2025/1/13 11:45:52
M/N.:	PAK41736M	Power Rating:	AC 120V/60Hz
Mode:	Lighting	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	38.3462	15.45	13.95	29.40	40.00	-10.60	peak	200	182	
2	49.5328	15.54	13.67	29.21	40.00	-10.79	peak	100	86	
3	153.2003	16.10	14.59	30.69	43.50	-12.81	peak	200	43	
4	217.5443	17.42	11.58	29.00	46.00	-17.00	peak	100	324	
5	490.7446	18.93	18.60	37.53	46.00	-8.47	peak	100	175	
6 *	818.8340	16.37	24.39	40.76	46.00	-5.24	peak	200	47	

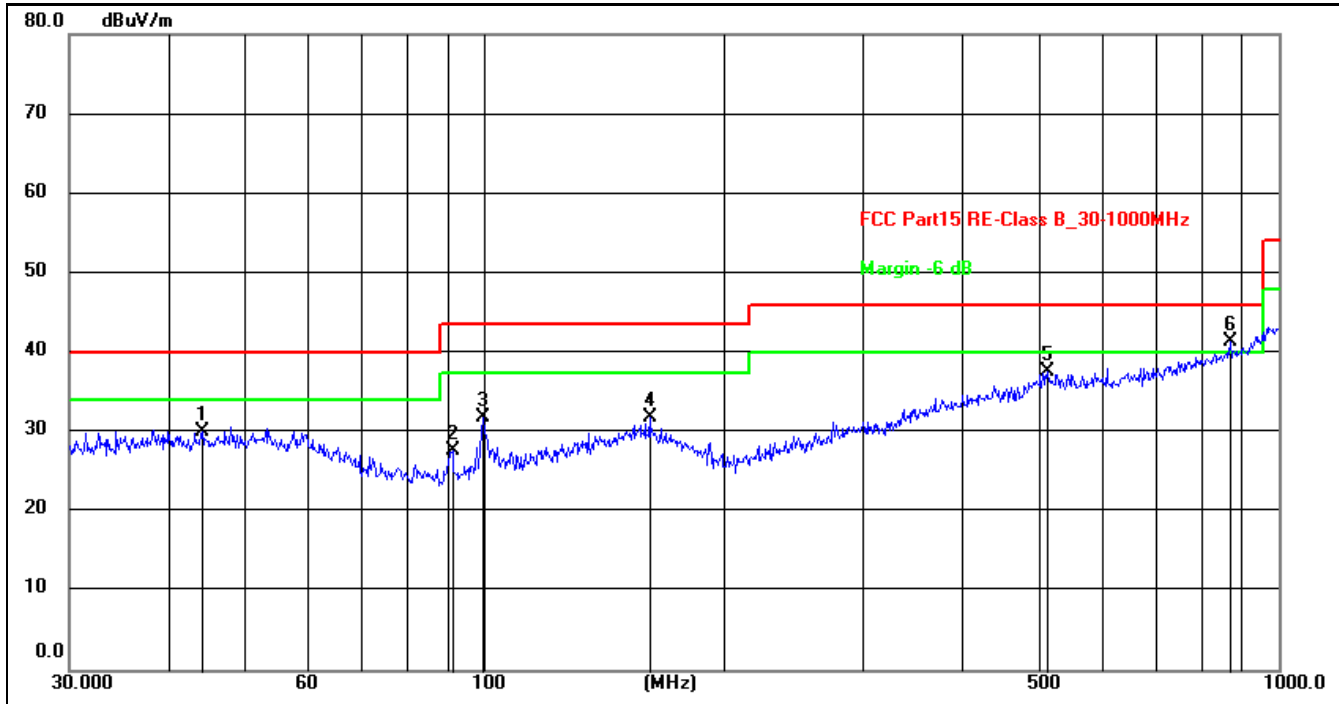

Site:	966LAB	Antenna::	Vertical	Temperature(C)::	24(C)
Limit:	FCC Part15 RE-Class B_30-1000MHz	Test Time:		Humidity(%):	60 %
EUT:	LED	Power Rating:			2025/1/13 11:48:28
M/N.:	PAK41736M	Test Engineer:			AC 120V/60Hz
Mode:	Lighting				
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	44.1202	15.50	14.50	30.00	40.00	-10.00	peak	100	227	
2	91.1746	17.16	10.57	27.73	43.50	-15.77	peak	100	3	
3	99.5281	20.59	11.22	31.81	43.50	-11.69	peak	100	282	
4	161.4742	16.57	15.32	31.89	43.50	-11.61	peak	100	92	
5	511.8352	18.50	19.06	37.56	46.00	-8.44	peak	100	356	
6 *	869.1302	17.05	24.35	41.40	46.00	-4.60	peak	100	12	

For 1GHz to 25GHz

Note: 802.11b/802.11g/802.11n(H20) Mode all have been tested, only worse case 802.11b mode is reported

802.11b Mode (above 1GHz)

Note: 802.11b/802.11g/802.11n (H20) all have been tested, only worse case 802.11b is reported

Frequency (MHz)			2412		Polarity			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (Db)	Preamplifier (dB)	Correction Factor (dB/m)
4824.00	60.34	PK	74.00	-13.66	55.50	33.74	6.72	35.62	4.84
4824.00	45.28	AV	54.00	-8.72	40.44	33.74	6.72	35.62	4.84
7236.00	53.82	PK	74.00	-20.18	43.97	36.24	8.75	35.14	9.85
7236.00	44.56	AV	54.00	-9.44	34.71	36.24	8.75	35.14	9.85

Frequency (MHz)			2412		Polarity			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (Db)	Preamplifier (dB)	Correction Factor (dB/m)
4824.00	61.85	PK	74.00	-12.15	57.01	33.74	6.72	35.62	4.84
4824.00	45.35	AV	54.00	-8.65	40.51	33.74	6.72	35.62	4.84
7236.00	53.65	PK	74.00	-20.35	43.80	36.24	8.75	35.14	9.85
7236.00	43.84	AV	54.00	-10.16	33.99	36.24	8.75	35.14	9.85

Frequency (MHz)			2437		Polarity			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (Db)	Preamplifier (dB)	Correction Factor (dB/m)
4874.00	61.33	PK	74.00	-12.67	55.18	33.54	6.83	34.22	6.15
4874.00	45.02	AV	54.00	-8.98	38.87	33.54	6.83	34.22	6.15
7311.00	42.75	PK	74.00	-31.25	30.78	37.85	9.14	35.02	11.97
7311.00	42.36	AV	54.00	-11.64	30.39	37.85	9.14	35.02	11.97

Frequency (MHz)			2437		Polarity			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (Db)	Preamplifier (dB)	Correction Factor (Db/m)
4874.00	60.64	PK	74.00	-13.36	54.49	33.54	6.83	34.22	6.15
4874.00	45.36	AV	54.00	-8.64	39.21	33.54	6.83	34.22	6.15
7311.00	54.58	PK	74.00	-19.42	42.61	37.85	9.14	35.02	11.97
7311.00	44.36	AV	54.00	-9.64	32.39	37.85	9.14	35.02	11.97

Frequency (MHz)			2462		Polarity			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (Db)	Preamplifier (dB)	Correction Factor (dB/m)
4924.00	59.78	PK	74.00	-14.22	54.45	32.58	6.96	34.21	5.33
4924.00	43.54	AV	54.00	-10.46	38.21	32.58	6.96	34.21	5.33
7386.00	53.25	PK	74.00	-20.75	41.63	37.57	9.21	35.16	11.62
7386.00	42.64	AV	54.00	-11.36	31.02	37.57	9.21	35.16	11.62


Frequency (MHz)			2462		Polarity			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (Db)	Preamplifier (dB)	Correction Factor (dB/m)
4924.00	59.36	PK	74.00	-14.64	54.03	32.58	6.96	34.21	5.33
4924.00	44.58	AV	54.00	-9.42	39.25	32.58	6.96	34.21	5.33
7386.00	50.34	PK	74.00	-23.66	38.72	37.57	9.21	35.16	11.62
7386.00	43.25	AV	54.00	-10.75	31.63	37.57	9.21	35.16	11.62

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
6. Other emissions are attenuated 20dB below the limits from 9 kHz to 30MHz, so it does not recorded in report.


Results of Band Edges Test (Radiated)

Note: 802.11b/802.11g/802.11n (H20) all have been tested, only worse case 802.11b is reported

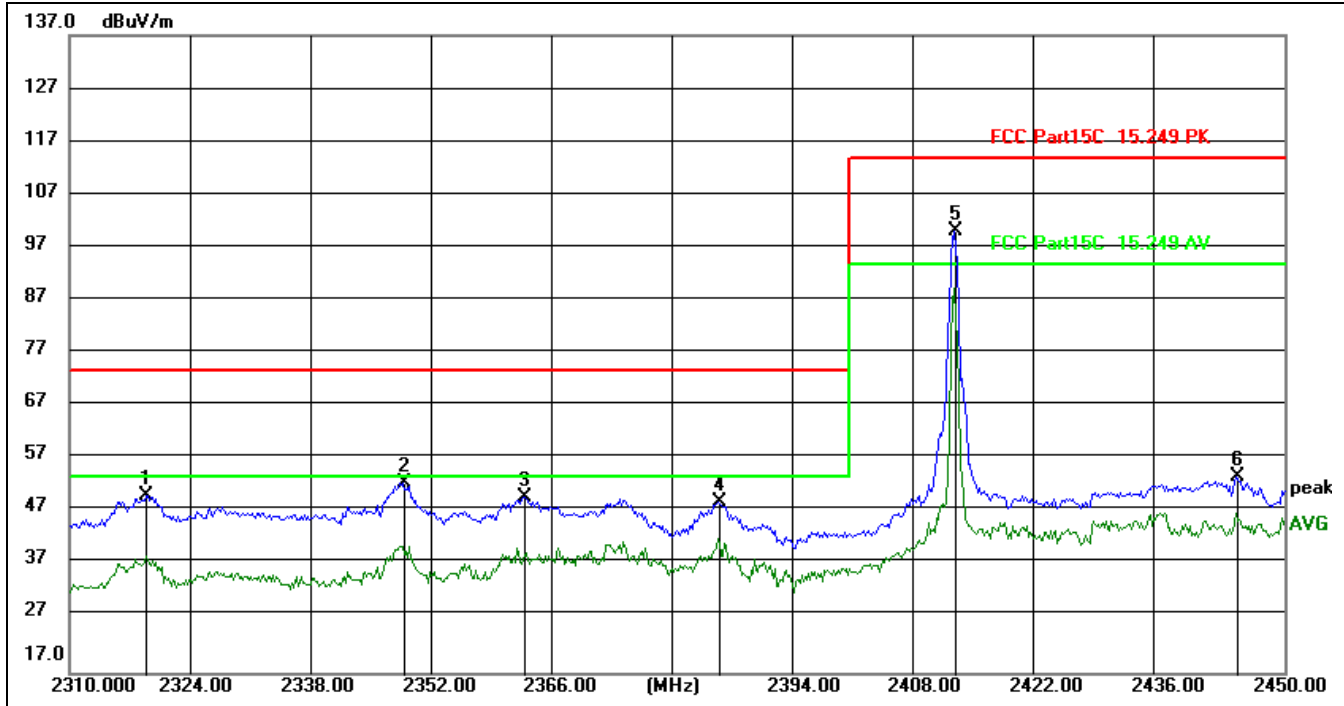


Site:	966LAB	Antenna::Horizontal	Temperature(C):24(C)
Limit:	FCC Part15C 15.249 PK		Humidity(%):60%
EUT:	LED	Test Time:	2024/12/13 14:42:03
M/N.:	PAK41736M(2412)	Power Rating:	AC 120V/60Hz
Mode:	Lighting	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2318.932	66.21	-15.61	50.60	74.00	-23.40	peak	200	125	
2	2348.464	68.64	-15.71	52.93	74.00	-21.07	peak	200	336	
3	2362.318	65.96	-15.73	50.23	74.00	-23.77	peak	100	5	
4	2384.740	64.97	-15.74	49.23	74.00	-24.77	peak	100	258	
5 *	2412.012	116.01	-15.76	100.25	114.00	-13.75	peak	200	156	
6	2444.349	69.87	-15.77	54.10	114.00	-59.90	peak	100	225	

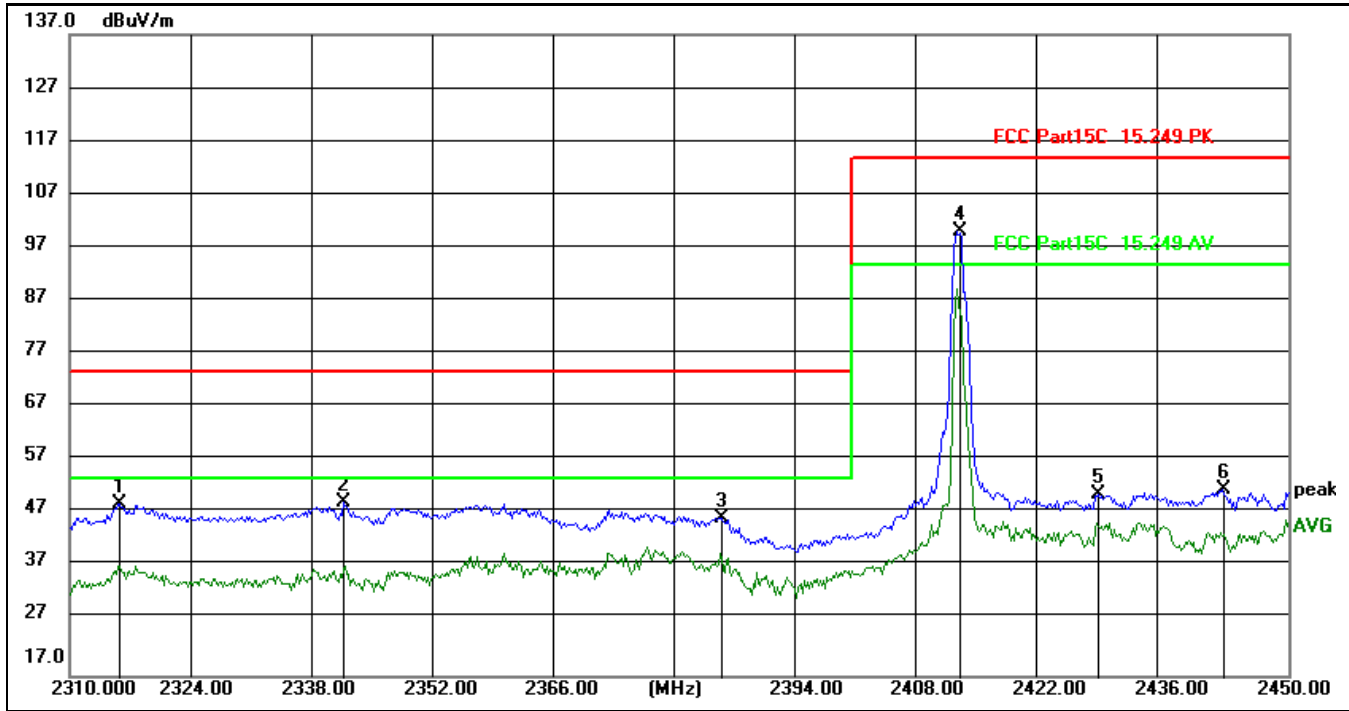


Site:	966LAB	Antenna::	Vertical	Temperature(C):	24(C)
Limit:	FCC Part15C 15.249 PK			Humidity(%):	60%
EUT:	LED	Test Time:	2024/12/13 14:42:03		
M/N.:	PAK41736M(2412)	Power Rating:	AC 120V/60Hz		
Mode:	Lighting	Test Engineer:			
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2315.833	64.99	-15.60	49.39	74.00	-24.61	peak	100	124	
2	2341.536	65.37	-15.69	49.68	74.00	-24.32	peak	100	245	
3	2384.740	62.47	-15.74	46.73	74.00	-27.27	peak	100	175	
4 *	2412.215	116.01	-15.76	100.25	114.00	-13.75	peak	200	189	
5	2428.125	66.77	-15.76	51.01	114.00	-62.99	peak	100	15	
6	2442.344	67.79	-15.77	52.02	114.00	-61.98	peak	200	8	

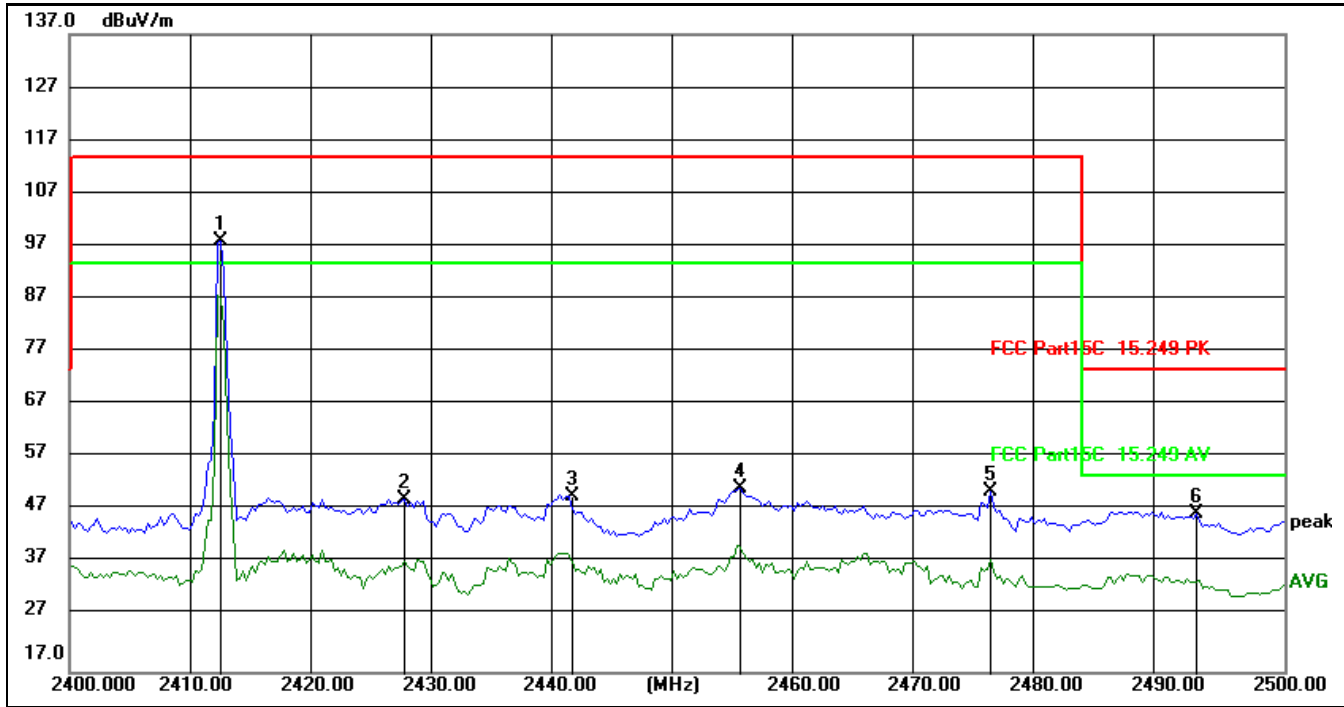


Site:	966LAB	Antenna::	Vertical	Temperature(C):	24(C)
Limit:	FCC Part15C 15.249 PK	Test Time:	2024/12/16 11:41:10		
EUT:	LED	Power Rating:	AC 120V/60Hz		
M/N.:	PAK41736M(2412)	Test Engineer:			
Mode:	Lighting				
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1 *	2412.500	113.96	-15.76	98.20	114.00	-15.80	peak	200	114	
2	2427.604	65.22	-15.76	49.46	114.00	-64.54	peak	100	258	
3	2441.146	65.98	-15.77	50.21	114.00	-63.79	peak	200	149	
4	2455.208	67.46	-15.74	51.72	114.00	-62.28	peak	200	228	
5	2475.781	66.64	-15.66	50.98	114.00	-63.02	peak	100	125	
6	2492.708	62.48	-15.61	46.87	74.00	-27.13	peak	100	256	

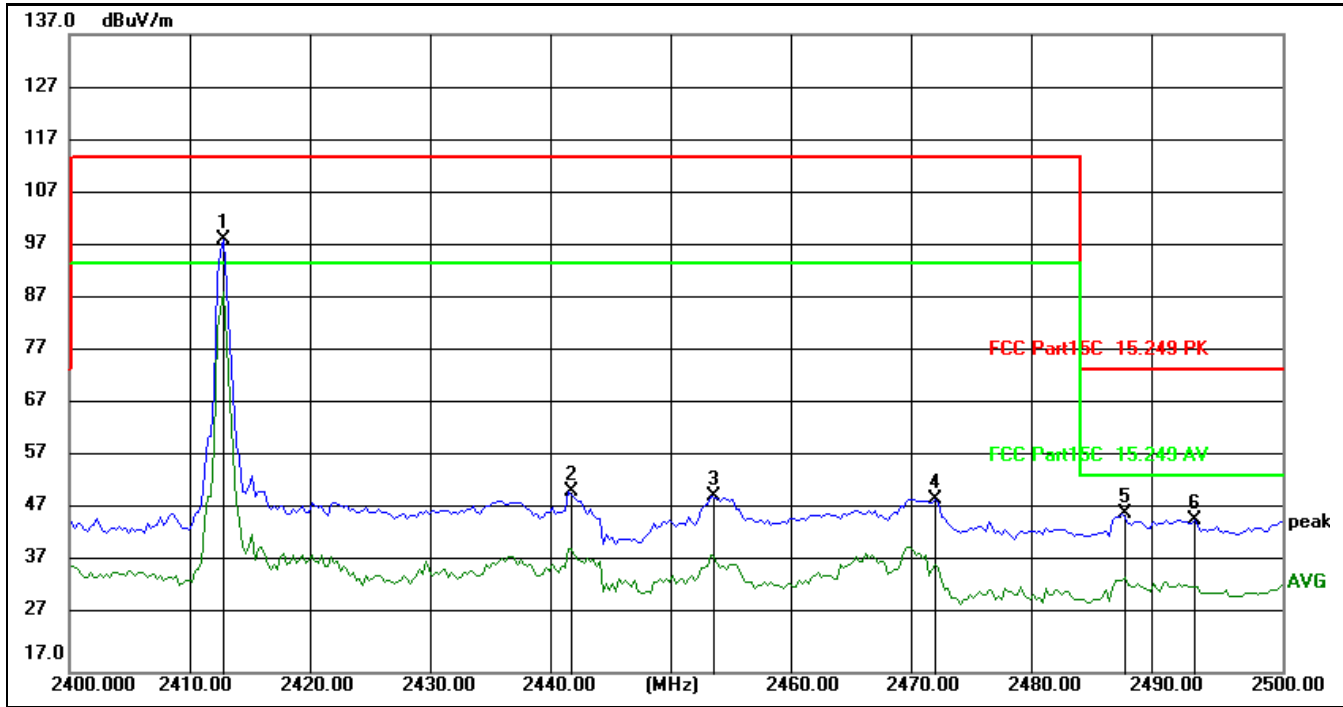


Site:	966LAB	Antenna::Horizontal	Temperature(C):24(C)
Limit:	FCC Part15C 15.249 PK	Test Time:	Humidity(%):60%
EUT:	LED	Power Rating:	2024/12/16 11:41:10
M/N.:	PAK41736M(2412)	Test Engineer:	AC 120V/60Hz
Mode:	Lighting		
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1 *	2412.760	114.32	-15.76	98.56	114.00	-15.44	peak	100	246	
2	2441.146	66.98	-15.77	51.21	114.00	-62.79	peak	100	18	
3	2452.865	65.83	-15.76	50.07	114.00	-63.93	peak	200	234	
4	2471.354	65.37	-15.69	49.68	114.00	-64.32	peak	100	228	
5	2486.719	62.55	-15.62	46.93	74.00	-27.07	peak	200	156	
6	2492.708	61.48	-15.61	45.87	74.00	-28.13	peak	100	147	

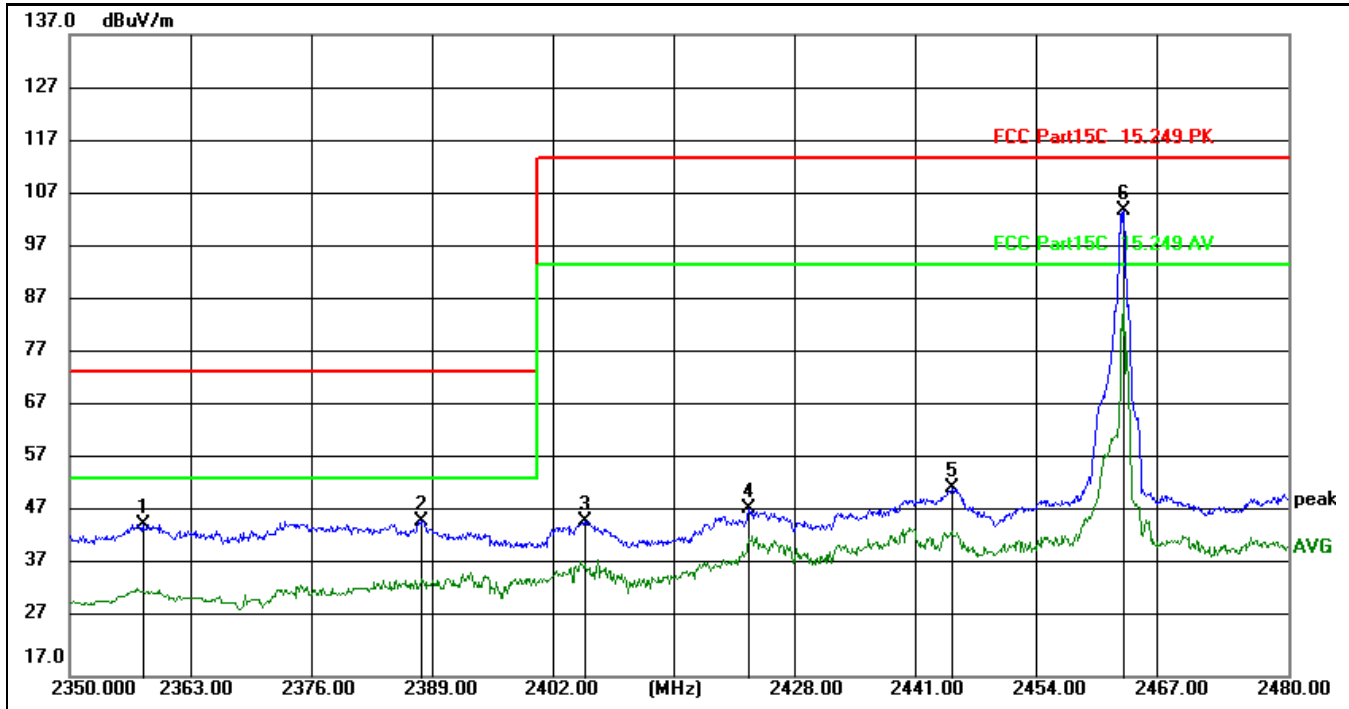


Site:	966LAB	Antenna::	Vertical	Temperature(C):	24(C)
Limit:	FCC Part15C 15.249 PK	Test Time:		Humidity(%):	60%
EUT:	LED	Power Rating:		AC	120V/60Hz
M/N.:	PAK41736M(2462)	Test Engineer:			
Mode:	Lighting				
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2357.808	61.14	-15.72	45.42	74.00	-28.58	peak	200	14	
2	2387.477	61.80	-15.74	46.06	74.00	-27.94	peak	200	6	
3	2405.045	61.77	-15.74	46.03	114.00	-67.97	peak	200	258	
4	2422.482	64.12	-15.76	48.36	114.00	-65.64	peak	100	156	
5	2444.214	68.09	-15.77	52.32	114.00	-61.68	peak	200	89	
6 *	2462.432	119.85	-15.73	104.12	114.00	-9.88	peak	200	65	

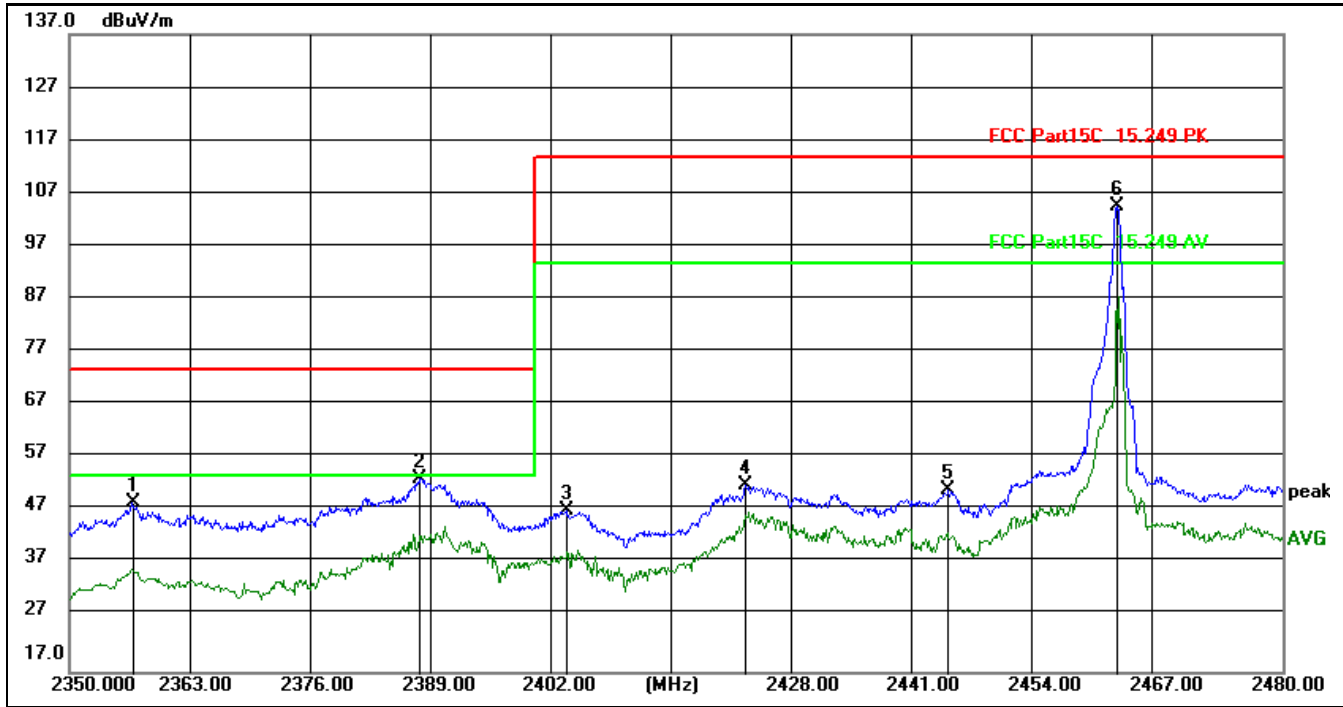


Site:	966LAB	Antenna::	Horizontal	Temperature(C):	24(C)
Limit:	FCC Part15C 15.249 PK	Test Time:		Humidity(%):	60%
EUT:	LED	Power Rating:		AC	120V/60Hz
M/N.:	PAK41736M(2462)	Test Engineer:			
Mode:	Lighting				
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2356.767	64.73	-15.72	49.01	74.00	-24.99	peak	100	5	
2	2387.477	69.30	-15.74	53.56	74.00	-20.44	peak	100	304	
3	2403.223	63.33	-15.75	47.58	114.00	-66.42	peak	100	226	
4	2422.482	68.12	-15.76	52.36	114.00	-61.64	peak	200	215	
5	2444.214	67.09	-15.77	51.32	114.00	-62.68	peak	200	136	
6 *	2462.302	120.34	-15.73	104.61	114.00	-9.39	peak	200	114	

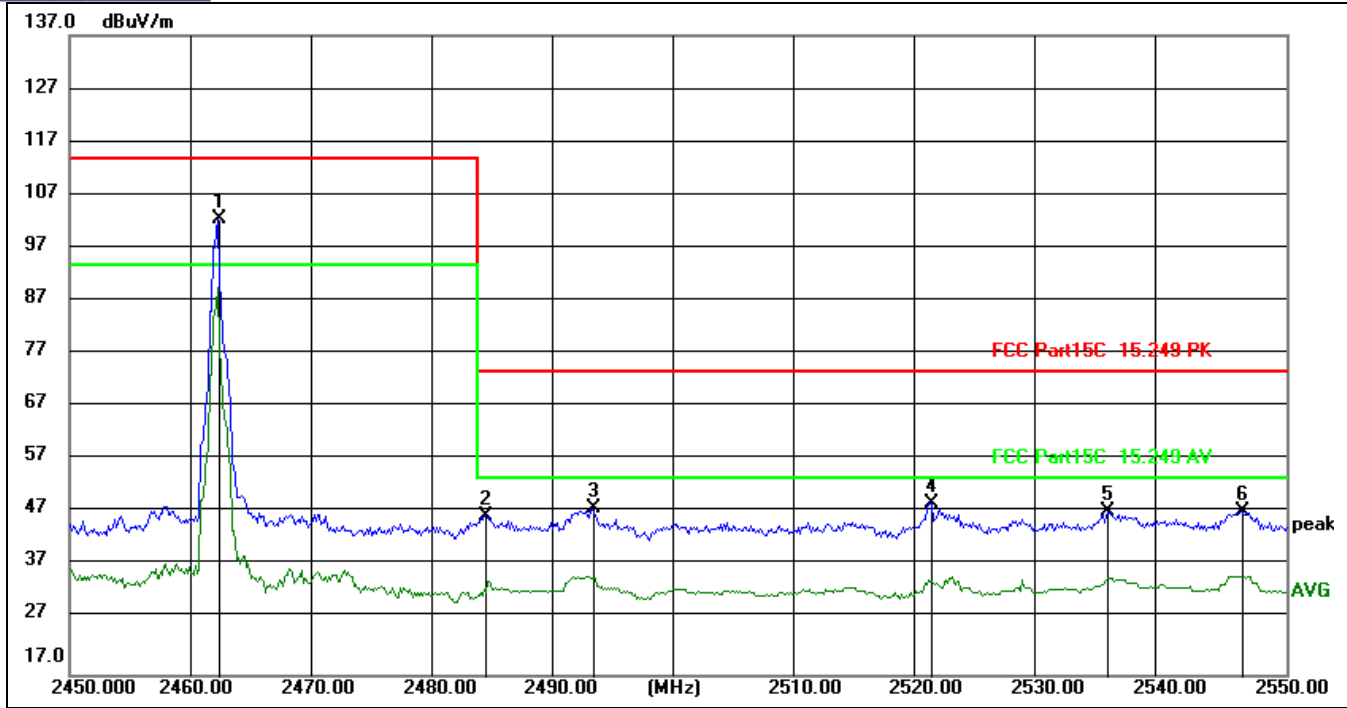

Site:	966LAB	Antenna::Horizontal	Temperature(C):24(C)
Limit:	FCC Part15C 15.249 PK		Humidity(%):60%
EUT:	LED	Test Time:	2024/12/16 11:41:10
M/N.:	PAK41736M(2462)	Power Rating:	AC 120V/60Hz
Mode:	Lighting	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1 *	2462.224	118.30	-15.73	102.57	114.00	-11.43	peak	100	356	
2	2484.200	62.71	-15.65	47.06	74.00	-26.94	peak	200	16	
3	2492.913	63.94	-15.61	48.33	74.00	-25.67	peak	200	225	
4	2520.871	64.70	-15.49	49.21	74.00	-24.79	peak	100	146	
5	2535.305	63.35	-15.42	47.93	74.00	-26.07	peak	100	289	
6	2546.229	63.34	-15.39	47.95	74.00	-26.05	peak	100	147	

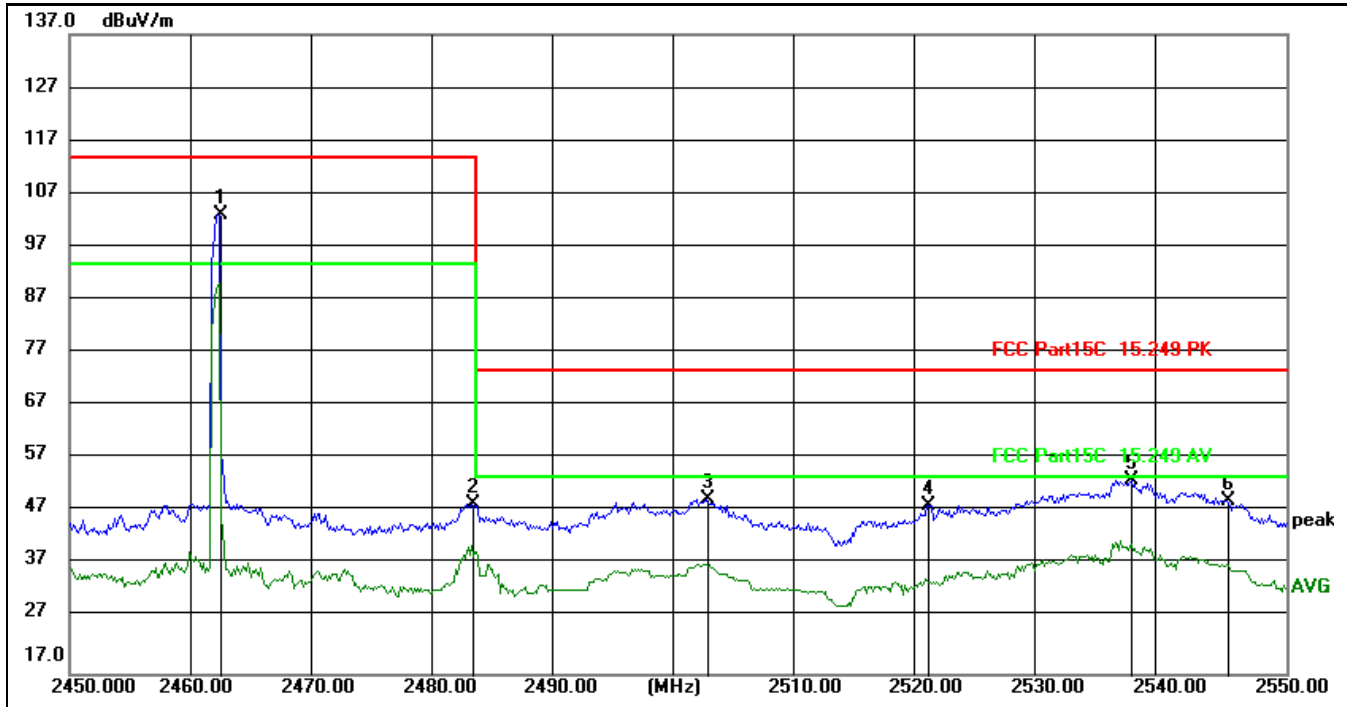

Site:	966LAB	Antenna::	Vertical	Temperature(C):	24(C)
Limit:	FCC Part15C 15.249 PK	Test Time:		Humidity(%):	60%
EUT:	LED	Power Rating:		AC	120V/60Hz
M/N.:	PAK41736M(2462)	Test Engineer:			
Mode:	Lighting				
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1 *	2462.354	118.90	-15.73	103.17	114.00	-10.83	peak	100	115	
2	2483.030	64.73	-15.65	49.08	114.00	-64.92	peak	100	79	
3	2502.406	65.60	-15.58	50.02	74.00	-23.98	peak	200	56	
4	2520.611	64.29	-15.49	48.80	74.00	-25.20	peak	100	121	
5	2537.256	68.90	-15.42	53.48	74.00	-20.52	peak	200	357	
6	2545.059	65.11	-15.39	49.72	74.00	-24.28	peak	100	228	

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
6. Other emissions are attenuated 20dB below the limits from 9kHz to 30MHz, so it does not recorded in report.

5. Output Power

5.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	MXA Signal Analyzer	KEYSIGHT	N9020A	MY54510476	2024/5/14	1 Year

5.2. BLOCK DIAGRAM OF TEST SETUP

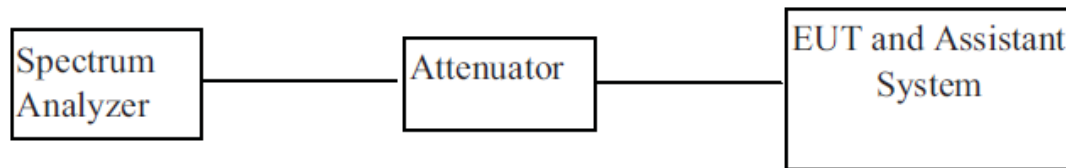

5.3. Limit

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt (30dBm).

5.4. Test Procedure

For output power test:


1. Connect EUT RF output port to power sensor through an RF attenuator.
2. Connect the power sensor to the PC.
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Record the maximum power from the software.

Note : The EUT was tested according to KDB 558074v03r04 for compliance to FCC 47CFR 15.247 requirements.


5.5. Test result

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11b 1Mbps	2412	Ant 1	19.128	0	19.128	30	Pass
NVNT	802.11b 1Mbps	2437	Ant 1	19.243	0	19.243	30	Pass
NVNT	802.11b 1Mbps	2462	Ant 1	20.396	0	20.396	30	Pass


Power NVNT 802.11b 1Mbps 2412MHz Ant1

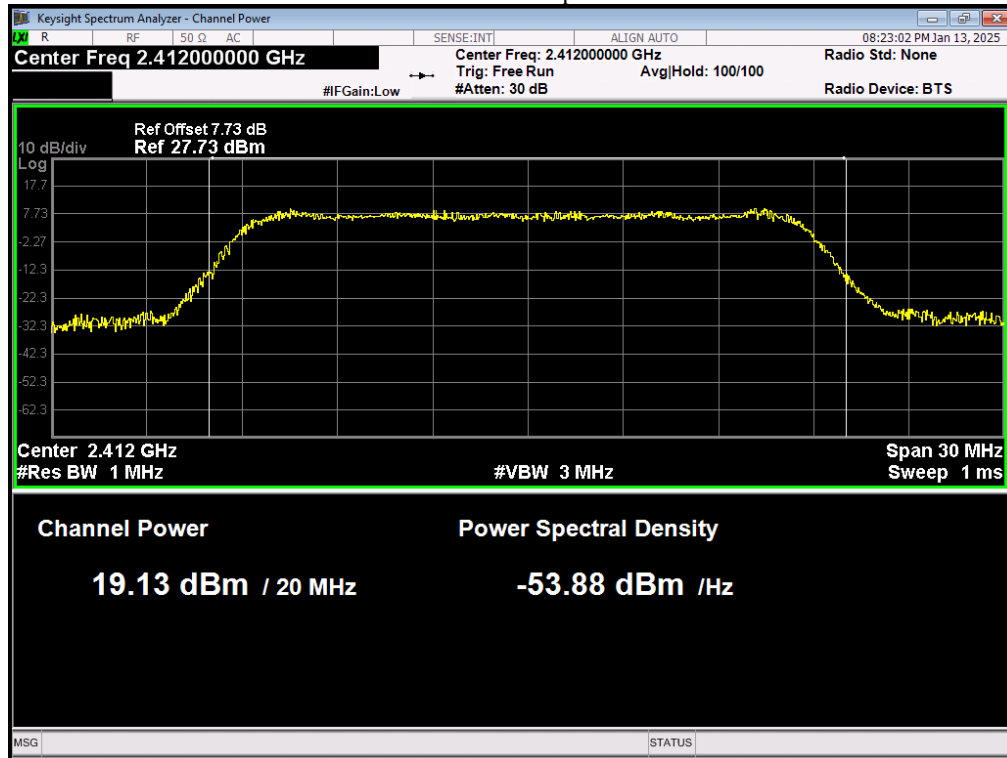

Power NVNT 802.11b 1Mbps 2437MHz Ant1

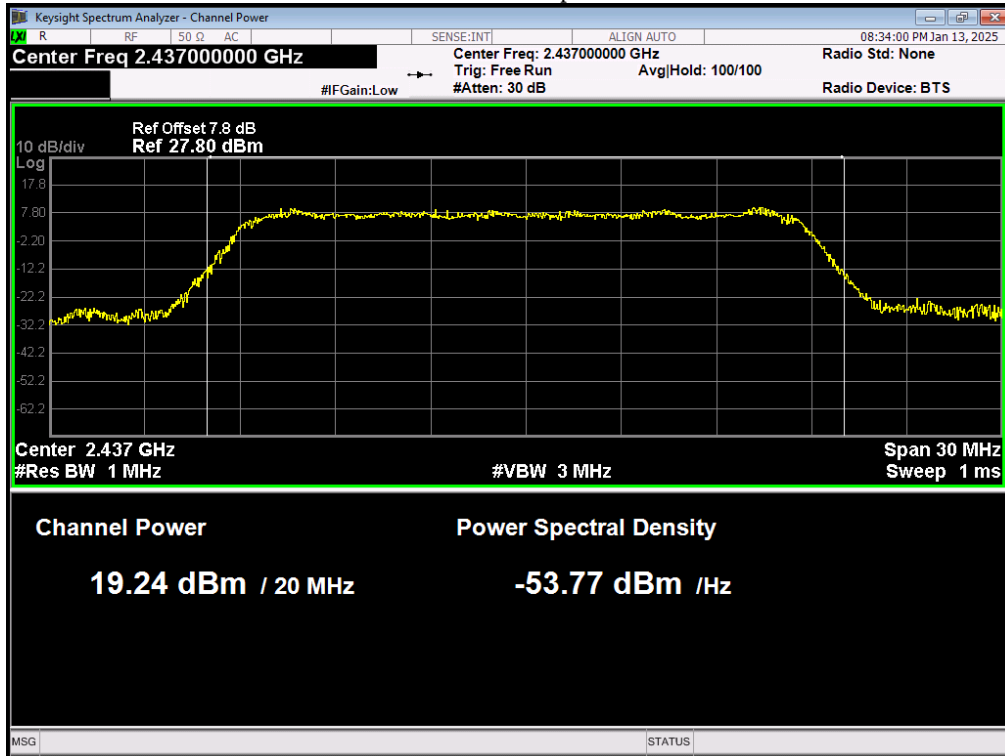


Power NVNT 802.11b 1Mbps 2462MHz Ant1

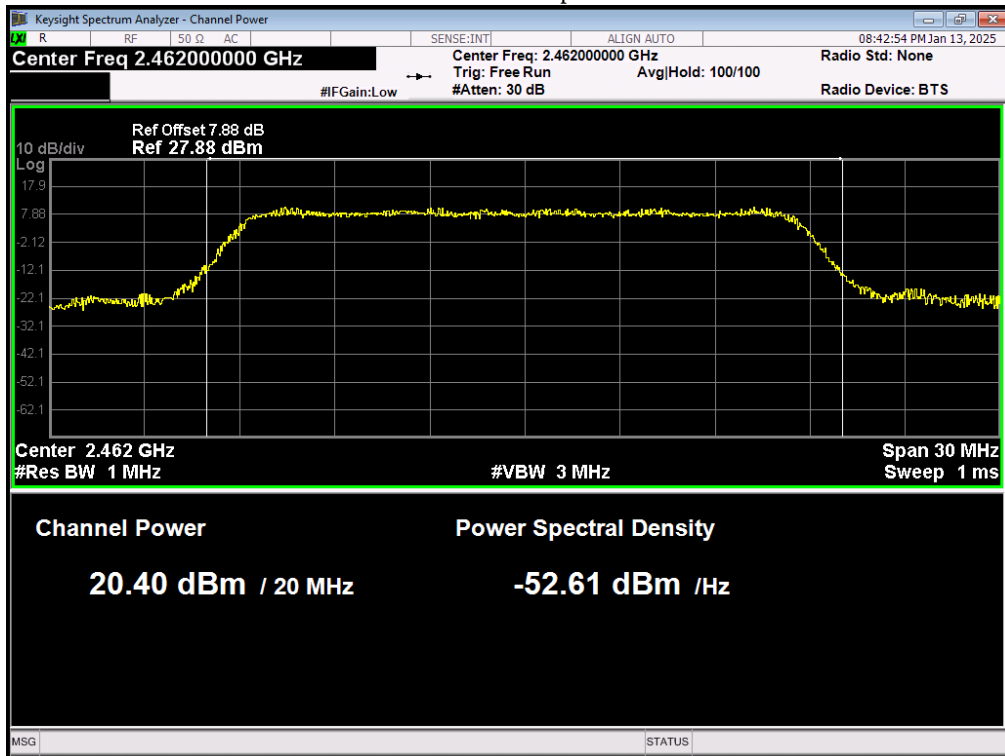


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11g 6Mbps	2412	Ant 1	19.651	0	19.651	30	Pass
NVNT	802.11g 6Mbps	2437	Ant 1	19.33	0	19.33	30	Pass

NVNT	802.11g 6Mbps	2462	Ant 1	20.625	0	20.625	30	Pass
------	------------------	------	-------	--------	---	--------	----	------


Power NVNT 802.11g 6Mbps 2412MHz Ant1

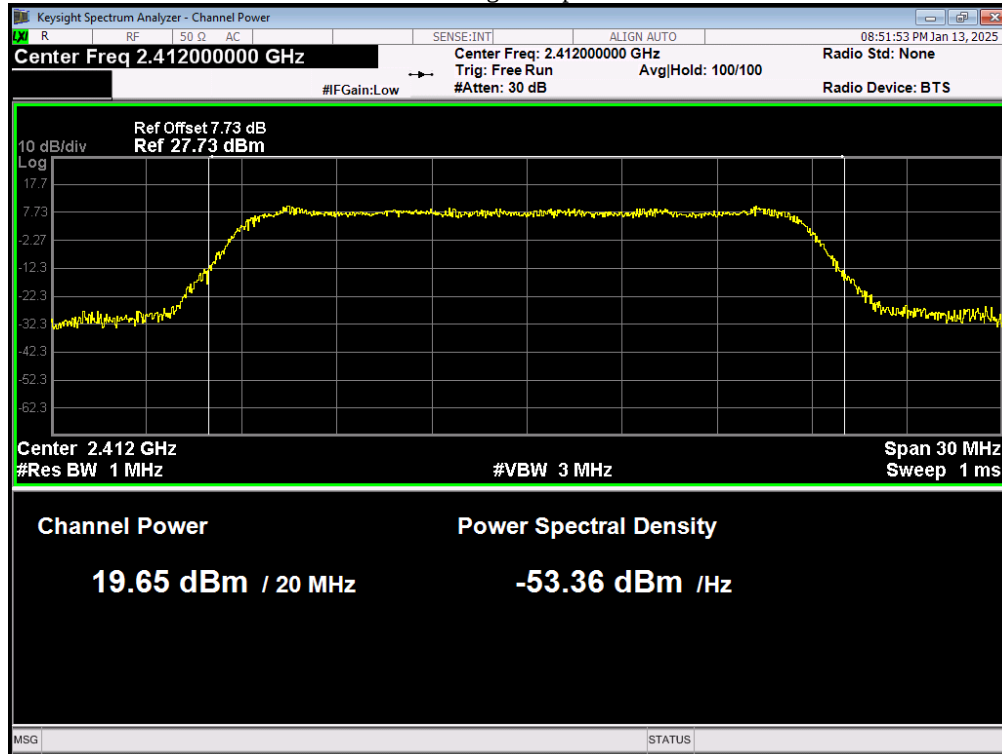

Power NVNT 802.11g 6Mbps 2437MHz Ant1

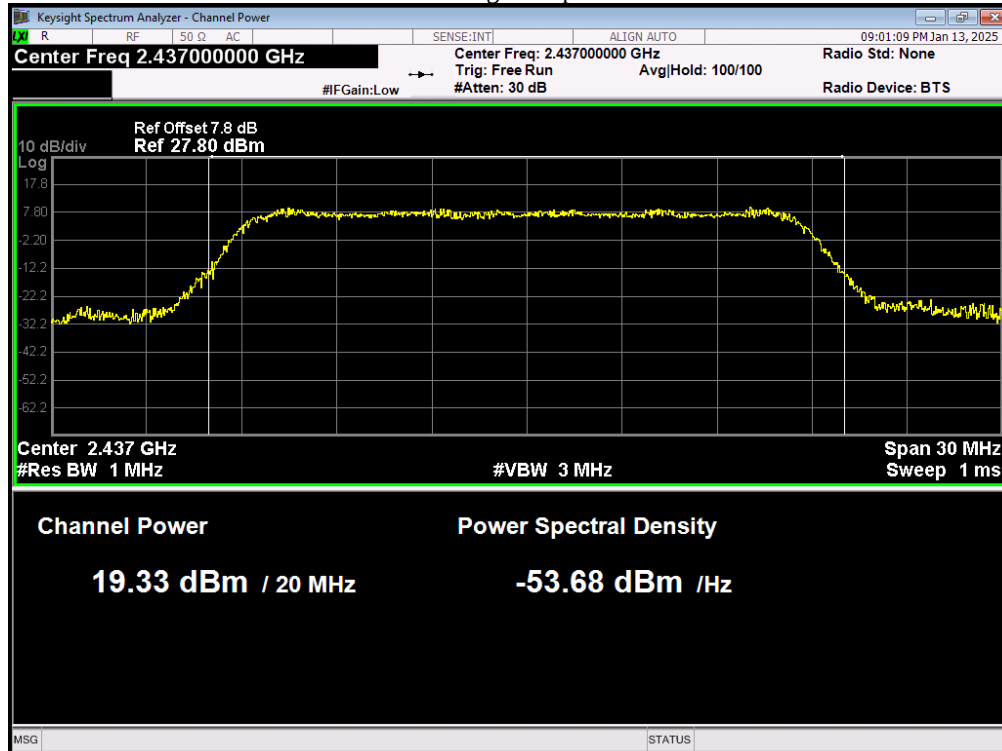


Power NVNT 802.11g 6Mbps 2462MHz Ant1

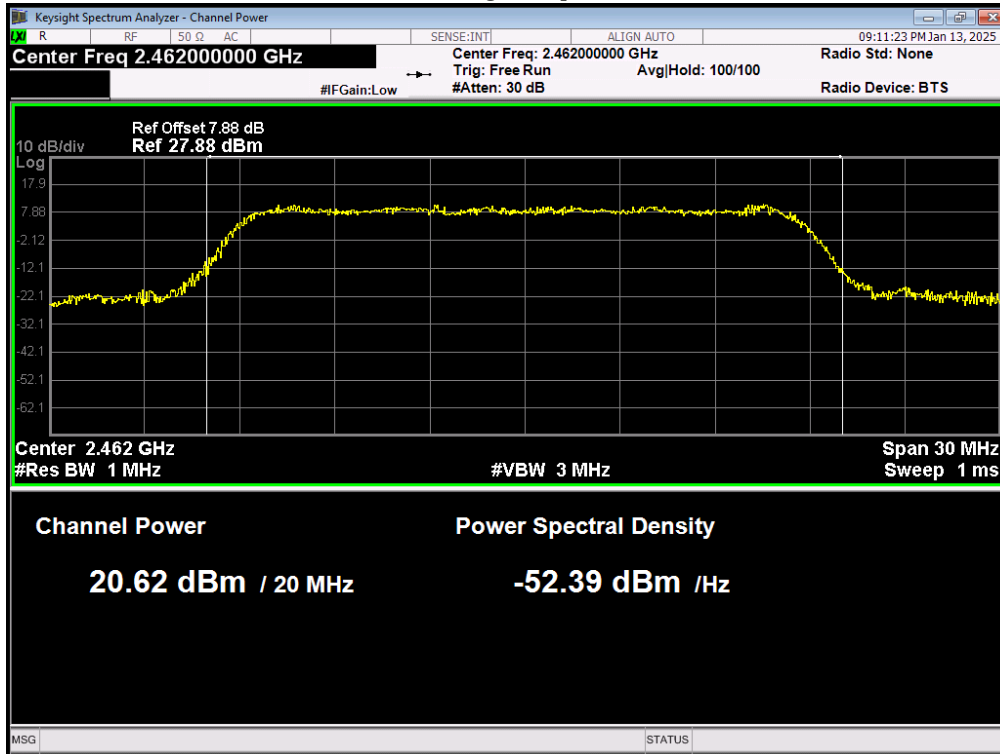


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11n(HT20)	2412	Ant 1	19.763	0	19.763	30	Pass
NVNT	802.11n(HT20)	2437	Ant 1	19.631	0	19.631	30	Pass
NVNT	802.11n(HT20)	2462	Ant 1	20.482	0	20.482	30	Pass


Power NVNT 802.11n(HT20) 2412MHz Ant1

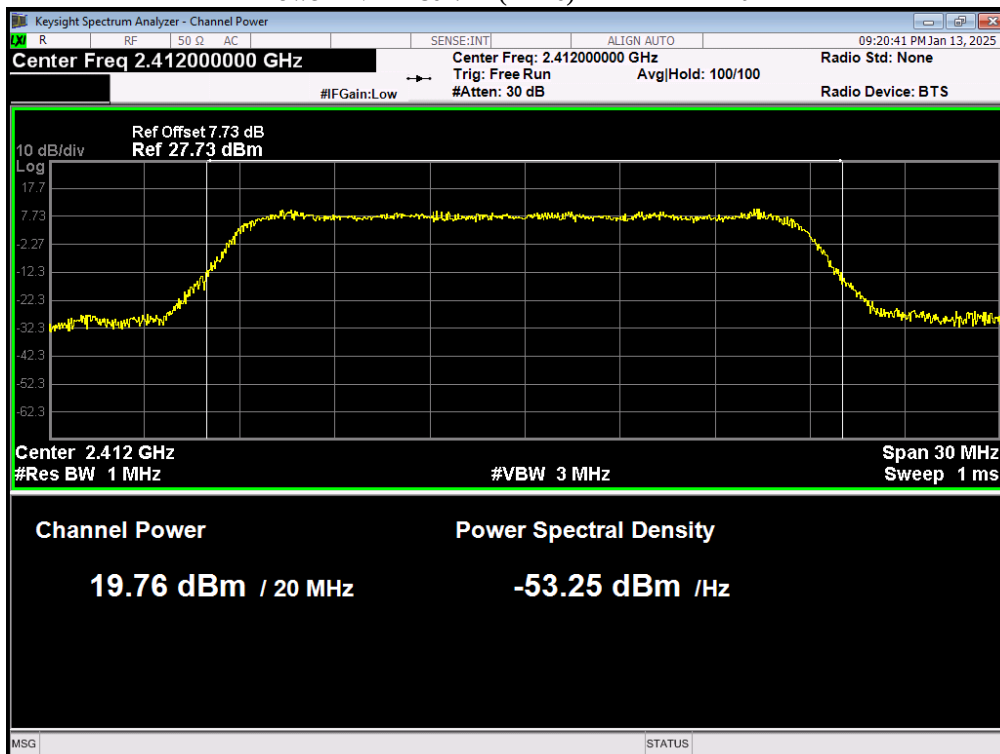

Power NVNT 802.11n(HT20) 2437MHz Ant1

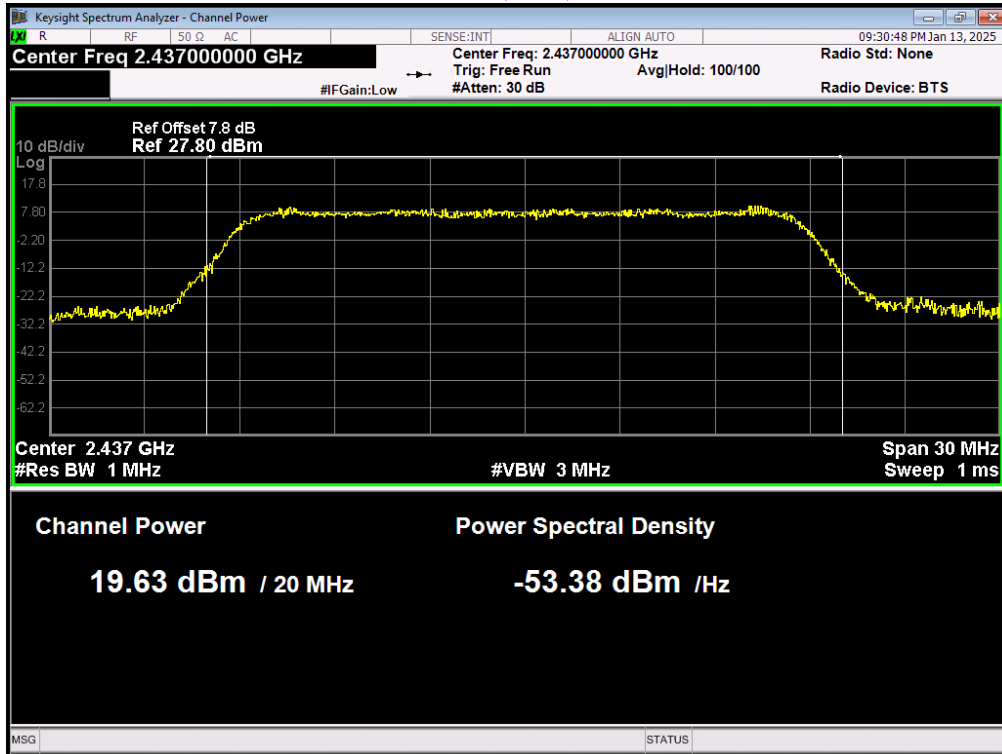

Power NVNT 802.11n(HT20) 2462MHz Ant1

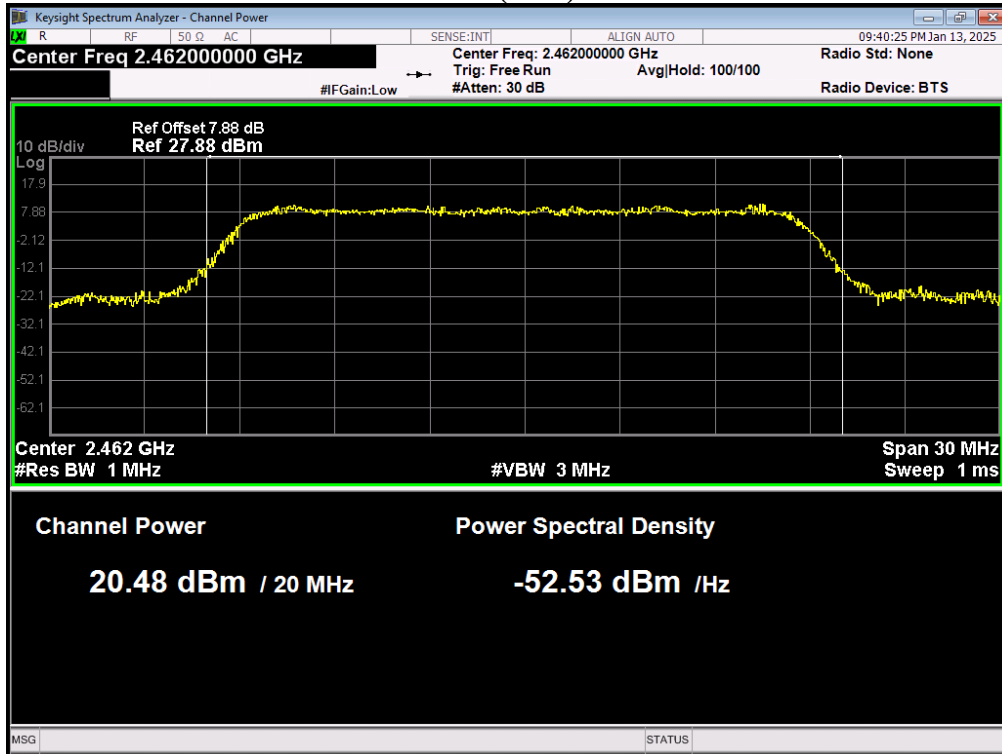


6. -6dB Bandwidth

6.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	MXA Signal Analyzer	KEYSIGHT	N9020A	MY54510476	2024/05/14	1 Year

6.2. BLOCK DIAGRAM OF TEST SETUP

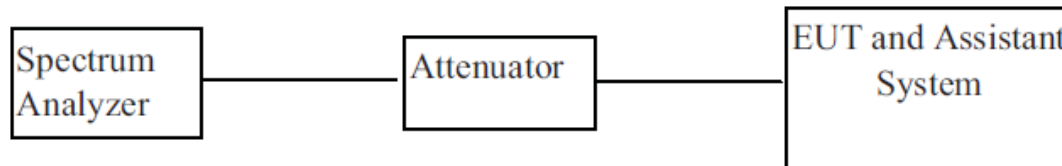

6.3. Limit

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.4. Test Procedure


1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW $\geq$ 3 $\times$ RBW.
4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.


6.5. Test result

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	802.11b 1Mbps	2412	Ant 1	17.1875	16.3569	0.5	Pass
NVNT	802.11b 1Mbps	2437	Ant 1	17.0766	16.2981	0.5	Pass
NVNT	802.11b 1Mbps	2462	Ant 1	17.0952	16.3551	0.5	Pass


OBW NVNT 802.11b 1Mbps 2412MHz Ant1

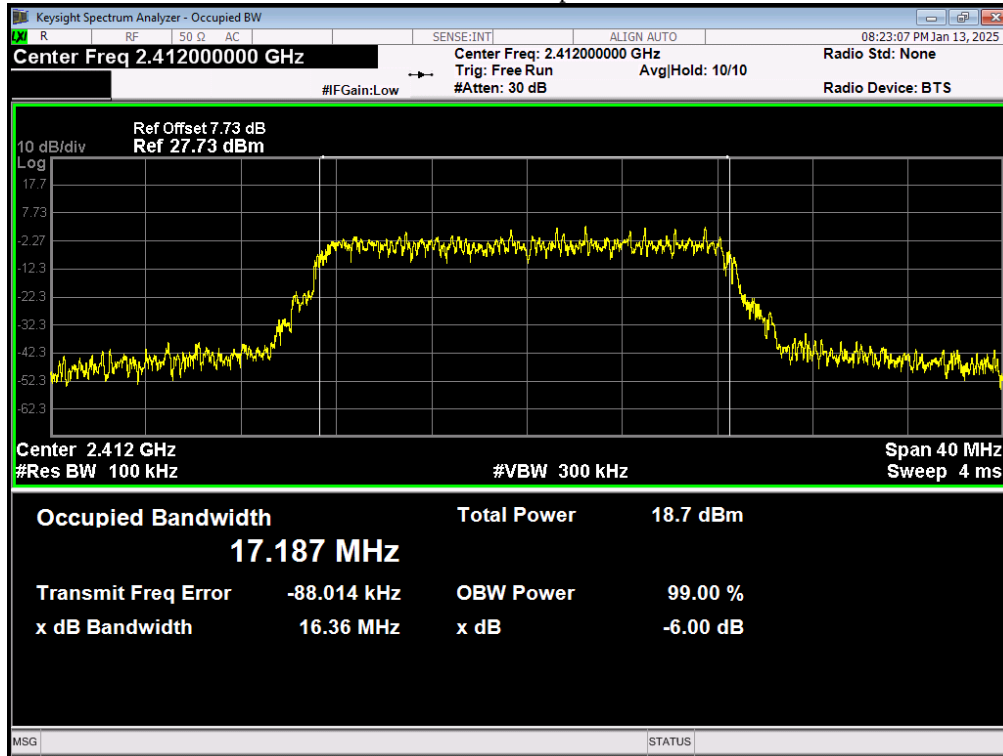

OBW NVNT 802.11b 1Mbps 2437MHz Ant1

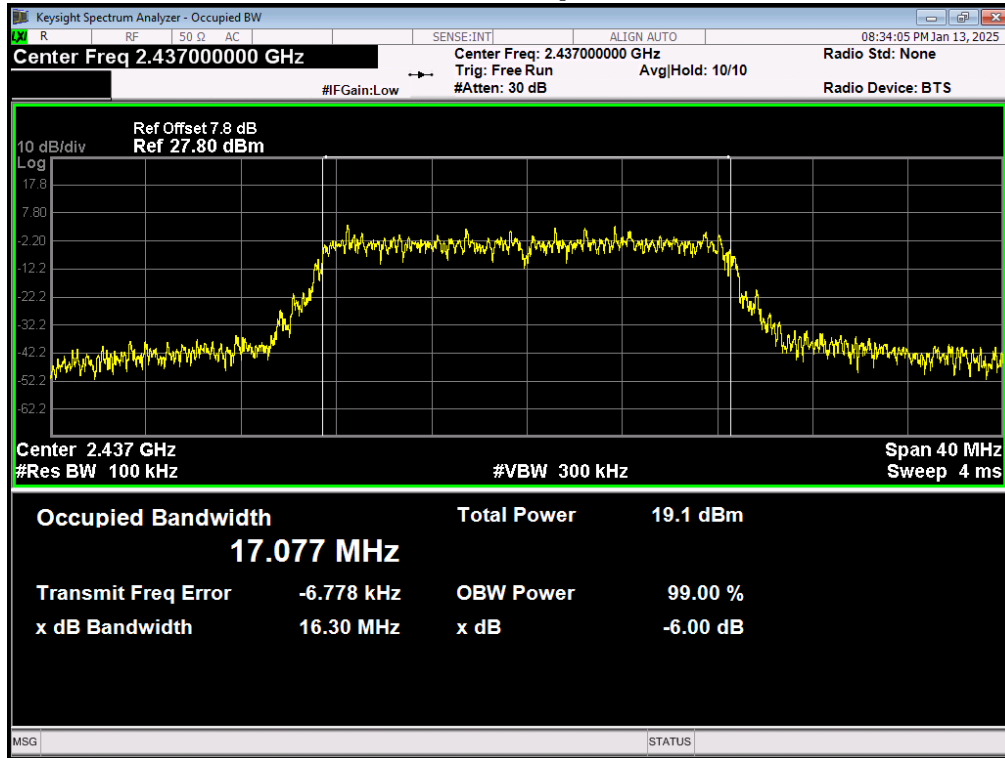


OBW NVNT 802.11b 1Mbps 2462MHz Ant1

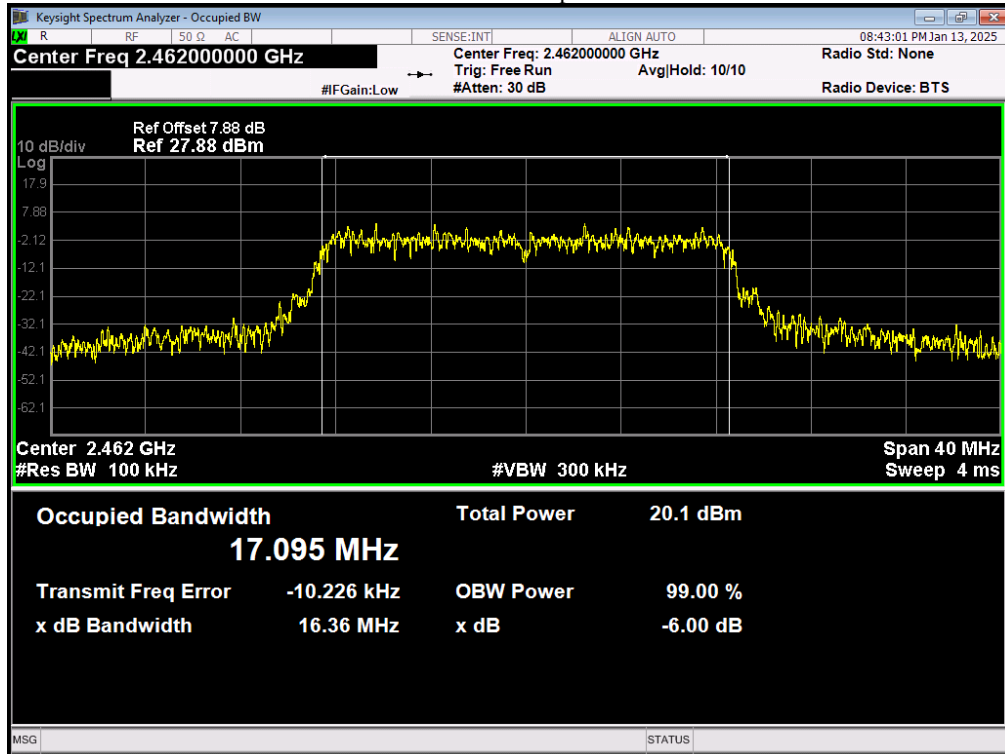


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	802.11g 6Mbps	2412	Ant 1	17.1378	16.3394	0.5	Pass
NVNT	802.11g 6Mbps	2437	Ant 1	17.1035	16.2504	0.5	Pass

NVNT	802.11g 6Mbps	2462	Ant 1	17.1444	16.3745	0.5	Pass
------	------------------	------	-------	---------	---------	-----	------


OBW NVNT 802.11g 6Mbps 2412MHz Ant1

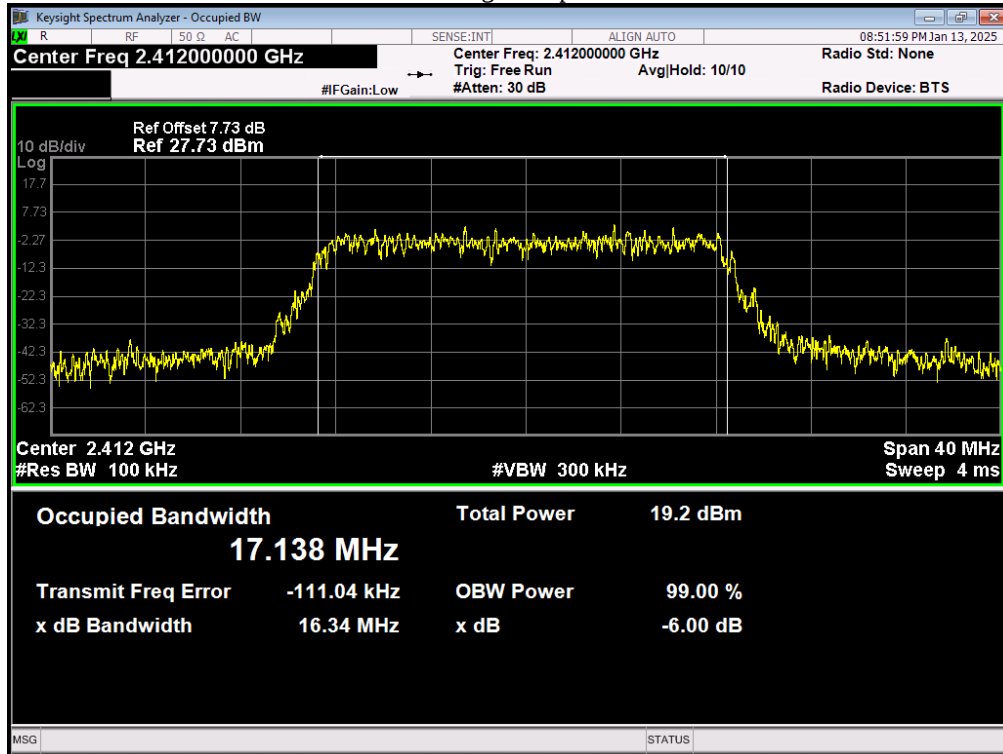

OBW NVNT 802.11g 6Mbps 2437MHz Ant1

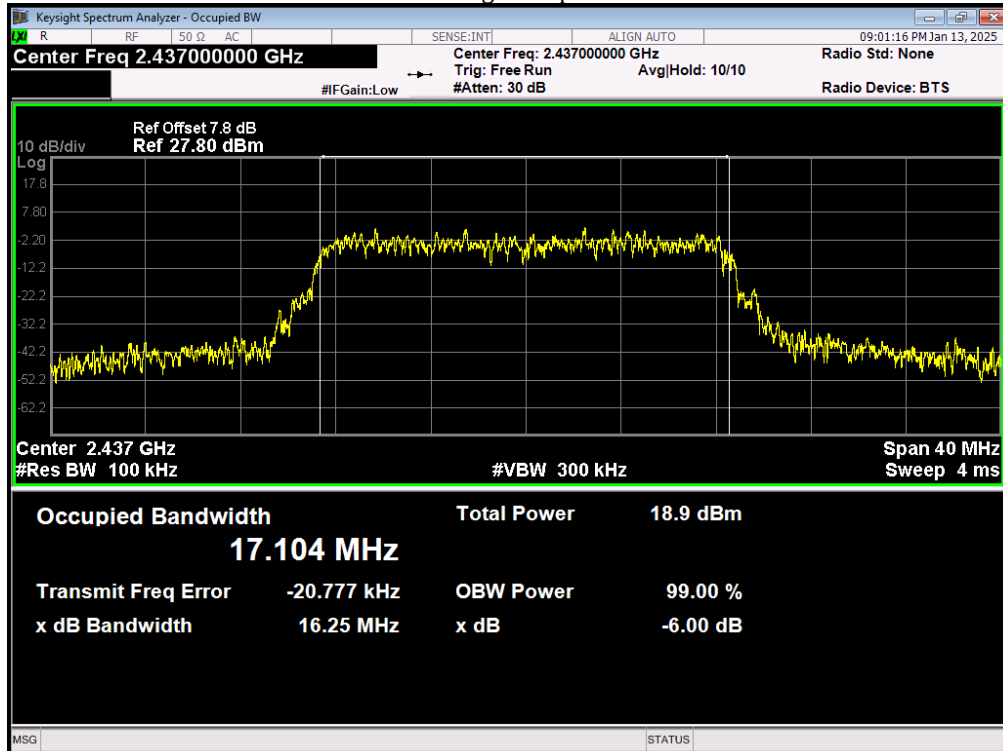


OBW NVNT 802.11g 6Mbps 2462MHz Ant1

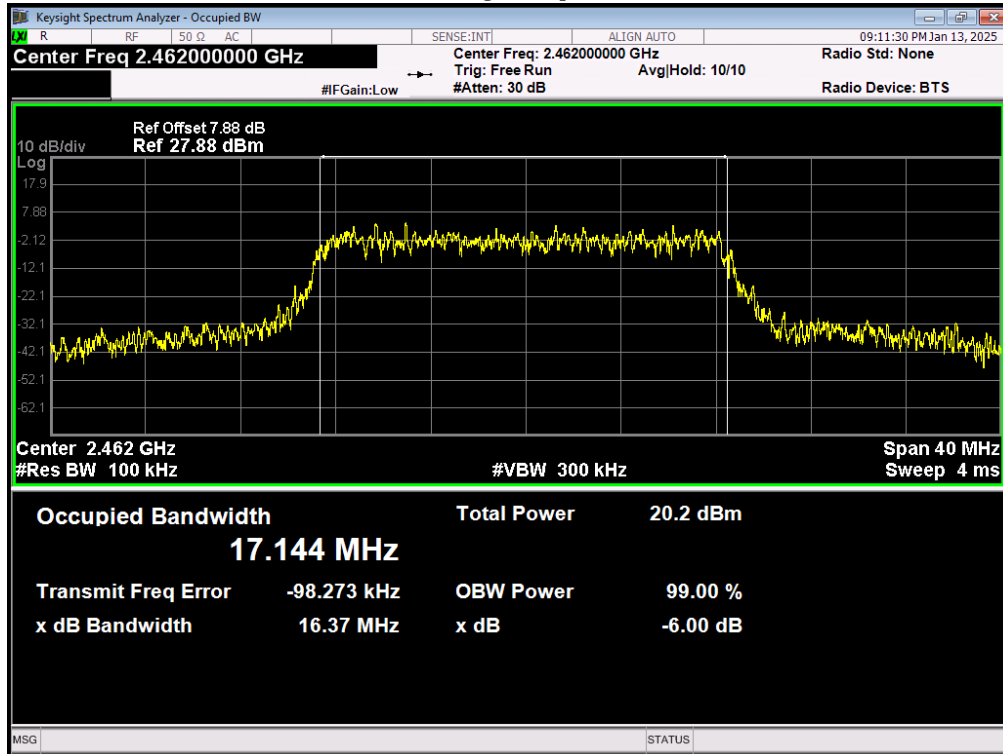


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	802.11n(HT20)	2412	Ant 1	17.0582	16.3109	0.5	Pass
NVNT	802.11n(HT20)	2437	Ant 1	17.1935	16.3558	0.5	Pass
NVNT	802.11n(HT20)	2462	Ant 1	16.9977	16.0653	0.5	Pass


OBW NVNT 802.11n(HT20) 2412MHz Ant1

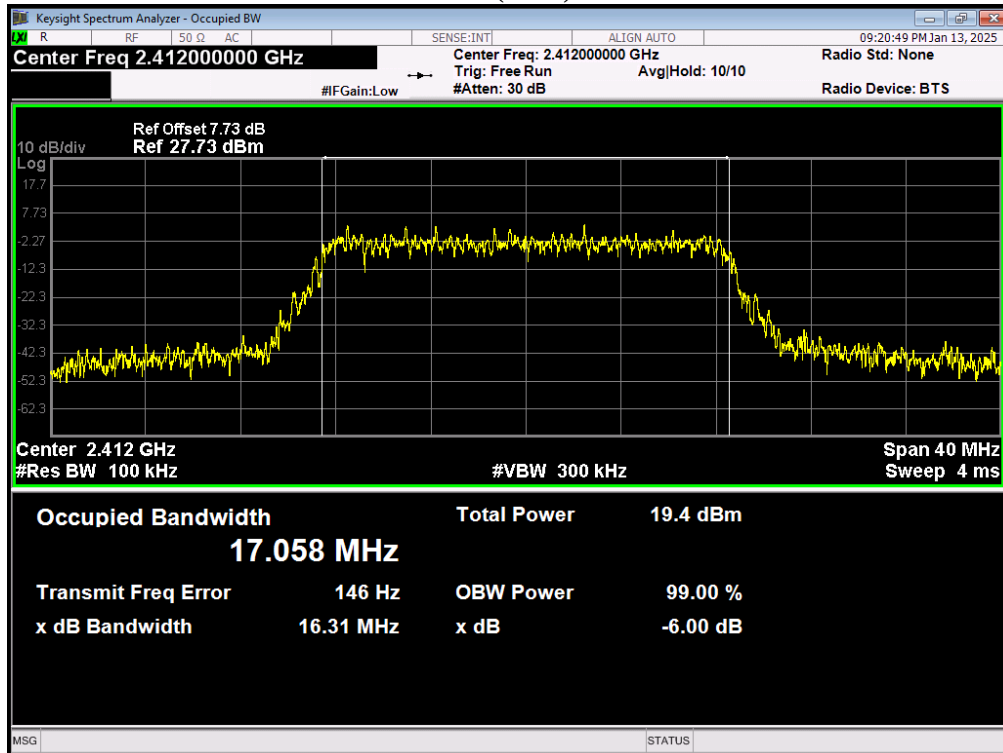

OBW NVNT 802.11n(HT20) 2437MHz Ant1

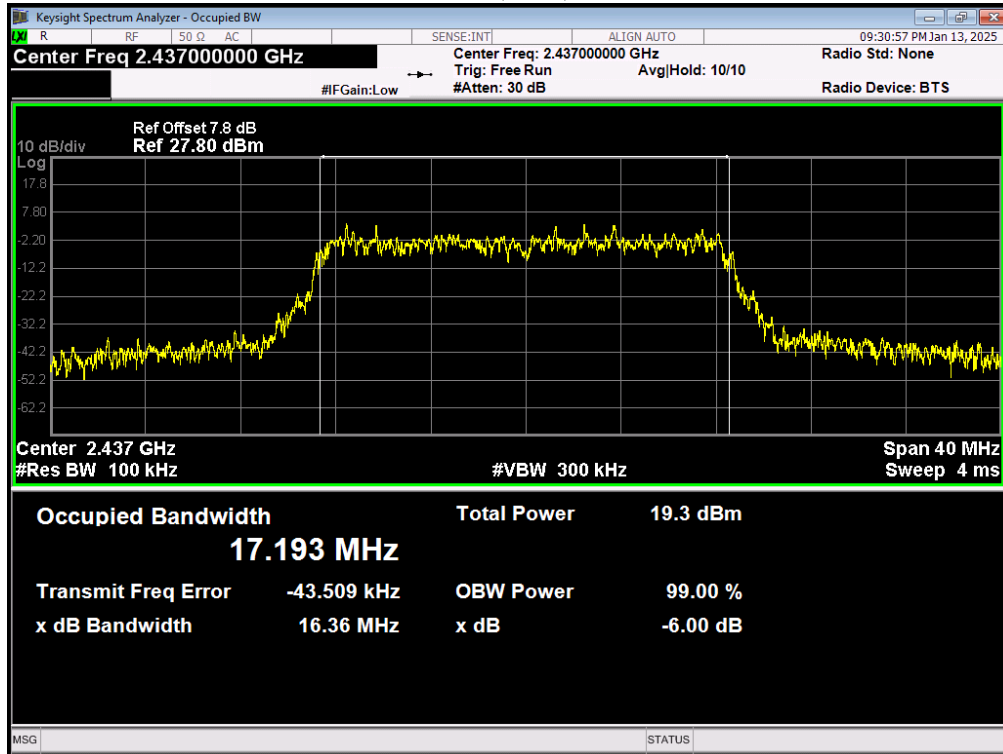

OBW NVNT 802.11n(HT20) 2462MHz Ant1

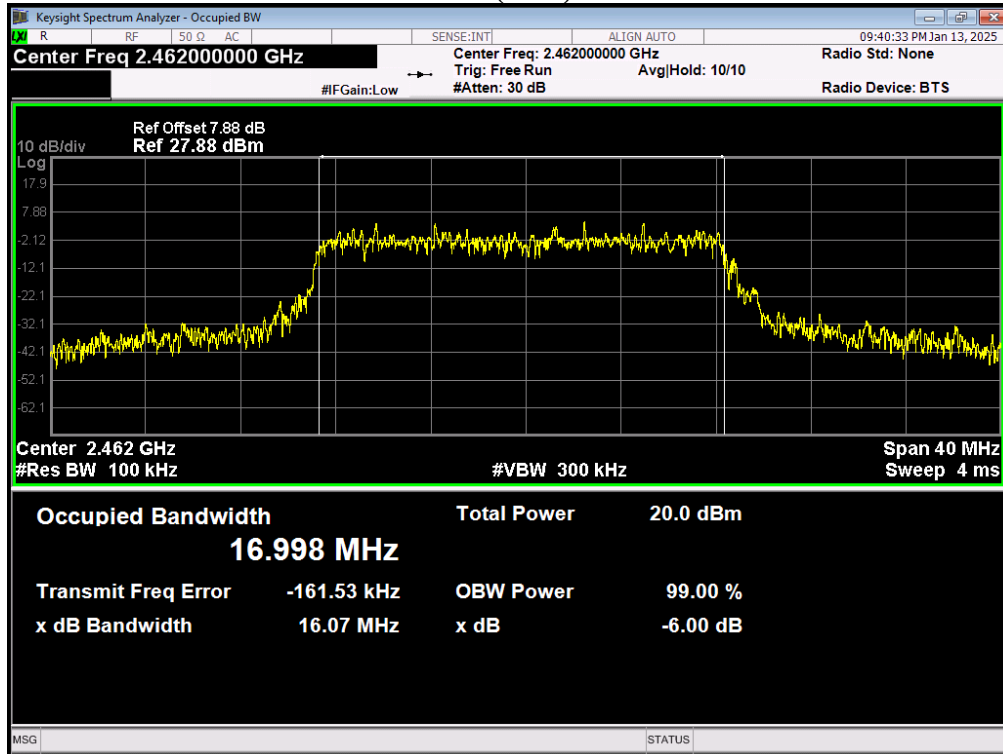


7. Band Edges Measurement

7.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	MXA Signal Analyzer	KEYSIGHT	N9020A	MY54510476	2024/05/14	1 Year

7.2. BLOCK DIAGRAM OF TEST SETUP

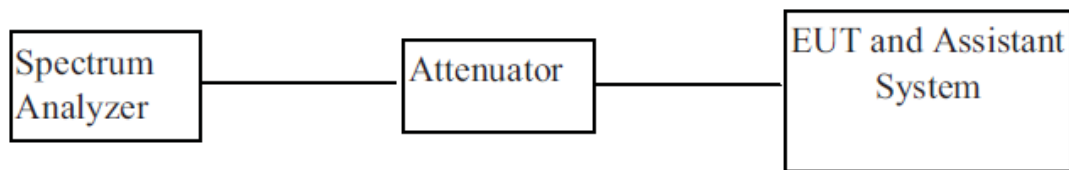

7.3. Limit

Below -30dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.4. Test Procedure

The transmitter output was connected to the spectrum analyzer via a low lose cable.

Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.


Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 30dB relative to the maximum measured in-band peak PSD level.

The band edges was measured and recorded.


7.5. Test result

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11b 1Mbps	2412	Ant 1	-49.891	-30	Pass
NVNT	802.11b 1Mbps	2462	Ant 1	-43.576	-30	Pass


Band Edge NVNT 802.11b 1Mbps 2412MHz Ant1 Ref

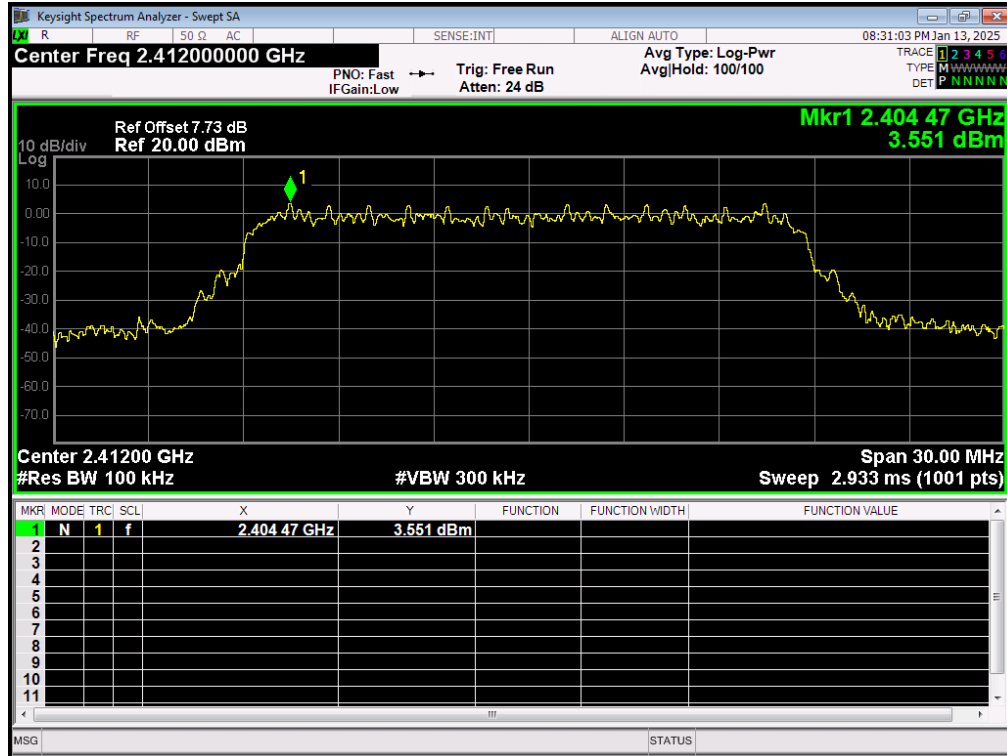


Band Edge NVNT 802.11b 1Mbps 2412MHz Ant1 Emission

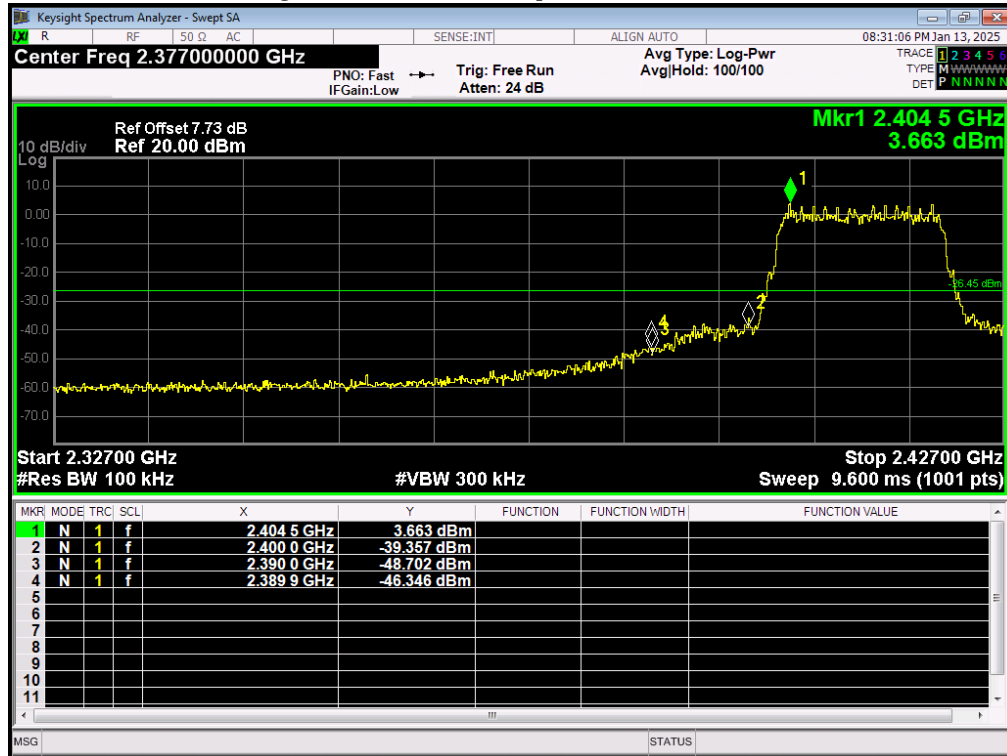

Band Edge NVNT 802.11b 1Mbps 2462MHz Ant1 Ref

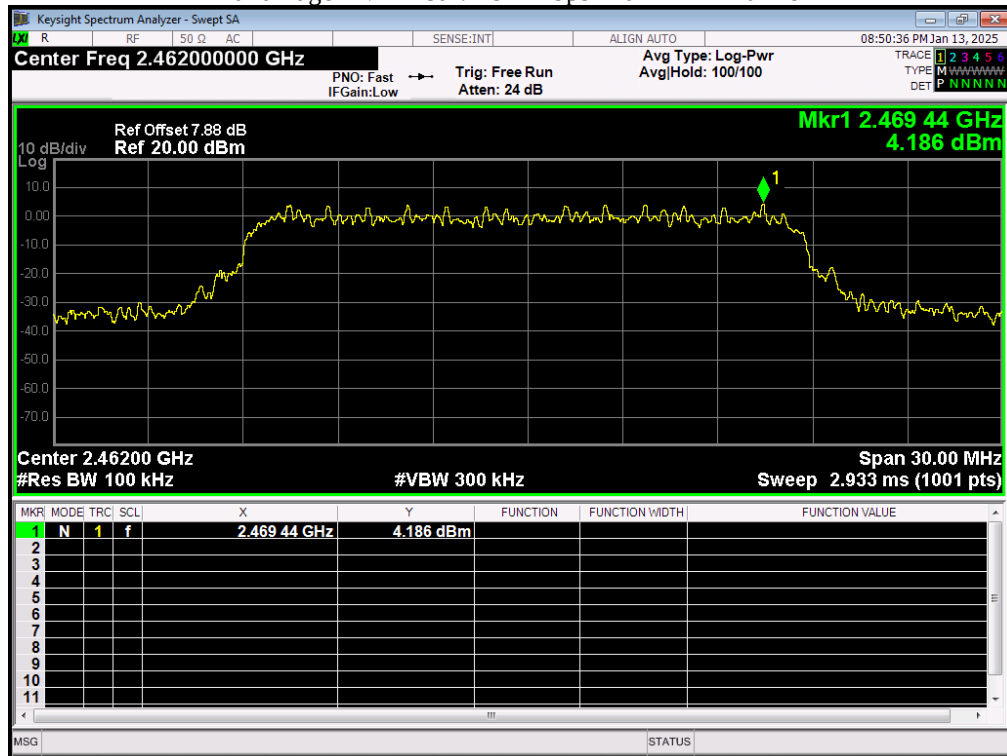


Band Edge NVNT 802.11b 1Mbps 2462MHz Ant1 Emission

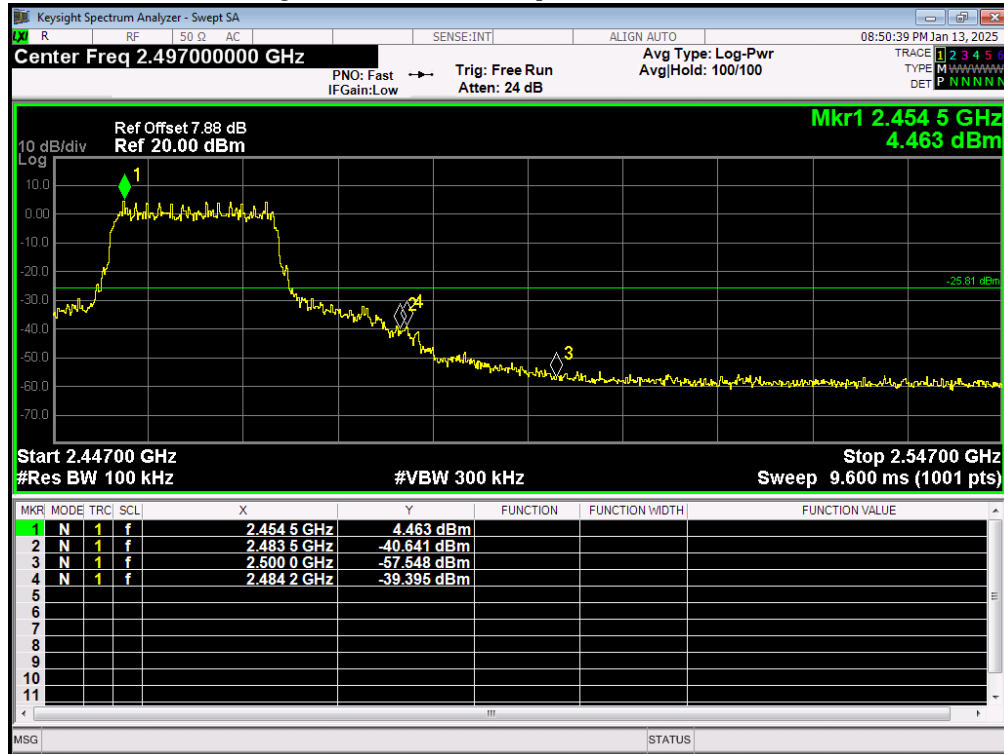


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11g 6Mbps	2412	Ant 1	-50.045	-30	Pass
NVNT	802.11g 6Mbps	2462	Ant 1	-43.142	-30	Pass


Band Edge NVNT 802.11g 6Mbps 2412MHz Ant1 Ref

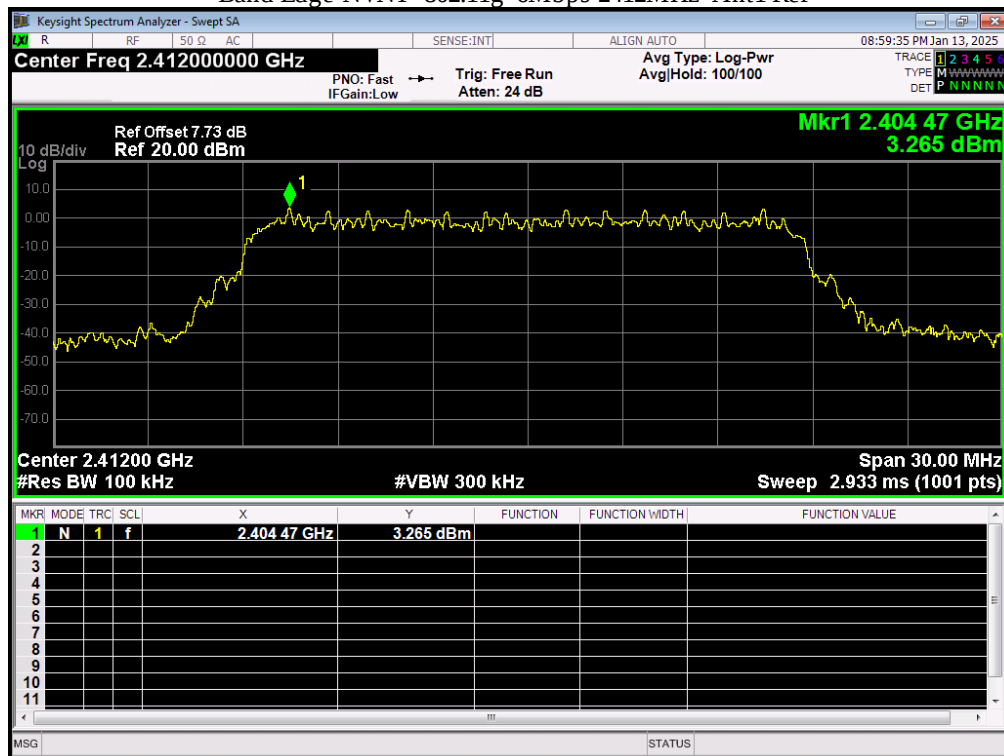


Band Edge NVNT 802.11g 6Mbps 2412MHz Ant1 Emission

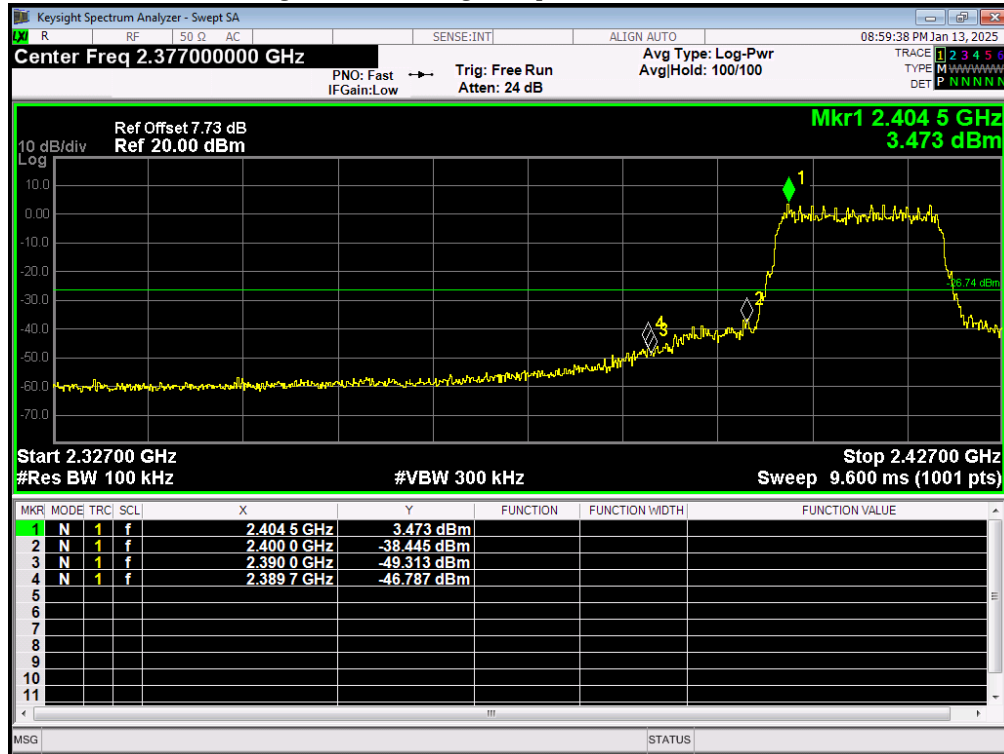

Band Edge NVNT 802.11g 6Mbps 2462MHz Ant1 Ref

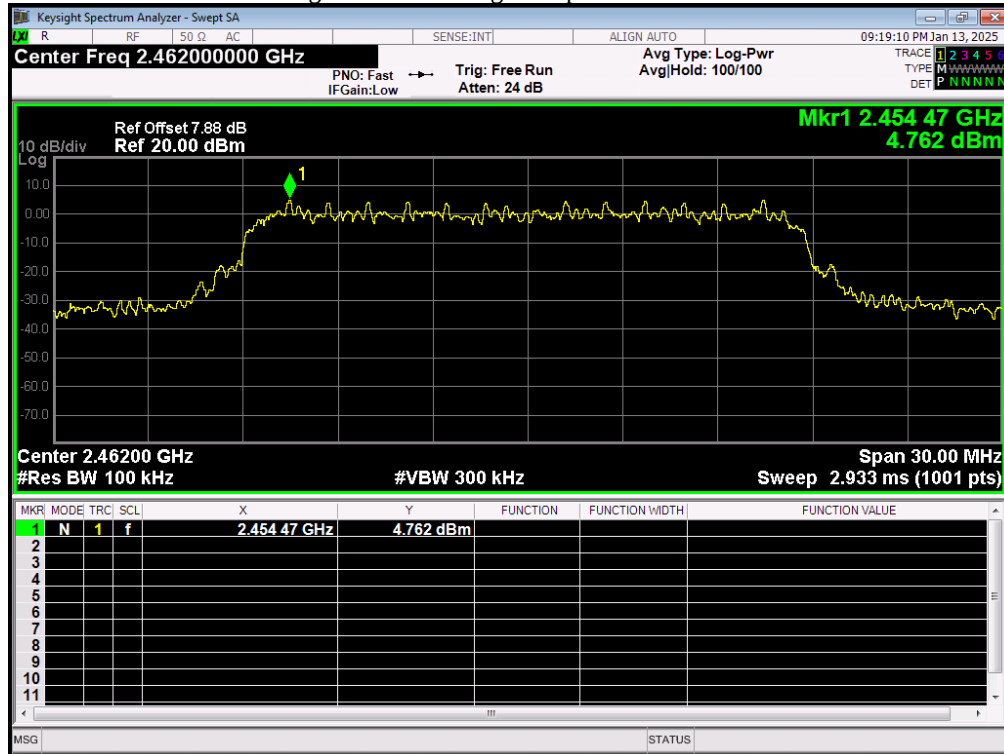


Band Edge NVNT 802.11g 6Mbps 2462MHz Ant1 Emission

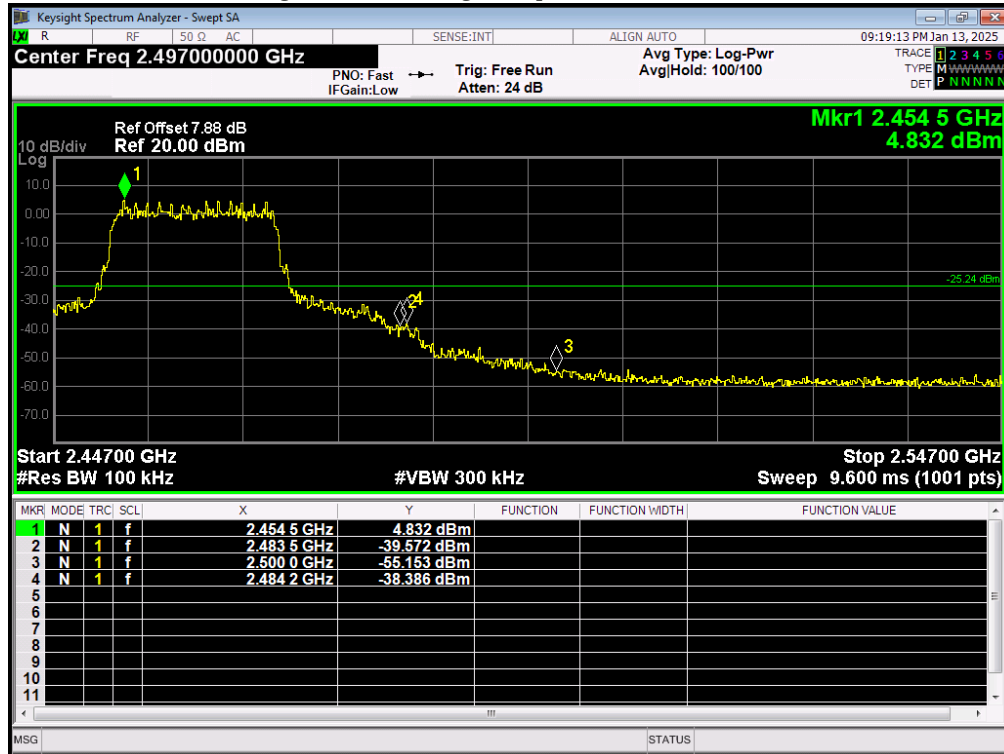


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11n(HT20)	2412	Ant 1	-48.98	-30	Pass
NVNT	802.11n(HT20)	2462	Ant 1	-43.064	-30	Pass


Band Edge NVNT 802.11n(HT20) 2412MHz Ant1 Ref

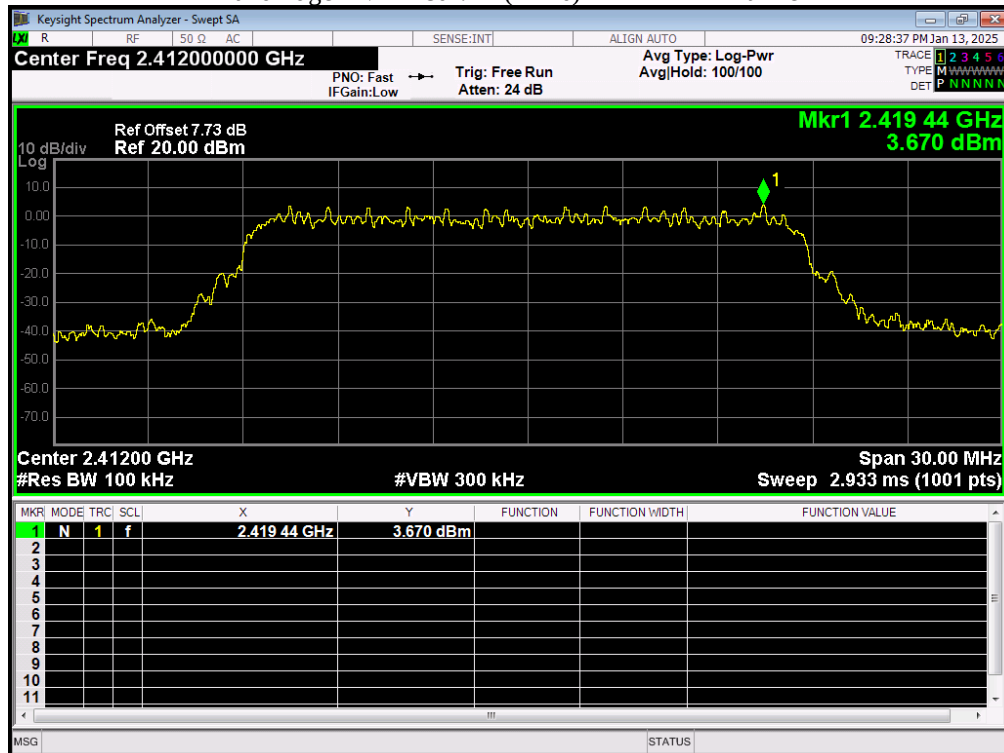


Band Edge NVNT 802.11n(HT20) 2412MHz Ant1 Emission

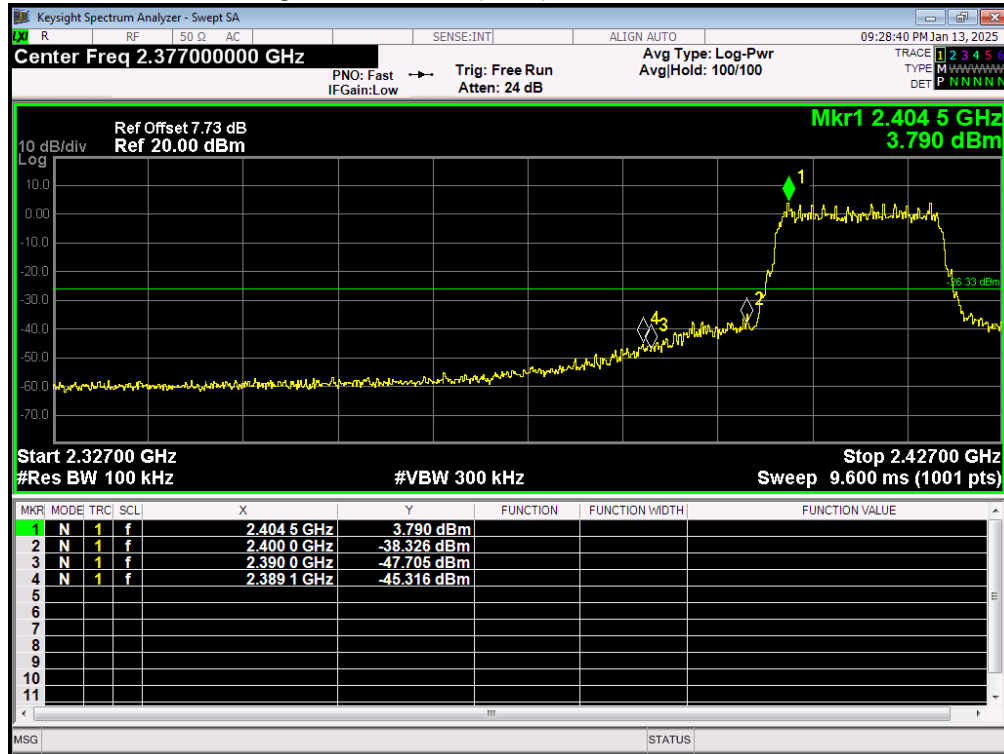

Band Edge NVNT 802.11n(HT20) 2462MHz Ant1 Ref

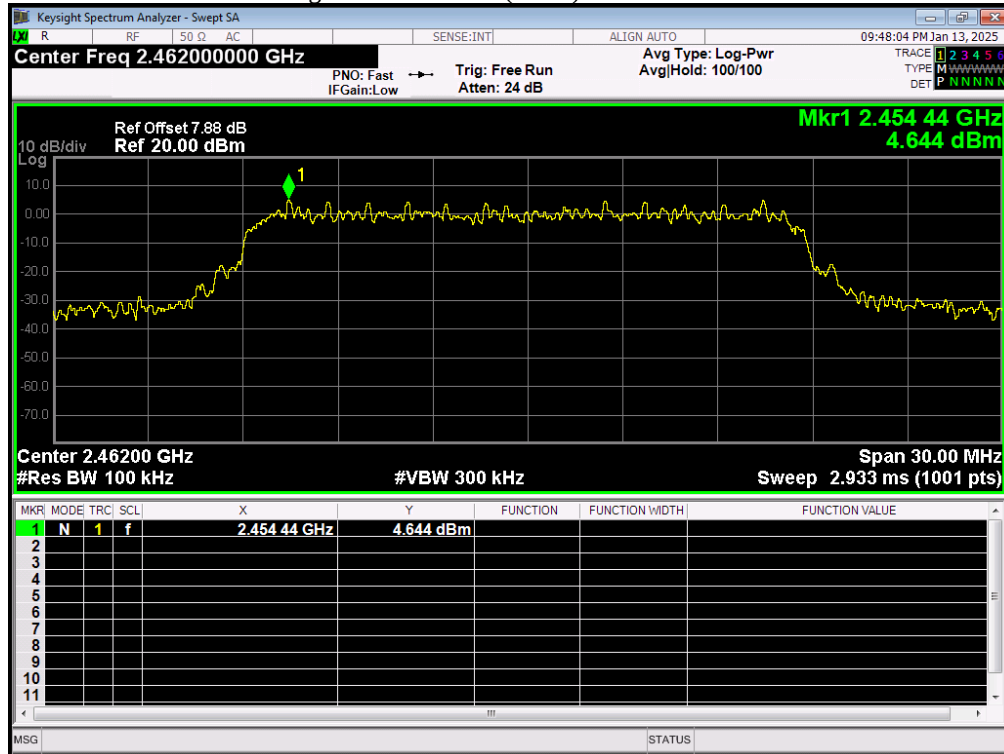

Band Edge NVNT 802.11n(HT20) 2462MHz Ant1 Emission

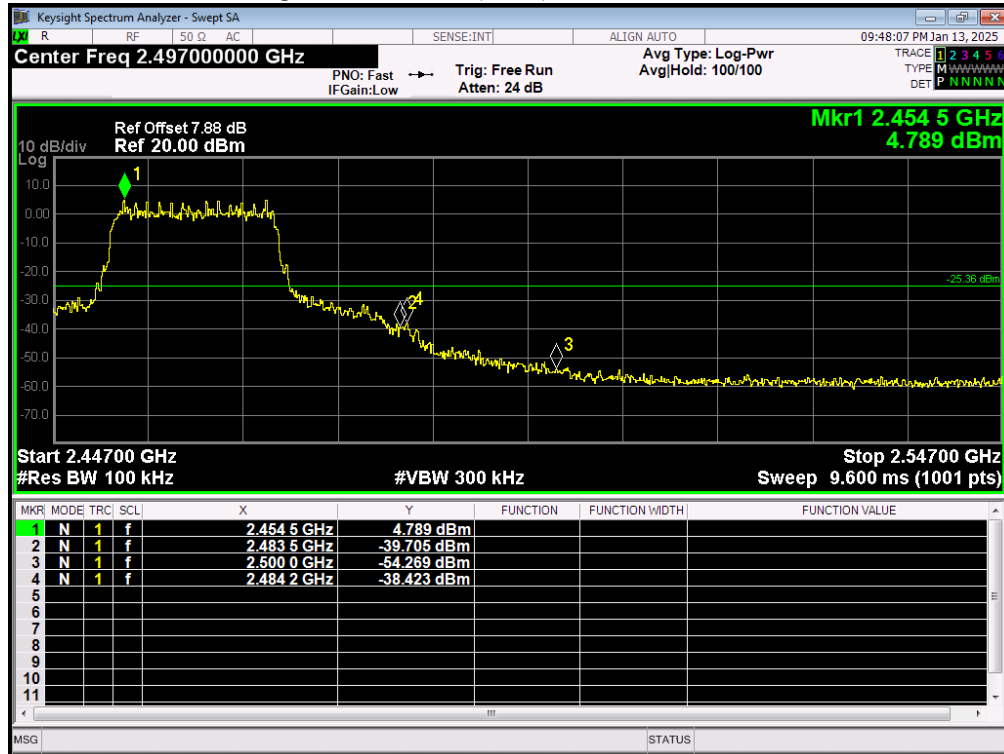


8. Conducted Spurious Emission

8.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	MXA Signal Analyzer	KEYSIGHT	N9020A	MY54510476	2024/05/14	1 Year

8.2. BLOCK DIAGRAM OF TEST SETUP

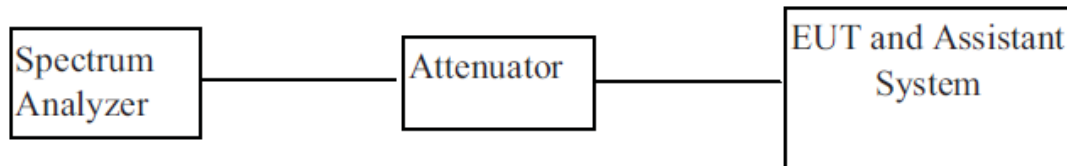

8.3. Limit

In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.

In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a)

8.4. Test Procedure

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW > RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW > RBW) are conform to the requirement.

8.5. Test result

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11b 1Mbps	2412	Ant 1	-44.708	-30	Pass
NVNT	802.11b 1Mbps	2437	Ant 1	-43.778	-30	Pass
NVNT	802.11b 1Mbps	2462	Ant 1	-44.63	-30	Pass

Tx. Spurious NVNT 802.11b 1Mbps 2412MHz Ant1 Ref

