



FCC 47 CFR PART 15 SUBPART C

for

Wireless N USB Adapter 150Mbps HI-Gain

Model: WS-WN622HN1,U12-43871

Brand: ULTRA

Test Report Number:

C140828Z02-RP1

Issued Date: September 12, 2014

Issued for

Winstars Technology Limited

**Block 4, TaiSong Industrial Park, DaLang Street, LongHua Town
Bao'an district, Shenzhen, China**

Issued by:

Compliance Certification Services (Shenzhen) Inc.

No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen, China

TEL: 86-755-28055000

FAX: 86-755-28055221



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	September 12, 2014	Initial Issue	ALL	Sinphy Xie



TABLE OF CONTENTS

1 TEST CERTIFICATION	4
2 TEST RESULT SUMMARY	5
3 EUT DESCRIPTION	6
4 TEST METHODOLOGY	7
4.1. DESCRIPTION OF TEST MODES	7
5 SETUP OF EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF SUPPORT UNITS	8
5.2. CONFIGURATION OF SYSTEM UNDER TEST	8
6 FACILITIES AND ACCREDITATIONS	9
6.1. FACILITIES	9
6.2. ACCREDITATIONS	9
6.3. MEASUREMENT UNCERTAINTY	9
7 FCC PART 15.247 REQUIREMENTS	10
7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT	10
7.2. SPURIOUS EMISSIONS MEASUREMENT	14
7.3. 6dB BANDWIDTH MEASUREMENT	46
7.4. PEAK OUTPUT POWER	56
7.5. BAND EDGES MEASUREMENT	60
7.6. PEAK POWER SPECTRAL DENSITY MEASUREMENT	78



1 TEST CERTIFICATION

Product	Wireless N USB Adapter 150Mbps HI-Gain
Model	WS-WN622HN1,U12-43871
Brand	ULTRA
Tested	August 28~ September 11, 2014
Applicant	Winstars Technology Limited Block 4, TaiSong Industrial Park, DaLang Street, LongHua Town, Bao'an district, Shenzhen, China
Manufacturer	Winstars Technology Limited Block 4, TaiSong Industrial Park, DaLang Street, LongHua Town, Bao'an district, Shenzhen, China

APPLICABLE STANDARDS			
Standard	Test Type	Standard	Test Type
15.207(a)	Power Line Conducted Emissions	15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions
15.247(a)(2)	6dB Bandwidth Measurement	15.247(b)(3) 15.247(b)(4)	Peak Power Measurement
15.247(d)	Band Edges Measurement	15.247(e)	Peak Power Spectral Density

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2009** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Sunday Hu
Supervisor of EMC Dept.
Compliance Certification Service Inc.

Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Service Inc.



2 TEST RESULT SUMMARY

APPLICABLE STANDARDS			
Standard	Test Type	Result	Remark
15.247(a)(2)	6dB Bandwidth Measurement	Pass	Meet the requirement of limit.
15.247(b)(3) 15.247(b)(4)	Peak Power Measurement	Pass	Meet the requirement of limit.
15.247(d)	Band Edges Measurement	Pass	Meet the requirement of limit.
15.247(e)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions	Pass	Meet the requirement of limit.
15.207(a)	Power line Conducted Emissions	Pass	Meet the requirement of limit.

Note: 1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.

2. The information of measurement uncertainty is available upon the customer's request.



3 EUT DESCRIPTION

Product	Wireless N USB Adapter 150Mbps HI-Gain
Model Number	WS-WN622HN1,U12-43871
Brand	ULTRA
Model Discrepancy	All models are identical to each other except for market designation for marketing purpose.
Buyer	Streak Products Inc.
Serial Number	C140828Z02-RP1
Received Date	August 28, 2014
Power Supply	DC5V power from the notebook
USB Cable	Shielded, 1.00m
Transmit Power	Peak: IEEE 802.11b mode: 21.12dBm Average : IEEE 802.11b mode: 18.29dBm Peak: IEEE 802.11g mode: 25.18dBm Average: IEEE 802.11g mode: 16.75dBm Peak: IEEE 802.11n HT20 MHz mode: 25.40dBm Average: IEEE 802.11n HT20 MHz mode: 16.41dBm Peak: IEEE 802.11n HT40 MHz mode: 25.54dBm Average: IEEE 802.11n HT40 MHz mode: 16.64dBm
Modulation Technique	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT20 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT40 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM)
Transmit Data Rate	IEEE 802.11b: 11Mbps(CCK) with fall back rates of 5.5/2/1Mbps IEEE 802.11g: 54Mbps with fall back rates of 48/36/24/18/12/9 /6Mbps IEEE 802.11n HT20: 65.0Mbps with fall back rates of 65.0/58.5/52.0/39.0/ 26.0/19.5/13.0/6.5 Mbps IEEE 802.11n HT40: 270Mbps with fall back rates of 135/121.5/108/81/54/ 40.5/27/13.5Mbps
Number of Channels	IEEE 802.11b mode: 11 Channels IEEE 802.11g mode: 11 Channels IEEE 802.11n HT20 MHz mode: 11 Channels IEEE 802.11n HT40 MHz mode: 7 Channels
Antenna Specification	Dipole Antenna with 5dBi gain (Max)
Channels Spacing	IEEE 802.11b/g ,802.11n HT20/HT40 : 5MHz
Temperature Range	0°C ~ +40°C
Hardware Version	WS-WN622HN1-B1
Software Version	RT3x7xQA

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for FCC ID: NZ3-WSWN622HN1 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



4 TEST METHODOLOGY

4.1. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Nomal	Mode 1
Radiated Emission	Mode 1: TX	Mode 1

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only, and power line conducted emission below 30MHz, which worst case was in normal link mode.

IEEE802.11b mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High(2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE802.11g mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT20 MHz mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT40 MHz mode: Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



5 SETUP OF EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	PC	Dcsmif	805CV2X	N/A	DELL	N/A	Unshielded 1.80m
2	Keyboard	PR1101V	539130-001	N/A	DELL	Shielded 1.50m	N/A
3	Monitor	P170SB	CNCXW91FOA BOU8S	N/A	DELL	Shielded 1.50m	Unshielded 2.00m
4	Printer	DESKJETD1668	CB767-0008	N/A	HP	Shielded 1.40m	Unshielded 1.50m
5	Modem	DU-562M	DU562MSG.B1	N/A	N/A	Shielded 1.50m	N/A
6	Mouse	WB365PA#AB2	2HTJMB101178 -317	N/A	DELL	Shielded 1.45m	N/A
7	Notebook	B475	W1304861612	N/A	Lenovo	Unshielded 1.50M	Unshielded 1.50M

Note:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



6 FACILITIES AND ACCREDITATIONS

6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at **No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-3478, R-3135, T-652, G-624)
Canada	INDUSTRY CANADA
Taiwan	BSMI
Norway	Nemko

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



7 FCC PART 15.247 REQUIREMENTS

7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

7.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

7.1.2. TEST INSTRUMENTS

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2014	03/08/2015
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	04/20/2014	04/19/2015
LISN	EMCO	3825/2	8901-1459	03/09/2014	03/08/2015
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2014	03/03/2015
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. N.C.R = No Calibration Request.




7.1.3. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.



7.1.4. TEST SETUP

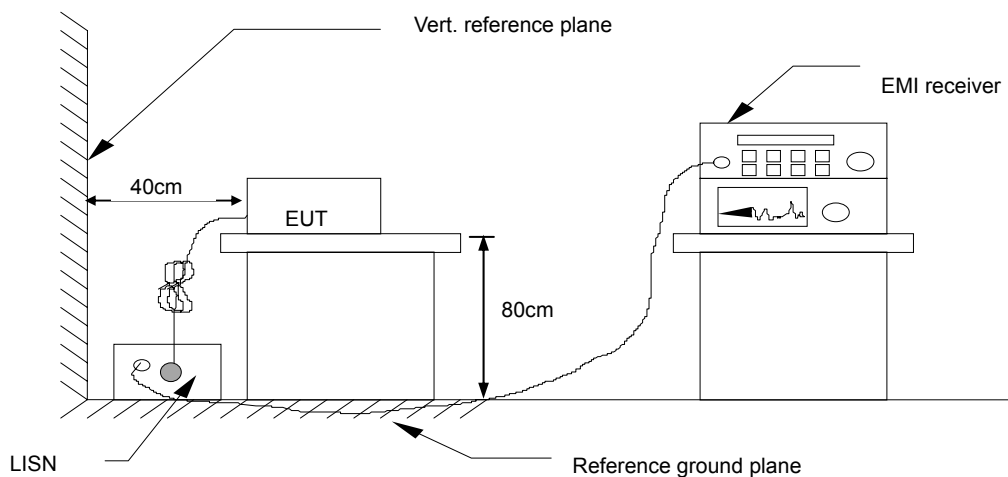

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

7.1.5. DATA SAMPLE

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XXXX	32.69	25.65	11.52	44.21	37.17	65.78	55.79	-21.57	-18.62	Pass

Factor = Insertion loss of LISN + Cable Loss
Result = Quasi-peak Reading/ Average Reading + Factor
Limit = Limit stated in standard
Margin = Result (dBuV) – Limit (dBuV)

**7.1.6. TEST RESULTS**

Model No.	WS-WN622HN1	RBW,VBW	9 kHz
Environmental Conditions	26°C, 60% RH	Test Mode	Mode 1
Tested by	Sun Guo	Line	L1
Test Date	2014/08/29		

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	32.09	20.16	9.58	41.67	29.74	65.99	56.00	-24.32	-26.26	Pass
0.1980	25.99	21.12	9.69	35.68	30.81	63.69	53.69	-28.01	-22.88	Pass
0.7620	22.95	16.79	9.77	32.72	26.56	56.00	46.00	-23.28	-19.44	Pass
3.1820	32.53	20.31	9.71	42.24	30.02	56.00	46.00	-13.76	-15.98	Pass
3.4740	31.97	20.04	9.70	41.67	29.74	56.00	46.00	-14.33	-16.26	Pass
14.4060	27.30	14.66	9.91	37.21	24.57	60.00	50.00	-22.79	-25.43	Pass

Model No.	WS-WN622HN1	RBW,VBW	9 kHz
Environmental Conditions	26°C, 60% RH	Test Mode	Mode 1
Tested by	Sun Guo	Line	L2
Test Date	2014/08/29		

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	33.36	22.15	9.78	43.14	31.93	65.99	56.00	-22.85	-24.07	Pass
0.1980	25.71	20.72	9.79	35.50	30.51	63.69	53.69	-28.19	-23.18	Pass
0.2620	25.66	21.08	9.77	35.43	30.85	61.36	51.37	-25.93	-20.52	Pass
0.7580	23.12	16.86	9.71	32.83	26.57	56.00	46.00	-23.17	-19.43	Pass
3.3980	25.32	12.69	9.75	35.07	22.44	56.00	46.00	-20.93	-23.56	Pass
14.3020	23.69	7.32	9.73	33.42	17.05	60.00	50.00	-26.58	-32.95	Pass

REMARKS: L1 = Line One (Live Line)

L2 = Line Two (Neutral Line)



7.2. SPURIOUS EMISSIONS MEASUREMENT

7.2.1. CONDUCTED EMISSIONS MEASUREMENT

7.2.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.2.1.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015

7.2.1.3. TEST PROCEDURE (please refer to measurement standard)

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.




7.2.1.4. TEST RESULTS


Test Plot

IEEE 802.11b mode

CH Low (30MHz ~26.5GHz)

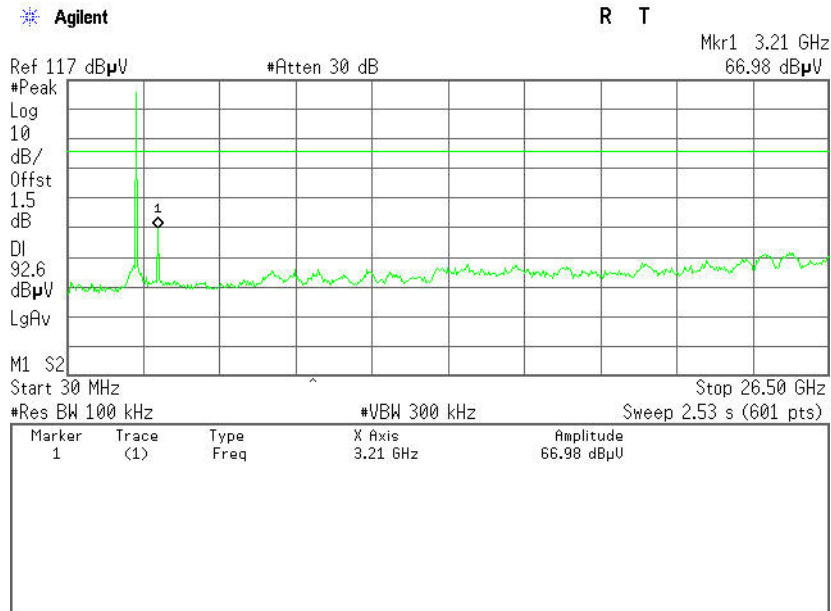


CH Low (2.31GHz ~2.43GHz)

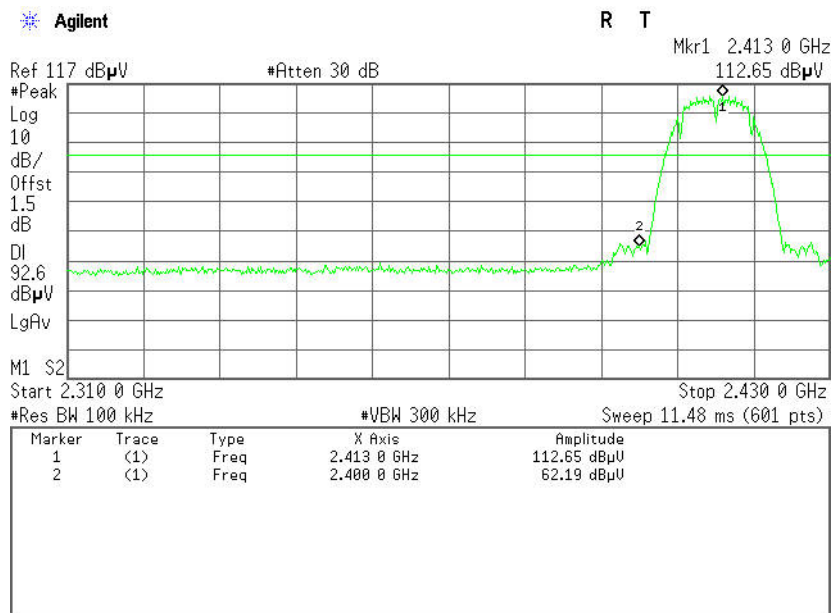




CH Mid (30MHz ~26.5GHz)

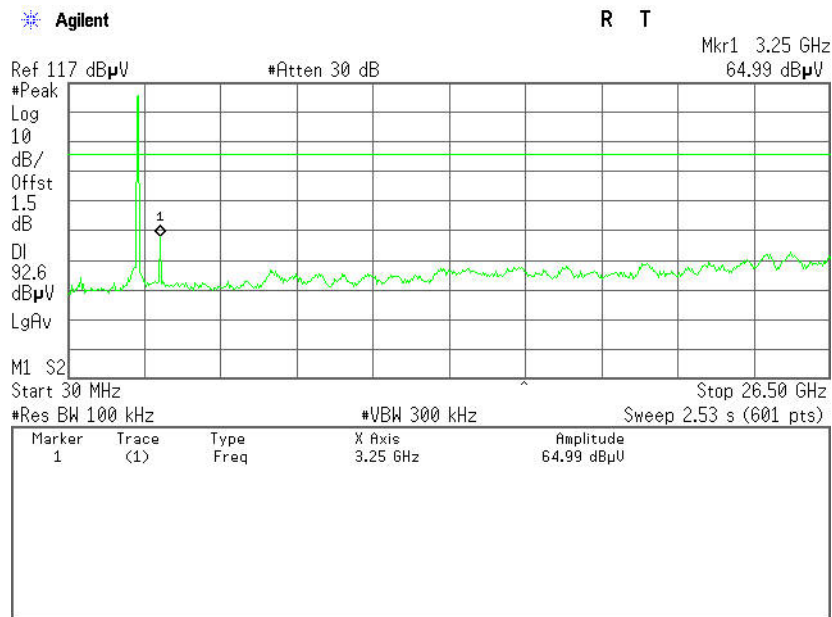




CH High (30MHz ~26.5GHz)

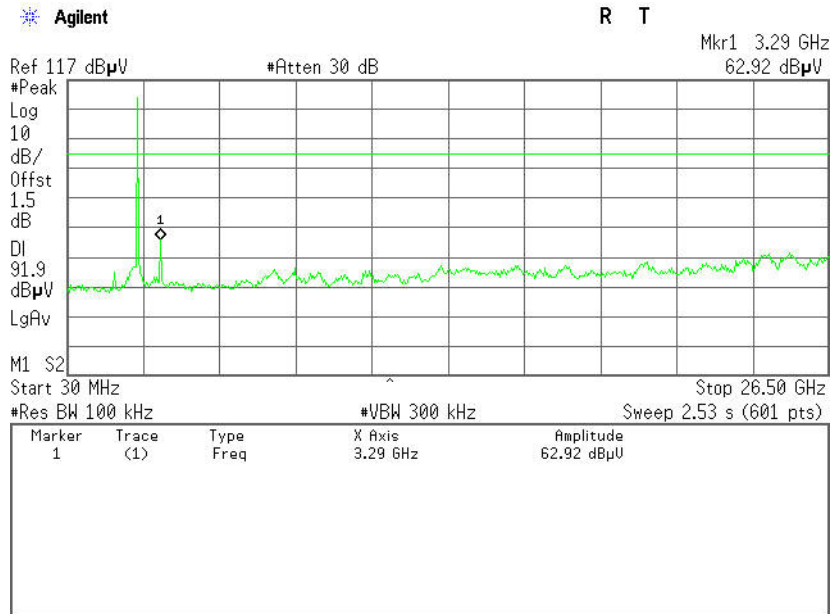


CH High (2.45GHz ~2.5GHz)

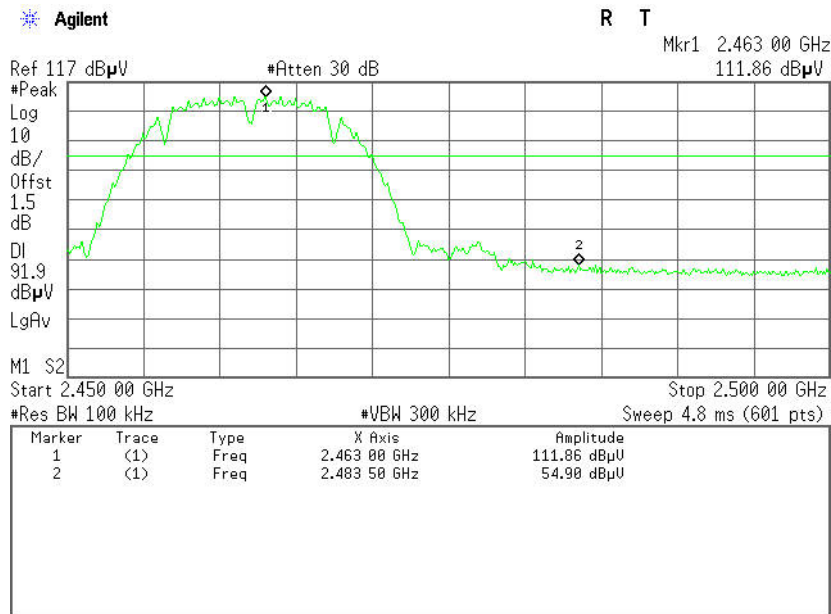




IEEE 802.11g mode

CH Low (30MHz ~26.5GHz)

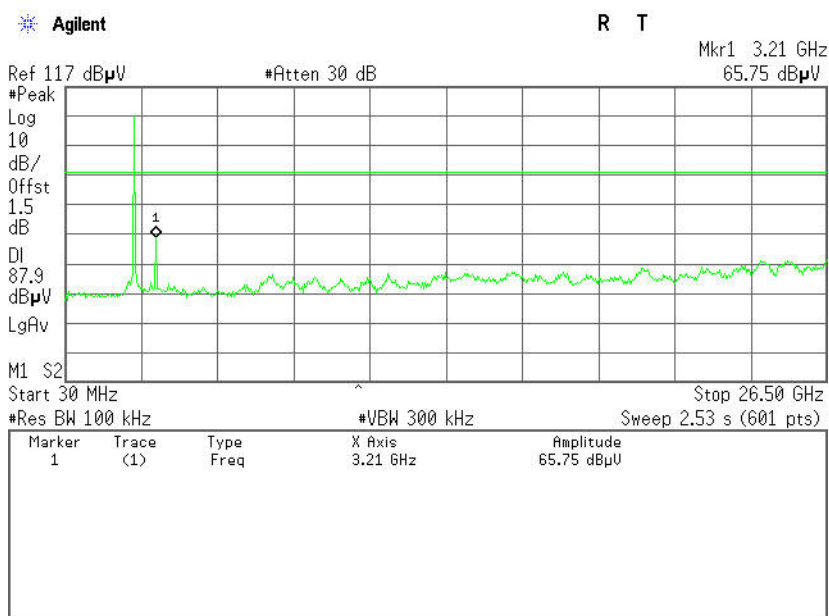


CH Low (2.31GHz ~2.43GHz)

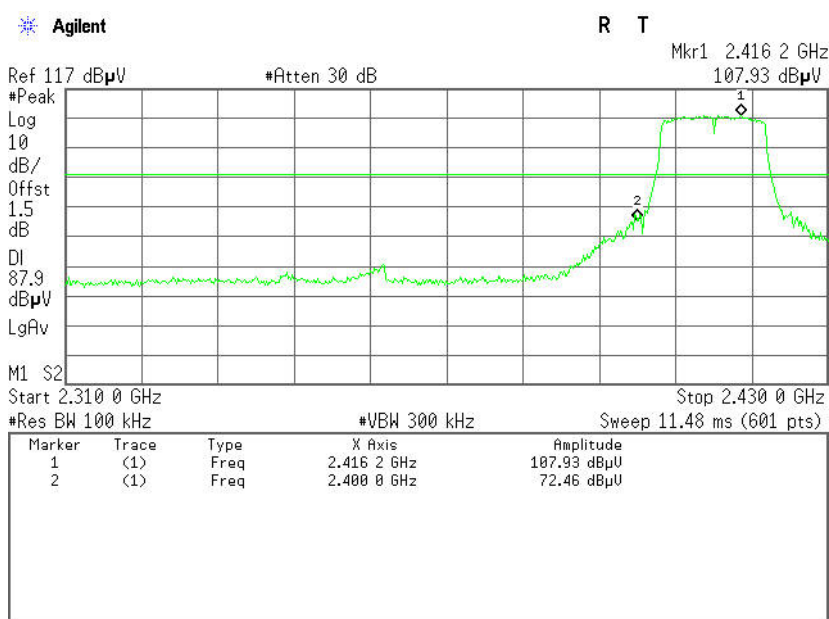




CH Mid (30MHz ~26.5GHz)

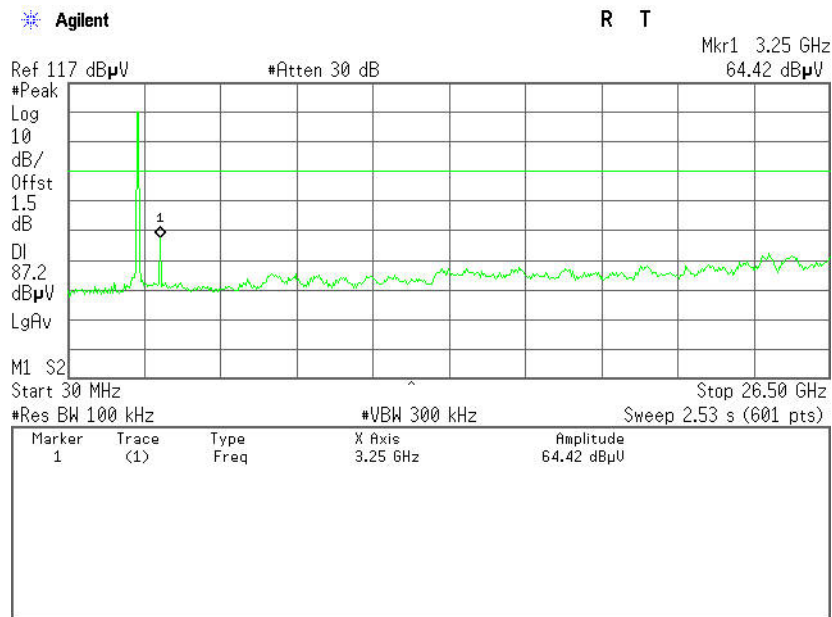




CH High (30MHz ~26.5GHz)

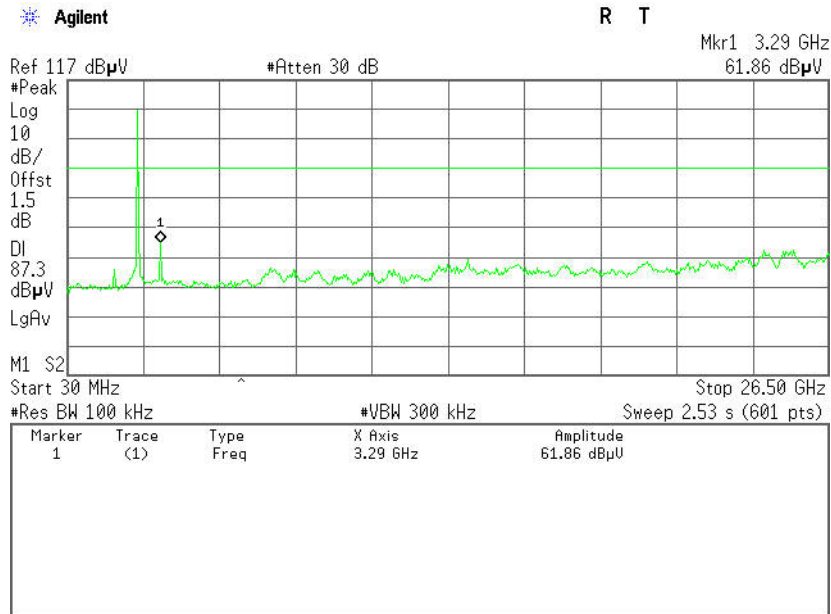


CH High (2.45GHz ~2.5GHz)

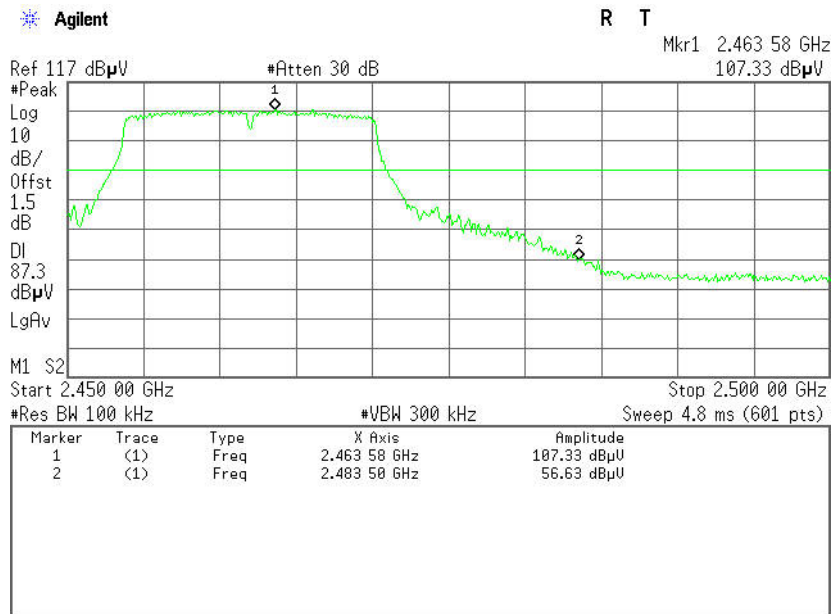




IEEE 802.11n HT20 MHz mode

CH Low (30MHz ~26.5GHz)

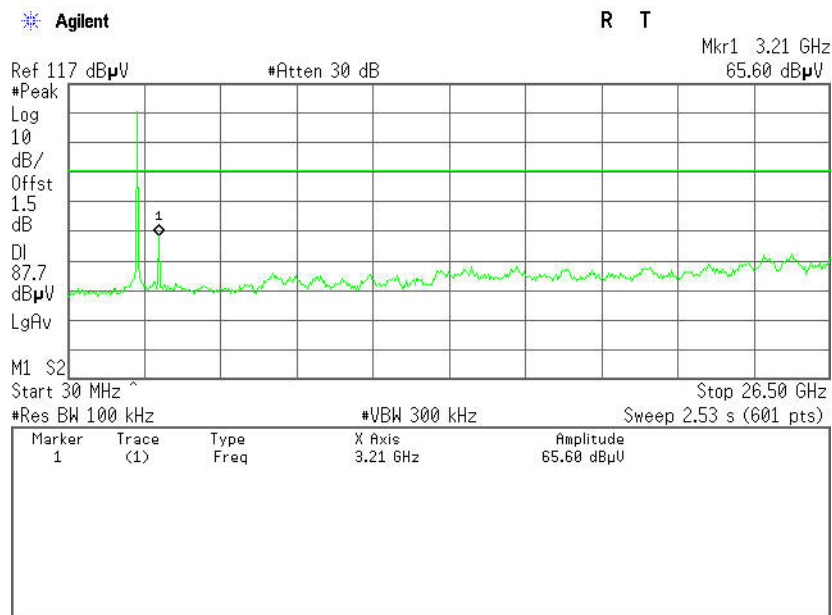


CH Low (2.31GHz ~2.43GHz)

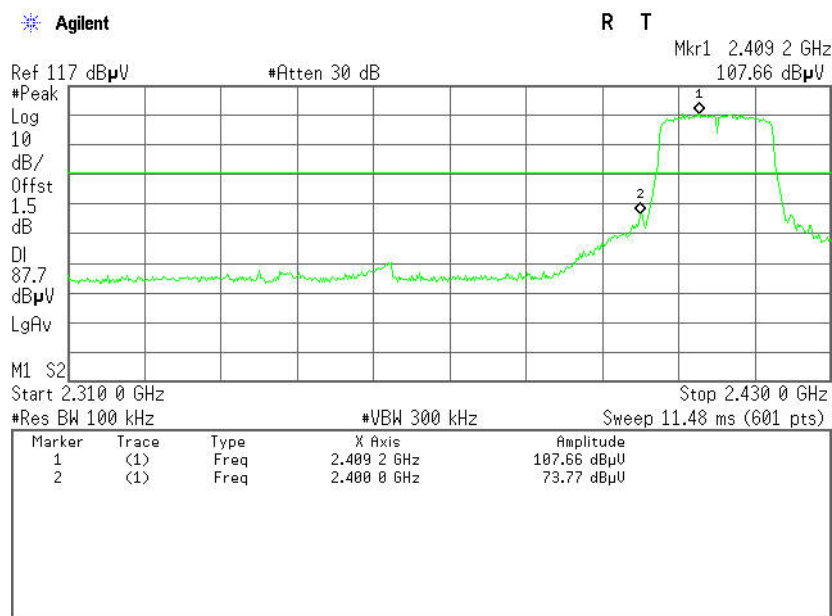




CH Mid (30MHz ~26.5GHz)

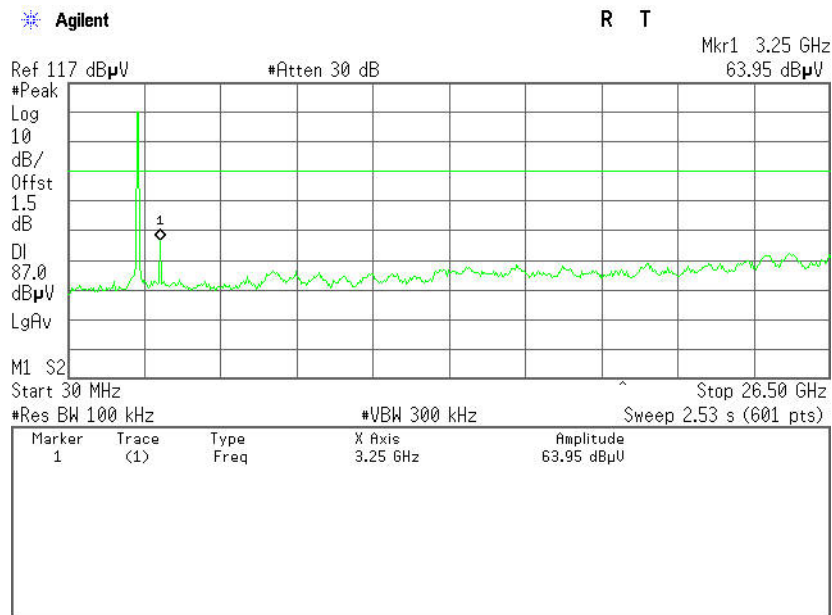




CH High (30MHz ~26.5GHz)

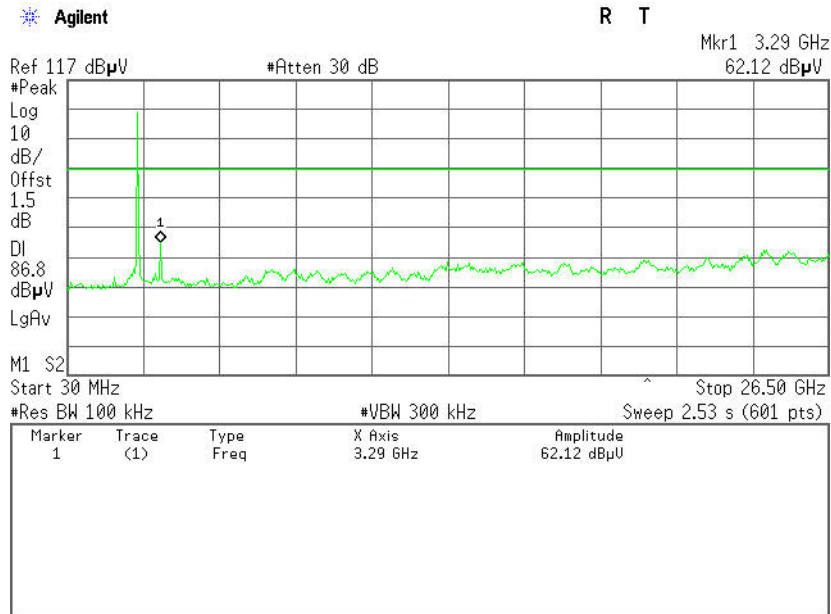


CH High (2.45GHz ~2.5GHz)

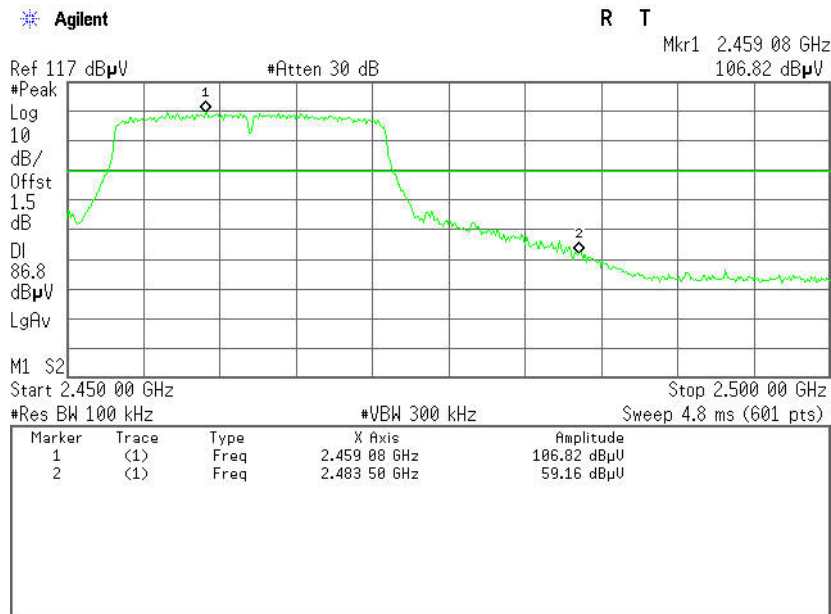




IEEE 802.11n HT40 MHz mode

CH Low (30MHz ~26.5GHz)

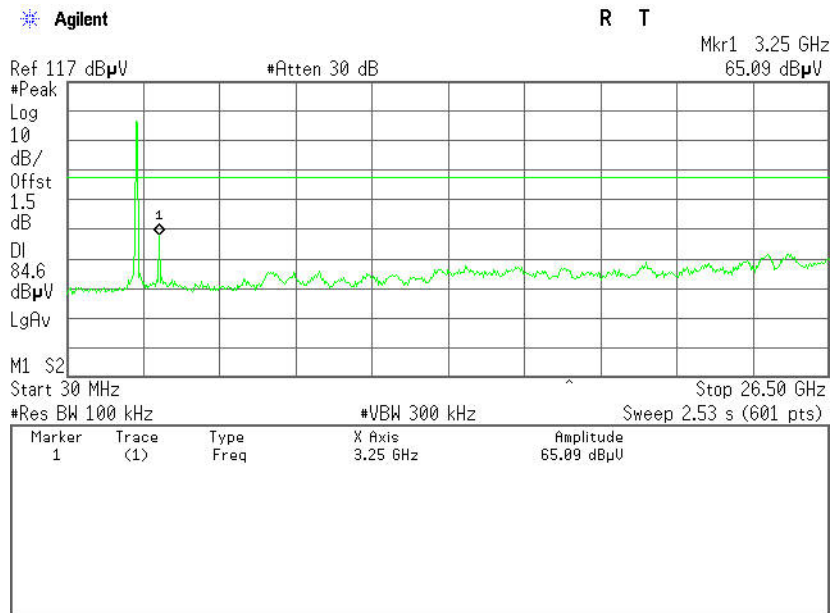


CH Low (2.31GHz ~2.45GHz)

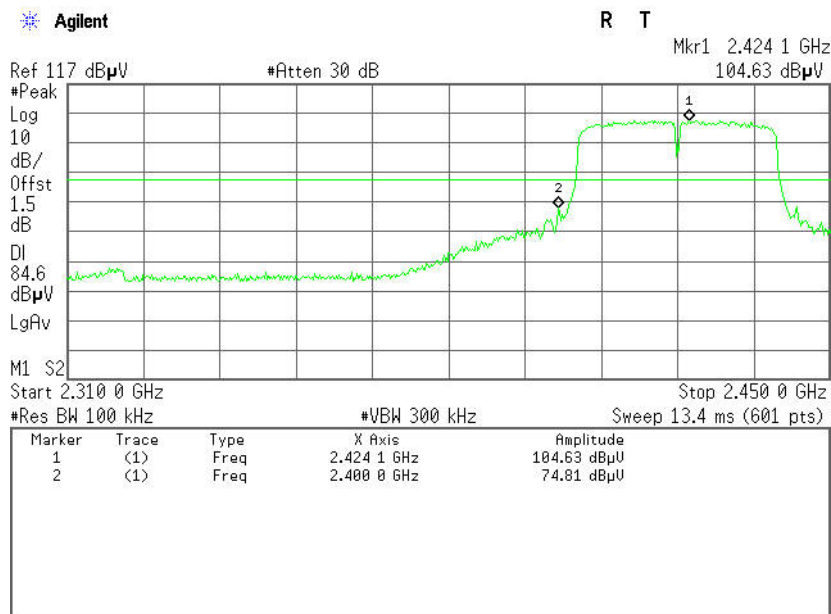




CH Mid (30MHz ~26.5GHz)

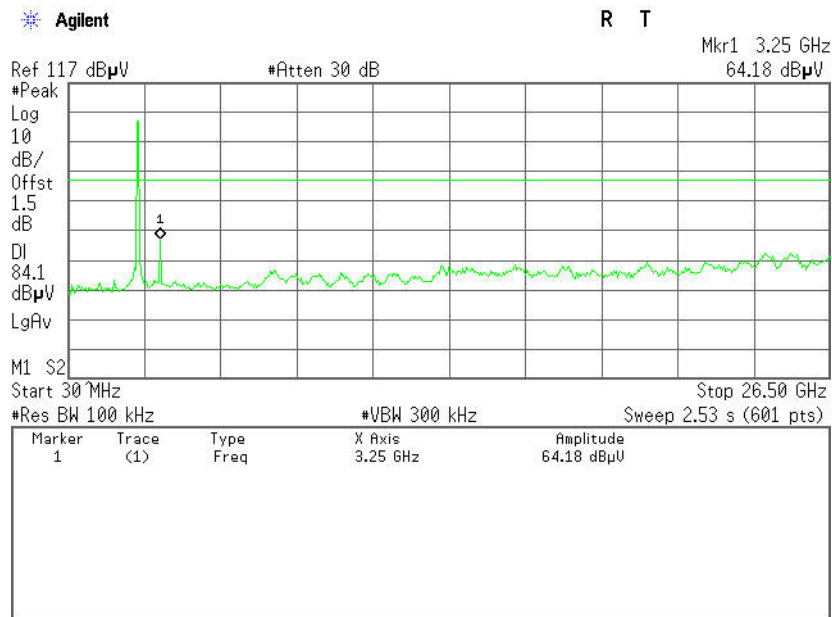




CH High (30MHz ~26.5GHz)

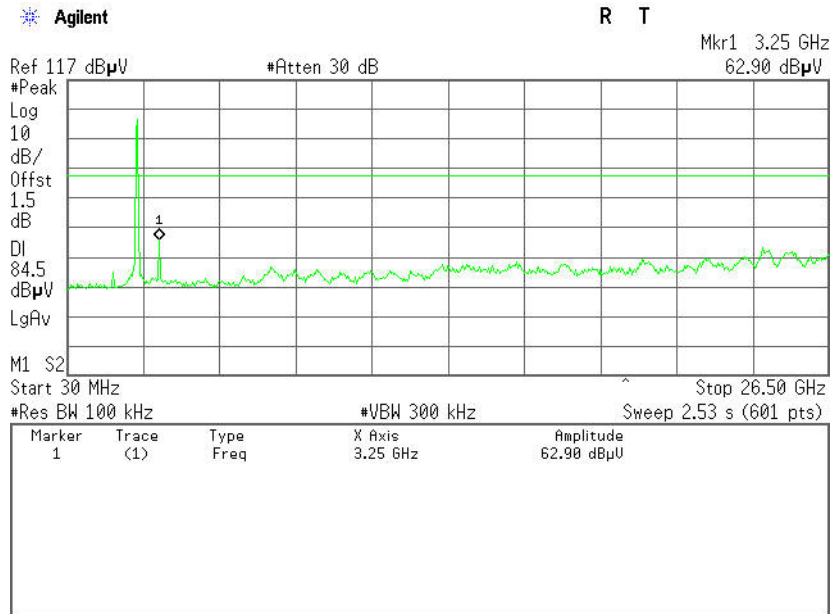

CH High (2.43GHz ~2.5GHz)

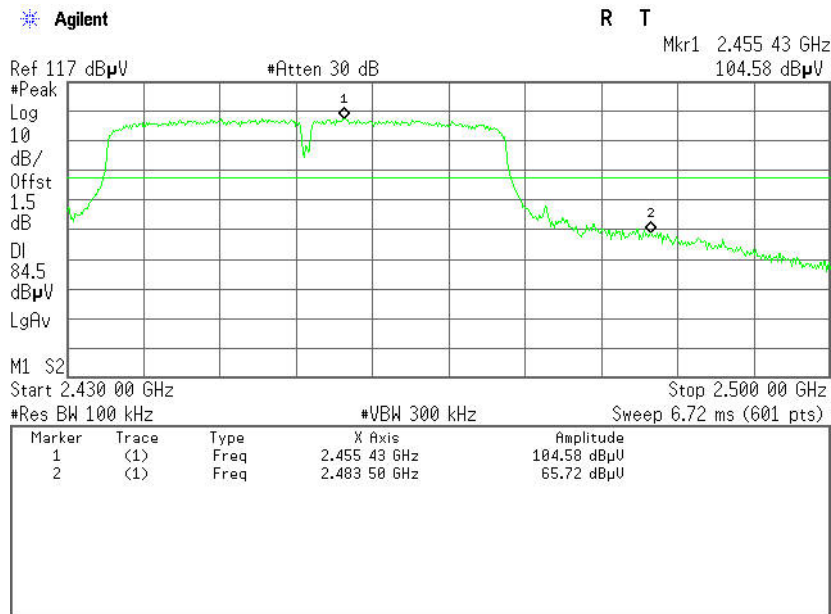

**7.2.2. RADIATED EMISSIONS MEASUREMENT****7.2.2.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT**

According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

1. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength ($\text{dB}\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level ($\text{dB}\mu\text{V/m}$) = $20 \log$ Emission level ($\mu\text{V/m}$).

**7.2.2.2. TEST INSTRUMENTS**

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2014	03/08/2015
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2014	03/18/2015
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2014	03/18/2015
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2014	07/09/2015
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2014	03/01/2015
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2014	03/01/2015
Loop Antenna	A、R、A	PLA-1030/B	1029	09/27/2013	09/26/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2014	02/28/2015
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The FCC Site Registration number is 101879.
3. N.C.R = No Calibration Required.




7.2.2.3. TEST PROCEDURE (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=1MHz,VBW=3MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.




7.2.2.4. TEST SETUP

Below 30MHz

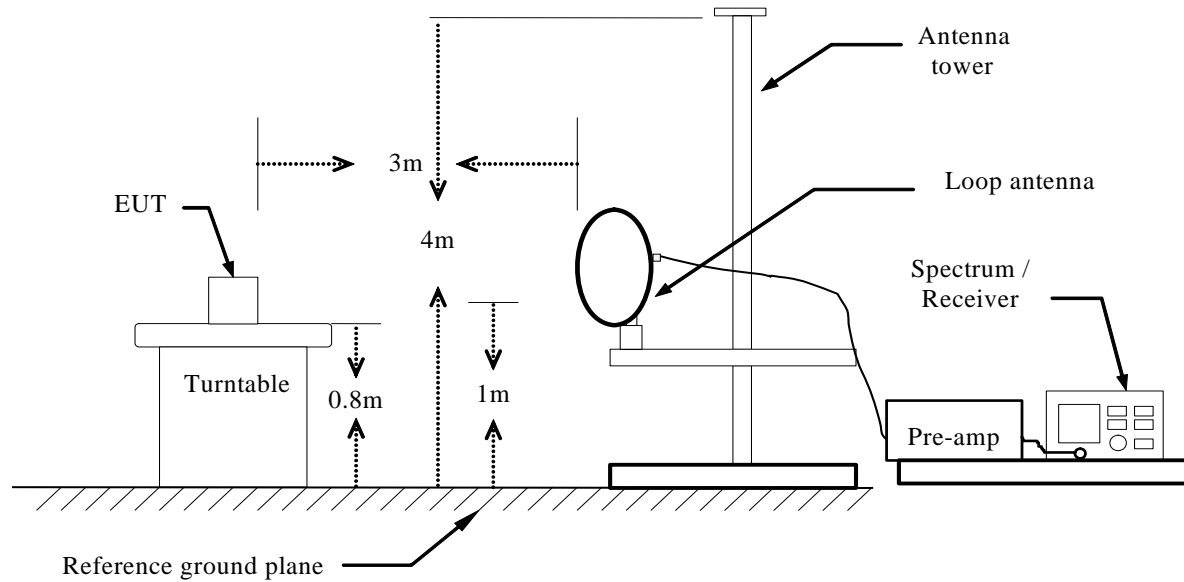


Below 1 GHz

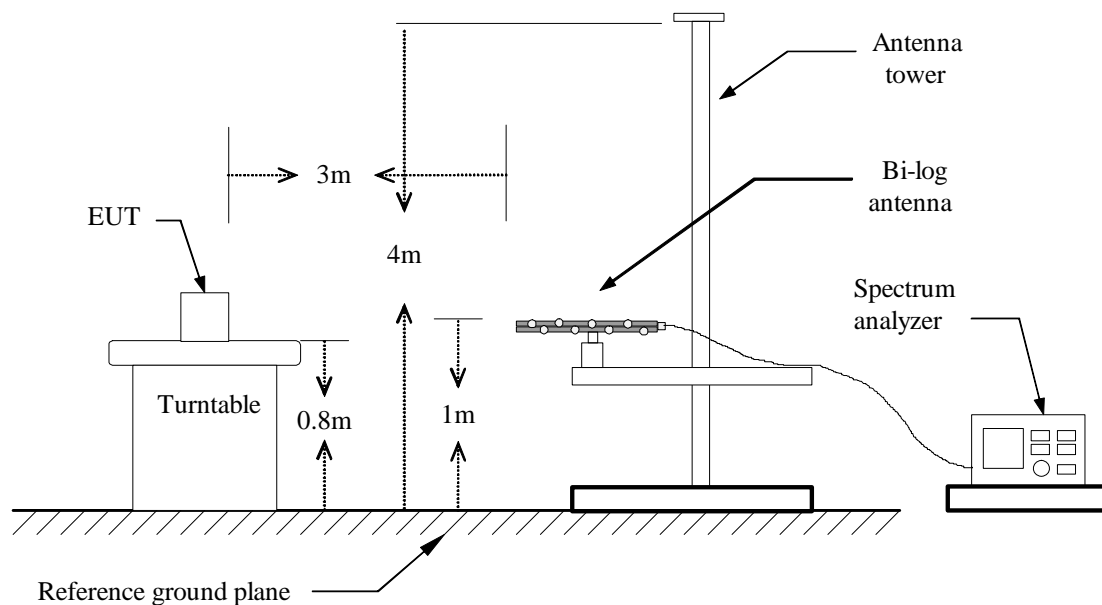



Above 1 GHz

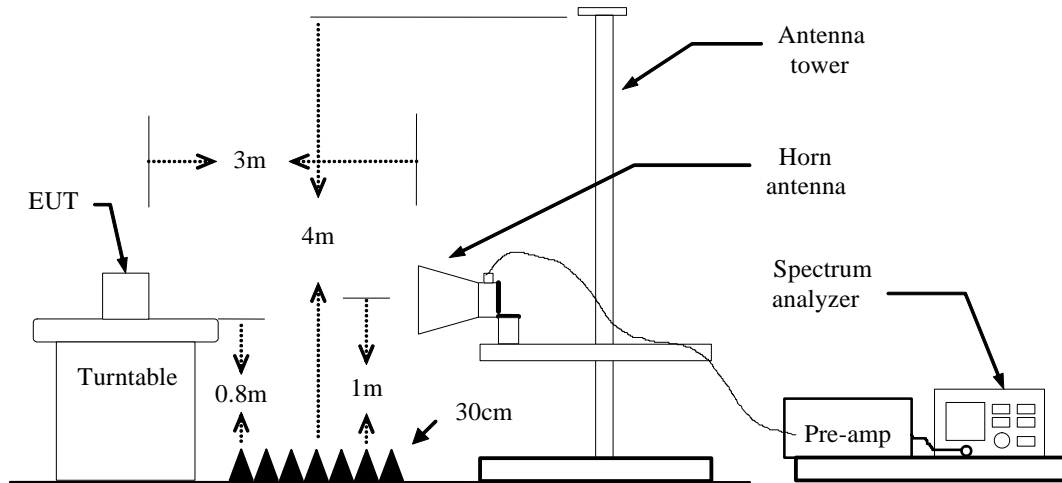

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

**7.2.2.5. DATA SAPLE****Below 1GHz**

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXX.XXXX	36.37	-12.20	24.17	40.00	-15.83	V	QP

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correct Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
 Q.P. = Quasi-peak Reading

Above 1GHz

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXXX.XXXX	62.09	-11.42	50.67	74.00	-23.33	V	Peak
XXXX.XXXX	49.78	-11.42	38.36	54.00	-15.64	V	AVG

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correction Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
 Peak = Peak Reading
 AVG = Average Reading

Calculation Formula

Margin (dB) = Result (dBuV/m) – Limits (dBuV/m)
 Result (dBuV/m) = Reading (dBuV) + Correction Factor

**7.2.2.6. TEST RESULTS****Below 1 GHz****Operation Mode:** TX**Test Date:** September 9, 2014**Temperature:** 24°C**Tested by:** Sun Guo**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
31.9400	43.06	-12.80	30.26	40.00	-9.74	V	QP
199.7500	49.37	-22.73	26.64	43.50	-16.86	V	QP
325.8500	47.04	-18.62	28.42	46.00	-17.58	V	QP
480.0800	47.67	-14.36	33.31	46.00	-12.69	V	QP
666.3200	48.66	-12.22	36.44	46.00	-9.56	V	QP
803.0900	42.28	-11.01	31.27	46.00	-14.73	V	QP
199.7500	59.62	-22.73	36.89	43.50	-6.61	H	QP
359.8000	51.06	-17.41	33.65	46.00	-12.35	H	QP
480.0800	50.16	-14.36	35.80	46.00	-10.20	H	QP
636.2500	49.15	-12.48	36.67	46.00	-9.33	H	QP
719.6700	42.09	-11.86	30.23	46.00	-15.77	H	QP
870.0200	41.15	-10.30	30.85	46.00	-15.15	H	QP

****Remark:** No emission found between lowest internal used/generated frequency to 30MHz.

Notes:

1. Radiated emissions measured in frequency range from 9kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. The IF bandwidth of Receiver between 30MHz to 1GHz was 120kHz.
4. Frequency (MHz). = Emission frequency in MHz
 Reading (dBμV/m) = Receiver reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBμV/m) = Limit stated in standard
 Margin (dB) = Measured (dBμV/m) – Limits (dBμV/m)
 Antenna Pole (H/V) = Current carrying line of reading

**Above 1 GHz****Test Mode:** TX / IEEE 802.11b (CH Low)**Tested by:** Sun Guo**Ambient temperature:** 24°C **Relative humidity:** 52 % RH **Date:** September 9, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3214.0000	56.36	-3.41	52.95	74.00	-21.05	V	Peak
3214.0000	53.52	-3.41	50.11	54.00	-3.89	V	AVG
4465.0000	43.89	0.33	44.22	74.00	-29.78	V	Peak
5077.0000	41.89	2.52	44.41	74.00	-29.59	V	Peak
6121.0000	40.59	3.91	44.50	74.00	-29.50	V	Peak
7102.0000	40.87	7.90	48.77	74.00	-25.23	V	Peak
7777.0000	40.81	9.22	50.03	74.00	-23.97	V	Peak
1999.0000	51.81	-8.31	43.50	74.00	-30.50	H	Peak
3214.0000	50.15	-3.41	46.74	74.00	-27.26	H	Peak
4357.0000	42.26	0.01	42.27	74.00	-31.73	H	Peak
5104.0000	41.33	2.52	43.85	74.00	-30.15	H	Peak
6535.0000	40.29	5.70	45.99	74.00	-28.01	H	Peak
7210.0000	40.21	8.11	48.32	74.00	-25.68	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11b (CH Mid)**Tested by:** Sun Guo**Ambient temperature:** 24°C**Relative humidity:** 52 % RH**Date:** September 9, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.0000	55.20	-8.31	46.89	74.00	-27.11	V	peak
3250.0000	54.97	-3.34	51.63	74.00	-22.37	V	peak
4870.0000	42.91	1.97	44.88	74.00	-29.12	V	peak
6346.0000	40.69	4.88	45.57	74.00	-28.43	V	peak
7219.0000	40.68	8.13	48.81	74.00	-25.19	V	peak
7966.0000	40.57	9.58	50.15	74.00	-23.85	V	peak
1990.0000	53.10	-8.32	44.78	74.00	-29.22	H	Peak
3250.0000	48.15	-3.34	44.81	74.00	-29.19	H	Peak
5005.0000	42.03	2.51	44.54	74.00	-29.46	H	Peak
6256.0000	41.00	4.49	45.49	74.00	-28.51	H	Peak
6913.0000	40.79	7.33	48.12	74.00	-25.88	H	Peak
8506.0000	40.80	9.37	50.17	74.00	-23.83	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11b (CH High)**Tested by:** Sun Guo**Ambient temperature:** 24°C**Relative humidity:** 52 % RH**Date:** September 9, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.0000	53.82	-8.31	45.51	74.00	-28.49	V	peak
3286.0000	49.95	-3.28	46.67	74.00	-27.33	V	peak
4339.0000	42.46	-0.04	42.42	74.00	-31.58	V	peak
4924.0000	41.77	2.19	43.96	74.00	-30.04	V	peak
6913.0000	40.89	7.33	48.22	74.00	-25.78	V	peak
8002.0000	40.17	9.65	49.82	74.00	-24.18	V	peak
1999.0000	52.76	-8.31	44.45	74.00	-29.55	H	Peak
3286.0000	46.46	-3.28	43.18	74.00	-30.82	H	Peak
4411.0000	42.81	0.17	42.98	74.00	-31.02	H	Peak
5581.0000	41.63	2.69	44.32	74.00	-29.68	H	Peak
7192.0000	40.94	8.07	49.01	74.00	-24.99	H	Peak
7948.0000	40.79	9.55	50.34	74.00	-23.66	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Test Mode: TX / IEEE 802.11g (CH Low)Tested by: Sun GuoAmbient temperature: 24°C Relative humidity: 52 % RH Date: September 9, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.0000	54.32	-8.31	46.01	74.00	-27.99	V	Peak
3214.0000	55.55	-3.41	52.14	74.00	-21.86	V	Peak
3214.0000	54.91	-3.41	51.50	54.00	-2.50	V	AVG
4663.0000	43.57	1.11	44.68	74.00	-29.32	V	Peak
5680.0000	41.44	2.85	44.29	74.00	-29.71	V	Peak
6931.0000	41.23	7.40	48.63	74.00	-25.37	V	Peak
7768.0000	41.03	9.20	50.23	74.00	-23.77	V	Peak
1999.0000	52.72	-8.31	44.41	74.00	-29.59	H	Peak
3214.0000	49.75	-3.41	46.34	74.00	-27.66	H	Peak
4879.0000	41.44	2.01	43.45	74.00	-30.55	H	Peak
5716.0000	41.83	2.91	44.74	74.00	-29.26	H	Peak
7057.0000	41.84	7.81	49.65	74.00	-24.35	H	Peak
8506.0000	41.18	9.37	50.55	74.00	-23.45	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11g (CH Mid)**Tested by:** Sun Guo**Ambient temperature:** 24°C **Relative humidity:** 52 % RH **Date:** September 9, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.0000	54.47	-8.31	46.16	74.00	-27.84	V	Peak
3250.0000	53.91	-3.34	50.57	74.00	-23.43	V	Peak
4636.0000	42.11	1.00	43.11	74.00	-30.89	V	Peak
5725.0000	41.87	2.93	44.80	74.00	-29.20	V	Peak
7174.0000	39.86	8.04	47.90	74.00	-26.10	V	Peak
7750.0000	40.49	9.16	49.65	74.00	-24.35	V	Peak
1999.0000	52.04	-8.31	43.73	74.00	-30.27	H	Peak
3250.0000	47.92	-3.34	44.58	74.00	-29.42	H	Peak
4978.0000	42.28	2.42	44.70	74.00	-29.30	H	Peak
6562.0000	40.01	5.81	45.82	74.00	-28.18	H	Peak
6994.0000	42.11	7.67	49.78	74.00	-24.22	H	Peak
7786.0000	40.14	9.23	49.37	74.00	-24.63	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Test Mode: TX / IEEE 802.11g (CH High)Tested by: Sun GuoAmbient temperature: 24°CRelative humidity: 52 % RHDate: September 9, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.0000	54.53	-8.31	46.22	74.00	-27.78	V	Peak
3286.0000	49.31	-3.28	46.03	74.00	-27.97	V	Peak
5104.0000	41.48	2.52	44.00	74.00	-30.00	V	Peak
6112.0000	41.47	3.87	45.34	74.00	-28.66	V	Peak
6958.0000	40.17	7.52	47.69	74.00	-26.31	V	Peak
7696.0000	41.15	9.06	50.21	74.00	-23.79	V	Peak
1999.0000	52.80	-8.31	44.49	74.00	-29.51	H	Peak
3286.0000	44.84	-3.28	41.56	74.00	-32.44	H	Peak
4537.0000	42.57	0.58	43.15	74.00	-30.85	H	Peak
5149.0000	41.73	2.52	44.25	74.00	-29.75	H	Peak
7030.0000	40.46	7.76	48.22	74.00	-25.78	H	Peak
7750.0000	40.94	9.16	50.10	74.00	-23.90	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Test Mode: TX / IEEE 802.11n HT20 MHz(CH Low)Tested by: Sun GuoAmbient temperature: 24°CRelative humidity: 52 % RHDate: September 9, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.0000	55.56	-8.31	47.25	74.00	-26.75	V	Peak
3214.0000	55.79	-3.41	52.38	74.00	-21.62	V	Peak
3214.0000	55.05	-3.41	51.64	54.00	-2.36	V	AVG
4564.0000	42.08	0.70	42.78	74.00	-31.22	V	Peak
4942.0000	43.11	2.27	45.38	74.00	-28.62	V	Peak
6256.0000	41.95	4.49	46.44	74.00	-27.56	V	Peak
7462.0000	39.70	8.60	48.30	74.00	-25.70	V	Peak
1999.0000	51.13	-8.31	42.82	74.00	-31.18	H	Peak
3214.0000	50.80	-3.41	47.39	74.00	-26.61	H	Peak
4366.0000	42.39	0.04	42.43	74.00	-31.57	H	Peak
5383.0000	41.99	2.54	44.53	74.00	-29.47	H	Peak
6913.0000	39.99	7.33	47.32	74.00	-26.68	H	Peak
7930.0000	40.09	9.51	49.60	74.00	-24.40	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11n HT20 MHz(CH Mid)**Tested by:** Sun Guo**Ambient temperature:** 24°C**Relative humidity:** 52 % RH**Date:** September 9, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.0000	54.39	-8.31	46.08	74.00	-27.92	V	Peak
3250.0000	54.38	-3.34	51.04	74.00	-22.96	V	Peak
4654.0000	42.63	1.07	43.70	74.00	-30.30	V	Peak
6247.0000	40.45	4.45	44.90	74.00	-29.10	V	Peak
7444.0000	40.02	8.57	48.59	74.00	-25.41	V	Peak
7741.0000	40.39	9.14	49.53	74.00	-24.47	V	Peak
1999.0000	51.63	-8.31	43.32	74.00	-30.68	H	Peak
3250.0000	48.25	-3.34	44.91	74.00	-29.09	H	Peak
4240.0000	42.73	-0.33	42.40	74.00	-31.60	H	Peak
5005.0000	41.98	2.51	44.49	74.00	-29.51	H	Peak
6994.0000	40.30	7.67	47.97	74.00	-26.03	H	Peak
7912.0000	40.85	9.48	50.33	74.00	-23.67	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11n HT20 MHz(CH High)**Tested by:** Sun Guo**Ambient temperature:** 24°C **Relative humidity:** 52 % RH **Date:** September 9, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.0000	54.69	-8.31	46.38	74.00	-27.62	V	Peak
3286.0000	49.01	-3.28	45.73	74.00	-28.27	V	Peak
4663.0000	42.91	1.11	44.02	74.00	-29.98	V	Peak
5527.0000	41.88	2.60	44.48	74.00	-29.52	V	Peak
6994.0000	40.44	7.67	48.11	74.00	-25.89	V	Peak
7984.0000	40.21	9.62	49.83	74.00	-24.17	V	Peak
1999.0000	52.66	-8.31	44.35	74.00	-29.65	H	Peak
3286.0000	46.35	-3.28	43.07	74.00	-30.93	H	Peak
4105.0000	43.42	-0.73	42.69	74.00	-31.31	H	Peak
4942.0000	41.78	2.27	44.05	74.00	-29.95	H	Peak
6040.0000	41.03	3.56	44.59	74.00	-29.41	H	Peak
6733.0000	39.81	6.55	46.36	74.00	-27.64	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11n HT40 MHz(CH Low)**Tested by:** Sun Guo**Ambient temperature:** 24°C **Relative humidity:** 52 % RH **Date:** September 9, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.0000	53.74	-8.31	45.43	74.00	-28.57	V	Peak
3232.0000	53.31	-3.38	49.93	74.00	-24.07	V	Peak
4537.0000	42.57	0.58	43.15	74.00	-30.85	V	Peak
5482.0000	41.89	2.55	44.44	74.00	-29.56	V	Peak
6544.0000	39.74	5.73	45.47	74.00	-28.53	V	Peak
7111.0000	41.01	7.92	48.93	74.00	-25.07	V	Peak
1999.0000	52.02	-8.31	43.71	74.00	-30.29	H	Peak
3232.0000	47.67	-3.38	44.29	74.00	-29.71	H	Peak
5104.0000	41.79	2.52	44.31	74.00	-29.69	H	Peak
6517.0000	40.99	5.62	46.61	74.00	-27.39	H	Peak
7741.0000	41.48	9.14	50.62	74.00	-23.38	H	Peak
8677.0000	41.08	9.28	50.36	74.00	-23.64	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11n HT40 MHz(CH Mid)**Tested by:** Sun Guo**Ambient temperature:** 24°C **Relative humidity:** 52 % RH **Date:** September 9, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.0000	54.11	-8.31	45.80	74.00	-28.20	V	Peak
3250.0000	53.78	-3.34	50.44	74.00	-23.56	V	Peak
4663.0000	42.72	1.11	43.83	74.00	-30.17	V	Peak
6265.0000	40.38	4.53	44.91	74.00	-29.09	V	Peak
6967.0000	40.42	7.56	47.98	74.00	-26.02	V	Peak
7939.0000	41.19	9.53	50.72	74.00	-23.28	V	Peak
1999.0000	52.84	-8.31	44.53	74.00	-29.47	H	Peak
3250.0000	48.60	-3.34	45.26	74.00	-28.74	H	Peak
4141.0000	43.29	-0.63	42.66	74.00	-31.34	H	Peak
5590.0000	41.27	2.70	43.97	74.00	-30.03	H	Peak
6985.0000	40.57	7.64	48.21	74.00	-25.79	H	Peak
7777.0000	41.28	9.22	50.50	74.00	-23.50	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11n HT40 MHz(CH High)**Tested by:** Sun Guo**Ambient temperature:** 24°C **Relative humidity:** 52 % RH **Date:** September 9, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.0000	52.79	-8.31	44.48	74.00	-29.52	V	Peak
3268.0000	51.37	-3.31	48.06	74.00	-25.94	V	Peak
4978.0000	41.96	2.42	44.38	74.00	-29.62	V	Peak
6157.0000	41.40	4.07	45.47	74.00	-28.53	V	Peak
7381.0000	40.23	8.44	48.67	74.00	-25.33	V	Peak
7903.0000	40.92	9.46	50.38	74.00	-23.62	V	Peak
1999.0000	52.14	-8.31	43.83	74.00	-30.17	H	Peak
3268.0000	47.96	-3.31	44.65	74.00	-29.35	H	Peak
4537.0000	42.37	0.58	42.95	74.00	-31.05	H	Peak
5716.0000	40.79	2.91	43.70	74.00	-30.30	H	Peak
7066.0000	39.96	7.83	47.79	74.00	-26.21	H	Peak
8362.0000	40.15	9.45	49.60	74.00	-24.40	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.3. 6dB BANDWIDTH MEASUREMENT

7.3.1. LIMITS

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

7.3.2. TEST INSTRUMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015

7.3.3. TEST PROCEDURES (please refer to measurement standard)

8.1 Option 1:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4. TEST SETUP

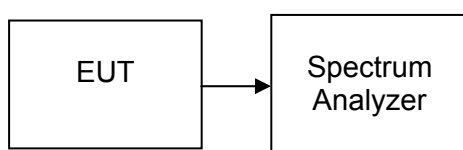

**7.3.5. TEST RESULTS***No non-compliance noted***Test Data****Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Test Result
Low	2412	10.181	>500	PASS
Mid	2437	10.281		PASS
High	2462	10.277		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Test Result
Low	2412	16.509	>500	PASS
Mid	2437	16.493		PASS
High	2462	16.509		PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Test Result
Low	2412	17.648	>500	PASS
Mid	2437	17.652		PASS
High	2462	17.644		PASS

Test mode: IEEE 802.11n HT40 MHz


Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Test Result
Low	2422	36.276	>500	PASS
Mid	2437	36.066		PASS
High	2452	36.333		PASS



Test Plot


IEEE 802.11b mode

6dB Bandwidth (CH Low)

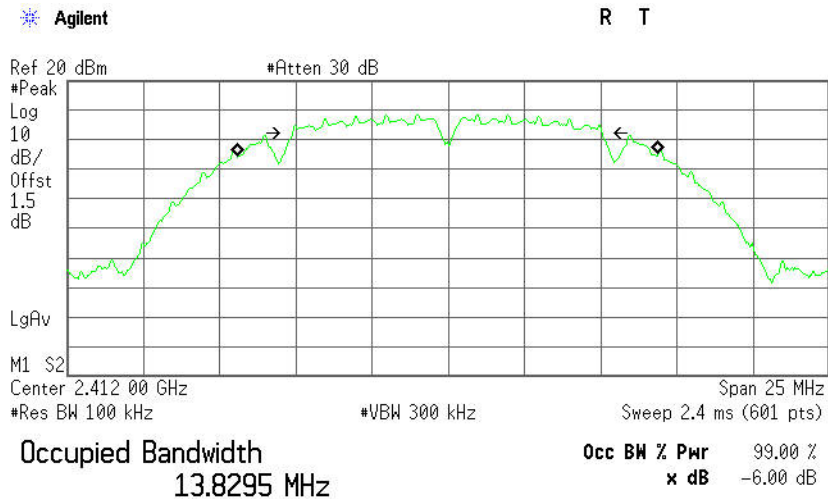

Transmit Freq Error -20.872 kHz
x dB Bandwidth 10.181 MHz

6dB Bandwidth (CH Mid)

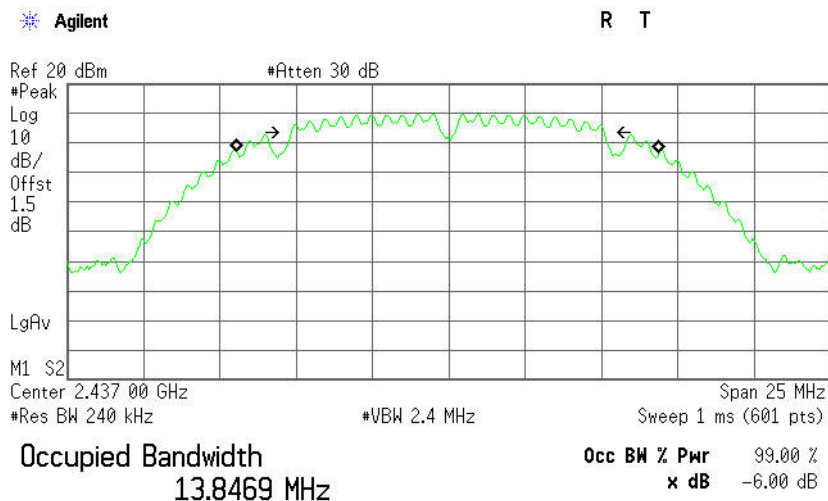


Transmit Freq Error -32.873 kHz
x dB Bandwidth 10.281 MHz



6dB Bandwidth (CH High)

Agilent

R T

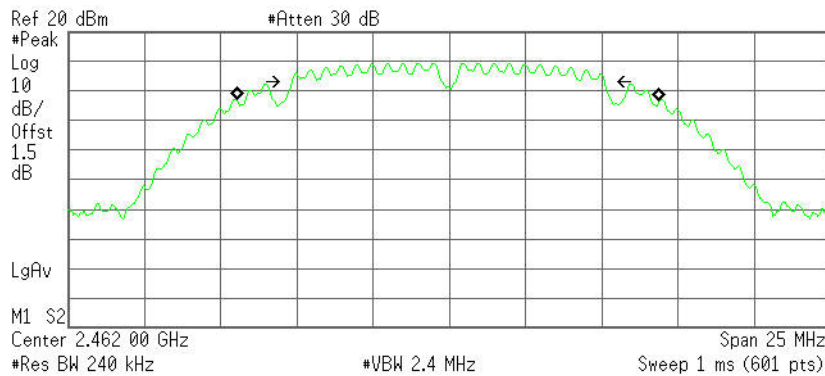

Occupied Bandwidth
13.8643 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -38.671 kHz
x dB Bandwidth 10.277 MHz




IEEE 802.11g mode

6dB Bandwidth (CH Low)

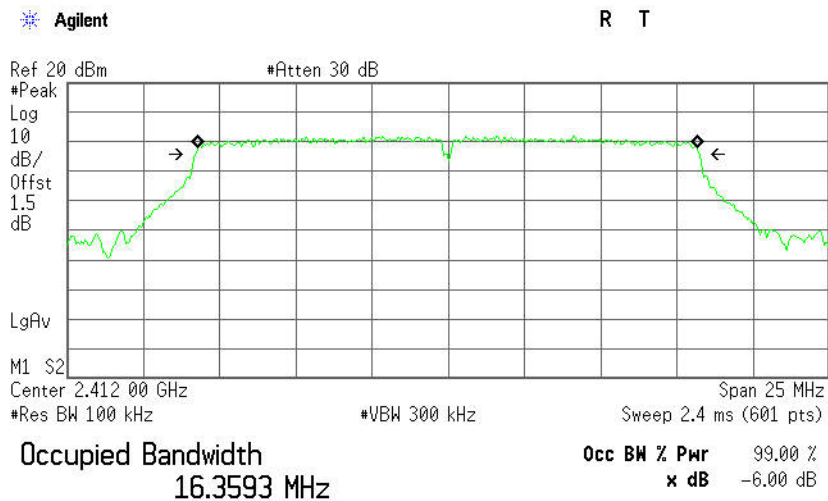

Transmit Freq Error -32.426 kHz
x dB Bandwidth 16.509 MHz


6dB Bandwidth (CH Mid)

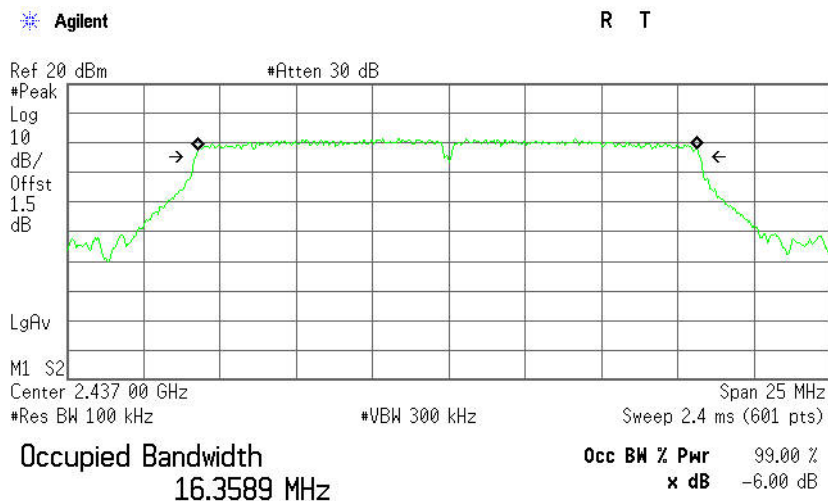

Transmit Freq Error -39.809 kHz
x dB Bandwidth 16.493 MHz




6dB Bandwidth (CH High)

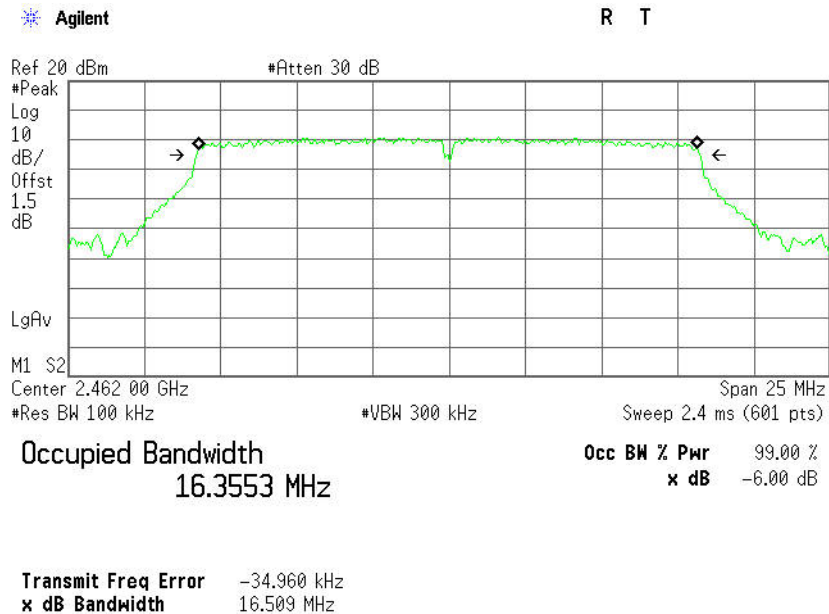




IEEE 802.11n HT20 MHz mode

6dB Bandwidth (CH Low)

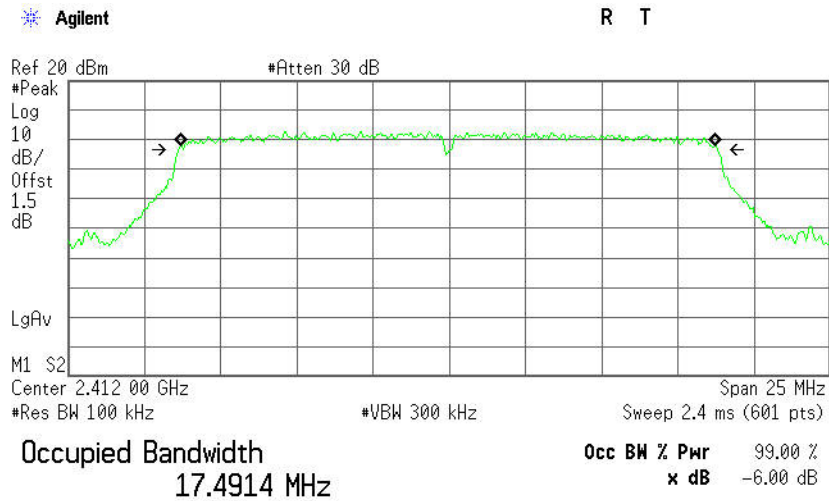

Transmit Freq Error -26.910 kHz
x dB Bandwidth 17.648 MHz

6dB Bandwidth (CH Mid)

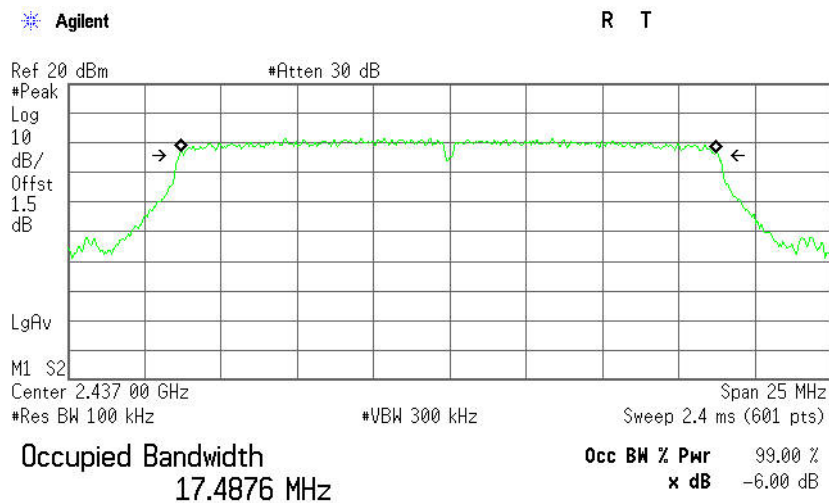


Transmit Freq Error -29.827 kHz
x dB Bandwidth 17.652 MHz



6dB Bandwidth (CH High)

Agilent

R T

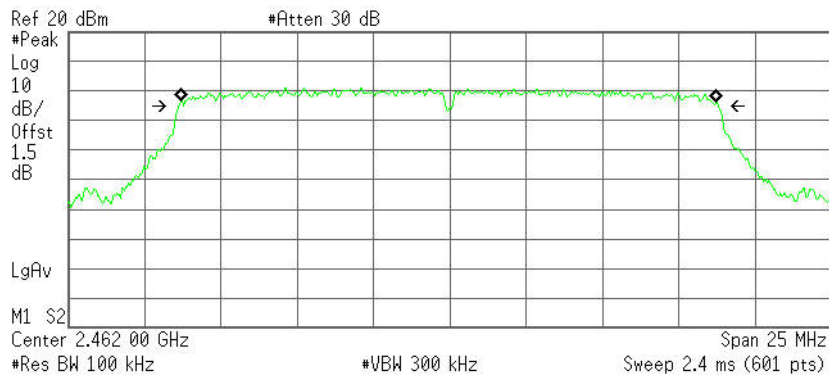

Occupied Bandwidth
17.4903 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -30.606 kHz
x dB Bandwidth 17.644 MHz




IEEE 802.11n HT40 MHz mode

6dB Bandwidth (CH Low)

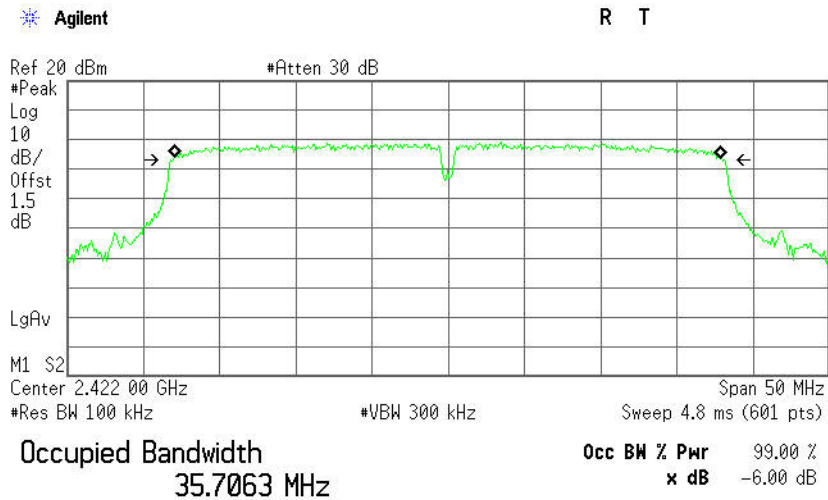

Transmit Freq Error -30.031 kHz
x dB Bandwidth 36.276 MHz


6dB Bandwidth (CH Mid)

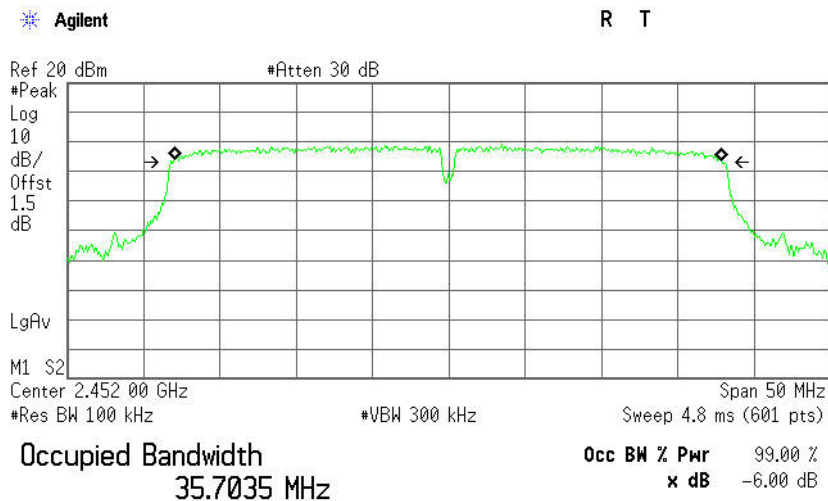

Transmit Freq Error -49.336 kHz
x dB Bandwidth 36.066 MHz



6dB Bandwidth (CH High)

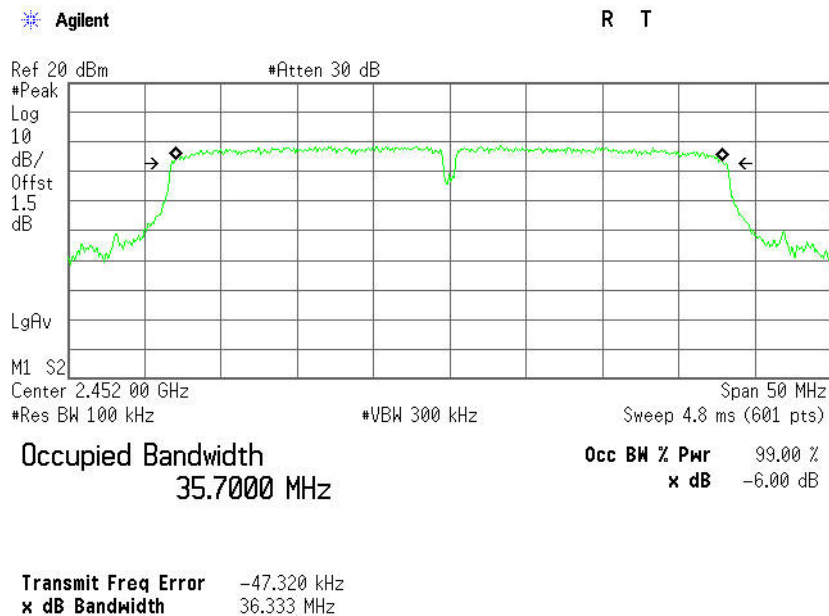



7.4. PEAK OUTPUT POWER

7.4.1. LIMITS

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.4.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Power Meter	Anritsu	ML2495A	1204003	03/09/2014	03/08/2015
Power Sensor	Anritsu	MA2411B	1126150	03/09/2014	03/08/2015
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015

7.4.3. TEST PROCEDURES (please refer to measurement standard)

9.1.1 RBW \geq DTS bandwidth

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the *DTS bandwidth*.

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW \geq 3 RBW.
- c) Set span \geq 3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.



9.1.2 Integrated band power method


This procedure may be used when the maximum available RBW of the measurement instrument is less than the *DTS bandwidth*.

- a) Set the RBW = 1 MHz.
- b) Set the VBW ≥ 3 RBW
- c) Set the span $\geq 1.5 \times$ DTS bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

9.1.3 PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

7.4.4. TEST SETUP

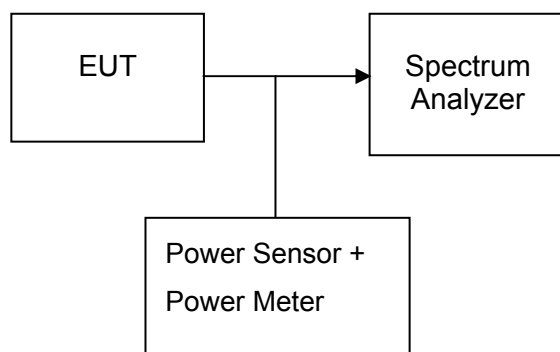

**7.4.5. TEST RESULTS***No non-compliance noted***Test Data****Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak / Average	Result
Low	2412	21.12	0.12942	1	Peak	PASS
Mid	2437	20.97	0.12503			PASS
High	2462	20.72	0.11803			PASS
Low	2412	18.29	0.06745	1	Average	PASS
Mid	2437	18.20	0.06607			PASS
High	2462	17.98	0.06281			PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak / Average	Result
Low	2412	25.13	0.32584	1	Peak	PASS
Mid	2437	25.18	0.32961			PASS
High	2462	24.74	0.29785			PASS
Low	2412	16.68	0.04656	1	Average	PASS
Mid	2437	16.75	0.04732			PASS
High	2462	16.25	0.04217			PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak / Average	Result
Low	2412	25.32	0.34041	1	Peak	PASS
Mid	2437	25.40	0.34674			PASS
High	2462	25.19	0.33037			PASS
Low	2412	16.22	0.04188	1	Average	PASS
Mid	2437	16.41	0.04375			PASS
High	2462	16.32	0.04285			PASS

**Test mode: IEEE 802.11n HT40 MHz**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak / Average	Result
Low	2422	24.48	0.28054	1	Peak	PASS
Mid	2437	25.54	0.35810			PASS
High	2452	25.19	0.33037			PASS
Low	2422	16.59	0.04560	1	Average	PASS
Mid	2437	16.64	0.04613			PASS
High	2452	16.29	0.04256			PASS



7.5. BAND EDGES MEASUREMENT

7.5.1. LIMITS

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.5.2. TEST INSTRUMENTS

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2014	03/08/2015
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2014	03/18/2015
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2014	03/18/2015
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2014	07/09/2015
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2014	03/01/2015
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2014	03/01/2015
Loop Antenna	A、R、A	PLA-1030/B	1029	09/27/2013	09/26/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2014	02/28/2015
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			


- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The FCC Site Registration number is 101879.
3. N.C.R = No Calibration Required.



7.5.3. TEST PROCEDURES (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are

7.5.4. TEST SETUP

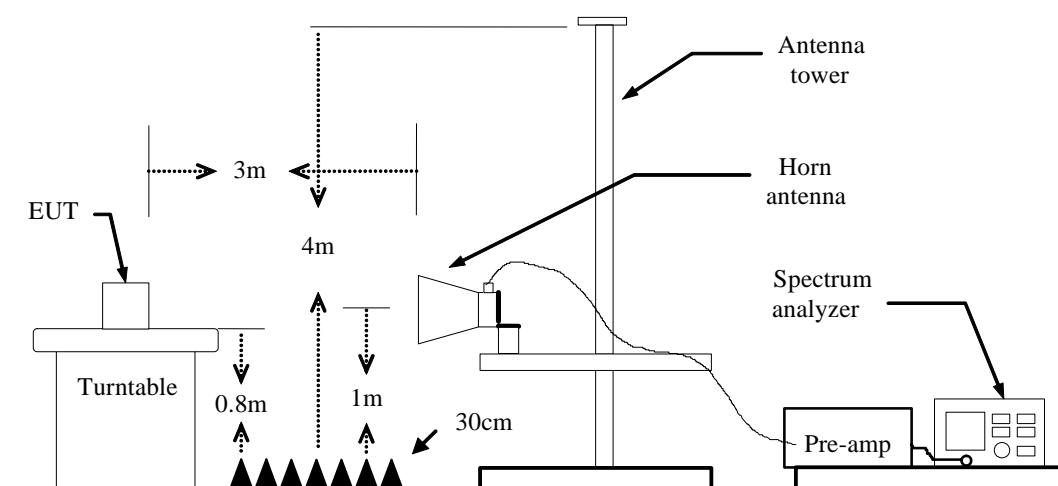



7.5.5. TEST RESULTS


Test Plot

IEEE 802.11b mode

Band Edges (CH Low)


Detector mode: Peak

Polarity: Vertical

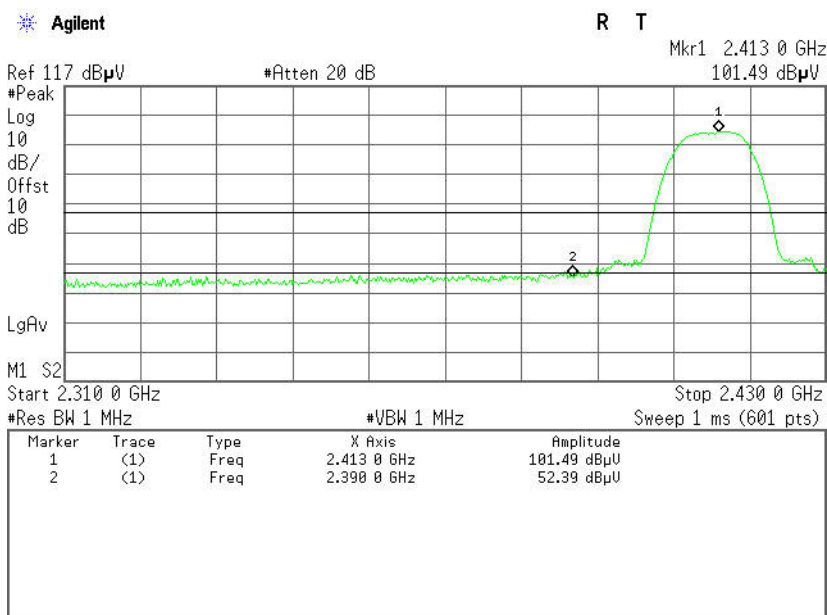

Detector mode: Average

Polarity: Vertical

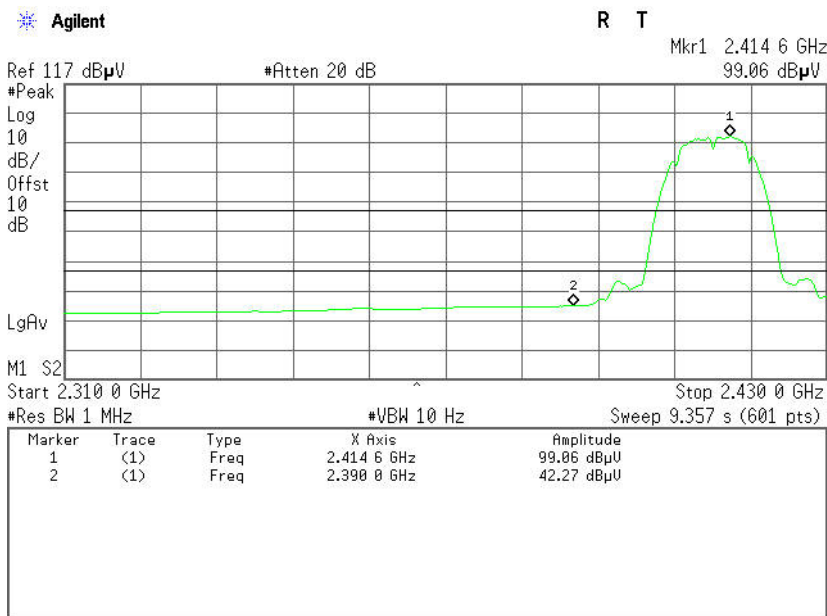


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	45.79	-6.60	52.39	74.00	-21.61	Peak	Vertical
2	2390.0000	35.67	-6.60	42.27	54.00	-11.73	Average	Vertical




Detector mode: Peak

Polarity: Horizontal

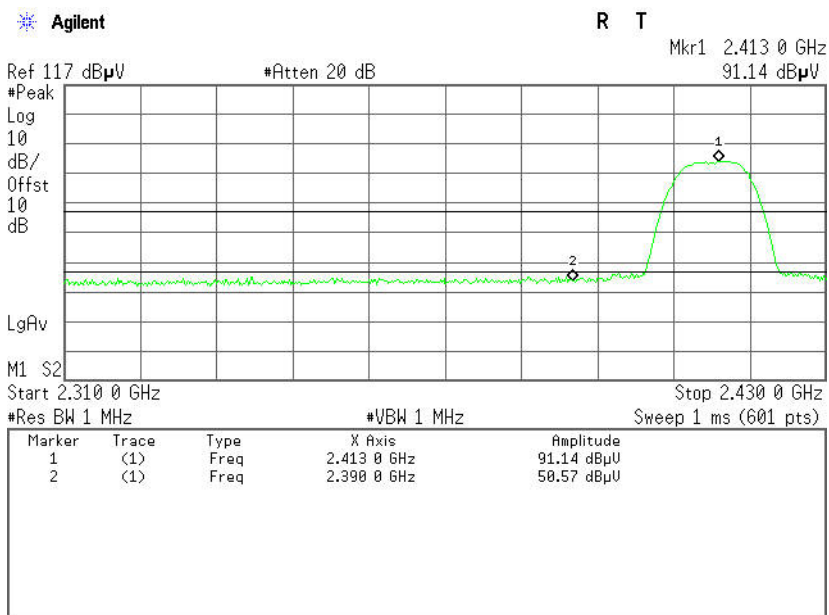

Detector mode: Average

Polarity: Horizontal

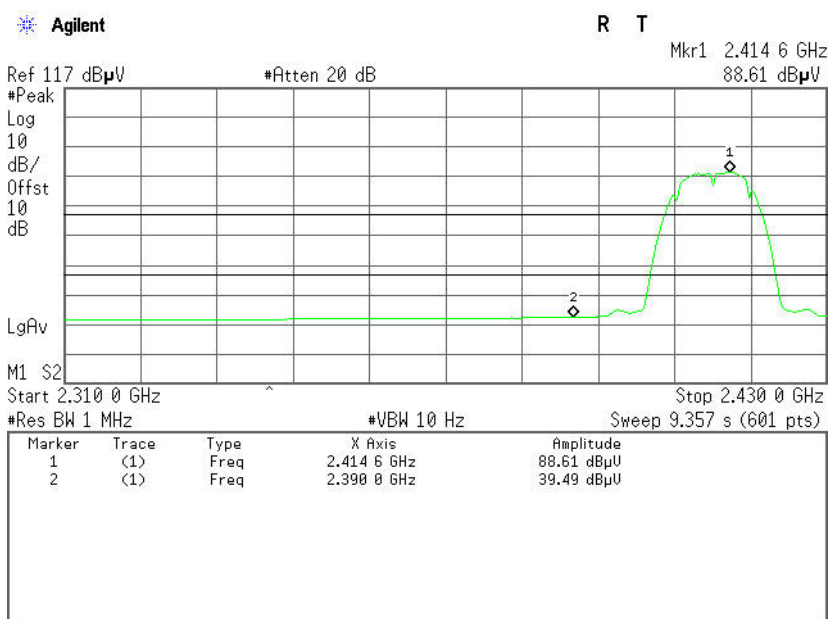


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	43.97	-6.60	50.57	74.00	-23.43	Peak	Horizontal
2	2390.0000	32.89	-6.60	39.49	54.00	-14.51	Average	Horizontal



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

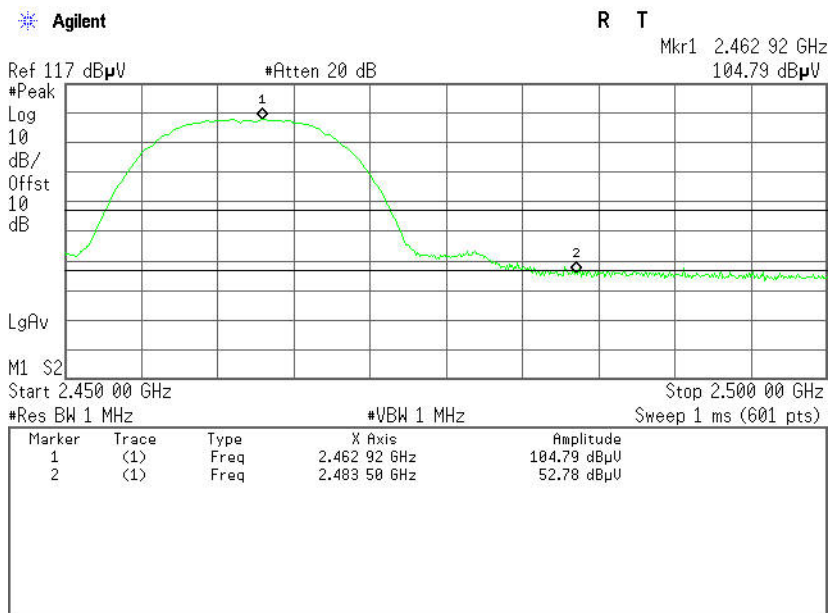

Detector mode: Average

Polarity: Vertical

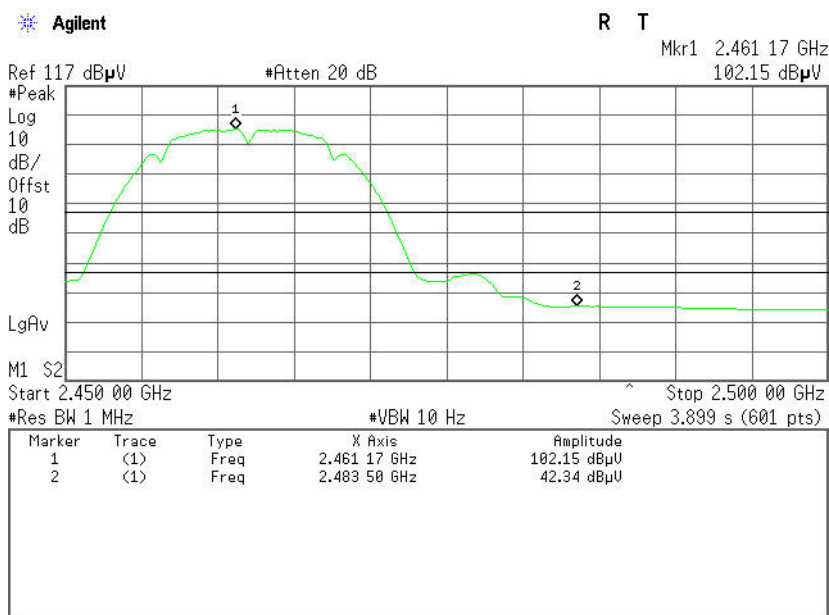


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	46.54	-6.24	52.78	74.00	-21.22	Peak	Vertical
2	2483.5000	36.10	-6.24	42.34	54.00	-11.66	AVG	Vertical




Detector mode: Peak

Polarity: Horizontal

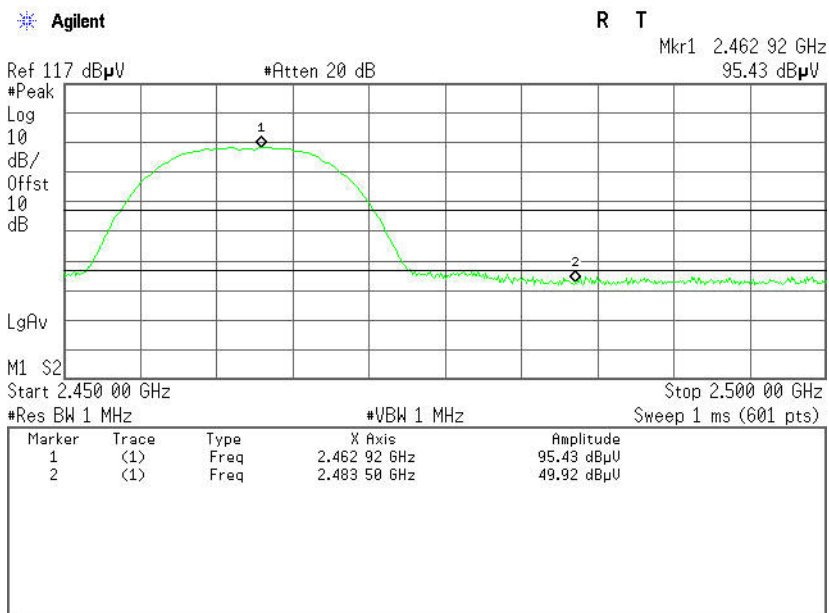

Detector mode: Average

Polarity: Horizontal

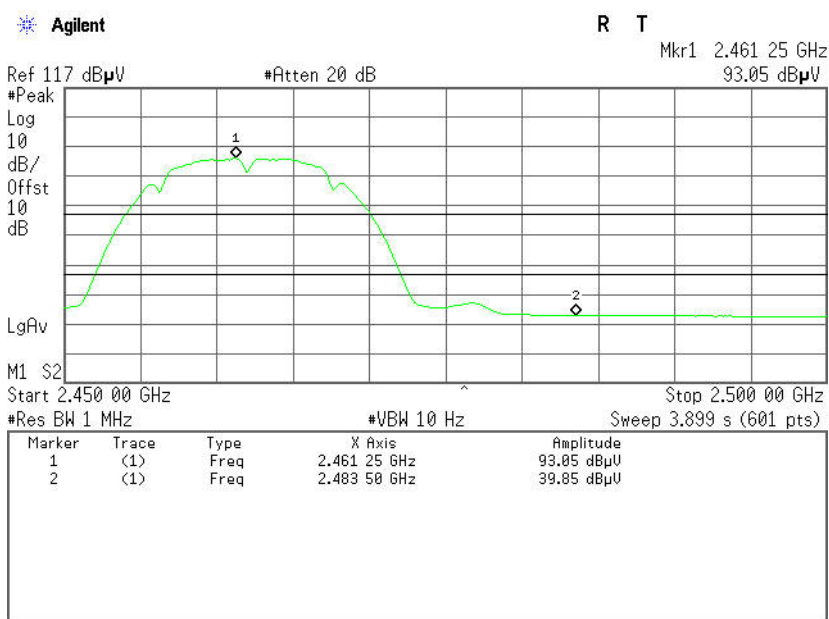

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	43.68	-6.24	49.92	74.00	-24.08	Peak	Vertical
2	2483.5000	32.81	-6.24	39.05	54.00	-14.95	AVG	Vertical




IEEE 802.11g mode

Band Edges (CH Low)


Detector mode: Peak

Polarity: Vertical

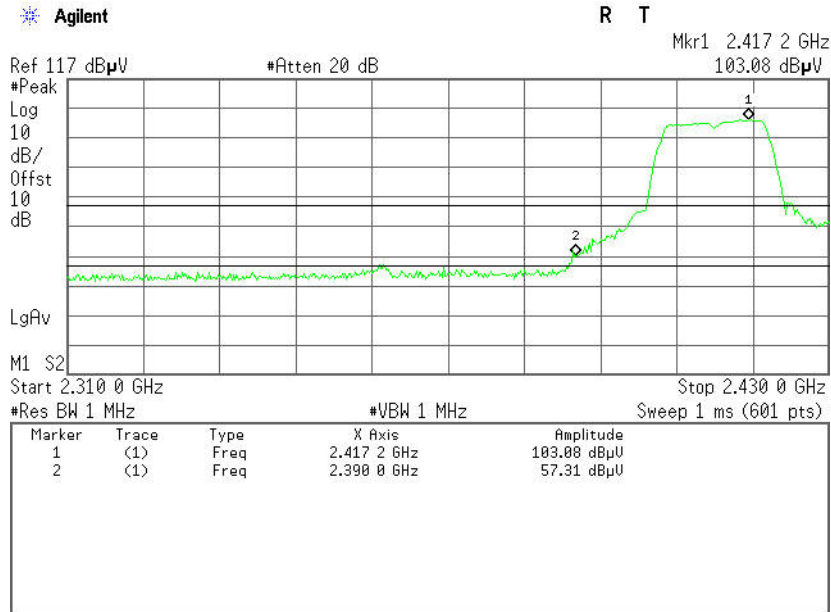

Detector mode: Average

Polarity: Vertical

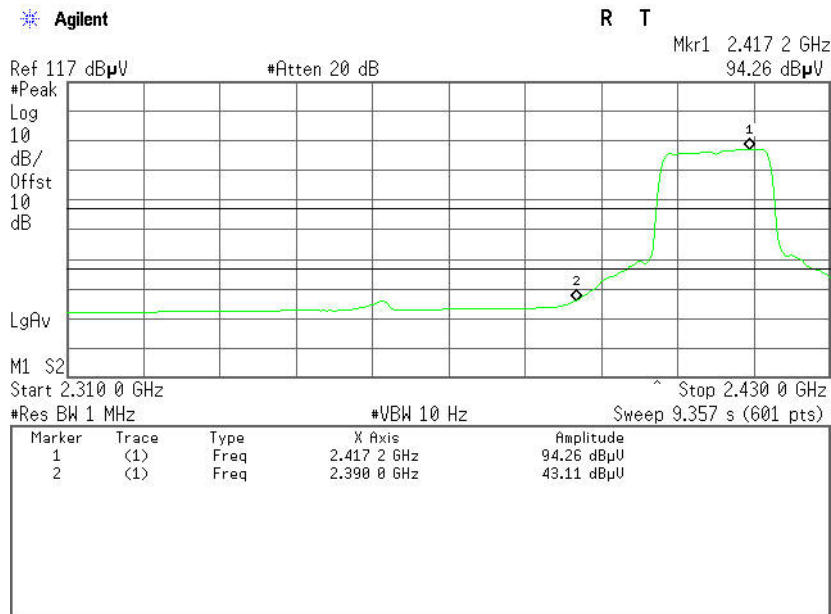


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	50.71	-6.60	57.31	74.00	-16.69	Peak	Vertical
2	2390.0000	36.51	-6.60	43.11	54.00	-10.89	Average	Vertical




Detector mode: Peak

Polarity: Horizontal

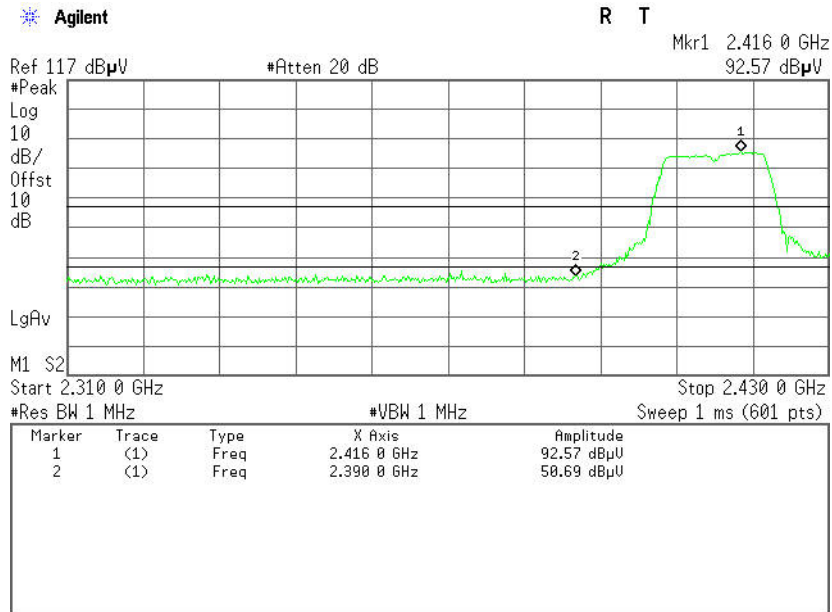

Detector mode: Average

Polarity: Horizontal

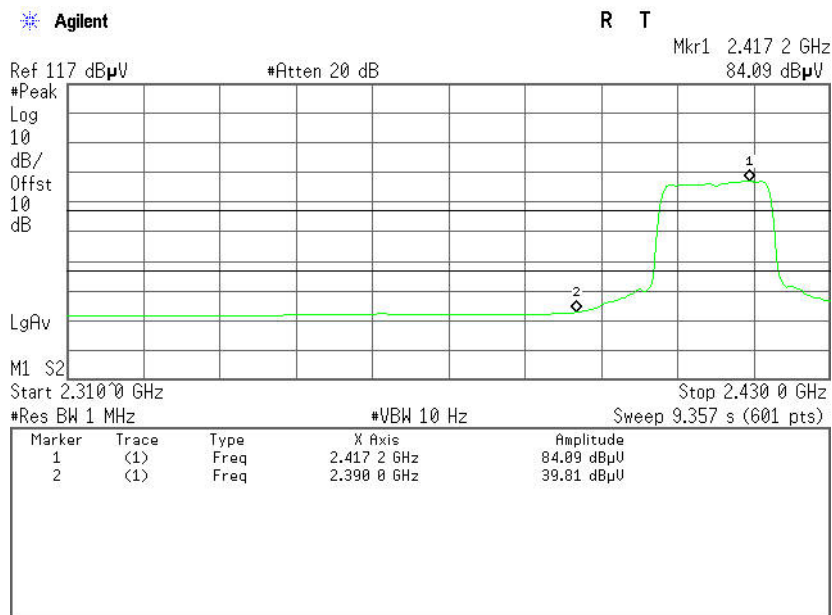


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	44.09	-6.60	50.69	74.00	-23.31	Peak	Horizontal
2	2390.0000	33.21	-6.60	39.81	54.00	-14.19	Average	Horizontal



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

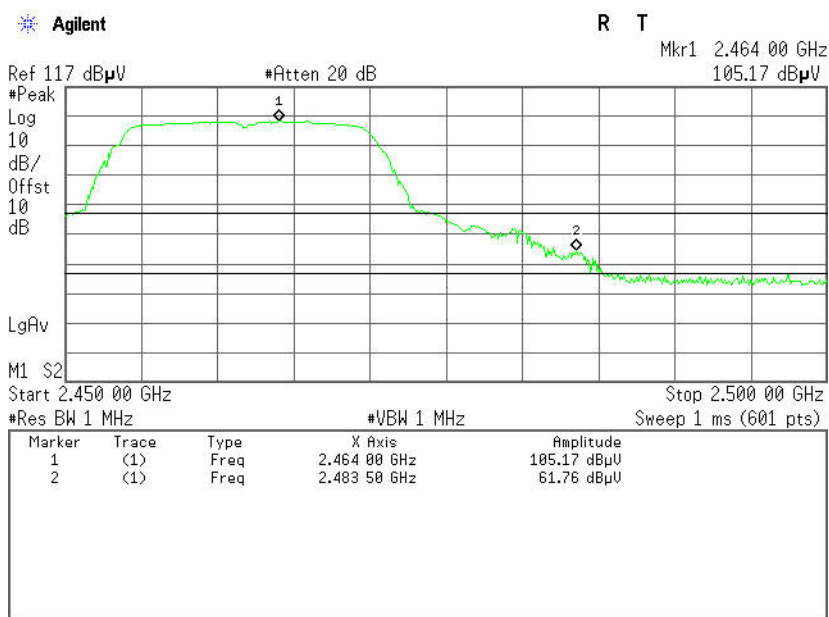

Detector mode: Average

Polarity: Vertical

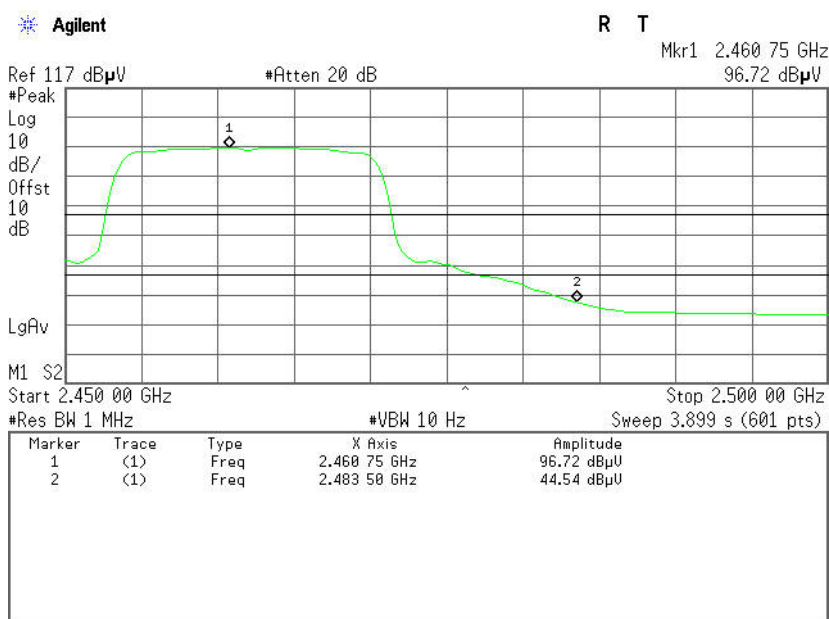


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	55.52	-6.24	61.76	74.00	-12.24	Peak	Vertical
2	2483.5000	38.30	-6.24	44.54	54.00	-9.46	AVG	Vertical




Detector mode: Peak

Polarity: Horizontal

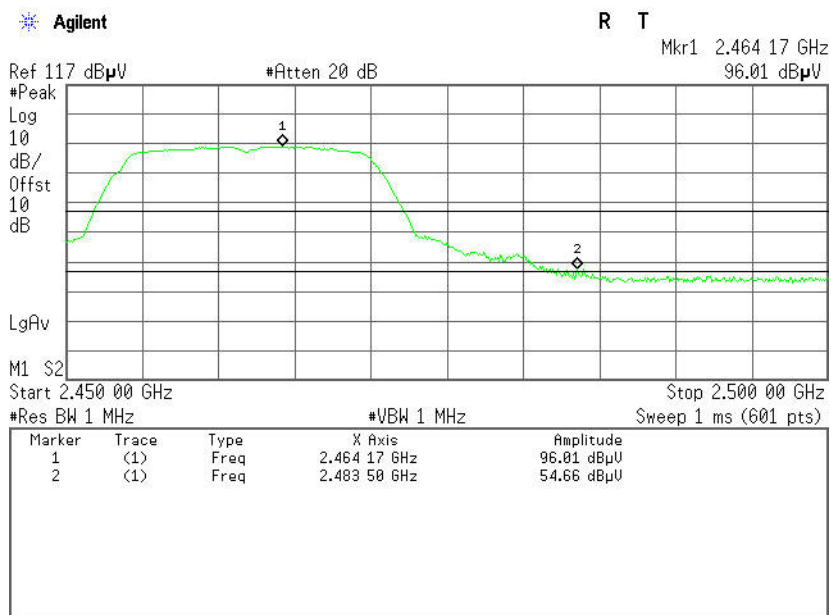

Detector mode: Average

Polarity: Horizontal

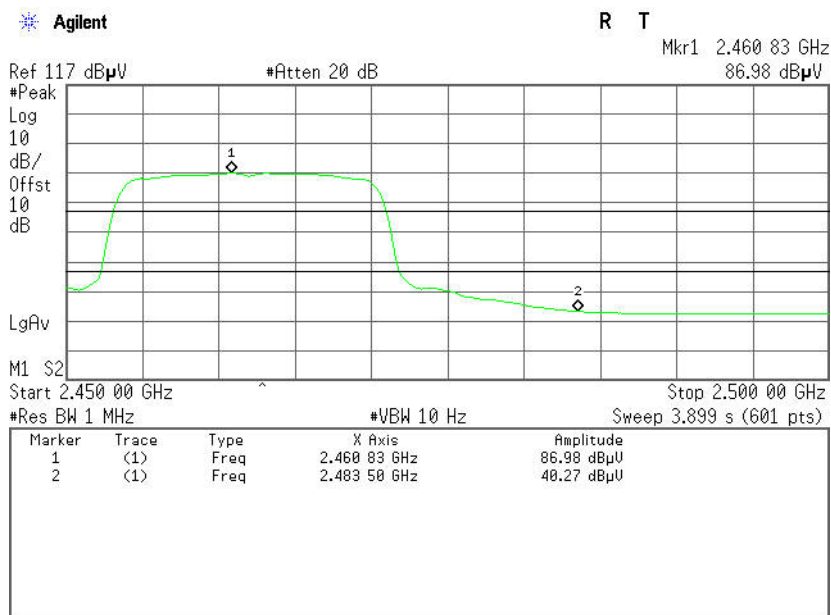

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	48.42	-6.24	54.66	74.00	-19.34	Peak	Horizontal
2	2483.5000	34.03	-6.24	40.27	54.00	-13.73	AVG	Horizontal




IEEE 802.11n HT20 MHz mode

Band Edges (CH Low)


Detector mode: Peak

Polarity: Vertical


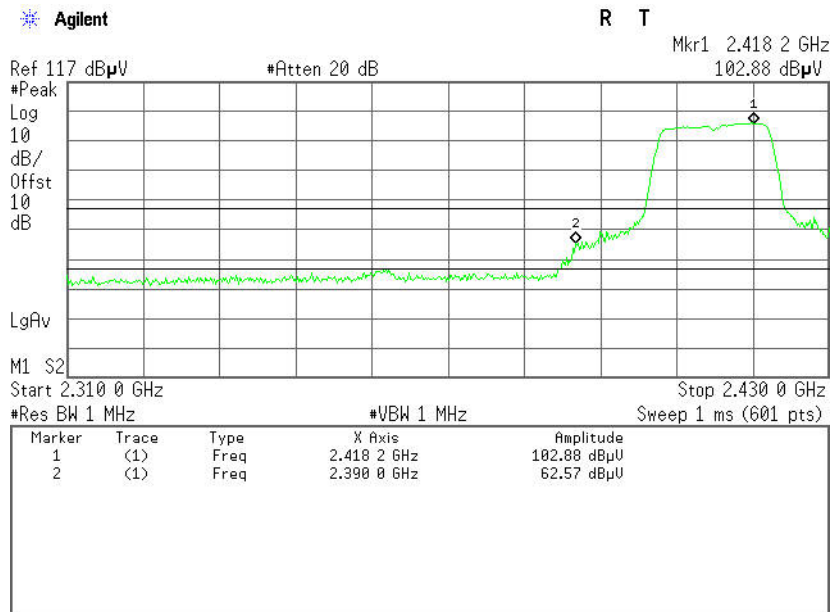


Detector mode: Average

Polarity: Vertical

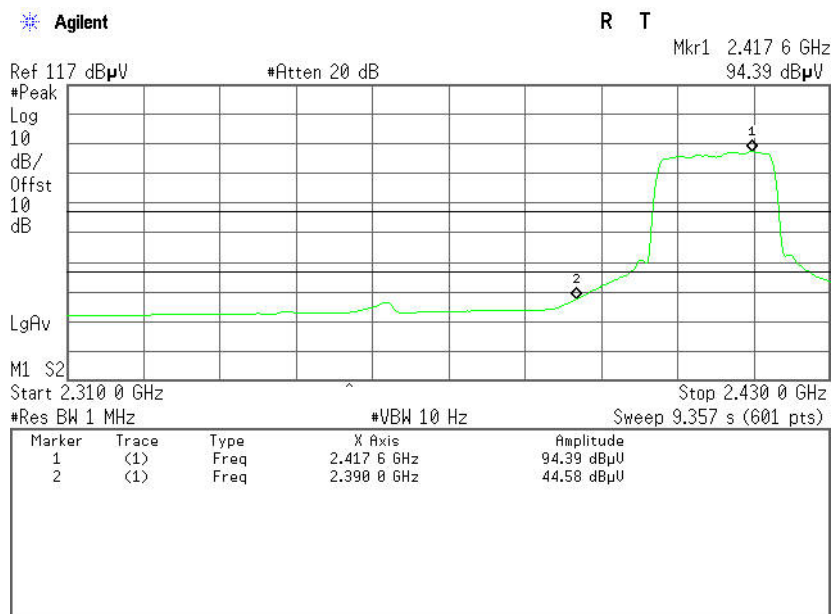

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	55.97	-6.60	62.57	74.00	-11.43	Peak	Vertical
2	2390.0000	37.98	-6.60	44.58	54.00	-9.42	Average	Vertical

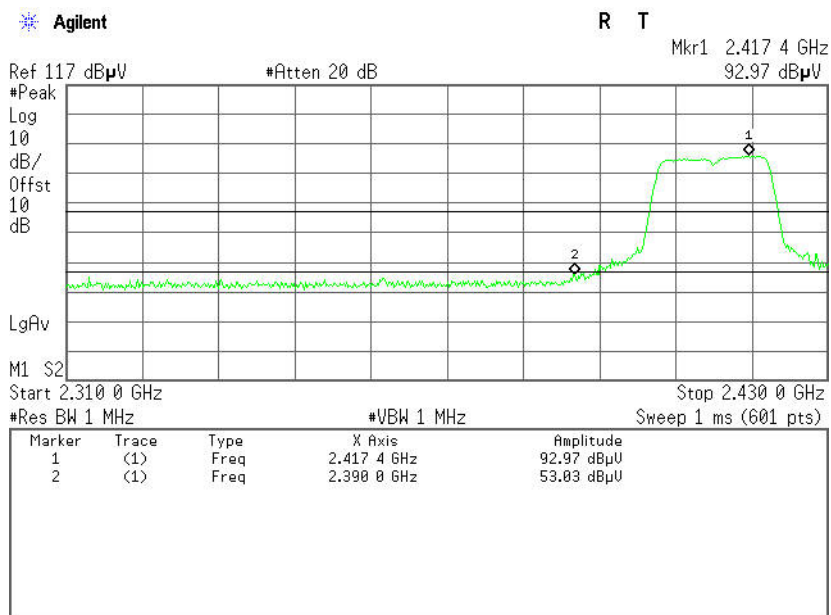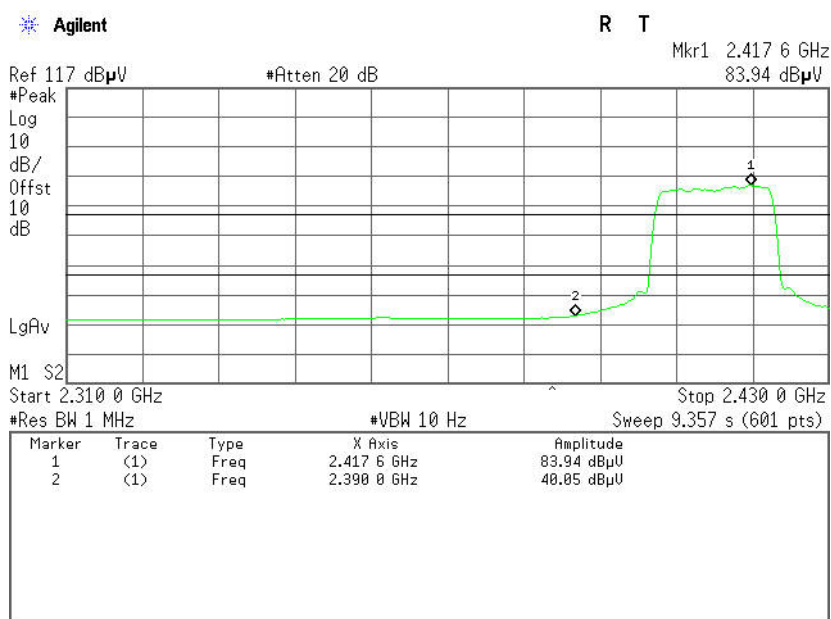**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	46.43	-6.60	53.03	74.00	-20.97	Peak	Horizontal
2	2390.0000	33.45	-6.60	40.05	54.00	-13.95	Average	Horizontal



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

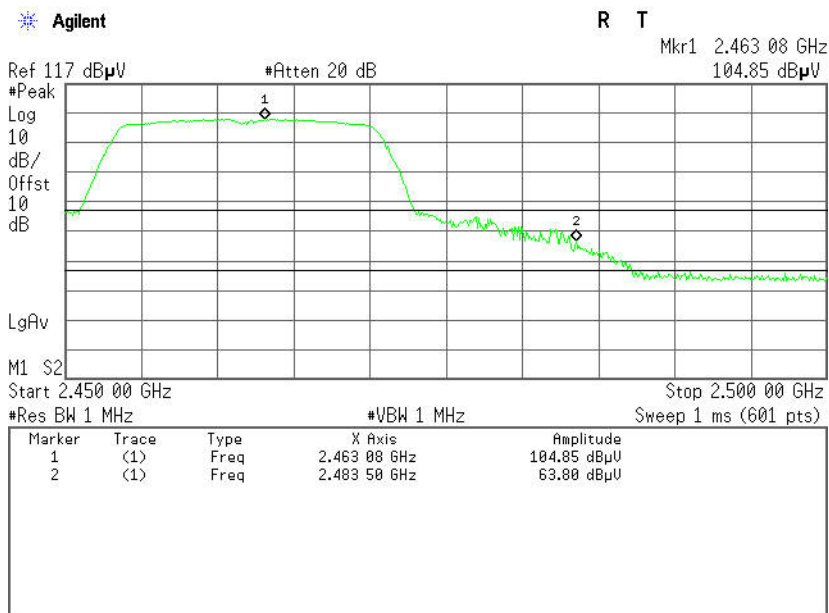

Detector mode: Average

Polarity: Vertical

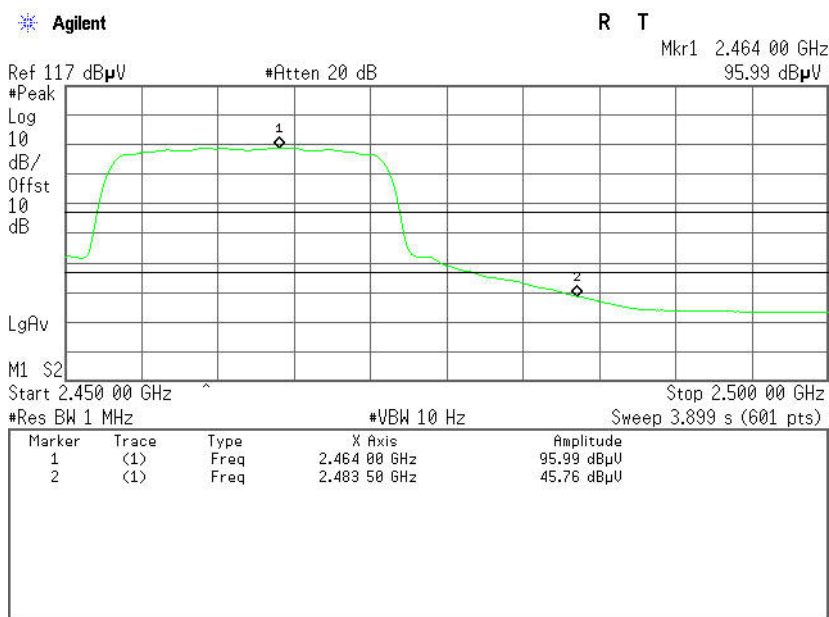


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	57.56	-6.24	63.80	74.00	-10.20	Peak	Vertical
2	2483.5000	39.52	-6.24	45.76	54.00	-8.24	AVG	Vertical




Detector mode: Peak

Polarity: Horizontal

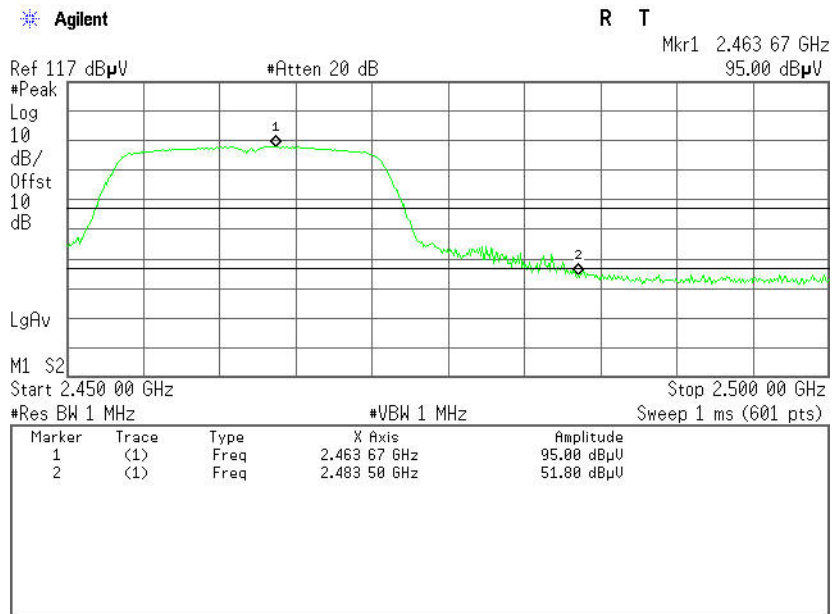

Detector mode: Average

Polarity: Horizontal

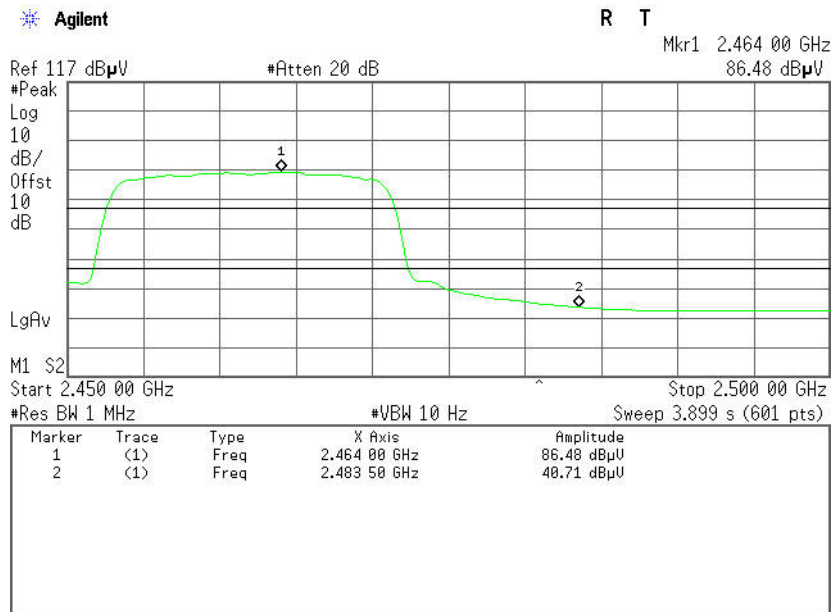

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	45.56	-6.24	51.80	74.00	-22.20	Peak	Horizontal
2	2483.5000	34.47	-6.24	40.71	54.00	-13.29	AVG	Horizontal




IEEE 802.11n HT40 MHz mode

Band Edges (CH Low)


Detector mode: Peak

Polarity: Vertical

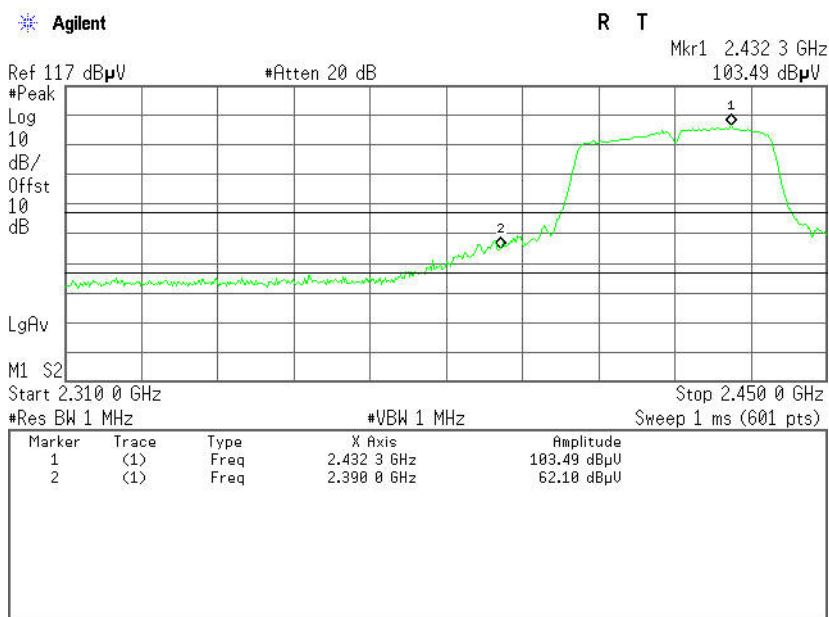

Detector mode: Average

Polarity: Vertical

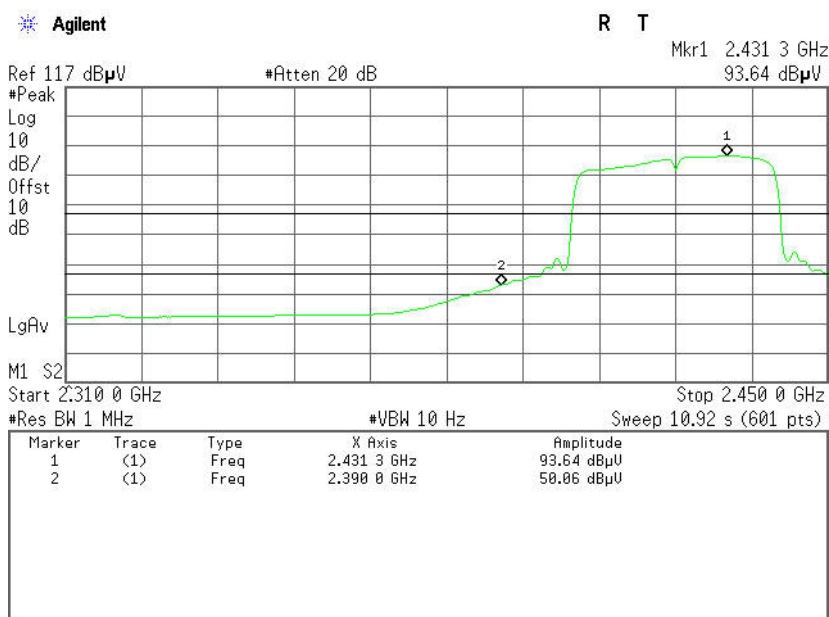


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	55.50	-6.60	62.10	74.00	-11.90	Peak	Vertical
2	2390.0000	43.46	-6.60	50.06	54.00	-3.94	Average	Vertical




Detector mode: Peak

Polarity: Horizontal

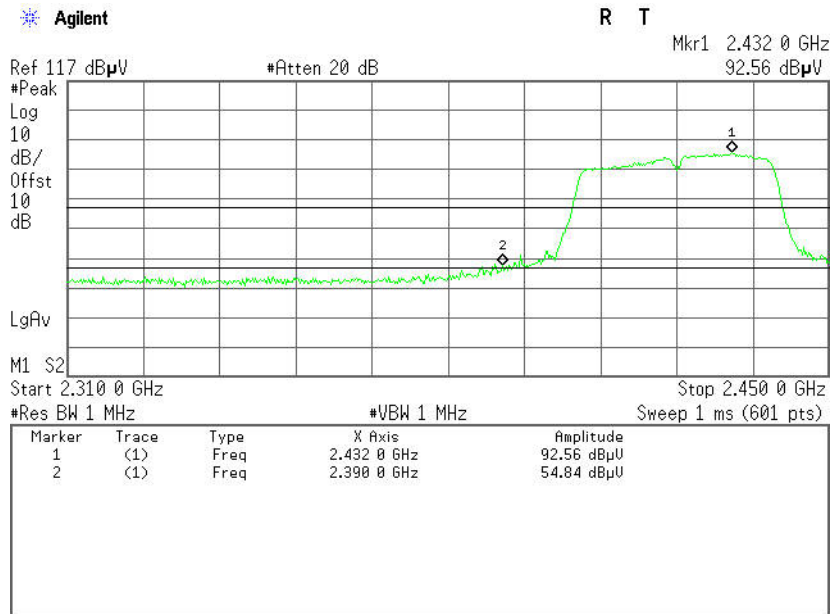

Detector mode: Average

Polarity: Horizontal

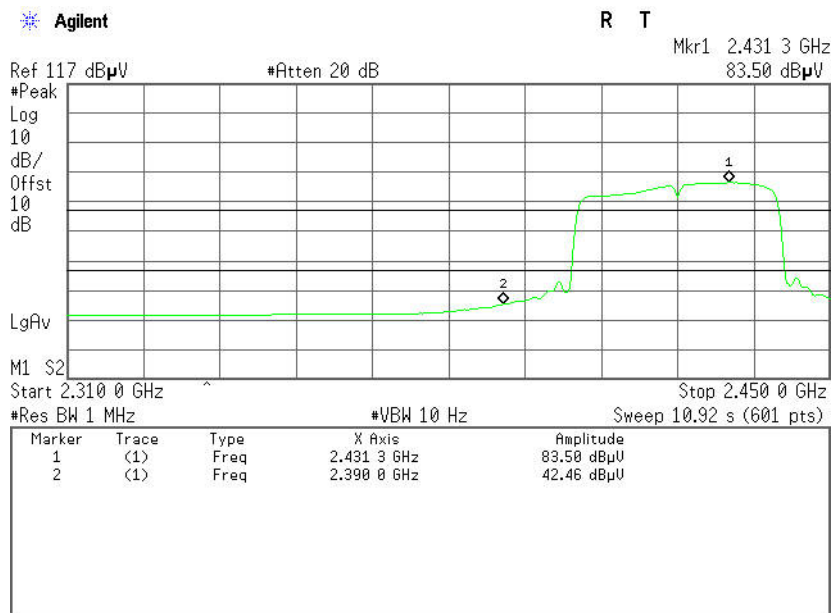


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	48.24	-6.60	54.84	74.00	-19.16	Peak	Horizontal
2	2390.0000	35.86	-6.60	42.46	54.00	-11.54	Average	Horizontal



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

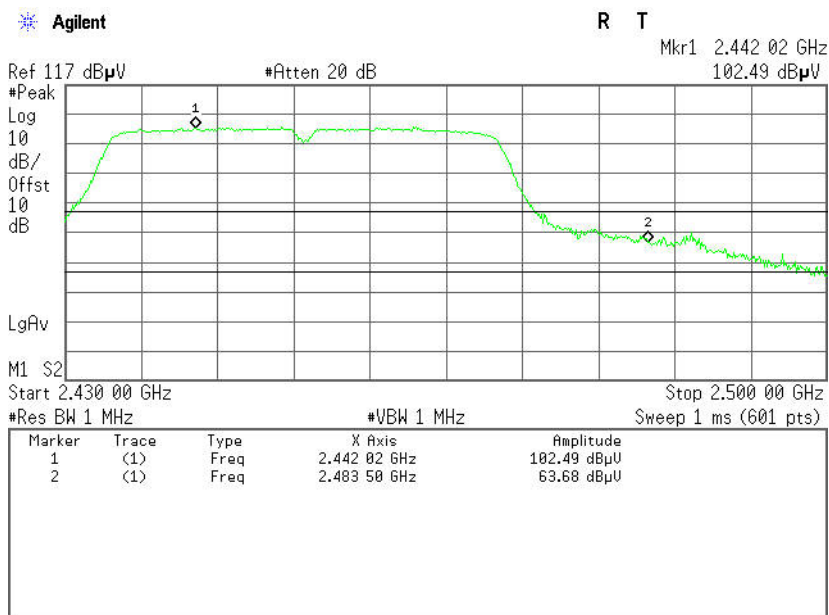

Detector mode: Average

Polarity: Vertical

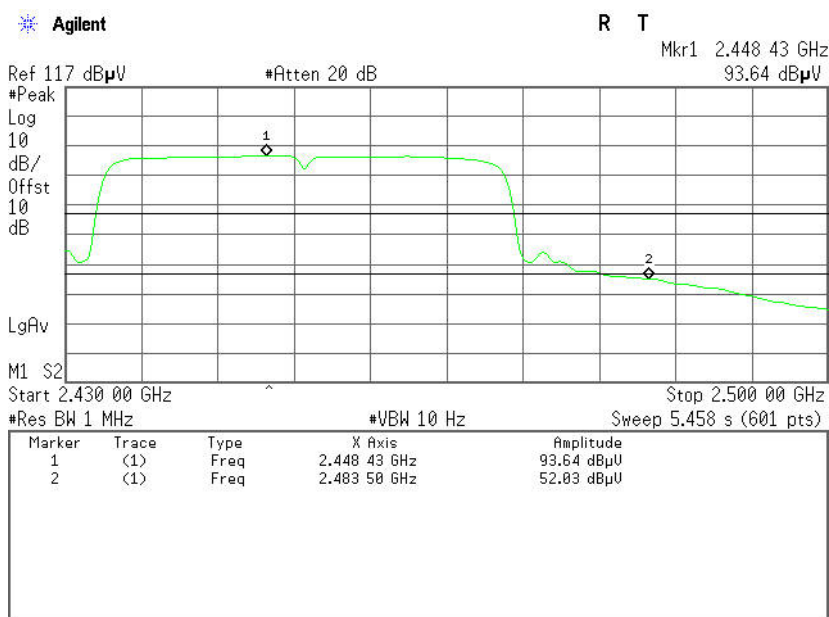


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	57.44	-6.24	63.68	74.00	-10.32	Peak	Vertical
2	2483.5000	45.79	-6.24	52.03	54.00	-1.97	AVG	Vertical




Detector mode: Peak

Polarity: Horizontal

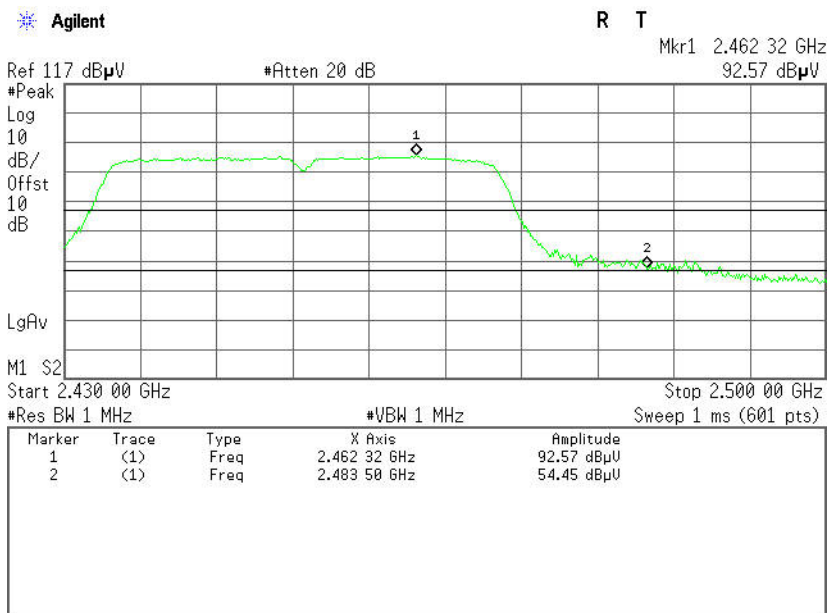

Detector mode: Average

Polarity: Horizontal

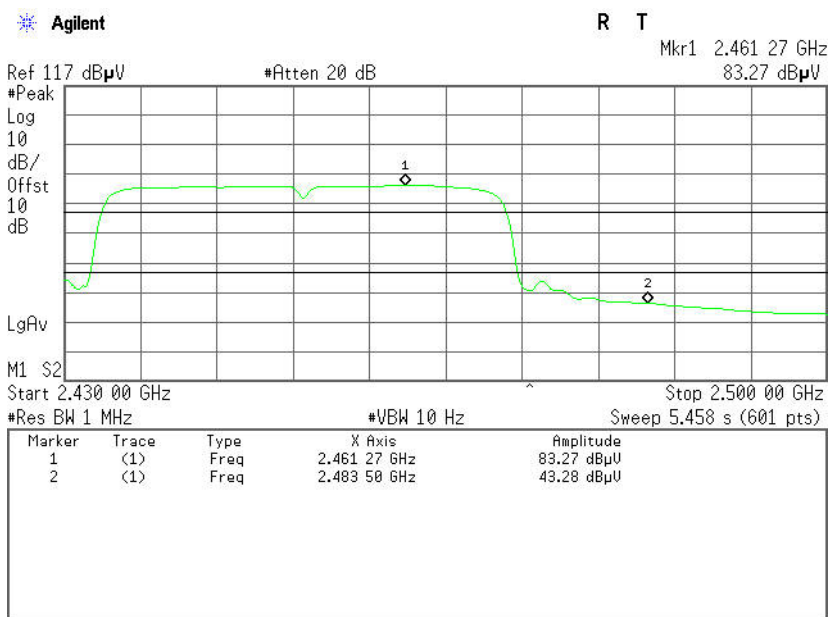

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	48.21	-6.24	54.45	74.00	-19.55	Peak	Horizontal
2	2483.5000	37.04	-6.24	43.28	54.00	-10.72	AVG	Horizontal



7.6. PEAK POWER SPECTRAL DENSITY MEASUREMENT

7.6.1. LIMITS

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

7.6.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015


7.6.3. TEST PROCEDURES (please refer to measurement standard)

§15.247(e) specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission. The same method as used to determine the conducted output power shall be used to determine the power spectral density (i.e., if peak-detected fundamental power was measured then use the peak PSD procedure and if average fundamental power was measured then use the average PSD procedure).

10.2 Method PKPSD (peak PSD)

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.6.4. TEST SETUP



**7.6.5. TEST RESULTS***No non-compliance noted***Test Data****Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-11.71	8	PASS
Mid	2437	-11.90		PASS
High	2462	-12.18		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-13.26	8	PASS
Mid	2437	-13.09		PASS
High	2462	-13.61		PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-12.23	8	PASS
Mid	2437	-11.89		PASS
High	2462	-12.76		PASS

Test mode: IEEE 802.11n HT40 MHz


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2422	-15.15	8	PASS
Mid	2437	-13.71		PASS
High	2452	-14.86		PASS




Test Plot

IEEE 802.11b mode

PPSD (CH Low)

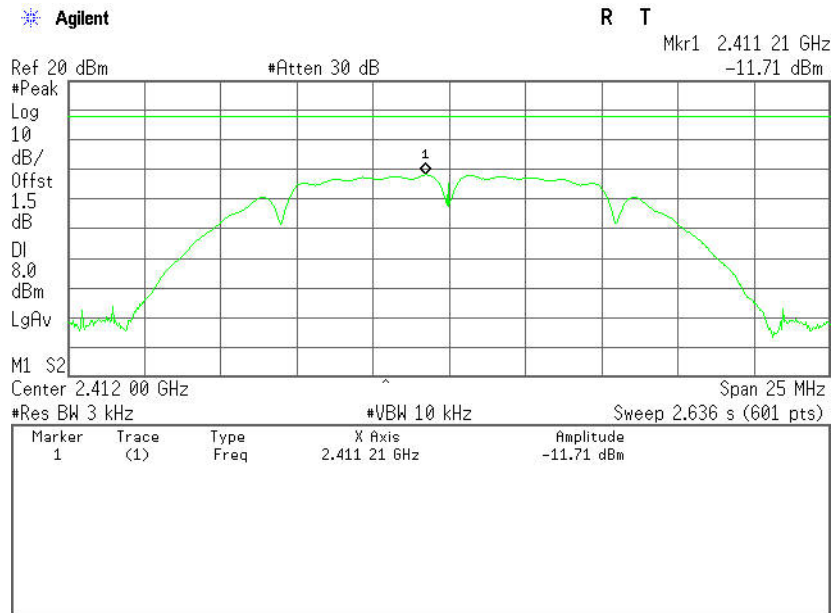


PPSD (CH Mid)

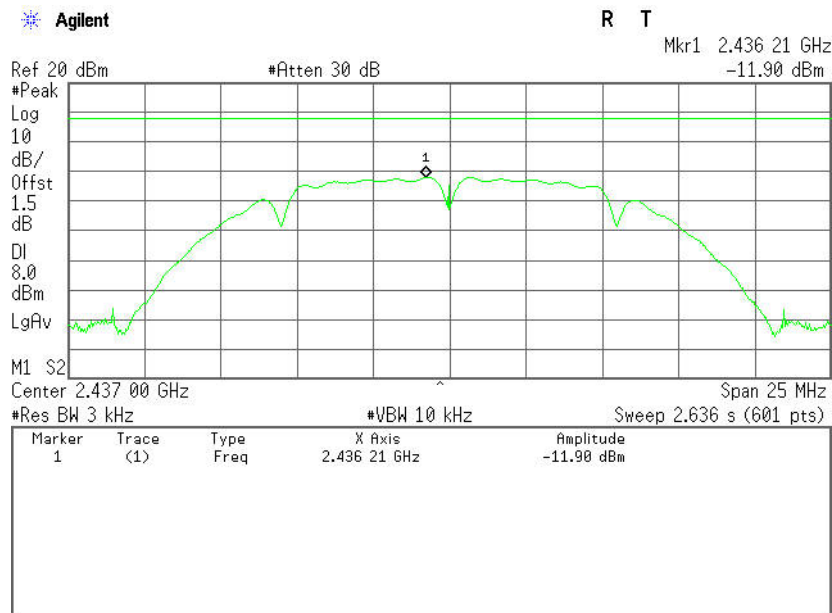




PPSD (CH High)

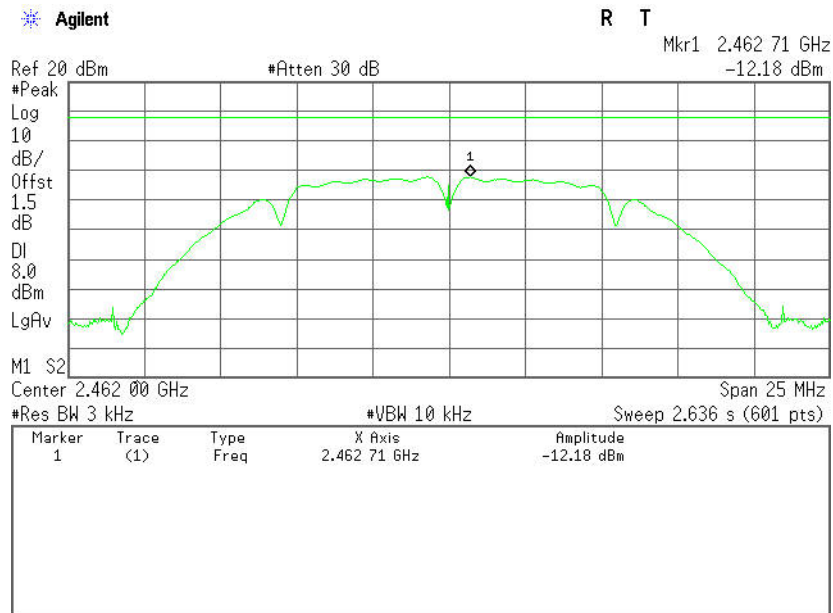




IEEE 802.11g mode

PPSD (CH Low)

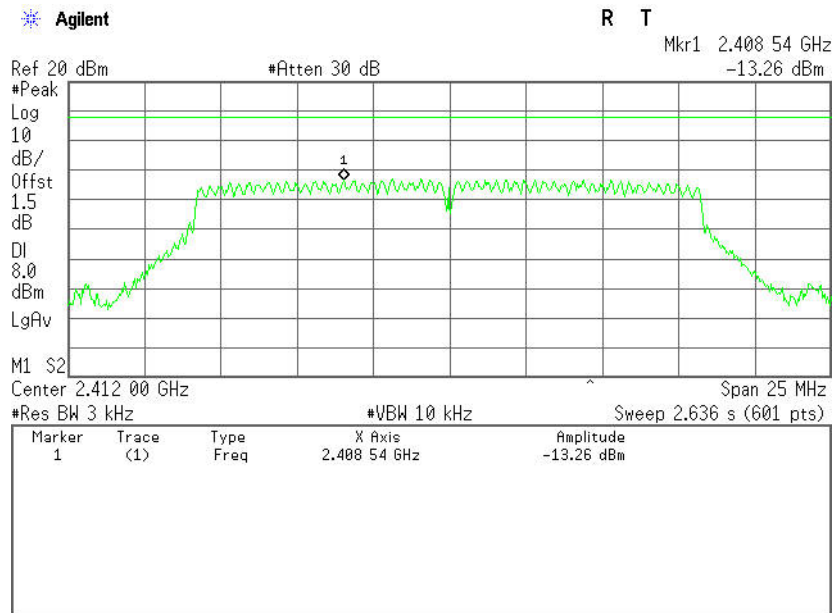


PPSD (CH Mid)

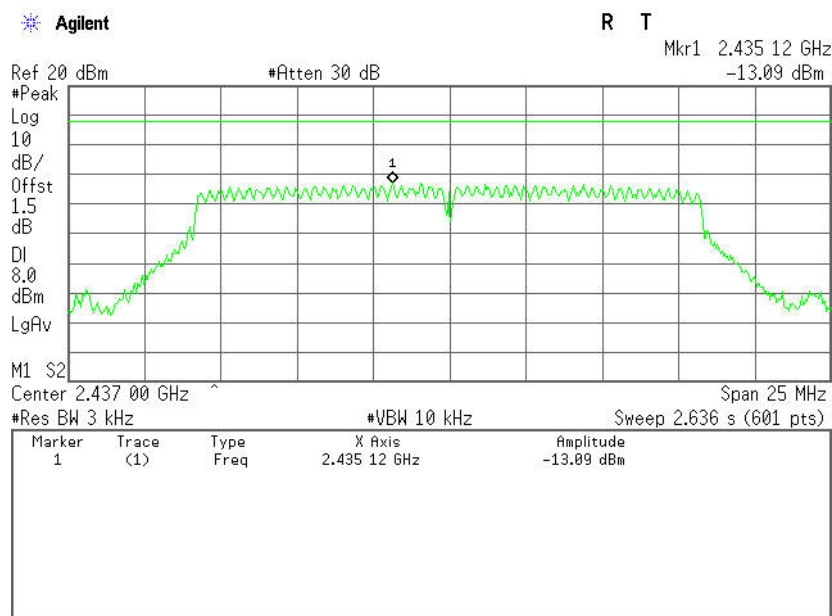




PPSD (CH High)

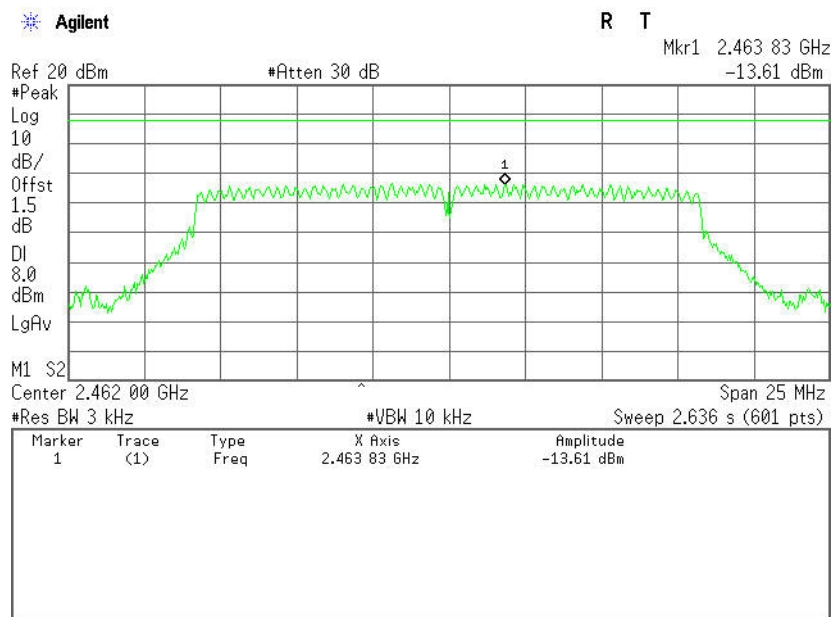




IEEE 802.11n HT20 MHz mode

PPSD (CH Low)

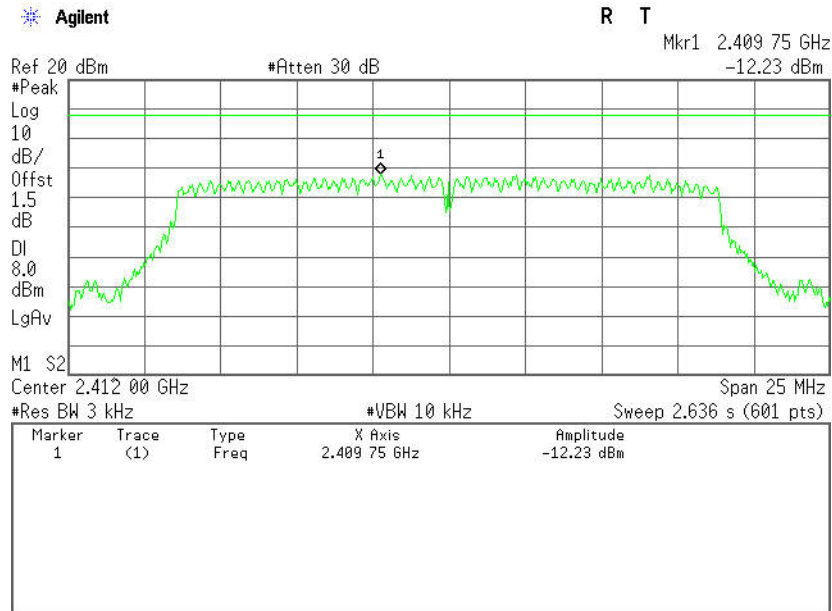


PPSD (CH Mid)

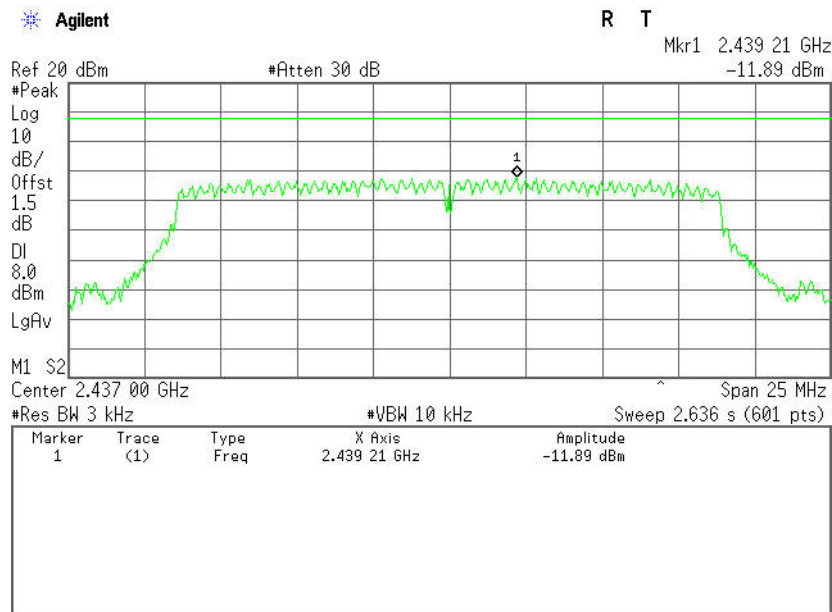




PPSD (CH High)

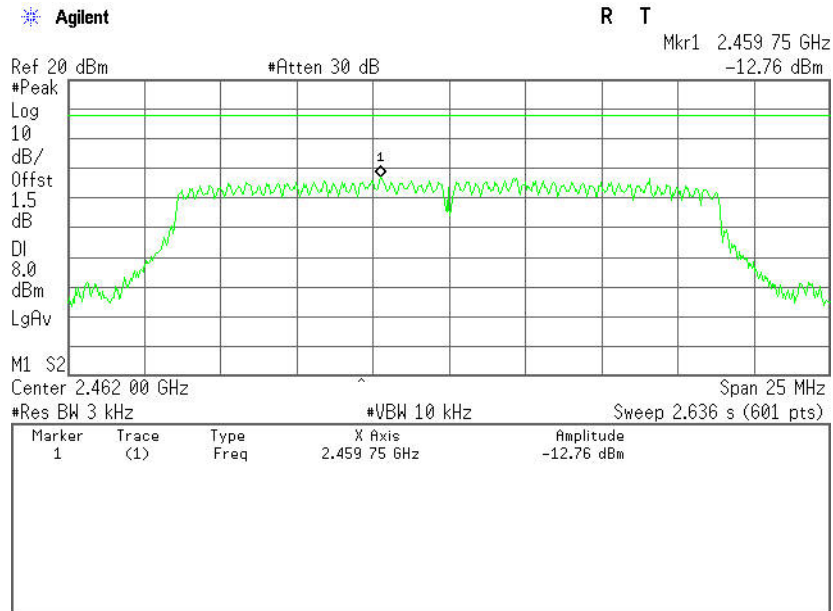




IEEE 802.11n HT40 MHz mode

PPSD (CH Low)

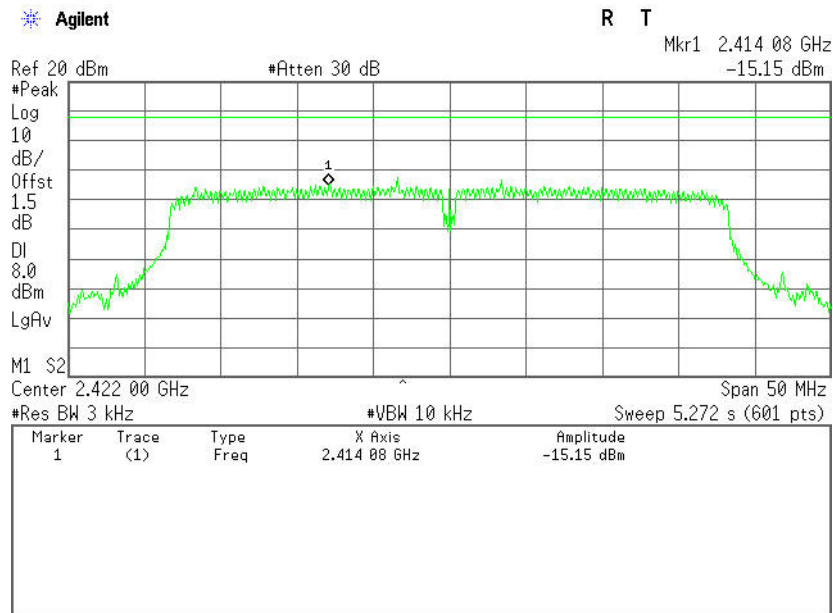

PPSD (CH Mid)

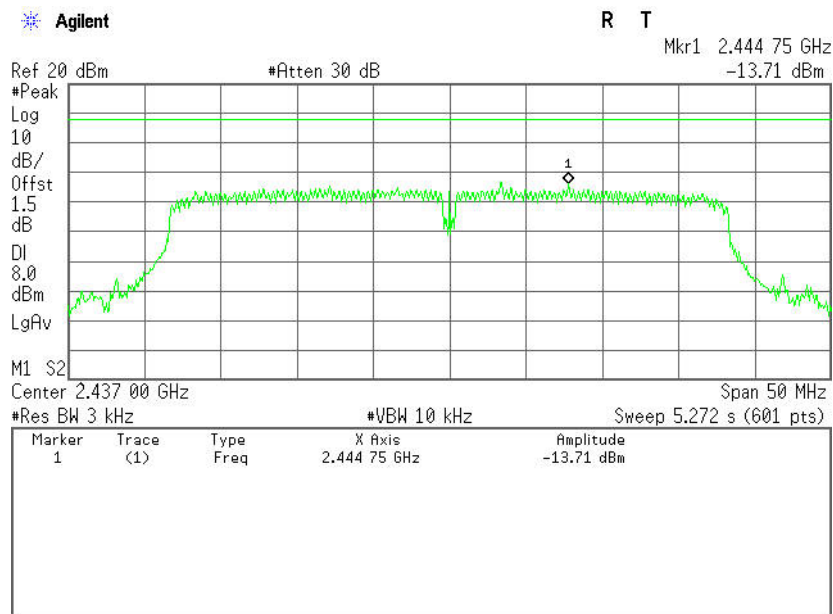



PPSD (CH High)

