

THRU lab & Engineering.

RM1105,11FL, ACE TECHNO TOWER

197-22, GURO-DONG GURO-GU SEOUL KOREA

T81221095059F81221095056 email thrukang@kornet.net



Test Report

Product Name: 49.82-49.90 MHz Wireless R/C Toy - TX

FCC ID: OKP0232A

Applicant:

**WOW Wee Ltd.
Energy Plaza, Suite 301A-C,
92 Granville Road
T.S.T East, Hong Kong.**

Date Receipt: 03/10/2004

Date Tested: 03/12/2004

**APPLICANT: WOW Wee Ltd.
FCC ID: OKP0232A
REPORT #: THRU-403007**

COVER SHEET

THRU lab & Engineering

RM1105,11FL, ACE TECHNO TOWER

197-22, GURO-DONG GURO-GU SEOUL KOREA

T81221095059F81221095056 email thrukang@kornet.net

TABLE OF CONTENTS LIST

APPLICANT: WOW Wee Ltd.

FCC ID: OKP0232A

TEST REPORT CONTAINING:

PAGE 1.....TEST EQUIPMENT LIST
PAGE 2.....TEST PROCEDURE
PAGE 3-5.....RADIATION INTERFERENCE TEST DATA
PAGE 6.....OCCUPIED BANDWIDTH
PAGE 7.....OCCUPIED BANDWIDTH PLOT

EXHIBITS CONTAINING:

EXHIBIT 2.....BLOCK DIAGRAM
EXHIBIT 3.....SCHEMATIC
EXHIBIT 4A-4B.....PARTS LIST
EXHIBIT 5.....INSTRUCTION MANUAL
EXHIBIT 6.....SAMPLE OF FCC ID LABEL
EXHIBIT 7.....LOCATION OF FCC ID LABEL
EXHIBIT 8.....EXTERNAL PHOTO - FRONT SIDE
EXHIBIT 9.....EXTERNAL PHOTO - BACK SIDE
EXHIBIT 10.....INTERNAL PHOTO - COMPONENT SIDE
EXHIBIT 11.....INTERNAL PHOTO - COPPER SIDE
EXHIBIT 14.....CIRCUIT DESCRIPTION

APPLICANT: WOW Wee Ltd.

FCC ID: OKP0232A

REPORT #:THRU-403007

TABLE OF CONTENTS

THRULab & Engineering

RM1105,11FL, ACE TECHNO TOWER

197-22, GURO-DONG GURO-GU SEOUL KOREA

T81221095059F81221095056 email thrukang@kornet.net

Test Equipment List

| DEVICE | MODEL | MFGR | SERNO | DUE . CAL |
|----------------------|--------------|-----------------|-------------|-------------|
| EMI Test Receiver | ESVS 10 | Rohde & Schwarz | 830489/001 | 2004.04.25. |
| Spectrum Analyzer | 8566B | Hewlett Packard | 2311A02394 | 2004.03.17 |
| Spectrum Display | 85662A | Hewlett Packard | 2542A12429 | 2004.03.17 |
| Quasi-Peak Adapter | 85650A | Hewlett Packard | 2521A00887 | 2004.03.17 |
| RF Preselector | 85685A | Hewlett Packard | 2648A00504 | 2004.03.17 |
| Pre-Amplifier | 8449B | Hewlett Packard | 3008A00375 | 2004.03.17 |
| Pre-Amplifier | 8447F | Hewlett Packard | 3113A05367 | 2004.03.17 |
| Spectrum Monitor | EZM | Rohde & Schwarz | 862304/007 | 2004.03.17 |
| Bico-Antenna | 94455-1 | Eaton | 977 | 2004.03.17 |
| Log-Periodic Antenna | 3146 | EMCO | 2051 | 2004.03.17 |
| Dipole Antenna | TDA25/1/2 | Electro Metrics | 176/200/200 | 2004.03.17 |
| Horn Antenna | SAS-571 | A.H Systems | 414 | 2004.03.17 |
| Spectrum Analyzer | R3261C | Advantest | 71720189 | 2004.04.26 |
| LISN | KNW-242 | Kyoritsu | 8-923-2 | 2004.07.12 |
| LISN | 8012-50-R-24 | Solar | 8379121 | 2004.07.12 |
| Loop Ant | 6507 | EMCO | 1435 | 2004.10.06 |

APPLICANT: WOW Wee Ltd.

FCC ID: OKP0232A

REPORT #: THRU-403007

THRULab & Engineering

RM1105,11FL, ACE TECHNO TOWER

197-22, GURO-DONG GURO-GU SEOUL KOREA

T81221095059F81221095056 email thrukang@kornet.net

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of THRULab & ENGINEERING.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz. The ambient temperature of the UUT was 15°C with a humidity of 28%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS

33 20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.4-1992 10.1.7 MEASUREMENT PROCEDURES: The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSIC63.4-1992 with the EUT 40 cm from the vertical ground wall.

Not Applicable, battery operated.

APPLICANT: WOW Wee Ltd.

FCC ID: OKP0232A

REPORT #: THRU-403007

THRULab & Engineering

RM1105,11FL, ACE TECHNO TOWER

197-22, GURO-DONG GURO-GU SEOUL KOREA

T81221095059F81221095056 email thrukang@kornet.net

APPLICANT: WOW Wee Ltd.

FCC ID: OKP0232A

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NO.: 15.235

REQUIREMENTS: CARRIER FREQUENCY SHALL NOT EXCEEDS 10,000 microvolts/meter AT 3M.

| Frequency (MHz) | Reading Receiver dBuv/m PK | Reading Receiver dBuv/m PK | Polar | Ant Height m | Antenna Factor dB | Cable Loss dB | Result dBuv PK | Result dBuv AV | Limit dBuv/m PK | Limit dBuv/m AV | Margin dBuv/m PK | Margin dBuv/m AV |
|-----------------|----------------------------|----------------------------|-------|--------------|-------------------|---------------|----------------|----------------|-----------------|-----------------|------------------|------------------|
| 49.858 | 45.1 | 39.9 | H | 2.8 | 10.9 | 1.0 | 57.0 | 51.8 | 100 | 80 | -43 | -28.2 |
| 49.858 | 59.2 | 54.0 | V | 2.60 | 10.9 | 1.0 | 71.1 | 65.9 | 100 | 80 | -28.9 | -14.1 |

SAMPLE CALCULATION: $FSdBuV/m = MR (dBuV) + ACFdB$.

TEST PROCEDURE: The procedure used was ANSI STANDARD C63.4-1992. The spectrum was scanned from 30 MHz to 1000 MHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The UUT was tested in 3 orthogonal planes.

TEST RESULTS: THE UNIT DOES MEET THE FCC REQUIREMENTS.

PERFORMED BY: K.M CHOI

DATE: 03/12/2004

APPLICANT: WOW Wee Ltd.

FCC ID: OKP0232A

REPORT #: THRU-403007

THRULab & Engineering

RM1105,11FL, ACE TECHNO TOWER

197-22, GURO-DONG GURO-GU SEOUL KOREA

T81221095059F81221095056 email thrukang@kornet.net

APPLICANT: WOW Wee Ltd.

FCC ID: OKP0232A

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NO.: 15.235

REQUIREMENTS: CARRIER FREQUENCY WILL NOT EXCEEDS 80 dBuV/m AT 3M.
OUT-OF-BAND EMISSIONS SHALL NOT EXCEED:

| | |
|---------------|----------------------------------|
| 30 - 88 MHz | 40.0 dBuV/M MEASURED AT 3 METERS |
| 88 - 216 MHz | 43.5 dBuV/M |
| 216 - 960 MHz | 46.0 dBuV/M |
| ABOVE 960 MHz | 54.0 dBuV/M |

TEST DATA:

| No | Frequency (MHz) | Result (dBuV/m) | Polar | Ant Height m | Antenna Factor dB | Cable Loss dB | Limit (dBuV/m) | Reading S/A (dBuV/m) | Margin (dBuV/m) |
|----|--------------------|--------------------|-------|--------------------|-------------------------|---------------------|-------------------|----------------------------|--------------------|
| 1 | 99.69 | 21.4 | H | 1.0 | 11.2 | 1.6 | 43.5 | 8.6 | -22.1 |
| 2 | 149.58 | 26.0 | H | 2.3 | 16.7 | 2.1 | 43.5 | 7.2 | -17.5 |
| 3 | 199.44 | 25.4 | H | 2.6 | 16.0 | 2.5 | 43.5 | 6.9 | -18.1 |
| 4 | 249.29 | 17.9 | H | 2.8 | 11.8 | 3.1 | 46.0 | 3.0 | -28.1 |
| 5 | 299.13 | 23.2 | H | 3.0 | 16.3 | 3.4 | 46.0 | 3.5 | -22.8 |
| 6 | 348.99 | 20.5 | H | 2.0 | 14.9 | 3.8 | 46.0 | 1.8 | -25.5 |
| 7 | 398.84 | 21.2 | H | 2.1 | 15.4 | 4.2 | 46.0 | 1.6 | -24.8 |
| 8 | 448.69 | 22.1 | H | 1.8 | 16.4 | 4.5 | 46.0 | 1.2 | -23.9 |
| 9 | 498.53 | 24.9 | H | 1.5 | 18.2 | 4.9 | 46.0 | 1.8 | -21.1 |

SAMPLE CALCULATION: $FSdBuV/m = MR (dBuV) + ACFdB$.

TEST PROCEDURE: The procedure used was ANSI STANDARD C63.4-1992. The spectrum was scanned from 30 MHz to 1000 MHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The UUT was tested in 3 orthogonal planes.

TEST RESULTS: THE UNIT DOES MEET THE FCC REQUIREMENTS.

PERFORMED BY: Kyoung.M Choi

DATE: 03/12/2004

APPLICANT: WOW Wee Ltd.

FCC ID: OKP0232A

REPORT #: THRU-403007

THRULab & Engineering

RM1105,11FL, ACE TECHNO TOWER

197-22, GURO-DONG GURO-GU SEOUL KOREA

T81221095059F81221095056 email thrukang@kornet.net

APPLICANT: WOW Wee Ltd.

FCC ID: OKP0232A

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NO.: 15.235

REQUIREMENTS: CARRIER FREQUENCY WILL NOT EXCEEDS 80 dBuV/m AT 3M.
OUT-OF-BAND EMISSIONS SHALL NOT EXCEED:

| | |
|---------------|----------------------------------|
| 30 - 88 MHz | 40.0 dBuV/M MEASURED AT 3 METERS |
| 88 - 216 MHz | 43.5 dBuV/M |
| 216 - 960 MHz | 46.0 dBuV/M |
| ABOVE 960 MHz | 54.0 dBuV/M |

TEST DATA:

| No | Frequency (MHz) | Result (dBuV/m) | Polar | Ant Height m | Antenna Factor dB | Cable Loss dB | Limit (dBuV/m) | Reading S/A (dBuV/m) | Margin (dBuV/m) |
|----|--------------------|--------------------|-------|--------------------|-------------------------|---------------------|-------------------|----------------------------|--------------------|
| 1 | 99.69 | 27.8 | V | 1.2 | 11.2 | 1.6 | 43.5 | 15.0 | -15.7 |
| 2 | 149.58 | 25.2 | V | 1.9 | 16.7 | 2.1 | 43.5 | 6.4 | -18.3 |
| 3 | 199.44 | 24.1 | V | 1.3 | 16.0 | 2.5 | 43.5 | 5.6 | -19.4 |
| 4 | 249.29 | 18.6 | V | 2.0 | 11.8 | 3.1 | 46.0 | 3.7 | -27.4 |
| 5 | 299.13 | 27.1 | V | 1.8 | 16.3 | 3.4 | 46.0 | 7.4 | -18.9 |
| 6 | 348.99 | 21.6 | V | 2.9 | 14.9 | 3.8 | 46.0 | 2.9 | -24.4 |
| 7 | 398.84 | 21.2 | V | 2.5 | 15.4 | 4.2 | 46.0 | 1.6 | -24.8 |
| 8 | 448.69 | 22.6 | V | 1.6 | 16.4 | 4.5 | 46.0 | 1.7 | -23.4 |
| 9 | 498.53 | 24.9 | V | 1.0 | 18.2 | 4.9 | 46.0 | 1.8 | -21.1 |

SAMPLE CALCULATION: $FSdBuV/m = MR (dBuV) + ACFdB$.

TEST PROCEDURE: The procedure used was ANSI STANDARD C63.4-1992. The spectrum was scanned from 30 MHz to 1000 MHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The UUT was tested in 3 orthogonal planes.

TEST RESULTS: THE UNIT DOES MEET THE FCC REQUIREMENTS.

PERFORMED BY: Kyoung.M Choi

DATE: 03/12/2004

APPLICANT: WOW Wee Ltd.

FCC ID: OKP0232A

REPORT #: THRU-403007

THRULab & Engineering

RM1105,11FL, ACE TECHNO TOWER

197-22, GURO-DONG GURO-GU SEOUL KOREA

T81221095059F81221095056 email thrukang@kornet.net

APPLICANT: WOW Wee Ltd.

FCC ID: OKP0232A

NAME OF TEST: Occupied Bandwidth

RULES PART NO.: 15.235

REQUIREMENTS: The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits of 15.209, whichever permits the higher emission levels.

| | | |
|---------------|-------------|----------------------|
| 30 - 88 MHz | 40.0 dBuV/M | MEASURED AT 3 METERS |
| 88 - 216 MHz | 43.5 dBuV/M | |
| 216 - 960 MHz | 46.0 dBuV/m | |
| ABOVE 960 MHz | 54.0 dBuV/m | |

THE GRAPH ON THE NEXT PAGE REPRESENTS THE EMISSIONS TAKEN FOR THE DEVICE.

METHOD OF MEASUREMENT: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was taken. The vertical scale is set to 10 dB per division.

TEST RESULTS: The unit DOES meet the FCC requirements.

PERFORMED BY: Kyoung.M Choi

DATE: 03/12/2004

APPLICANT: WOW Wee Ltd.

FCC ID: OKP0232A

REPORT #: THRU-403007


THRULab & Engineering

RM1105,11FL, ACE TECHNO TOWER

197-22, GURO-DONG GURO-GU SEOUL KOREA

T81221095059F81221095056 email thrukang@kornet.net

OCCUPIED BANDWIDTH PLOT

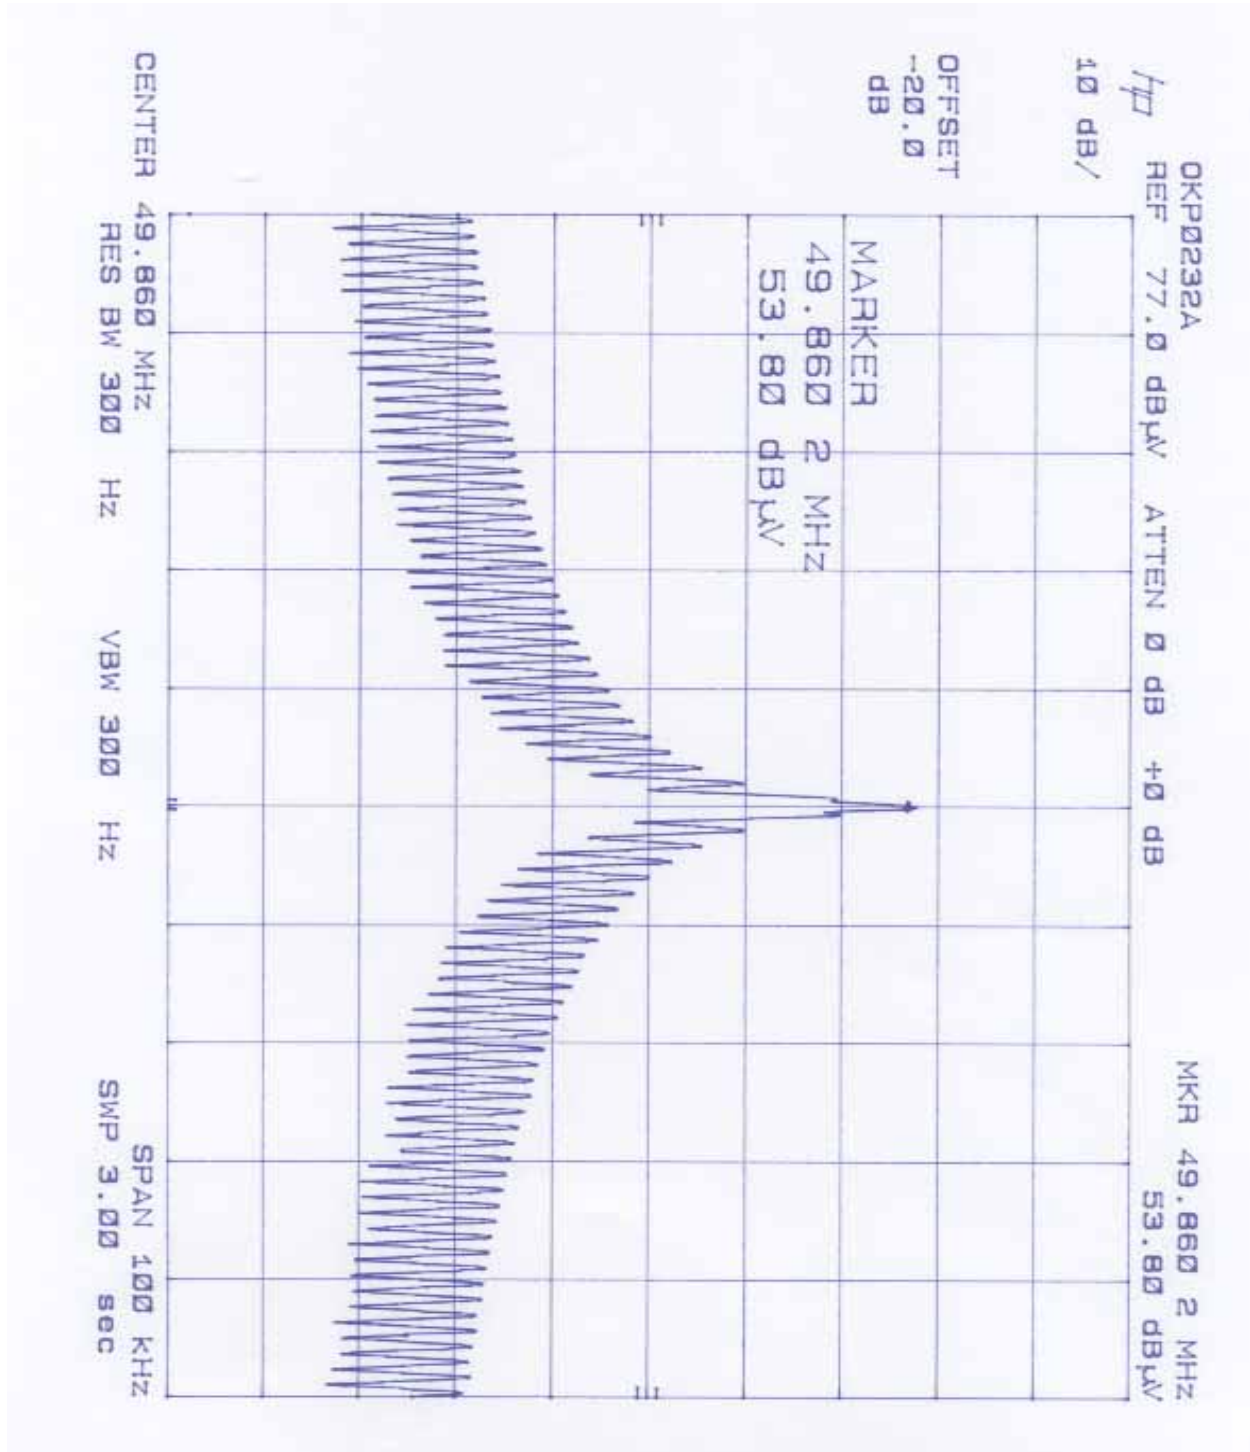

APPLICANT: WOW Wee Ltd.

FCC ID: OKP0232A

REPORT #: THRU-403007