

# TEST REPORT

FCC/ISED DTS Test for DA3510TAN&DA3500TKN  
Certification

**APPLICANT**  
HYUNDAI MOBIS CO., LTD.

**REPORT NO.**  
HCT-RF-2105-FI010

**DATE OF ISSUE**  
June 1, 2021

**Tested by**  
Chang Hee Hwang



**Technical Manager**  
Jong Seok Lee



**HCT CO., LTD.**  
*BongJai Huh*  
BongJai Huh / CEO

**HCT CO., LTD.**

74, Seoicheon-ro 578beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 F ax. +82 31 645 6401



**HCT Co., Ltd.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 Fax. +82 31 645 6401

# TEST REPORT

FCC/ISED DTS Test  
for DA3510TAN &  
DA3500TKN

**REPORT NO.**

HCT-RF-2105-FI010

**DATE OF ISSUE**

June 01, 2021

**Additional Model**

FCC : DA3500TGG, DA3500TGN, DA3500TGL, DA3500TEG, DA3500TEP,  
DA3500TAN, DA3500TAU, DA3520TGG, DA3510TEG, DA3510TEP, DA3500TBB,  
DA3500TFN

**Applicant**

**HYUNDAI MOBIS CO., LTD.**

203, Teheran-ro, Gangnam-gu, Seoul, 135-977, South Korea

**Eut Type**  
**FCC Model Name**  
**ISED Model Name**

CAR AUDIO SYSTEM  
DA3510TAN  
DA3500TKN

**FCC ID**  
**IC**

TQ8-DA3510TAN  
5074A-DA3500TKN

**Max. RF Output Power**

802.11b : 9.84 dBm / 802.11g : 12.56 dBm / 802.11n(HT20) : 12.52 dBm

**Modulation type**

CCK/DSSS/OFDM

**FCC Classification**

Digital Transmission System(DTS)

**FCC Rule Part(s)**

Part 15.247

**ISED Rule Part(s)**

RSS-247 Issue 2 (February 2017)

RSS-Gen Issue 5\_Amendment 1 (March 2019)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	June 01, 2021	Initial Release

### Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISSED Rules under normal use and maintenance

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## CONTENTS

1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	7
3. INSTRUMENT CALIBRATION	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS	9
8. SUMMARY TEST OF RESULTS	30
9. TEST RESULT	32
9.1 DUTY CYCLE	32
9.2 6dB BANDWIDTH & 99 % BANDWIDTH	35
9.3 OUTPUT POWER	41
9.4 POWER SPECTRAL DENSITY	47
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	50
9.6 RADIATED SPURIOUS EMISSIONS	61
9.7 RADIATED RESTRICTED BAND EDGES	69
9.8 RECEIVER SPURIOUS EMISSIONS	72
10. LIST OF TEST EQUIPMENT	73
11. ANNEX A_ TEST SETUP PHOTO	75

## 1. EUT DESCRIPTION

FCC Model	DA3510TAN
ISED Model	DA3500TKN
FCC Additional Model	DA3500TGG, DA3500TGN, DA3500TGL, DA3500TEG, DA3500TEP, DA3500TAN, DA3500TAU, DA3520TGG, DA3510TEG, DA3510TEP, DA3500TBB, DA3500TFN
ISED Additional Model	-
EUT Type	CAR AUDIO SYSTEM
Power Supply	DC 14.4V
Frequency Range	2 412 MHz ~ 2 462 MHz
Max. RF Output Power	<b>Peak Power</b> 802.11b : 9.84 dBm 802.11g : 12.56 dBm 802.11n(HT20) : 12.52 dBm <b>Average Power</b> 802.11b : 3.89 dBm 802.11g : 4.64 dBm 802.11n(HT20) : 4.57 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n
Number of Channels	11 Channels
Antenna Specification	Antenna type: Pattern Antenna Peak Gain : -0.01 dBi
Date(s) of Tests	April 27, 2021 ~ May 26, 2021
PMN (Product Marketing Number)	DA3500TKN
HVIN (Hardware Version Identification Number)	DA3500TKN
FVIN (Firmware Version Identification Number)	SG2_HEV.USA.0000.116.001.210319
HMN (Host Marketing Name)	N/A
EUT serial numbers	Conducted : 96160-AT410 (FCC), 96160-AT400 (ISED) Radiated : 96160-AT410 (FCC), 96160-AT400 (ISED)

## 2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 2.

### GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 4. FACILITIES AND ACCREDITATIONS

### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISSED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of

ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.


Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05



## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

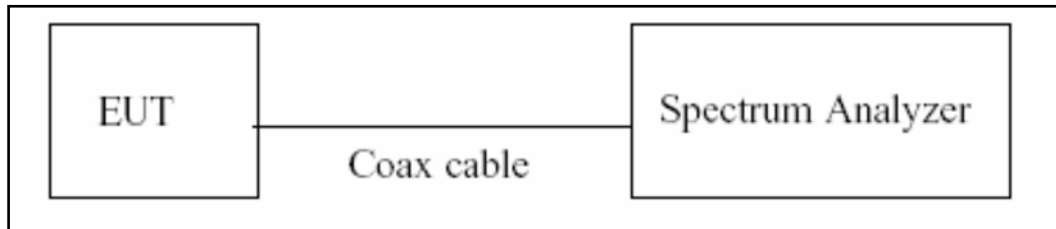

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{\text{total}}$  and  $T_{\text{on}}$
8. Calculate Duty Cycle =  $T_{\text{on}}/T_{\text{total}}$  and Duty Cycle Factor =  $10\log(1/\text{Duty Cycle})$

## 7.2. 6dB Bandwidth & 99 % Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

### Test Procedure (99 % Bandwidth for ISED)

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW  $\cong 3 \times$  RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration



#### Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)  
: Measure the peak power of the transmitter.
  
- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
  - 1) Measure the duty cycle.
  - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  - 3) Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

## 7.4. Power Spectral Density

### Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Span = 1.5 times the DTS channel bandwidth.
- 3)  $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ .
- 4)  $VBW \geq 3 \times RBW$ .
- 5) Sweep = auto couple
- 6) Detector = peak
- 7) Trace Mode = max hold
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (Peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 20 dBc ]

### Test Configuration



### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq 2 \times$  Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

**Factors for frequency**

Freq(MHz)	Factor(dB)
30	20.59
100	20.62
200	20.67
300	20.72
400	20.75
500	20.76
600	20.76
700	20.78
800	20.79
900	20.81
1000	20.82
2000	20.96
2400	21.00
2480	21.02
2500	21.02
3000	21.15
4000	21.26
5000	21.52
5150	21.72
5850	21.98
6000	21.98
7000	22.35
8000	22.40
9000	22.46
10000	22.52
11000	22.57
12000	22.65
13000	22.74
14000	22.71
15000	22.76
16000	23.77
17000	23.80
18000	23.85
19000	23.87
20000	23.91
21000	24.03
22000	24.10
23000	24.10
24000	24.14
25000	24.23
26000	24.24

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(20 dB) + Cable loss(1ea) + EUT Cable(For Conducted)

## 7.6. Radiated Test

### FCC

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

### ISED


Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

### FCC&ISED


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

## Test Configuration

Below 30 MHz

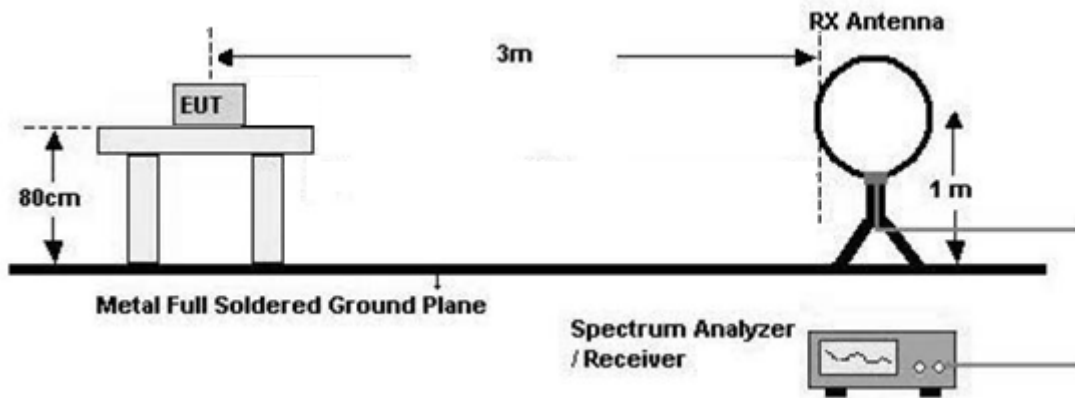


30 MHz - 1 GHz

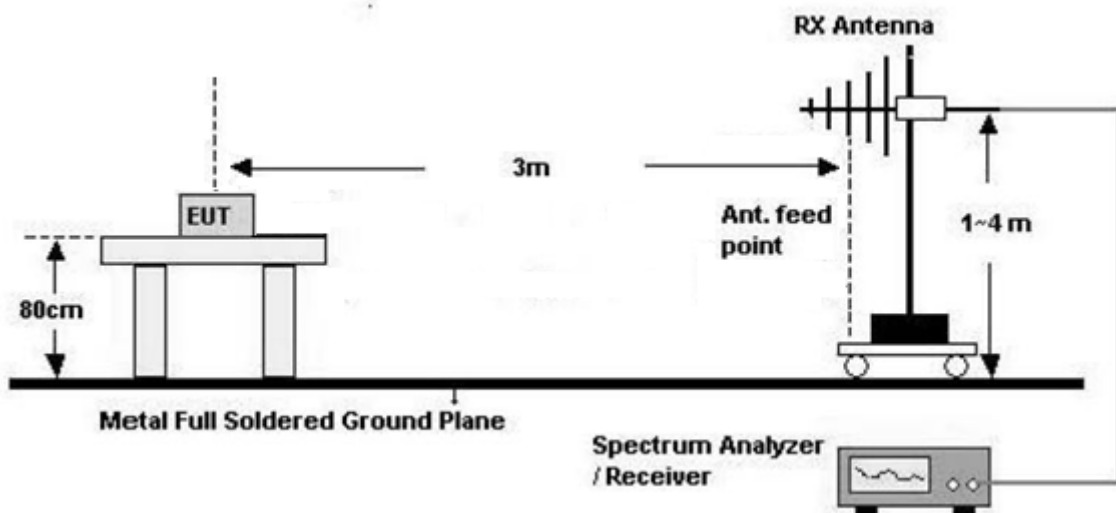



Above 1 GHz

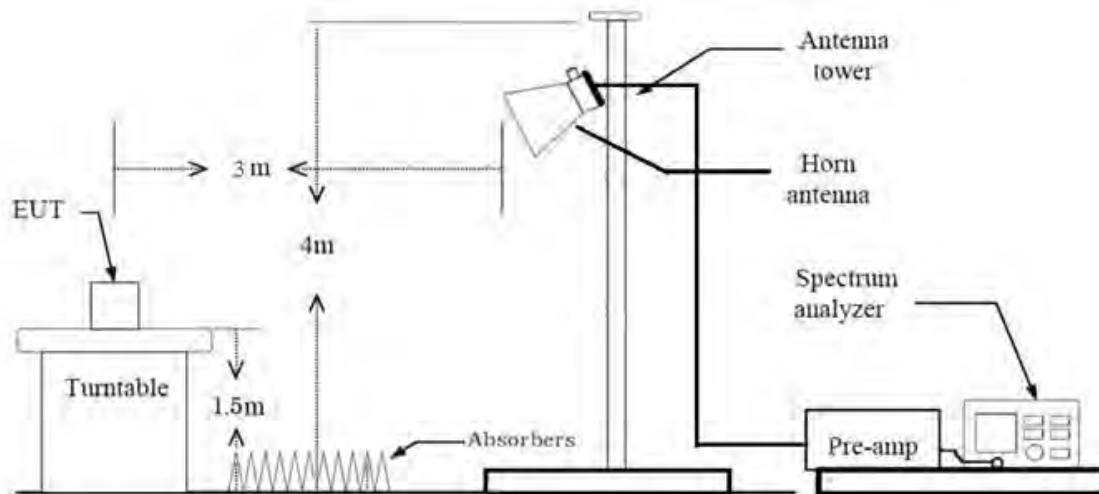

#### Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times$  RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific

emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

## 6. Spectrum Setting

## (1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq 3 \times$  RBW

## (2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※In general, (1) is used mainly

## 7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

## 8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

### (1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW

### (2) Measurement Type(Average): Duty cycle $\geq 98\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

### (3) Measurement Type(Average): Duty cycle $< 98\%$ , duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $\geq$  98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

+ Duty Cycle Factor

#### Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

#### 8. Spectrum Setting

##### (1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW

##### (2) Measurement Type(Average): Duty cycle $\geq 98\%$ ,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

##### (3) Measurement Type(Average): Duty cycle $< 98\%$ , duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the

emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $\geq 98\%$ )

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)  
+ Duty Cycle Factor

## 7.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor



## 7.8. Receiver Spurious Emissions

### Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 meters.

### Test Configuration

30 MHz - 1 GHz

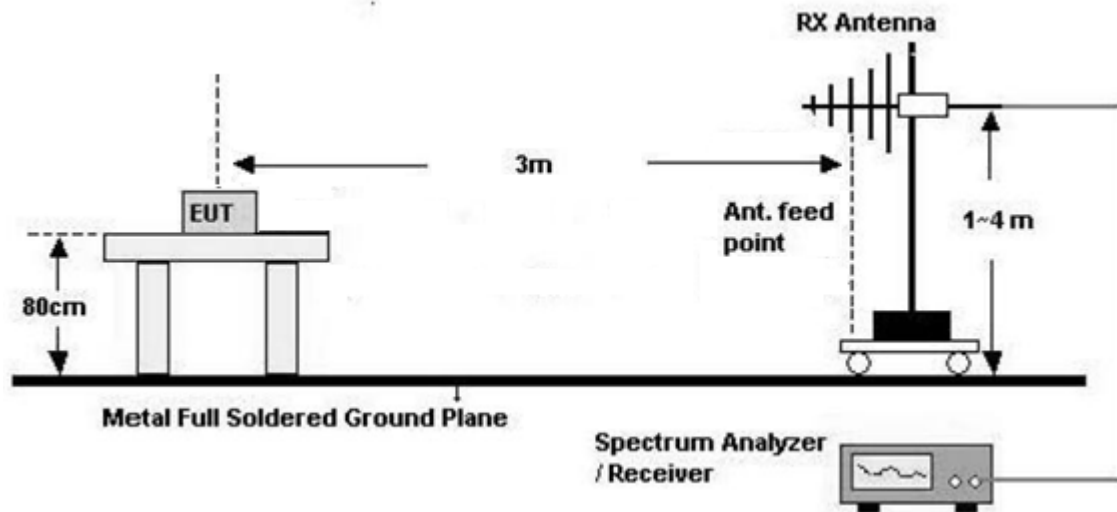

### Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

#### 6. Spectrum Setting

##### (1) Measurement Type(Peak):


- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq$  3 x RBW

##### (2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

#### 7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

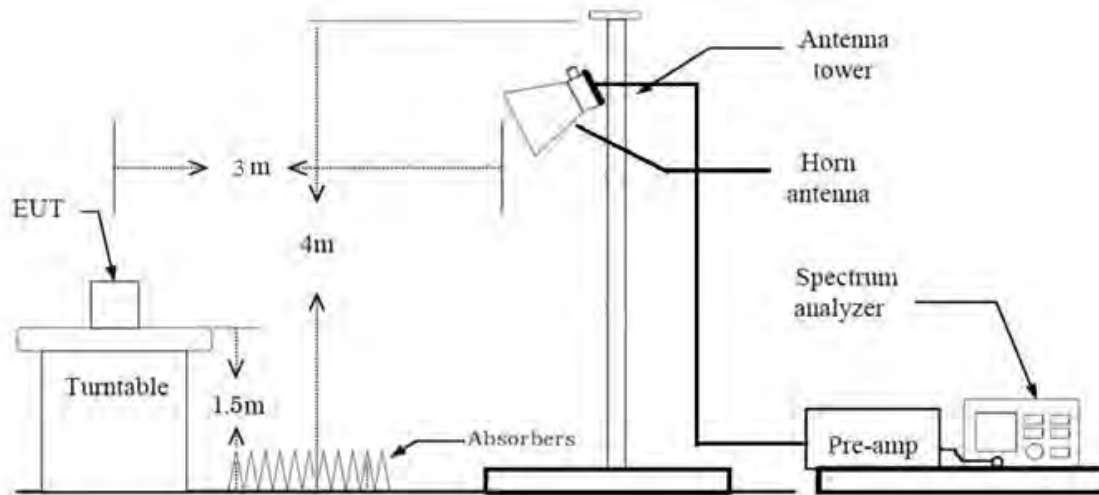

#### Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

##### (1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq$  3 x RBW

(2) Measurement Type(Average):

- We performed using a reduced video BW method was done with the analyzer in linear mode
- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)

## 7.9. Worst case configuration and mode

### Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone + Shark Antenna
  - Worst case : Stand alone, Stand alone + Shark Antenna
2. EUT Axis
  - Radiated Spurious Emissions : X
  - Radiated Restricted Band Edge : X
3. Duty cycle factor applies only 802.11g/n(Duty cycle < 98%).
4. All data rate of operation were investigated and the test results are worst case in lowest data rate of each mode.
  - 802.11b : 1Mbps
  - 802.11g : 6Mbps
  - 802.11n\_HT20 : MCS0
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane
6. DA3510TAN(FCC)& DA3500TKN(ISED), Additional Model were tested and the worst case results are reported.  
(Worst case : DA3510TAN(FCC)& DA3500TKN(ISED))

### AC Power line Conducted Emissions

1. We don't perform powerline conducted emission test. Because this EUT is used with vehicle.

### Conducted test

1. The EUT was configured with data rate of highest power.
2. DA3510TAN(FCC)& DA3500TKN(ISED), Additional Model were tested and the worst case results are reported.  
(Worst case : DA3510TAN(FCC)& DA3500TKN(ISED))

## 8. SUMMARY TEST OF RESULTS

### FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		N/A (#Note1)
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

#Note1 : Not Tested

### ISED Part

Test Description	ISED Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz	Conducted	PASS
99% Bandwidth	RSS-GEN, 6.7	N/A		PASS
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	cf. Section 7.7		N/A (#Note1)
Radiated Spurious Emissions	RSS-GEN, 8.9	cf. Section 7.6	Radiated	PASS
Receiver Spurious Emissions	RSS-GEN, 7	cf. Section 7.8		PASS
Radiated Restricted Band Edge	RSS-GEN, 8.10	cf. Section 7.6		PASS

#Note1 : Not Tested

## 9. TEST RESULT


### 9.1 DUTY CYCLE

Mode	Data Rate (Mbps)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	12.42	12.51	0.993	0.031
	2	6.202	6.299	0.985	0.067
	5.5	2.317	2.409	0.962	0.170
	11	1.206	1.300	0.928	0.325
802.11g	6	2.063	2.167	0.952	0.214
	9	1.382	1.485	0.931	0.313
	12	1.044	1.146	0.911	0.407
	18	0.704	0.804	0.875	0.580
	24	0.532	0.633	0.840	0.757
	36	0.364	0.465	0.784	1.059
	48	0.276	0.377	0.731	1.361
	54	0.248	0.350	0.709	1.492
802.11n (HT20)	6.5 (MCS0)	1.920	2.019	0.951	0.220
	13 (MCS1)	0.979	1.080	0.906	0.427
	19.5 (MCS2)	0.663	0.764	0.868	0.617
	26 (MCS3)	0.508	0.610	0.833	0.795
	39 (MCS4)	0.352	0.454	0.775	1.105
	52 (MCS5)	0.272	0.374	0.728	1.379
	58.5 (MCS6)	0.249	0.350	0.711	1.482
	65 (MCS7)	0.228	0.329	0.693	1.592




Test Plots


Duty cycle plot (802.11b(1Mbps))

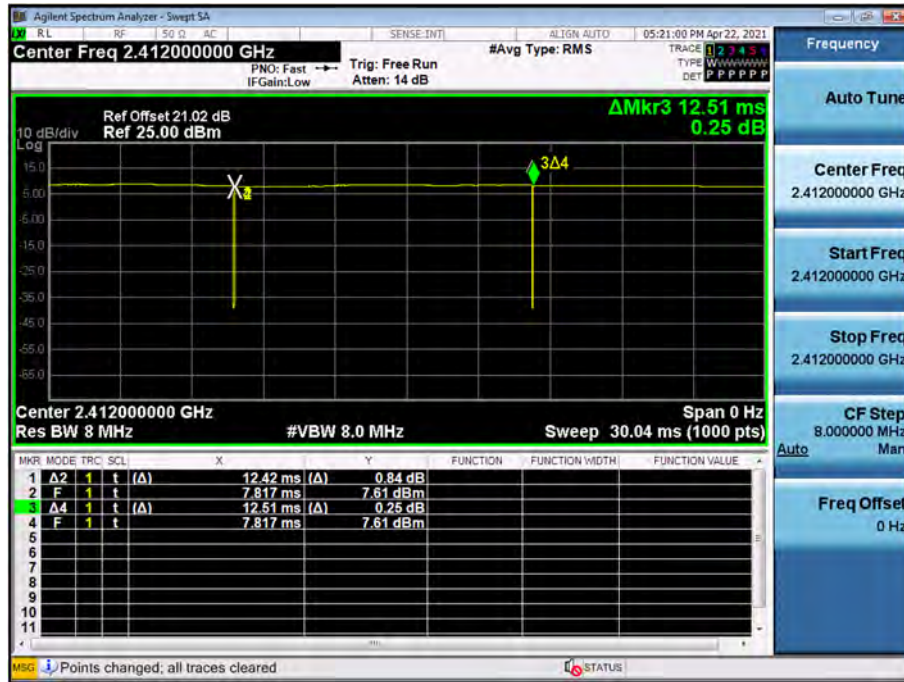

Duty cycle plot (802.11g(6Mbps))

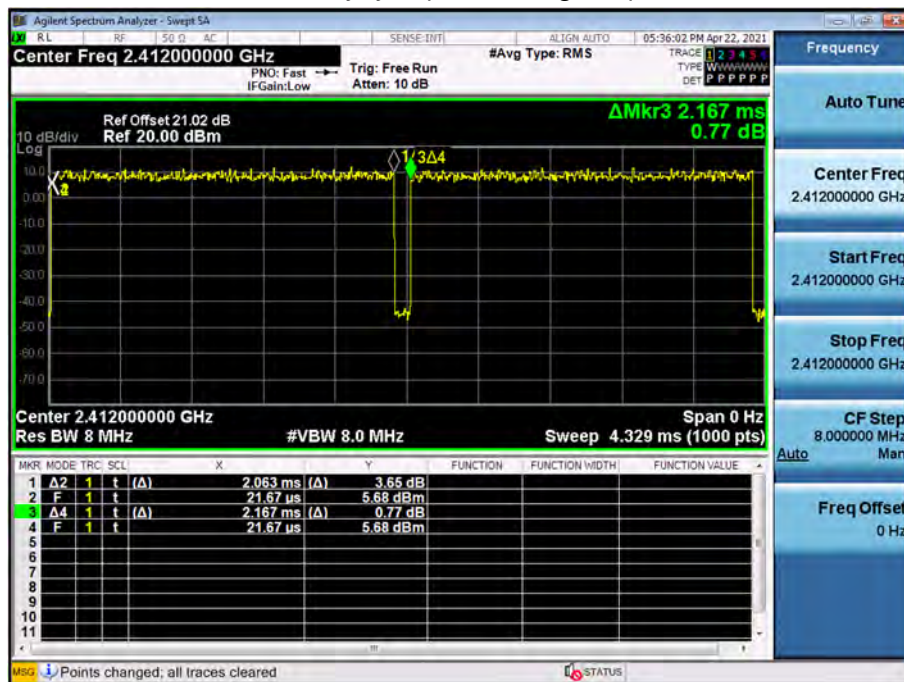

### Duty cycle plot (802.11n(MCS0))

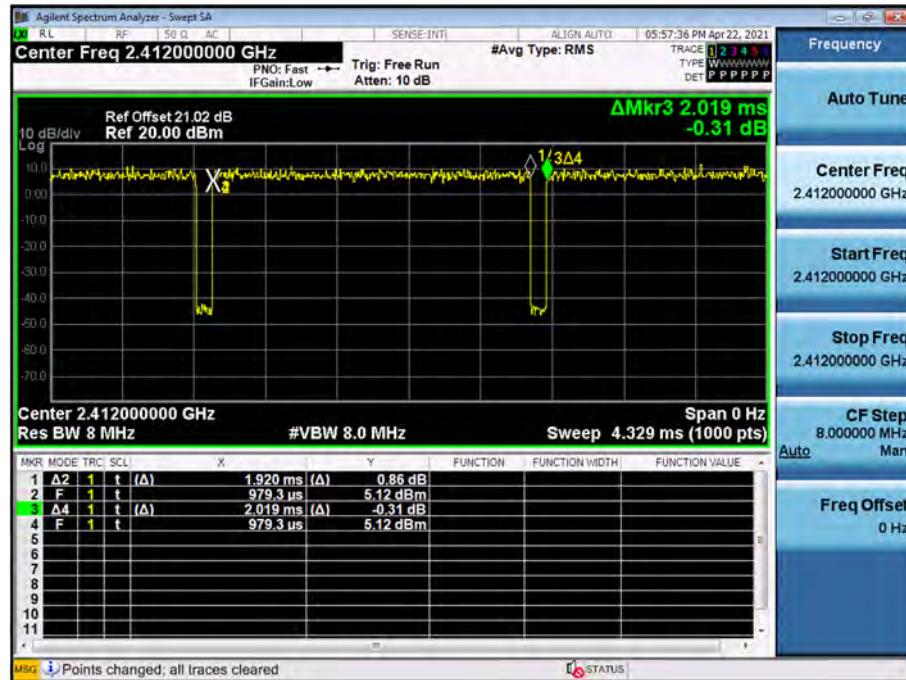

**Note:**

In order to simplify the report, attached plots were only the most lowest data rate.

## 9.2 6dB BANDWIDTH & 99 % BANDWIDTH

### FCC


802.11b Mode		Measured Bandwidth (6dB BW)[MHz]	OBW Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.			
2412	1	7.131	10.082	0.5
2437	6	7.122	10.070	0.5
2462	11	7.094	10.071	0.5

802.11g Mode		Measured Bandwidth (6dB BW)[MHz]	OBW Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.			
2412	1	16.29	16.408	0.5
2437	6	16.32	16.404	0.5
2462	11	16.35	16.415	0.5


802.11n Mode		Measured Bandwidth (6dB BW)[MHz]	OBW Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.			
2412	1	17.57	17.598	0.5
2437	6	17.54	17.633	0.5
2462	11	16.95	17.603	0.5

## □ Test Plots

6dB Bandwidth plot (802.11b-CH 11)

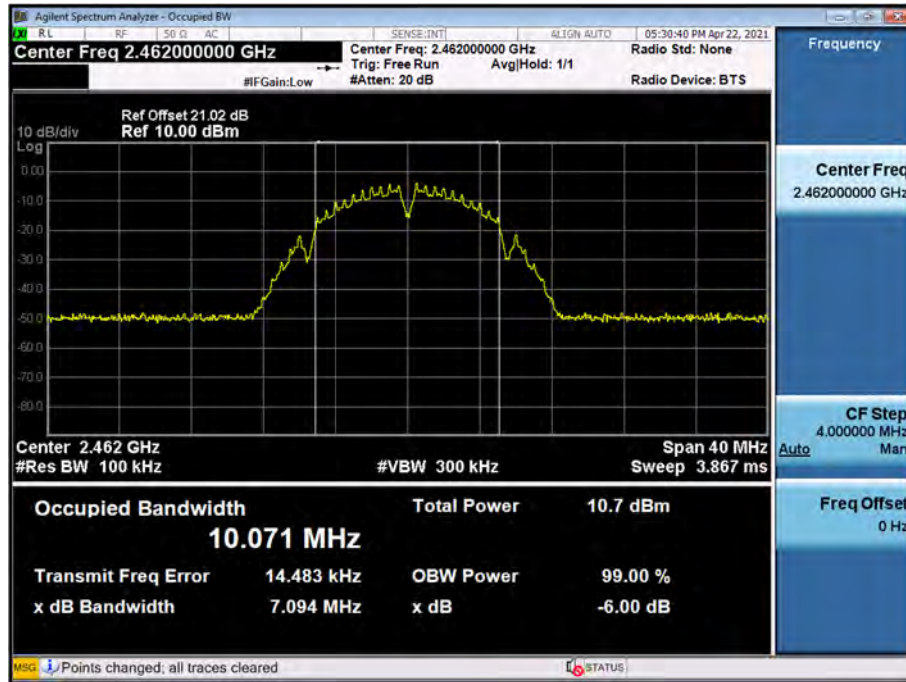

6dB Bandwidth plot (802.11g-CH 1)

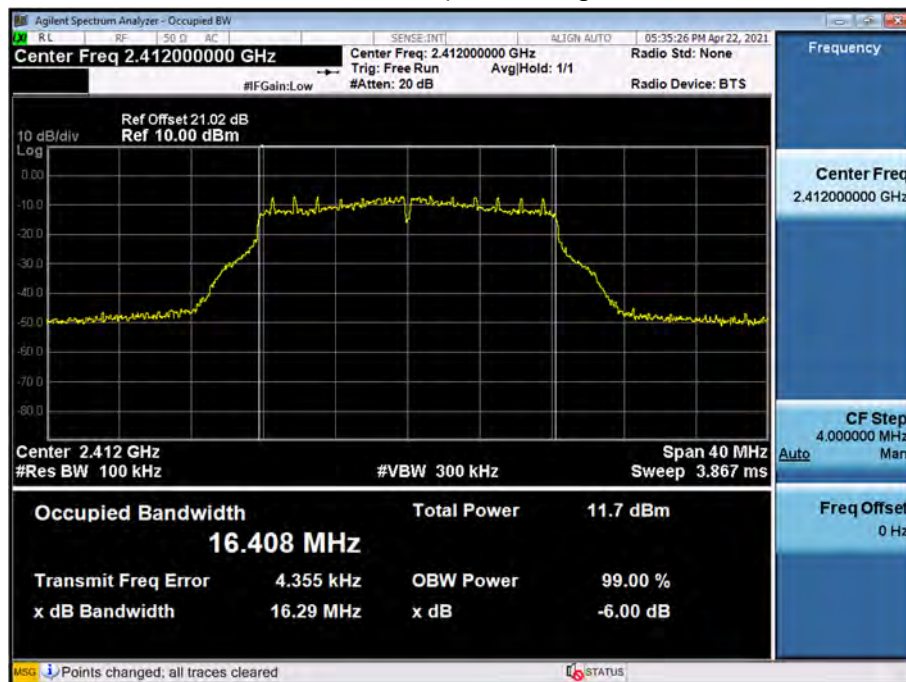

6dB Bandwidth plot (802.11n\_HT20-CH 11)



**Note:**

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.


**99% Bandwidth Measurements(ISED)**

802.11b Mode		OBW Bandwidth (99% BW)[MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	10.379	N/A
2437	6	10.395	N/A
2462	11	10.369	N/A
802.11g Mode		OBW Bandwidth (99% BW)[MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.066	N/A
2437	6	17.103	N/A
2462	11	17.123	N/A
802.11n(HT20) Mode		OBW Bandwidth (99% BW)[MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	18.147	N/A
2437	6	18.143	N/A
2462	11	18.126	N/A




## Test Plots


99% Bandwidth plot (802.11b-CH 6)

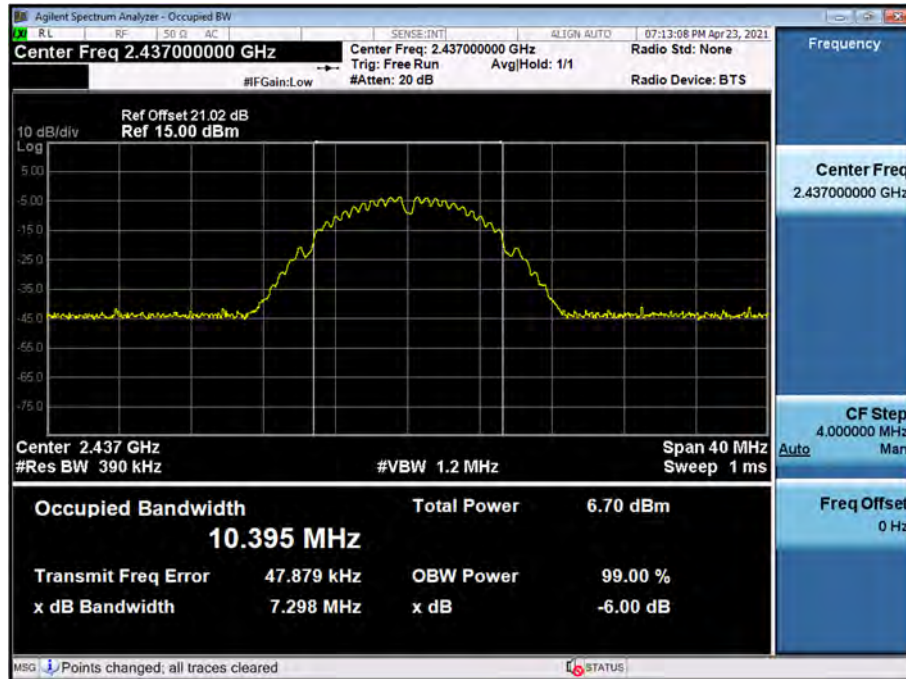

99% Bandwidth plot (802.11g-CH 11)

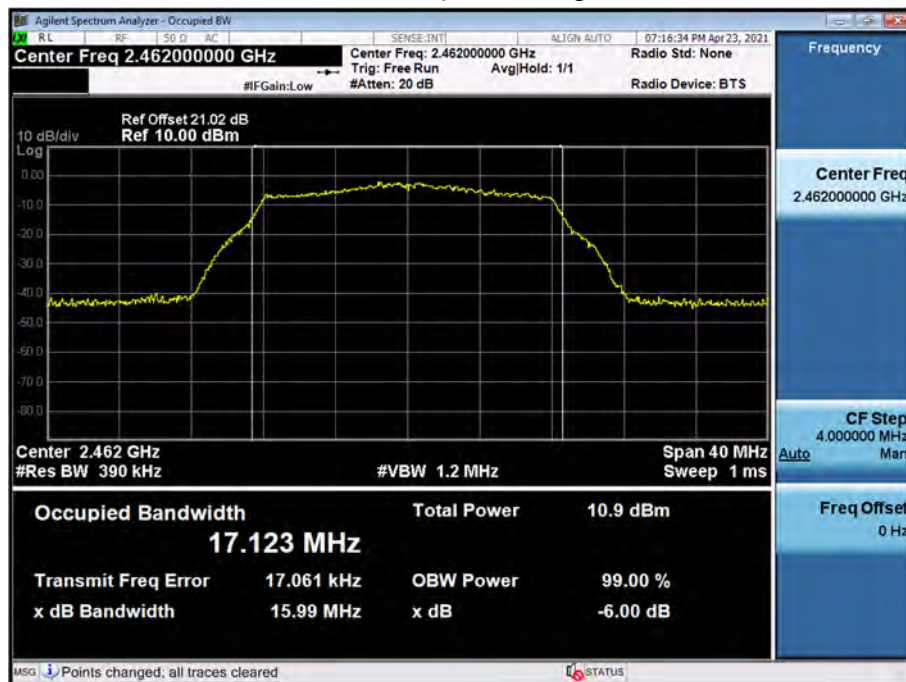

99% Bandwidth plot (802.11n\_HT20-CH 1)

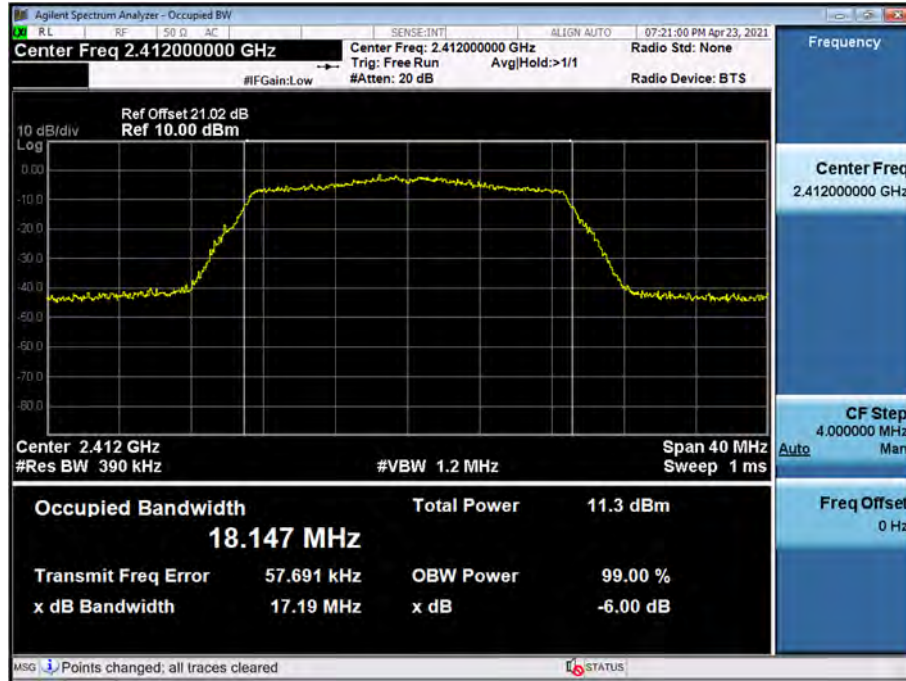

**Note:**

In order to simplify the report, attached plots were only the most wide 99% Bandwidth channel.



### 9.3 OUTPUT POWER

#### Peak Power

1. Power Meter offset = Attenuator loss(20 dB) + Cable loss(1ea) + EUT Cable(For Conducted)
  2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
- So, 21.02 dB is offset for 2.4 GHz Band

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1	6.36	30.00
		2	6.57	30.00
		5.5	8.04	30.00
		11	9.84	30.00
2437	6	1	5.85	30.00
		2	6.01	30.00
		5.5	7.48	30.00
		11	8.90	30.00
2462	11	1	5.61	30.00
		2	5.46	30.00
		5.5	7.29	30.00
		11	9.10	30.00

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6	12.56	30.00
		9	12.24	30.00
		12	12.16	30.00
		18	11.78	30.00
		24	12.14	30.00
		36	12.18	30.00
		48	11.93	30.00
		54	12.18	30.00
2437	6	6	11.74	30.00
		9	11.64	30.00
		12	11.54	30.00
		18	11.16	30.00
		24	11.52	30.00
		36	11.58	30.00
		48	11.62	30.00
		54	11.56	30.00
2462	11	6	11.55	30.00
		9	11.45	30.00
		12	11.33	30.00
		18	10.99	30.00
		24	11.19	30.00
		36	11.27	30.00
		48	11.34	30.00
		54	11.31	30.00

802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	0	11.70	30.00
		1	11.77	30.00
		2	11.77	30.00
		3	12.39	30.00
		4	12.43	30.00
		5	12.46	30.00
		6	12.52	30.00
		7	12.40	30.00
2437	6	0	11.17	30.00
		1	11.22	30.00
		2	11.25	30.00
		3	11.87	30.00
		4	11.80	30.00
		5	11.88	30.00
		6	12.23	30.00
		7	11.86	30.00
2462	11	0	10.68	30.00
		1	10.73	30.00
		2	10.72	30.00
		3	11.55	30.00
		4	11.52	30.00
		5	11.65	30.00
		6	12.34	30.00
		7	11.52	30.00

### Average Power

1. Power Meter offset = Attenuator loss(20 dB) + Cable loss(1ea) + EUT Cable(For Conducted)
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.  
 So, 21.02 dB is offset for 2.4 GHz Band.

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1	3.86	0.031	3.89	30.00
		2	3.78	0.067	3.85	30.00
		5.5	3.66	0.170	3.83	30.00
		11	3.52	0.325	3.85	30.00
2437	6	1	3.30	0.031	3.34	30.00
		2	3.25	0.067	3.31	30.00
		5.5	3.10	0.170	3.27	30.00
		11	2.63	0.325	2.96	30.00
2462	11	1	3.12	0.031	3.16	30.00
		2	2.66	0.067	2.73	30.00
		5.5	2.90	0.170	3.07	30.00
		11	2.80	0.325	3.12	30.00

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6	4.41	0.214	4.62	30.00
		9	4.28	0.313	4.59	30.00
		12	4.23	0.407	4.64	30.00
		18	3.58	0.580	4.16	30.00
		24	3.52	0.757	4.27	30.00
		36	3.22	1.059	4.27	30.00
		48	2.67	1.361	4.03	30.00
		54	2.83	1.492	4.32	30.00
2437	6	6	3.77	0.214	3.99	30.00
		9	3.66	0.313	3.98	30.00
		12	3.64	0.407	4.05	30.00
		18	2.99	0.580	3.57	30.00
		24	2.89	0.757	3.65	30.00
		36	2.58	1.059	3.64	30.00
		48	2.45	1.361	3.81	30.00
		54	2.19	1.492	3.69	30.00
2462	11	6	3.57	0.214	3.78	30.00
		9	3.46	0.313	3.77	30.00
		12	3.38	0.407	3.79	30.00
		18	2.78	0.580	3.36	30.00
		24	2.54	0.757	3.30	30.00
		36	2.29	1.059	3.35	30.00
		48	2.10	1.361	3.46	30.00
		54	1.95	1.492	3.44	30.00

802.11n Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	0	3.66	0.220	3.88	30.00
		1	3.46	0.427	3.89	30.00
		2	3.28	0.617	3.90	30.00
		3	3.24	0.795	4.04	30.00
		4	3.04	1.105	4.14	30.00
		5	2.74	1.379	4.12	30.00
		6	3.09	1.482	4.57	30.00
		7	2.51	1.592	4.10	30.00
2437	6	0	3.15	0.220	3.37	30.00
		1	2.98	0.427	3.41	30.00
		2	2.77	0.617	3.38	30.00
		3	2.73	0.795	3.52	30.00
		4	2.41	1.105	3.51	30.00
		5	2.23	1.379	3.61	30.00
		6	2.81	1.482	4.29	30.00
		7	1.96	1.592	3.55	30.00
2462	11	0	2.67	0.220	2.89	30.00
		1	2.52	0.427	2.95	30.00
		2	2.32	0.617	2.93	30.00
		3	2.48	0.795	3.27	30.00
		4	2.18	1.105	3.28	30.00
		5	1.99	1.379	3.37	30.00
		6	2.58	1.482	4.06	30.00
		7	1.77	1.592	3.36	30.00

#### 9.4 POWER SPECTRAL DENSITY

Mode	Frequency (MHz)	Channel No.	Test Result			
			Measured PSD (dBm)	Duty Cycle Factor (dBm)	Measured PSD + Duty Cycle Factor	Limit (dBm)
802.11b	2412	1	-2.748	0.031	-2.717	8
	2437	6	-4.003	0.031	-3.972	8
	2462	11	-3.837	0.031	-3.806	8
802.11g	2412	1	-6.942	0.407	-6.535	8
	2437	6	-7.697	0.407	-7.290	8
	2462	11	-7.971	0.407	-7.564	8
802.11n	2412	1	-6.694	1.482	-5.212	8
	2437	6	-6.913	1.482	-5.431	8
	2462	11	-7.463	1.482	-5.981	8

**Note :**

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(20 dB) + Cable loss(1ea) + EUT Cable(For Conducted)

3. 21.02 dB is offset for 2.4 GHz Band.

## Test Plots

Power Spectral Density (802.11b-CH 1)




Power Spectral Density (802.11g-CH 1)





Power Spectral Density (802.11n\_HT20 -CH 1)

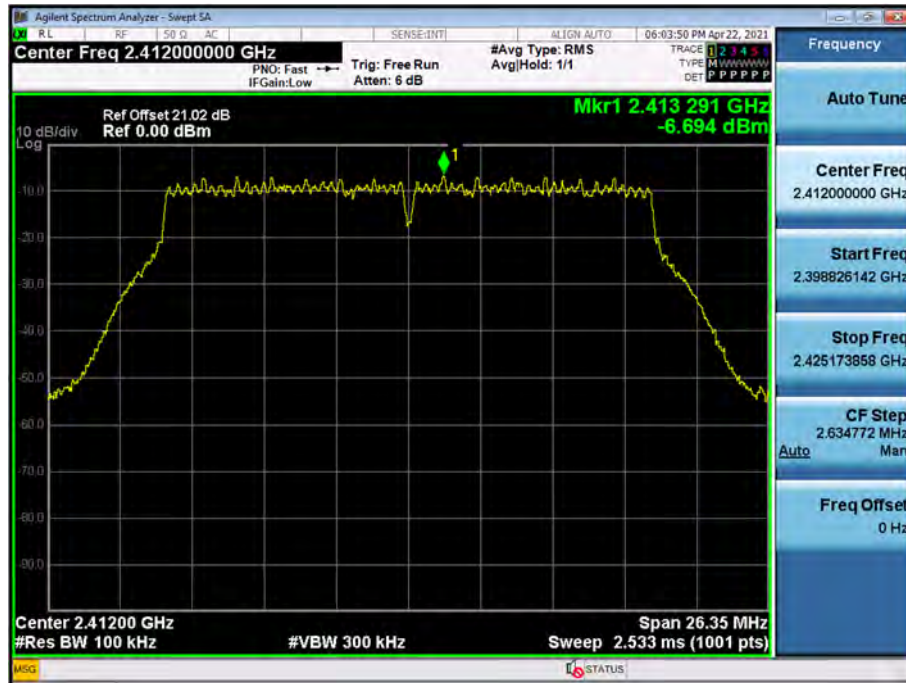

**Note :**

In order to simplify the report, attached plots were only the worst case PSD channel.


## 9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.


In order to simplify the report, attached plots were only the worst case channel and data rate.

□ Test Plots(BandEdge)

Band Edge (802.11b-CH1)

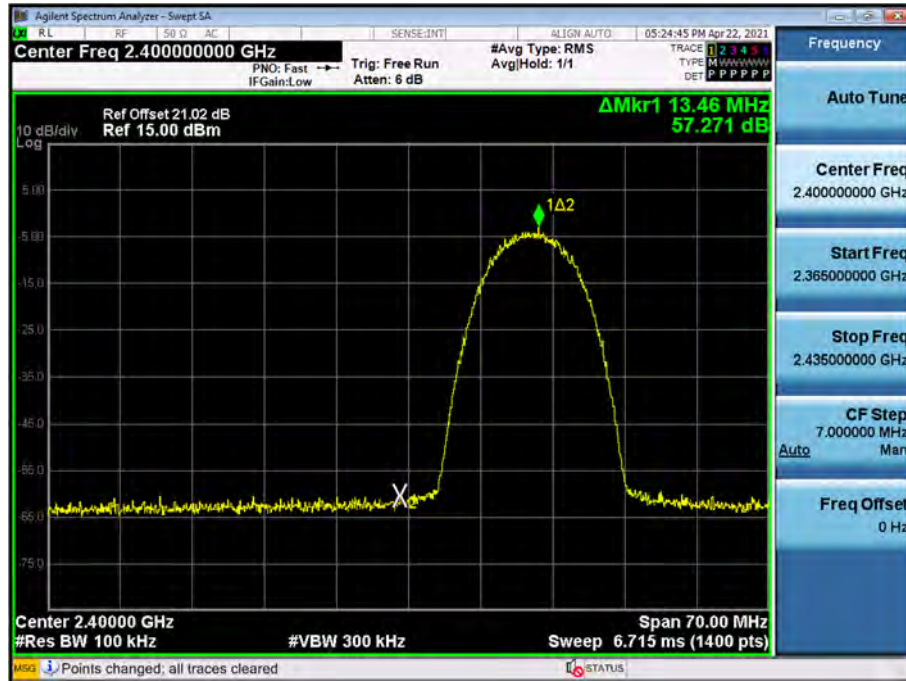

Band Edge (802.11b-CH11)

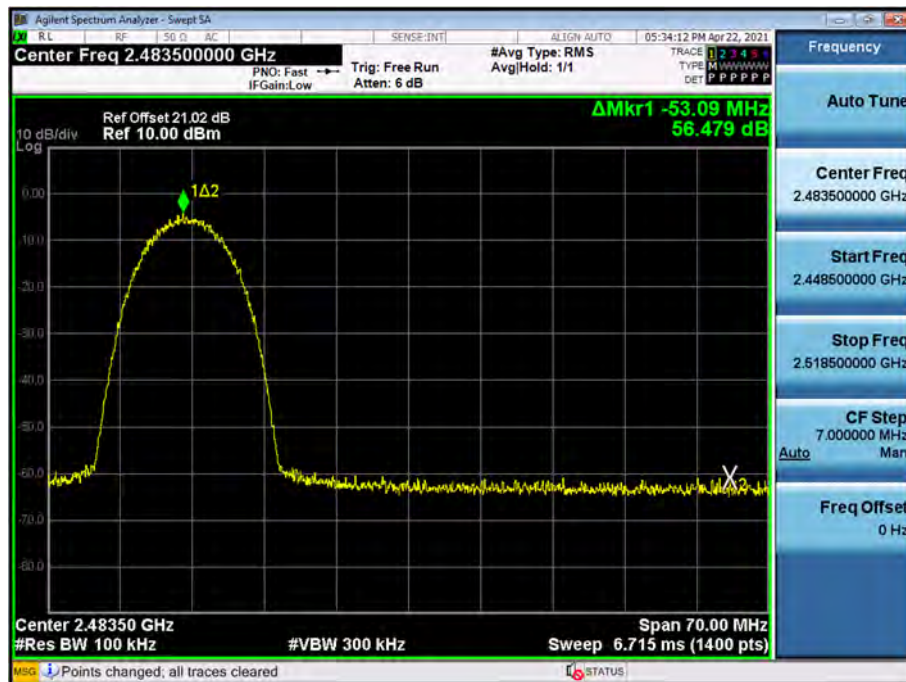


Band Edge (802.11g-CH1)




Band Edge (802.11g-CH11)



Band Edge (802.11n(HT20)-CH1)

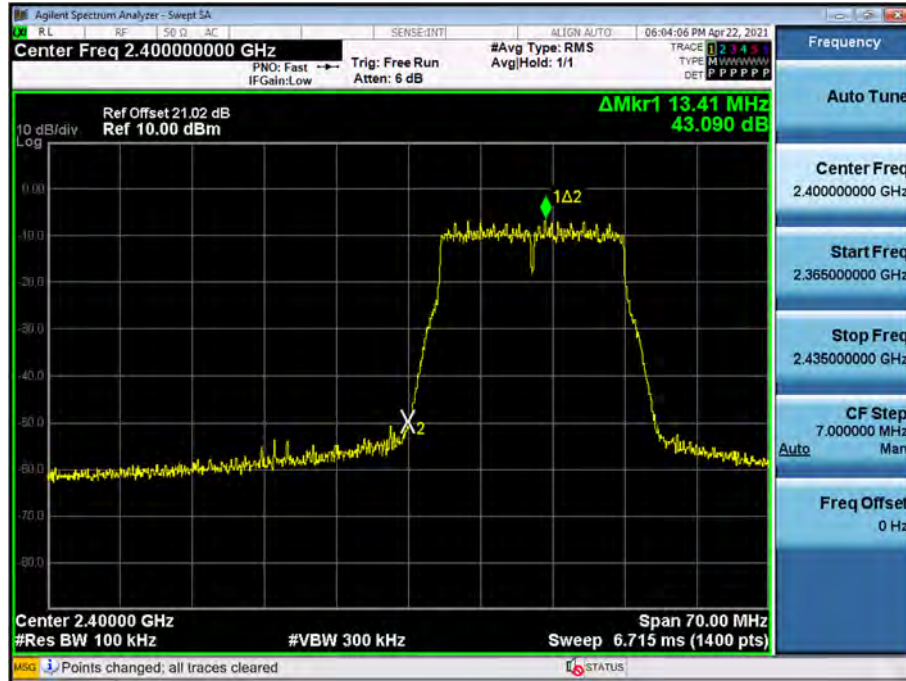

Band Edge (802.11n(HT20)-CH11)

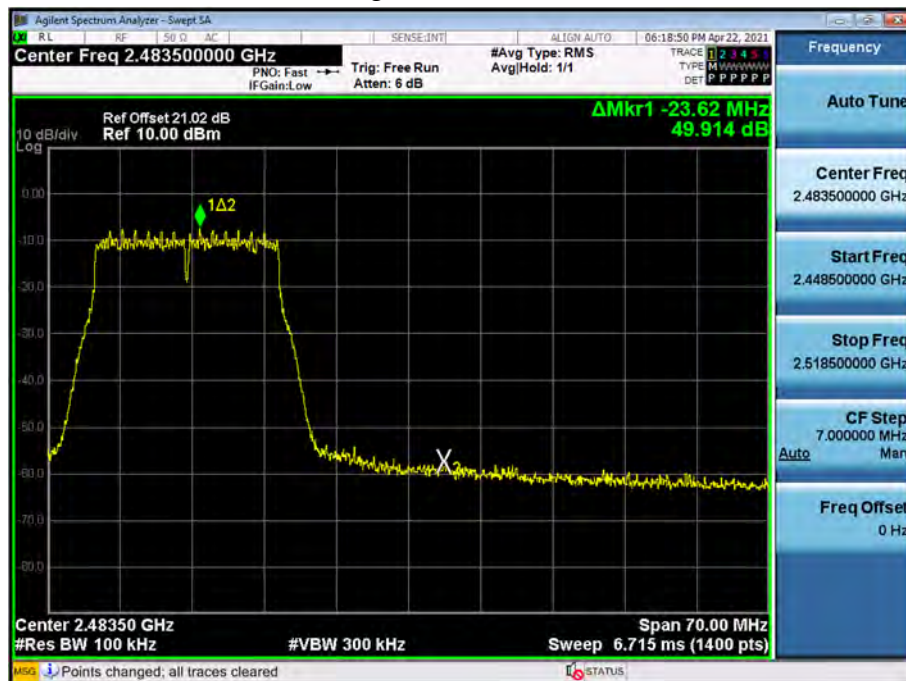




## □ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11g\_Ch.1\_6 Mbps)

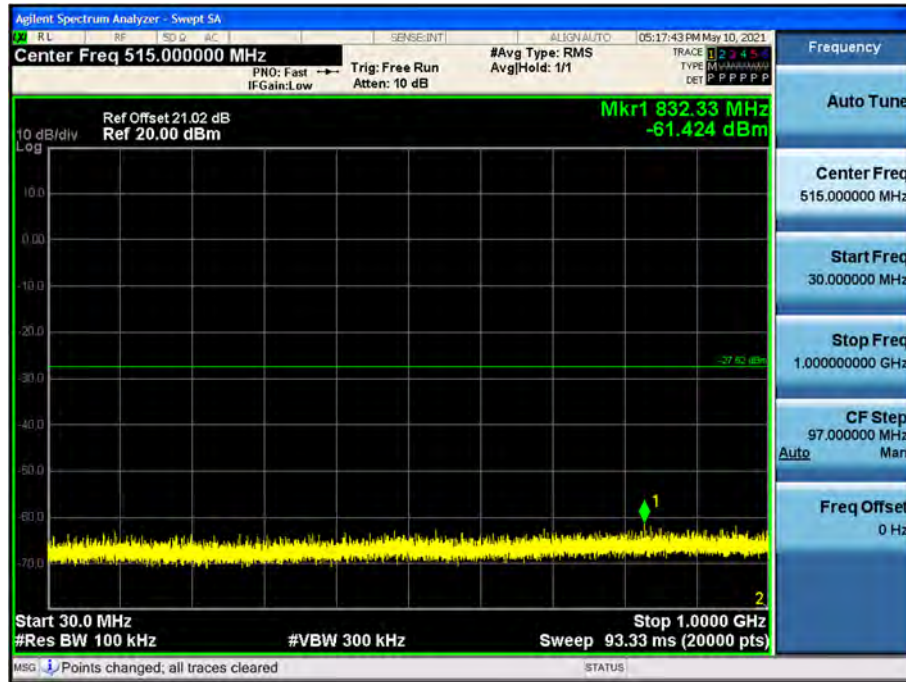


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11g\_Ch.1\_6 Mbps)

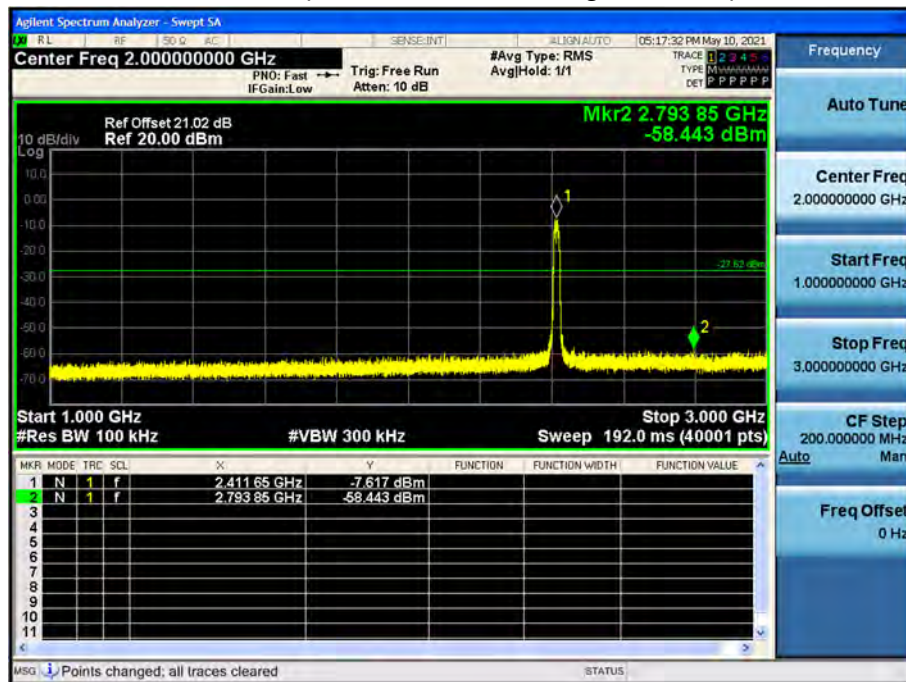


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11g\_Ch.1\_6 Mbps)

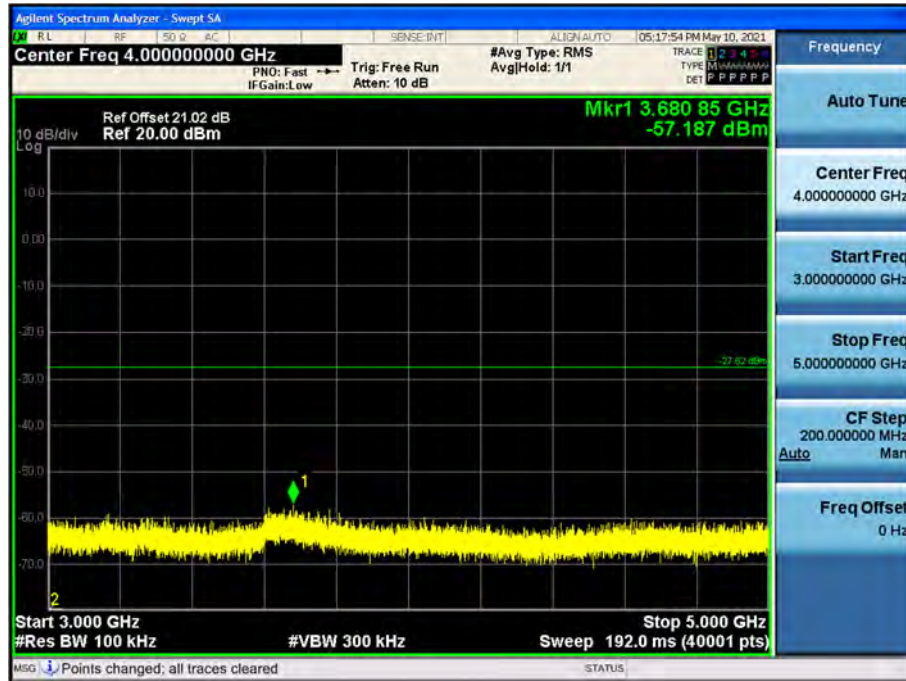


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11g\_Ch.1\_6 Mbps)

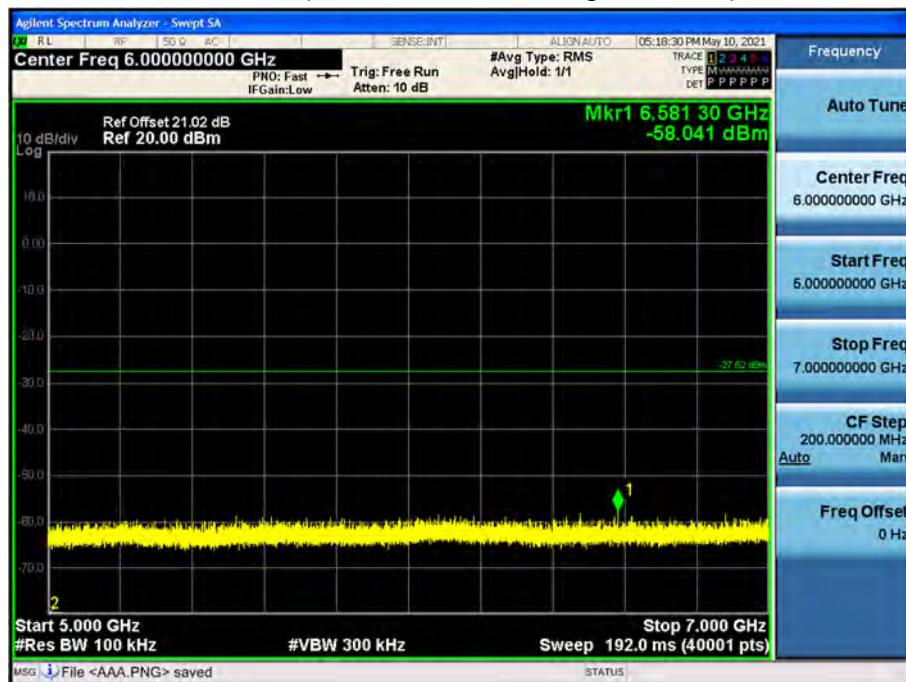


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11g\_Ch.1\_6 Mbps)

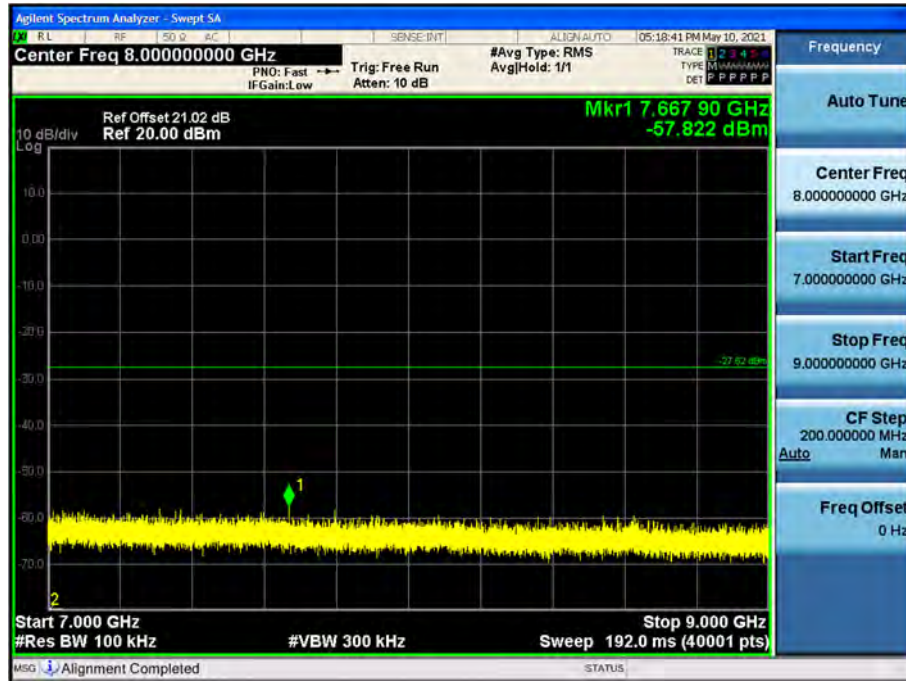

9 GHz ~ 11 GHz


Conducted Spurious Emission (802.11g\_Ch.1\_6 Mbps)

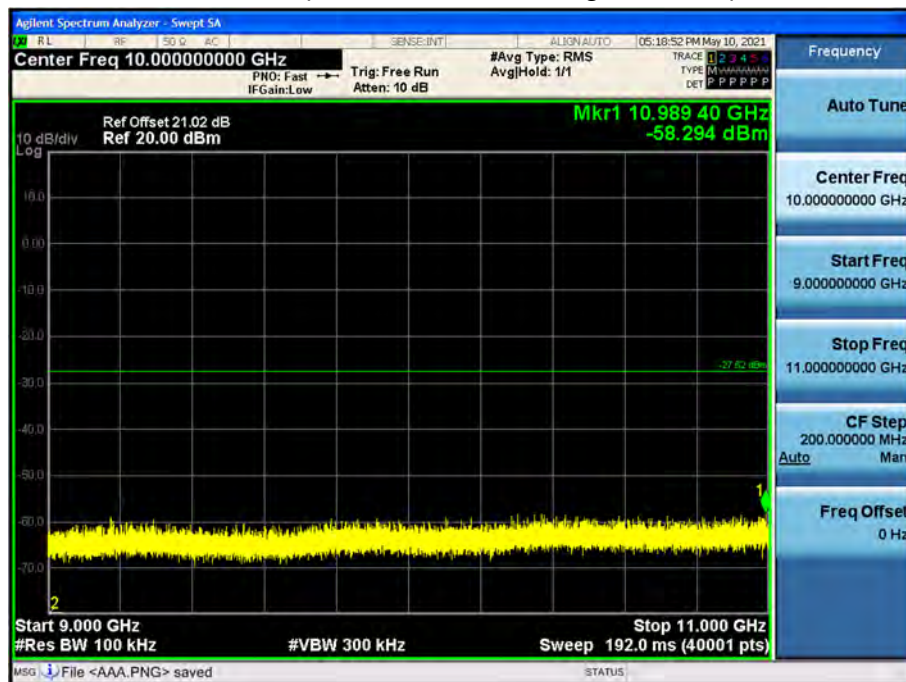




11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11g\_Ch.1\_6 Mbps)

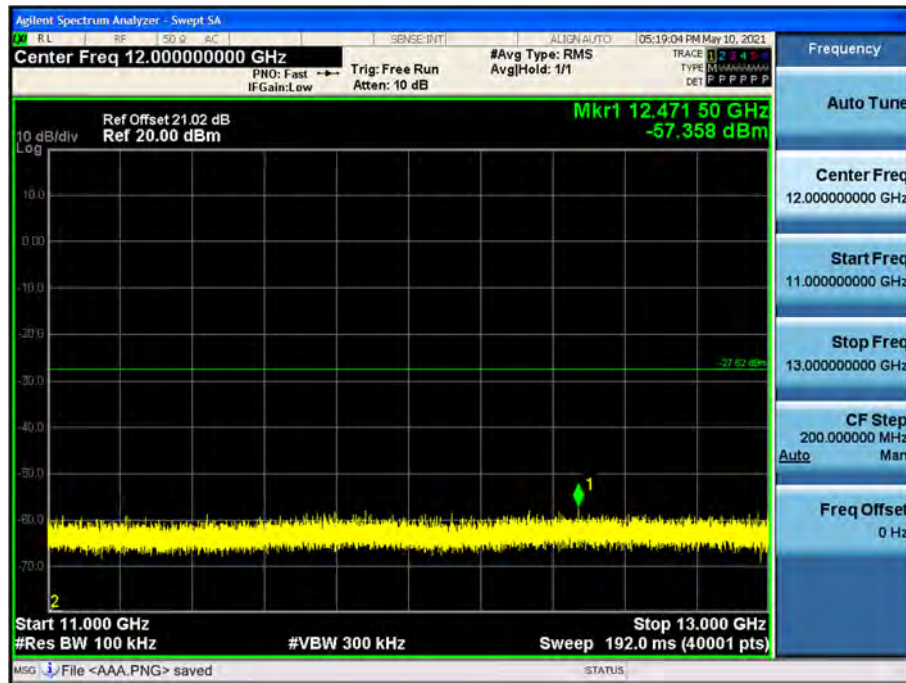


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11g\_Ch.1\_6 Mbps)

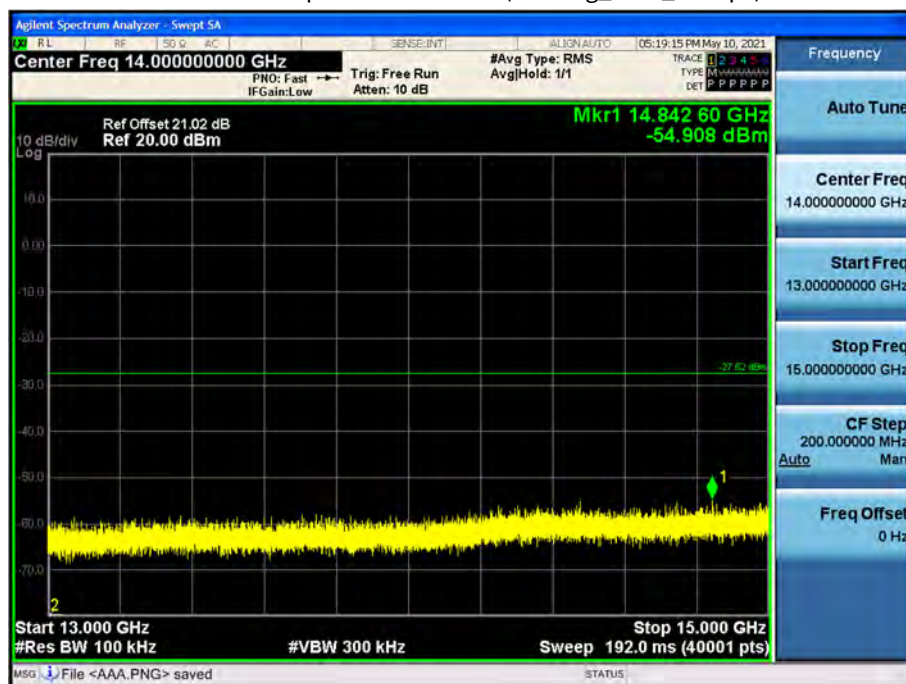


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11g\_Ch.1\_6 Mbps)

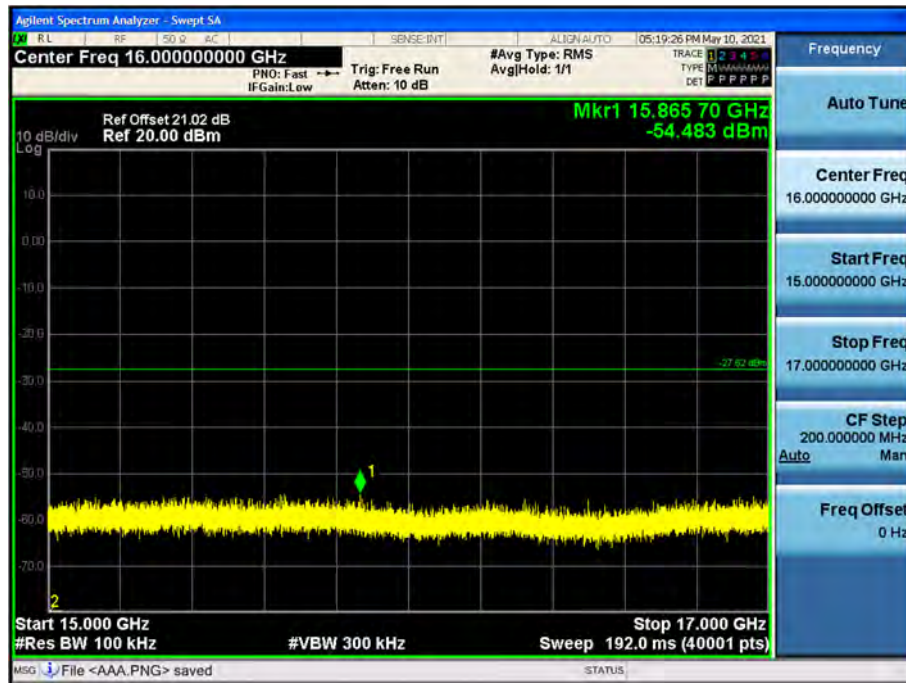


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11g\_Ch.1\_6 Mbps)

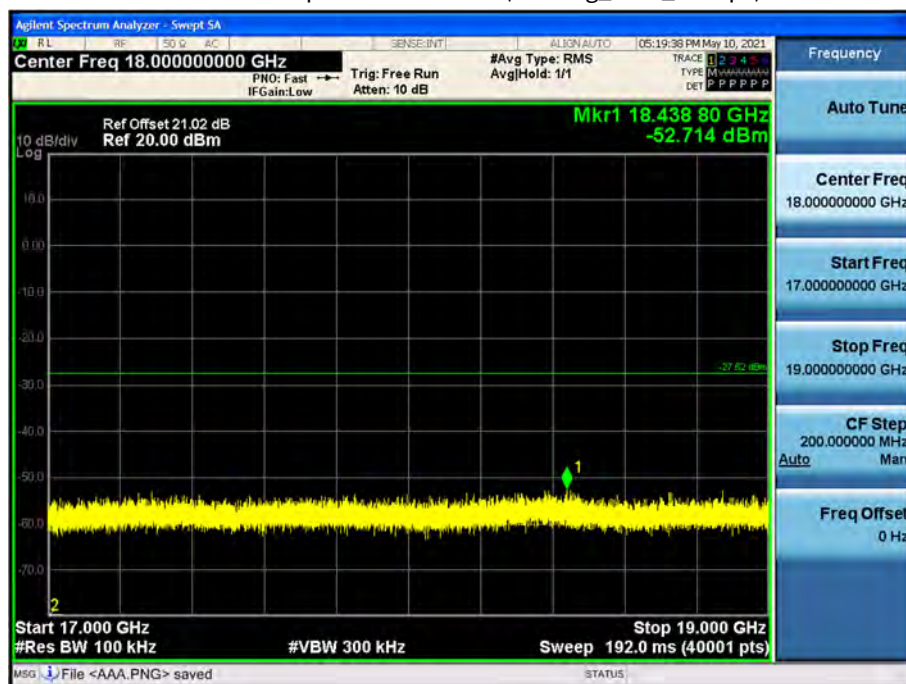


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11g\_Ch.1\_6 Mbps)

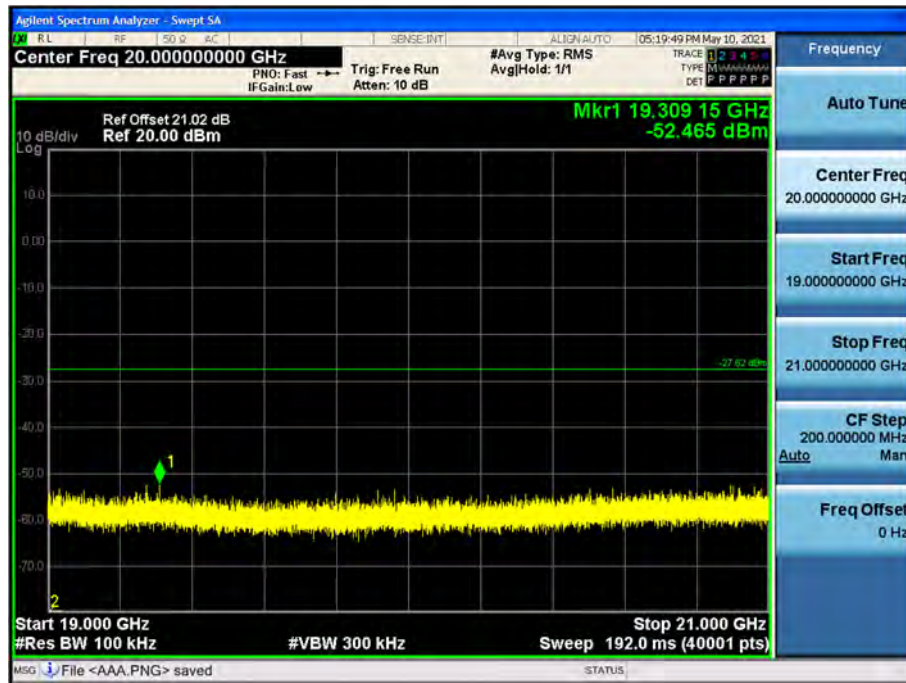


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11g\_Ch.1\_6 Mbps)

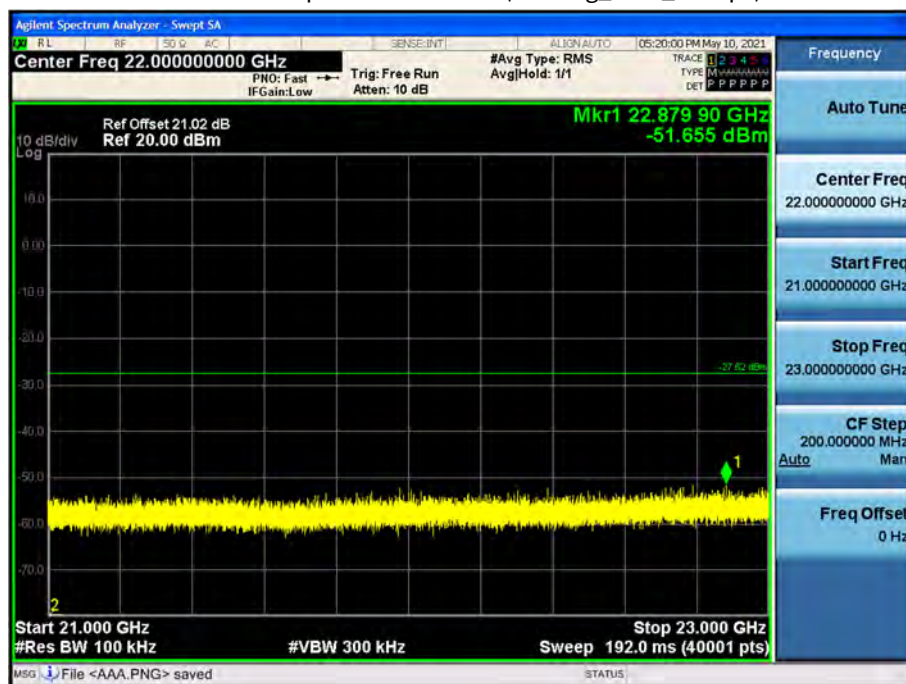

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11g\_Ch.1\_6 Mbps)

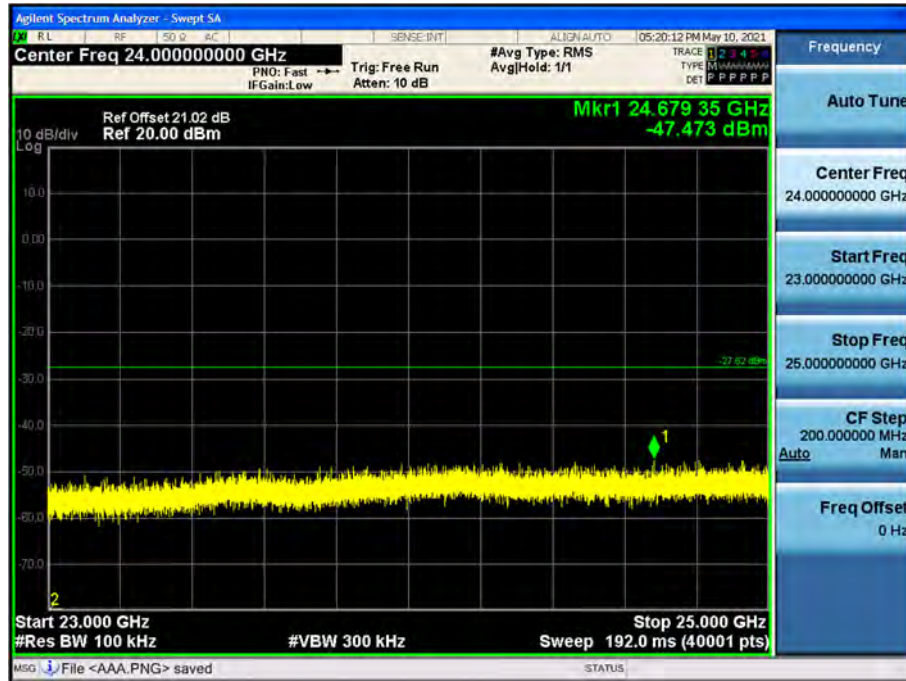



## 9.6 RADIATED SPURIOUS EMISSIONS

### Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB

No Critical peaks found

#### Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40\log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor

### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB

No Critical peaks found

#### Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

**Frequency Range : Above 1 GHz**

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz
Channel No.	01 Ch

Frequency	Reading	A.F+CL-A.G+D.F	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4824	41.30	3.46	V	44.76	73.98	29.22	PK
4824	29.23	3.46	V	32.69	53.98	21.29	AV
7236	39.12	12.51	V	51.63	73.98	22.35	PK
7236	28.12	12.51	V	40.63	53.98	13.35	AV
4824	41.42	3.46	H	44.88	73.98	29.10	PK
4824	29.32	3.46	H	32.78	53.98	21.20	AV
7236	39.64	12.51	H	52.15	73.98	21.83	PK
7236	28.57	12.51	H	41.08	53.98	12.90	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2437 MHz
Channel No.	06 Ch

Frequency	Reading	A.F+CL-A.G+D.F	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4874	41.88	3.42	V	45.30	73.98	28.68	PK
4874	29.89	3.42	V	33.31	53.98	20.67	AV
7311	40.11	11.76	V	51.87	73.98	22.11	PK
7311	28.55	11.76	V	40.31	53.98	13.67	AV
4874	41.92	3.42	H	45.34	73.98	28.64	PK
4874	29.99	3.42	H	33.41	53.98	20.57	AV
7311	40.14	11.76	H	51.90	73.98	22.08	PK
7311	28.81	11.76	H	40.57	53.98	13.41	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2462 MHz
Channel No.	11 Ch

Frequency	Reading	A.F+CL-A.G+D.F	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4924	41.23	4.55	V	45.78	73.98	28.20	PK
4924	29.12	4.55	V	33.67	53.98	20.31	AV
7386	38.47	12.13	V	50.60	73.98	23.38	PK
7386	27.56	12.13	V	39.69	53.98	14.29	AV
4924	41.33	4.55	H	45.88	73.98	28.10	PK
4924	29.22	4.55	H	33.77	53.98	20.21	AV
7386	39.12	12.13	H	51.25	73.98	22.73	PK
7386	28.12	12.13	H	40.25	53.98	13.73	AV

Operation Mode: 802.11g  
Transfer Rate: 6 Mbps  
Operating Frequency: 2412 MHz  
Channel No. 01 Ch

Frequency	Reading	Duty Cycle	A.F+CL-A.G +D.F	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dBuV]	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4824	40.82	0.00	3.46	V	44.28	73.98	29.70	PK
4824	28.99	0.21	3.46	V	32.66	53.98	21.32	AV
7236	43.15	0.00	12.51	V	55.66	73.98	18.32	PK
7236	26.21	0.21	12.51	V	38.93	53.98	15.05	AV
4824	40.99	0.00	3.46	H	44.45	73.98	29.53	PK
4824	29.12	0.21	3.46	H	32.79	53.98	21.19	AV
7236	44.82	0.00	12.51	H	57.33	73.98	16.65	PK
7236	27.32	0.21	12.51	H	40.04	53.98	13.94	AV

Operation Mode: 802.11g  
Transfer Rate: 6 Mbps  
Operating Frequency: 2437 MHz  
Channel No. 06 Ch

Frequency	Reading	Duty Cycle	A.F+CL-A.G +D.F	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dBuV]	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4874	42.02	0.00	3.42	V	45.44	73.98	28.54	PK
4874	29.66	0.21	3.42	V	33.29	53.98	20.69	AV
7311	44.25	0.00	11.76	V	56.01	73.98	17.97	PK
7311	27.56	0.21	11.76	V	39.53	53.98	14.45	AV
4874	42.15	0.00	3.42	H	45.57	73.98	28.41	PK
4874	29.88	0.21	3.42	H	33.51	53.98	20.47	AV
7311	44.61	0.00	11.76	H	56.37	73.98	17.61	PK
7311	27.99	0.21	11.76	H	39.96	53.98	14.02	AV



Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2462 MHz
Channel No.	11 Ch

Frequency	Reading	Duty Cycle	A.F+CL- A.G +D.F	ANT. POL	Total	Limit	Margin [dB]	Detect
[MHz]	[dBuV]	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]		
4924	41.52	0.00	4.55	V	46.07	73.98	27.91	PK
4924	29.02	0.21	4.55	V	33.78	53.98	20.20	AV
7386	43.98	0.00	12.13	V	56.11	73.98	17.87	PK
7386	26.52	0.21	12.13	V	38.86	53.98	15.12	AV
4924	41.62	0.00	4.55	H	46.17	73.98	27.81	PK
4924	29.12	0.21	4.55	H	33.88	53.98	20.10	AV
7386	44.21	0.00	12.13	H	56.34	73.98	17.64	PK
7386	26.85	0.21	12.13	H	39.19	53.98	14.79	AV

Operation Mode: 802.11n (HT20)  
Transfer MCS Index: 0  
Operating Frequency: 2412 MHz  
Channel No. 01 Ch

Frequency	Reading	Duty Cycle	A.F+CL-A.G +D.F	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dBuV]	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4824	40.78	0.00	3.46	V	44.24	73.98	29.74	PK
4824	29.02	0.22	3.46	V	32.70	53.98	21.28	AV
7236	44.52	0.00	12.51	V	57.03	73.98	16.95	PK
7236	26.82	0.22	12.51	V	39.55	53.98	14.43	AV
4824	40.91	0.00	3.46	H	44.37	73.98	29.61	PK
4824	29.22	0.22	3.46	H	32.90	53.98	21.08	AV
7236	45.92	0.00	12.51	H	58.43	73.98	15.55	PK
7236	27.12	0.22	12.51	H	39.85	53.98	14.13	AV

Operation Mode: 802.11n (HT20)  
Transfer MCS Index: 0  
Operating Frequency: 2437 MHz  
Channel No. 06 Ch


Frequency	Reading	Duty Cycle	A.F+CL-A.G +D.F	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dBuV]	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4874	43.26	0.00	3.42	V	46.68	73.98	27.30	PK
4874	28.95	0.22	3.42	V	32.59	53.98	21.39	AV
7311	46.85	0.00	11.76	V	58.61	73.98	15.37	PK
7311	26.55	0.22	11.76	V	38.53	53.98	15.45	AV
4874	43.52	0.00	3.42	H	46.94	73.98	27.04	PK
4874	30.05	0.22	3.42	H	33.69	53.98	20.29	AV
7311	47.16	0.00	11.76	H	58.92	73.98	15.06	PK
7311	26.65	0.22	11.76	H	38.63	53.98	15.35	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2462 MHz
Channel No.	11 Ch


Frequency	Reading	Duty Cycle	A.F+CL- A.G +D.F	ANT. POL	Total	Limit	Margin [dB]	Detect
[MHz]	[dBuV]	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]		
4924	41.48	0.00	4.55	V	46.03	73.98	27.95	PK
4924	29.22	0.22	4.55	V	33.99	53.98	19.99	AV
7386	43.44	0.00	12.13	V	55.57	73.98	18.41	PK
7386	26.45	0.22	12.13	V	38.80	53.98	15.18	AV
4924	41.52	0.00	4.55	H	46.07	73.98	27.91	PK
4924	29.25	0.22	4.55	H	34.02	53.98	19.96	AV
7386	43.71	0.00	12.13	H	55.84	73.98	18.14	PK
7386	26.72	0.22	12.13	H	39.07	53.98	14.91	AV

## Test Plots

Radiated Spurious Emissions plot – Average Reading (802.11b, Ch.1 3rd Harmonic, X-H)

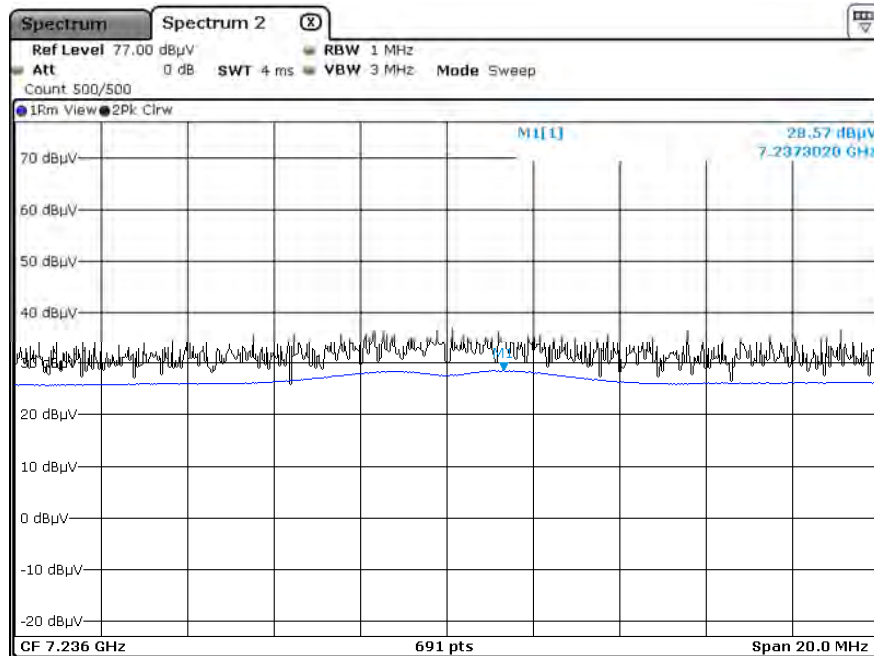

Radiated Spurious Emissions plot – Peak Reading (802.11b, Ch.1 3rd Harmonic, X-H)

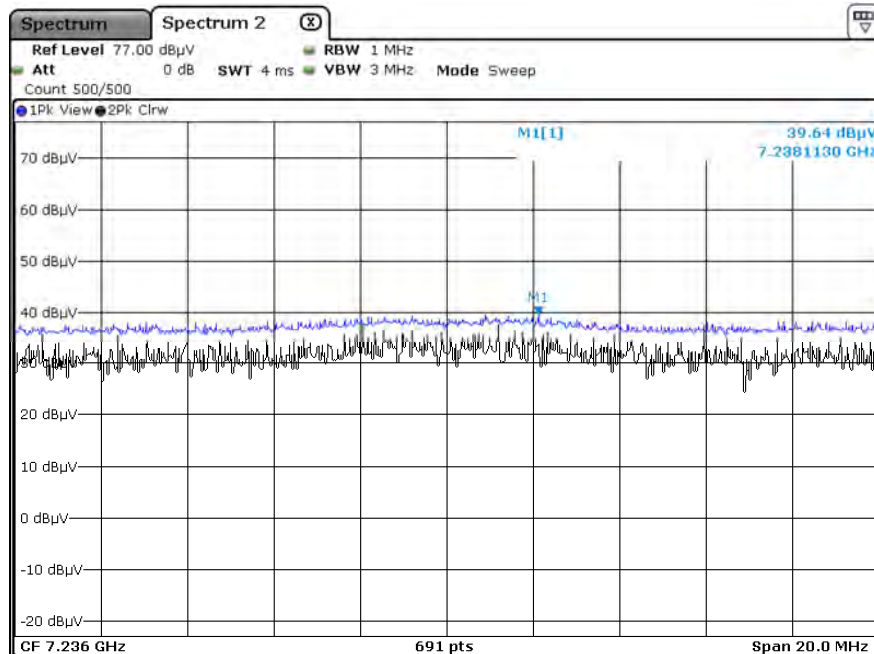

### Note:

Plot of worst case are only reported.

## 9.7 RADIATED RESTRICTED BAND EDGES

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency	Reading	A.F.+CL+ATT-A.G+D.F	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	46.67	1.94	H	48.61	73.98	25.37	PK
2390.0	34.95	1.94	H	36.89	53.98	17.09	AV
2390.0	46.45	1.94	V	48.39	73.98	25.59	PK
2390.0	34.55	1.94	V	36.49	53.98	17.49	AV
2483.5	45.12	2.74	H	47.86	73.98	26.12	PK
2483.5	33.71	2.74	H	36.45	53.98	17.53	AV
2483.5	46.67	2.74	V	49.41	73.98	24.57	PK
2483.5	34.78	2.74	V	37.52	53.98	16.46	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch


Frequency	Reading	Duty Cycle	A.F.+CL+ATT-A.G+D.F	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dBuV]	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	47.62	0.00	1.94	H	49.56	73.98	24.42	PK
2390.0	35.45	0.21	1.94	H	37.60	53.98	16.38	AV
2390.0	47.49	0.00	1.94	V	49.43	73.98	24.55	PK
2390.0	35.12	0.21	1.94	V	37.27	53.98	16.71	AV
2483.5	46.95	0.00	2.74	H	49.69	73.98	24.29	PK
2483.5	34.78	0.21	2.74	H	37.73	53.98	16.25	AV
2483.5	47.32	0.00	2.74	V	50.06	73.98	23.92	PK
2483.5	35.31	0.21	2.74	V	38.26	53.98	15.72	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch


Frequency [MHz]	Reading	Duty Cycle	A.F.+CL+ATT- A.G+D.F	ANT. POL	Total	Limit	Margin	Detect
	[dBuV]	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	47.28	0.00	1.94	H	49.22	73.98	24.76	PK
2390.0	35.24	0.22	1.94	H	37.40	53.98	16.58	AV
2390.0	47.05	0.00	1.94	V	48.99	73.98	24.99	PK
2390.0	34.85	0.22	1.94	V	37.01	53.98	16.97	AV
2483.5	45.58	0.00	2.74	H	48.32	73.98	25.66	PK
2483.5	34.75	0.22	2.74	H	37.71	53.98	16.27	AV
2483.5	47.33	0.00	2.74	V	50.07	73.98	23.91	PK
2483.5	35.13	0.22	2.74	V	38.09	53.98	15.89	AV

■ Test Plots (Worst case : X-V)

Radiated Restricted Band Edges plot – Average Reading (802.11g Ch.11)

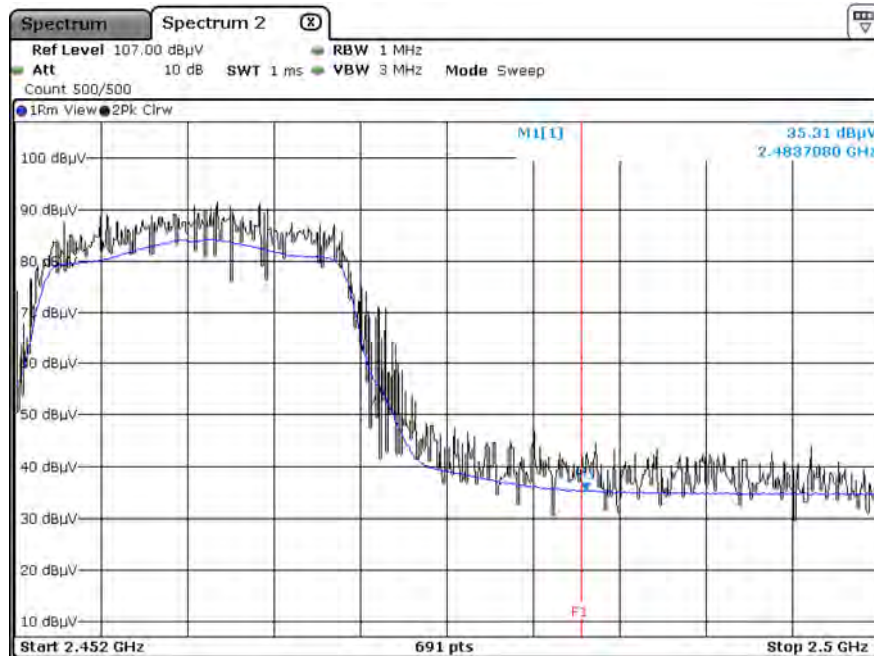

Radiated Restricted Band Edges plot – Peak Reading (802.11g Ch.11)

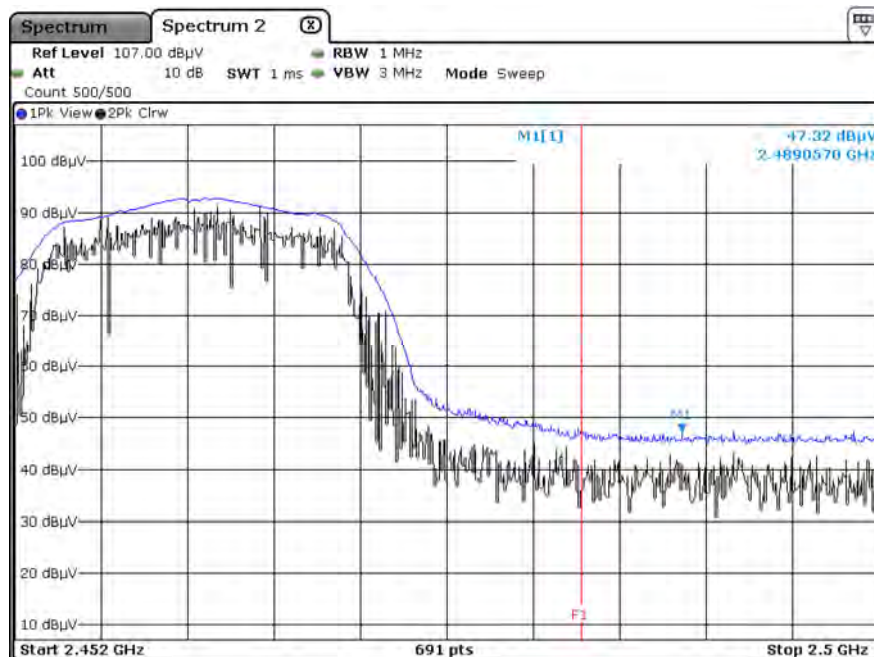

**Note:**

Plot of worst case are only reported.

## 9.8 RECEIVER SPURIOUS EMISSIONS

### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB

No Critical peaks found

#### Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

### Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB

No Critical peaks found



## 10. LIST OF TEST EQUIPMENT

### Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/04/2020	Annual	102245
Rohde & Schwarz	ESR / EMI Test Receiver	09/16/2020	Annual	101910
ESPACE	SU-642 / Temperature Chamber	03/15/2021	Annual	0093008124
Agilent	N9030A / Signal Analyzer	01/11/2021	Annual	MY49431210
Rohde & Schwarz	OSP 120 / Power Measurement Set	07/02/2020	Annual	101231
Agilent	N1911A / Power Meter	04/08/2021	Annual	MY45100523
Keysight	N1921A / Power Sensor	04/08/2021	Annual	MY57820067
Agilent	87300B / Directional Coupler	11/10/2020	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	02/09/2021	Annual	10545
Hewlett Packard	E3632A / DC Power Supply	06/12/2020	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	06/26/2020	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A

#### Note:

- Equipment listed above that calibrated during the testing period was set for test after the calibration.
- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

### Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	05/18/2020	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	02/22/2021	Biennial	760
Schwarzbeck	BBHA 9120D / Horn Antenna	02/17/2021	Biennial	9120D-937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	11/29/2019	Biennial	BBHA9170541
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	07/28/2020	Annual	102168
Agilent	N9030A / Signal Analyzer	01/11/2021	Annual	MY49431210
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/06/2021	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/08/2021	Annual	1
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	02/03/2021	Annual	8
Wainwright Instruments	WHKX8-6090-7000-18000-40SS/ High Pass Filter	02/03/2021	Annual	25
Api tech.	18B-03 / Attenuator (3 dB)	02/03/2021	Annual	1
Agilent	8493C-10 / Attenuator(10 dB)	02/03/2021	Annual	08285
CERNEX	CBLU1183540 / Power Amplifier	02/03/2021	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	02/03/2021	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	12/04/2020	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2021	Annual	25956

### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

## 11. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2105-FI010-P