



FCC RF Test Report

APPLICANT : Espressif Systems (Shanghai) Co.,Ltd.
EQUIPMENT : 2.4GHz Wi-Fi & BT IoT Module
BRAND NAME : ESPRESSIF
MODEL NAME : ESP8684-WROOM-05
FCC ID : 2AC7Z-ESP868405
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Mar. 31, 2023 ~ Apr. 21, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	15
3.5 Radiated Band Edges and Spurious Emission Measurement	25
3.6 AC Conducted Emission Measurement.....	29
3.7 Antenna Requirements.....	31
4 LIST OF MEASURING EQUIPMENT	32
5 UNCERTAINTY OF EVALUATION	33
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR310906B	Rev. 01	Initial issue of report	Sep. 20, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.16 dB at 2483.51 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 15.83 dB at 0.180 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.2 Manufacturer

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	2.4GHz Wi-Fi & BT IoT Module
Brand Name	ESPRESSIF
Model Name	ESP8684-WROOM-05
FCC ID	2AC7Z-ESP868405
HW Version	V1.0
SW Version	v1.1.3.4
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 22.71 dBm (0.1866 W) 802.11g : 27.72 dBm (0.5916 W) 802.11n HT20 : 27.11 dBm (0.5140 W)
99% Occupied Bandwidth	802.11b : 12.89 MHz 802.11g : 16.53 MHz 802.11n HT20 : 17.28 MHz
Antenna Type / Gain	PCB Antenna with gain 3.96 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :WLAN TX(2.4G) + Powered from Test Jig

2.3 Connection Diagram of Test System

AC Conducted Emission:

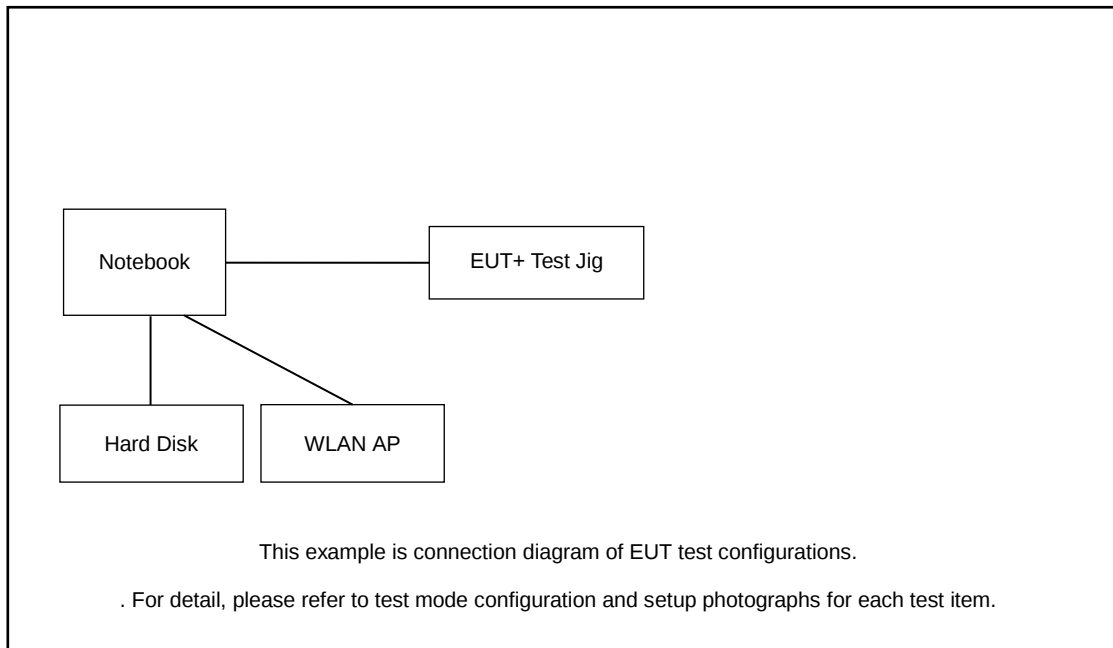

Radiated Emission:

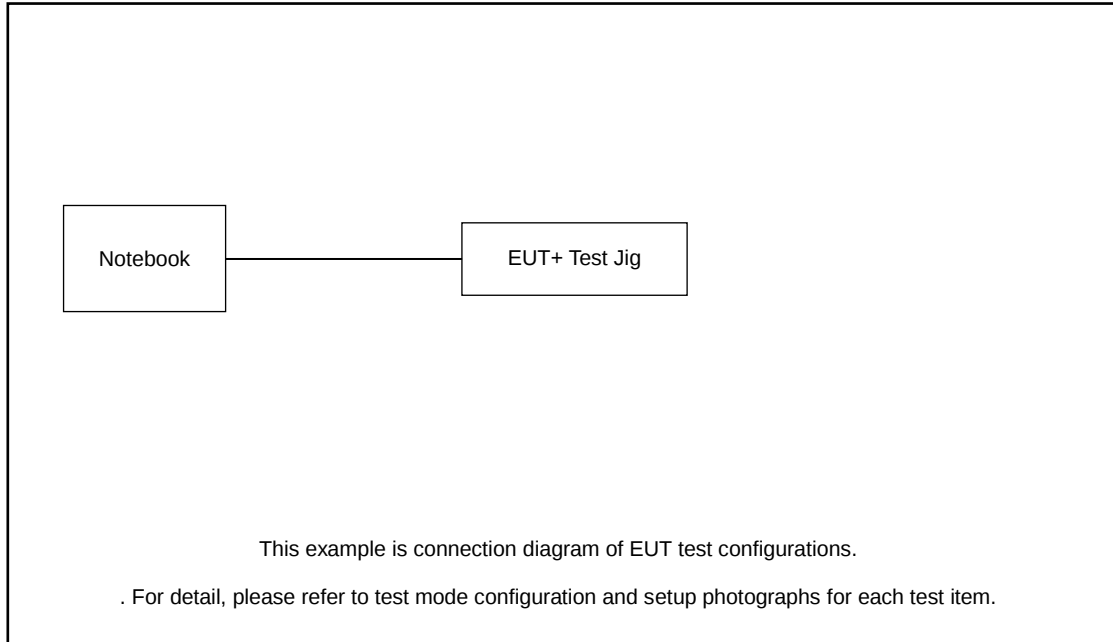

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	V130-14IKB004	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
4.	Test Jig	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.80 dB .

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 5.80 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

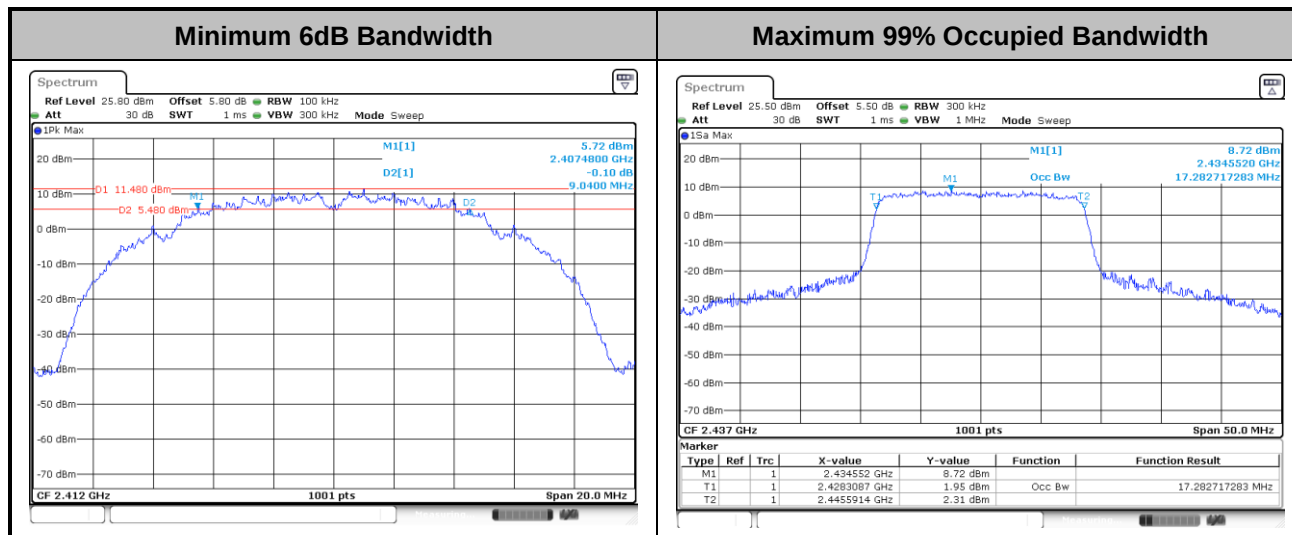

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

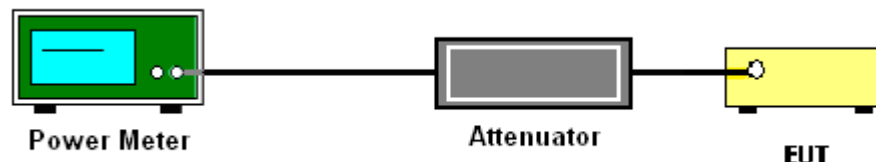

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

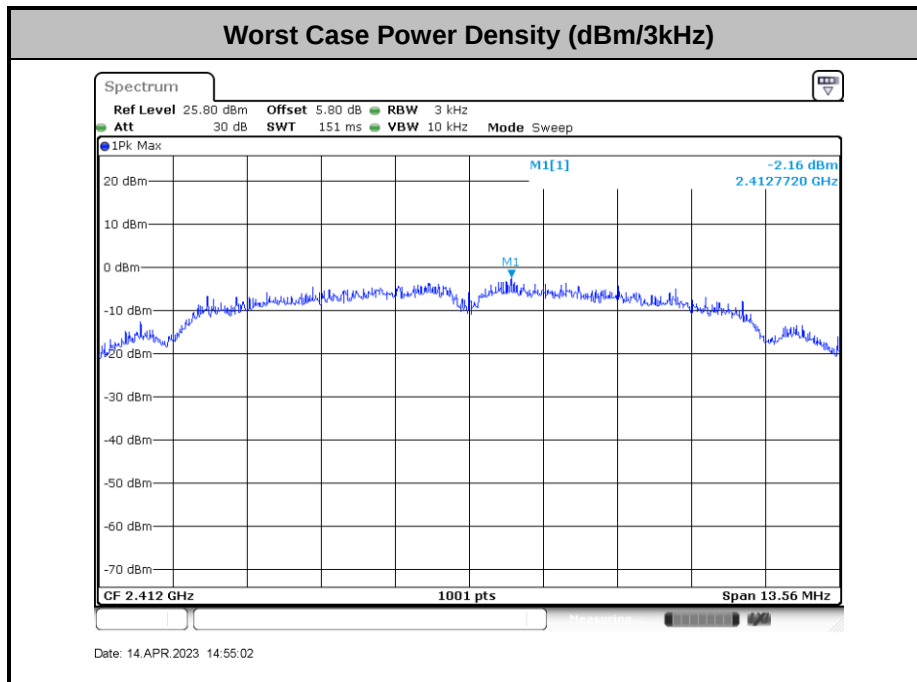

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

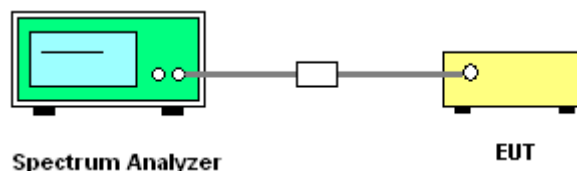




3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Engineer :	Smile	Temperature :	23~25°C
		Relative Humidity :	41~42%

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

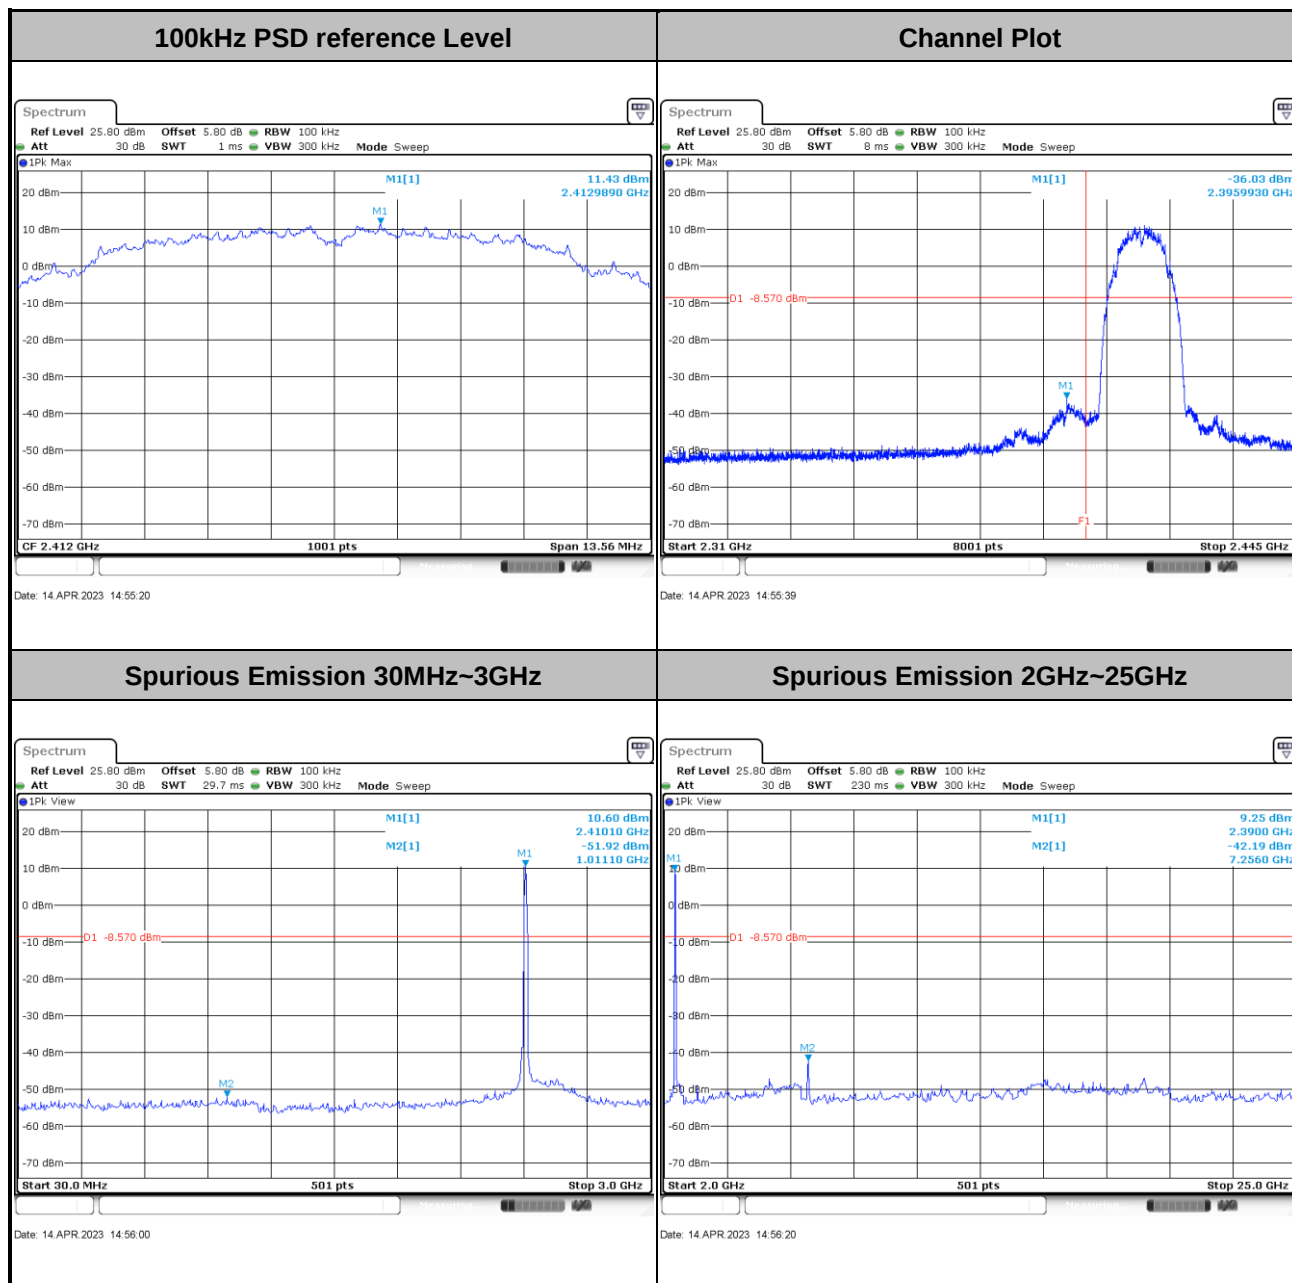




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

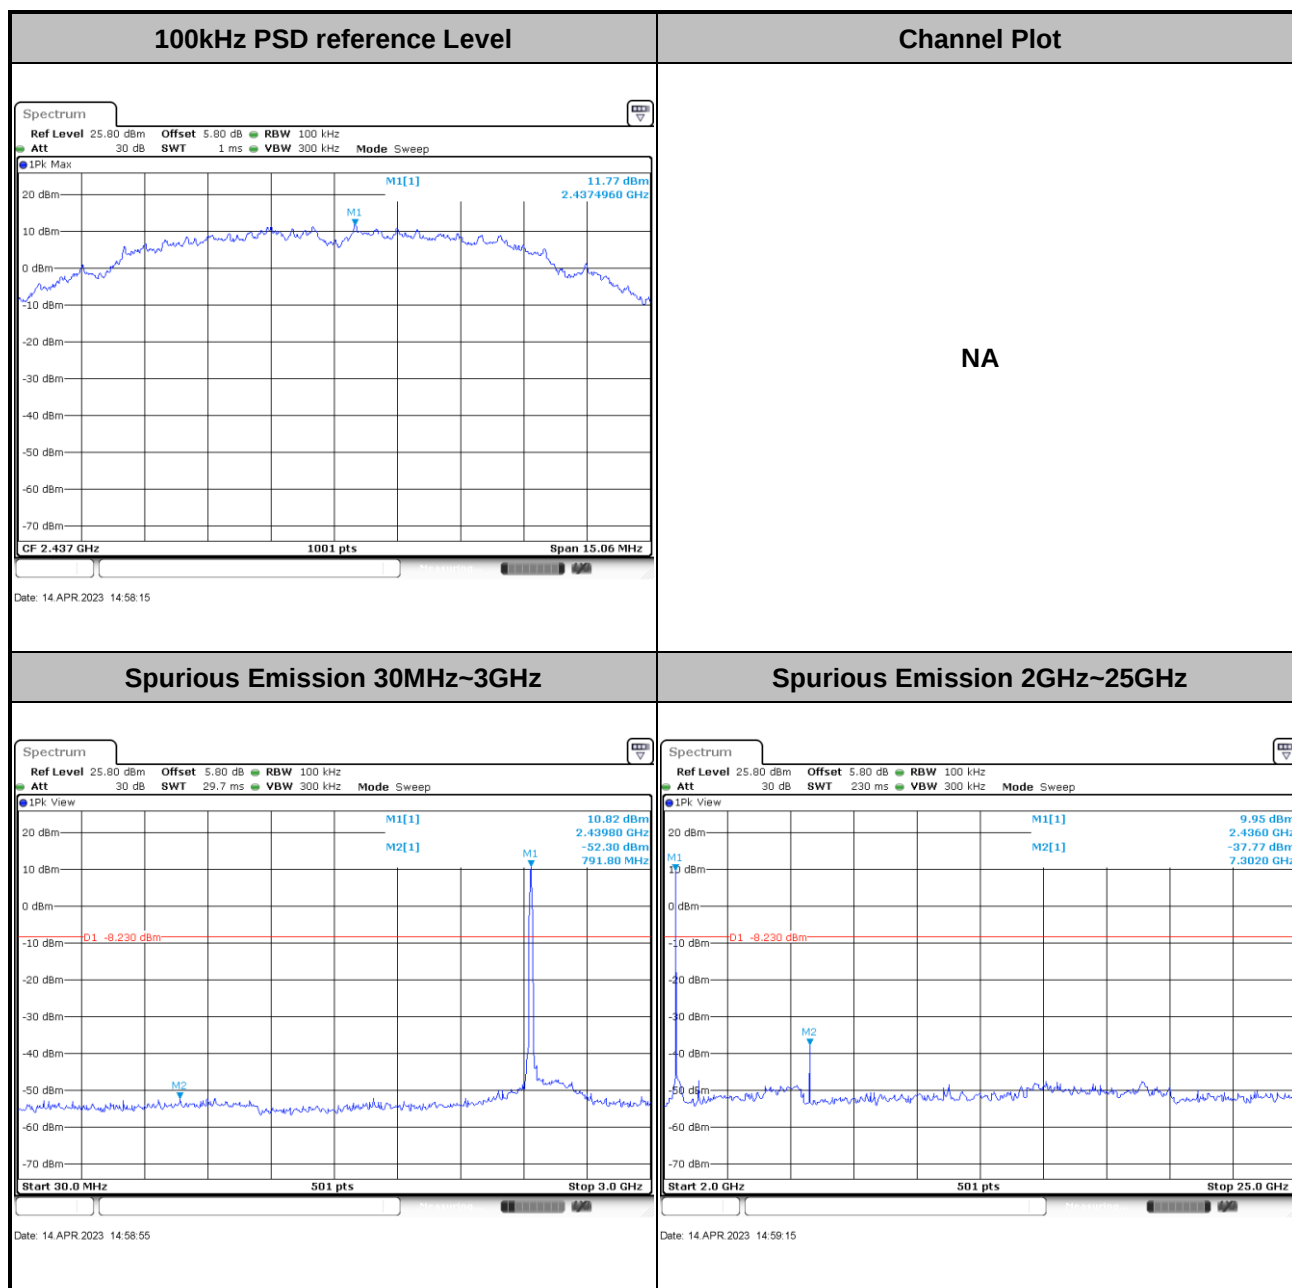



Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

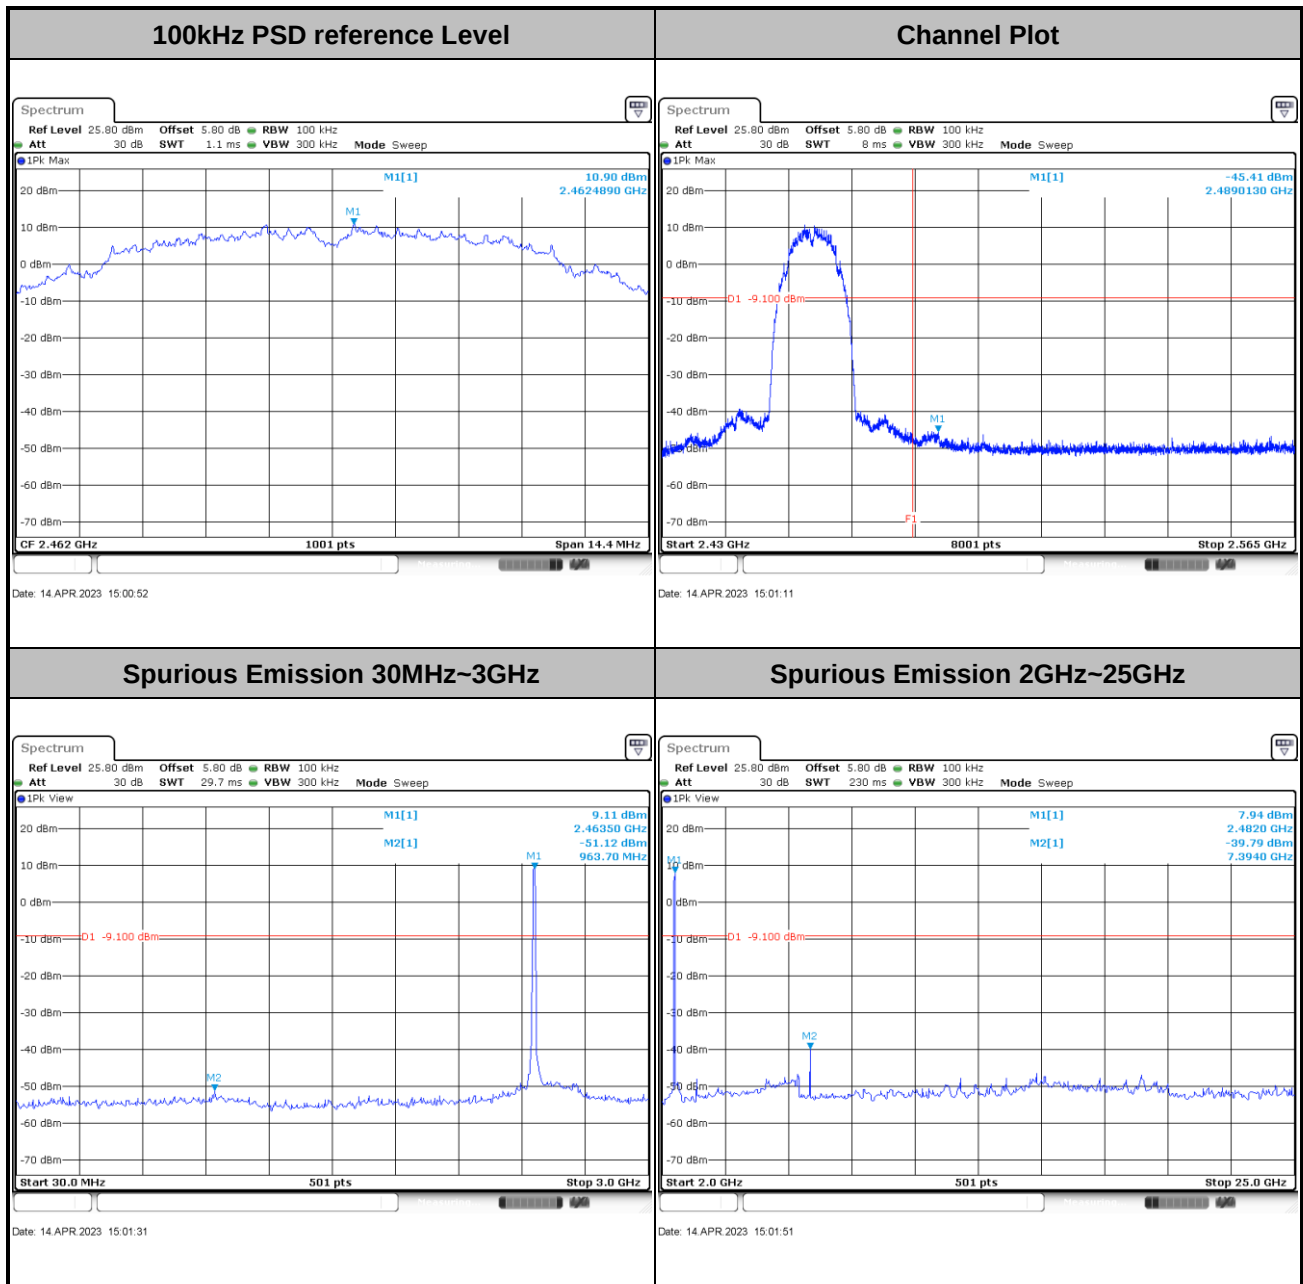





Test Mode : 802.11g

Test Channel : 01


100kHz PSD reference Level

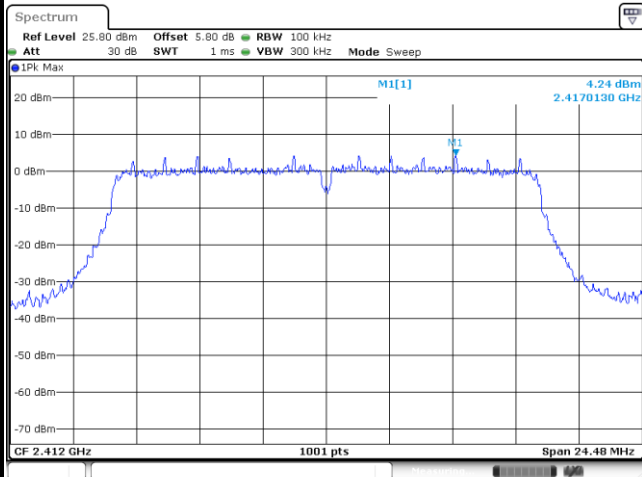


Channel Plot

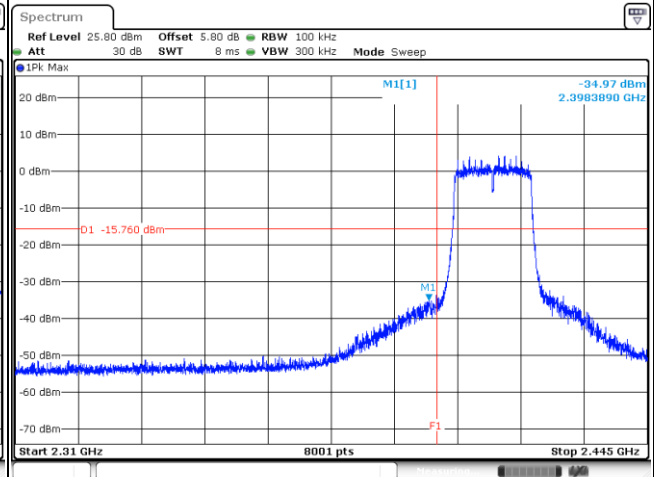

Spurious Emission 30MHz~3GHz

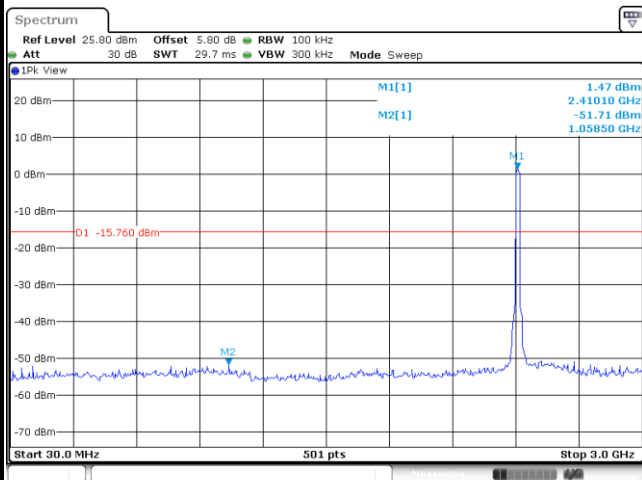


Spurious Emission 2GHz~25GHz

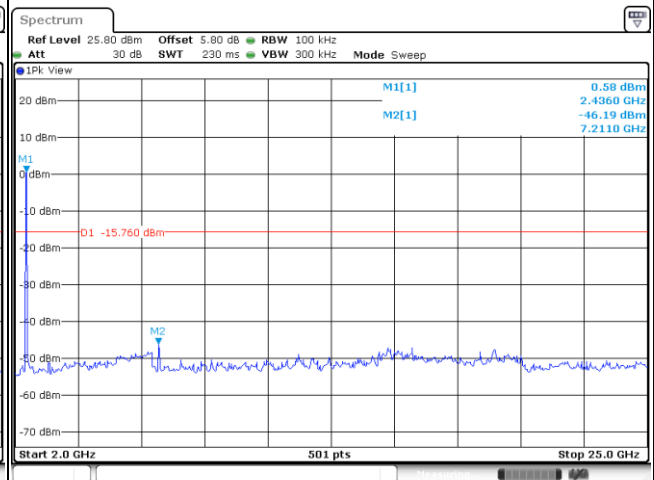



Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

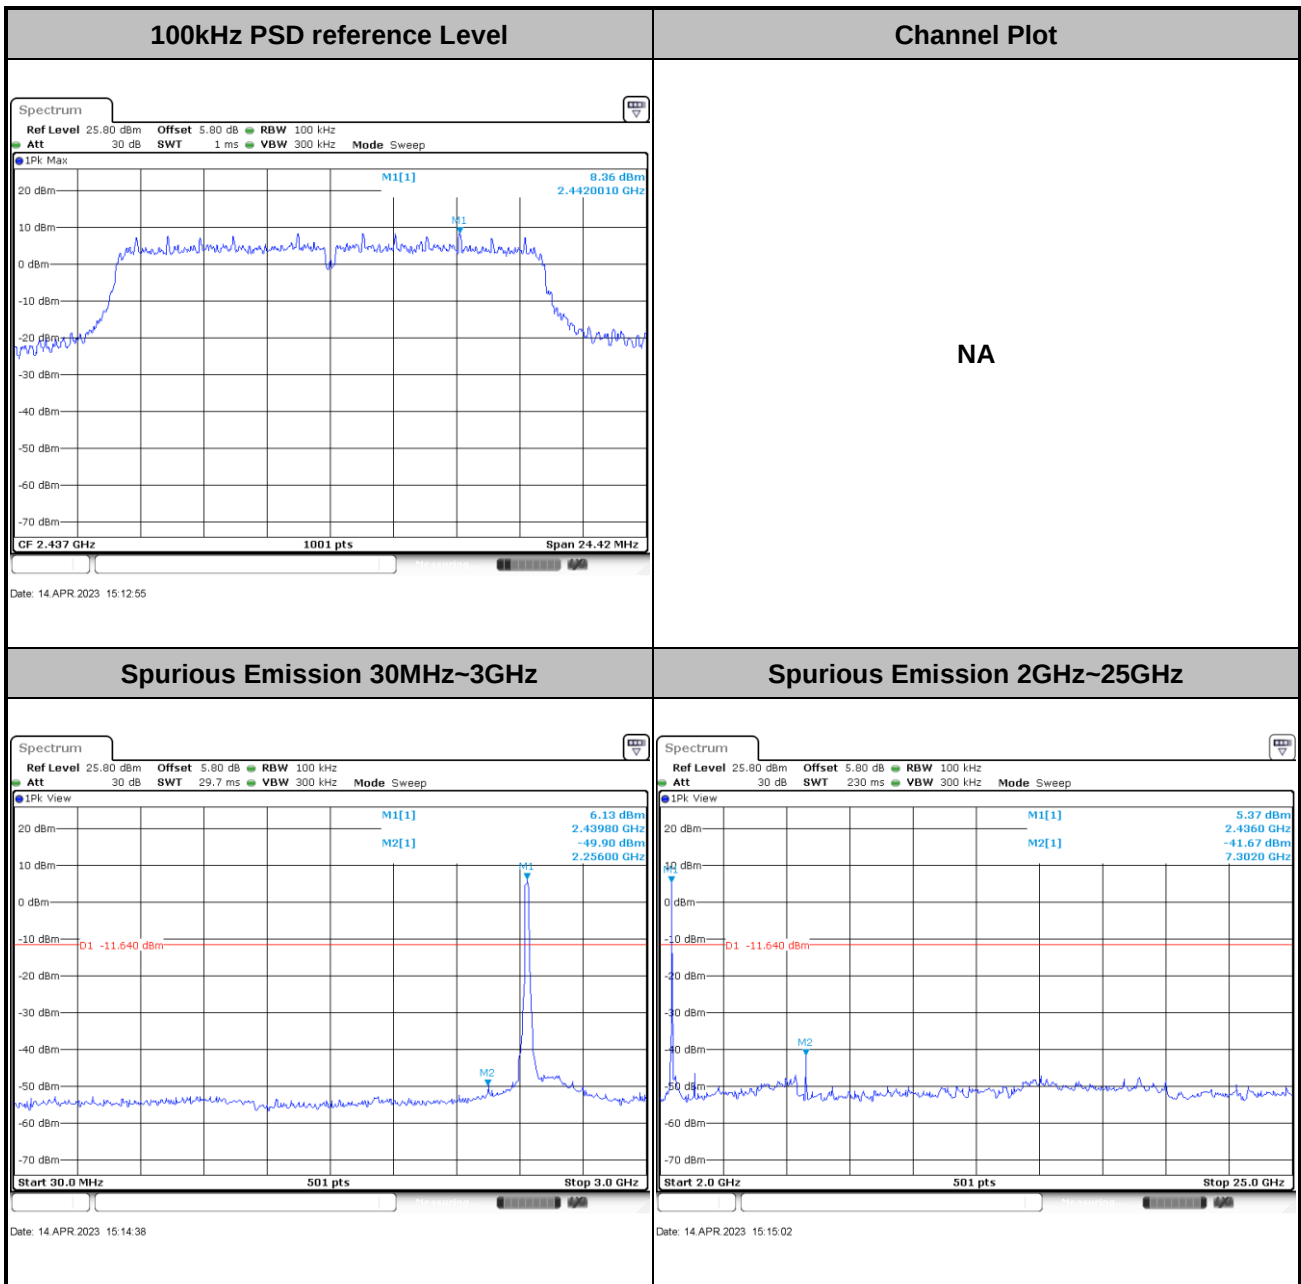




Test Mode : 802.11g


Test Channel : 11

100kHz PSD reference Level

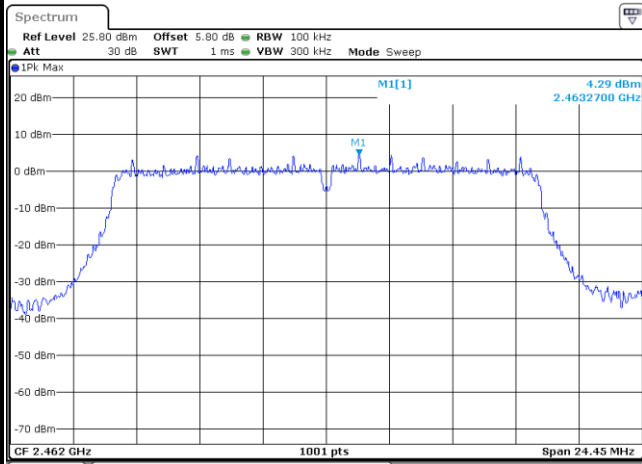


Date: 14 APR 2023 15:16:25

Channel Plot

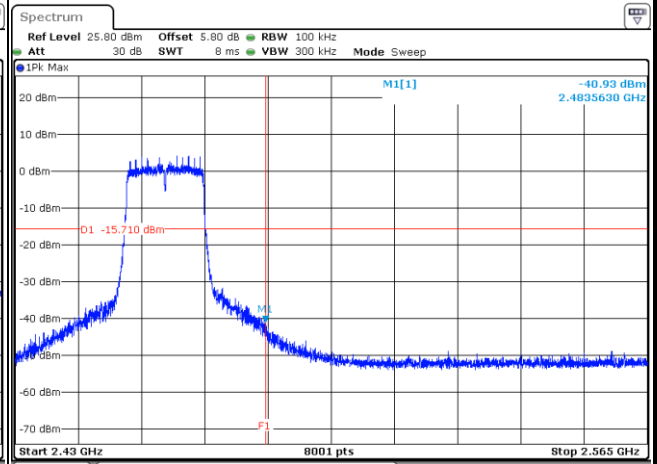


Date: 14 APR 2023 15:16:44

Spurious Emission 30MHz~3GHz

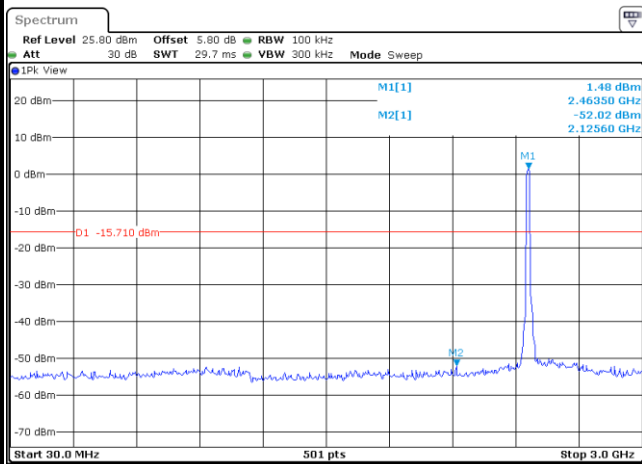

Date: 14 APR 2023 15:17:05


Spurious Emission 2GHz~25GHz

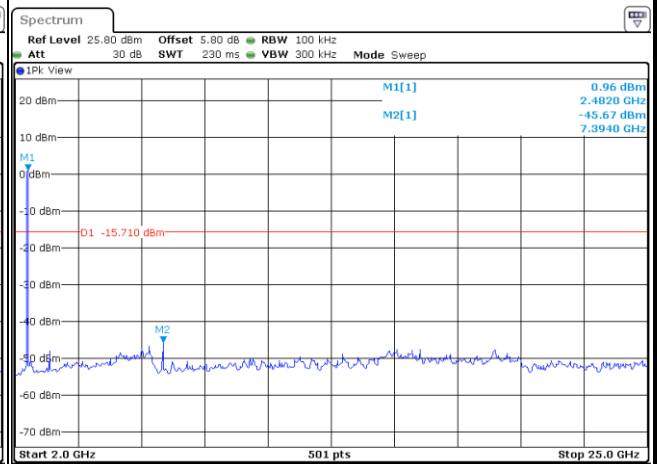


Date: 14 APR 2023 15:17:25




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

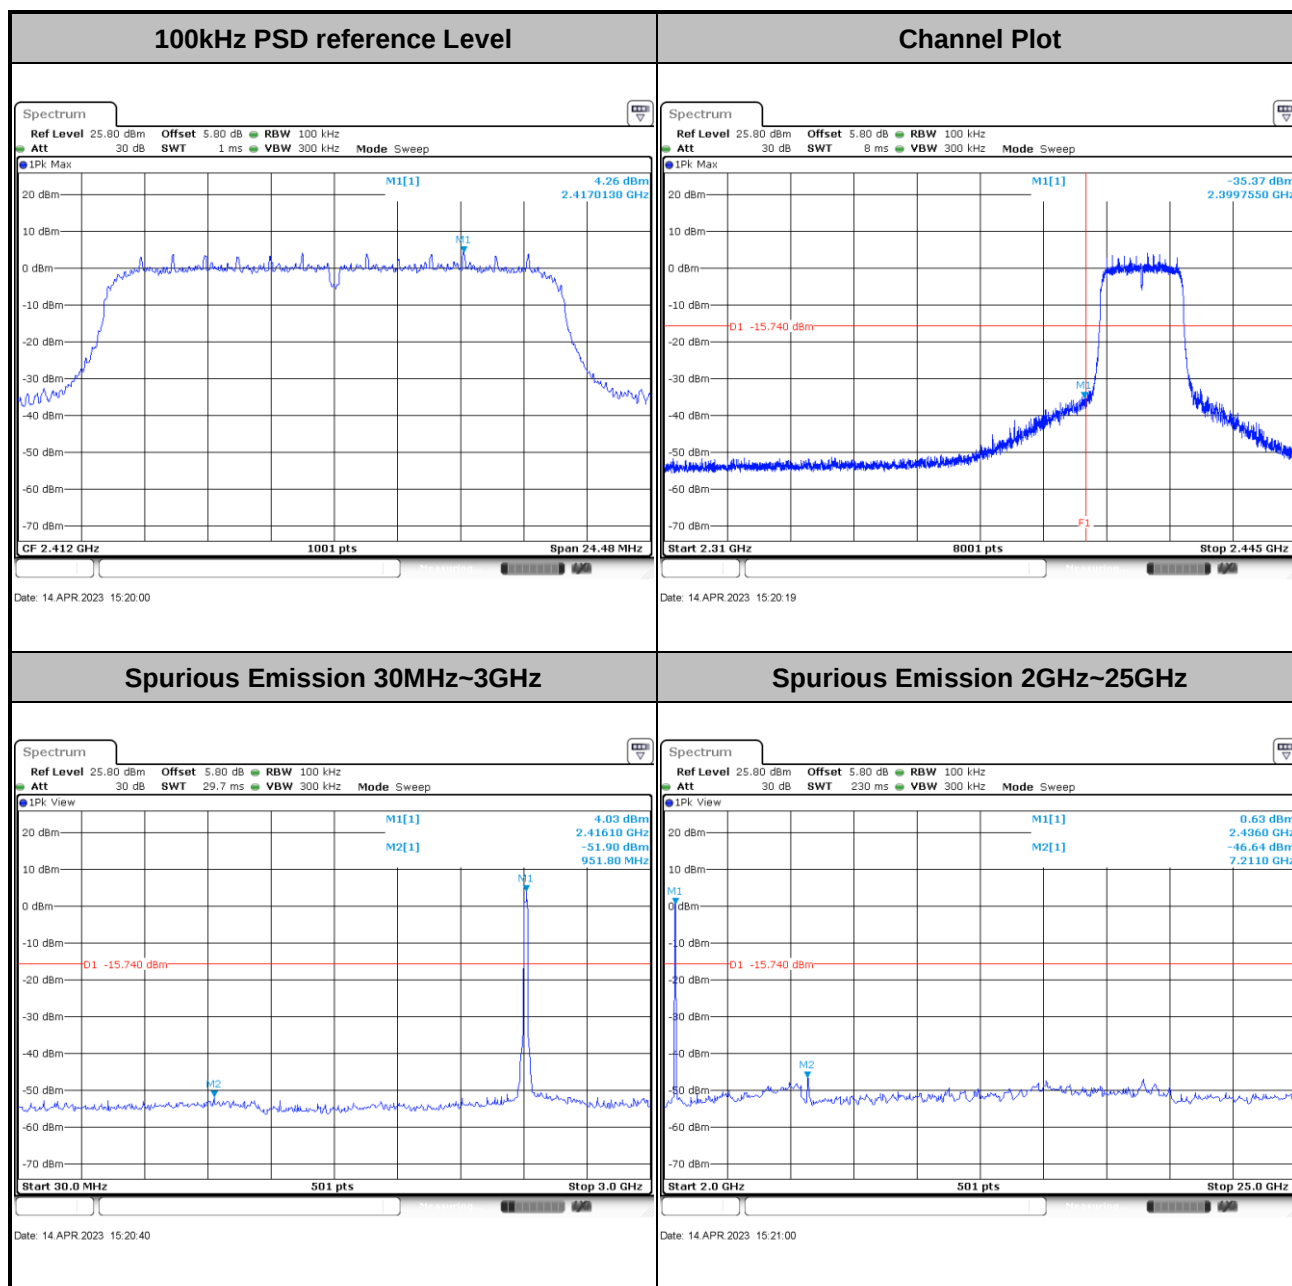

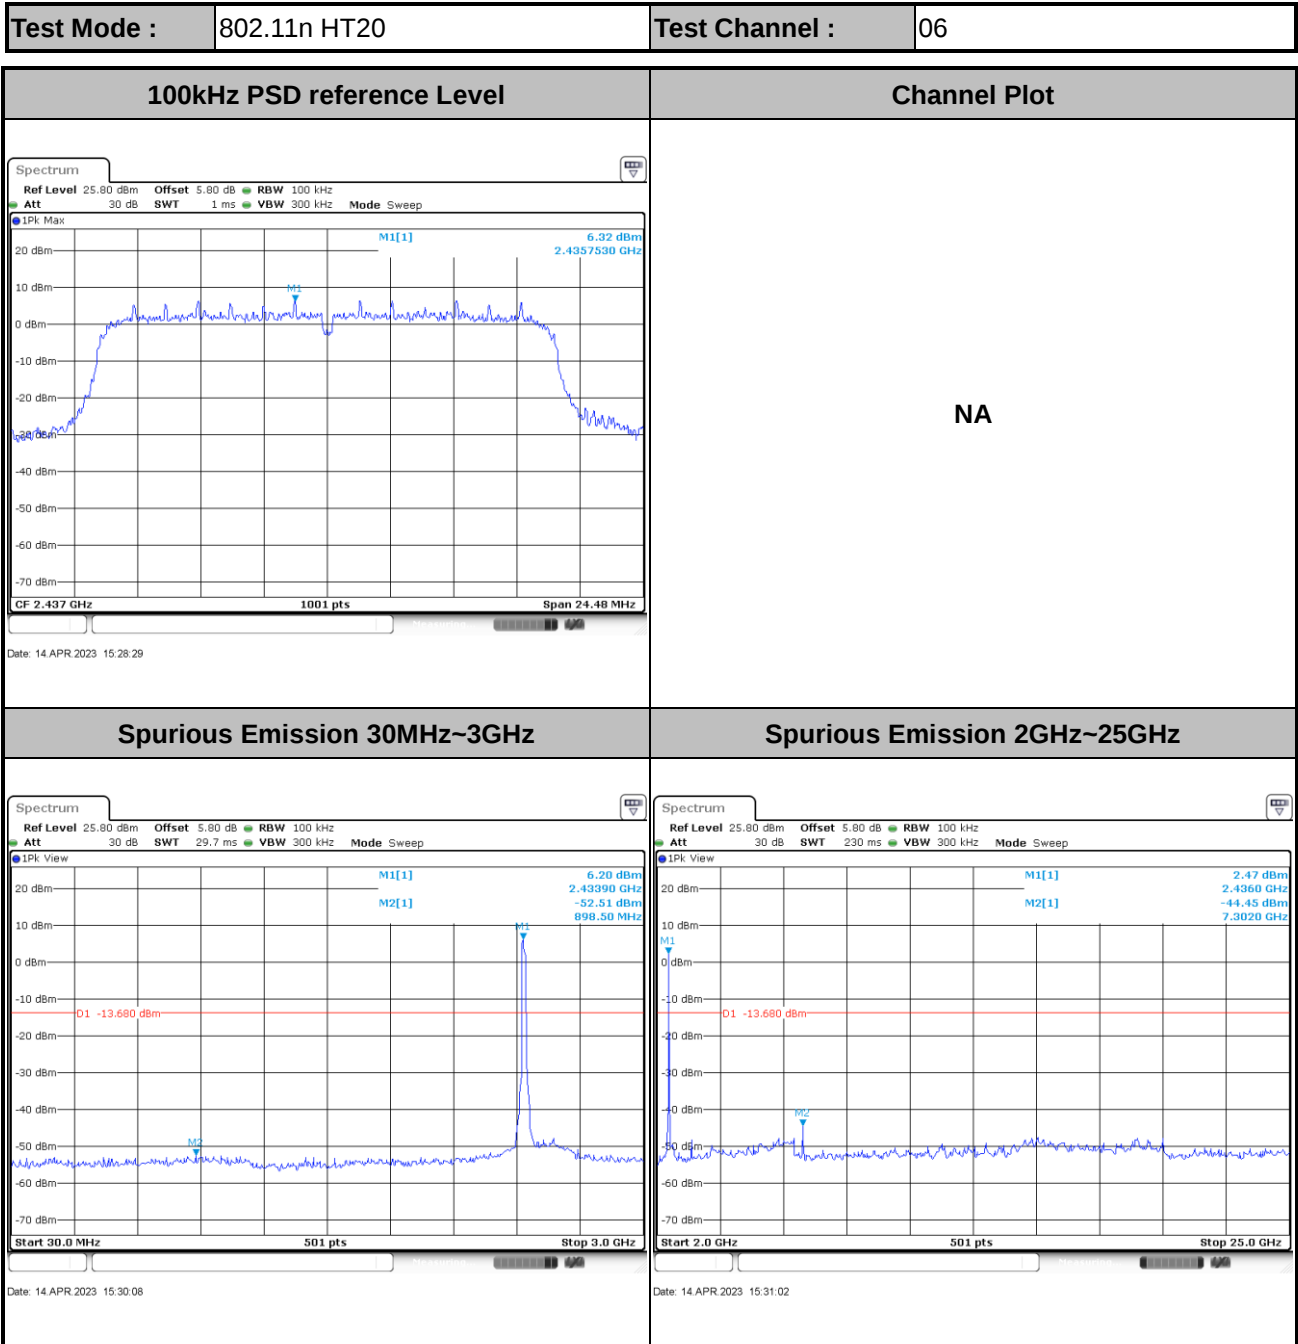



Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

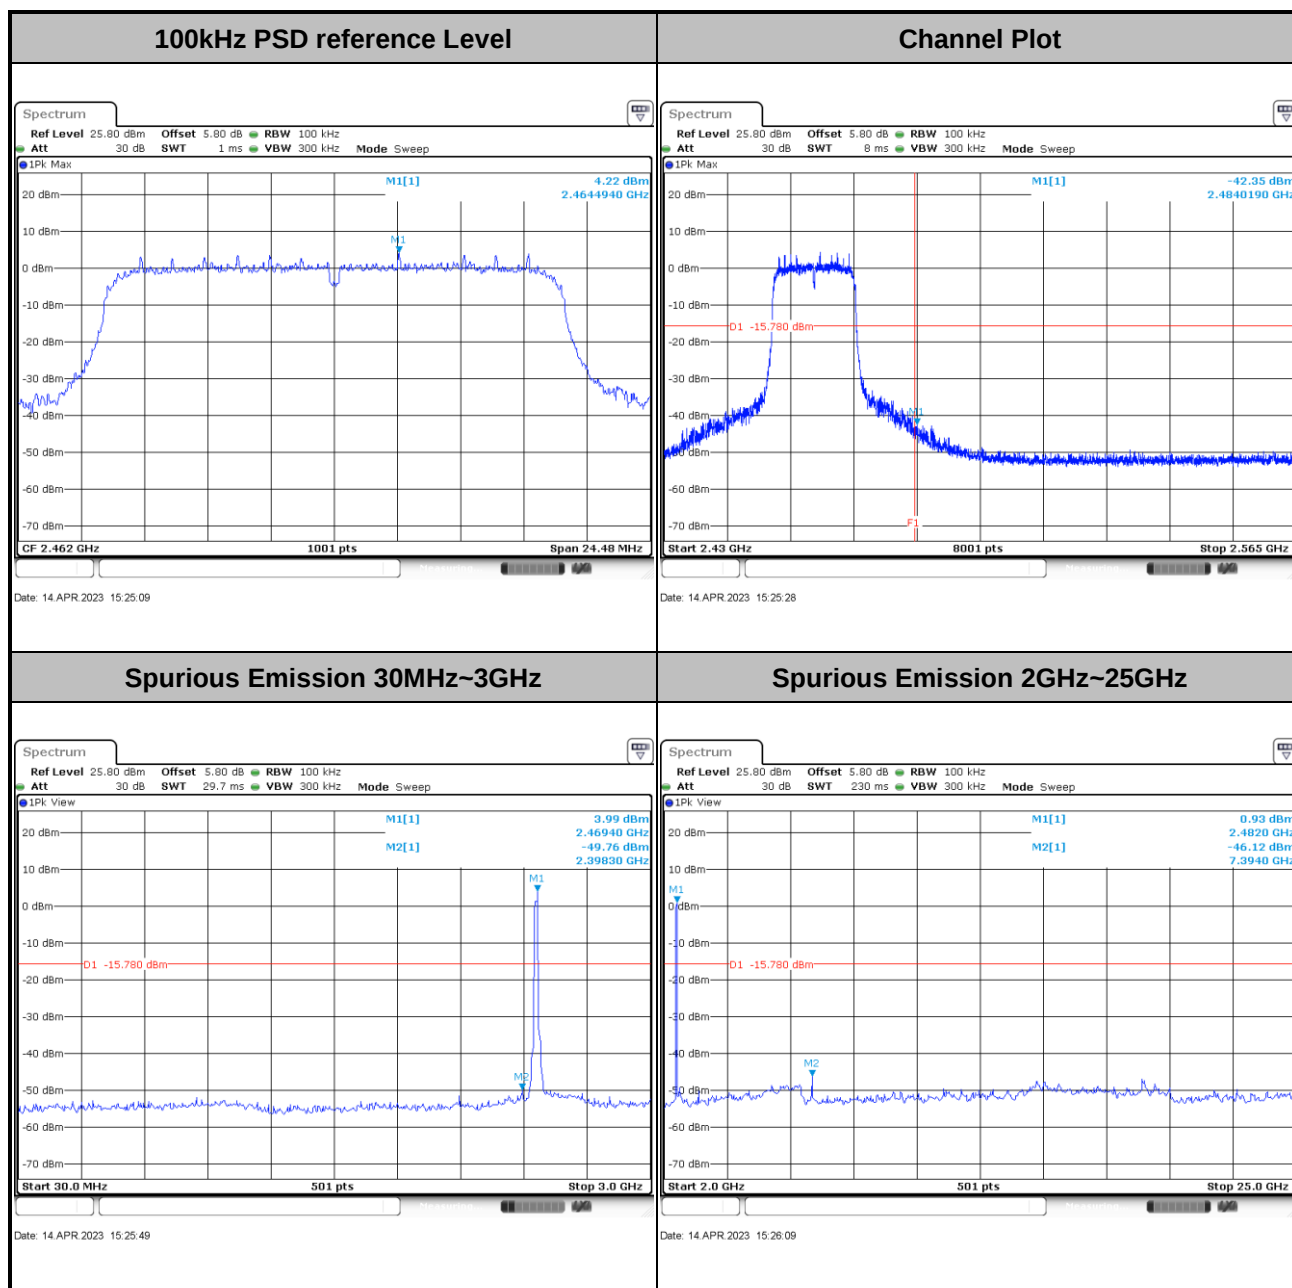



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

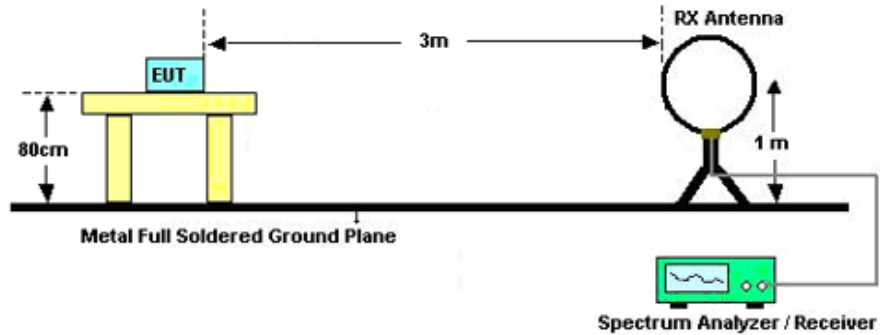

For radiated emissions from 30MHz to 1GHz

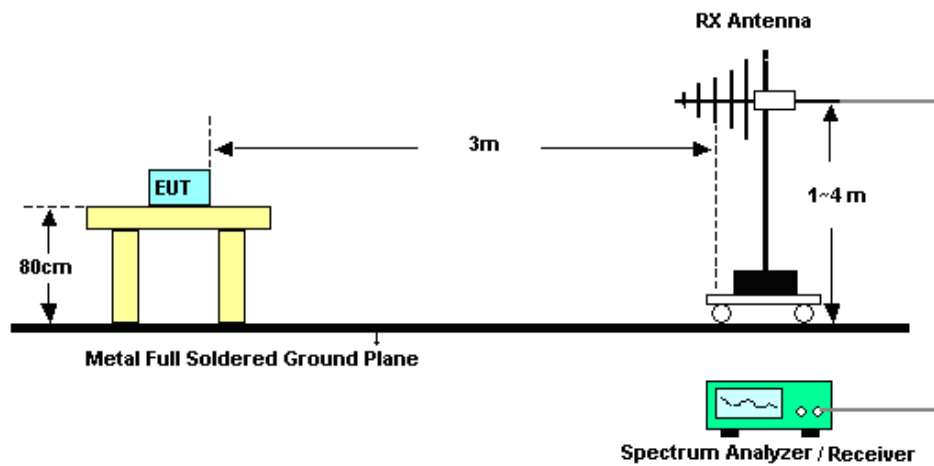

For radiated emissions above 1GHz

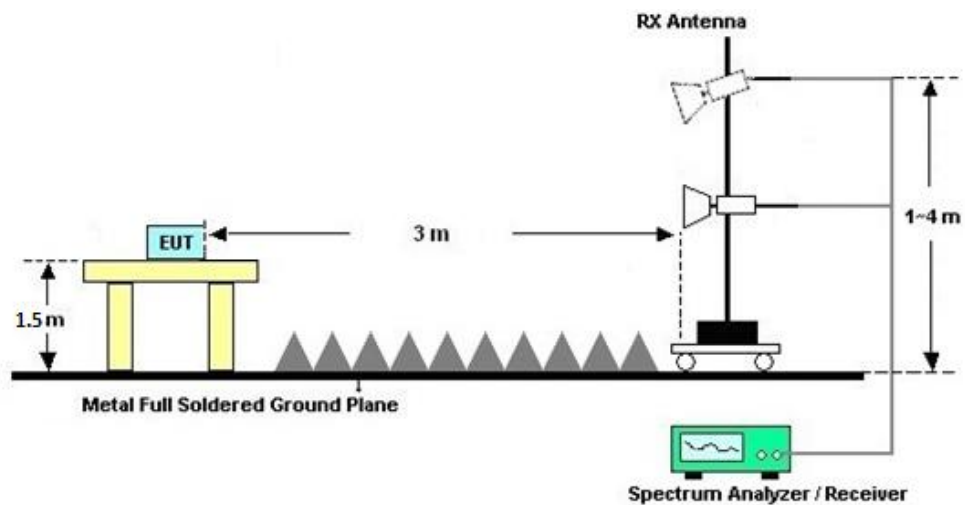

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.5.7 Duty Cycle

Please refer to Appendix D

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

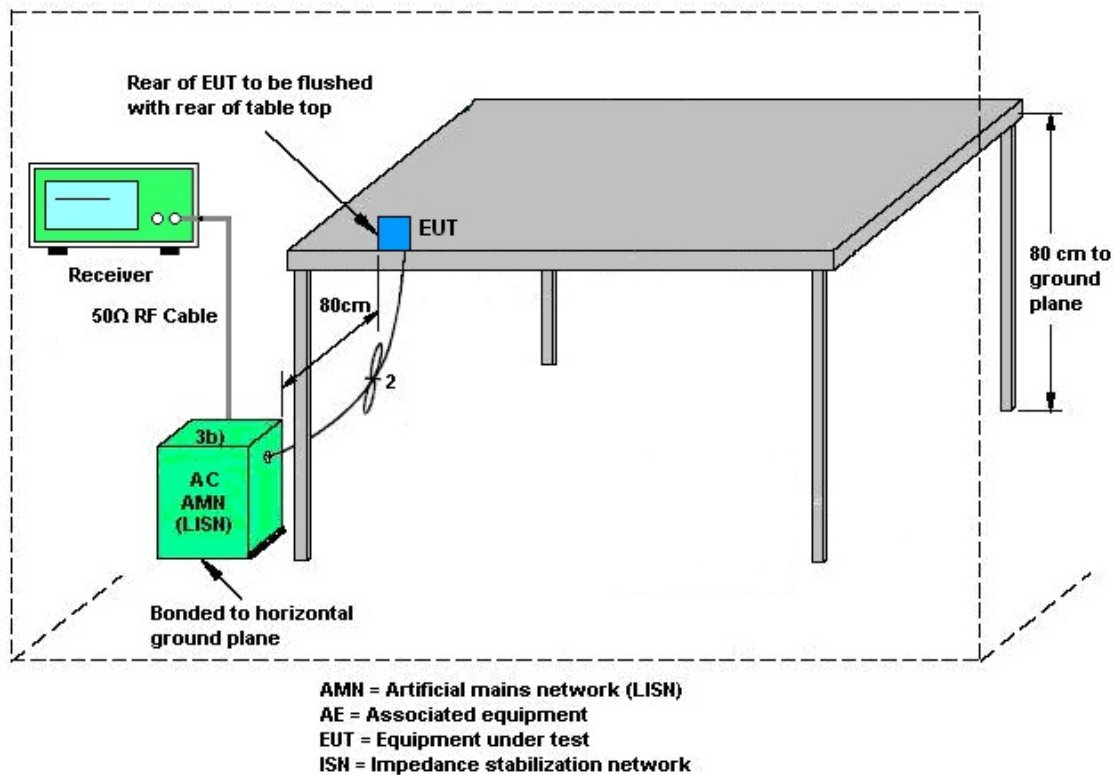

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May. 24, 2022	Apr. 21, 2023	May. 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Apr. 21, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May. 24, 2022	Apr. 21, 2023	May. 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Apr. 21, 2023	Oct. 11, 2023	Conduction (CO01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz;M ax 30dBm	Oct. 13, 2022	Mar. 31, 2023~ Apr. 20, 2023	Oct. 12, 2023	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY602421 26	10Hz~44GHz	Oct. 13, 2022	Mar. 31, 2023~ Apr. 20, 2023	Oct. 12, 2023	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Mar. 31, 2023~ Apr. 20, 2023	Oct. 15, 2023	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 24, 2022	Mar. 31, 2023~ Apr. 20, 2023	May 23, 2023	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Mar. 18, 2023	Mar. 31, 2023~ Apr. 20, 2023	Mar. 17, 2024	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 08, 2023	Mar. 31, 2023~ Apr. 20, 2023	Jan. 07, 2024	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 11, 2022	Mar. 31, 2023~ Apr. 20, 2023	Jul. 10, 2023	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2023	Mar. 31, 2023~ Apr. 20, 2023	Jan. 04, 2024	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082395	1Ghz-18Ghz	Jan. 05, 2023	Mar. 31, 2023~ Apr. 20, 2023	Jan. 04, 2024	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY532703 19	500MHz~26.5G Hz	Oct. 12, 2022	Mar. 31, 2023~ Apr. 20, 2023	Oct. 12, 2023	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Mar. 31, 2023~ Apr. 20, 2023	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 31, 2023~ Apr. 20, 2023	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 31, 2023~ Apr. 20, 2023	NCR	Radiation (03CH06-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Apr. 14, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	1339163	300MHz~40GH z	Oct. 12, 2022	Apr. 14, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1435004	50MHz Bandwidth	Jan. 05, 2023	Apr. 14, 2023	Jan. 04, 2024	Conducted (TH01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	± 0.46 dB
Conducted Emissions	± 0.48 dB
Occupied Channel Bandwidth	± 0.001 %
Conducted Power Spectral Density	± 0.40 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.78 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Jiang Jun	Temperature:	21~25	°C
Test Date:	2023/4/14	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant1	Ant1		
11b	1Mbps	1	1	2412	12.84	9.04	0.50	Pass
11b	1Mbps	1	6	2437	12.89	10.04	0.50	Pass
11b	1Mbps	1	11	2462	12.89	9.60	0.50	Pass
11g	6Mbps	1	1	2412	16.38	16.32	0.50	Pass
11g	6Mbps	1	6	2437	16.53	16.28	0.50	Pass
11g	6Mbps	1	11	2462	16.38	16.30	0.50	Pass
HT20	MCS0	1	1	2412	17.23	16.32	0.50	Pass
HT20	MCS0	1	6	2437	17.28	16.32	0.50	Pass
HT20	MCS0	1	11	2462	17.23	16.32	0.50	Pass

TEST RESULTS DATA
Peak Output Power

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant1	Ant1	Ant1	Ant1	Ant1	
11b	1Mbps	1	1	2412	22.42	30.00	3.96	26.38	36.00	Pass
11b	1Mbps	1	6	2437	22.71	30.00	3.96	26.67	36.00	Pass
11b	1Mbps	1	11	2462	21.96	30.00	3.96	25.92	36.00	Pass
11g	6Mbps	1	1	2412	25.63	30.00	3.96	29.59	36.00	Pass
11g	6Mbps	1	6	2437	27.72	30.00	3.96	31.68	36.00	Pass
11g	6Mbps	1	11	2462	26.02	30.00	3.96	29.98	36.00	Pass
HT20	MCS0	1	1	2412	25.72	30.00	3.96	29.68	36.00	Pass
HT20	MCS0	1	6	2437	27.11	30.00	3.96	31.07	36.00	Pass
HT20	MCS0	1	11	2462	25.83	30.00	3.96	29.79	36.00	Pass

TEST RESULTS DATA
Average Output Power
(Report only)


2.4GHz Band Single Antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant1	Ant1	Ant1	Ant1	Ant1	
11b	1Mbps	1	1	2412	0.00	19.05	30.00	3.96	23.01	36.00	Pass
11b	1Mbps	1	6	2437	0.00	19.44	30.00	3.96	23.40	36.00	Pass
11b	1Mbps	1	11	2462	0.00	18.78	30.00	3.96	22.74	36.00	Pass
11g	6Mbps	1	1	2412	0.00	15.65	30.00	3.96	19.61	36.00	Pass
11g	6Mbps	1	6	2437	0.00	19.83	30.00	3.96	23.79	36.00	Pass
11g	6Mbps	1	11	2462	0.00	15.79	30.00	3.96	19.75	36.00	Pass
HT20	MCS0	1	1	2412	0.00	15.39	30.00	3.96	19.35	36.00	Pass
HT20	MCS0	1	6	2437	0.00	17.81	30.00	3.96	21.77	36.00	Pass
HT20	MCS0	1	11	2462	0.00	15.51	30.00	3.96	19.47	36.00	Pass

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
					Ant1	Ant1	Ant1	
11b	1Mbps	1	1	2412	-2.16	3.96	8.00	Pass
11b	1Mbps	1	6	2437	-2.64	3.96	8.00	Pass
11b	1Mbps	1	11	2462	-2.93	3.96	8.00	Pass
11g	6Mbps	1	1	2412	-9.10	3.96	8.00	Pass
11g	6Mbps	1	6	2437	-5.02	3.96	8.00	Pass
11g	6Mbps	1	11	2462	-8.92	3.96	8.00	Pass
HT20	MCS0	1	1	2412	-9.61	3.96	8.00	Pass
HT20	MCS0	1	6	2437	-7.52	3.96	8.00	Pass
HT20	MCS0	1	11	2462	-9.09	3.96	8.00	Pass




Appendix B. AC Conducted Emission Test Results

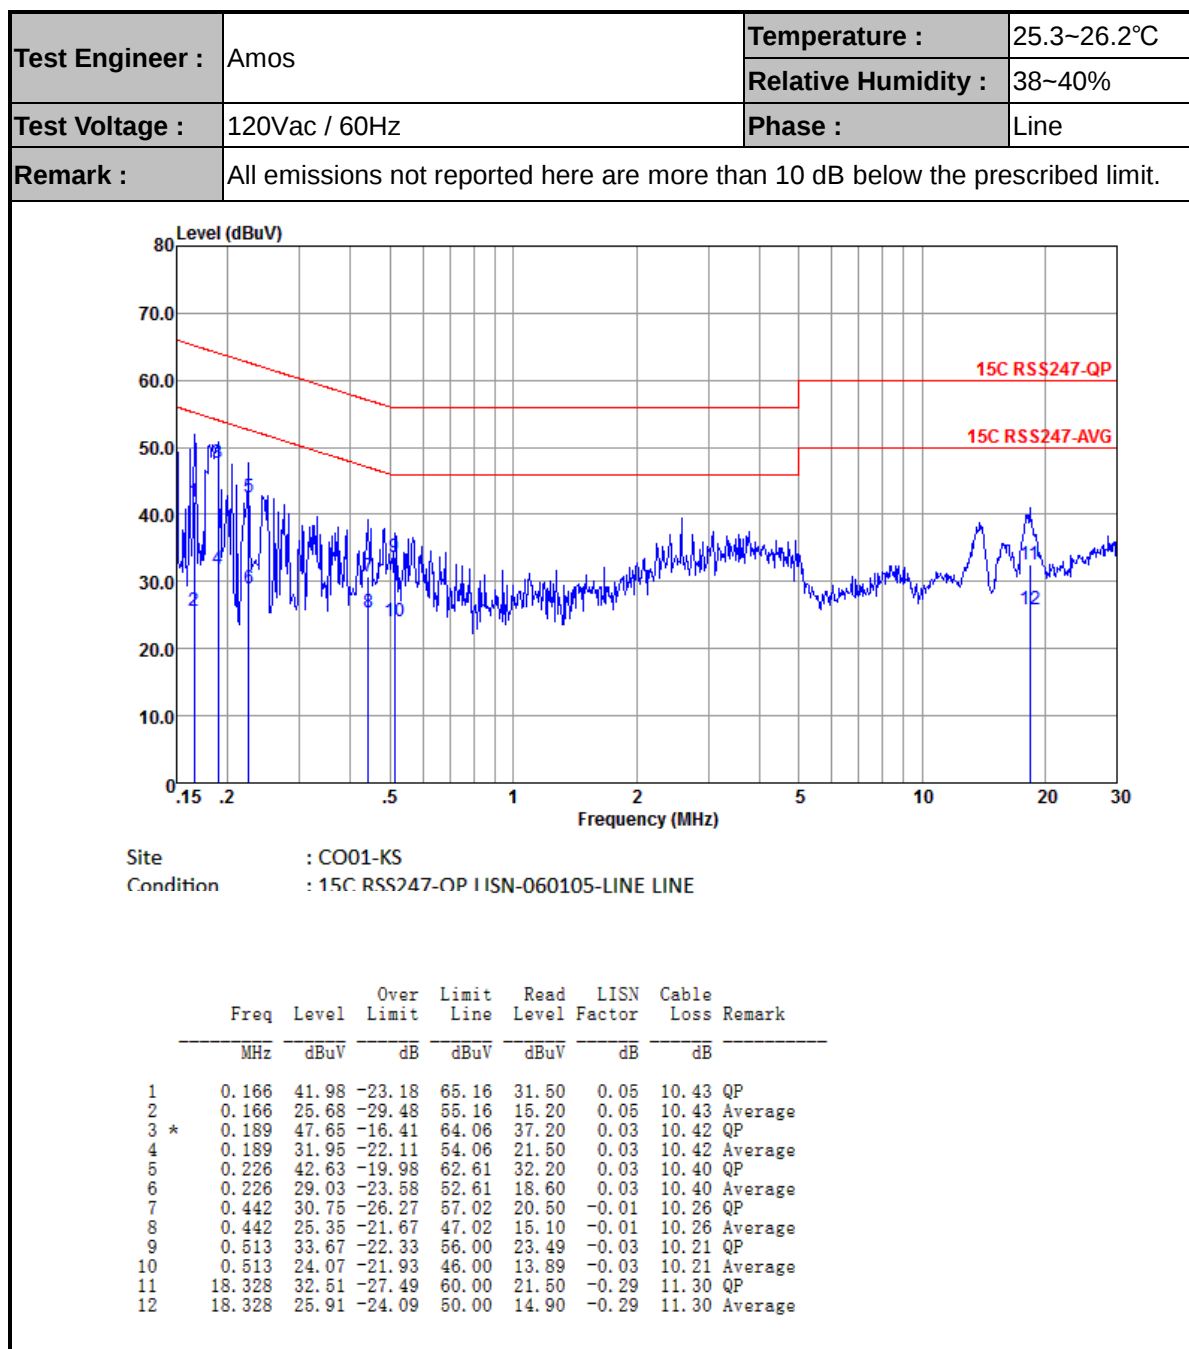



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

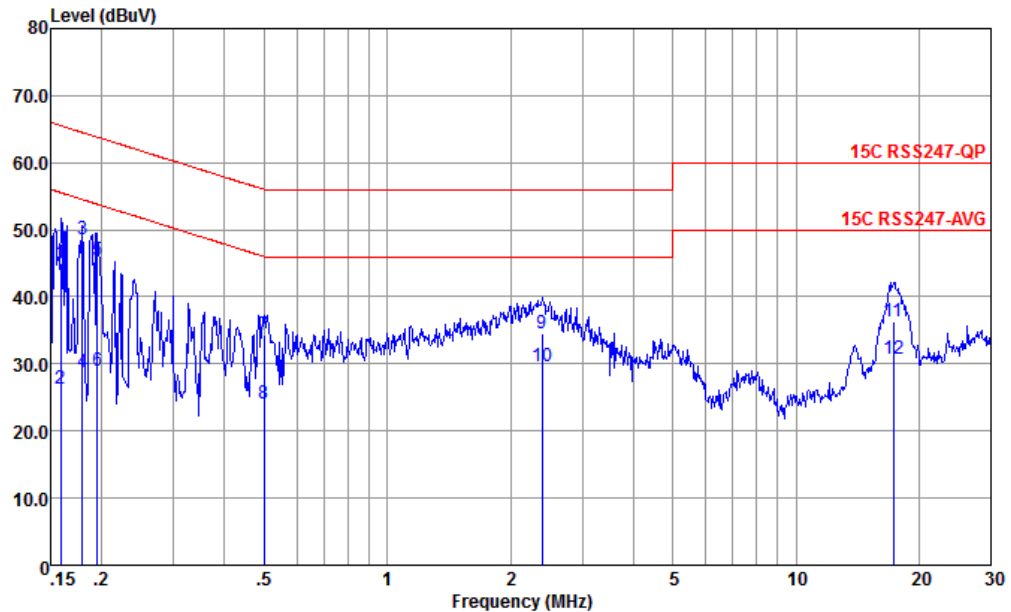

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.159	44.96	-20.56	65.52	34.50	0.03	10.43	QP
2	0.159	26.36	-29.16	55.52	15.90	0.03	10.43	Average
3 *	0.180	48.67	-15.83	64.50	38.21	0.04	10.42	QP
4	0.180	28.77	-25.73	54.50	18.31	0.04	10.42	Average
5	0.195	45.57	-18.23	63.80	35.10	0.05	10.42	QP
6	0.195	29.07	-24.73	53.80	18.60	0.05	10.42	Average
7	0.499	34.23	-21.78	56.01	24.10	-0.08	10.21	QP
8	0.499	24.03	-21.98	46.01	13.90	-0.08	10.21	Average
9	2.396	34.53	-21.47	56.00	24.59	-0.12	10.06	QP
10	2.396	29.53	-16.47	46.00	19.59	-0.12	10.06	Average
11	17.291	36.25	-23.75	60.00	25.20	-0.23	11.28	QP
12	17.291	30.65	-19.35	50.00	19.60	-0.23	11.28	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Carry	Relative Humidity :	41~42%
		Temperature :	22~23℃

Modulation	Data Rate	Channel	Power setting
11b Tx	1Mbps	CH01	0
11b Tx	1Mbps	CH06	0
11b Tx	1Mbps	CH11	4
11g Tx	6Mbps	CH01	16
11g Tx	6Mbps	CH06	0
11g Tx	6Mbps	CH11	18
11n(20M) Tx	MCS0	CH01	8
11n(20M) Tx	MCS0	CH06	0
11n(20M) Tx	MCS0	CH11	10



Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	2400-2483.5	802.11b	01	2412	1Mbps	-
Mode 2	2400-2483.5	802.11b	06	2437	1Mbps	-
Mode 3	2400-2483.5	802.11b	11	2462	1Mbps	-
Mode 4	2400-2483.5	802.11g	01	2412	6Mbps	-
Mode 5	2400-2483.5	802.11g	06	2437	6Mbps	-
Mode 6	2400-2483.5	802.11g	11	2462	6Mbps	-
Mode 7	2400-2483.5	802.11n HT20	01	2412	MCS0	-
Mode 8	2400-2483.5	802.11n HT20	06	2437	MCS0	-
Mode 9	2400-2483.5	802.11n HT20	11	2462	MCS0	-
Mode 10	2400-2483.5	802.11g	11	2462	6Mbps	LF







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2385.92	52.35	54.00	-1.65	H	AVERAGE	Pass	Band Edge
1	802.11b	01	4824.00	46.25	54.00	-7.75	H	AVERAGE	Pass	Harmonic
2	802.11b	06	-	-	-	-	-	-	-	Band Edge
2	802.11b	06	4874.00	48.64	54.00	-5.36	H	AVERAGE	Pass	Harmonic
3	802.11b	11	2487.76	52.95	54.00	-1.21	H	AVERAGE	Pass	Band Edge
3	802.11b	11	4924.00	49.23	54.00	-4.77	H	AVERAGE	Pass	Harmonic
4	802.11g	01	2389.95	52.13	54.00	-1.87	H	AVERAGE	Pass	Band Edge
4	802.11g	01	4824.00	42.71	74.00	-31.29	H	PEAK	Pass	Harmonic
5	802.11g	06	-	-	-	-	-	-	-	Band Edge
5	802.11g	06	4874.00	45.33	74.00	-28.67	H	PEAK	Pass	Harmonic
6	802.11g	11	2483.51	52.84	54.00	-1.16	H	AVERAGE	Pass	Band Edge
6	802.11g	11	4924.00	44.53	74.00	-29.47	V	PEAK	Pass	Harmonic
7	802.11n HT20	01	2389.95	52.47	54.00	-1.53	H	AVERAGE	Pass	Band Edge
7	802.11n HT20	01	4824.00	43.73	74.00	-30.27	H	PEAK	Pass	Harmonic
8	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
8	802.11n HT20	06	4874.00	44.93	74.00	-29.07	H	PEAK	Pass	Harmonic
9	802.11n HT20	11	2483.51	52.12	54.00	-1.88	H	AVERAGE	Pass	Band Edge
9	802.11n HT20	11	4924.00	44.15	74.00	-29.85	V	PEAK	Pass	Harmonic
10	802.11g	11	560.59	34.78	46	-11.22	V	PEAK	Pass	LF





		1										
Mode		Band Edge										
		2400-2483.5_802.11b_CH01_2412MHz										
Pol.		Fundamental										
Peak	Horizontal	Fundamental										
	Fundamental											
Avg	Horizontal	Fundamental										
	Fundamental											

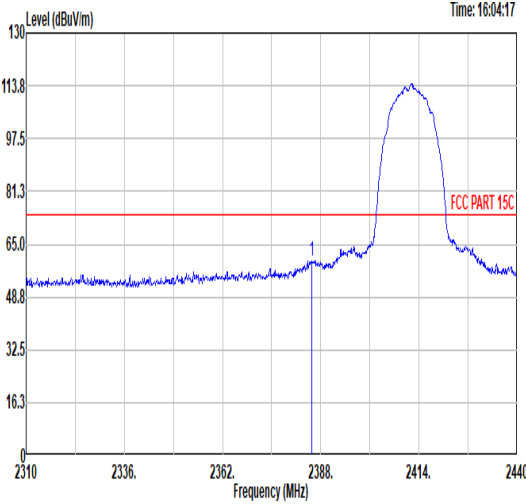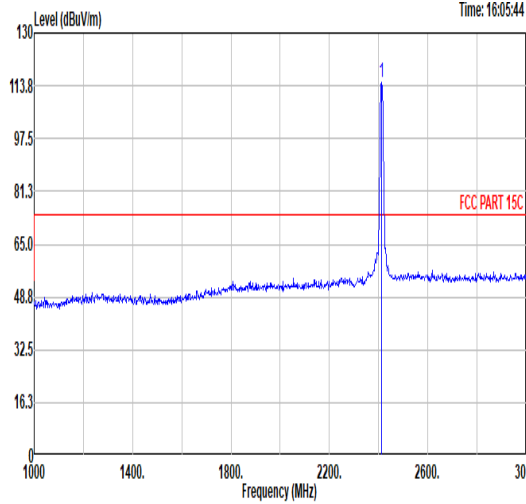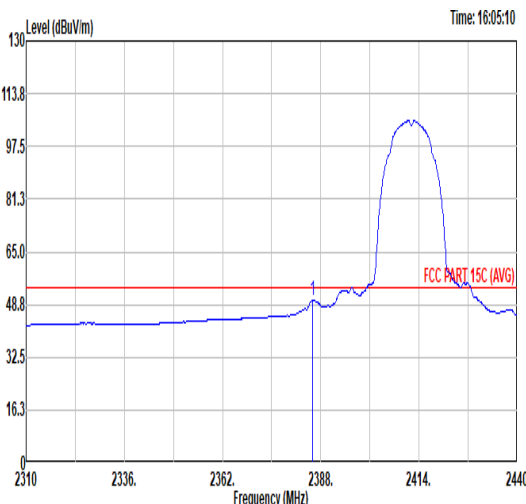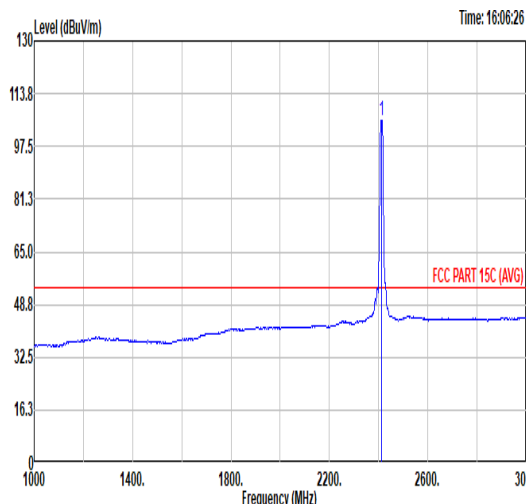

Mode	1																																																																																																					
	Band Edge																																																																																																					
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																					
Pol.	Vertical	Fundamental																																																																																																				
Peak	Time: 16:04:17 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2385.53</td><td>60.06</td><td>74.00</td><td>-13.94</td><td>48.16</td><td>32.17</td><td>6.60</td><td>32.87</td><td>6.00</td><td>348</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>323 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 2385.53	60.06	74.00	-13.94	48.16	32.17	6.60	32.87	6.00	348										323 PEAK	Time: 16:05:44 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2412.00</td><td>114.78</td><td>-----</td><td>-----</td><td>102.82</td><td>32.14</td><td>6.63</td><td>32.81</td><td>6.00</td><td>348</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>323 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 2412.00	114.78	-----	-----	102.82	32.14	6.63	32.81	6.00	348										323 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																													
1 2385.53	60.06	74.00	-13.94	48.16	32.17	6.60	32.87	6.00	348																																																																																													
									323 PEAK																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																													
1 2412.00	114.78	-----	-----	102.82	32.14	6.63	32.81	6.00	348																																																																																													
									323 PEAK																																																																																													
Avg	Time: 16:05:10 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2385.92</td><td>50.16</td><td>54.00</td><td>-3.84</td><td>38.26</td><td>32.17</td><td>6.60</td><td>32.87</td><td>6.00</td><td>348</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>323 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 2385.92	50.16	54.00	-3.84	38.26	32.17	6.60	32.87	6.00	348										323 AVERAGE	Time: 16:06:26 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2412.00</td><td>105.49</td><td>-----</td><td>-----</td><td>93.53</td><td>32.14</td><td>6.63</td><td>32.81</td><td>6.00</td><td>348</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>323 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 2412.00	105.49	-----	-----	93.53	32.14	6.63	32.81	6.00	348										323 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																													
1 2385.92	50.16	54.00	-3.84	38.26	32.17	6.60	32.87	6.00	348																																																																																													
									323 AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																													
1 2412.00	105.49	-----	-----	93.53	32.14	6.63	32.81	6.00	348																																																																																													
									323 AVERAGE																																																																																													



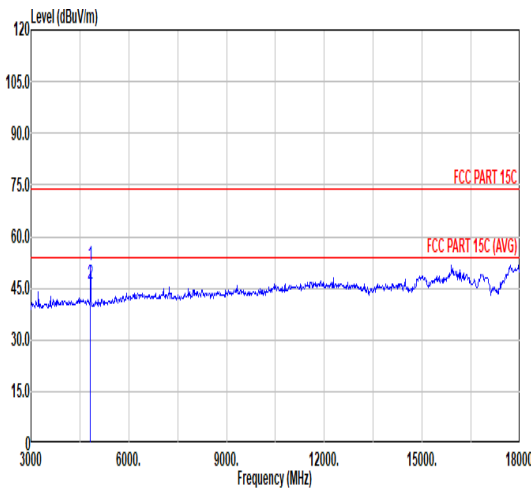
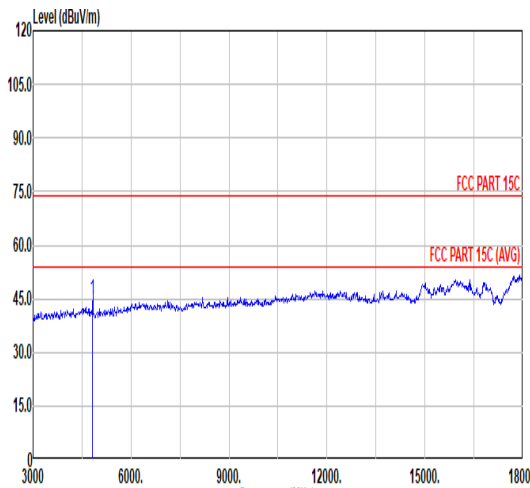


Mode	1																																																																																																																
	Harmonic																																																																																																																
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																
Pol.	Horizontal						Vertical																																																																																																										
Peak Avg																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>51.59</td><td>74.00</td><td>-22.41</td><td>69.78</td><td>34.15</td><td>9.47</td><td>61.81</td><td>0.00</td><td>300</td><td>53</td><td>PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>46.25</td><td>54.00</td><td>-7.75</td><td>64.44</td><td>34.15</td><td>9.47</td><td>61.81</td><td>0.00</td><td>300</td><td>53</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	51.59	74.00	-22.41	69.78	34.15	9.47	61.81	0.00	300	53	PEAK	2	4824.00	46.25	54.00	-7.75	64.44	34.15	9.47	61.81	0.00	300	53	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>44.98</td><td>74.00</td><td>-29.02</td><td>63.17</td><td>34.15</td><td>9.47</td><td>61.81</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	44.98	74.00	-29.02	63.17	34.15	9.47	61.81	0.00	---	---	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	4824.00	51.59	74.00	-22.41	69.78	34.15	9.47	61.81	0.00	300	53	PEAK																																																																																																					
2	4824.00	46.25	54.00	-7.75	64.44	34.15	9.47	61.81	0.00	300	53	AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	4824.00	44.98	74.00	-29.02	63.17	34.15	9.47	61.81	0.00	---	---	PEAK																																																																																																					







Mode	2																																																																																		
	Harmonic																																																																																		
	2400-2483.5_802.11b_CH06_2437MHz																																																																																		
Pol.	Horizontal																																																																																		
Peak Avg																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>53.41</td><td>74.00</td><td>-20.59</td><td>71.23</td><td>34.43</td><td>9.52</td><td>61.77</td><td>0.00</td><td>137</td><td>27</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>48.64</td><td>54.00</td><td>-5.36</td><td>66.46</td><td>34.43</td><td>9.52</td><td>61.77</td><td>0.00</td><td>137</td><td>27</td><td>AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>43.38</td><td>74.00</td><td>-30.62</td><td>57.65</td><td>36.10</td><td>11.69</td><td>62.06</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	53.41	74.00	-20.59	71.23	34.43	9.52	61.77	0.00	137	27	PEAK	2	4874.00	48.64	54.00	-5.36	66.46	34.43	9.52	61.77	0.00	137	27	AVERAGE	3	7311.00	43.38	74.00	-30.62	57.65	36.10	11.69	62.06	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1	4874.00	53.41	74.00	-20.59	71.23	34.43	9.52	61.77	0.00	137	27	PEAK																																																																							
2	4874.00	48.64	54.00	-5.36	66.46	34.43	9.52	61.77	0.00	137	27	AVERAGE																																																																							
3	7311.00	43.38	74.00	-30.62	57.65	36.10	11.69	62.06	0.00	---	---	PEAK																																																																							
Vertical																																																																																			
Peak Avg																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>53.23</td><td>74.00</td><td>-20.77</td><td>71.05</td><td>34.43</td><td>9.52</td><td>61.77</td><td>0.00</td><td>149</td><td>273</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>48.12</td><td>54.00</td><td>-5.88</td><td>65.94</td><td>34.43</td><td>9.52</td><td>61.77</td><td>0.00</td><td>149</td><td>273</td><td>AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>43.78</td><td>74.00</td><td>-30.22</td><td>58.05</td><td>36.10</td><td>11.69</td><td>62.06</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	53.23	74.00	-20.77	71.05	34.43	9.52	61.77	0.00	149	273	PEAK	2	4874.00	48.12	54.00	-5.88	65.94	34.43	9.52	61.77	0.00	149	273	AVERAGE	3	7311.00	43.78	74.00	-30.22	58.05	36.10	11.69	62.06	0.00	---	---	PEAK		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1	4874.00	53.23	74.00	-20.77	71.05	34.43	9.52	61.77	0.00	149	273	PEAK																																																																							
2	4874.00	48.12	54.00	-5.88	65.94	34.43	9.52	61.77	0.00	149	273	AVERAGE																																																																							
3	7311.00	43.78	74.00	-30.22	58.05	36.10	11.69	62.06	0.00	---	---	PEAK																																																																							

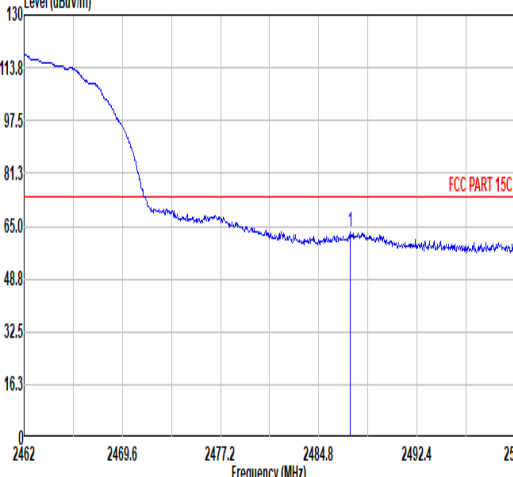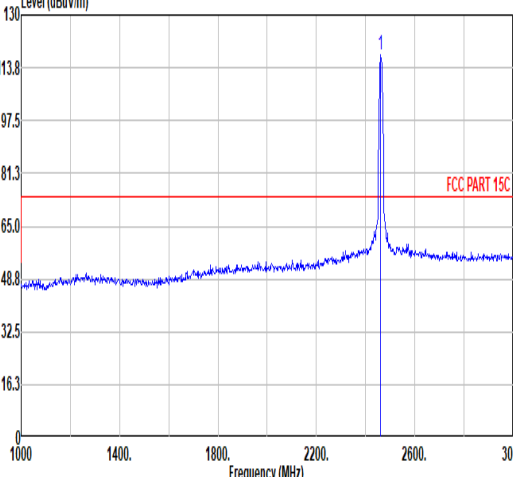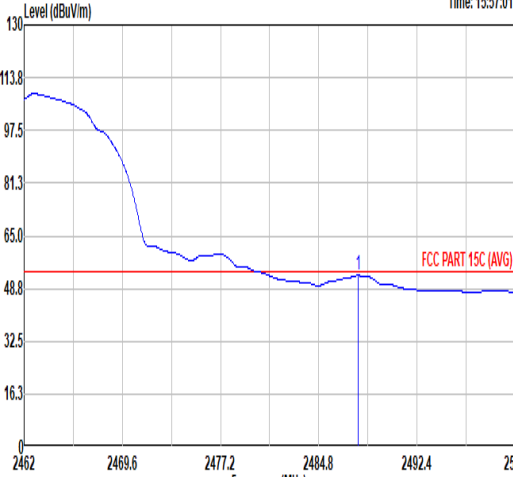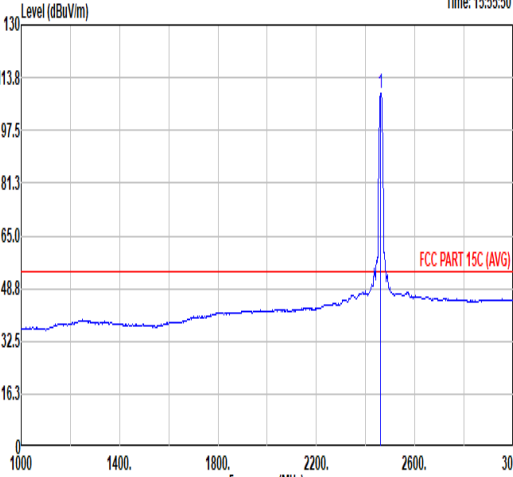

		3																																																																																																	
Mode	Band Edge																																																																																																		
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																		
Pol.	Horizontal										Fundamental																																																																																								
Peak	Level (dBuV/m) Time: 15:56:19  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2487.23</td><td>63.09</td><td>74.00</td><td>-10.91</td><td>50.67</td><td>32.30</td><td>6.74</td><td>32.62</td><td>6.00</td><td>115 0 PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.23	63.09	74.00	-10.91	50.67	32.30	6.74	32.62	6.00	115 0 PEAK	Level (dBuV/m) Time: 15:55:09  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>117.91</td><td>-----</td><td>-----</td><td>105.39</td><td>32.50</td><td>6.70</td><td>32.68</td><td>6.00</td><td>115 0 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	117.91	-----	-----	105.39	32.50	6.70	32.68	6.00	115 0 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2487.23	63.09	74.00	-10.91	50.67	32.30	6.74	32.62	6.00	115 0 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	117.91	-----	-----	105.39	32.50	6.70	32.68	6.00	115 0 PEAK																																																																																									
Avg	Level (dBuV/m) Time: 15:57:01  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2487.84</td><td>52.79</td><td>54.00</td><td>-1.21</td><td>40.36</td><td>32.30</td><td>6.74</td><td>32.61</td><td>6.00</td><td>115 0 AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.84	52.79	54.00	-1.21	40.36	32.30	6.74	32.61	6.00	115 0 AVERAGE	Level (dBuV/m) Time: 15:55:50  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>109.04</td><td>-----</td><td>-----</td><td>96.52</td><td>32.50</td><td>6.70</td><td>32.68</td><td>6.00</td><td>115 0 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	109.04	-----	-----	96.52	32.50	6.70	32.68	6.00	115 0 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2487.84	52.79	54.00	-1.21	40.36	32.30	6.74	32.61	6.00	115 0 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	109.04	-----	-----	96.52	32.50	6.70	32.68	6.00	115 0 AVERAGE																																																																																									

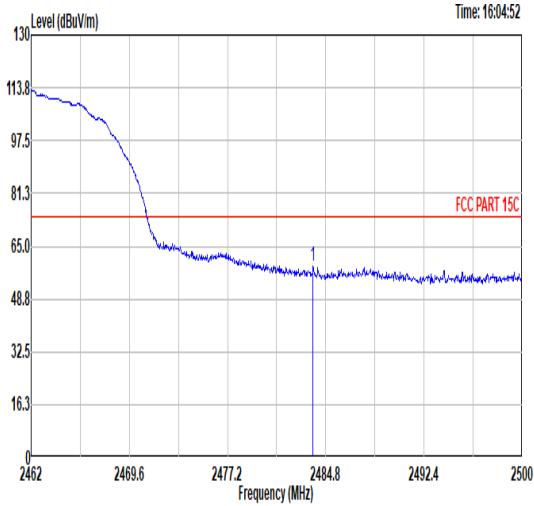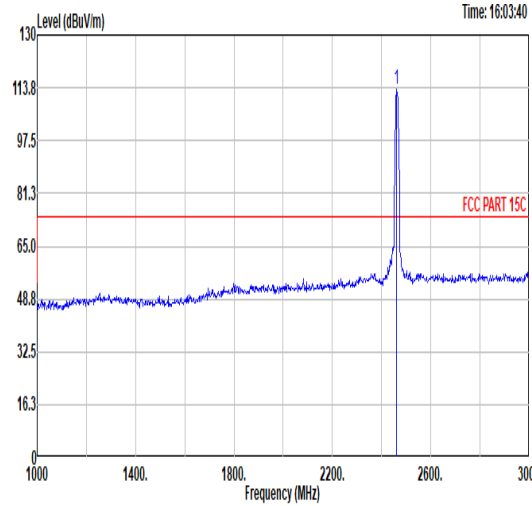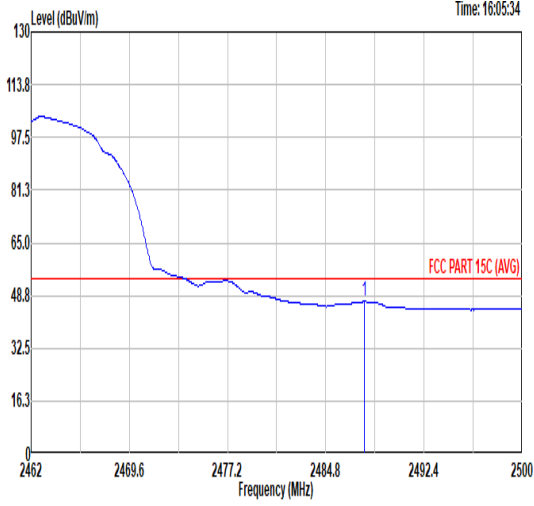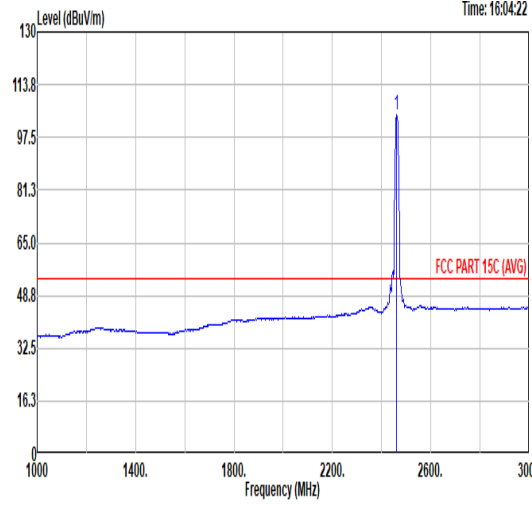

Mode	3																																																						
	Band Edge																																																						
	2400-2483.5_802.11b_CH11_2462MHz																																																						
Pol.	Vertical						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.81</td><td>58.65</td><td>74.00</td><td>-15.35</td><td>46.21</td><td>32.33</td><td>6.73</td><td>32.62</td><td>6.00</td><td>371</td><td>336</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.81	58.65	74.00	-15.35	46.21	32.33	6.73	32.62	6.00	371	336
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.81	58.65	74.00	-15.35	46.21	32.33	6.73	32.62	6.00	371	336	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>113.56</td><td>-----</td><td>-----</td><td>101.04</td><td>32.50</td><td>6.70</td><td>32.68</td><td>6.00</td><td>371</td><td>336</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	113.56	-----	-----	101.04	32.50	6.70	32.68	6.00	371	336
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	113.56	-----	-----	101.04	32.50	6.70	32.68	6.00	371	336	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.76</td><td>46.89</td><td>54.00</td><td>-7.11</td><td>34.46</td><td>32.30</td><td>6.74</td><td>32.61</td><td>6.00</td><td>371</td><td>336</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.76	46.89	54.00	-7.11	34.46	32.30	6.74	32.61	6.00	371	336
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2487.76	46.89	54.00	-7.11	34.46	32.30	6.74	32.61	6.00	371	336	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>104.31</td><td>-----</td><td>-----</td><td>91.79</td><td>32.50</td><td>6.70</td><td>32.68</td><td>6.00</td><td>371</td><td>336</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	104.31	-----	-----	91.79	32.50	6.70	32.68	6.00	371	336
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	104.31	-----	-----	91.79	32.50	6.70	32.68	6.00	371	336	AVERAGE																																											



Mode	3																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Time: 16:15:02 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4924.00</td><td>53.97</td><td>74.00</td><td>-20.03</td><td>72.14</td><td>34.00</td><td>9.57</td><td>61.74</td><td>0.00</td><td>112 148 PEAK</td></tr><tr><td>2 4924.00</td><td>49.23</td><td>54.00</td><td>-4.77</td><td>67.40</td><td>34.00</td><td>9.57</td><td>61.74</td><td>0.00</td><td>112 148 AVERAGE</td></tr><tr><td>3 7386.00</td><td>44.38</td><td>74.00</td><td>-29.62</td><td>58.75</td><td>35.97</td><td>11.72</td><td>62.06</td><td>0.00</td><td>--- --- PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4924.00	53.97	74.00	-20.03	72.14	34.00	9.57	61.74	0.00	112 148 PEAK	2 4924.00	49.23	54.00	-4.77	67.40	34.00	9.57	61.74	0.00	112 148 AVERAGE	3 7386.00	44.38	74.00	-29.62	58.75	35.97	11.72	62.06	0.00	--- --- PEAK	Level (dBuV/m) Time: 21:55:30 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4924.00</td><td>49.28</td><td>74.00</td><td>-24.72</td><td>67.45</td><td>34.00</td><td>9.57</td><td>61.74</td><td>0.00</td><td>204 288 PEAK</td></tr><tr><td>2 4924.00</td><td>43.79</td><td>54.00</td><td>-10.21</td><td>61.96</td><td>34.00</td><td>9.57</td><td>61.74</td><td>0.00</td><td>204 288 AVERAGE</td></tr><tr><td>3 7386.00</td><td>43.34</td><td>74.00</td><td>-30.66</td><td>57.71</td><td>35.97</td><td>11.72</td><td>62.06</td><td>0.00</td><td>--- --- PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4924.00	49.28	74.00	-24.72	67.45	34.00	9.57	61.74	0.00	204 288 PEAK	2 4924.00	43.79	54.00	-10.21	61.96	34.00	9.57	61.74	0.00	204 288 AVERAGE	3 7386.00	43.34	74.00	-30.66	57.71	35.97	11.72	62.06	0.00	--- --- PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 4924.00	53.97	74.00	-20.03	72.14	34.00	9.57	61.74	0.00	112 148 PEAK																																																																																																																	
2 4924.00	49.23	54.00	-4.77	67.40	34.00	9.57	61.74	0.00	112 148 AVERAGE																																																																																																																	
3 7386.00	44.38	74.00	-29.62	58.75	35.97	11.72	62.06	0.00	--- --- PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 4924.00	49.28	74.00	-24.72	67.45	34.00	9.57	61.74	0.00	204 288 PEAK																																																																																																																	
2 4924.00	43.79	54.00	-10.21	61.96	34.00	9.57	61.74	0.00	204 288 AVERAGE																																																																																																																	
3 7386.00	43.34	74.00	-30.66	57.71	35.97	11.72	62.06	0.00	--- --- PEAK																																																																																																																	

4

Mode

Band Edge

2400-2483.5_802.11g_CH01_2412MHz

Pol.


Horizontal

Fundamental

Peak

Level (dBuV/m)


Time: 22:30:29

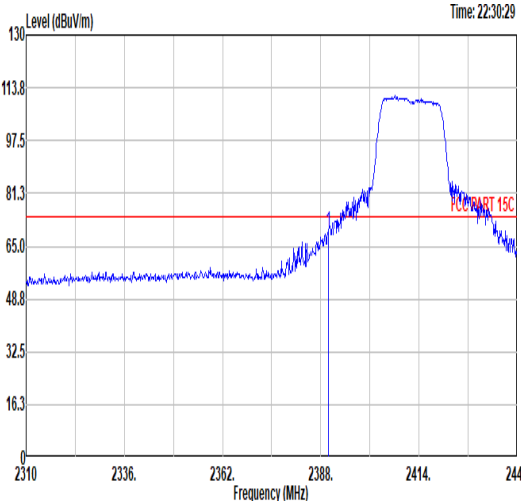

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1 2389.95	69.79	74.00	-4.21	57.93	32.12	6.60	32.86	6.00	100	19 PEAK

Level (dBuV/m)

Time: 22:31:52

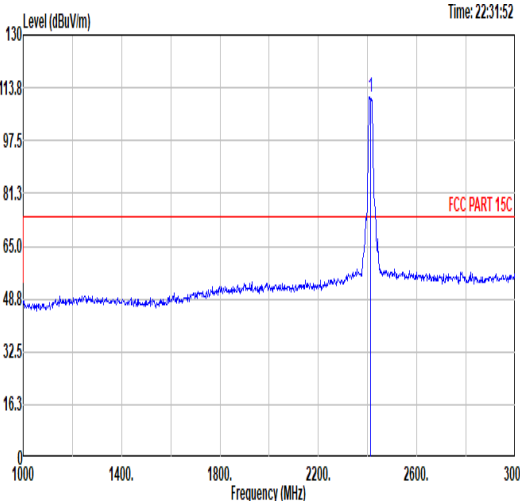


	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1 2412.00	111.03	-----	-----	99.16	32.07	6.63	32.83	6.00	100	19 PEAK

Avg

Level (dBuV/m)


Time: 22:31:21

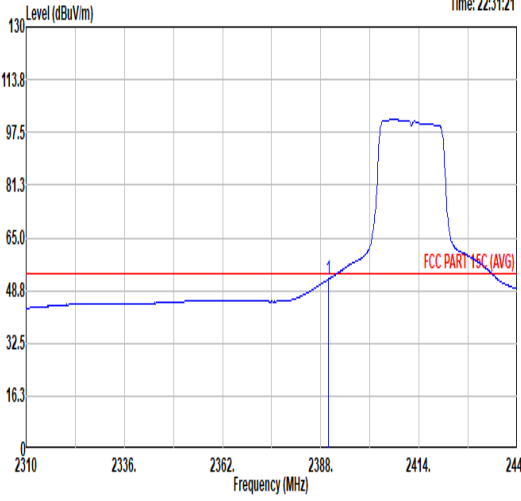

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1 2389.95	52.13	54.00	-1.87	40.27	32.12	6.60	32.86	6.00	100	19 AVERAGE





Level (dBuV/m)

Time: 22:32:33


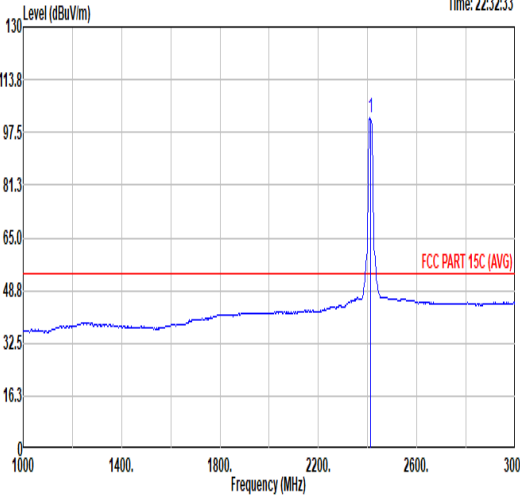


	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1 2412.00	101.81	-----	-----	89.91	32.10	6.63	32.83	6.00	100	19 AVERAGE

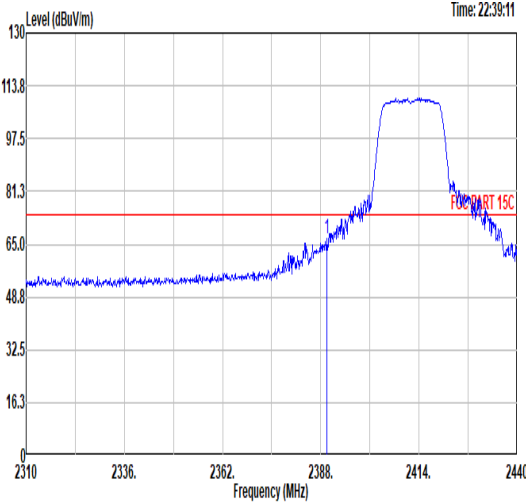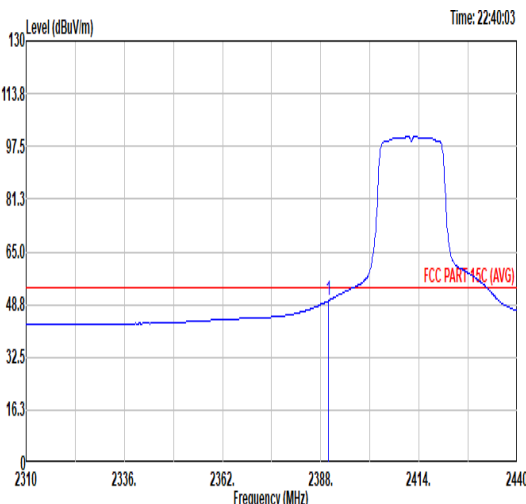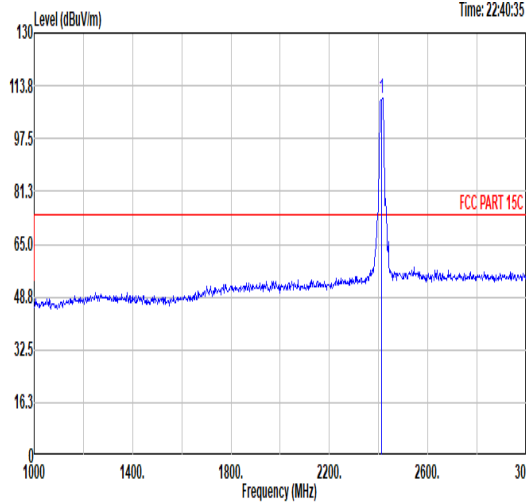
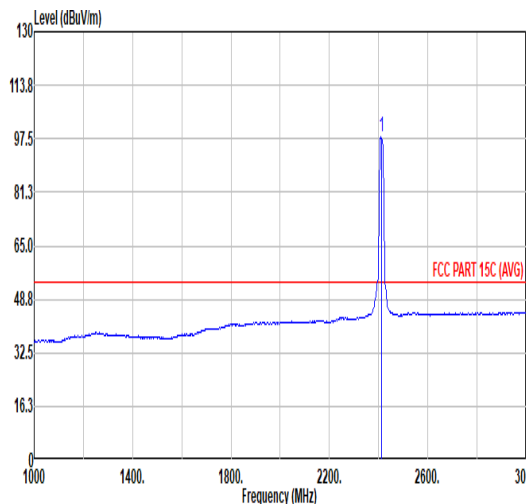


Mode	4																																																					
	Band Edge																																																					
	2400-2483.5_802.11g_CH01_2412MHz																																																					
Pol.	Vertical						Fundamental																																															
Peak																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>66.67</td><td>74.00</td><td>-7.33</td><td>54.81</td><td>32.12</td><td>6.60</td><td>32.86</td><td>6.00</td><td>306 325 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	66.67	74.00	-7.33	54.81	32.12	6.60	32.86	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2389.69	66.67	74.00	-7.33	54.81	32.12	6.60	32.86	6.00	306 325 PEAK																																												
Avg																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>49.91</td><td>54.00</td><td>-4.09</td><td>38.05</td><td>32.12</td><td>6.60</td><td>32.86</td><td>6.00</td><td>306 325 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	49.91	54.00	-4.09	38.05	32.12	6.60	32.86	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2389.95	49.91	54.00	-4.09	38.05	32.12	6.60	32.86	6.00	306 325 AVERAGE																																												
Peak																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>109.99</td><td>-----</td><td>-----</td><td>97.99</td><td>32.17</td><td>6.64</td><td>32.81</td><td>6.00</td><td>306 325 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	109.99	-----	-----	97.99	32.17	6.64	32.81	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2412.00	109.99	-----	-----	97.99	32.17	6.64	32.81	6.00	306 325 PEAK																																												
Avg																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>97.89</td><td>-----</td><td>-----</td><td>85.99</td><td>32.10</td><td>6.63</td><td>32.83</td><td>6.00</td><td>345 321 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	97.89	-----	-----	85.99	32.10	6.63	32.83	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2412.00	97.89	-----	-----	85.99	32.10	6.63	32.83	6.00	345 321 AVERAGE																																												



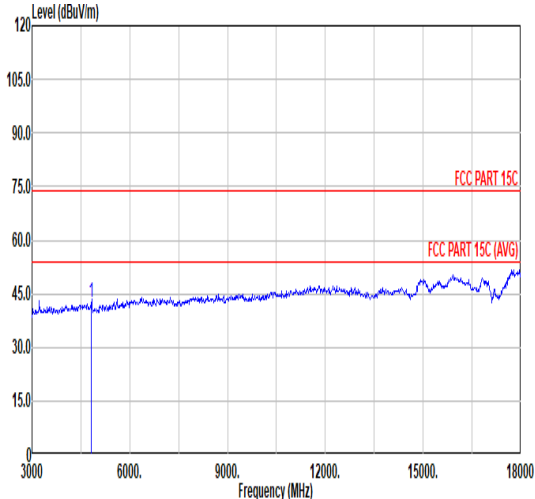
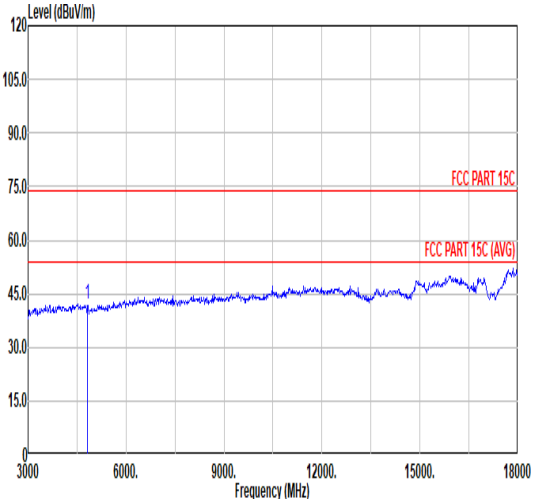


Mode	4																																																																																																		
	Harmonic																																																																																																		
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																		
Pol.	Horizontal						Vertical																																																																																												
Peak Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>42.71</td><td>74.00</td><td>-31.29</td><td>60.90</td><td>34.15</td><td>9.47</td><td>61.81</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	42.71	74.00	-31.29	60.90	34.15	9.47	61.81	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>42.26</td><td>74.00</td><td>-31.74</td><td>60.45</td><td>34.15</td><td>9.47</td><td>61.81</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	42.26	74.00	-31.74	60.45	34.15	9.47	61.81	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	4824.00	42.71	74.00	-31.29	60.90	34.15	9.47	61.81	0.00	---	---	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	4824.00	42.26	74.00	-31.74	60.45	34.15	9.47	61.81	0.00	---	---	PEAK																																																																																							



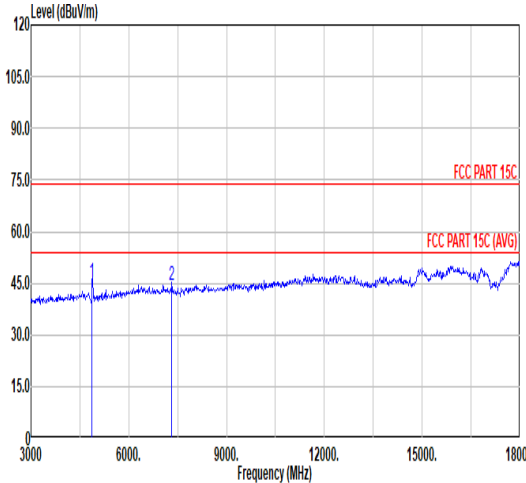
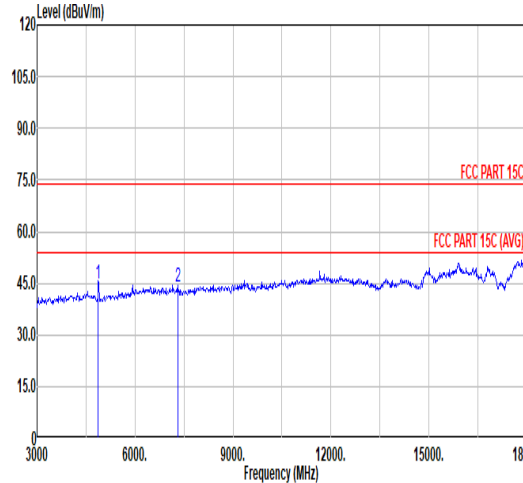


Mode	5																																																																																																																																											
	Harmonic																																																																																																																																											
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																											
Pol.	Horizontal											Vertical																																																																																																																																
Peak Avg																																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>45.33</td><td>74.00</td><td>-28.67</td><td>63.53</td><td>34.05</td><td>9.52</td><td>61.77</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>44.16</td><td>74.00</td><td>-29.84</td><td>58.71</td><td>35.82</td><td>11.69</td><td>62.06</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	45.33	74.00	-28.67	63.53	34.05	9.52	61.77	0.00	---	---	PEAK	2	7311.00	44.16	74.00	-29.84	58.71	35.82	11.69	62.06	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>45.00</td><td>74.00</td><td>-29.00</td><td>63.20</td><td>34.05</td><td>9.52</td><td>61.77</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>44.12</td><td>74.00</td><td>-29.88</td><td>58.67</td><td>35.82</td><td>11.69</td><td>62.06</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	45.00	74.00	-29.00	63.20	34.05	9.52	61.77	0.00	---	---	PEAK	2	7311.00	44.12	74.00	-29.88	58.67	35.82	11.69	62.06	0.00	---	---	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	4874.00	45.33	74.00	-28.67	63.53	34.05	9.52	61.77	0.00	---	---	PEAK																																																																																																																																
2	7311.00	44.16	74.00	-29.84	58.71	35.82	11.69	62.06	0.00	---	---	PEAK																																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	4874.00	45.00	74.00	-29.00	63.20	34.05	9.52	61.77	0.00	---	---	PEAK																																																																																																																																
2	7311.00	44.12	74.00	-29.88	58.67	35.82	11.69	62.06	0.00	---	---	PEAK																																																																																																																																

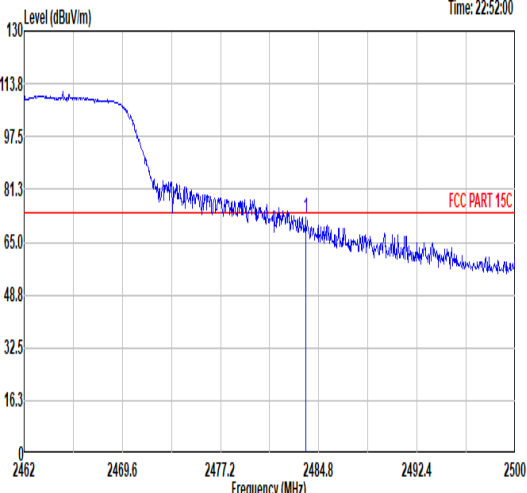
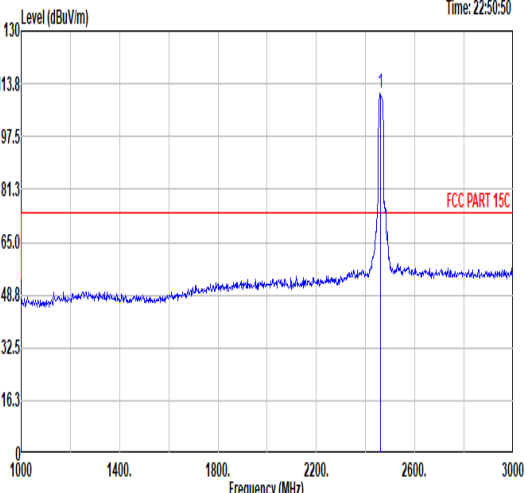
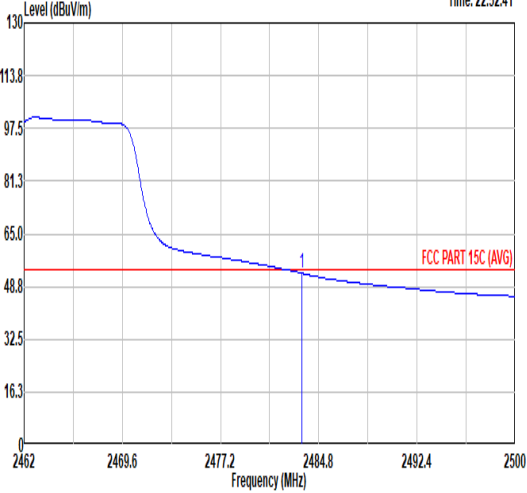
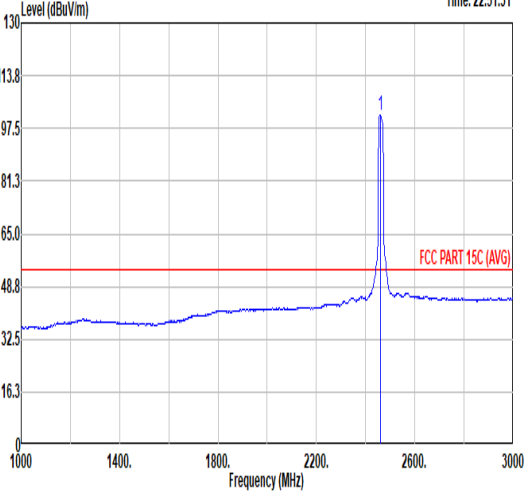


Mode	6																																																																																												
	Band Edge																																																																																												
	2400-2483.5_802.11g_CH11_2462MHz																																																																																												
Pol.	Horizontal					Fundamental																																																																																							
Peak																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.77</td><td>72.64</td><td>74.00</td><td>-1.36</td><td>60.20</td><td>32.33</td><td>6.73</td><td>32.62</td><td>6.00</td><td>113</td><td>0 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.77	72.64	74.00	-1.36	60.20	32.33	6.73	32.62	6.00	113	0 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>110.81</td><td>-----</td><td>-----</td><td>98.26</td><td>32.54</td><td>6.70</td><td>32.69</td><td>6.00</td><td>113</td><td>0 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2462.00	110.81	-----	-----	98.26	32.54	6.70	32.69	6.00	113
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 2483.77	72.64	74.00	-1.36	60.20	32.33	6.73	32.62	6.00	113	0 PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 2462.00	110.81	-----	-----	98.26	32.54	6.70	32.69	6.00	113	0 PEAK																																																																																			
Avg																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.51</td><td>52.84</td><td>54.00</td><td>-1.16</td><td>40.41</td><td>32.33</td><td>6.73</td><td>32.63</td><td>6.00</td><td>113</td><td>0 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.51	52.84	54.00	-1.16	40.41	32.33	6.73	32.63	6.00	113	0 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>101.57</td><td>-----</td><td>-----</td><td>89.02</td><td>32.54</td><td>6.70</td><td>32.69</td><td>6.00</td><td>113</td><td>0 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2462.00	101.57	-----	-----	89.02	32.54	6.70	32.69	6.00	113
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 2483.51	52.84	54.00	-1.16	40.41	32.33	6.73	32.63	6.00	113	0 AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 2462.00	101.57	-----	-----	89.02	32.54	6.70	32.69	6.00	113	0 AVERAGE																																																																																			

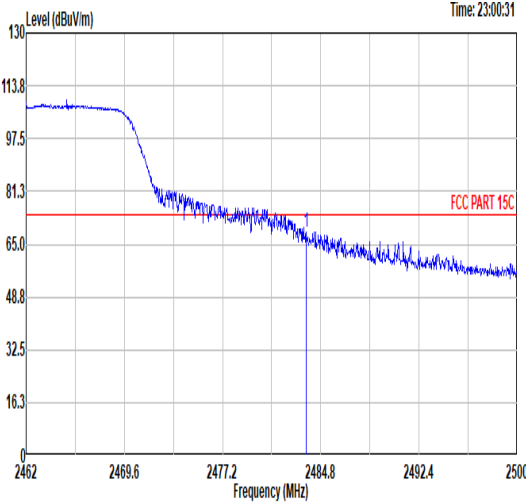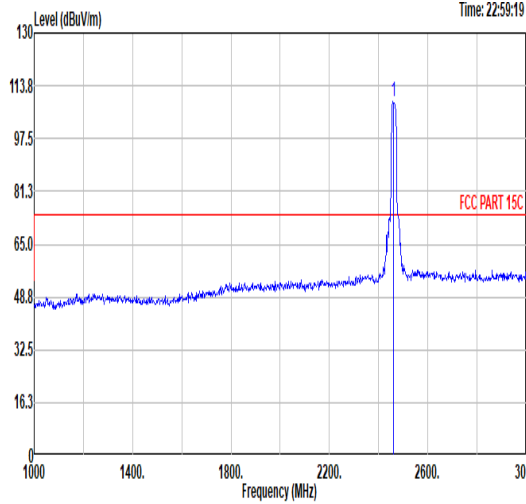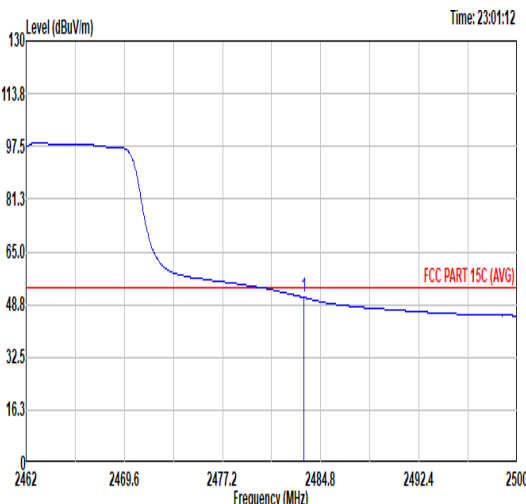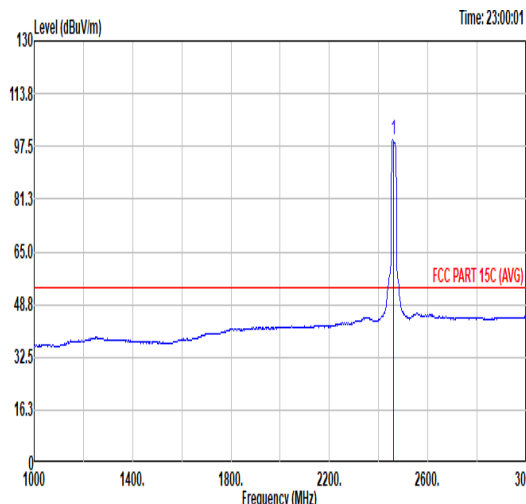

Mode	6																																																																																															
	Band Edge																																																																																															
	2400-2483.5_802.11g_CH11_2462MHz																																																																																															
Pol.	Vertical						Fundamental																																																																																									
Peak																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.66</td><td>68.91</td><td>74.00</td><td>-5.09</td><td>56.48</td><td>32.33</td><td>6.73</td><td>32.63</td><td>6.00</td><td>370</td><td>326 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.66	68.91	74.00	-5.09	56.48	32.33	6.73	32.63	6.00	370	326 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>108.68</td><td>-----</td><td>-----</td><td>96.13</td><td>32.55</td><td>6.70</td><td>32.70</td><td>6.00</td><td>370</td><td>326 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	108.68	-----	-----	96.13	32.55	6.70	32.70	6.00	370
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2483.66	68.91	74.00	-5.09	56.48	32.33	6.73	32.63	6.00	370	326 PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2462.00	108.68	-----	-----	96.13	32.55	6.70	32.70	6.00	370	326 PEAK																																																																																					
Avg																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>50.96</td><td>54.00</td><td>-3.04</td><td>38.53</td><td>32.33</td><td>6.73</td><td>32.63</td><td>6.00</td><td>370</td><td>326 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	50.96	54.00	-3.04	38.53	32.33	6.73	32.63	6.00	370	326 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>99.68</td><td>-----</td><td>-----</td><td>87.13</td><td>32.54</td><td>6.70</td><td>32.69</td><td>6.00</td><td>370</td><td>326 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	99.68	-----	-----	87.13	32.54	6.70	32.69	6.00	370
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2483.51	50.96	54.00	-3.04	38.53	32.33	6.73	32.63	6.00	370	326 AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2462.00	99.68	-----	-----	87.13	32.54	6.70	32.69	6.00	370	326 AVERAGE																																																																																					

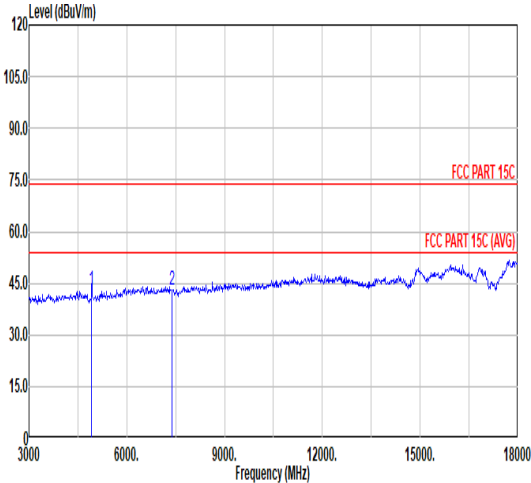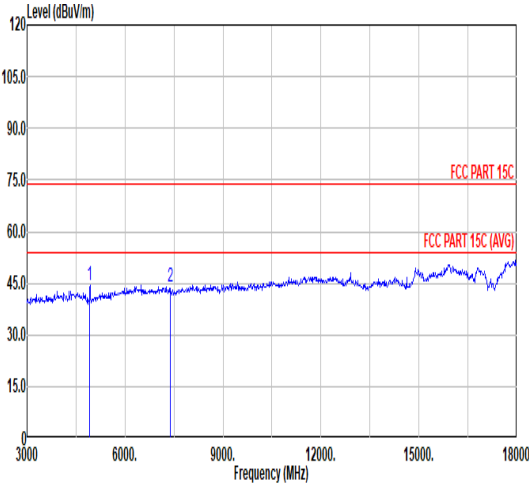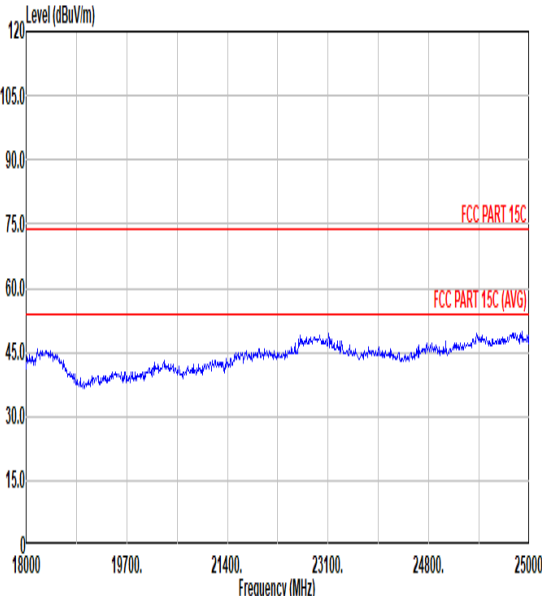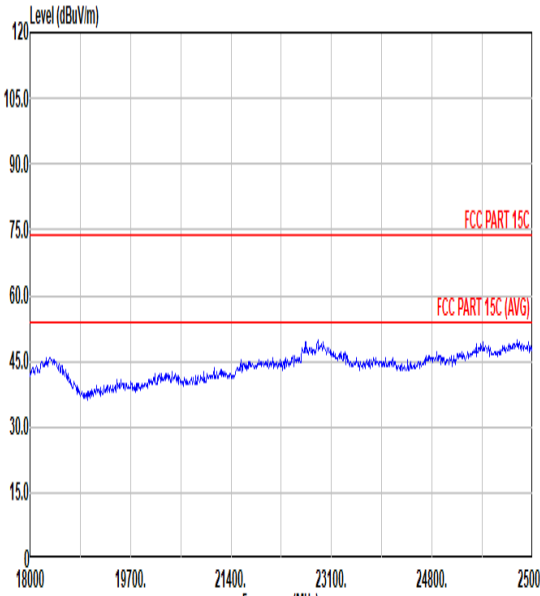

Mode	6																																																																																																																												
	Harmonic																																																																																																																												
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																						
Peak Avg																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>42.97</td><td>74.00</td><td>-31.03</td><td>61.14</td><td>34.00</td><td>9.57</td><td>61.74</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>42.96</td><td>74.00</td><td>-31.04</td><td>57.33</td><td>35.97</td><td>11.72</td><td>62.06</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	42.97	74.00	-31.03	61.14	34.00	9.57	61.74	0.00	---	---	PEAK	2	7386.00	42.96	74.00	-31.04	57.33	35.97	11.72	62.06	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>44.53</td><td>74.00</td><td>-29.47</td><td>62.70</td><td>34.00</td><td>9.57</td><td>61.74</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>43.89</td><td>74.00</td><td>-30.11</td><td>58.26</td><td>35.97</td><td>11.72</td><td>62.06</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	44.53	74.00	-29.47	62.70	34.00	9.57	61.74	0.00	---	---	PEAK	2	7386.00	43.89	74.00	-30.11	58.26	35.97	11.72	62.06	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																			
1	4924.00	42.97	74.00	-31.03	61.14	34.00	9.57	61.74	0.00	---	---	PEAK																																																																																																																	
2	7386.00	42.96	74.00	-31.04	57.33	35.97	11.72	62.06	0.00	---	---	PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																			
1	4924.00	44.53	74.00	-29.47	62.70	34.00	9.57	61.74	0.00	---	---	PEAK																																																																																																																	
2	7386.00	43.89	74.00	-30.11	58.26	35.97	11.72	62.06	0.00	---	---	PEAK																																																																																																																	
Peak Avg																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>42.97</td><td>74.00</td><td>-31.03</td><td>61.14</td><td>34.00</td><td>9.57</td><td>61.74</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>42.96</td><td>74.00</td><td>-31.04</td><td>57.33</td><td>35.97</td><td>11.72</td><td>62.06</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	42.97	74.00	-31.03	61.14	34.00	9.57	61.74	0.00	---	---	PEAK	2	7386.00	42.96	74.00	-31.04	57.33	35.97	11.72	62.06	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>44.53</td><td>74.00</td><td>-29.47</td><td>62.70</td><td>34.00</td><td>9.57</td><td>61.74</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>43.89</td><td>74.00</td><td>-30.11</td><td>58.26</td><td>35.97</td><td>11.72</td><td>62.06</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	44.53	74.00	-29.47	62.70	34.00	9.57	61.74	0.00	---	---	PEAK	2	7386.00	43.89	74.00	-30.11	58.26	35.97	11.72	62.06	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																			
1	4924.00	42.97	74.00	-31.03	61.14	34.00	9.57	61.74	0.00	---	---	PEAK																																																																																																																	
2	7386.00	42.96	74.00	-31.04	57.33	35.97	11.72	62.06	0.00	---	---	PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																			
1	4924.00	44.53	74.00	-29.47	62.70	34.00	9.57	61.74	0.00	---	---	PEAK																																																																																																																	
2	7386.00	43.89	74.00	-30.11	58.26	35.97	11.72	62.06	0.00	---	---	PEAK																																																																																																																	

7

Mode

Band Edge

2400-2483.5_802.11n_HT20_CH01_2412MHz

Pol.


Horizontal

Fundamental

Peak

Level (dBuV/m)


Time: 23:11:38

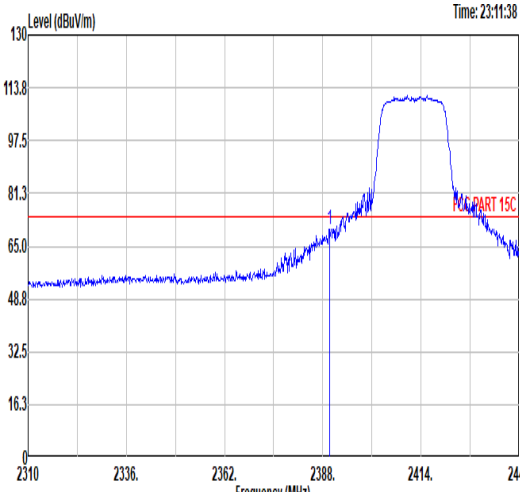

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1 2389.82	69.99	74.00	-4.01	58.13	32.12	6.60	32.86	6.00	150	18 PEAK

Level (dBuV/m)

Time: 23:13:01

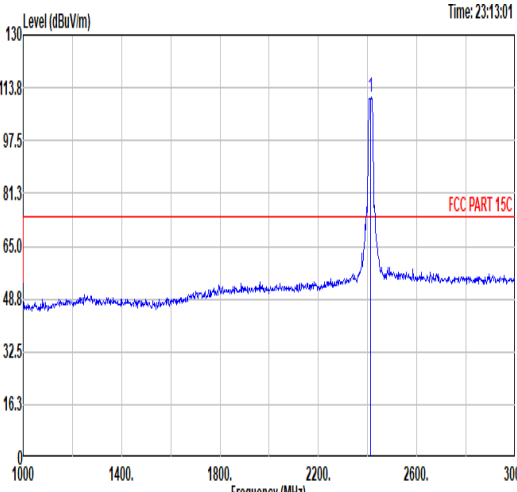


	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1 2412.00	111.05	-----	-----	99.05	32.17	6.64	32.81	6.00	150	18 PEAK

Avg

Level (dBuV/m)


Time: 23:12:30

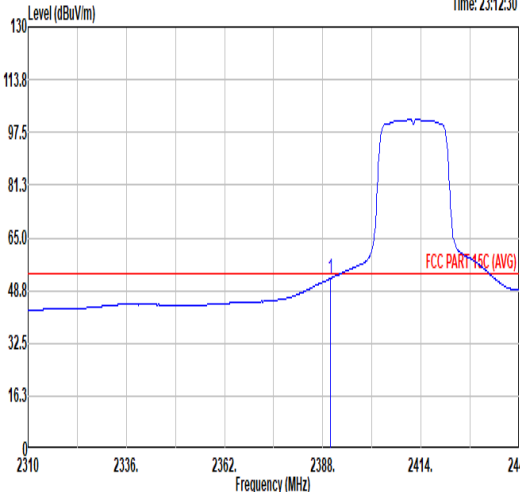

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1 2389.95	52.47	54.00	-1.53	40.61	32.12	6.60	32.86	6.00	150	18 AVERAGE





Level (dBuV/m)

Time: 23:13:42


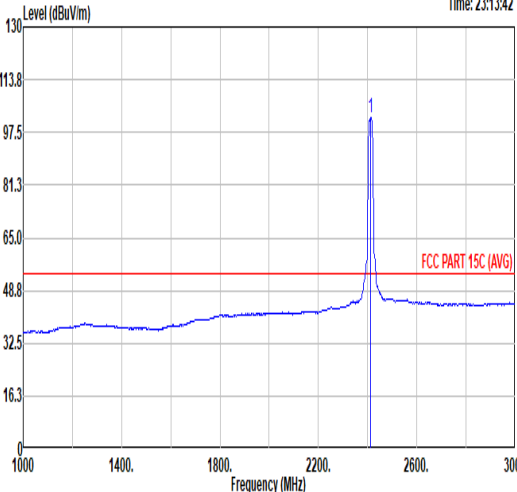


	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1 2412.00	101.88	-----	-----	89.88	32.17	6.64	32.81	6.00	150	18 AVERAGE

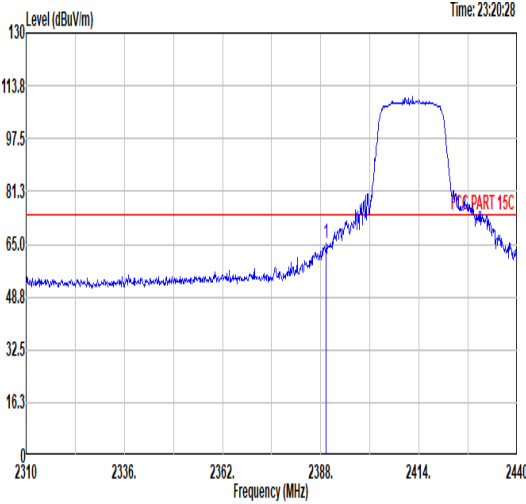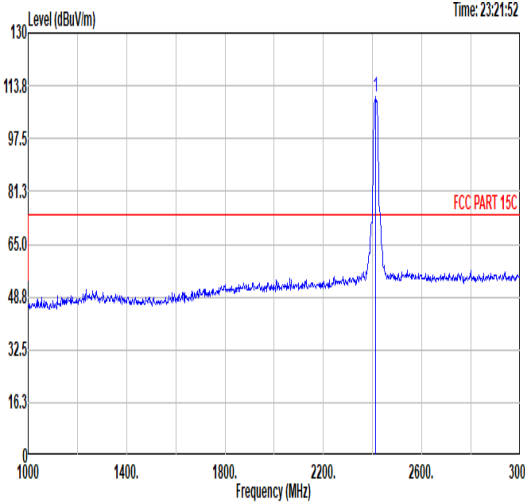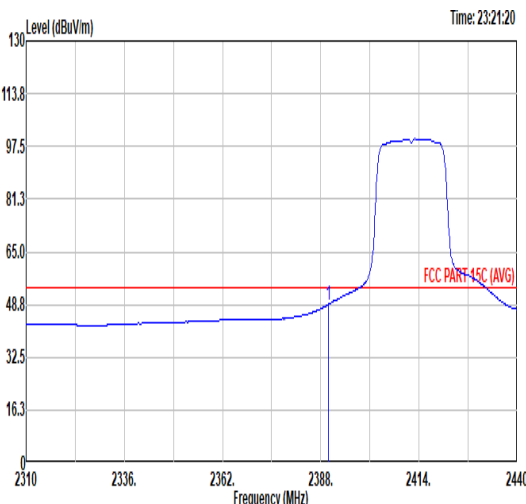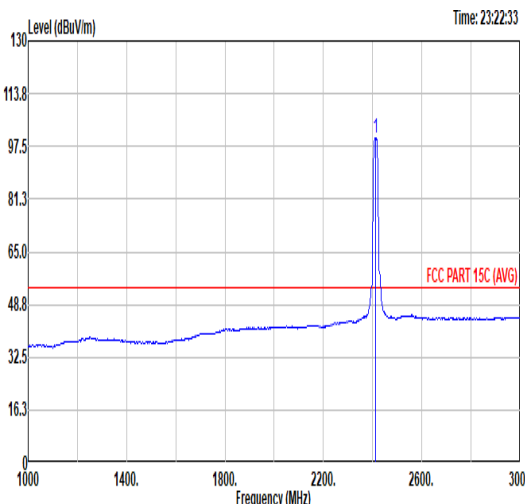

Mode	7																																																						
	Band Edge																																																						
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																						
Pol.	Vertical						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.43</td><td>65.48</td><td>74.00</td><td>-8.52</td><td>53.61</td><td>32.13</td><td>6.60</td><td>32.86</td><td>6.00</td><td>383</td><td>324</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	65.48	74.00	-8.52	53.61	32.13	6.60	32.86	6.00	383	324
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.43	65.48	74.00	-8.52	53.61	32.13	6.60	32.86	6.00	383	324	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>110.56</td><td>-----</td><td>-----</td><td>98.60</td><td>32.14</td><td>6.63</td><td>32.81</td><td>6.00</td><td>383</td><td>324</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	110.56	-----	-----	98.60	32.14	6.63	32.81	6.00	383	324
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	110.56	-----	-----	98.60	32.14	6.63	32.81	6.00	383	324	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>48.73</td><td>54.00</td><td>-5.27</td><td>36.87</td><td>32.12</td><td>6.60</td><td>32.86</td><td>6.00</td><td>383</td><td>324</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	48.73	54.00	-5.27	36.87	32.12	6.60	32.86	6.00	383	324
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.95	48.73	54.00	-5.27	36.87	32.12	6.60	32.86	6.00	383	324	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>100.00</td><td>-----</td><td>-----</td><td>88.04</td><td>32.14</td><td>6.63</td><td>32.81</td><td>6.00</td><td>383</td><td>324</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.00	-----	-----	88.04	32.14	6.63	32.81	6.00	383	324
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	100.00	-----	-----	88.04	32.14	6.63	32.81	6.00	383	324	AVERAGE																																											



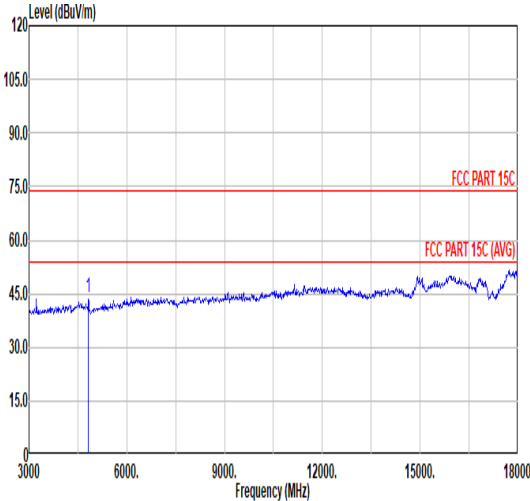
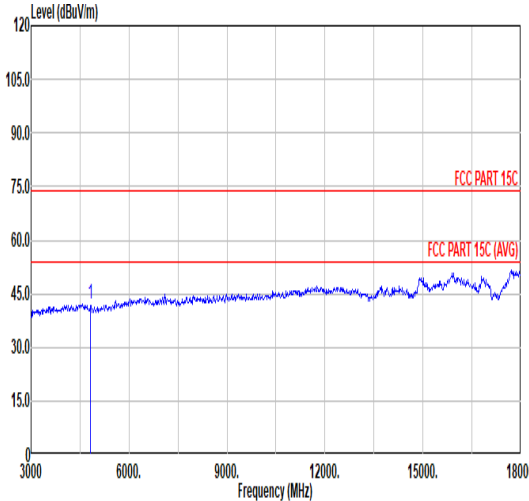


		7																																																																																																											
Mode		Harmonic																																																																																																											
		2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																											
Pol.		Horizontal										Vertical																																																																																																	
Peak Avg																																																																																																													
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>43.73</td><td>74.00</td><td>-30.27</td><td>61.92</td><td>34.15</td><td>9.47</td><td>61.81</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	43.73	74.00	-30.27	61.92	34.15	9.47	61.81	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>42.24</td><td>74.00</td><td>-31.76</td><td>60.43</td><td>34.15</td><td>9.47</td><td>61.81</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	42.24	74.00	-31.76	60.43	34.15	9.47	61.81	0.00	---	---	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	4824.00	43.73	74.00	-30.27	61.92	34.15	9.47	61.81	0.00	---	---	PEAK																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	4824.00	42.24	74.00	-31.76	60.43	34.15	9.47	61.81	0.00	---	---	PEAK																																																																																																	



Mode	8																																																																																																																																																						
	Harmonic																																																																																																																																																						
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																																																																																						
Pol.	Horizontal											Vertical																																																																																																																																											
Peak Avg																																																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>44.93</td><td>74.00</td><td>-29.07</td><td>63.13</td><td>34.05</td><td>9.52</td><td>61.77</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>42.76</td><td>74.00</td><td>-31.24</td><td>57.31</td><td>35.82</td><td>11.69</td><td>62.06</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	44.93	74.00	-29.07	63.13	34.05	9.52	61.77	0.00	---	---	PEAK	2	7311.00	42.76	74.00	-31.24	57.31	35.82	11.69	62.06	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>44.33</td><td>74.00</td><td>-29.67</td><td>62.53</td><td>34.05</td><td>9.52</td><td>61.77</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>43.27</td><td>74.00</td><td>-30.73</td><td>57.82</td><td>35.82</td><td>11.69</td><td>62.06</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	44.33	74.00	-29.67	62.53	34.05	9.52	61.77	0.00	---	---	PEAK	2	7311.00	43.27	74.00	-30.73	57.82	35.82	11.69	62.06	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																												
1	4874.00	44.93	74.00	-29.07	63.13	34.05	9.52	61.77	0.00	---	---	PEAK																																																																																																																																											
2	7311.00	42.76	74.00	-31.24	57.31	35.82	11.69	62.06	0.00	---	---	PEAK																																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																												
1	4874.00	44.33	74.00	-29.67	62.53	34.05	9.52	61.77	0.00	---	---	PEAK																																																																																																																																											
2	7311.00	43.27	74.00	-30.73	57.82	35.82	11.69	62.06	0.00	---	---	PEAK																																																																																																																																											

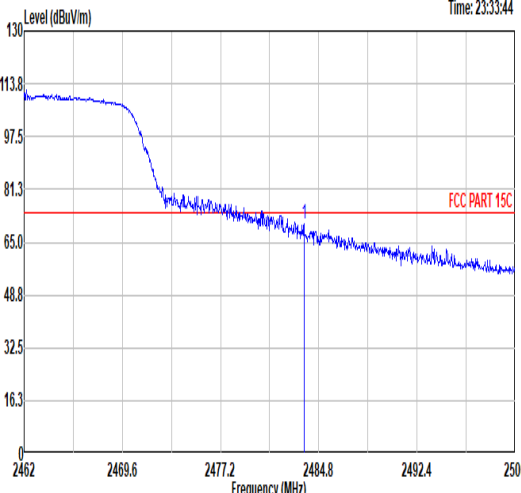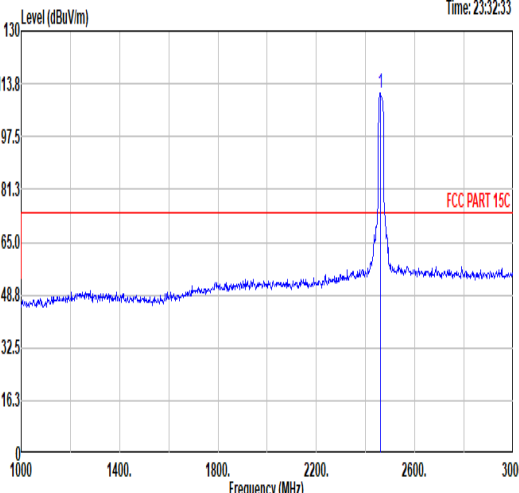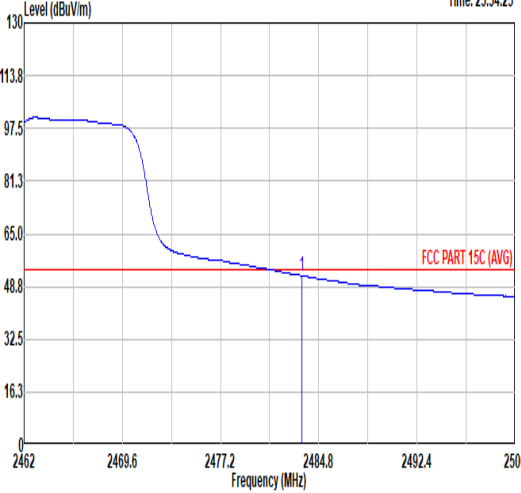
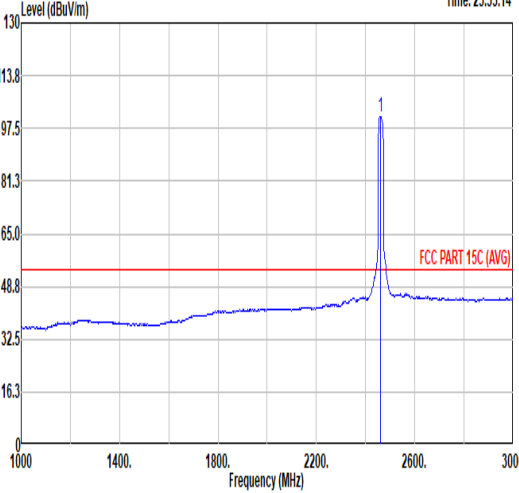


Mode	9																																																																																												
	Band Edge																																																																																												
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																												
Pol.	Horizontal					Fundamental																																																																																							
Peak																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.66</td><td>70.42</td><td>74.00</td><td>-3.58</td><td>57.99</td><td>32.33</td><td>6.73</td><td>32.63</td><td>6.00</td><td>115</td><td>0 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.66	70.42	74.00	-3.58	57.99	32.33	6.73	32.63	6.00	115	0 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>111.06</td><td>-----</td><td>-----</td><td>98.54</td><td>32.50</td><td>6.70</td><td>32.68</td><td>6.00</td><td>115</td><td>0 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2462.00	111.06	-----	-----	98.54	32.50	6.70	32.68	6.00	115
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 2483.66	70.42	74.00	-3.58	57.99	32.33	6.73	32.63	6.00	115	0 PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 2462.00	111.06	-----	-----	98.54	32.50	6.70	32.68	6.00	115	0 PEAK																																																																																			
Avg																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.51</td><td>52.12</td><td>54.00</td><td>-1.88</td><td>39.69</td><td>32.33</td><td>6.73</td><td>32.63</td><td>6.00</td><td>115</td><td>0 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.51	52.12	54.00	-1.88	39.69	32.33	6.73	32.63	6.00	115	0 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>101.22</td><td>-----</td><td>-----</td><td>88.70</td><td>32.50</td><td>6.70</td><td>32.68</td><td>6.00</td><td>115</td><td>0 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2462.00	101.22	-----	-----	88.70	32.50	6.70	32.68	6.00	115
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 2483.51	52.12	54.00	-1.88	39.69	32.33	6.73	32.63	6.00	115	0 AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 2462.00	101.22	-----	-----	88.70	32.50	6.70	32.68	6.00	115	0 AVERAGE																																																																																			





Mode	9																																																																																								
	Band Edge																																																																																								
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak	Time: 23:42:14					Time: 23:41:03																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2484.19</td><td>68.42</td><td>74.00</td><td>-5.58</td><td>55.98</td><td>32.33</td><td>6.73</td><td>32.62</td><td>6.00</td><td>370 327 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2484.19	68.42	74.00	-5.58	55.98	32.33	6.73	32.62	6.00	370 327 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>108.66</td><td>-----</td><td>-----</td><td>96.11</td><td>32.54</td><td>6.70</td><td>32.69</td><td>6.00</td><td>370 327 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2462.00	108.66	-----	-----	96.11	32.54	6.70	32.69	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																
1 2484.19	68.42	74.00	-5.58	55.98	32.33	6.73	32.62	6.00	370 327 PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																
1 2462.00	108.66	-----	-----	96.11	32.54	6.70	32.69	6.00	370 327 PEAK																																																																																
Avg	Time: 23:42:56					Time: 23:41:45																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2483.51</td><td>50.72</td><td>54.00</td><td>-3.28</td><td>38.29</td><td>32.33</td><td>6.73</td><td>32.63</td><td>6.00</td><td>370 327 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2483.51	50.72	54.00	-3.28	38.29	32.33	6.73	32.63	6.00	370 327 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>99.23</td><td>-----</td><td>-----</td><td>86.68</td><td>32.54</td><td>6.70</td><td>32.69</td><td>6.00</td><td>370 327 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2462.00	99.23	-----	-----	86.68	32.54	6.70	32.69	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																
1 2483.51	50.72	54.00	-3.28	38.29	32.33	6.73	32.63	6.00	370 327 AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																
1 2462.00	99.23	-----	-----	86.68	32.54	6.70	32.69	6.00	370 327 AVERAGE																																																																																

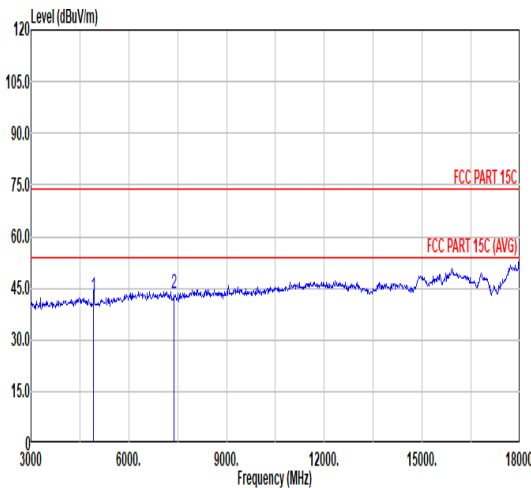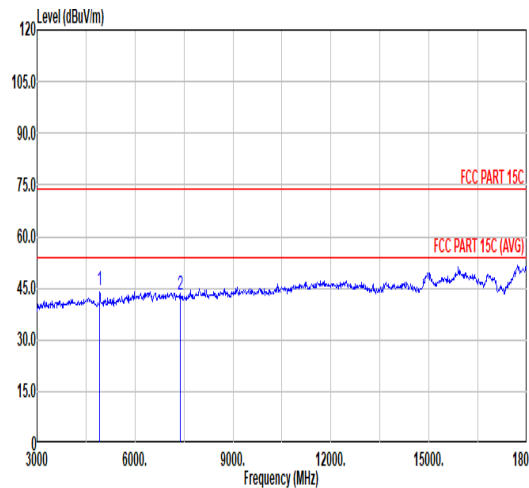

Mode	9																																																																																																																																										
	Harmonic																																																																																																																																										
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																																										
Pol.	Horizontal											Vertical																																																																																																																															
Peak Avg																																																																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>42.43</td><td>74.00</td><td>-31.57</td><td>60.60</td><td>34.00</td><td>9.57</td><td>61.74</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>43.45</td><td>74.00</td><td>-30.55</td><td>57.82</td><td>35.97</td><td>11.72</td><td>62.06</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	42.43	74.00	-31.57	60.60	34.00	9.57	61.74	0.00	---	---	PEAK	2	7386.00	43.45	74.00	-30.55	57.82	35.97	11.72	62.06	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>44.15</td><td>74.00</td><td>-29.85</td><td>62.32</td><td>34.00</td><td>9.57</td><td>61.74</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>42.82</td><td>74.00</td><td>-31.18</td><td>57.19</td><td>35.97</td><td>11.72</td><td>62.06</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	44.15	74.00	-29.85	62.32	34.00	9.57	61.74	0.00	---	---	PEAK	2	7386.00	42.82	74.00	-31.18	57.19	35.97	11.72	62.06	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	4924.00	42.43	74.00	-31.57	60.60	34.00	9.57	61.74	0.00	---	---	PEAK																																																																																																																															
2	7386.00	43.45	74.00	-30.55	57.82	35.97	11.72	62.06	0.00	---	---	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	4924.00	44.15	74.00	-29.85	62.32	34.00	9.57	61.74	0.00	---	---	PEAK																																																																																																																															
2	7386.00	42.82	74.00	-31.18	57.19	35.97	11.72	62.06	0.00	---	---	PEAK																																																																																																																															

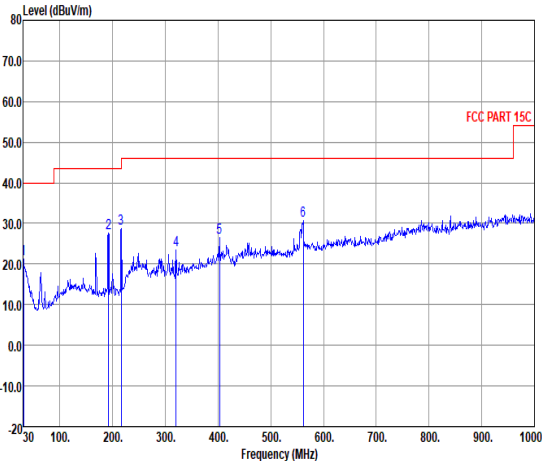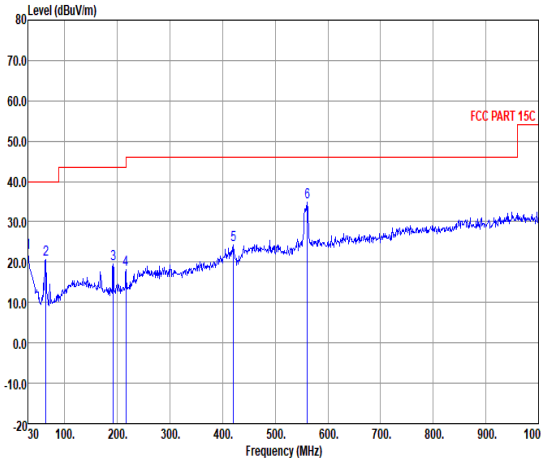


Mode	10																																																																																																											
	LF																																																																																																											
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																											
Pol.	Horizontal																																																																																																											
Peak Avg																																																																																																												
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>Read</th><th>Cable</th><th>Antenna</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.97</td><td>21.33</td><td>-18.67</td><td>40.00</td><td>28.60</td><td>0.46</td><td>24.57</td><td>32.30</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>191.99</td><td>27.69</td><td>-15.81</td><td>43.50</td><td>43.13</td><td>1.87</td><td>14.86</td><td>32.17</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>216.24</td><td>28.78</td><td>-17.22</td><td>46.00</td><td>43.70</td><td>1.99</td><td>15.26</td><td>32.17</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>320.03</td><td>23.54</td><td>-22.46</td><td>46.00</td><td>33.72</td><td>2.41</td><td>19.60</td><td>32.19</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>402.48</td><td>26.63</td><td>-19.37</td><td>46.00</td><td>34.21</td><td>2.71</td><td>21.97</td><td>32.26</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>561.56</td><td>30.75</td><td>-15.25</td><td>46.00</td><td>34.53</td><td>3.20</td><td>25.49</td><td>32.47</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Freq	Level	Over	Limit	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	dB	cm	deg		1	30.97	21.33	-18.67	40.00	28.60	0.46	24.57	32.30	---	---	Peak	2	191.99	27.69	-15.81	43.50	43.13	1.87	14.86	32.17	---	---	Peak	3	216.24	28.78	-17.22	46.00	43.70	1.99	15.26	32.17	---	---	Peak	4	320.03	23.54	-22.46	46.00	33.72	2.41	19.60	32.19	---	---	Peak	5	402.48	26.63	-19.37	46.00	34.21	2.71	21.97	32.26	---	---	Peak	6	561.56	30.75	-15.25	46.00	34.53	3.20	25.49	32.47	---	---	Peak
		Freq	Level	Over	Limit	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark																																																																																																
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	dB	cm	deg																																																																																																	
	1	30.97	21.33	-18.67	40.00	28.60	0.46	24.57	32.30	---	---	Peak																																																																																																
	2	191.99	27.69	-15.81	43.50	43.13	1.87	14.86	32.17	---	---	Peak																																																																																																
	3	216.24	28.78	-17.22	46.00	43.70	1.99	15.26	32.17	---	---	Peak																																																																																																
	4	320.03	23.54	-22.46	46.00	33.72	2.41	19.60	32.19	---	---	Peak																																																																																																
	5	402.48	26.63	-19.37	46.00	34.21	2.71	21.97	32.26	---	---	Peak																																																																																																
	6	561.56	30.75	-15.25	46.00	34.53	3.20	25.49	32.47	---	---	Peak																																																																																																
Vertical																																																																																																												
																																																																																																												
<table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>Read</th><th>Cable</th><th>Antenna</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>22.39</td><td>-17.61</td><td>40.00</td><td>29.13</td><td>0.45</td><td>25.10</td><td>32.29</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>63.95</td><td>20.69</td><td>-19.31</td><td>40.00</td><td>40.11</td><td>0.88</td><td>12.14</td><td>32.44</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>191.99</td><td>19.68</td><td>-23.82</td><td>43.50</td><td>35.12</td><td>1.87</td><td>14.86</td><td>32.17</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>216.24</td><td>18.13</td><td>-27.87</td><td>46.00</td><td>33.05</td><td>1.99</td><td>15.26</td><td>32.17</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>420.91</td><td>24.19</td><td>-21.81</td><td>46.00</td><td>31.37</td><td>2.77</td><td>22.41</td><td>32.36</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>560.59</td><td>34.78</td><td>-11.22</td><td>46.00</td><td>38.58</td><td>3.19</td><td>25.48</td><td>32.47</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Freq	Level	Over	Limit	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	dB	cm	deg		1	30.00	22.39	-17.61	40.00	29.13	0.45	25.10	32.29	---	---	Peak	2	63.95	20.69	-19.31	40.00	40.11	0.88	12.14	32.44	---	---	Peak	3	191.99	19.68	-23.82	43.50	35.12	1.87	14.86	32.17	---	---	Peak	4	216.24	18.13	-27.87	46.00	33.05	1.99	15.26	32.17	---	---	Peak	5	420.91	24.19	-21.81	46.00	31.37	2.77	22.41	32.36	---	---	Peak	6	560.59	34.78	-11.22	46.00	38.58	3.19	25.48	32.47	---	---	Peak	
	Freq	Level	Over	Limit	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark																																																																																																	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	dB	cm	deg																																																																																																		
1	30.00	22.39	-17.61	40.00	29.13	0.45	25.10	32.29	---	---	Peak																																																																																																	
2	63.95	20.69	-19.31	40.00	40.11	0.88	12.14	32.44	---	---	Peak																																																																																																	
3	191.99	19.68	-23.82	43.50	35.12	1.87	14.86	32.17	---	---	Peak																																																																																																	
4	216.24	18.13	-27.87	46.00	33.05	1.99	15.26	32.17	---	---	Peak																																																																																																	
5	420.91	24.19	-21.81	46.00	31.37	2.77	22.41	32.36	---	---	Peak																																																																																																	
6	560.59	34.78	-11.22	46.00	38.58	3.19	25.48	32.47	---	---	Peak																																																																																																	

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	100	-	-	10Hz
802.11n HT20	100	-	-	10Hz

802.11b

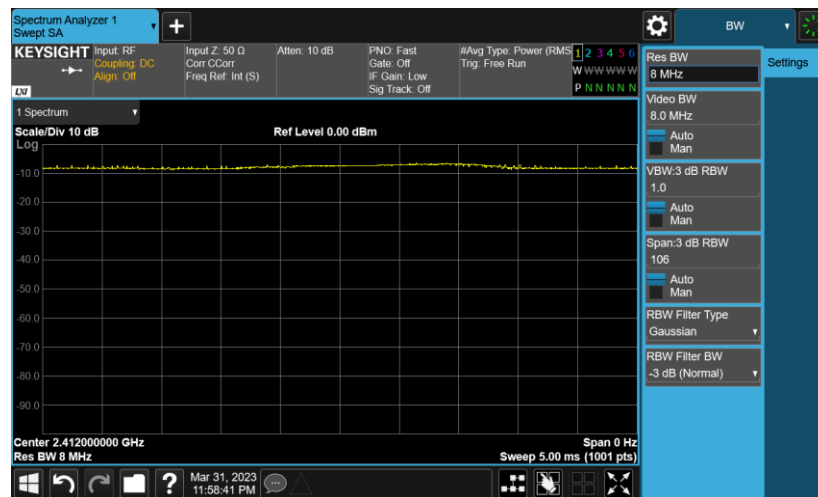



802.11g

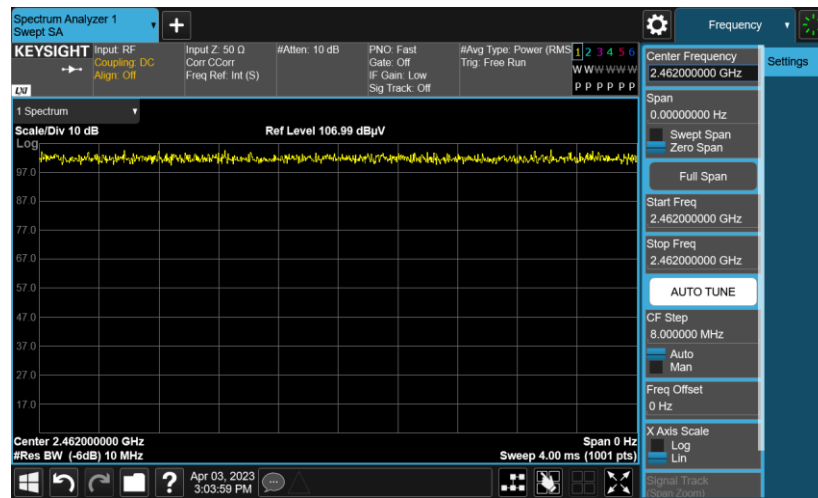

802.11n HT20

