

FCC PART 15.407

TEST REPORT

For

Shanghai ZoomSmart Technology Co., Ltd

Room 802 Hengxi Road No.809 Pujiang Town Minhang district, Shanghai, 201114 China

FCC ID: 2AUFL-LT702

Report Type: Original Report	Product Type: Rugged Tablet
Project Engineer:	Jack Jiao <i>Jack Jiao</i>
Report Number:	RSKD200817001-00D
Report Date:	2020-11-26
Reviewed By:	Oscar Ye EMC Manager <i>Oscar Ye</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	12
SUPPORT EQUIPMENT LIST AND DETAILS	12
EXTERNAL I/O CABLE.....	12
BLOCK DIAGRAM OF TEST SETUP	13
SUMMARY OF TEST RESULTS	15
TEST EQUIPMENT LIST	16
FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION	17
TEST RESULT	17
FCC §15.203 – ANTENNA REQUIREMENT.....	18
APPLICABLE STANDARD	18
ANTENNA CONNECTOR CONSTRUCTION	18
FCC §15.407 (b) (8) §15.207 (a) – AC POWER LINE CONDUCTED EMISSIONS.....	19
APPLICABLE STANDARD	19
EUT SETUP	19
EMI TEST RECEIVER SETUP.....	19
TEST PROCEDURE	20
CORRECTED FACTOR & OVER LIMIT CALCULATION.....	20
TEST RESULTS SUMMARY	20
TEST DATA	20
§15.205 & §15.209 & §15.407(B) (1), (4), (8),(9) – UNDESIRABLE EMISSION & RESTRICTED BANDS.....	25
APPLICABLE STANDARD	25
EUT SETUP.....	25
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	26
TEST PROCEDURE	26
CORRECTED AMPLITUDE & MARGIN CALCULATION	27
TEST DATA	27
FCC §15.407(a) & §15.407(e)–EMISSION BANDWIDTH.....	65
APPLICABLE STANDARD	65
TEST PROCEDURE	65
TEST DATA	66
FCC §15.407(a) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER	89
APPLICABLE STANDARD	89
TEST PROCEDURE	89
TEST DATA	90
FCC §15.407(a) (1) (3) - POWER SPECTRAL DENSITY	92
APPLICABLE STANDARD	92
TEST PROCEDURE	92
TEST DATA	92

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Shanghai ZoomSmart Technology Co., Ltd
Tested Model	LT702
Product Type	Rugged Tablet
Power Supply	DC 3.8V from battery and DC 5V from adapter
Operating Frequency	5G Wi-Fi B1: 5180-5240 MHz, B4: 5745-5825 MHz
Channel Number	5G Wi-Fi B1: 7, B4: 8
Channel Separation	5G Wi-Fi: a/ac20/n20: 20 MHz, ac40/n40: 40 MHz, ac80: 80 MHz
Modulation Type	OFDM
Antenna Type	FPC Antenna
*Maximum Antenna Gain	-0.24 dBi

Adapter Information:

Model: P12DUSB050200 US

Input: AC 100-240V, 50/60Hz, 0.3A

Output: DC 5.0V, 2.0A

Note: The Maximum Antenna Gain was declared by the manufacturer.

*All measurement and test data in this report was gathered from production sample serial number:

RSHD20200817001-1. (Assigned by the BACL. The EUT supplied by the applicant was received on 2020-08-17)

Objective

This type approval report is prepared on behalf of *Shanghai ZoomSmart Technology Co., Ltd* in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions' rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS Submittal with FCC ID: 2AUFL-LT702

FCC Part 15.247 DTS Submittal with FCC ID: 2AUFL-LT702

FCC Part 15.225 DXX submissions with FCC ID: 2AUFL-LT702

FCC Part 22H24E27 PCB submissions with FCC ID: 2AUFL-LT702

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan).

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0℃
Humidity		6%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01), the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

For **5150~5250 MHz** band, test channel list is as below,

802.11a/ac20/n20 mode Channel 36, 40, 48 were tested.

802.11n40/ac40 mode Channel 38, 46 were tested.

802.11ac80 mode Channel 42 was tested.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For **5725~5850 MHz** band,

802.11a/ac20/n20 mode Channel 149, 157, 165 were tested.

802.11n40/ac40 mode Channel 151, 159 were tested.

802.11ac80 mode Channel 155 was tested.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
155	5775	/	/
157	5785	/	/

EUT Exercise Software

RF test tool: QRCT


The worst case was performed under:

Mode	Data rate	Power level	
		5150-5250 Band	5725-5850 Band
802.11a	6 Mbps	7	7
802.11ac20	MCS0	7	7
802.11n-HT20	MCS0	7	7
802.11ac40	MCS0	7	7
802.11n-HT40	MCS0	7	7
802.11ac80	MCS0	7	7


Duty Cycle

5150MHz-5250MHz Band:


802.11a mode

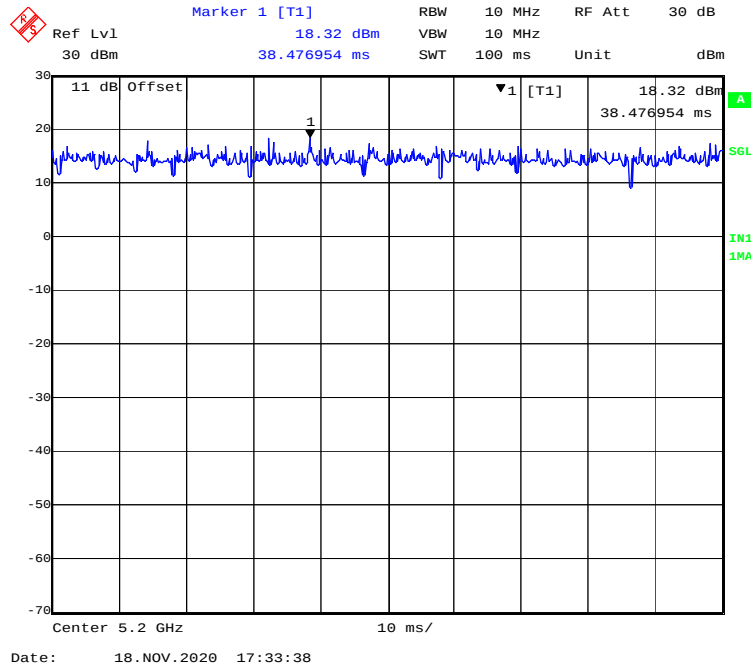


802.11ac20 mode

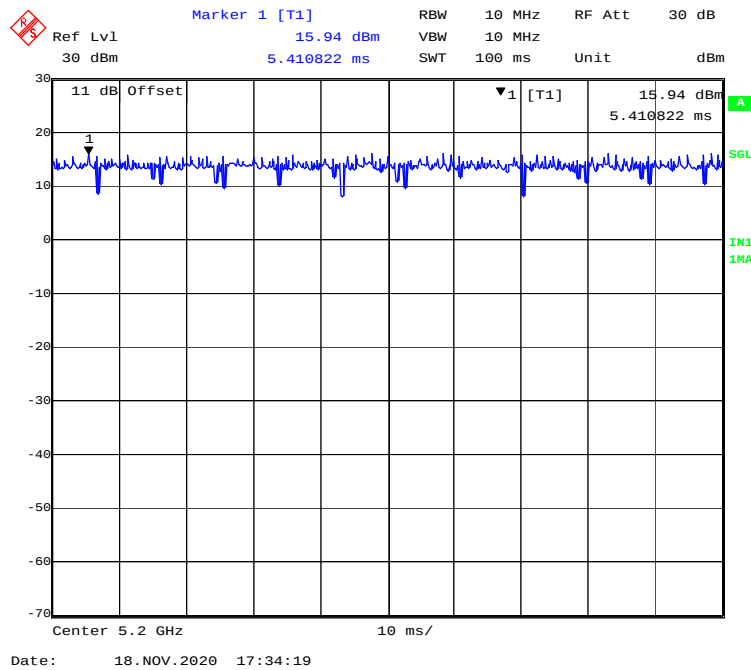


802.11n-HT20 mode

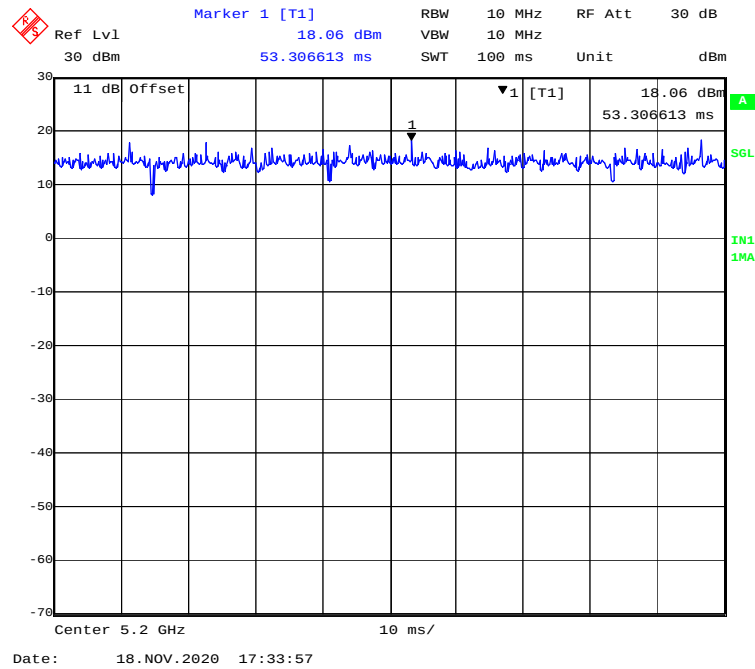


802.11ac40 mode

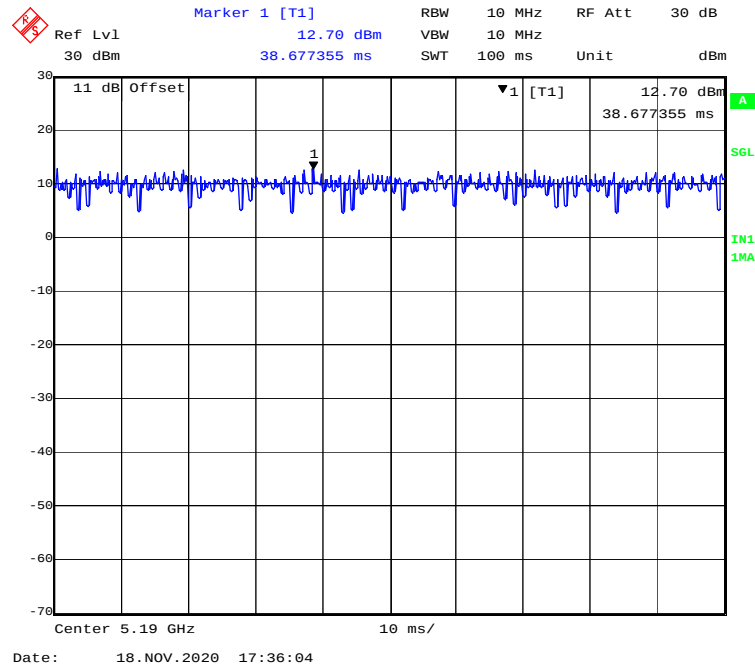

802.11n-HT40 mode

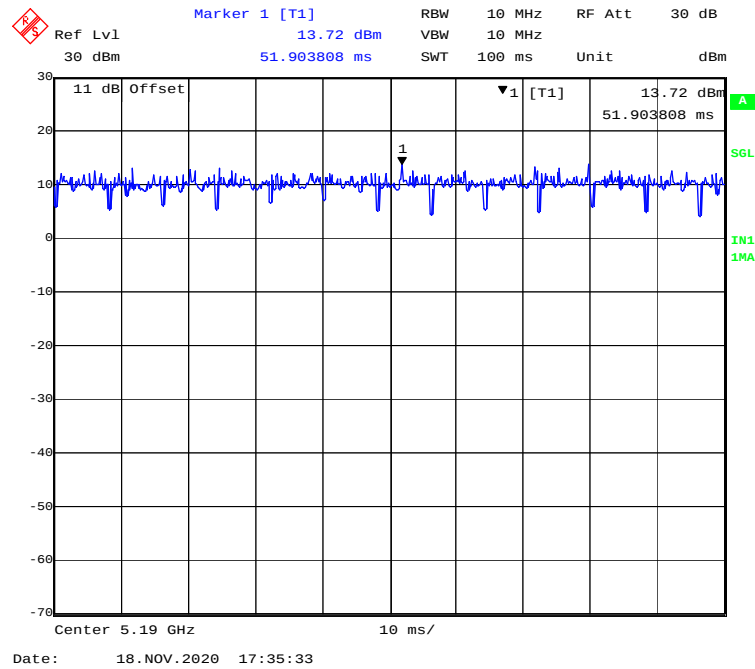


802.11ac80 mode

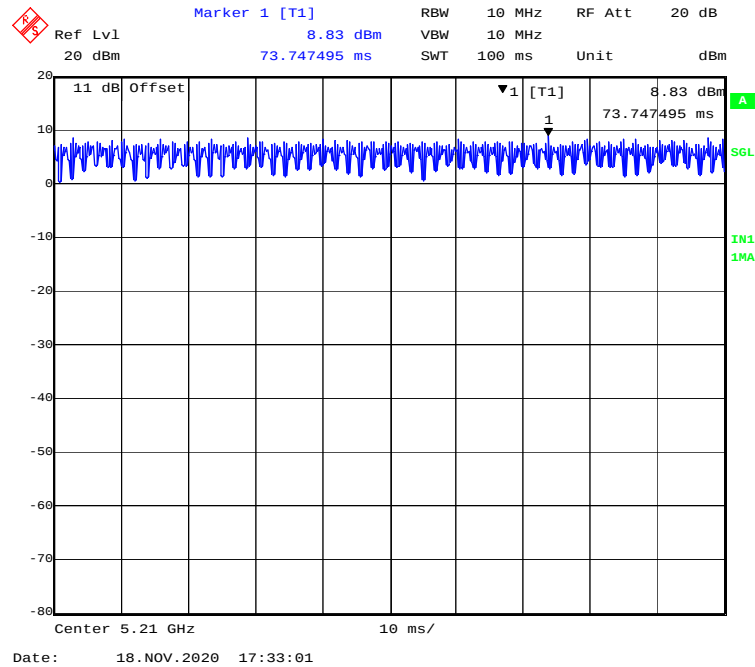


5725MHz-5850MHz Band:


802.11a mode

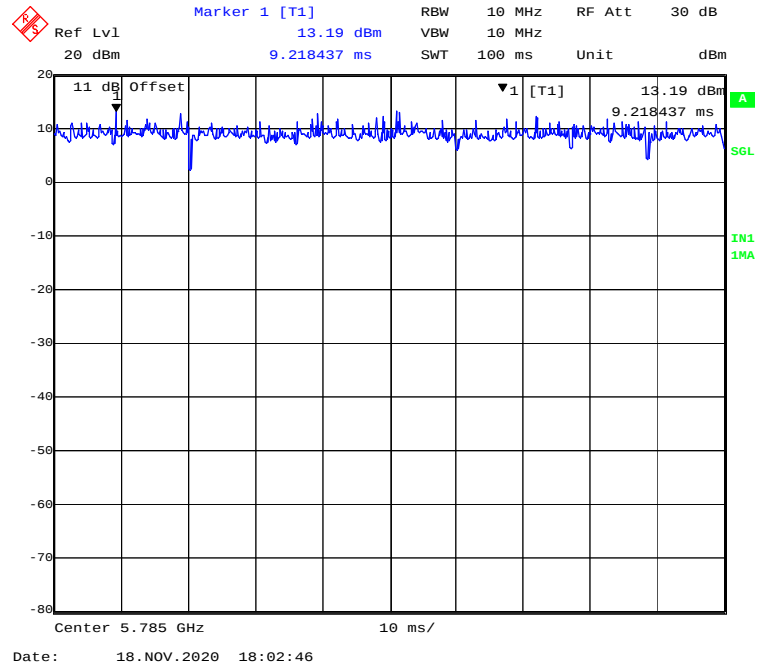


802.11ac20 mode

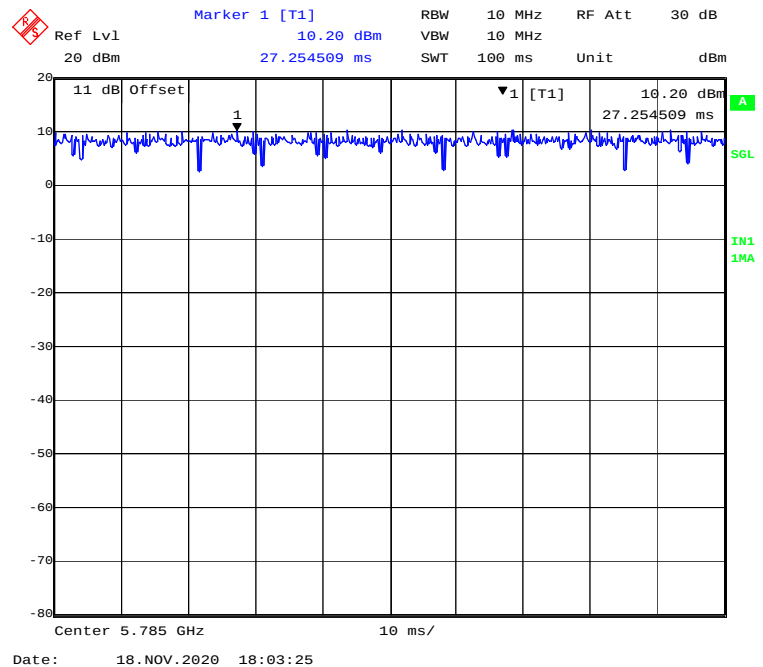


802.11n-HT20 mode

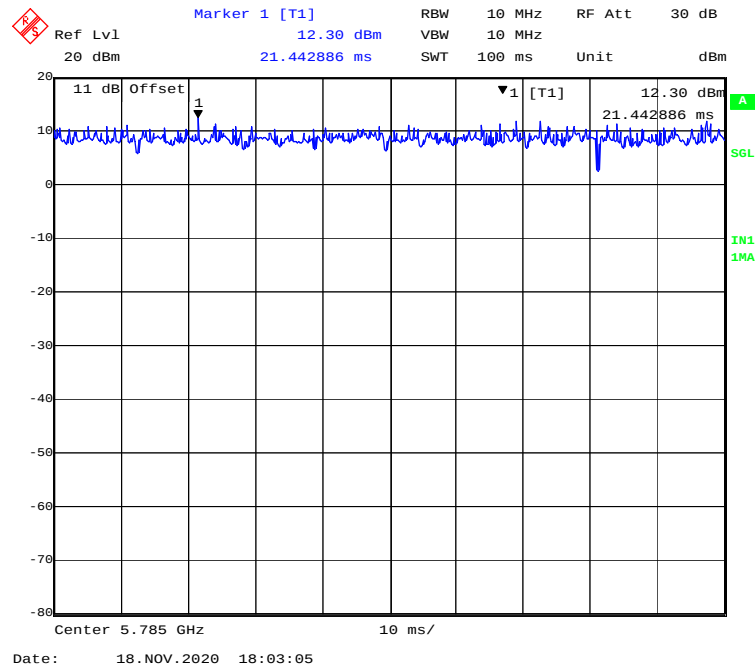


802.11ac40 mode

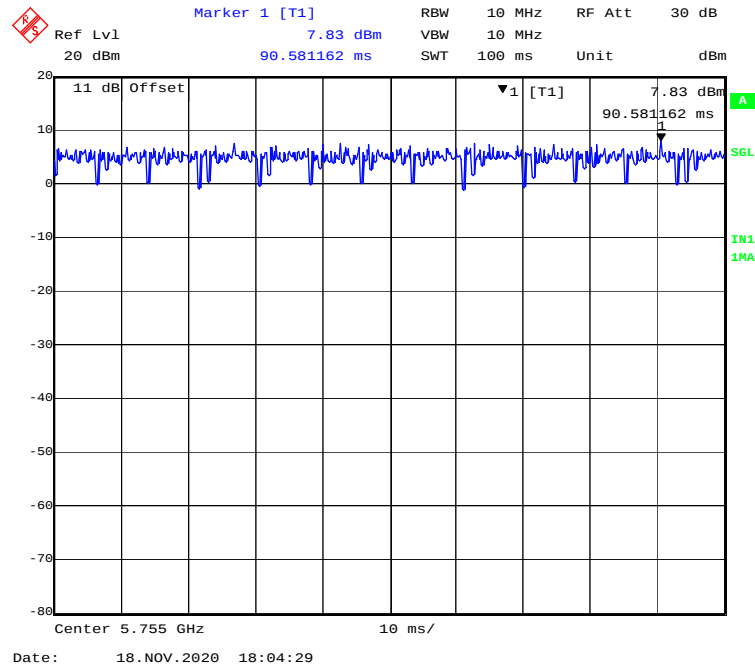

802.11n-HT40 mode

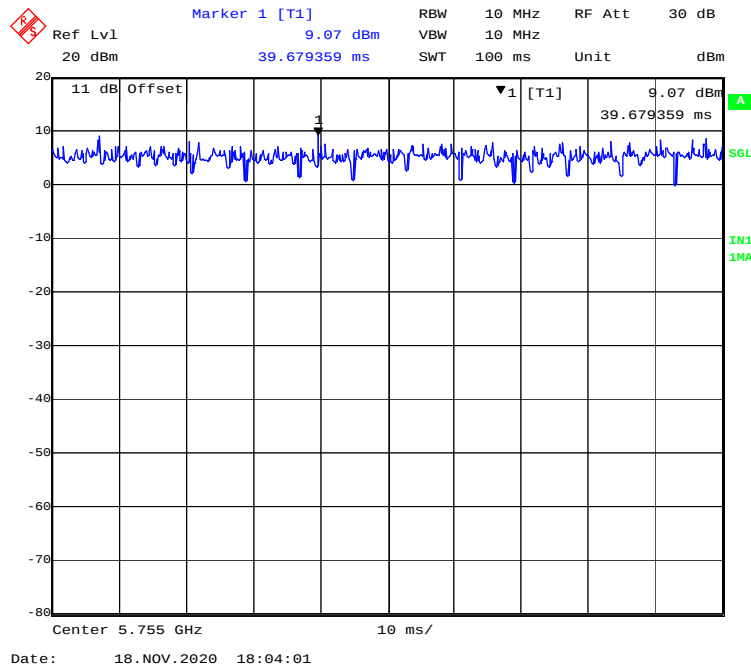

802.11ac80 mode

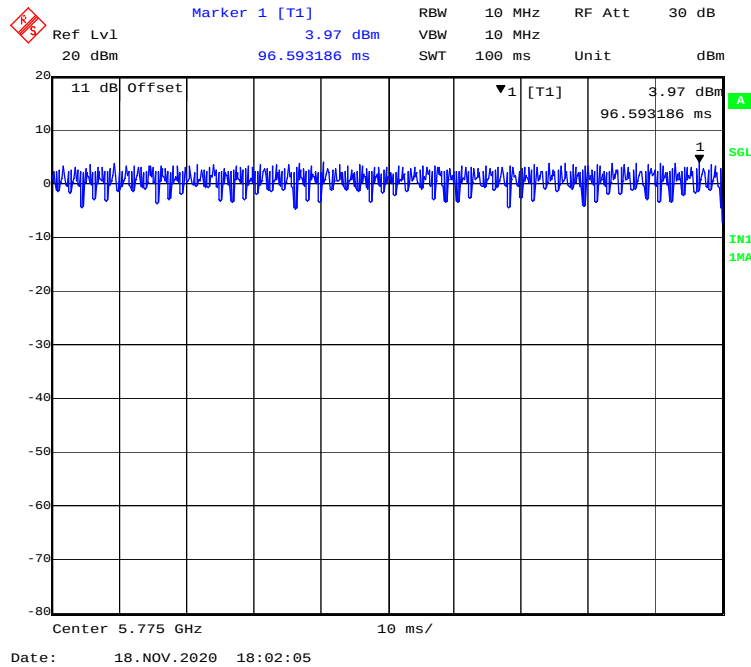

Mode	Frequency Range (MHz)	Duty Cycle (%)	T (ms)	1/T (kHz)	10log(1/x)
802.11a	5150-5250	100	/	/	0
802.11ac20		100	/	/	0
802.11n-HT20		100	/	/	0
802.11ac40		100	/	/	0
802.11n-HT40		100	/	/	0
802.11ac80		100	/	/	0
802.11a	5725-5850	100	/	/	0
802.11ac20		100	/	/	0
802.11n-HT20		100	/	/	0
802.11ac40		100	/	/	0
802.11n-HT40		100	/	/	0
802.11ac80		100	/	/	0

Note: “x” means duty cycle.

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
USB Cable	1.0	EUT	Adapter
Power Cable	1.0	Adapter	LISN/AC Source

Block Diagram of Test Setup


For Conducted Emissions:

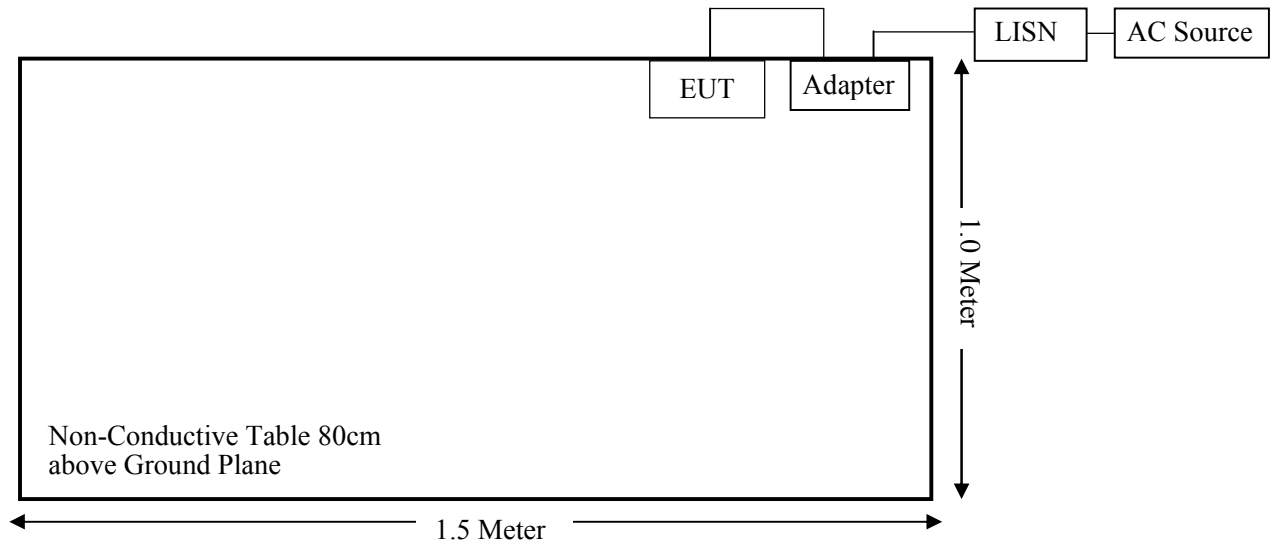

For Radiated Emissions (Below 1GHz):

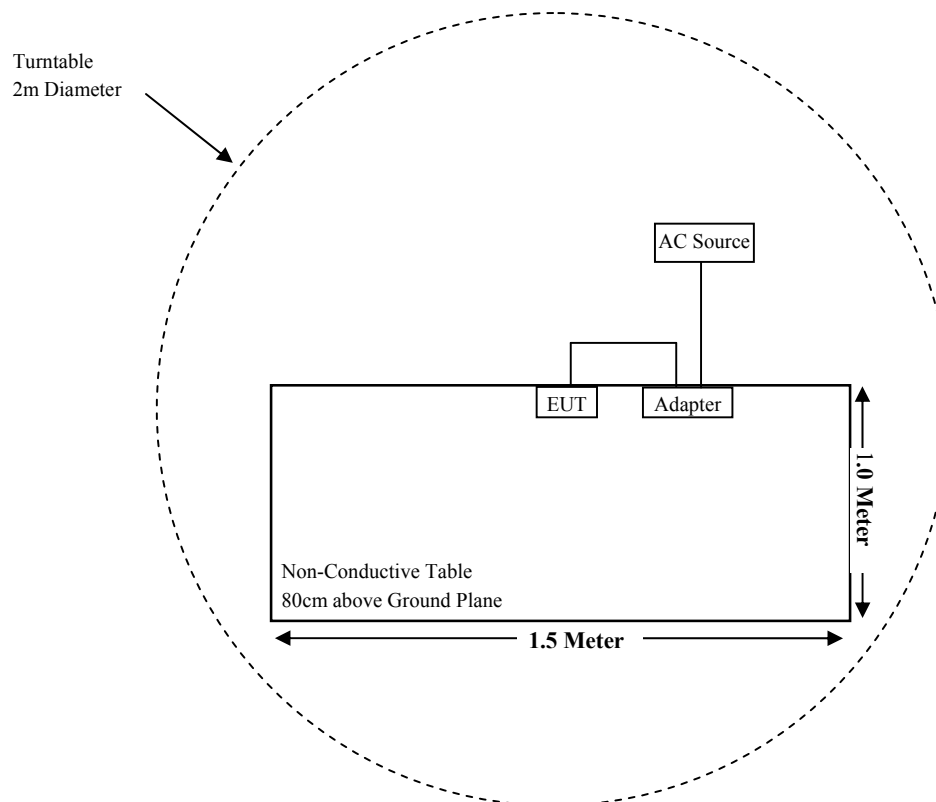

For Radiated Emissions (Above 1GHz):

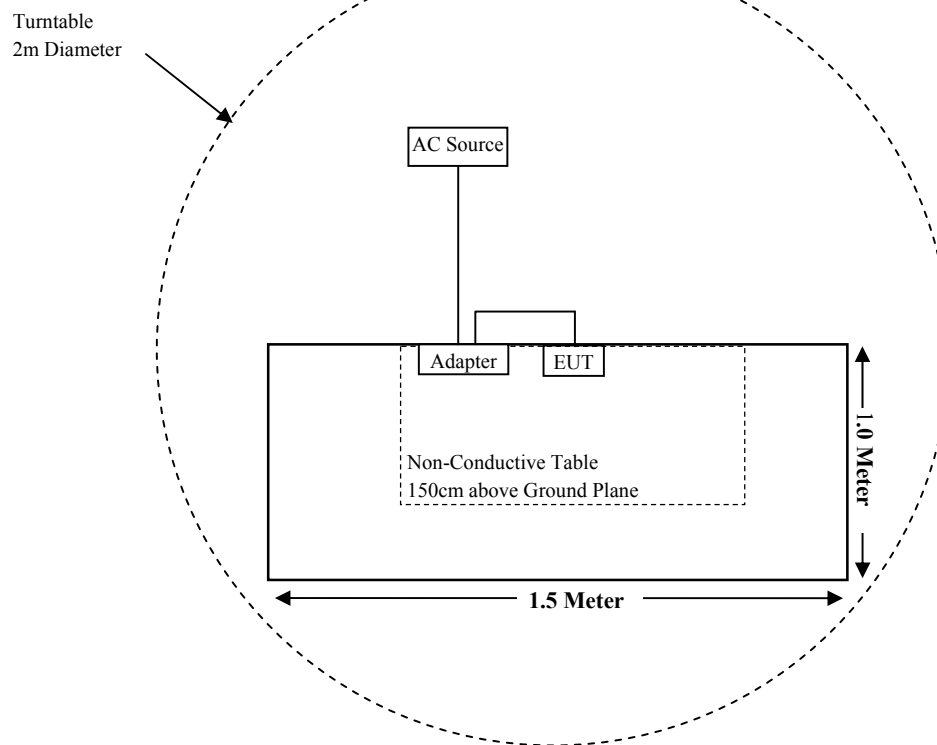

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307(b)(1)& §2.1093	RF Exposure Information	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 & §15.407(b) (8)	AC Power Line Conducted Emissions	Compliant
§ 15.205 & §15.209 & §15.407(b) (1), (4), (8),(9)	Undesirable Emission & Restricted Bands	Compliant
§§15.407(a) &§15.407(e)	Emission Bandwidth	Compliant
§15.407(a) (1) (3)	Conducted Transmitter Output Power	Compliant
§15.407(a) (1) (3)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2019-12-14	2020-12-13
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2017-12-26	2020-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2020-08-14	2021-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2020-08-15	2021-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2020-04-01	2021-03-31
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2020-07-15	2023-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2019-12-12	2022-12-11
A.H.Systems,inc	Amplifier	PAM-0118P	512	2020-02-20	2021-02-19
EM Electronics Corporation	Amplifier	EM18G40G	060726	2020-03-22	2021-03-21
MICRO-TRONICS	Band Reject Filter	BRC50703	G094	2020-08-05	2021-08-04
MICRO-TRONICS	Band Reject Filter	BRC50705	G085	2020-08-05	2021-08-04
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-12-12	2020-12-11
MICRO-COAX	Coaxial Cable	Cable-11	011	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2020-08-15	2021-08-14
RF Conducted Test					
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2019-12-14	2020-12-13
Agilent	Power Meter	N1912A	MY5000492	2020-11-18	2021-11-17
Agilent	Power Sensor	N1921A	MY54210024	2020-11-18	2021-11-17
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
ZOOMSMART	RF Cable	ZOOMSMART C01	C01	Each Time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2020-08-05	2021-08-04
Rohde & Schwarz	LISN	ENV216	101115	2019-12-14	2020-12-13
Audix	Test Software	e3	V9	--	--
Rohde & Schwarz	Pulse limiter	ESH3-Z2	357.8810.52	2020-08-10	2021-08-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2020-08-15	2021-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1307,§2.1093.

Test Result

Compliance, please refer to the SAR report: RSHD200817001-20B

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407, if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an FPC antenna for 5G Wi-Fi which the antenna gain is -0.24 dBi, which is permanently attached to the unit, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.407 (b) (8) §15.207 (a) – AC POWER LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), §15.407(b) (8)

EUT Setup

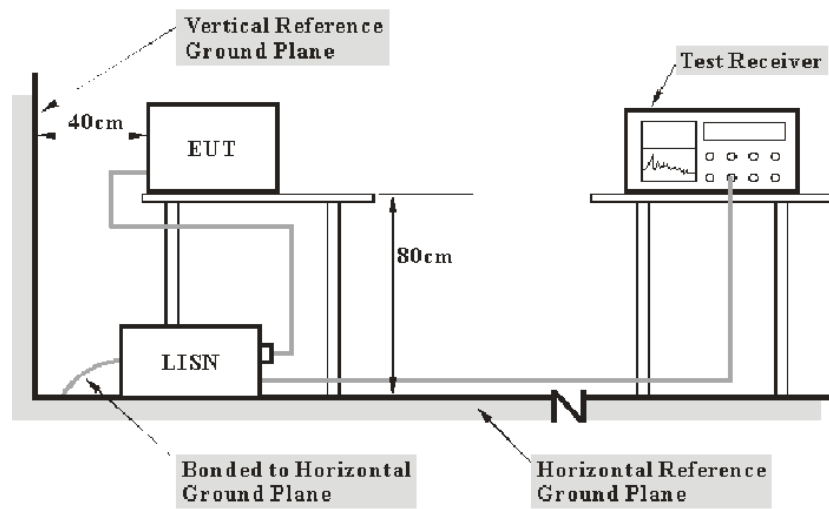

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

Corrected Factor & Over Limit Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	24.3-25.2 °C
Relative Humidity:	48-50 %
ATM Pressure:	101.2-101.5 kPa


The testing was performed by Jack Jiao from 2020-09-09 to 2020-10-10.

EUT operation mode: Transmitting in 802.11a mode low channel of 5150~5250MHz (worst case).

AC 120V/60 Hz, Line

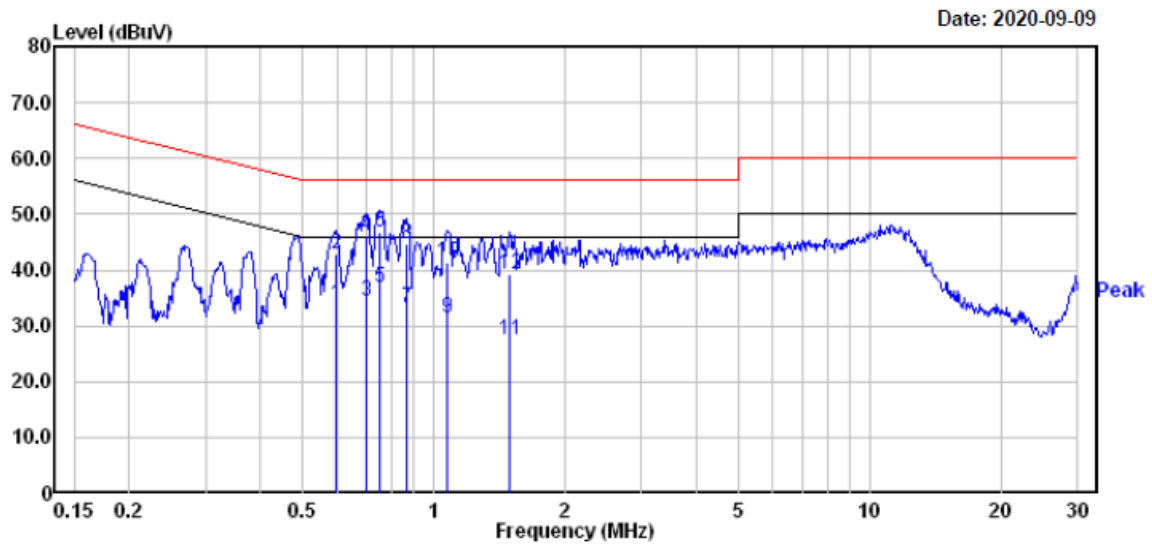

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.595	14.20	19.75	33.95	46.00	-12.05	Average
2	0.595	23.20	19.75	42.95	56.00	-13.05	QP
3	0.701	14.60	19.75	34.35	46.00	-11.65	Average
4	0.701	26.30	19.75	46.05	56.00	-9.95	QP
5	0.755	17.00	19.72	36.72	46.00	-9.28	Average
6	0.755	27.20	19.72	46.92	56.00	-9.08	QP
7	0.866	13.60	19.72	33.32	46.00	-12.68	Average
8	0.866	25.10	19.72	44.82	56.00	-11.18	QP
9	1.077	11.60	19.82	31.42	46.00	-14.58	Average
10	1.077	21.40	19.82	41.22	56.00	-14.78	QP
11	1.495	7.60	19.84	27.44	46.00	-18.56	Average
12	1.495	19.30	19.84	39.14	56.00	-16.86	QP

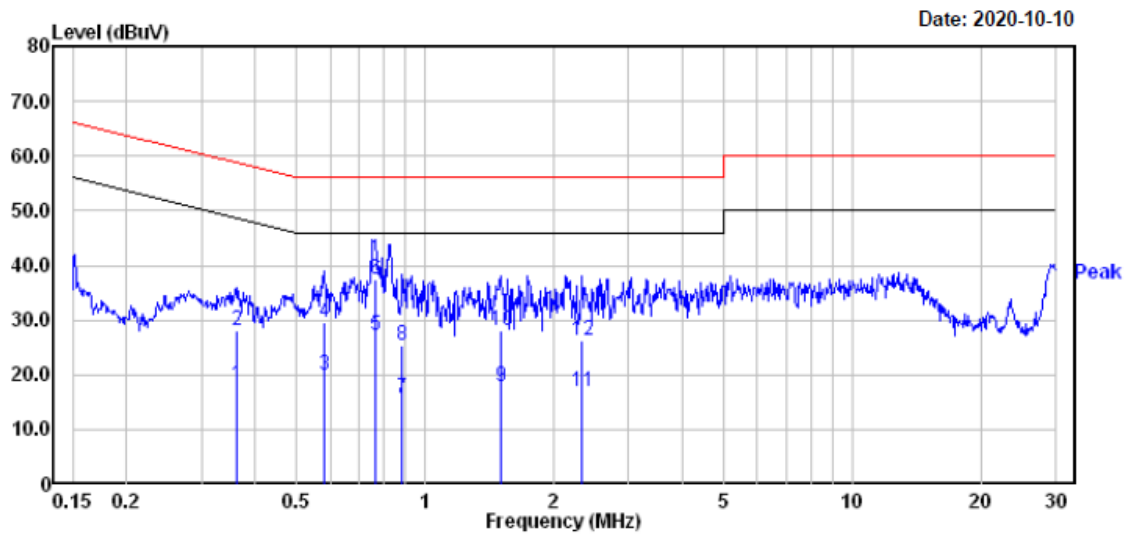AC 120V/60 Hz, Neutral

	Freq	Read		Limit	Over	
		Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.363	-1.60	19.79	18.19	48.65	-30.46 Average
2	0.363	8.30	19.79	28.09	58.65	-30.56 QP
3	0.579	0.10	19.75	19.85	46.00	-26.15 Average
4	0.579	9.90	19.75	29.65	56.00	-26.35 QP
5	0.763	7.60	19.72	27.32	46.00	-18.68 Average
6	0.763	17.80	19.72	37.52	56.00	-18.48 QP
7	0.885	-3.91	19.73	15.82	46.00	-30.18 Average
8	0.885	5.59	19.73	25.32	56.00	-30.68 QP
9	1.503	-2.01	19.85	17.84	46.00	-28.16 Average
10	1.503	8.19	19.85	28.04	56.00	-27.96 QP
11	2.334	-2.60	19.58	16.98	46.00	-29.02 Average
12	2.334	6.60	19.58	26.18	56.00	-29.82 QP


Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)


2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)

EUT operation mode: Transmitting in 802.11ac20 mode low channel of 5725~5850MHz (worst case).

AC 120V/60 Hz, Line

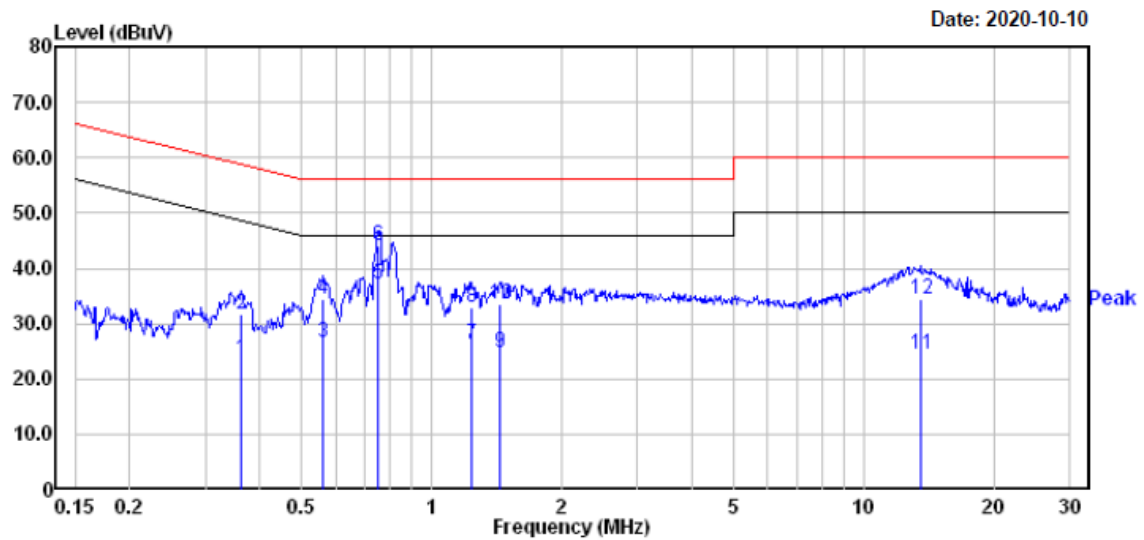

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.363	3.70	19.79	23.49	48.65	-25.16	Average
2	0.363	11.90	19.79	31.69	58.65	-26.96	QP
3	0.561	6.90	19.75	26.65	46.00	-19.35	Average
4	0.561	14.80	19.75	34.55	56.00	-21.45	QP
5	0.755	17.40	19.72	37.12	46.00	-8.88	Average
6	0.755	24.40	19.72	44.12	56.00	-11.88	QP
7	1.236	6.51	19.81	26.32	46.00	-19.68	Average
8	1.236	13.01	19.81	32.82	56.00	-23.18	QP
9	1.441	5.01	19.83	24.84	46.00	-21.16	Average
10	1.441	13.61	19.83	33.44	56.00	-22.56	QP
11	13.551	4.90	19.61	24.51	50.00	-25.49	Average
12	13.551	14.90	19.61	34.51	60.00	-25.49	QP

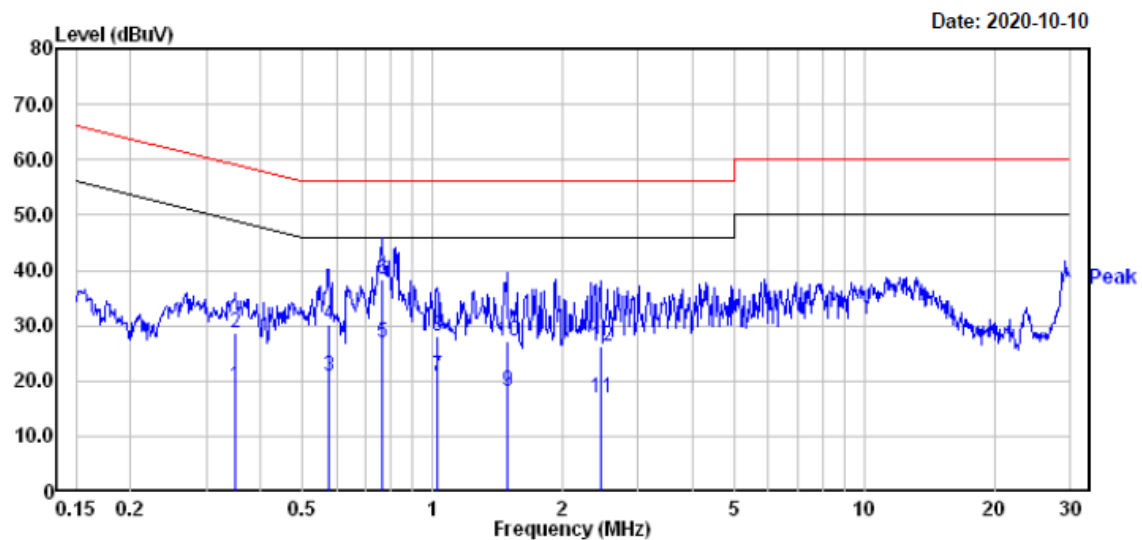AC 120V/60 Hz, Neutral

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.350	-0.70	19.81	19.11	48.96	-29.85	Average
2	0.350	9.00	19.81	28.81	58.96	-30.15	QP
3	0.576	1.10	19.75	20.85	46.00	-25.15	Average
4	0.576	10.40	19.75	30.15	56.00	-25.85	QP
5	0.763	7.00	19.72	26.72	46.00	-19.28	Average
6	0.763	18.60	19.72	38.32	56.00	-17.68	QP
7	1.027	1.10	19.82	20.92	46.00	-25.08	Average
8	1.027	8.40	19.82	28.22	56.00	-27.78	QP
9	1.487	-1.60	19.84	18.24	46.00	-27.76	Average
10	1.487	7.40	19.84	27.24	56.00	-28.76	QP
11	2.448	-2.69	19.50	16.81	46.00	-29.19	Average
12	2.448	6.71	19.50	26.21	56.00	-29.79	QP

Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)

§15.205 & §15.209 & §15.407(B) (1), (4), (8),(9) – UNDESIRABLE EMISSION & RESTRICTED BANDS

Applicable Standard

FCC §15.407 (b) (1), (4), (8), (9); §15.209; §15.205;

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.


For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000MHz shall be performed using a minimum resolution bandwidth of 1MHz.


According to 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E \text{ [dB}\mu\text{V/m]} = \text{EIRP [dBm]} + 95.2$, for $d = 3$ meters.

EUT Setup

Below 1 GHz:

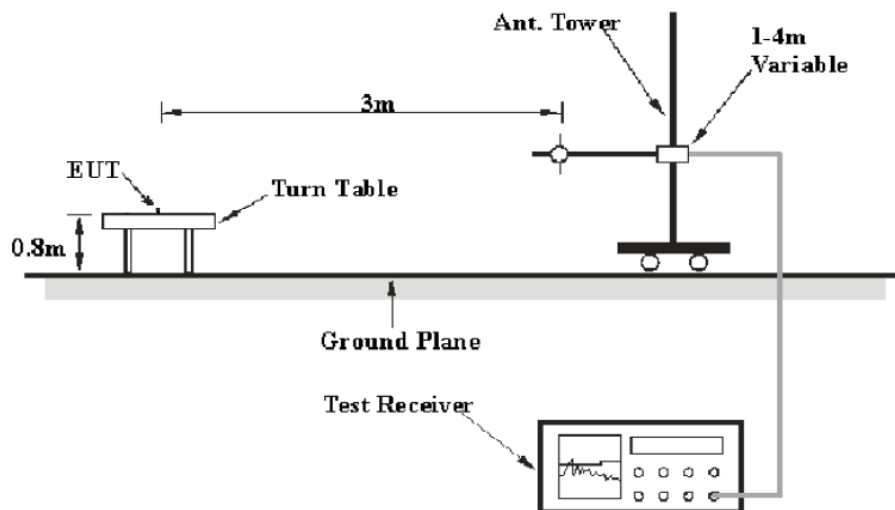

1 GHz-40GHz:

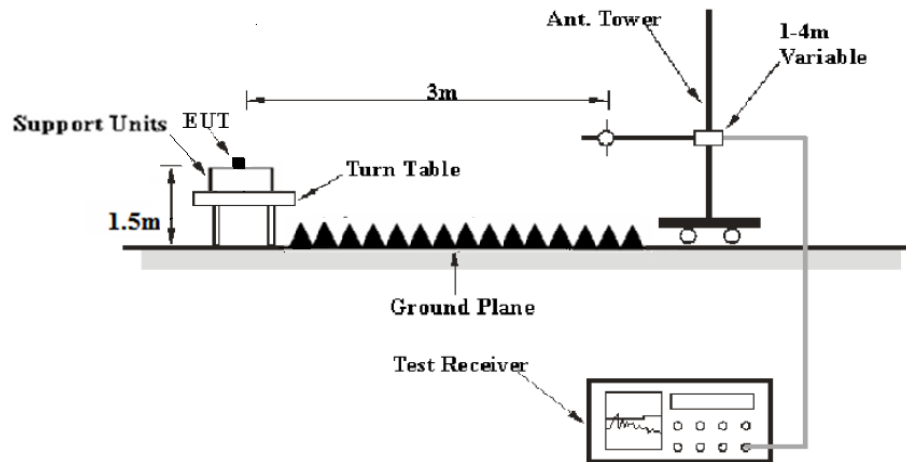

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

During the radiated emission test, the adapter was connected to AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions

Temperature:	23.2~25.9 °C
Relative Humidity:	53~71 %
ATM Pressure:	101.1~101.7 kPa


The testing was performed by Jack Jiao from 2020-09-08 to 2020-11-25.

Test Mode: Transmitting

Spurious Emission Test

30MHz-1GHz(5150-5250MHz Band):


Pre-scan with 802.11a, 802.11ac20, 802.11n-HT20, 802.11ac40, 802.11n-HT40 and 802.11 ac80 modes of operation in the X,Y and Z axes of orientation, **the worst case 802.11a mode low channel** in Y-axis of orientation was recorded

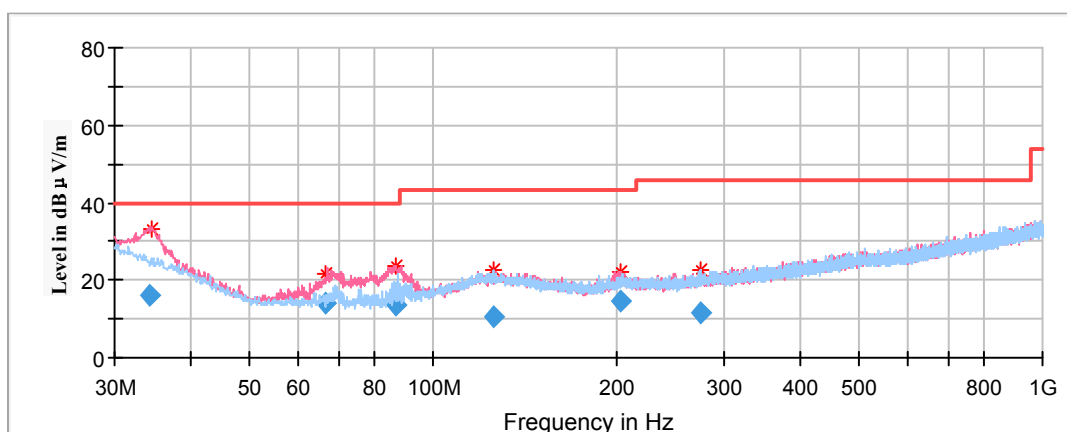

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
34.347050	16.08	100.0	V	286.0	-7.3	40.00	23.92
66.685450	13.88	100.0	V	107.0	-17.9	40.00	26.12
87.114350	13.74	200.0	V	15.0	-18.0	40.00	26.26
125.768950	10.74	200.0	H	176.0	-11.8	43.50	32.76
202.394250	14.59	200.0	V	341.0	-12.8	43.50	28.91
273.931100	11.34	100.0	H	30.0	-11.8	46.00	34.66

30MHz-1GHz(5725-5850MHz Band):

Pre-scan with 802.11a, 802.11ac20, 802.11n-HT20, 802.11ac40, 802.11n-HT40 and 802.11 ac80 modes of operation in the X,Y and Z axes of orientation, **the worst case 802.11ac20 mode low channel** in Y-axis of orientation was recorded

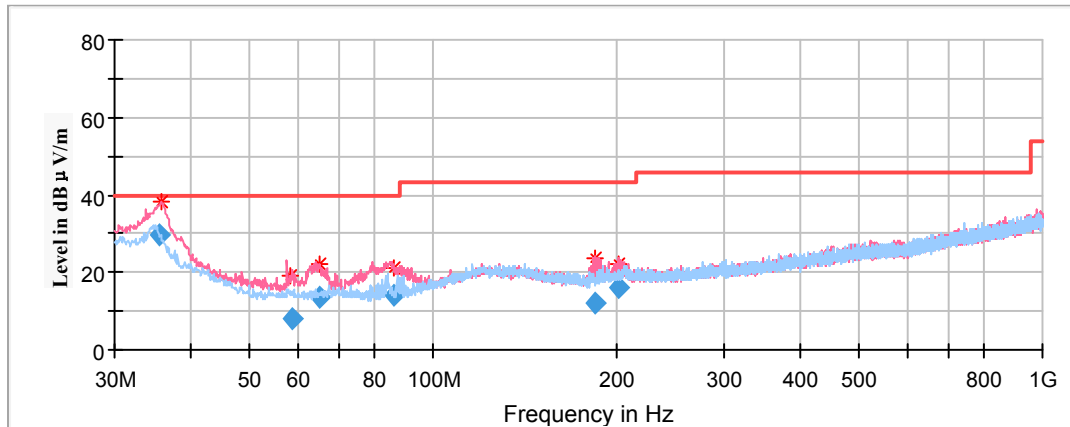


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
35.534850	29.47	100.0	V	150.0	-8.1	40.00	10.53
58.571700	8.02	100.0	V	245.0	-18.3	40.00	31.98
65.073300	13.61	100.0	V	166.0	-18.0	40.00	26.39
86.431550	14.22	200.0	V	261.0	-18.0	40.00	25.78
185.019700	12.07	100.0	V	0.0	-13.8	43.50	31.43
201.993050	16.23	100.0	V	161.0	-12.8	43.50	27.27

1GHz-18GHz(5150-5250MHz Band):**802.11a Mode:**


(Pre-scan in the X, Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded.)

Note:


1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

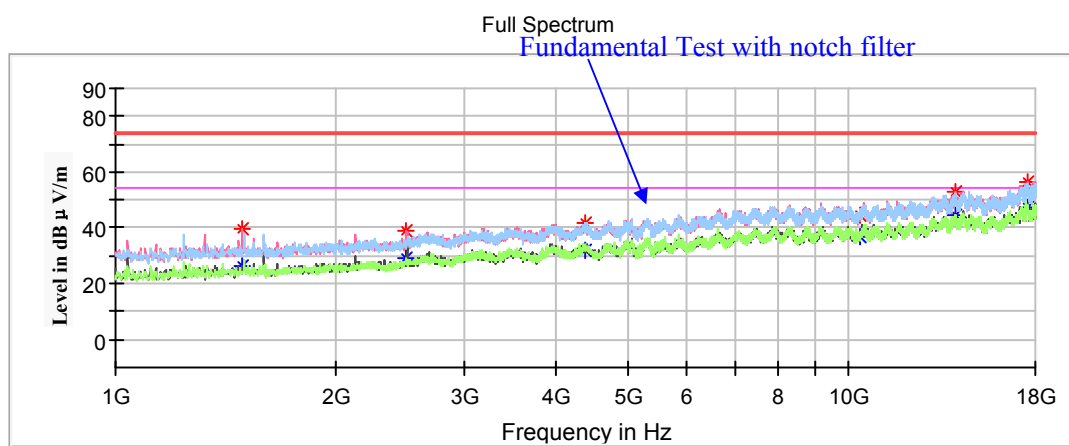Low Channel: 5180MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1491.300000	---	26.24	150.0	V	144.0	-16.4	54.00	27.76
1491.300000	39.68	---	150.0	V	144.0	-16.4	74.00	34.32
2497.700000	---	29.02	150.0	V	272.0	-12.4	54.00	24.98
2497.700000	38.66	---	150.0	V	272.0	-12.4	74.00	35.34
4377.900000	---	32.07	150.0	V	196.0	-6.4	54.00	21.93
4377.900000	41.55	---	150.0	V	196.0	-6.4	74.00	32.45
10360.000000	44.89	---	150.0	H	0.0	2.2	68.20	23.31
13964.200000	53.19	---	150.0	V	0.0	6.1	68.20	15.01
17551.200000	56.31	---	150.0	V	208.0	8.9	68.20	11.89

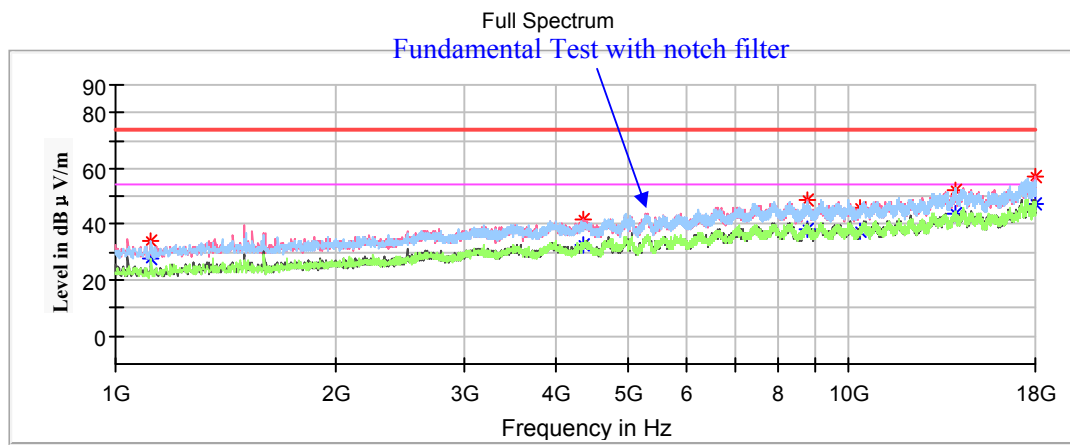Middle Channel: 5200MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1119.000000	---	27.43	150.0	H	310.0	-18.4	54.00	26.57
1119.000000	34.17	---	150.0	H	310.0	-18.4	74.00	39.83
4355.800000	---	32.52	150.0	V	271.0	-6.4	54.00	21.48
4355.800000	41.79	---	150.0	V	271.0	-6.4	74.00	32.21
8777.500000	48.41	---	150.0	V	220.0	1.6	68.20	19.79
10400.000000	46.25	---	150.0	V	246.0	2.2	68.20	21.95
13965.900000	52.48	---	150.0	V	144.0	6.1	68.20	15.72
17962.600000	---	47.17	150.0	V	335.0	8.8	54.00	6.83
17962.600000	56.88	---	150.0	V	335.0	8.8	74.00	17.12

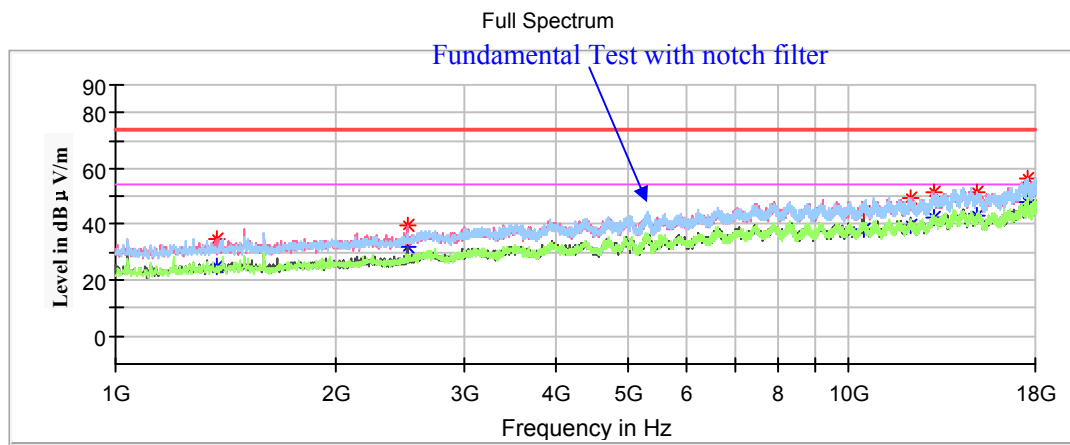High Channel: 5240MHz


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1372.300000	---	24.74	150.0	V	283.0	-17.1	54.00	29.26
1372.300000	34.48	---	150.0	V	283.0	-17.1	74.00	39.52
2499.400000	---	32.11	150.0	V	270.0	-12.4	54.00	21.89
2499.400000	39.48	---	150.0	V	270.0	-12.4	74.00	34.52
10480.000000	44.30	---	150.0	H	60.0	2.3	68.20	23.90
12187.700000	---	39.89	150.0	V	181.0	3.5	54.00	14.11
12187.700000	49.68	---	150.0	V	181.0	3.5	74.00	24.32
13061.500000	51.25	---	150.0	V	36.0	5.3	68.20	16.95
14997.800000	51.34	---	150.0	H	205.0	5.1	68.20	16.86
17513.800000	56.63	---	150.0	V	308.0	8.9	68.20	11.57

802.11ac20 Mode:


(Pre-scan in the X, Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded.)

Note:


1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
 Corrected Amplitude = Corrected Factor + Reading
 Margin = Limit - Corrected. Amplitude

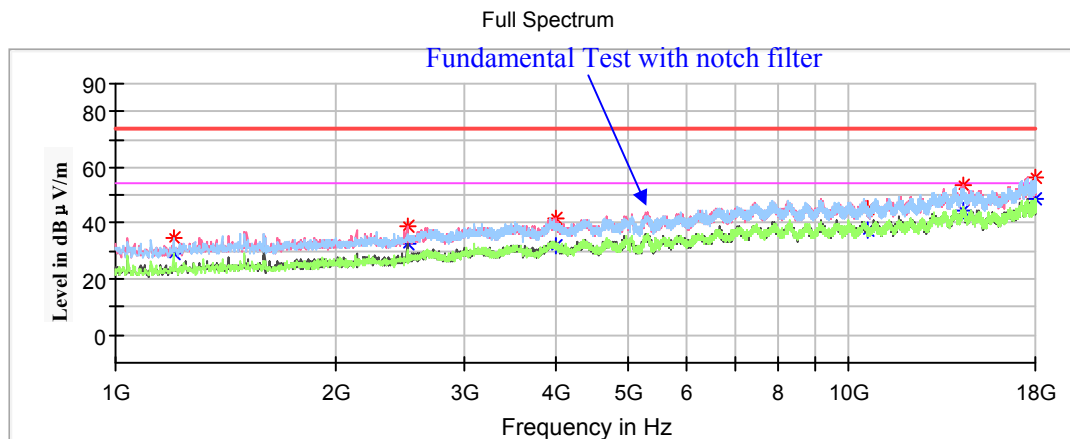Low Channel: 5180MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1198.900000	---	28.99	150.0	H	298.0	-18.0	54.00	25.01
1198.900000	34.53	---	150.0	H	298.0	-18.0	74.00	39.47
2499.400000	---	32.34	150.0	V	276.0	-12.4	54.00	21.66
2499.400000	39.05	---	150.0	V	276.0	-12.4	74.00	34.95
3985.200000	---	32.03	150.0	V	122.0	-7.1	54.00	21.97
3985.200000	41.80	---	150.0	V	122.0	-7.1	74.00	32.20
10599.900000	44.97	---	150.0	V	0.0	2.4	68.20	23.23
14377.300000	53.81	---	150.0	V	187.0	6.4	68.20	14.39
17950.700000	---	48.54	150.0	V	276.0	8.8	54.00	5.46
17950.700000	56.77	---	150.0	V	276.0	8.8	74.00	17.23

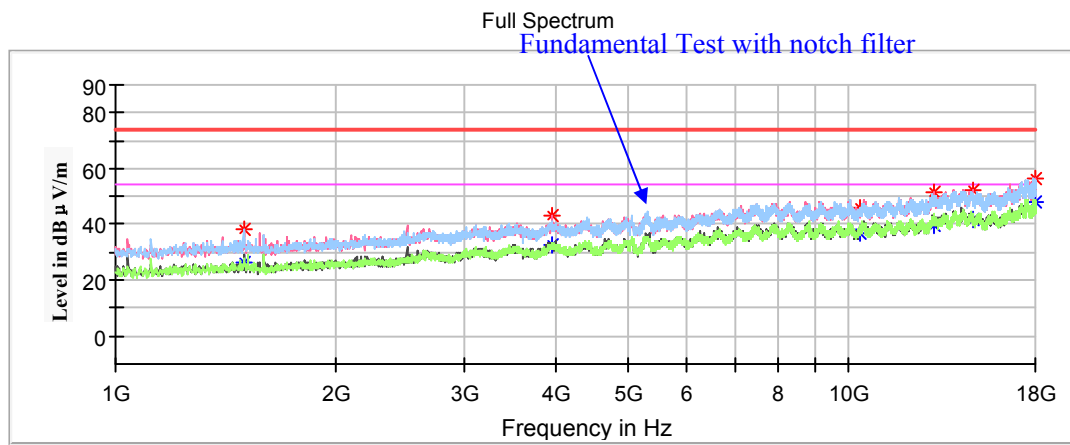Middle Channel: 5200MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1494.700000	---	26.39	150.0	H	52.0	-16.4	54.00	27.61
1494.700000	38.18	---	150.0	H	52.0	-16.4	74.00	35.82
3934.200000	---	32.54	150.0	H	77.0	-7.2	54.00	21.46
3934.200000	43.33	---	150.0	H	77.0	-7.2	74.00	30.67
10400.000000	45.71	---	150.0	V	194.0	2.2	68.20	22.49
13124.400000	51.31	---	150.0	V	116.0	5.3	68.20	16.89
14776.800000	51.94	---	150.0	V	155.0	5.7	68.20	16.26
17959.200000	56.30	---	150.0	V	194.0	8.8	74.00	17.70
17959.200000	---	48.17	150.0	V	194.0	8.8	54.00	5.83

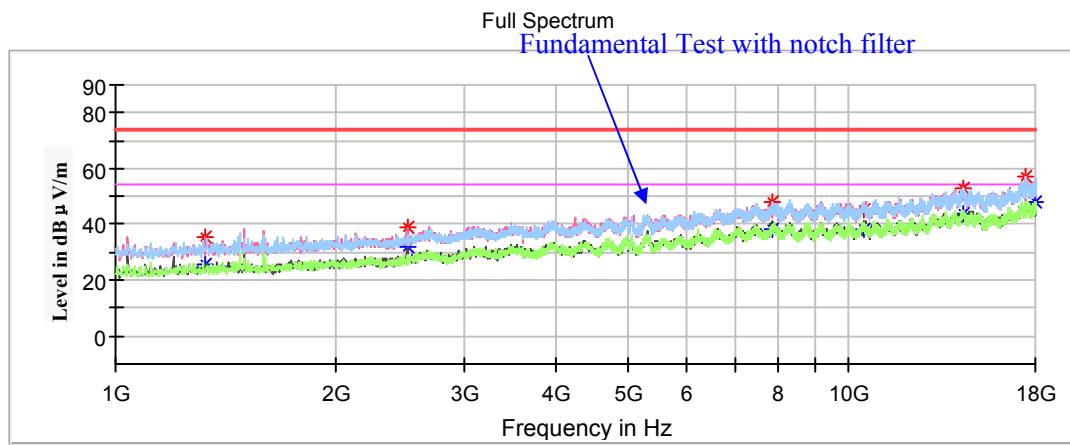High Channel: 5240MHz


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1324.700000	---	25.66	150.0	V	356.0	-17.3	54.00	28.34
1324.700000	35.24	---	150.0	V	356.0	-17.3	74.00	38.76
2499.400000	---	32.26	150.0	V	275.0	-12.4	54.00	21.74
2499.400000	38.62	---	150.0	V	275.0	-12.4	74.00	35.38
7886.700000	47.72	---	150.0	H	46.0	1.6	68.20	20.48
10480.000000	45.02	---	150.0	V	0.0	2.3	68.20	23.18
14346.700000	52.96	---	150.0	H	59.0	6.4	68.20	15.24
17949.000000	57.15	---	150.0	H	148.0	8.8	74.00	16.85
17949.000000	---	48.37	150.0	H	148.0	8.8	54.00	5.63

802.11n-HT20 Mode:


Pre-scan with X,Y and Z axes of orientation, the worst case Y-axis of orientation was recorded

Note:


1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

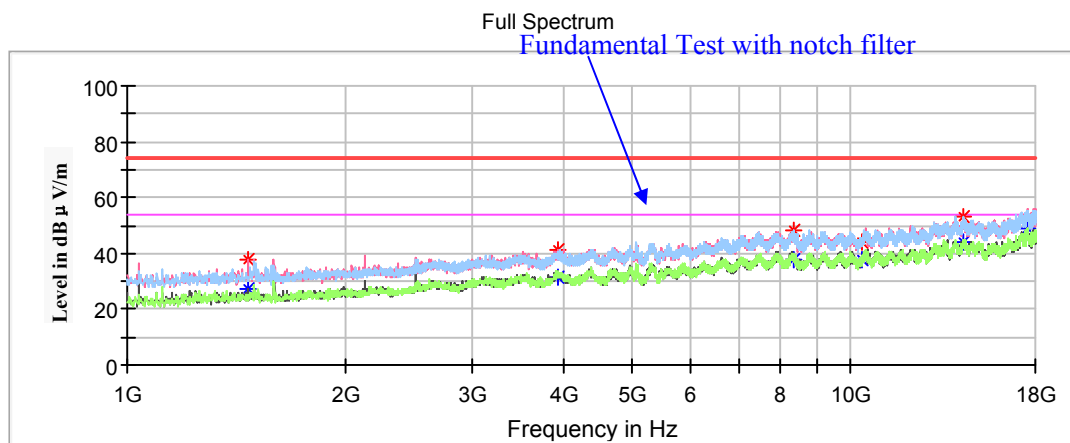Low Channel: 5180MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1470.900000	---	27.07	150.0	V	212.0	-16.5	54.00	26.93
1470.900000	37.96	---	150.0	V	212.0	-16.5	74.00	36.04
3930.800000	---	31.69	150.0	H	322.0	-7.3	54.00	22.31
3930.800000	41.08	---	150.0	H	322.0	-7.3	74.00	32.92
8325.300000	---	37.70	150.0	V	36.0	1.5	54.00	16.30
8325.300000	47.92	---	150.0	V	36.0	1.5	74.00	26.08
10360.000000	44.17	---	150.0	H	10.0	2.2	68.20	24.03
14351.800000	53.13	---	150.0	H	358.0	6.4	68.20	15.07
17532.500000	52.77	---	150.0	V	335.0	8.9	68.20	15.43

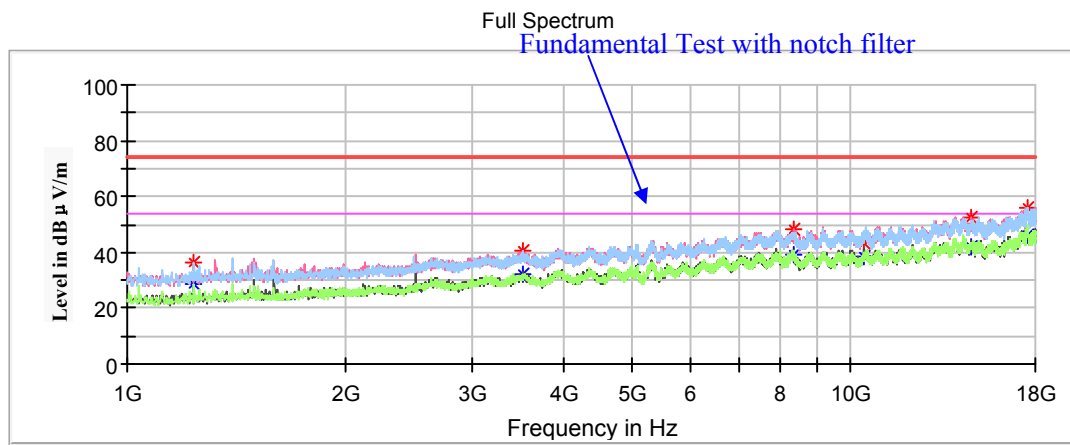Middle Channel: 5200MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1238.000000	---	28.93	150.0	H	295.0	-17.8	54.00	25.07
1238.000000	36.53	---	150.0	H	295.0	-17.8	74.00	37.47
3512.600000	40.60	---	150.0	H	321.0	-8.8	68.20	27.60
8342.300000	---	39.49	150.0	V	0.0	1.5	54.00	14.51
8342.300000	48.18	---	150.0	V	0.0	1.5	74.00	25.82
10400.000000	43.69	---	150.0	H	194.0	2.2	68.20	24.51
14662.900000	52.50	---	150.0	V	163.0	6.1	68.20	15.70
17549.500000	56.07	---	150.0	H	345.0	8.9	68.20	12.13

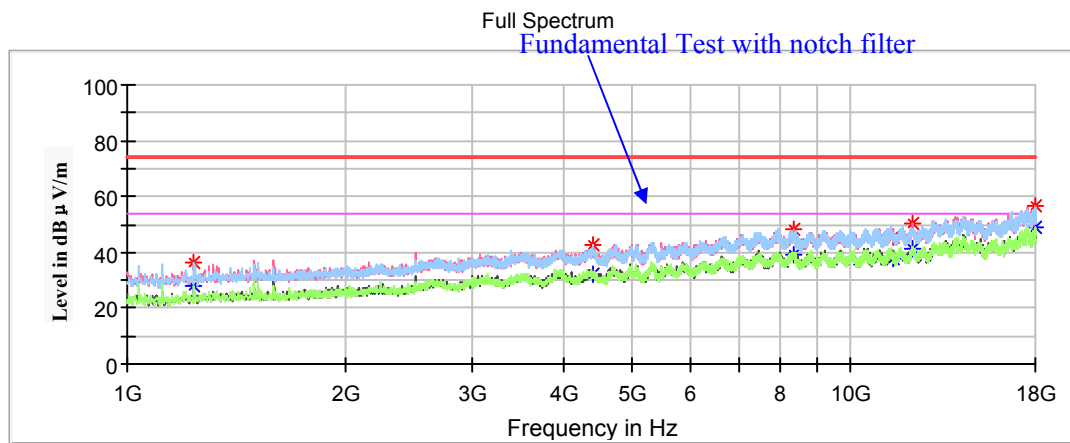High Channel: 5240MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1238.000000	---	27.66	150.0	H	297.0	-17.8	54.00	26.34
1238.000000	36.34	---	150.0	H	297.0	-17.8	74.00	37.66
4394.900000	---	32.13	150.0	V	244.0	-6.4	54.00	21.87
4394.900000	42.56	---	150.0	V	244.0	-6.4	74.00	31.44
8328.700000	---	39.22	150.0	V	358.0	1.5	54.00	14.78
8328.700000	48.40	---	150.0	V	358.0	1.5	74.00	25.60
11480.500000	---	37.99	150.0	H	6.0	2.8	54.00	16.01
11480.500000	45.20	---	150.0	H	6.0	2.8	74.00	28.80
12150.300000	---	41.58	150.0	V	335.0	3.5	54.00	12.42
12150.300000	50.26	---	150.0	V	335.0	3.5	74.00	23.74
17947.300000	---	49.26	150.0	H	217.0	8.8	54.00	4.74
17947.300000	56.52	---	150.0	H	217.0	8.8	74.00	17.48

802.11ac40 Mode:


(Pre-scan in the X, Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded.)

Note:

1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
 Corrected Amplitude = Corrected Factor + Reading
 Margin = Limit - Corrected. Amplitude

Low Channel: 5190MHz


Full Spectrum

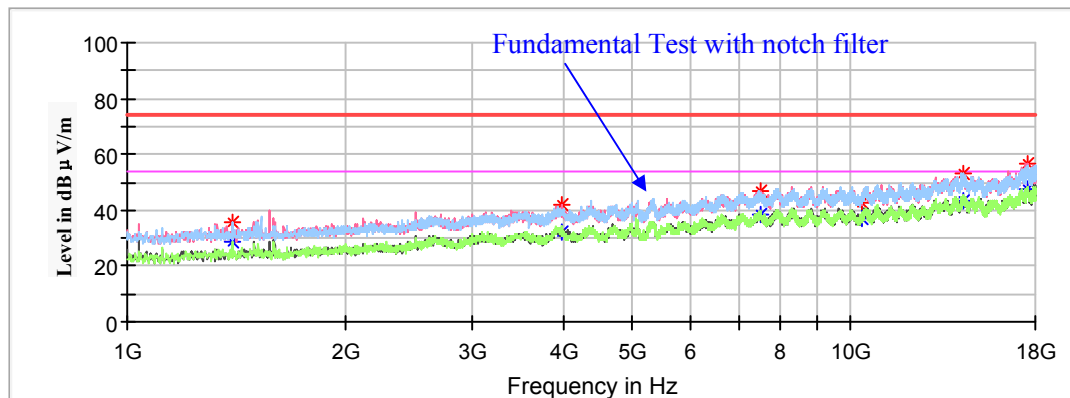

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1399.500000	---	28.65	150.0	H	296.0	-16.9	54.00	25.35
1399.500000	35.57	---	150.0	H	296.0	-16.9	74.00	38.43
3986.900000	---	31.92	150.0	V	288.0	-7.0	54.00	22.08
3986.900000	41.94	---	150.0	V	288.0	-7.0	74.00	32.06
7529.700000	---	38.21	150.0	V	250.0	1.1	54.00	15.79
7529.700000	47.07	---	150.0	V	250.0	1.1	74.00	26.93
10380.000000	42.82	---	150.0	H	217.0	2.2	68.20	25.38
14294.000000	52.87	---	150.0	H	140.0	6.4	68.20	15.33
17512.100000	56.66	---	150.0	V	356.0	8.9	68.20	11.54

High Channel: 5230MHz

Full Spectrum

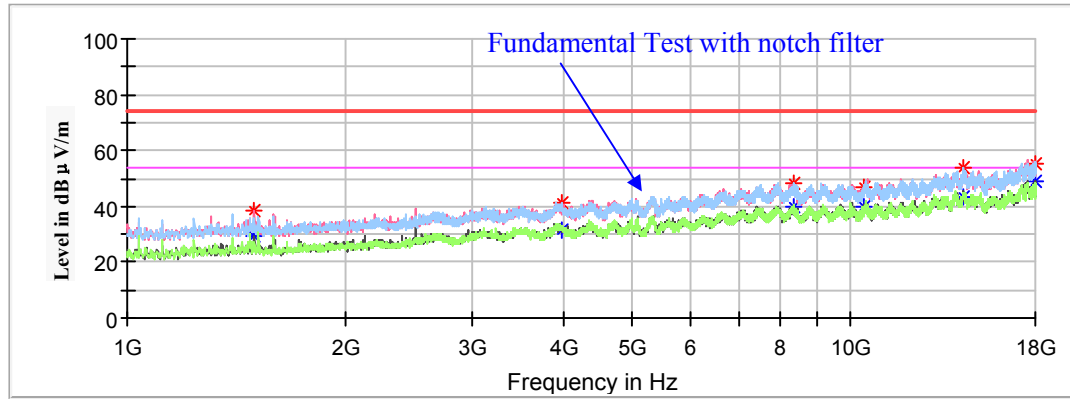

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1499.800000	---	29.23	150.0	V	68.0	-16.4	54.00	24.77
1499.800000	38.41	---	150.0	V	68.0	-16.4	74.00	35.59
3980.100000	---	31.69	150.0	V	148.0	-7.1	54.00	22.31
3980.100000	41.16	---	150.0	V	148.0	-7.1	74.00	32.84
8337.200000	---	40.03	150.0	V	356.0	1.5	54.00	13.97
8337.200000	47.90	---	150.0	V	356.0	1.5	74.00	26.10
10460.000000	46.60	---	150.0	V	186.0	2.3	68.20	27.40
14321.200000	53.52	---	150.0	H	12.0	6.4	68.20	20.48
17966.000000	55.30	---	150.0	V	275.0	8.8	74.00	18.70
17966.000000	---	48.98	150.0	V	275.0	8.8	54.00	5.02

802.11n-HT40 Mode:


Pre-scan with X,Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded

Note:

1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 5190MHz


Full Spectrum

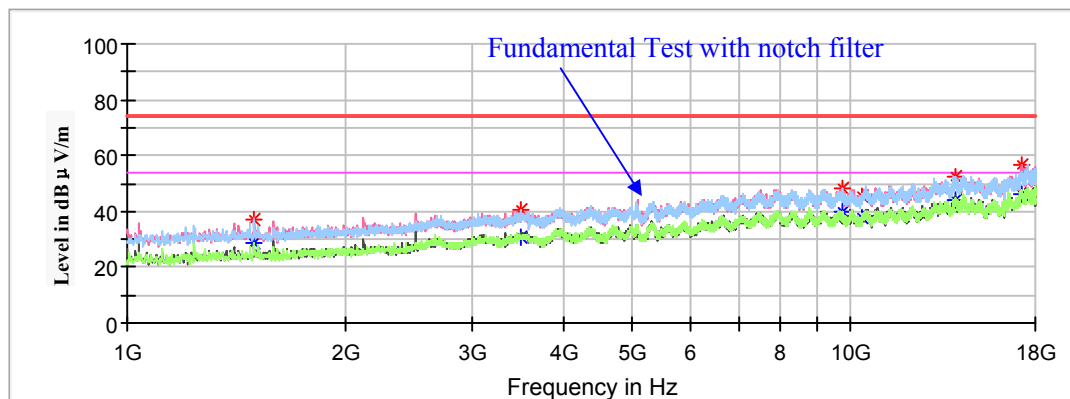

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1498.100000	---	28.87	150.0	H	276.0	-16.4	54.00	25.13
1498.100000	37.28	---	150.0	H	276.0	-16.4	74.00	36.72
3507.500000	40.50	---	150.0	H	0.0	-8.8	68.20	27.70
9722.700000	48.53	---	150.0	H	327.0	2.0	68.20	19.67
10380.000000	45.65	---	150.0	H	357.0	2.2	68.20	22.55
13979.500000	52.42	---	150.0	H	0.0	6.1	68.20	15.78
17226.500000	56.36	---	150.0	V	166.0	8.0	68.20	11.84

Middle Channel: 5230MHz

Full Spectrum

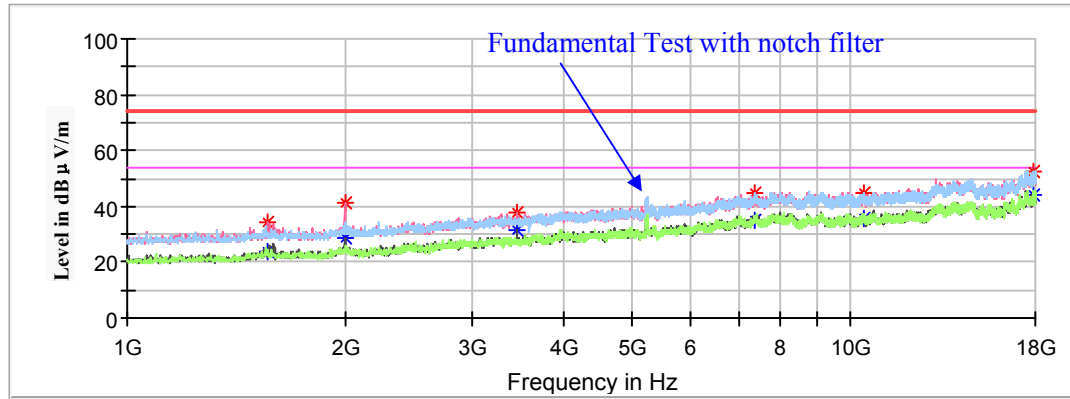


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1566.100000	34.50	---	200.0	V	258.0	-16.1	74.00	39.50
1566.100000	---	23.61	200.0	V	258.0	-16.1	54.00	30.39
1997.900000	40.92	---	200.0	V	207.0	-14.5	68.20	27.28
3454.800000	37.58	---	200.0	V	309.0	-8.9	68.20	30.62
7385.200000	44.76	---	200.0	H	191.0	0.8	74.00	29.24
7385.200000	---	34.65	200.0	H	191.0	0.8	54.00	19.35
10460.000000	44.52	---	200.0	V	220.0	2.3	68.20	23.68
17940.500000	52.57	---	150.0	H	308.0	8.8	74.00	21.43
17940.500000	---	44.32	150.0	H	308.0	8.8	54.00	9.68

802.11ac80 Mode:

Pre-scan with X,Y and Z axes of orientation, the worst case Y-axis of orientation was recorded

Note:

1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

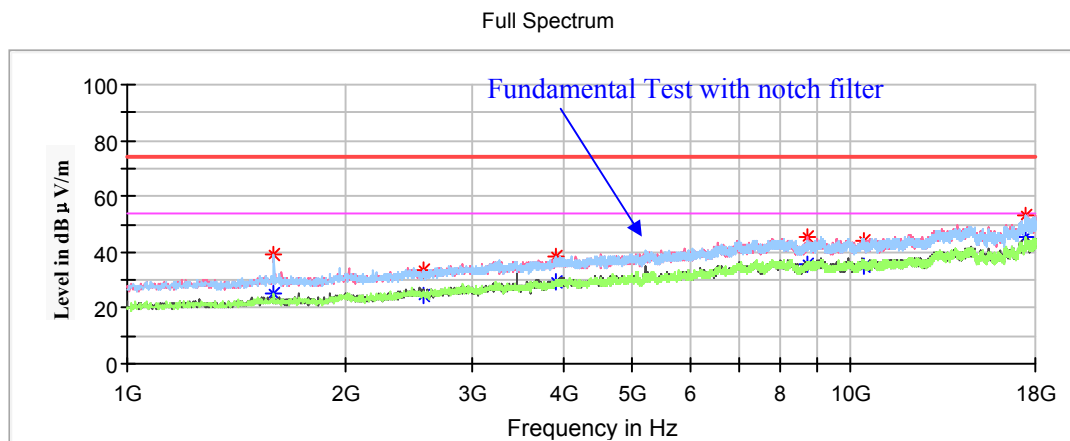Low Channel: 5210MHz


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1596.700000	39.01	---	200.0	H	8.0	-16.0	74.00	34.99
1596.700000	---	25.46	200.0	H	8.0	-16.0	54.00	28.54
2565.700000	33.54	---	200.0	H	124.0	-12.1	68.20	34.66
3901.900000	38.25	---	150.0	H	211.0	-7.4	74.00	35.75
3901.900000	---	29.30	150.0	H	211.0	-7.4	54.00	24.70
8731.600000	45.79	---	200.0	V	117.0	1.6	68.20	22.41
10420.000000	44.21	---	150.0	V	296.0	2.2	68.20	23.99
17488.300000	53.05	---	150.0	H	173.0	8.8	68.20	15.15

1GHz-18GHz(5725-5850MHz Band):**802.11a Mode:**

(Pre-scan in the X, Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded.)


Note:

1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

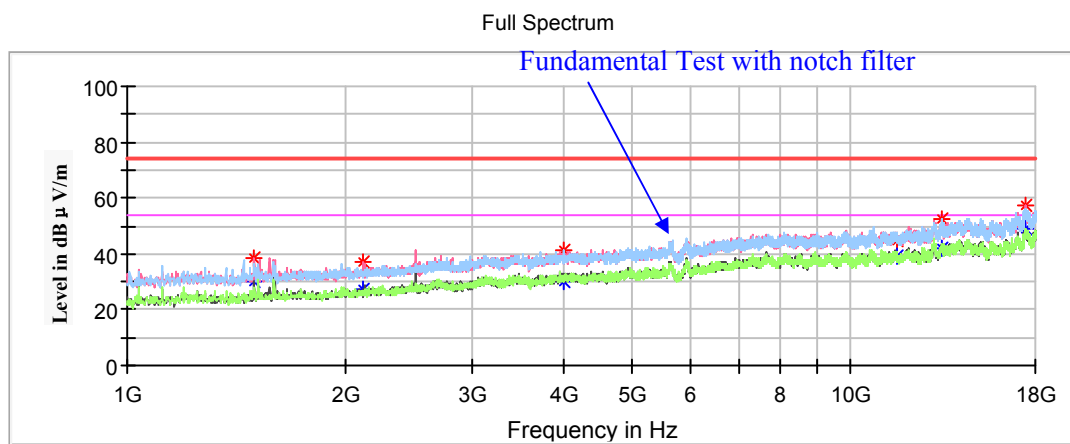
Low Channel: 5745MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1498.100000	---	29.86	150.0	V	85.0	-16.4	54.00	24.14
1498.100000	38.41	---	150.0	V	85.0	-16.4	74.00	35.59
2123.700000	36.89	---	150.0	V	191.0	-14.0	68.20	31.31
4010.700000	---	30.39	150.0	V	179.0	-7.0	54.00	23.61
4010.700000	41.38	---	150.0	V	179.0	-7.0	74.00	32.62
11570.600000	---	39.37	150.0	V	0.0	2.9	54.00	14.63
11570.600000	45.04	---	150.0	V	0.0	2.9	74.00	28.96
13403.200000	52.54	---	150.0	H	160.0	5.6	68.20	15.66
17449.200000	57.29	---	150.0	V	0.0	8.7	68.20	10.91

Middle Channel: 5785MHz

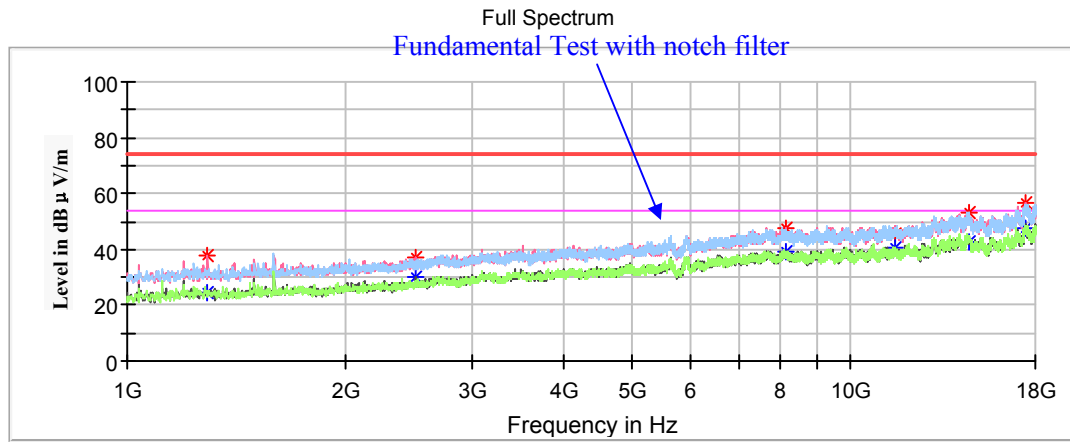

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1292.400000	37.98	---	150.0	V	175.0	-17.5	68.20	30.22
2499.400000	---	30.15	150.0	V	271.0	-12.4	54.00	23.85
2499.400000	37.01	---	150.0	V	271.0	-12.4	74.00	36.99
8134.900000	---	39.32	150.0	V	136.0	1.7	54.00	14.68
8134.900000	47.53	---	150.0	V	136.0	1.7	74.00	26.47
11489.000000	45.56	---	150.0	V	35.0	2.8	74.00	28.44
11489.000000	---	40.79	150.0	V	35.0	2.8	54.00	13.21
14571.100000	53.18	---	150.0	H	250.0	6.3	68.20	15.02
17416.900000	56.39	---	150.0	V	200.0	8.6	68.20	11.81

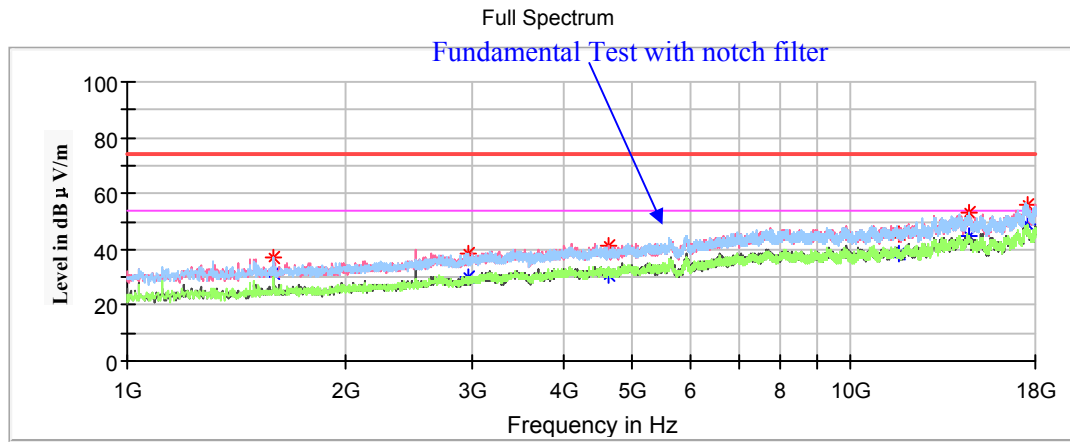High Channel: 5825MHz


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1593.300000	---	31.48	150.0	V	141.0	-16.0	54.00	22.52
1593.300000	37.28	---	150.0	V	141.0	-16.0	74.00	36.72
2951.600000	38.44	---	150.0	H	262.0	-10.3	68.20	29.76
4632.900000	---	31.01	150.0	V	59.0	-5.9	54.00	22.99
4632.900000	41.49	---	150.0	V	59.0	-5.9	74.00	32.51
11650.000000	45.11	---	150.0	H	8.0	3.1	74.00	28.89
11650.000000	---	38.28	150.0	H	8.0	3.1	54.00	15.72
14589.800000	53.20	---	150.0	V	218.0	6.3	68.20	15.00
17475.000000	55.93	---	150.0	H	288.0	8.9	68.20	12.27

802.11ac20 Mode:


(Pre-scan in the X, Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded.)

Note:


1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

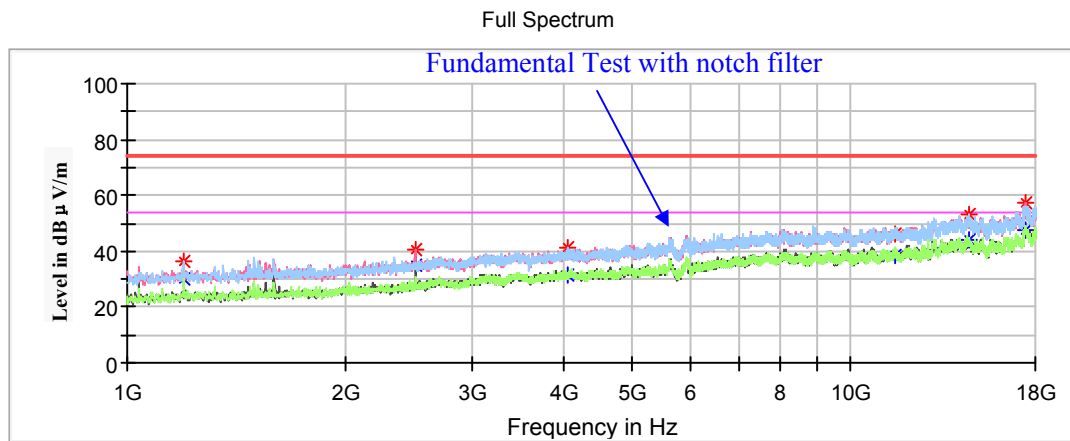Low Channel: 5745MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1198.900000	---	29.85	150.0	H	287.0	-18.0	54.00	24.15
1198.900000	36.06	---	150.0	H	287.0	-18.0	74.00	37.94
2499.400000	---	34.89	150.0	V	283.0	-12.4	54.00	19.11
2499.400000	40.85	---	150.0	V	283.0	-12.4	74.00	33.15
4071.900000	---	31.60	150.0	H	0.0	-6.9	54.00	22.40
4071.900000	41.15	---	150.0	H	0.0	-6.9	74.00	32.85
11490.000000	46.38	---	150.0	V	205.0	2.8	74.00	27.62
11490.000000	---	38.24	150.0	V	205.0	2.8	54.00	15.76
14535.400000	53.16	---	150.0	H	41.0	6.4	68.20	15.04
17467.900000	57.32	---	150.0	V	257.0	8.8	68.20	10.88

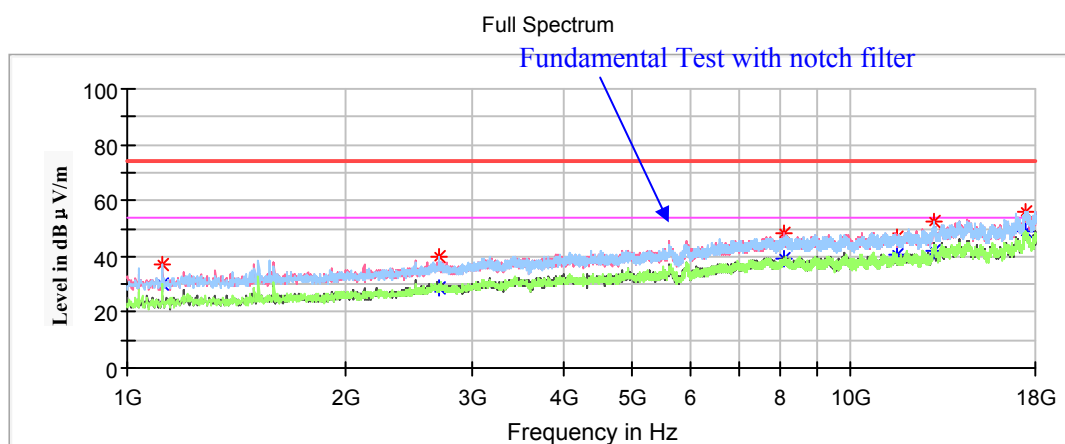Middle Channel: 5785MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1119.000000	---	30.06	150.0	H	308.0	-18.4	54.00	23.94
1119.000000	36.78	---	150.0	H	308.0	-18.4	74.00	37.22
2700.000000	---	28.79	150.0	V	96.0	-11.5	54.00	25.21
2700.000000	39.79	---	150.0	V	96.0	-11.5	74.00	34.21
8097.500000	---	39.35	150.0	V	358.0	1.7	54.00	14.65
8097.500000	48.06	---	150.0	V	358.0	1.7	74.00	25.94
11570.000000	47.19	---	150.0	H	181.0	2.9	74.00	26.81
11570.000000	---	40.80	150.0	H	181.0	2.9	54.00	13.20
13024.100000	52.45	---	150.0	H	90.0	5.2	68.20	15.75
17469.600000	56.25	---	150.0	V	10.0	8.8	68.20	11.95

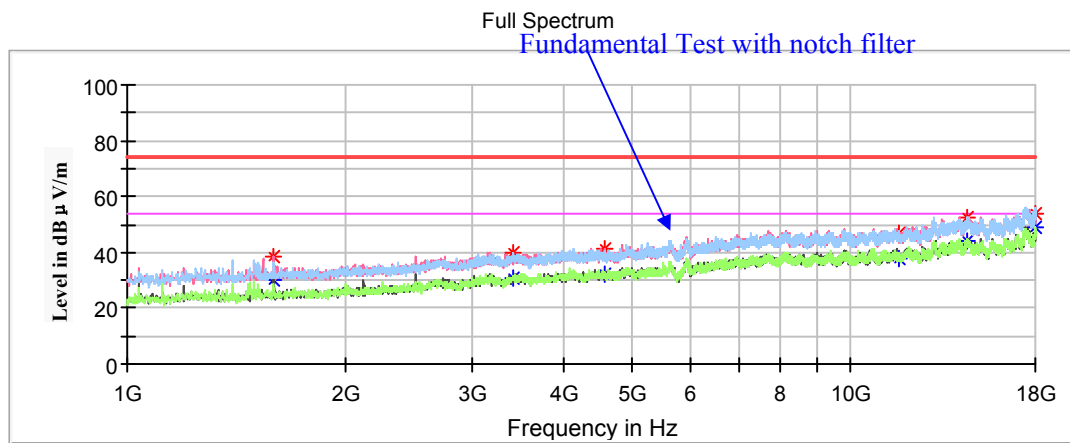High Channel: 5825MHz


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1595.000000	---	29.81	150.0	V	141.0	-16.0	54.00	24.19
1595.000000	38.81	---	150.0	V	141.0	-16.0	74.00	35.19
3417.400000	40.04	---	150.0	V	34.0	-9.0	68.20	28.16
4568.300000	41.07	---	150.0	V	90.0	-6.1	68.20	27.13
11650.000000	46.67	---	150.0	H	237.0	3.1	74.00	27.33
11650.000000	---	38.04	150.0	H	237.0	3.1	54.00	15.96
14486.100000	---	44.05	150.0	V	270.0	6.5	54.00	9.95
14486.100000	52.63	---	150.0	V	270.0	6.5	74.00	21.37
17962.600000	53.84	---	150.0	H	263.0	8.8	74.00	20.16
17962.600000	---	49.18	150.0	H	263.0	8.8	54.00	4.82

802.11n-HT20 Mode:


Pre-scan with X,Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded

Note:


1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

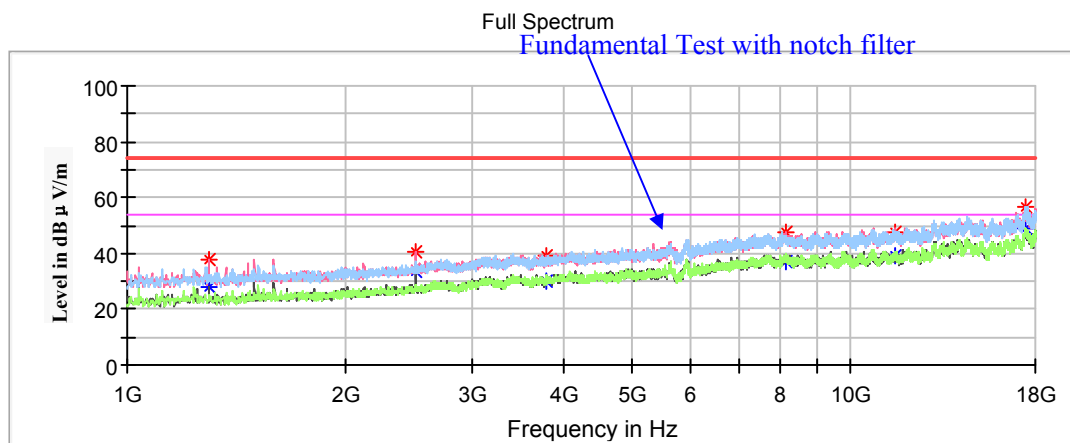Low Channel: 5745MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1297.500000	37.58	---	150.0	V	165.0	-17.5	68.20	30.62
2499.400000	---	33.38	150.0	V	283.0	-12.4	54.00	20.62
2499.400000	40.79	---	150.0	V	283.0	-12.4	74.00	33.21
3788.000000	---	30.35	150.0	V	165.0	-7.8	54.00	23.65
3788.000000	39.25	---	150.0	V	165.0	-7.8	74.00	34.75
8160.400000	---	37.38	150.0	V	76.0	1.7	54.00	16.62
8160.400000	47.48	---	150.0	V	76.0	1.7	74.00	26.52
11490.000000	---	39.44	150.0	H	275.0	2.8	54.00	14.56
11490.000000	47.35	---	150.0	H	275.0	2.8	74.00	26.65
17488.300000	56.31	---	150.0	V	256.0	8.8	68.20	11.89

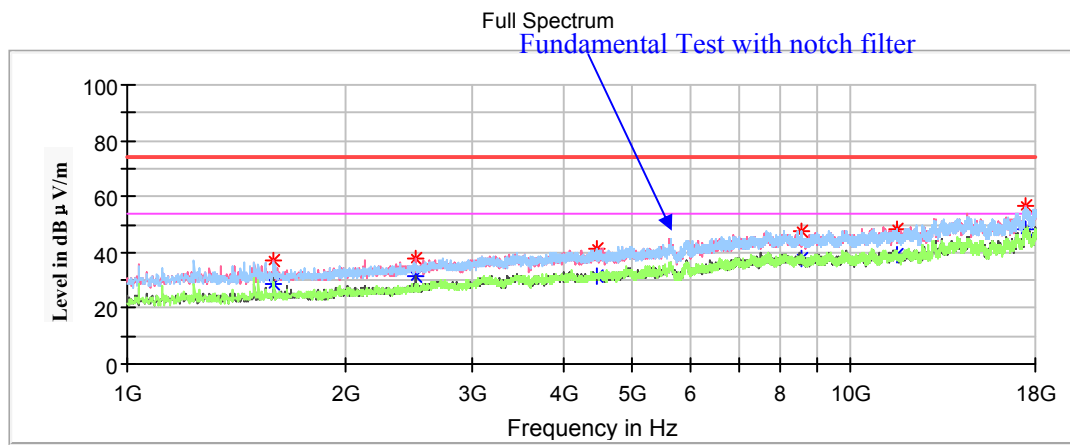Middle Channel: 5785MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1593.300000	---	28.60	150.0	V	47.0	-16.0	54.00	25.40
1593.300000	37.34	---	150.0	V	47.0	-16.0	74.00	36.66
2499.400000	---	31.45	150.0	V	271.0	-12.4	54.00	22.55
2499.400000	37.70	---	150.0	V	271.0	-12.4	74.00	36.30
4452.700000	41.39	---	150.0	V	0.0	-6.3	68.20	26.81
8542.900000	47.87	---	150.0	H	0.0	1.4	68.20	20.33
11570.000000	47.94	---	150.0	H	300.0	2.9	74.00	26.06
11570.000000	---	38.87	150.0	H	300.0	2.9	54.00	15.13
17452.600000	56.41	---	150.0	V	311.0	8.7	68.20	11.79

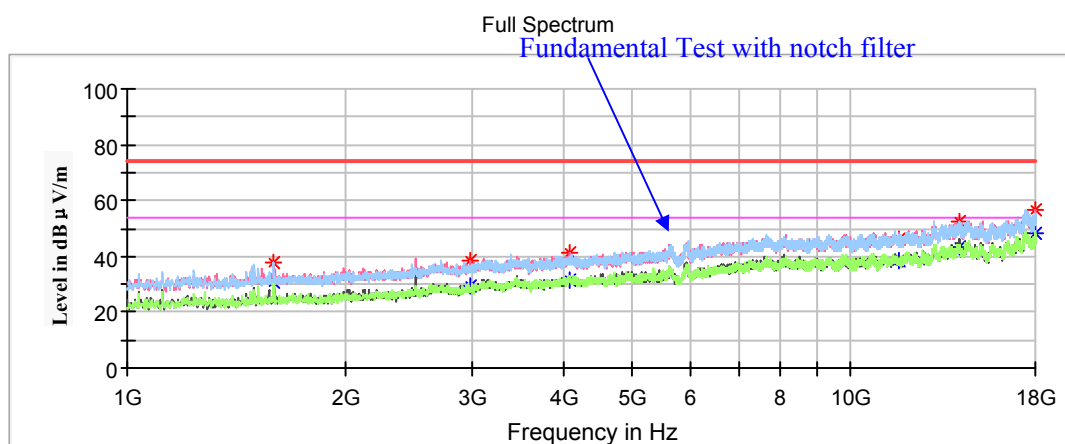High Channel: 5825MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1595.000000	---	30.86	150.0	V	35.0	-16.0	54.00	23.14
1595.000000	37.89	---	150.0	V	35.0	-16.0	74.00	36.11
2977.100000	38.42	---	150.0	V	0.0	-10.2	68.20	29.78
4094.000000	---	31.29	150.0	V	205.0	-6.9	54.00	22.71
4094.000000	40.91	---	150.0	V	205.0	-6.9	74.00	33.09
11650.000000	---	38.18	150.0	V	86.0	3.1	54.00	15.82
11650.000000	45.83	---	150.0	V	86.0	3.1	74.00	28.17
14152.900000	52.67	---	150.0	V	98.0	6.3	68.20	15.53
17969.400000	---	48.06	150.0	V	22.0	8.8	54.00	5.94
17969.400000	56.52	---	150.0	V	22.0	8.8	74.00	17.48

802.11ac40 Mode:


(Pre-scan in the X, Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded.)

Note:

1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
 Corrected Amplitude = Corrected Factor + Reading
 Margin = Limit - Corrected. Amplitude

Low Channel: 5755MHz


Full Spectrum

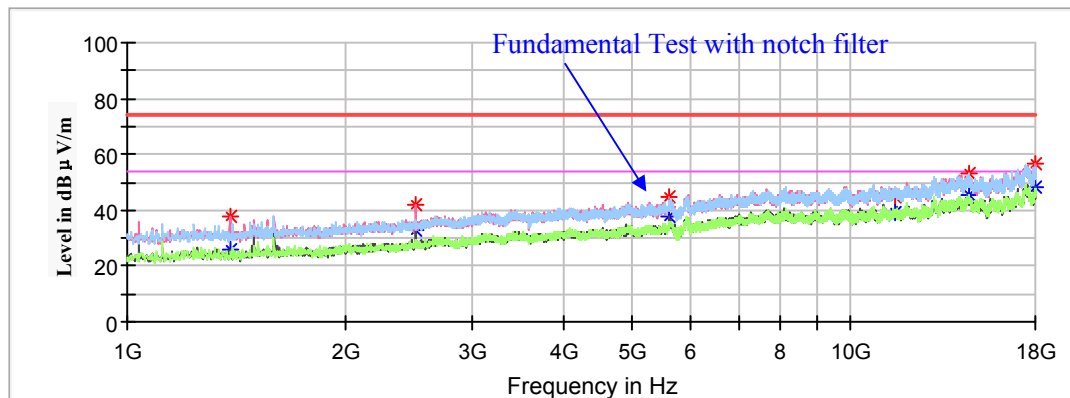

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1385.900000	---	25.96	150.0	V	146.0	-17.0	54.00	28.04
1385.900000	37.48	---	150.0	V	146.0	-17.0	74.00	36.52
2499.400000	---	32.88	150.0	V	284.0	-12.4	54.00	21.12
2499.400000	41.95	---	150.0	V	284.0	-12.4	74.00	32.05
5615.500000	44.70	---	150.0	V	245.0	-3.7	68.20	23.50
11510.000000	---	39.43	150.0	V	121.0	2.8	54.00	14.57
11510.000000	44.95	---	150.0	V	121.0	2.8	74.00	29.05
14562.600000	53.35	---	150.0	H	155.0	6.4	68.20	14.85
17960.900000	---	48.22	150.0	V	245.0	8.8	54.00	5.78
17960.900000	56.55	---	150.0	V	245.0	8.8	74.00	17.45

High Channel: 5795MHz

Full Spectrum

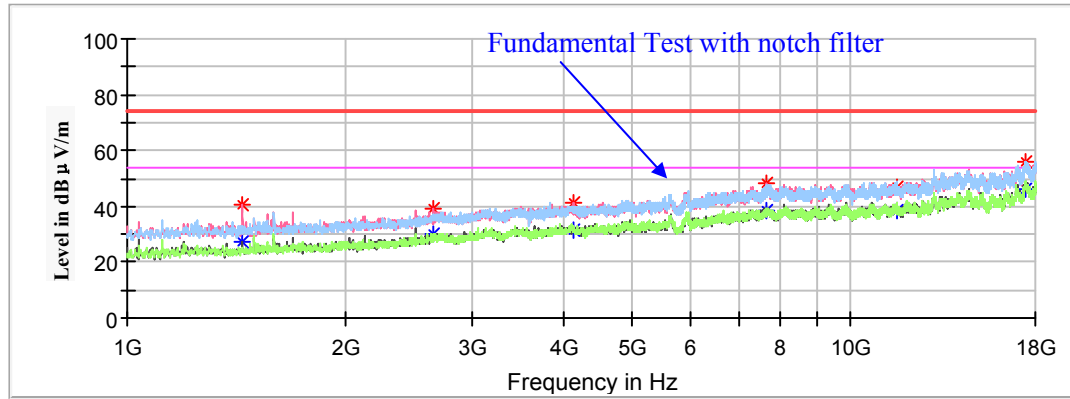

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1443.700000	---	27.54	150.0	V	124.0	-16.7	54.00	26.46
1443.700000	40.57	---	150.0	V	124.0	-16.7	74.00	33.43
2654.100000	39.49	---	150.0	V	187.0	-11.7	68.20	28.71
4136.500000	---	31.55	150.0	V	297.0	-6.8	54.00	22.45
4136.500000	41.50	---	150.0	V	297.0	-6.8	74.00	32.50
7670.800000	---	38.65	150.0	V	231.0	1.3	54.00	15.35
7670.800000	47.99	---	150.0	V	231.0	1.3	74.00	26.01
11590.000000	46.96	---	150.0	V	111.0	3.0	74.00	27.04
11590.000000	---	38.55	150.0	V	111.0	3.0	54.00	15.45
17491.700000	56.19	---	150.0	H	108.0	8.9	68.20	12.01

802.11n-HT40 Mode:


Pre-scan with X,Y and Z axes of orientation, the worst case Y-axis of orientation was recorded

Note:

1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 5755MHz


Full Spectrum

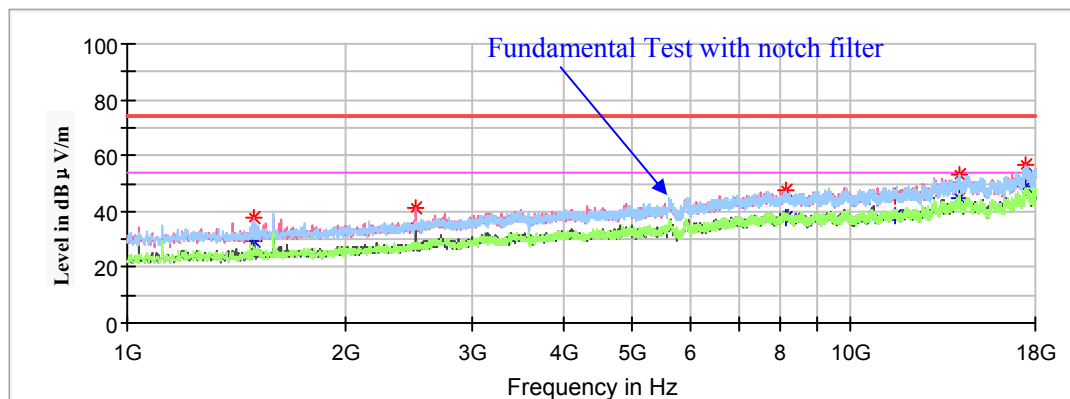

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1498.100000	---	29.30	150.0	V	72.0	-16.4	54.00	24.70
1498.100000	37.98	---	150.0	V	72.0	-16.4	74.00	36.02
2499.400000	---	34.20	150.0	V	283.0	-12.4	54.00	19.80
2499.400000	41.21	---	150.0	V	283.0	-12.4	74.00	32.79
8126.400000	---	37.75	150.0	V	34.0	1.7	54.00	16.25
8126.400000	47.88	---	150.0	V	34.0	1.7	74.00	26.12
11510.000000	---	38.64	150.0	V	231.0	2.8	54.00	15.36
11510.000000	45.62	---	150.0	V	231.0	2.8	74.00	28.38
14141.000000	53.21	---	150.0	H	95.0	6.2	68.20	14.99
17471.300000	56.48	---	150.0	V	324.0	8.8	68.20	11.72

Middle Channel: 5795MHz

Full Spectrum

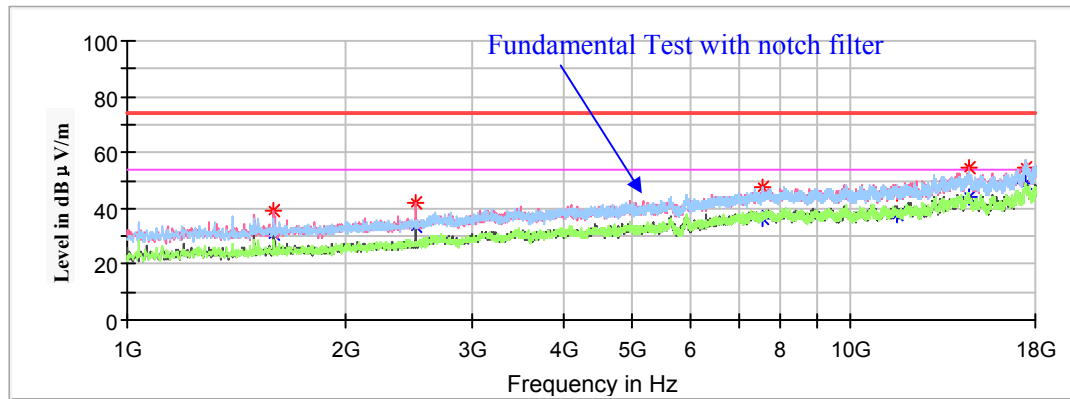


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1593.300000	39.48	---	150.0	V	33.0	-16.0	74.00	34.52
1593.300000	---	30.78	150.0	V	33.0	-16.0	54.00	23.22
2499.400000	41.76	---	150.0	V	283.0	-12.4	74.00	32.24
2499.400000	---	33.66	150.0	V	283.0	-12.4	54.00	20.34
7558.600000	---	36.48	150.0	V	20.0	1.1	54.00	17.52
7558.600000	47.75	---	150.0	V	20.0	1.1	74.00	26.25
11590.000000	45.26	---	150.0	V	58.0	3.0	74.00	28.74
11590.000000	---	37.87	150.0	V	58.0	3.0	54.00	16.13
14569.400000	54.20	---	150.0	V	33.0	6.3	68.20	14.00
17464.500000	54.54	---	150.0	V	0.0	8.8	68.20	13.66

802.11ac80 Mode:

Pre-scan with X,Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded

Note:


1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

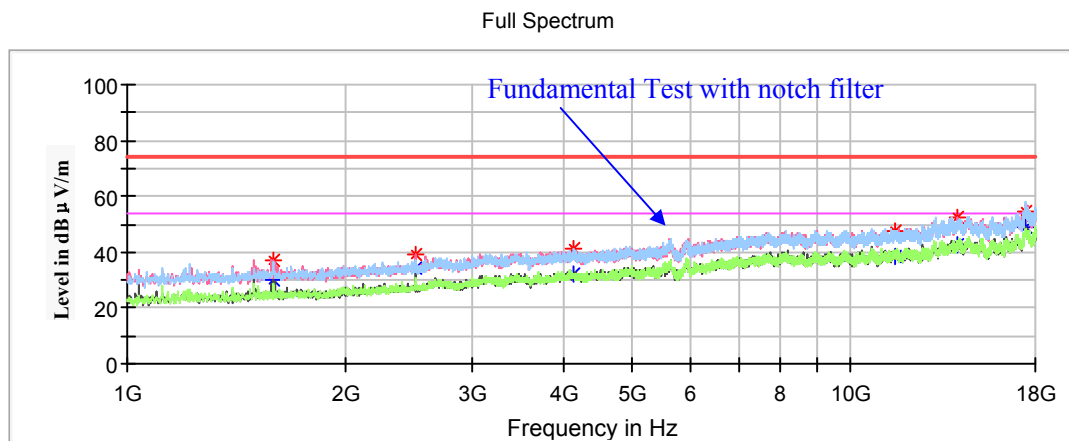Low Channel: 5775MHz


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1591.600000	---	30.34	150.0	V	27.0	-16.0	54.00	23.66
1591.600000	36.93	---	150.0	V	27.0	-16.0	74.00	37.07
2499.400000	---	33.94	150.0	V	284.0	-12.4	54.00	20.06
2499.400000	39.46	---	150.0	V	284.0	-12.4	74.00	34.54
4150.100000	---	31.92	150.0	H	359.0	-6.8	54.00	22.08
4150.100000	41.16	---	150.0	H	359.0	-6.8	74.00	32.84
11550.000000	---	38.66	150.0	V	192.0	2.8	54.00	15.34
11550.000000	47.38	---	150.0	H	354.0	2.8	74.00	26.62
14006.700000	52.54	---	150.0	V	166.0	6.1	68.20	15.66
17471.300000	54.61	---	150.0	V	345.0	8.8	68.20	13.59

18GHz-40GHz(5150-5250MHz Band):

Pre-scan with 802.11a, 802.11ac20, 802.11n-HT20, 802.11ac40, 802.11n-HT40 and 802.11 ac80 modes of operation in the X,Y and Z axes of orientation, the worst case **802.11a mode low channel** in Y-axis of orientation was recorded

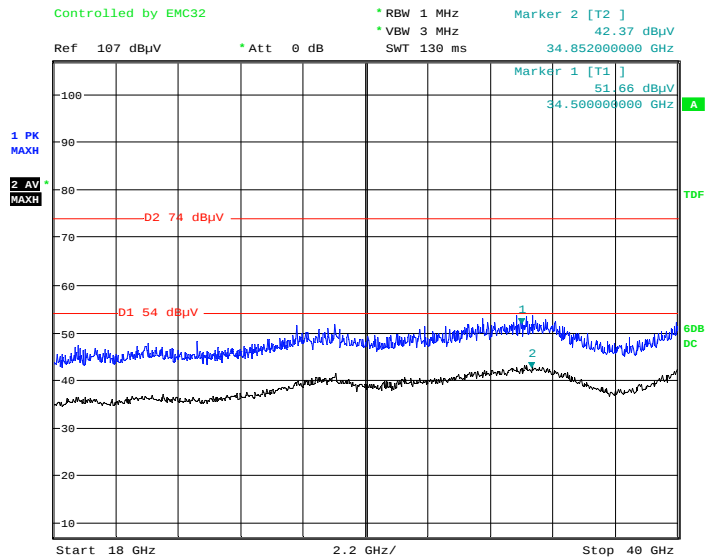Horizontal


Date: 23.NOV.2020 04:24:29

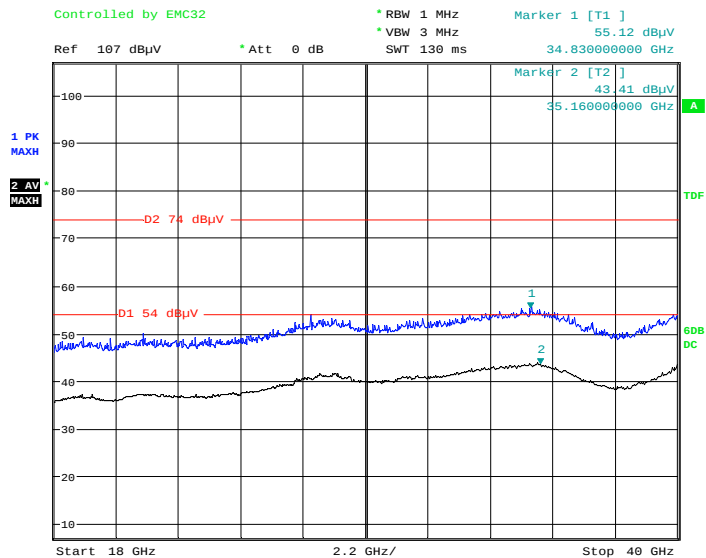Vertical


Date: 23.NOV.2020 04:27:18

18GHz-40GHz(5725-5850MHz Band):

Pre-scan with 802.11a, 802.11ac20, 802.11n-HT20, 802.11ac40, 802.11n-HT40 and 802.11 ac80 modes of operation in the X,Y and Z axes of orientation, the worst case **802.11ac20 mode low channel** in Y-axis of orientation was recorded

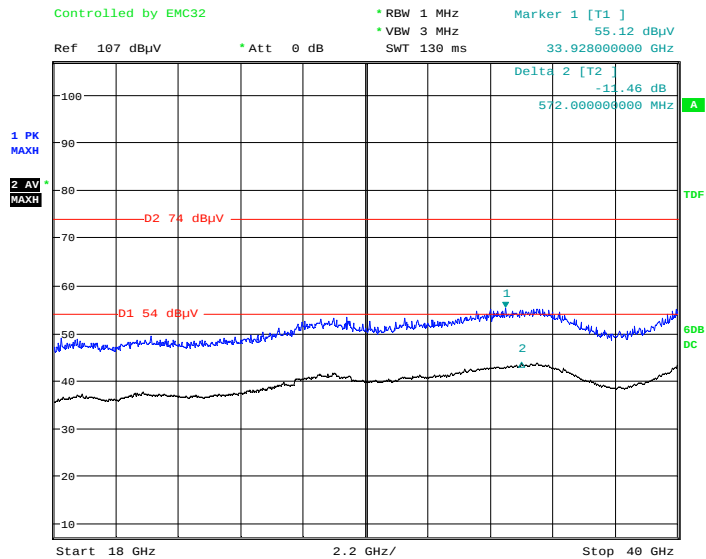Horizontal

Date: 23.NOV.2020 04:30:29

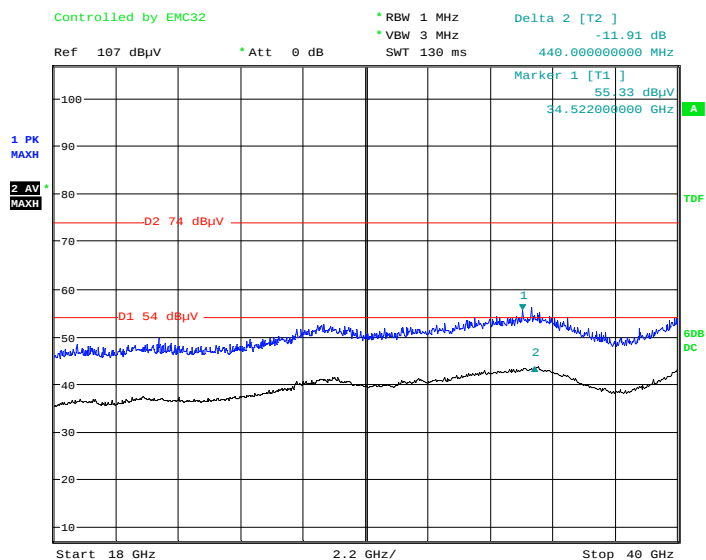Vertical

Date: 23.NOV.2020 04:36:04

Restricted Bands Emissions Test (5150-5250MHz Band):

Note:

1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
2. Corrected Amplitude = Corrected Factor + Reading
3. Margin = Limit - Corrected. Amplitude

802.11a Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5180MHz								
5150.00	54.39	---	150.0	V	91.0	5.2	74.00	19.61
5150.00	---	50.46	150.0	V	91.0	5.2	54.00	3.54
High Channel: 5240MHz								
5350.00	53.61	---	150.0	V	237.0	5.7	74.00	20.39
5350.00	---	50.81	150.0	V	237.0	5.7	54.00	3.19

802.11ac20 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5180MHz								
5150.00	55.12	---	150.0	V	287.0	5.2	74.00	18.88
5150.00	---	50.44	150.0	V	287.0	5.2	54.00	3.56
High Channel: 5240MHz								
5350.00	55.04	---	150.0	V	337.0	5.7	74.00	18.96
5350.00	---	51.58	150.0	V	337.0	5.7	54.00	2.42

802.11n-HT20 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5180MHz								
5150.00	53.49	---	150.0	V	248.0	5.2	74.00	20.51
5150.00	---	50.42	150.0	V	248.0	5.2	54.00	3.58
High Channel: 5240MHz								
5350.00	54.24	---	150.0	V	204.0	5.7	74.00	19.76
5350.00	---	50.65	150.0	V	204.0	5.7	54.00	3.35

802.11ac40 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5190MHz								
5150.00	55.24	---	150.0	V	254.0	5.2	74.00	18.76
5150.00	---	49.64	150.0	V	254.0	5.2	54.00	4.36
High Channel: 5230MHz								
5350.00	54.84	---	150.0	V	16.0	5.7	74.00	19.16
5350.00	---	52.87	150.0	V	16.0	5.7	54.00	1.13

802.11n-HT40 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5190MHz								
5150.00	55.64	---	150.0	V	204.0	5.2	74.00	18.36
5150.00	---	51.00	150.0	V	204.0	5.2	54.00	3.00
High Channel: 5230MHz								
5350.00	54.13	---	150.0	V	322.0	5.7	74.00	19.87
5350.00	---	50.04	150.0	V	322.0	5.7	54.00	3.96

802.11ac80 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Channel: 5210MHz								
5150.00	52.04	---	150.0	V	137.0	5.2	74.00	21.96
5150.00	---	50.60	150.0	V	137.0	5.2	54.00	3.40
5350.00	54.43	---	150.0	V	105.0	5.7	74.00	19.57
5350.00	---	51.12	150.0	V	105.0	5.7	54.00	2.88

Restricted Bands Emissions Test (5725-5850MHz Band):

Note:

1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
2. Corrected Amplitude = Corrected Factor + Reading
3. Margin = Limit - Corrected. Amplitude

802.11a Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5745MHz								
5650.00	53.77	---	150.0	V	353.0	6.4	68.2	14.43
5700.00	53.49	---	150.0	H	338.0	6.5	105.2	51.71
5720.00	63.51	---	150.0	H	350.0	6.5	110.8	47.29
5725.00	66.22	---	150.0	H	0.0	6.5	122.2	55.98
High Channel: 5825MHz								
5850.00	60.27	---	150.0	H	0.0	6.7	122.2	61.93
5855.00	55.71	---	150.0	H	349.0	6.7	110.8	55.09
5875.00	55.19	---	150.0	H	93.0	6.8	105.2	50.01
5925.00	54.33	---	150.0	V	148.0	6.9	68.2	13.87

802.11ac20 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5745MHz								
5650.00	54.79	---	150.0	H	254.0	6.4	68.2	13.41
5700.00	54.65	---	150.0	H	11.0	6.5	105.2	50.55
5720.00	63.41	---	150.0	H	254.0	6.5	110.8	47.39
5725.00	64.11	---	150.0	H	0.0	6.5	122.2	58.09
High Channel: 5825MHz								
5850.00	58.94	---	150.0	H	0.0	6.7	122.2	63.26
5855.00	58.07	---	150.0	H	0.0	6.7	110.8	52.73
5875.00	55.63	---	150.0	V	2.0	6.8	105.2	49.57
5925.00	54.44	---	150.0	H	0.0	6.9	68.2	13.76

802.11n-HT20 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5745MHz								
5650.00	54.49	---	150.0	H	79.0	6.4	68.2	13.71
5700.00	54.36	---	150.0	V	229.0	6.5	105.2	50.84
5720.00	63.77	---	150.0	H	0.0	6.5	110.8	47.03
5725.00	67.64	---	150.0	H	254.0	6.5	122.2	54.56
High Channel: 5825MHz								
5850.00	66.10	---	150.0	H	0.0	6.7	122.2	56.1
5855.00	57.88	---	150.0	H	0.0	6.7	110.8	52.92
5875.00	56.69	---	150.0	V	11.0	6.8	105.2	48.51
5925.00	55.03	---	150.0	H	171.0	6.9	68.2	13.17

802.11ac40 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5755MHz								
5650.00	52.83	---	150.0	H	0.0	6.4	68.2	15.37
5700.00	53.03	---	150.0	V	142.0	6.5	105.2	52.17
5720.00	54.68	---	150.0	H	26.0	6.5	110.8	56.12
5725.00	59.71	---	150.0	H	12.0	6.5	122.2	62.49
High Channel: 5795MHz								
5850.00	56.84	---	150.0	H	5.0	6.7	122.2	65.36
5855.00	55.71	---	150.0	V	261.0	6.7	110.8	55.09
5875.00	55.78	---	150.0	H	155.0	6.8	105.2	49.42
5925.00	54.74	---	150.0	H	46.0	6.9	68.2	13.46

802.11n-HT40 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5755MHz								
5650.00	53.06	---	150.0	H	80.0	6.4	68.2	15.14
5700.00	55.73	---	150.0	V	81.0	6.5	105.2	49.47
5720.00	60.03	---	150.0	H	4.0	6.5	110.8	50.77
5725.00	62.64	---	150.0	H	349.0	6.5	122.2	59.56
High Channel: 5795MHz								
5850.00	53.87	---	150.0	H	19.0	6.7	122.2	68.33
5855.00	56.15	---	150.0	H	256.0	6.7	110.8	54.65
5875.00	55.40	---	150.0	V	352.0	6.8	105.2	49.80
5925.00	53.80	---	150.0	V	147.0	6.9	68.2	14.40

802.11ac80 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Channel: 5775MHz								
5650.00	55.47	---	150.0	H	255.0	6.4	68.2	12.73
5700.00	55.36	---	150.0	H	0.0	6.5	105.2	49.84
5720.00	62.67	---	150.0	H	8.0	6.5	110.8	48.13
5725.00	59.51	---	150.0	H	0.0	6.5	122.2	62.69
5850.00	56.93	---	150.0	H	255.0	6.7	122.2	65.27
5855.00	56.44	---	150.0	H	20.0	6.7	110.8	54.36
5875.00	53.97	---	150.0	H	175.0	6.8	105.2	51.23
5925.00	55.11	---	150.0	H	112.0	6.9	68.2	13.09

FCC §15.407(a) & §15.407(e)–EMISSION BANDWIDTH

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz band is made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure


1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data**Environmental Conditions**

Temperature:	22.9-24.5 °C
Relative Humidity:	46-50 %
ATM Pressure:	101.3-101.5 kPa

The testing was performed by Jack Jiao from 2020-11-18 to 2020-11-22.

Test Result: Compliant

5150-5250 MHz:


Test mode	Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11a	Low	5180	22.545	17.315
	Middle	5200	22.545	17.315
	High	5240	22.184	17.255
802.11ac20	Low	5180	22.605	18.216
	Middle	5200	22.786	18.277
	High	5240	22.545	18.277
802.11n-HT20	Low	5180	22.966	18.277
	Middle	5200	23.206	18.277
	High	5240	22.725	18.216
802.11ac40	Low	5190	43.768	36.313
	High	5230	43.407	36.553
802.11n-HT40	Low	5190	44.128	36.433
	High	5230	44.248	36.433
802.11ac80	/	5210	84.409	74.549

5725-5850MHz:

Test mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
802.11a	Low	5745	16.533	17.154	≥ 0.5
	Middle	5785	16.533	17.154	≥ 0.5
	High	5825	16.593	17.234	≥ 0.5
802.11ac20	Low	5745	17.675	18.277	≥ 0.5
	Middle	5785	17.735	18.277	≥ 0.5
	High	5825	17.735	18.196	≥ 0.5
802.11n-HT20	Low	5745	17.735	18.116	≥ 0.5
	Middle	5785	17.796	18.116	≥ 0.5
	High	5825	17.735	18.196	≥ 0.5
802.11ac40	Low	5755	35.832	36.393	≥ 0.5
	High	5795	35.952	36.393	≥ 0.5
802.11n-HT40	Low	5755	36.042	36.393	≥ 0.5
	High	5795	35.952	36.393	≥ 0.5
802.11ac80	/	5775	75.511	74.790	≥ 0.5

Note: No transmitted signal in the 99% bandwidth extends into the U-NII-2A and U-NII-2C band.

802.11a mode, 5180MHz

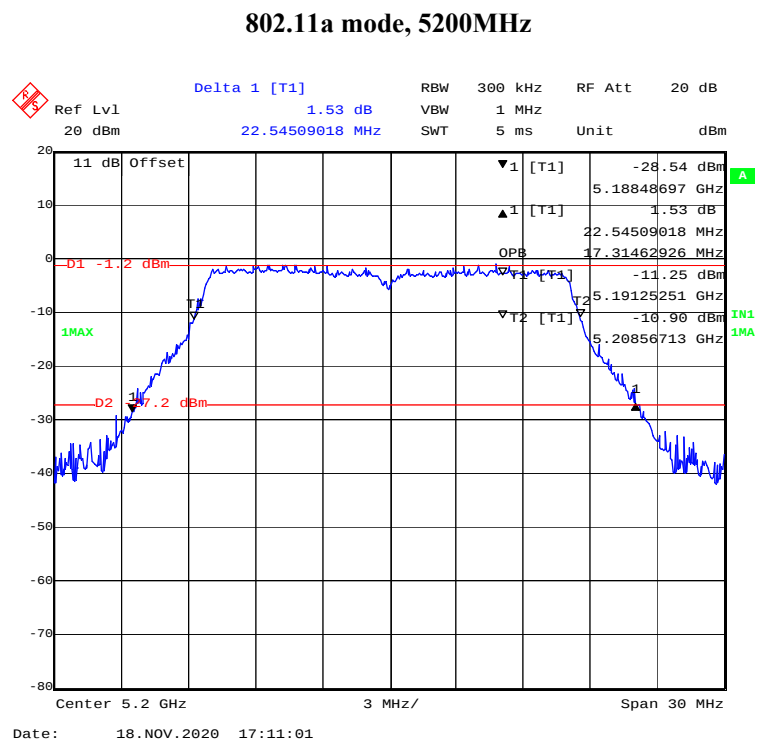

Delta 1 [T1]

Ref Lvl 20 dBm

1.00 dB

22.18436874 MHz

RBW 300 kHz

RF Att 20 dB

VBW 1 MHz

SWT 5 ms

Unit dBm

11 dB Offset

11 dB

D1 -2.31 dBm

1MAX

D2 -28.31 dBm

T1

T2

OPB

IN1

1MA

▼1 [T1] -29.49 dBm

▲1 [T1] 1.00 dB

5.22872745 GHz

22.18436874 MHz

17.25450902 MHz

▼T1 [T1] -12.87 dBm

5.23131263 GHz

▼T2 [T1] -12.93 dBm

5.24856713 GHz

Center 5.24 GHz

3 MHz/

Span 30 MHz

Date: 18. NOV. 2020 17:12:09

Ref Lvl 20 dBm

Delta 1 [T1] 2.22 dB

RBW 300 kHz

RF Att 20 dB

VBW 1 MHz

SWT 5 ms

Unit dBm

11 dB Offset

D1 -1.19 dBm

1MAX

D2 -17.19 dBm

T1

T2

T3

▼1 [T1]

▲1 [T1]

OPB

▼T1 [T1]

▼T2 [T1]

5.16848697 GHz

22.60521042 MHz

18.21643287 MHz

-10.46 dBm

5.17083166 GHz

-9.98 dBm

5.18904810 GHz

Center 5.18 GHz

3 MHz/

Span 30 MHz

Date: 22.NOV.2020 08:19:30

Delta 1 [T1]
1.32 dB

Ref Lvl 20 dBm
20 dBm

RBW 300 kHz
1 MHz

VBW 1 MHz
5 ms

SWT Unit dBm

11 dB Offset

-29.25 dBm
5.18854709 GHz

1.32 dB
22.78557114 MHz

OPB 18.27655311 MHz

-11.17 dBm
5.19083166 GHz

-11.25 dBm
5.20910822 GHz

-2.34 dBm
1.32 dB

1.32 dB

IN1 1MA

Center 5.2 GHz
3 MHz/
Span 30 MHz

Date: 22. NOV. 2020 08:20:47

Delta 1 [T1] 1.23 dB
 Ref Lvl 20 dBm
 RBW 300 kHz
 RF Att 20 dB
 Span 30 MHz
 Center 5.24 GHz
 3 MHz/

11 dB Offset
 5.22860721 GHz
 5.24509018 MHz
 5.23083166 GHz
 5.24910822 GHz
 -30.19 dBm
 1.23 dB
 22.54509018 MHz
 18.27655311 MHz
 -12.00 dBm
 -11.73 dBm
 -3.1 dBm
 -9.1 dBm
 IN1 1MA
 IN2 1MA

Date: 22.NOV.2020 08:21:48

Delta 1 [T1] 1.36 dB

Ref Lvl 20 dBm

22.96593186 MHz

RBW 300 kHz

VBW 1 MHz

SWT 5 ms

RF Att 20 dB

Unit dBm

11 dB Offset

D1 -2.07 dBm

1MAX

D2 -28.07 dBm

T1

▼1 [T1] -29.71 dBm

5.16824649 GHz

▲1 [T1] 1.36 dB

22.96593186 MHz

OPB

▼1 [T1] -10.67 dBm

5.17083166 GHz

▼12 [T1] -10.62 dBm

5.18910822 GHz

IN1 1MA

Center 5.18 GHz

3 MHz/

Span 30 MHz

Date: 22. NOV. 2020 08:24:47

[illegible]


Delta 1 [T1]
 Ref Lvl 1.76 dB
 20 dBm
 20.72545090 MHz

RBW 300 kHz
 VBW 1 MHz
 SWT 5 ms
 RF Att 20 dB
 Unit dBm


11 dB Offset
 -D1 -3.06 dBm
 1MAX
 D2 -9.06 dBm
 T1
 T2
 T3
 T4
 T5
 T6
 T7
 T8
 T9
 T10
 T11
 T12
 T13
 T14
 T15
 T16
 T17
 T18
 T19
 T20
 T21
 T22
 T23
 T24
 T25
 T26
 T27
 T28
 T29
 T30
 T31
 T32
 T33
 T34
 T35
 T36
 T37
 T38
 T39
 T40
 T41
 T42
 T43
 T44
 T45
 T46
 T47
 T48
 T49
 T50
 T51
 T52
 T53
 T54
 T55
 T56
 T57
 T58
 T59
 T60
 T61
 T62
 T63
 T64
 T65
 T66
 T67
 T68
 T69
 T70
 T71
 T72
 T73
 T74
 T75
 T76
 T77
 T78
 T79
 T80
 T81
 T82
 T83
 T84
 T85
 T86
 T87
 T88
 T89
 T90
 T91
 T92
 T93
 T94
 T95
 T96
 T97
 T98
 T99
 T100
 T101
 T102
 T103
 T104
 T105
 T106
 T107
 T108
 T109
 T110
 T111
 T112
 T113
 T114
 T115
 T116
 T117
 T118
 T119
 T120
 T121
 T122
 T123
 T124
 T125
 T126
 T127
 T128
 T129
 T130
 T131
 T132
 T133
 T134
 T135
 T136
 T137
 T138
 T139
 T140
 T141
 T142
 T143
 T144
 T145
 T146
 T147
 T148
 T149
 T150
 T151
 T152
 T153
 T154
 T155
 T156
 T157
 T158
 T159
 T160
 T161
 T162
 T163
 T164
 T165
 T166
 T167
 T168
 T169
 T170
 T171
 T172
 T173
 T174
 T175
 T176
 T177
 T178
 T179
 T180
 T181
 T182
 T183
 T184
 T185
 T186
 T187
 T188
 T189
 T190
 T191
 T192
 T193
 T194
 T195
 T196
 T197
 T198
 T199
 T200
 T201
 T202
 T203
 T204
 T205
 T206
 T207
 T208
 T209
 T210
 T211
 T212
 T213
 T214
 T215
 T216
 T217
 T218
 T219
 T220
 T221
 T222
 T223
 T224
 T225
 T226
 T227
 T228
 T229
 T230
 T231
 T232
 T233
 T234
 T235
 T236
 T237
 T238
 T239
 T240
 T241
 T242
 T243
 T244
 T245
 T246
 T247
 T248
 T249
 T250
 T251
 T252
 T253
 T254
 T255
 T256
 T257
 T258
 T259
 T260
 T261
 T262
 T263
 T264
 T265
 T266
 T267
 T268
 T269
 T270
 T271
 T272
 T273
 T274
 T275
 T276
 T277
 T278
 T279
 T280
 T281
 T282
 T283
 T284
 T285
 T286
 T287
 T288
 T289
 T290
 T291
 T292
 T293
 T294
 T295
 T296
 T297
 T298
 T299
 T300
 T301
 T302
 T303
 T304
 T305
 T306
 T307
 T308
 T309
 T310
 T311
 T312
 T313
 T314
 T315
 T316
 T317
 T318
 T319
 T320
 T321
 T322
 T323
 T324
 T325
 T326
 T327
 T328
 T329
 T330
 T331
 T332
 T333
 T334
 T335
 T336
 T337
 T338
 T339
 T340
 T341
 T342
 T343
 T344
 T345
 T346
 T347
 T348
 T349
 T350
 T351
 T352
 T353
 T354
 T355
 T356
 T357
 T358
 T359
 T360
 T361
 T362
 T363
 T364
 T365
 T366
 T367
 T368
 T369
 T370
 T371
 T372
 T373
 T374
 T375
 T376
 T377
 T378
 T379
 T380
 T381
 T382
 T383
 T384
 T385
 T386
 T387
 T388
 T389
 T390
 T391
 T392
 T393
 T394
 T395
 T396
 T397
 T398
 T399
 T400
 T401
 T402
 T403
 T404
 T405
 T406
 T407
 T408
 T409
 T410
 T411
 T412
 T413
 T414
 T415
 T416
 T417
 T418
 T419
 T420
 T421
 T422
 T423
 T424
 T425
 T426
 T427
 T428
 T429
 T430
 T431
 T432
 T433
 T434
 T435
 T436
 T437
 T438
 T439
 T440
 T441
 T442
 T443
 T444
 T445
 T446
 T447
 T448
 T449
 T450
 T451
 T452
 T453
 T454
 T455
 T456
 T457
 T458
 T459
 T460
 T461
 T462
 T463
 T464
 T465
 T466
 T467
 T468
 T469
 T470
 T471
 T472
 T473
 T474
 T475
 T476
 T477
 T478
 T479
 T480
 T481
 T482
 T483
 T484
 T485
 T486
 T487
 T488
 T489
 T490
 T491
 T492
 T493
 T494
 T495
 T496
 T497
 T498
 T499
 T500
 T501
 T502
 T503

Delta 1 [T1] 1.40 dB
 Ref Lvl 20 dBm
 20 dBm 43.76753507 MHz
 RBW 500 kHz VBW 2 MHz
 5 ms Unit dBm
 11 dB Offset
 -31.07 dBm
 5.16745491 GHz
 1.40 dB
 43.76753507 MHz
 36.31262525 MHz
 OPB
 -10.68 dBm
 T1 [T1]
 18.17178357 GHz
 -9.59 dBm
 T2 [T1]
 5.20809619 GHz
 -3.71 dBm
 1MAX
 1
 1
 IN1 1MA
 Center 5.19 GHz 6 MHz/ Span 60 MHz
 Date: 18. NOV. 2020 14:51:02

802.11ac40 mode, 5230MHz

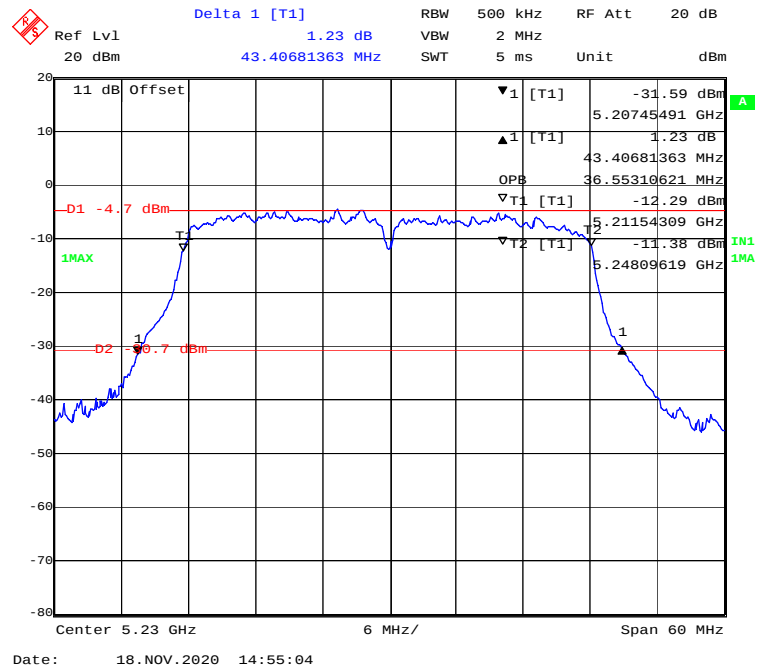

802.11n-HT40 mode, 5190MHz

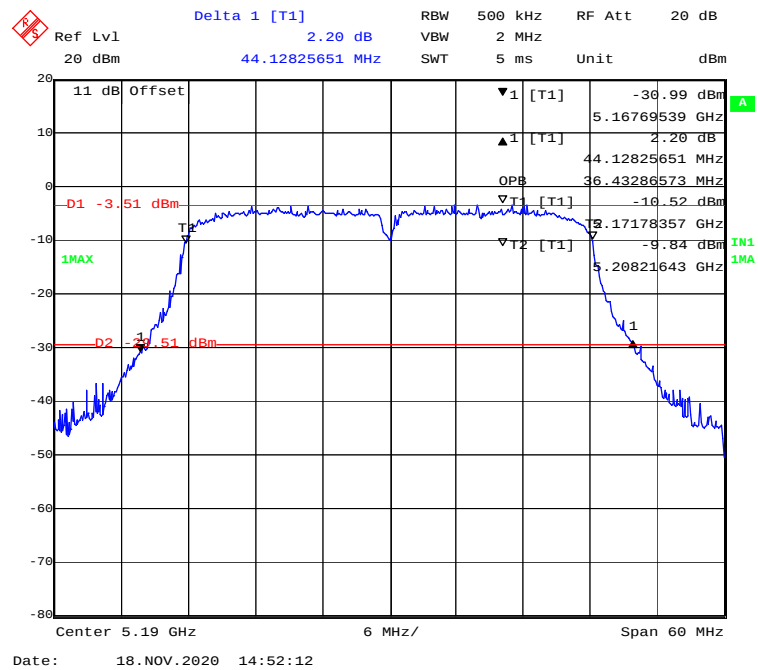

Delta 1 [T1] 1.66 dB

Ref Lvl 20 dBm

44.24849699 MHz

RBW 500 kHz

VBW 2 MHz

SWT 5 ms

Unit dBm

11 dB Offset

-30.84 dBm

1MAX

▼1 [T1] -30.97 dBm

▲1 [T1] 1.66 dB

OPB 44.24849699 MHz

▽T1 [T1] -10.76 dBm

▽T2 [T1] -11.46 dBm

5.20757515 GHz

36.43286573 MHz

5.2166333 GHz

5.24809619 GHz

IN1 1MA

Center 5.23 GHz

6 MHz/

Span 60 MHz


Date: 18. NOV. 2020 14:53:58

[illegible]


5725-5850 MHz Band

6dB Bandwidth


802.11a mode, 5745MHz

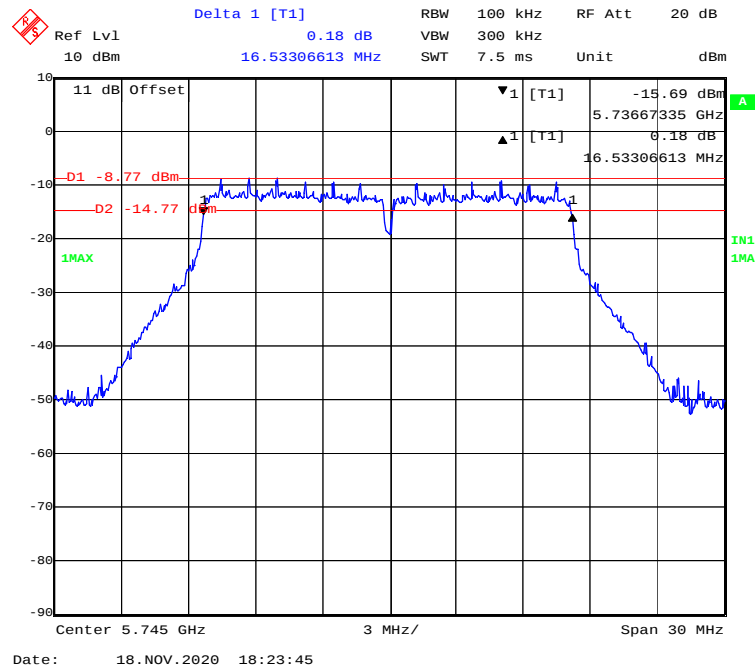


802.11a mode, 5785MHz

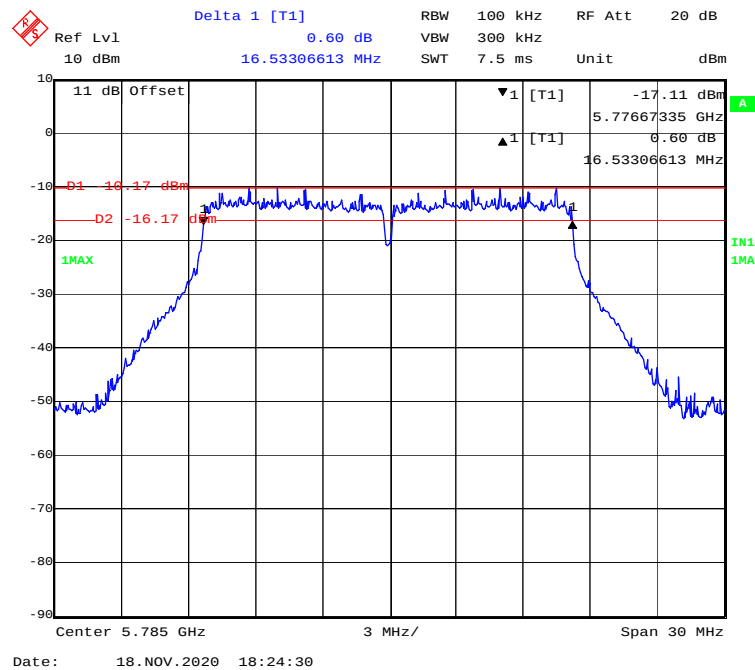


802.11a mode, 5825MHz

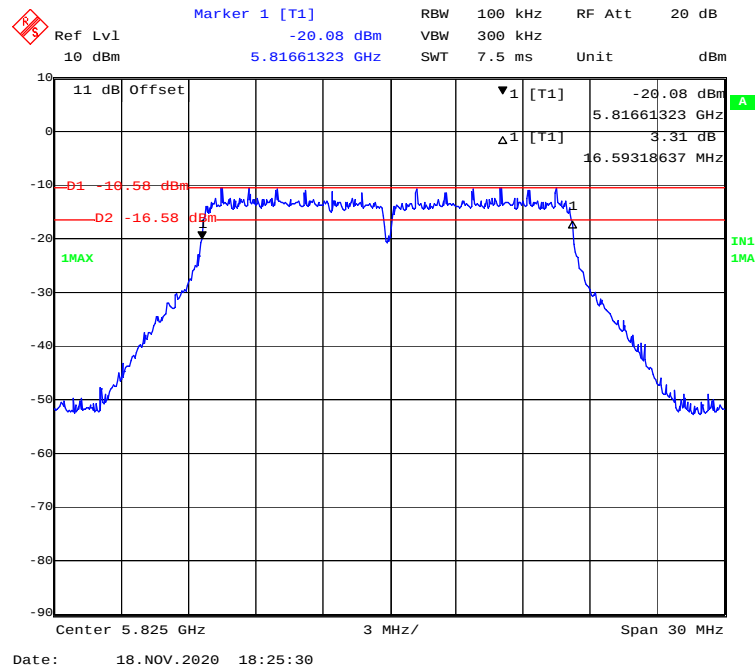


802.11ac20 mode, 5745MHz

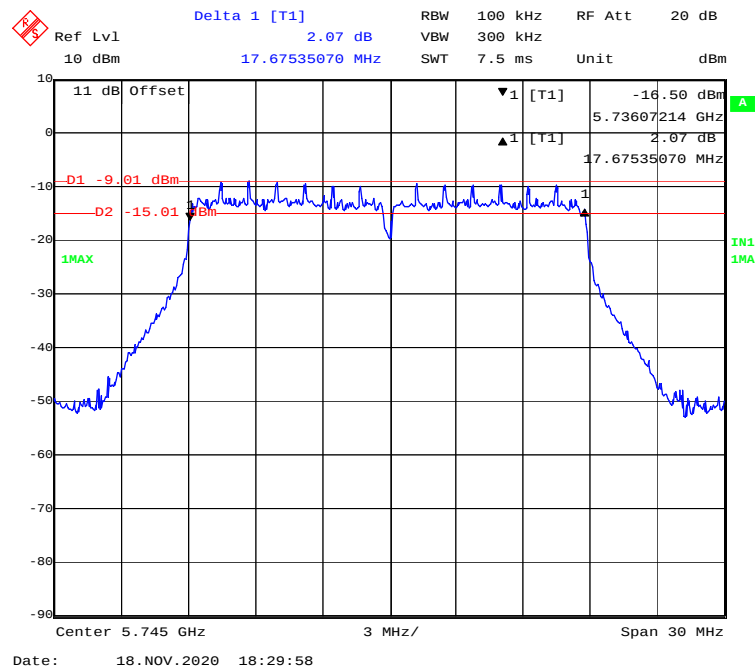


802.11ac20 mode, 5785MHz

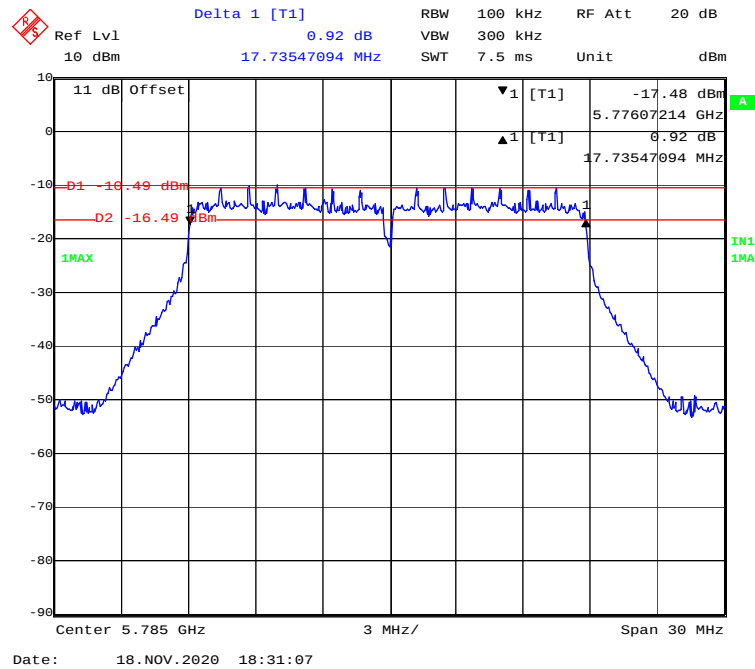


802.11ac20 mode, 5825MHz

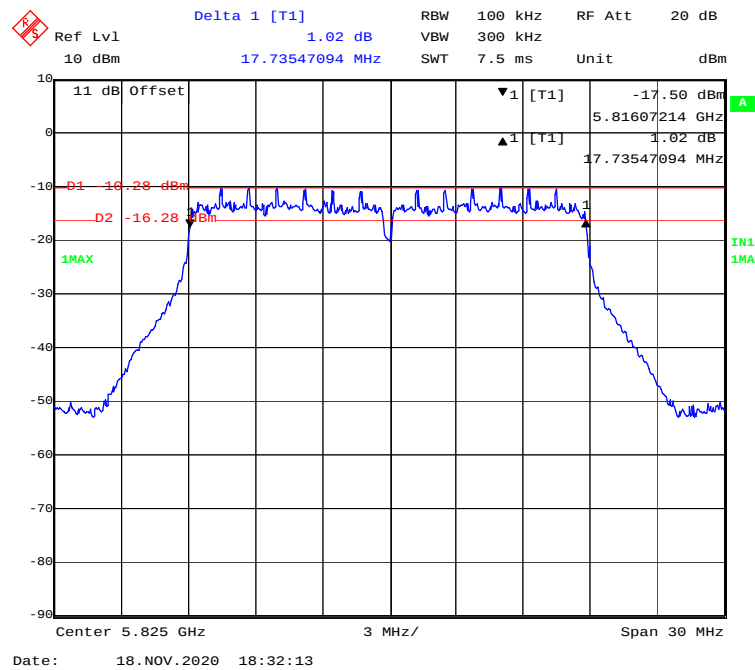


802.11n-HT20 mode, 5745MHz

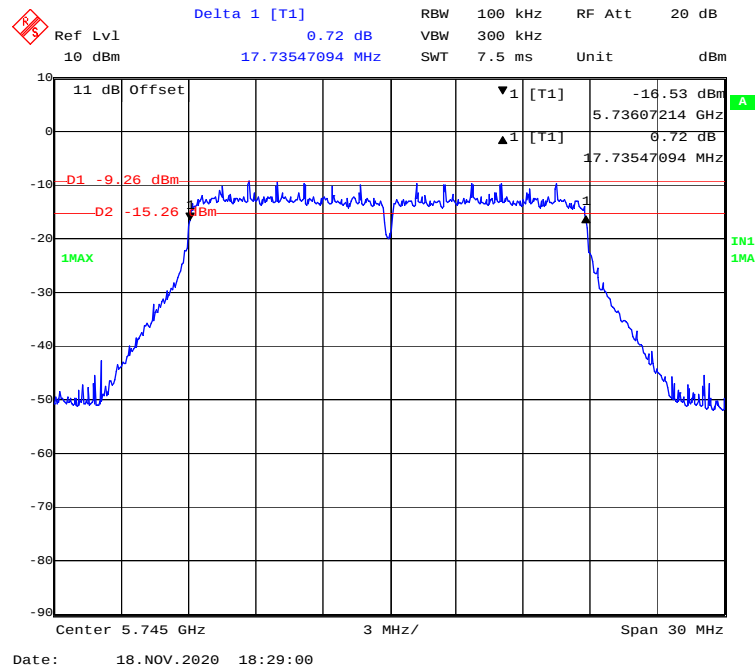


802.11n-HT20 mode, 5785MHz

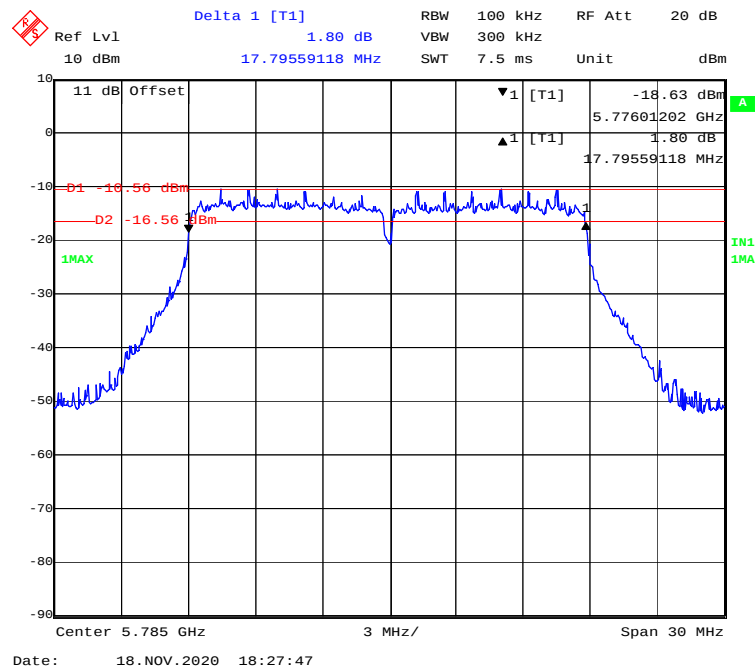


802.11n-HT20 mode, 5825MHz

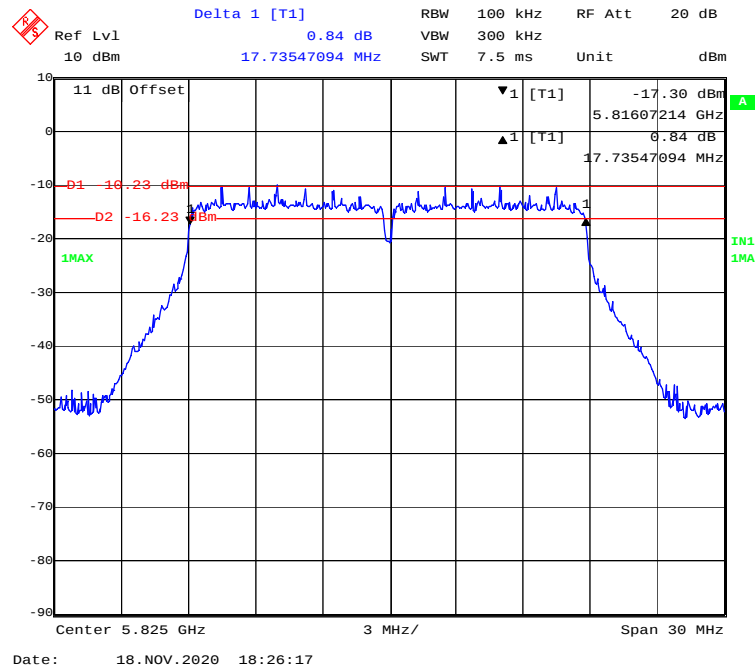


802.11ac40 mode, 5755MHz

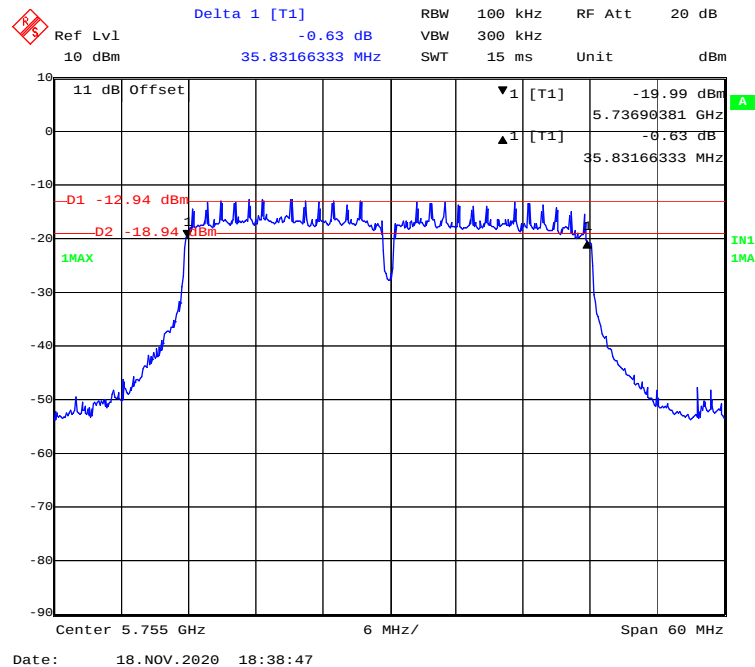

802.11ac40 mode, 5795MHz

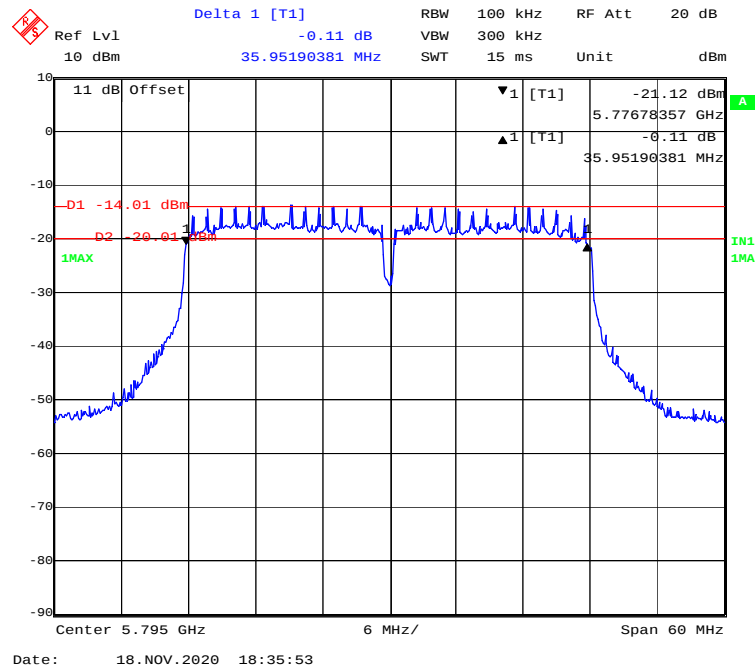

802.11n-HT40 mode, 5755MHz

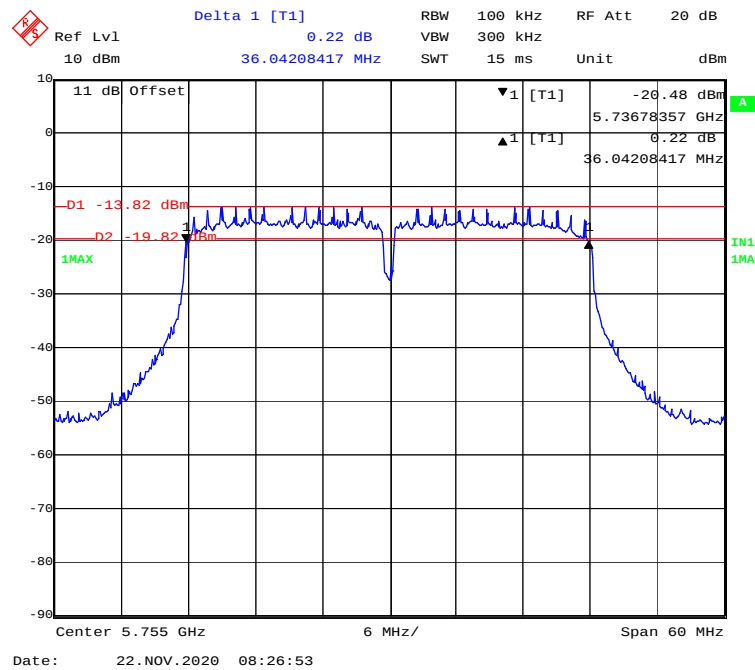

Ref Lvl 10 dBm Delta 1 [T1] 0.20 dB RBW 100 kHz RF Att 20 dB VBW 300 kHz SWT 15 ms Unit dBm

11 dB Offset ▼1 [T1] -21.09 dBm 5.77678357 GHz ▲1 [T1] 0.20 dB 35.95190381 MHz

-D1 -14.28 dBm D2 -20.28 dBm 1MAX IN1 1MAX

Center 5.795 GHz 6 MHz/ Span 60 MHz

Date: 18. NOV. 2020 18:35:01

Ref Lvl 10 dBm Delta 1 [T1] 1.80 dB RBW 100 kHz RF Att 20 dB
 10 dBm 75.51102204 MHz SWT 30 ms Unit dBm

11 dB Offset

▼1 [T1] -23.86 dBm
 5.73712425 GHz

▲1 [T1] 1.80 dB
 75.51102204 MHz

-D1 -15.83 dBm
 -D2 -21.83 dBm
 1MAX


IN1 1MAX

Center 5.775 GHz 12 MHz/ Span 120 MHz


Date: 18. NOV. 2020 18:19:59

99% Occupied Bandwidth:


802.11a mode, 5745MHz

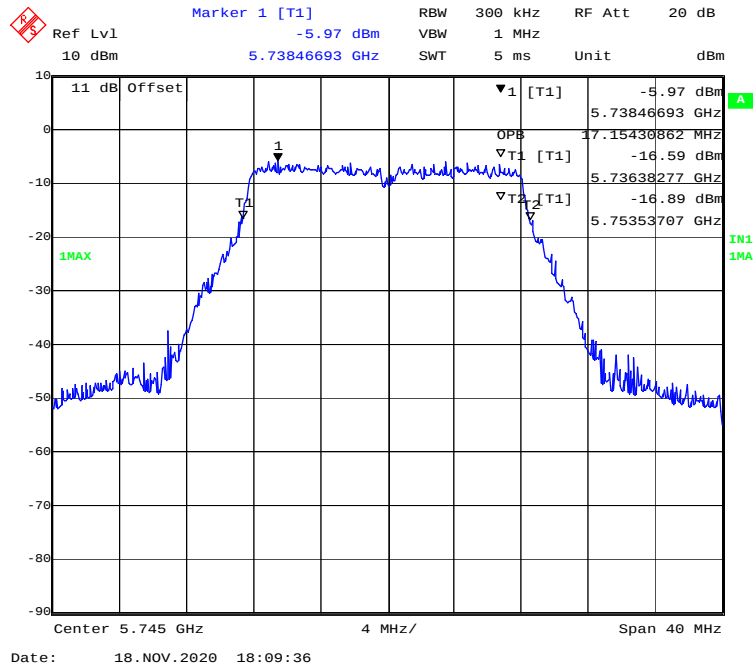


802.11a mode, 5785MHz

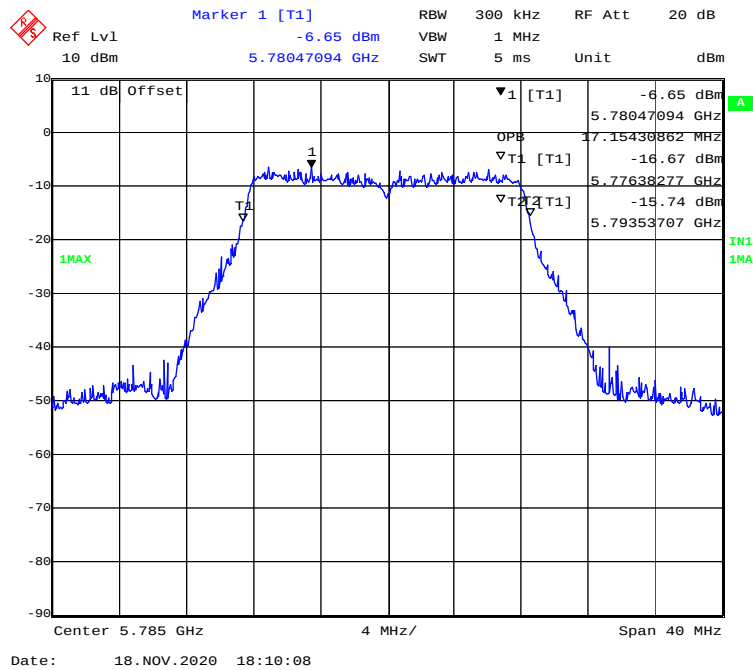


802.11a mode, 5825MHz

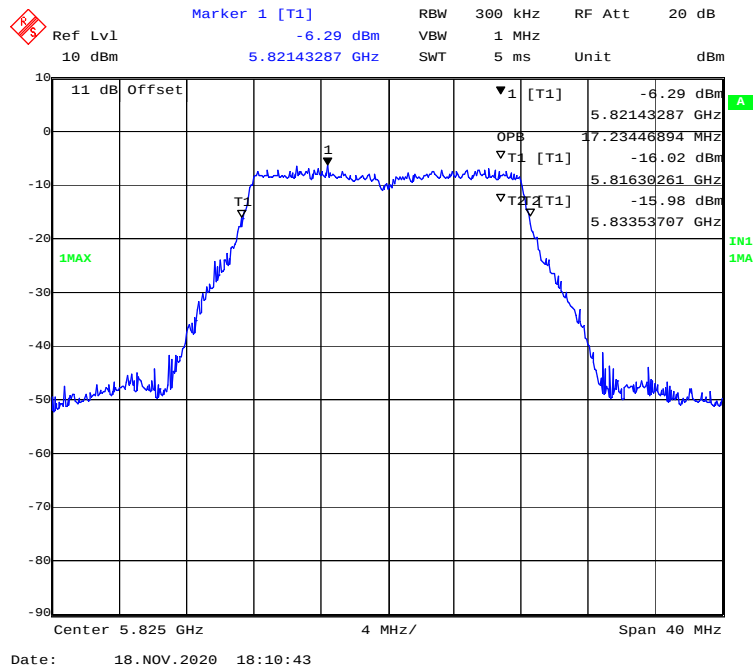


802.11ac20 mode, 5745MHz

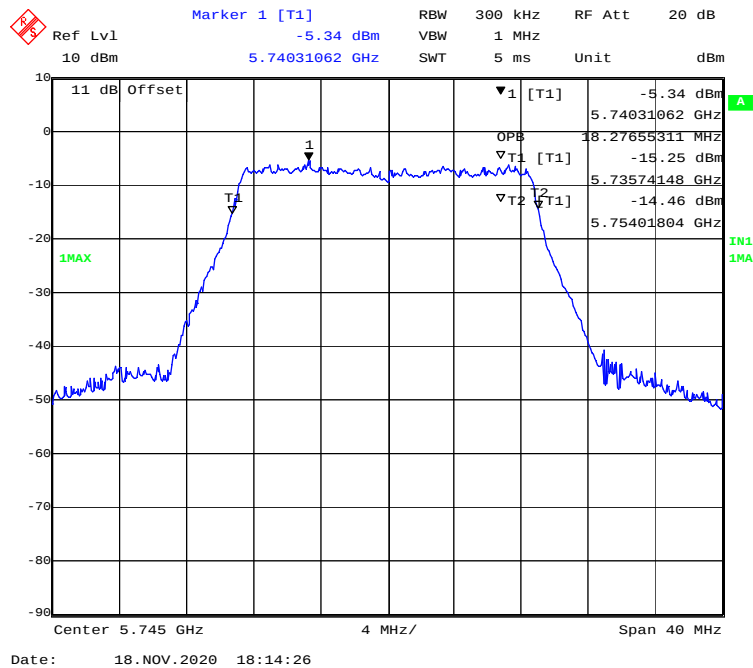


802.11ac20 mode, 5785MHz

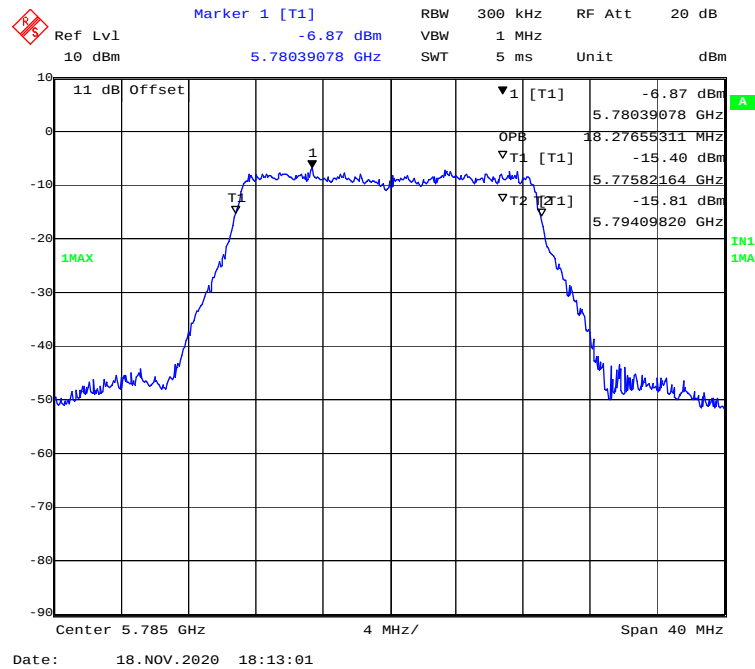


802.11ac20 mode, 5825MHz

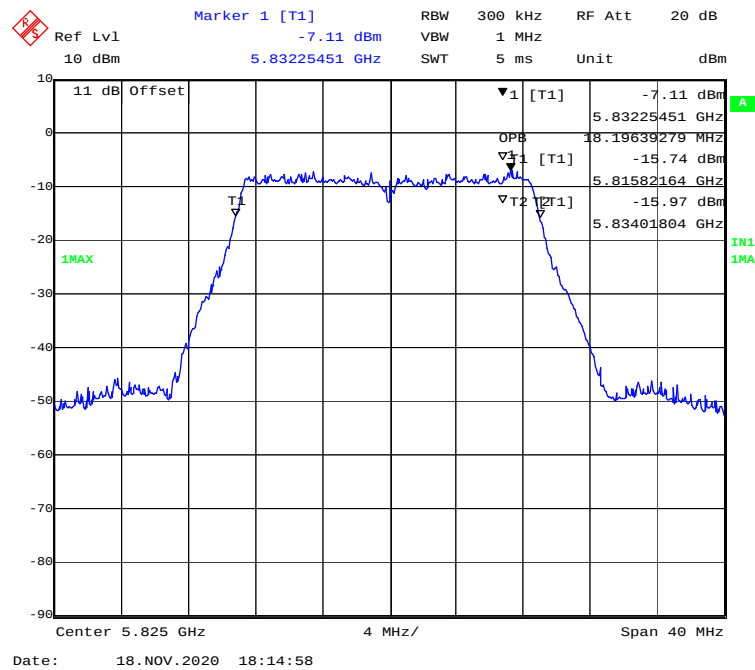

802.11n-HT20 mode, 5745MHz

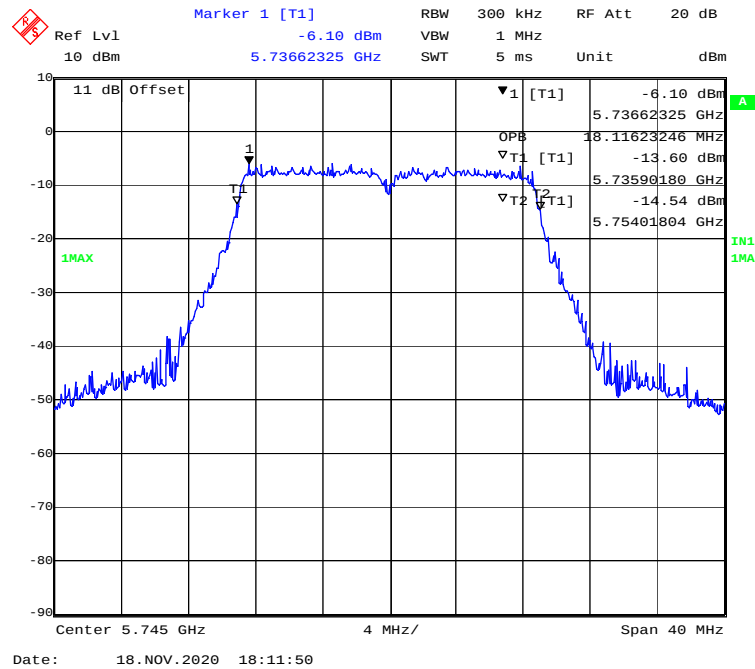

802.11n-HT20 mode, 5785MHz

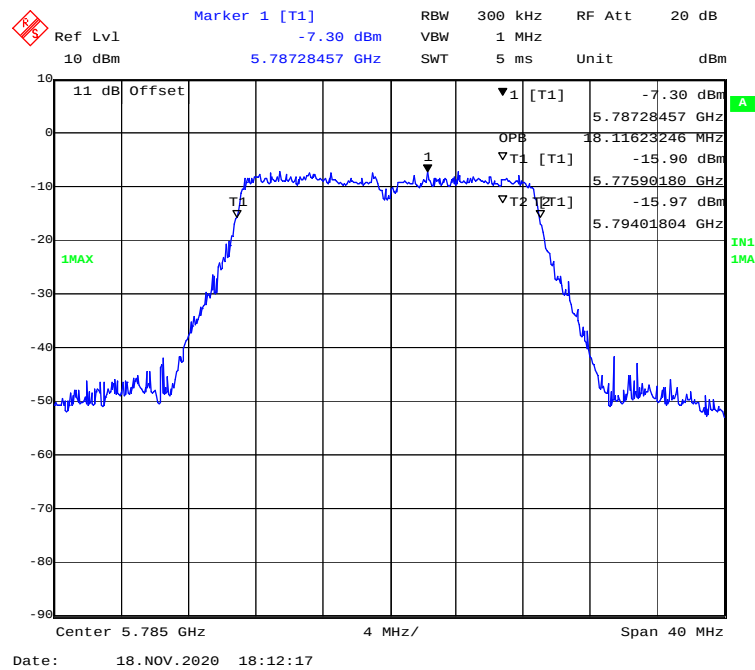

Ref Lvl 10 dBm
11 dB Offset
Center 5.825 GHz
Span 40 MHz
RBW 300 kHz
VBW 1 MHz
SWT 5 ms
RF Att 20 dB
Unit dBm

Marker 1 [T1]
 -7.12 dBm
 5.82792585 GHz

Marker 2 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 3 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 4 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 5 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 6 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 7 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 8 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 9 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 10 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 11 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 12 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 13 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 14 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 15 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 16 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 17 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 18 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 19 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 20 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 21 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 22 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 23 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 24 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 25 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 26 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 27 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 28 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 29 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 30 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 31 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 32 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 33 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 34 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 35 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 36 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 37 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 38 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 39 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 40 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 41 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 42 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 43 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 44 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 45 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 46 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 47 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 48 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 49 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 50 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 51 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 52 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 53 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 54 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 55 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 56 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 57 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 58 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 59 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 60 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 61 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 62 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 63 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 64 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 65 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 66 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 67 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 68 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 69 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 70 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 71 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 72 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 73 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 74 [T1]
 -14.39 dBm
 5.83401804 GHz

Marker 75 [T1]
 -16.16 dBm
 5.81582164 GHz

Marker 76 [T1]
 -18.19639279 MHz
 5.82792585 GHz

Marker 77 [T1]</

Ref Lvl 10 dBm

Marker 1 [T1] -7.69 dBm

RBW 500 kHz

RF Att 20 dB

SWT 5 ms

Unit dBm

11 dB Offset

▼1 [T1] -7.69 dBm

5.75235471 GHz

OPB 36.39278557 MHz

▽T1 [T1] -15.21 dBm

5.73664329 GHz

▽T2 [T1] -14.59 dBm

5.77303607 GHz

1MAX

IN1 1MA


Center 5.755 GHz

8 MHz/


Span 80 MHz

Date: 18. NOV. 2020 18:06:48


802.11ac40 mode, 5795MHz

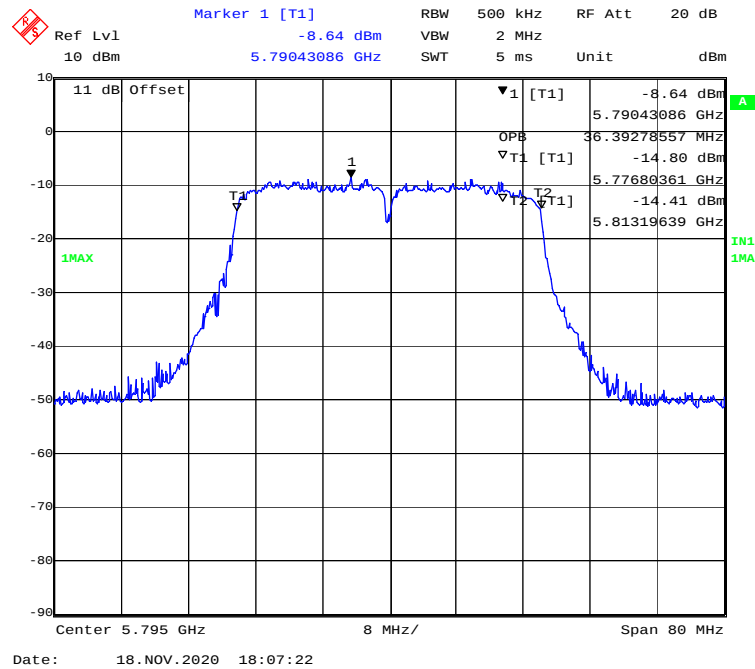


802.11n-HT40 mode, 5755MHz

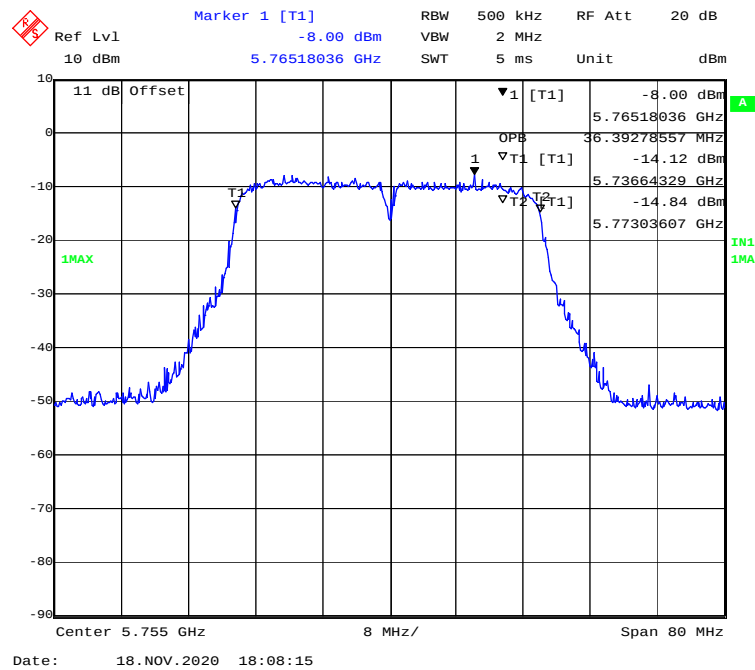

802.11n-HT40 mode, 5795MHz

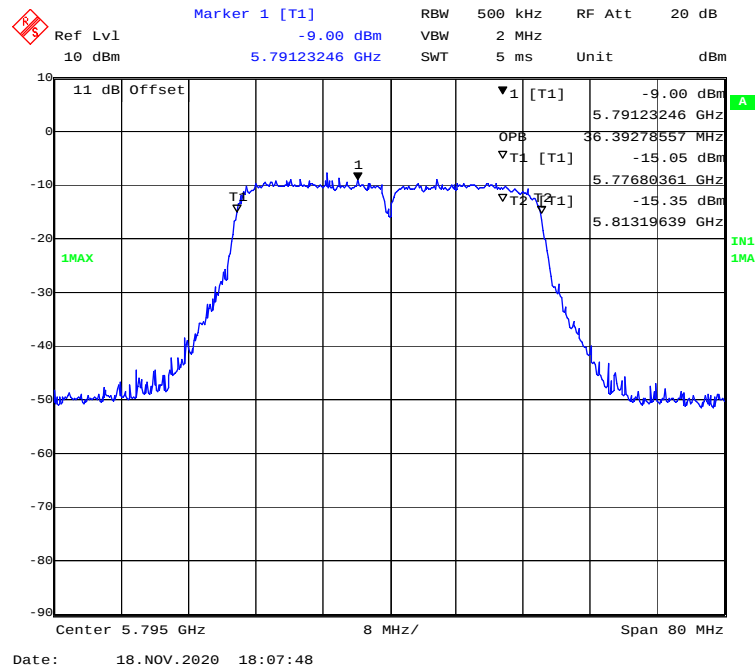

802.11n-ac80 mode, 5775MHz

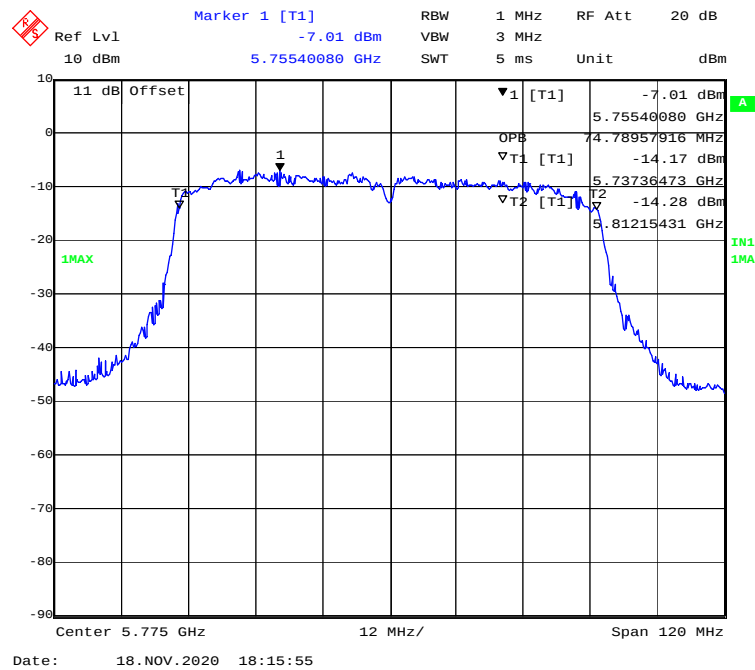

FCC §15.407(a) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER**Applicable Standard**

According to §15.407(a)(1)


(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to §15.407(a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data**Environmental Conditions**

Temperature:	24.2 °C
Relative Humidity:	67 %
ATM Pressure:	101.3 kPa

The testing was performed by Jack Jiao on 2020-11-18.

Test Mode: Transmitting

Test mode	Band	Frequency (MHz)	Average Conducted Output Power (dBm)	Limit (dBm)	Result
802.11a	5150-5250 MHz	5180	14.48	24	PASS
		5200	14.36	24	PASS
		5240	12.67	24	PASS
802.11ac20	5150-5250 MHz	5180	14.28	24	PASS
		5200	14.36	24	PASS
		5240	12.64	24	PASS
802.11n-HT20	5150-5250 MHz	5180	14.37	24	PASS
		5200	14.30	24	PASS
		5240	12.62	24	PASS
802.11ac40	5150-5250 MHz	5190	13.33	24	PASS
		5230	12.06	24	PASS
802.11n-HT40	5150-5250 MHz	5190	13.56	24	PASS
		5230	12.48	24	PASS
802.11ac80	5150-5250 MHz	5210	12.94	24	PASS

Test mode	Band	Frequency (MHz)	Average Conducted Output Power (dBm)	Limit (dBm)	Result
802.11a	5725-5850 MHz	5745	10.51	30	PASS
		5785	9.72	30	PASS
		5825	9.87	30	PASS
802.11ac20	5725-5850 MHz	5745	10.73	30	PASS
		5785	9.86	30	PASS
		5825	9.61	30	PASS
802.11n-HT20	5725-5850 MHz	5745	10.58	30	PASS
		5785	10.21	30	PASS
		5825	9.01	30	PASS
802.11ac40	5725-5850 MHz	5755	9.34	30	PASS
		5795	8.51	30	PASS
802.11n-HT40	5725-5850 MHz	5755	9.37	30	PASS
		5795	9.05	30	PASS
802.11ac80	5725-5850 MHz	5775	8.89	30	PASS

Note: The maximum antenna gain is -0.24 dBi.

FCC §15.407(a) (1) (3) - POWER SPECTRAL DENSITY

Applicable Standard

According to §15.407(a) (1)

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to §15.407(a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

The measurements are base on FCC KDB 789033 D02 General UNII Test Proceдыres New Rules v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices section F: Maximum power spectral density (PPSD)

Test Data

Environmental Conditions

Temperature:	23.3 °C
Relative Humidity:	50 %
ATM Pressure:	101.6 kPa

The testing was performed by Jack Jiao on 2020-11-18.

Test Mode: Transmitting

5150MHz-5250MHz:

Mode	Channel	Frequency (MHz)	PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11a	Low	5180	-2.00	11	PASS
	Middle	5200	-2.77	11	PASS
	High	5240	-4.87	11	PASS
802.11ac20	Low	5180	-2.26	11	PASS
	Middle	5200	-2.83	11	PASS
	High	5240	-5.20	11	PASS
802.11n-HT20	Low	5180	-2.15	11	PASS
	Middle	5200	-3.03	11	PASS
	High	5240	-4.96	11	PASS
802.11ac40	Low	5190	-6.38	11	PASS
	High	5230	-8.17	11	PASS
802.11n-HT40	Low	5190	-6.28	11	PASS
	High	5230	-8.42	11	PASS
802.11ac80	/	5210	-9.72	11	PASS

5725MHz-5850MHz:


Mode	Channel	Frequency (MHz)	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11a	Low	5745	-9.46	30	PASS
	Middle	5785	-10.61	30	PASS
	High	5825	-10.63	30	PASS
802.11ac20	Low	5745	-9.61	30	PASS
	Middle	5785	-9.68	30	PASS
	High	5825	-9.89	30	PASS
802.11n-HT20	Low	5745	-9.54	30	PASS
	Middle	5785	-10.41	30	PASS
	High	5825	-10.11	30	PASS
802.11ac40	Low	5755	-12.25	30	PASS
	High	5795	-13.63	30	PASS
802.11n-HT40	Low	5755	-13.56	30	PASS
	High	5795	-14.09	30	PASS
802.11ac80	/	5775	-15.95	30	PASS

Note:


The maximum antenna gain is -0.24 dBi.

5150MHz-5250MHz Band:


802.11a mode, Power spectral density-5180MHz

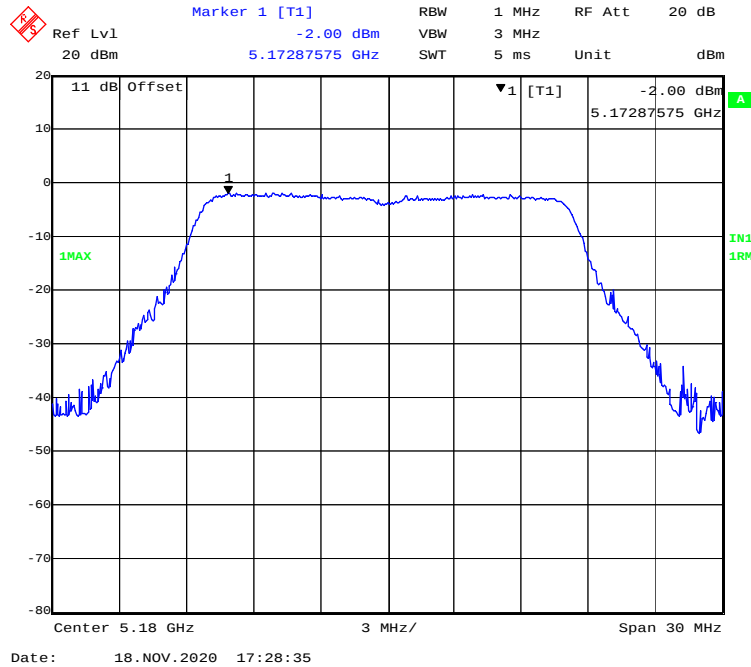


802.11a mode, Power spectral density-5200MHz

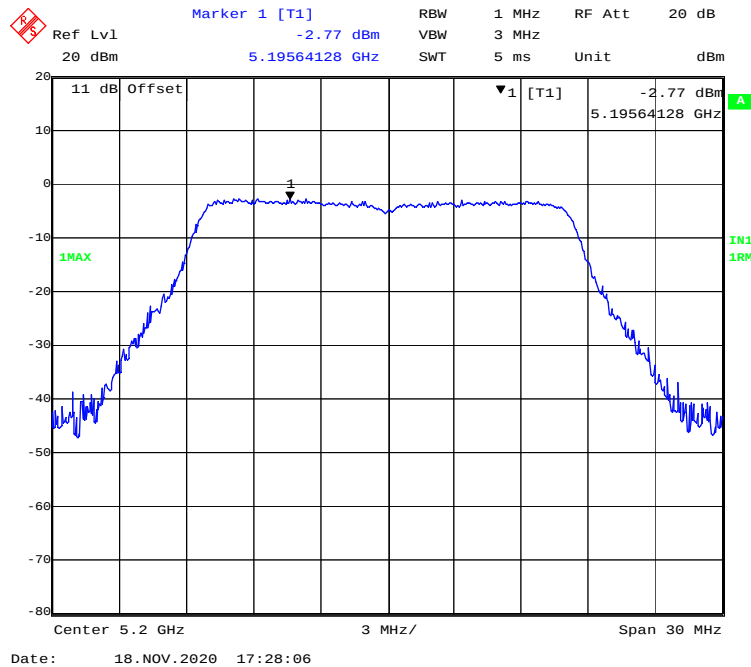


802.11a mode, Power spectral density-5240MHz

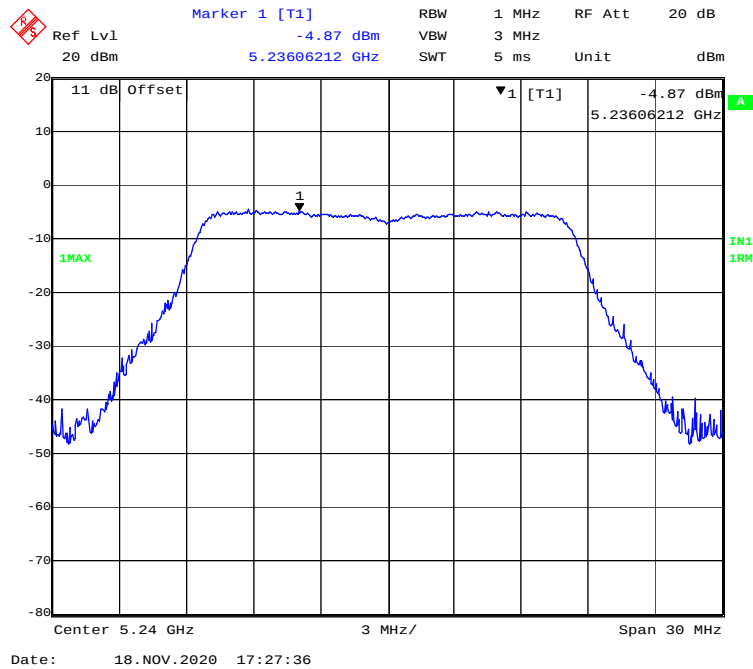


802.11ac20 mode, Power spectral density-5180MHz

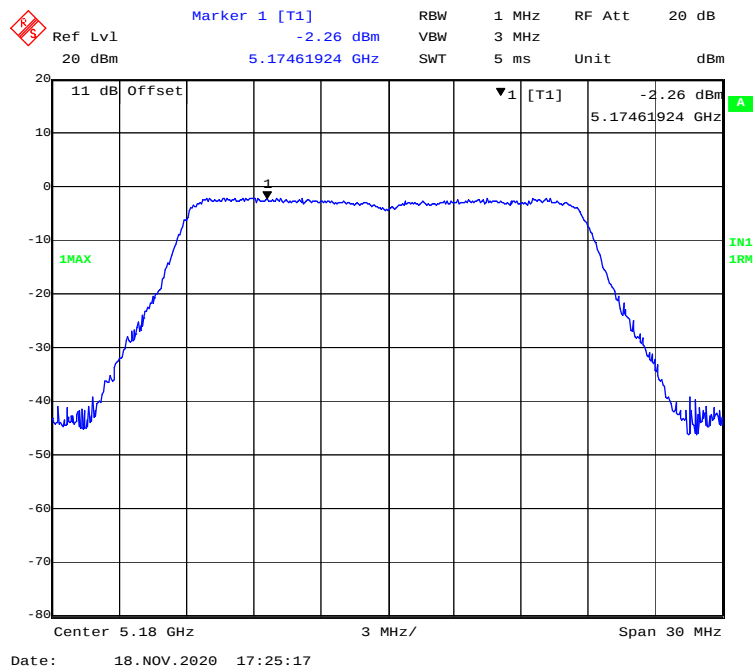


802.11ac20 mode, Power spectral density-5200MHz

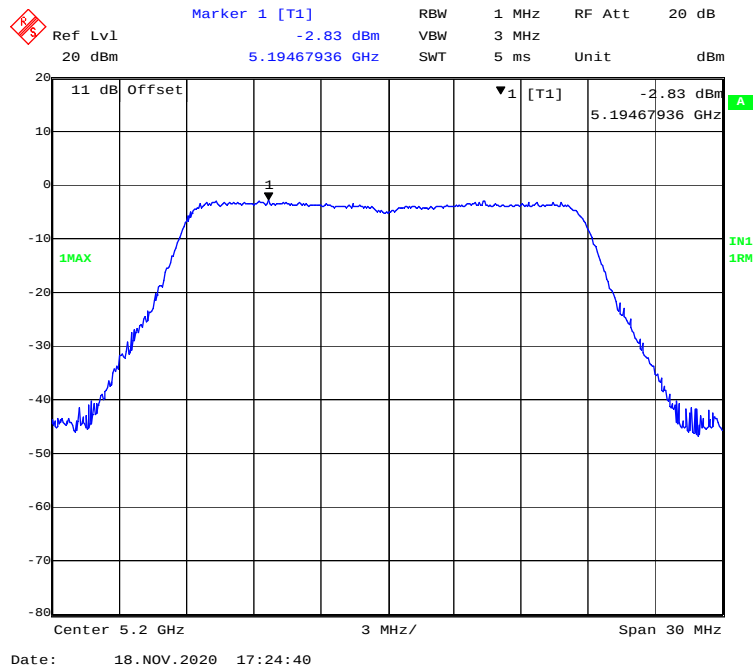


802.11ac20 mode, Power spectral density-5240MHz

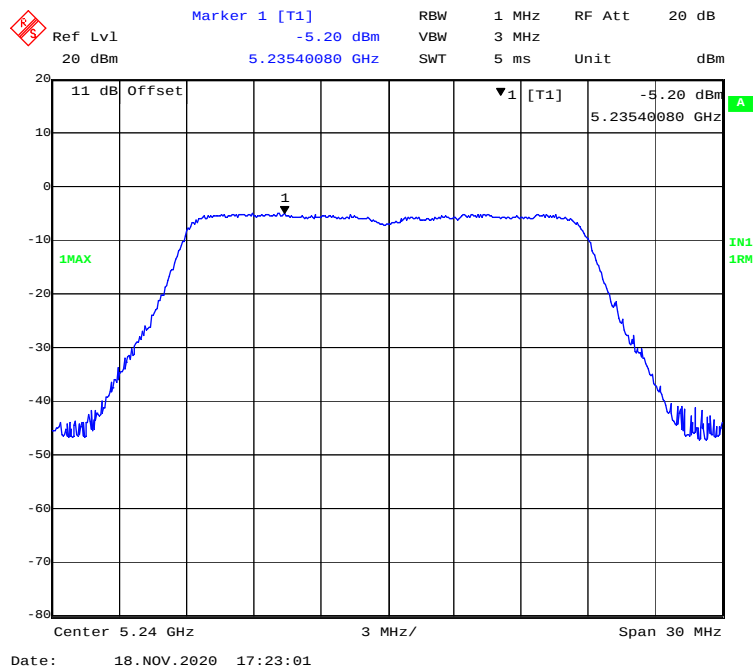


802.11n-HT20 mode, Power spectral density-5180MHz

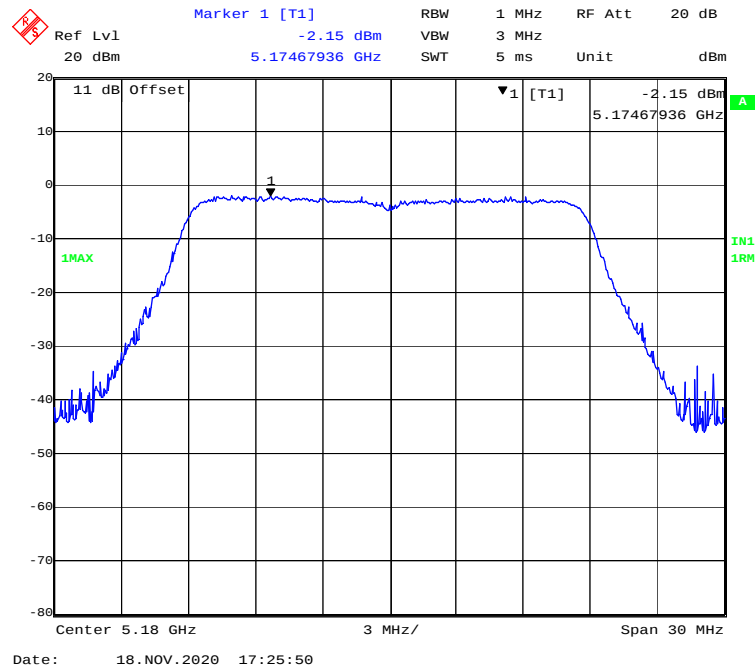


802.11n-HT20 mode, Power spectral density-5200MHz

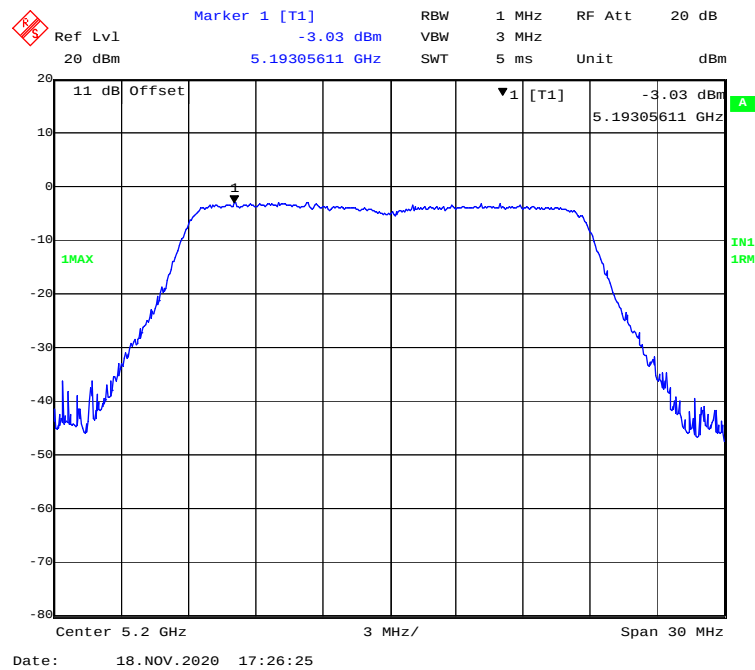


802.11n-HT20 mode, Power spectral density-5240MHz

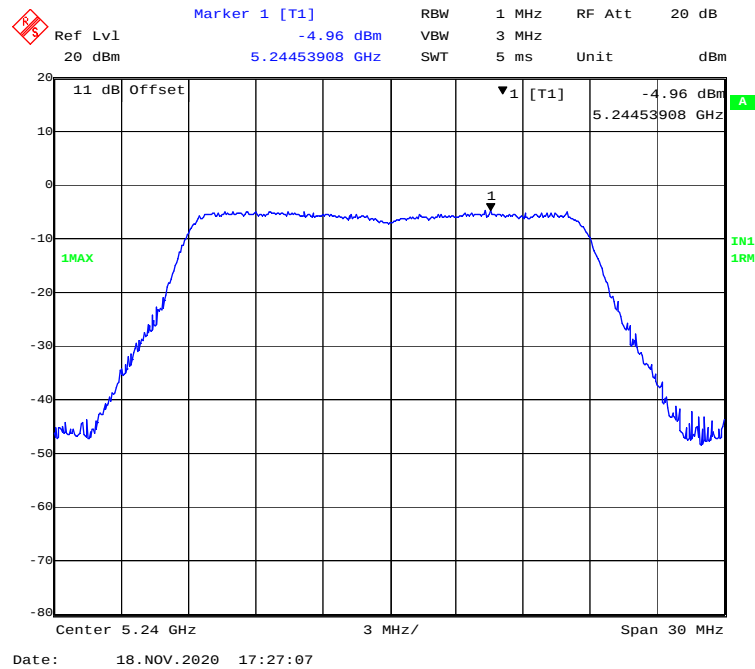


802.11ac40 mode, Power spectral density-5190MHz

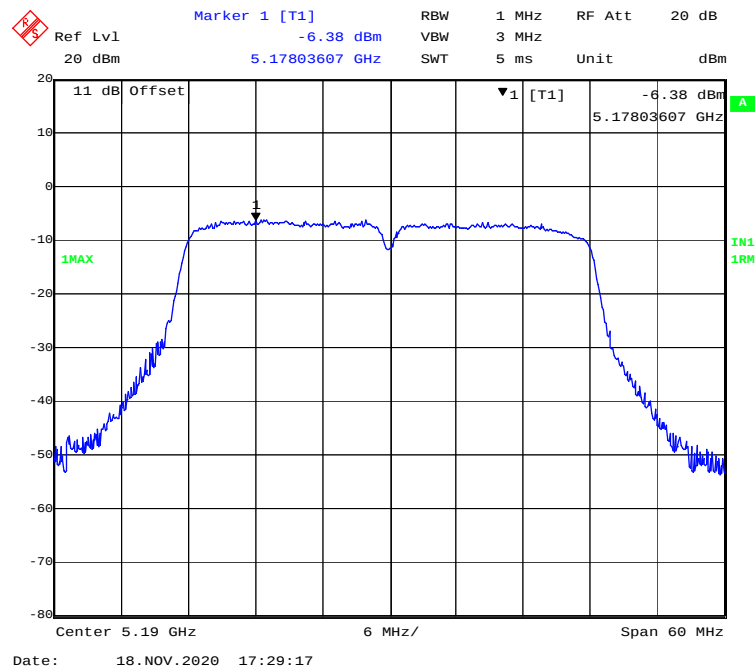


802.11ac40 mode, Power spectral density-5230MHz

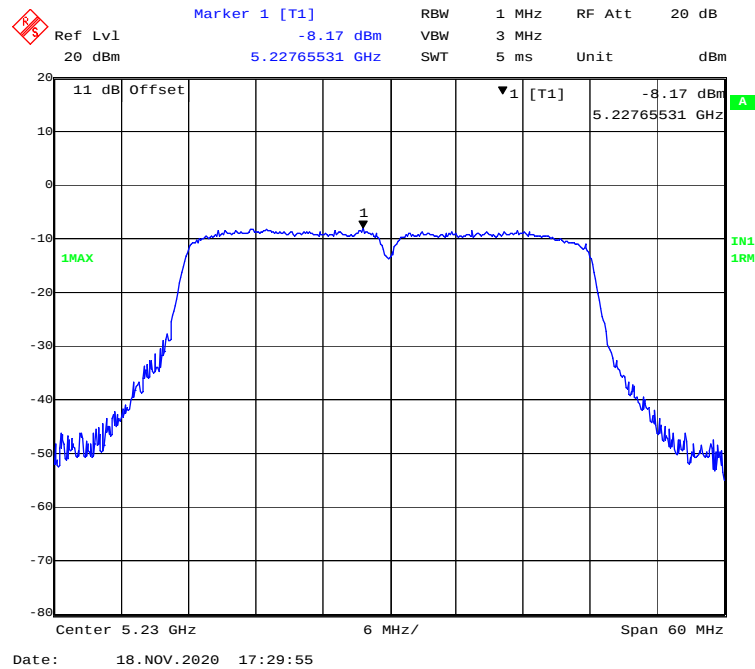


802.11n-HT40 mode, Power spectral density-5190MHz

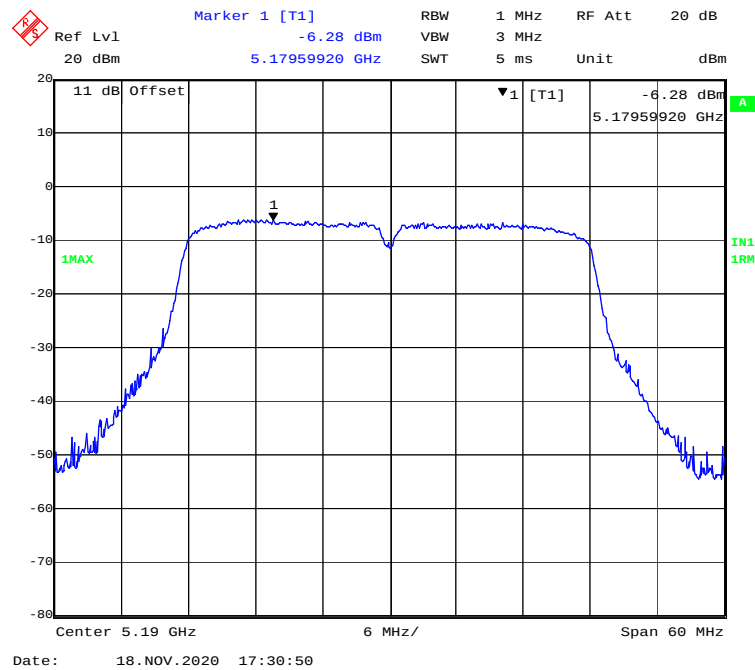


802.11n-HT40 mode, Power spectral density-5230MHz

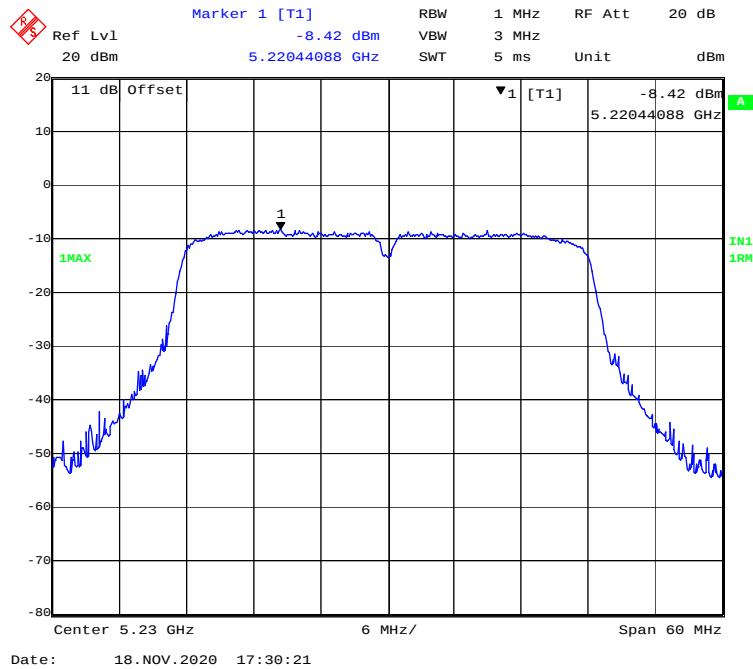


802.11ac80 mode, Power spectral density-5210MHz

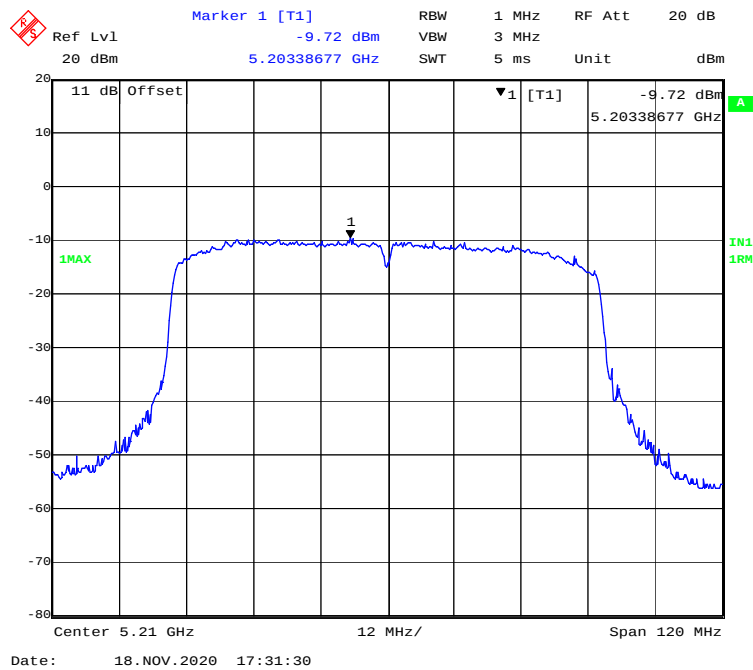


802.11a mode, Power spectral density-5745MHz


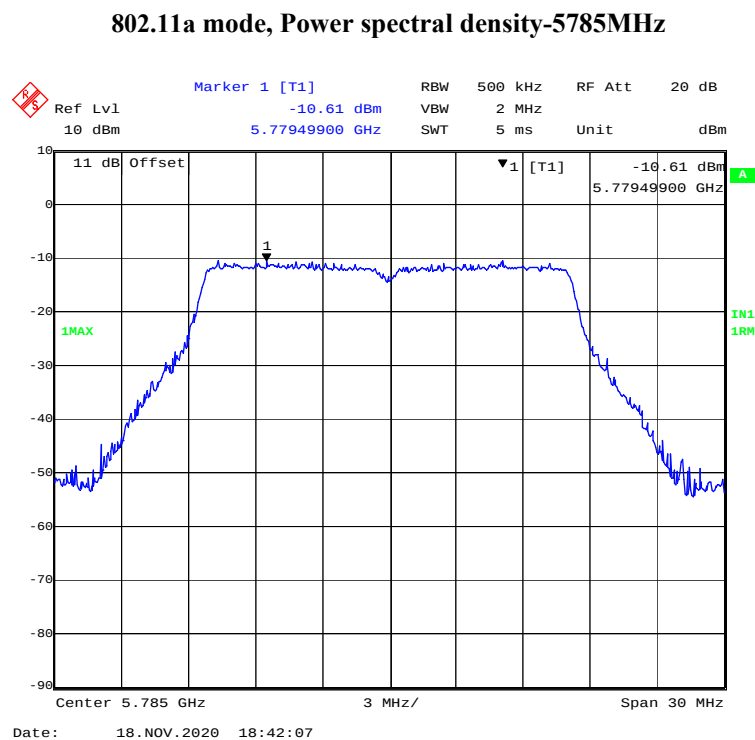


802.11a mode, Power spectral density-5825MHz

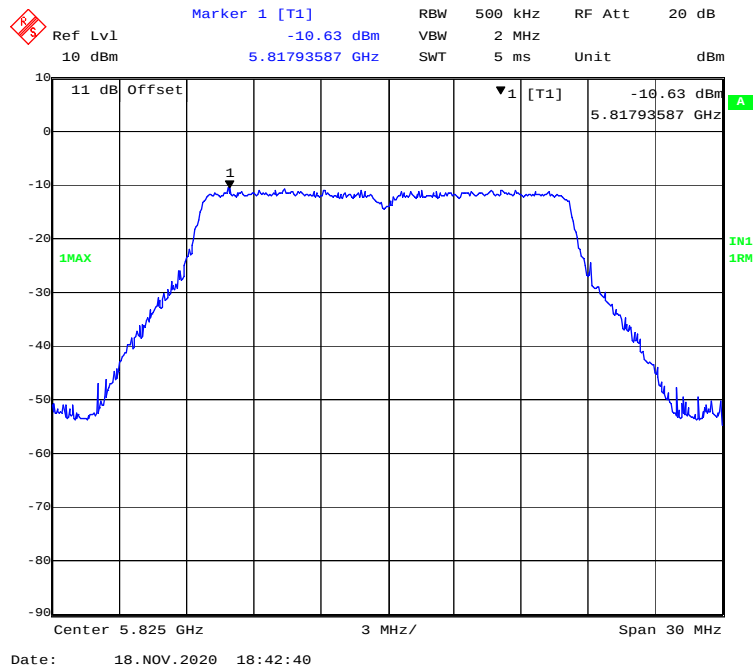


802.11ac20 mode, Power spectral density-5745MHz

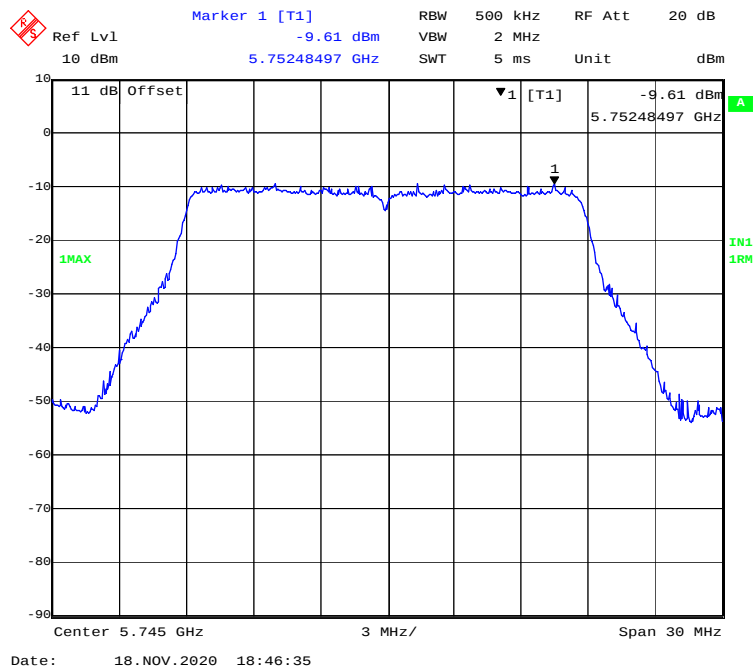


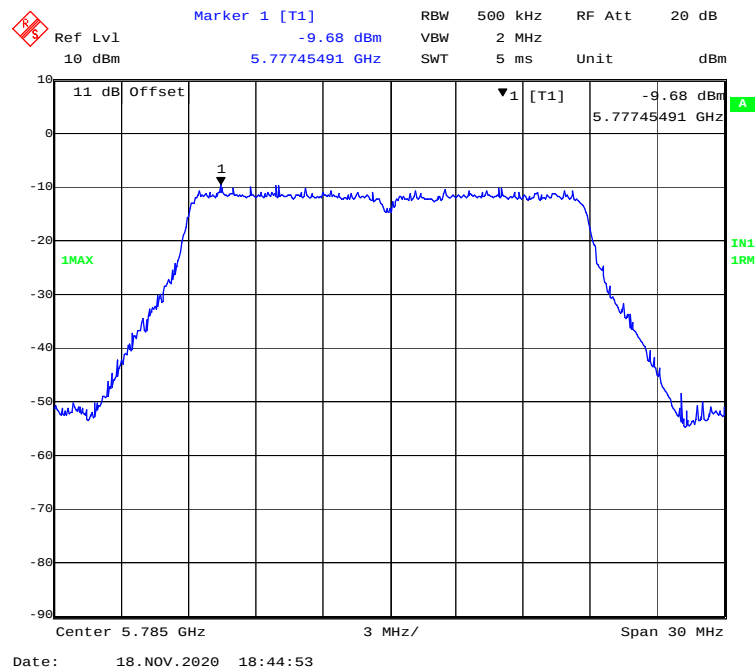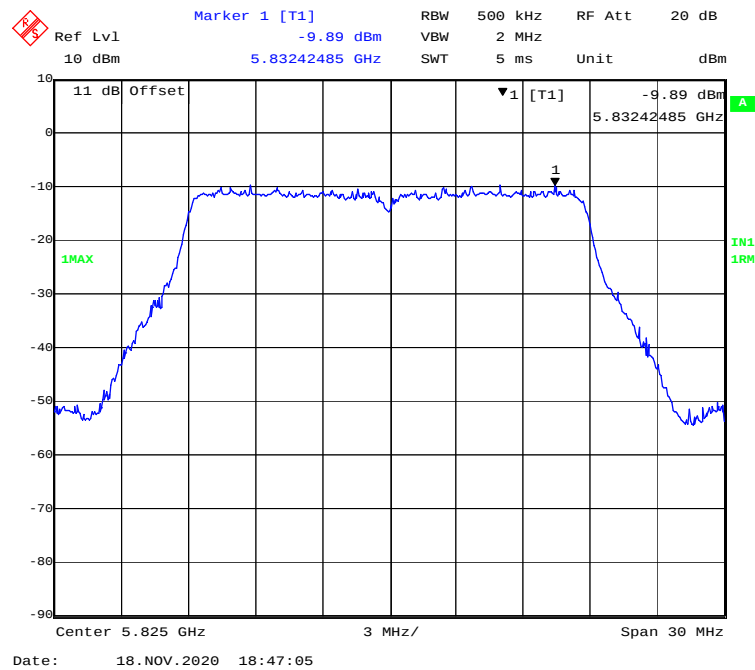802.11ac20 mode, Power spectral density-5785MHz**802.11ac20 mode, Power spectral density-5825MHz**


802.11n-HT20 mode, Power spectral density-5745MHz

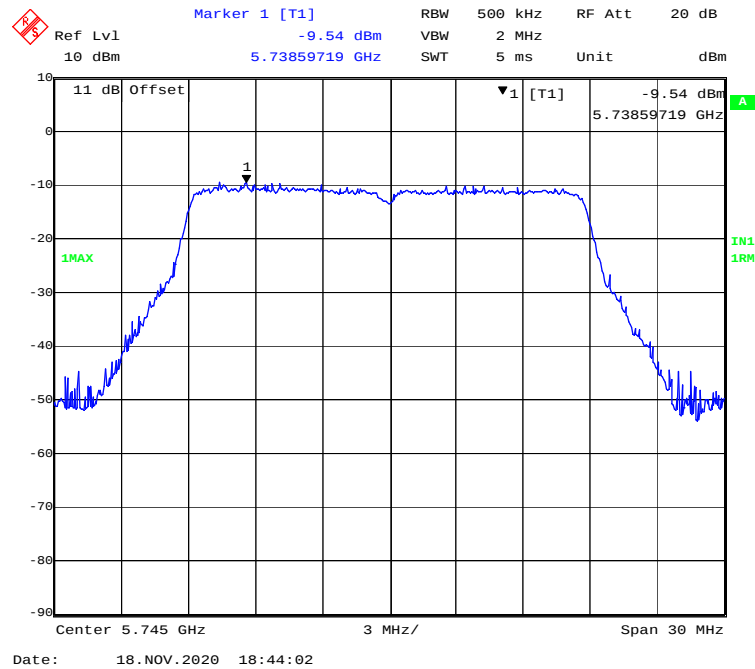


802.11n-HT20 mode, Power spectral density-5785MHz

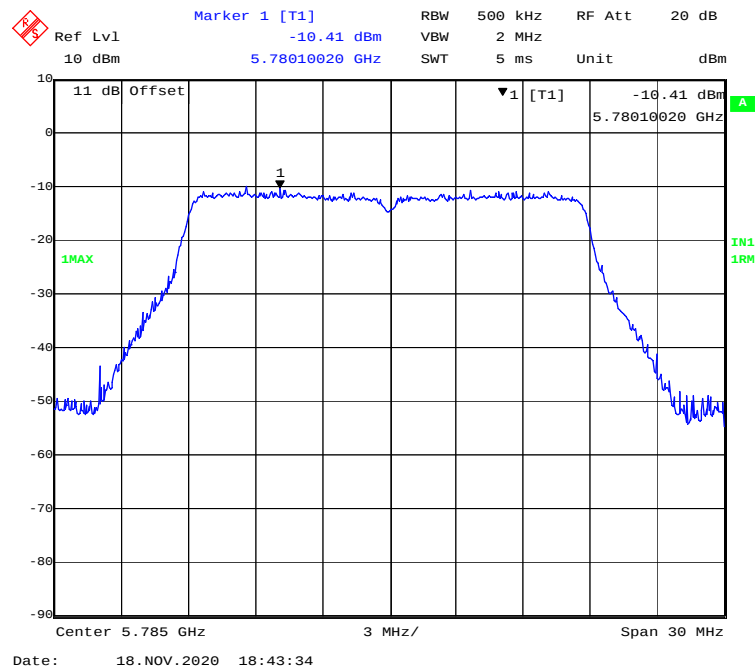


802.11n-HT20 mode, Power spectral density-5825MHz

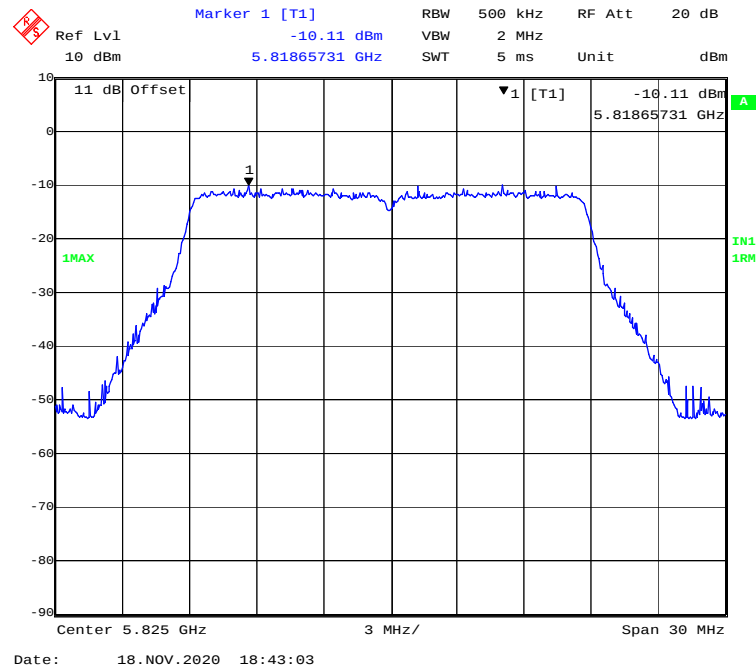


802.11ac40 mode, Power spectral density-5755MHz

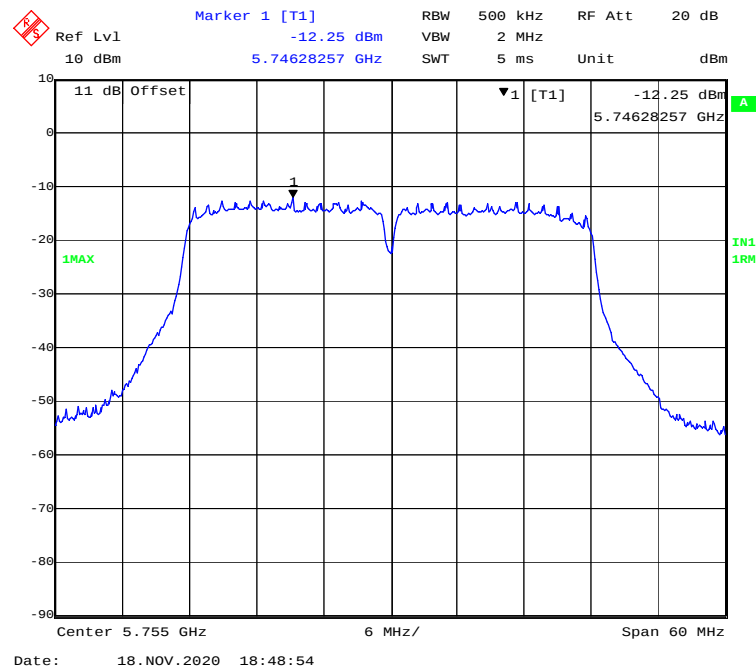


802.11ac40 mode, Power spectral density-5795MHz

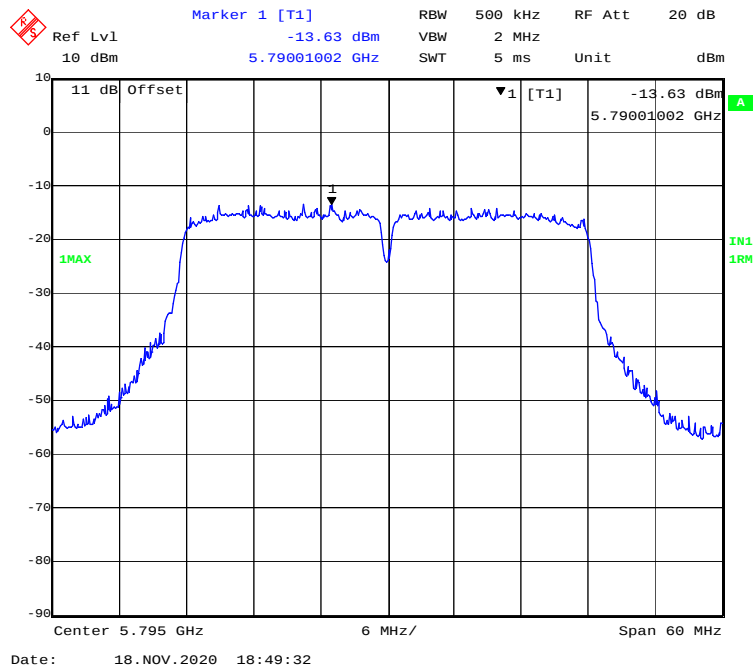


802.11n-HT40 mode, Power spectral density-5755MHz

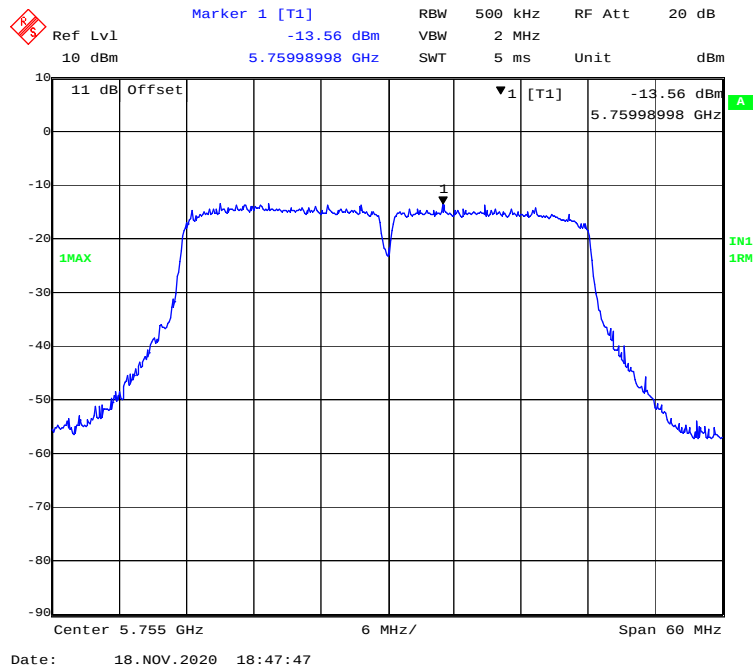

802.11n-HT40 mode, Power spectral density-5795MHz

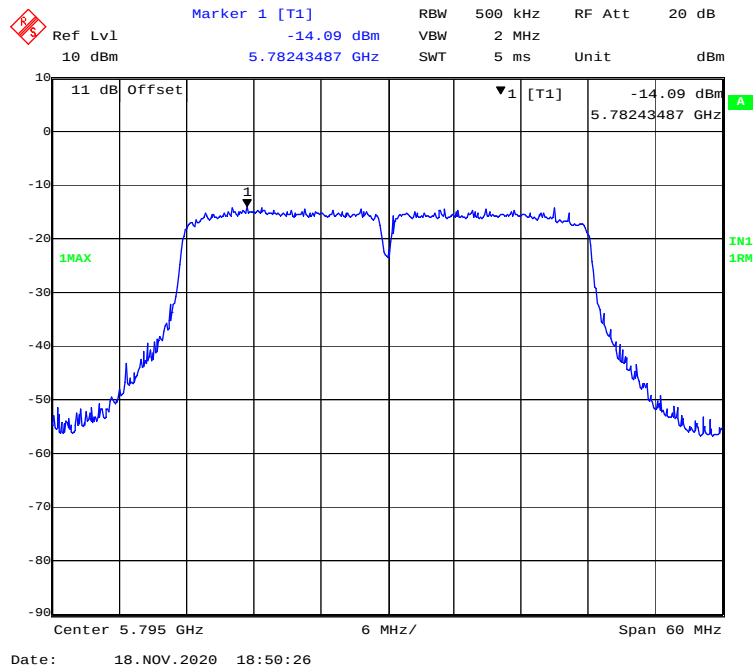

802.11ac80 mode, Power spectral density-5775MHz

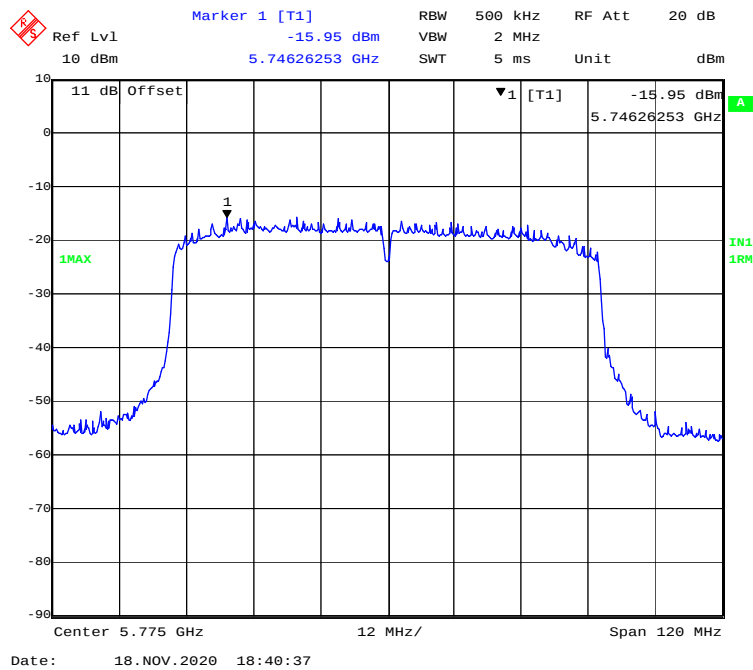

Declarations

1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

5: This report cannot be reproduced except in full, without prior written approval of the Company.

6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

******* END OF REPORT *******