



FCC RF Test Report

APPLICANT : Bullitt Mobile Limited
EQUIPMENT : Mobile Phone
BRAND NAME : CAT
MODEL NAME : B35
FCC ID : ZL5B35E
STANDARD : 47 CFR Part 2, 27(M)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Aug. 23, 2018 and completely tested on Oct. 21, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Maximum EIRP Power, Frequency Tolerance, and Emission Designator	6
1.7 Testing Location	6
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System.....	9
2.3 Support Unit used in test configuration and system	9
2.4 Measurement Results Explanation Example.....	9
2.5 Frequency List of Low/Middle/High Channels	10
3 CONDUCTED TEST ITEMS	11
3.1 Measuring Instruments	11
3.2 Test Setup	11
3.3 Test Result of Conducted Test.....	11
3.4 Conducted Output Power and EIRP	12
3.5 Peak-to-Average Ratio	13
3.6 Occupied Bandwidth.....	14
3.7 Conducted Band Edge	15
3.8 Conducted Spurious Emission	16
3.9 Frequency Stability	17
4 RADIATED TEST ITEMS	18
4.1 Measuring Instruments	18
4.2 Test Setup	18
4.3 Test Result of Radiated Test.....	18
4.4 Radiated Spurious Emission	19
5 LIST OF MEASURING EQUIPMENT	20
6 UNCERTAINTY OF EVALUATION	21
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	
APPENDIX D. PRODUCT EQUALITY DECLARATION	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG840307-04B	Rev. 01	Initial issue of report	Nov. 06, 2018



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 7)	EIRP < 2Watt	PASS	
3.5	N/A	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7)	§27.53(m)(4)	PASS	-
3.8	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7)	< 55+10log ₁₀ (P[Watts])	PASS	-
3.9	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	< 55+10log ₁₀ (P[Watts])	PASS	Under limit 26.11 dB at 10131.360 MHz



1 General Description

1.1 Applicant

Bullitt Mobile Limited

One Valpy, Valpy Street, Reading, Berkshire, England RG1 1AR

1.2 Manufacturer

Bullitt Mobile Limited

One Valpy, Valpy Street, Reading, Berkshire, England RG1 1AR

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	CAT
Model Name	B35
FCC ID	ZL5B35E
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+(16QAM uplink is not supported)/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 Bluetooth BR/EDR/LE
EUT Stage	Identical Prototype

Note: There are four types of EUT: Sample 1 is dual SIM with main source receiver, Sample 2 is dual SIM with second source receiver, Sample 3 is single SIM with main source receiver, Sample 4 is single SIM with second source receiver, just different suppliers, please refer the product equality declaration as Appendix D. According to the difference, we choose sample 1 to full test.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz
Rx Frequency	LTE Band 7 : 2622.5MHz ~ 2687.5 MHz
Bandwidth	LTE Band 7 : 5MHz/ 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 7 : 21.49 dBm
Antenna Gain	LTE Band 7 : 0.50 dBi
Type of Modulation	QPSK / 16QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Maximum EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 7		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2502.5 ~ 2567.5	4M52G7D	-	0.1567	4M50W7D	-	0.1253
10	2505.0 ~ 2565.0	9M07G7D	0.0032	0.1581	9M01W7D	-	0.1259
15	2507.5 ~ 2562.5	13M5G7D	-	0.1567	13M5W7D	-	0.1253
20	2510.0 ~ 2560.0	18M3G7D	-	0.1556	18M3W7D	-	0.1253

1.7 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

Test Site	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	TH01-KS	CN5013	630927

Sporton International (Shenzhen) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0).

Test Site	Sporton International (Shenzhen) Inc.		
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District, Shenzhen City, Guangdong Province 518055, China TEL: +86-755- 3320-2398		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	03CH02-SZ	CN5019	577730



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 27(M)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	7	-	-	v	v	v	v	v	v	-	v	v	v	v	v	v
Peak-to-Average Ratio	7	-	-				v	v	v	-	v		v	v	v	v
26dB and 99% Bandwidth	7	-	-	v	v	v	v	v	v	-			v	v	v	v
Conducted Band Edge	7	-	-	v	v	v	v	v	v	-	v		v	v		v
Conducted Spurious Emission	7	-	-	v	v	v	v	v	v	-	v			v	v	v
Frequency Stability	7	-	-		v			v		-			v		v	
E.R.P / E.I.R.P	7	-	-	v	v	v	v	v	v	-	v			v	v	v
Radiated Spurious Emission	7	-	-	v	v	v	v	v	v	-	v				v	
Note	1. The mark "v " means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.															

2.2 Connection Diagram of Test System

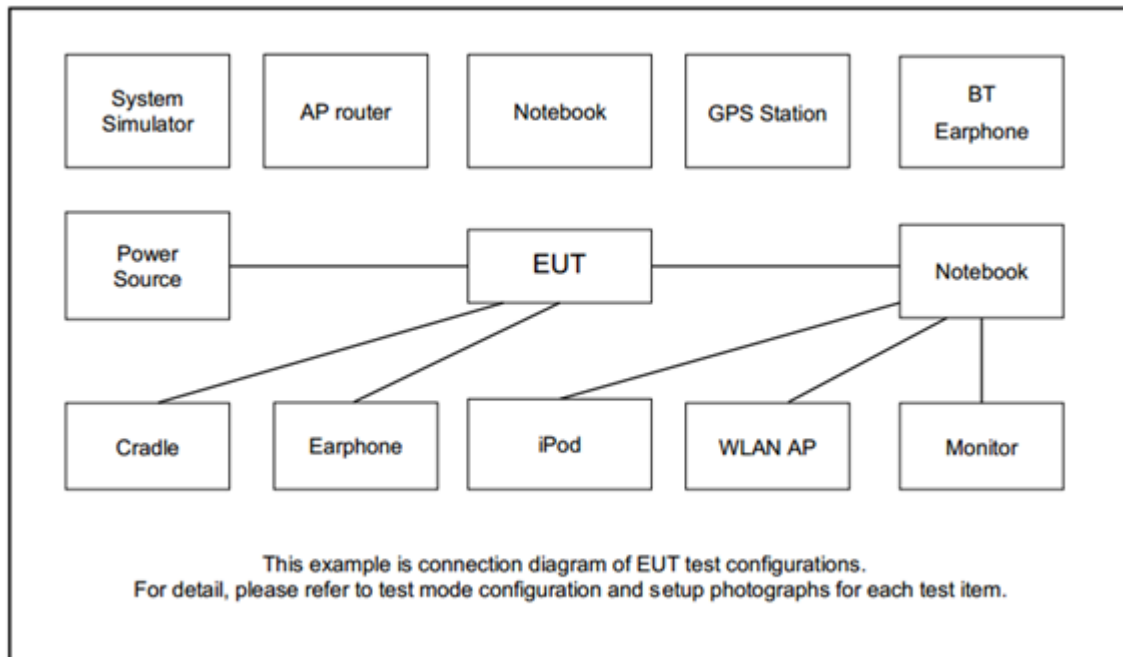

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss

Following shows an offset computation example with cable loss 5.5dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.5 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

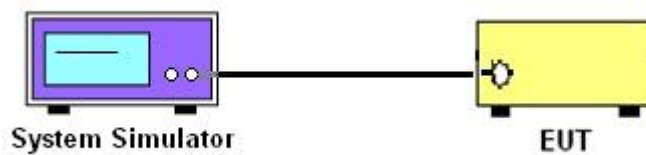

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

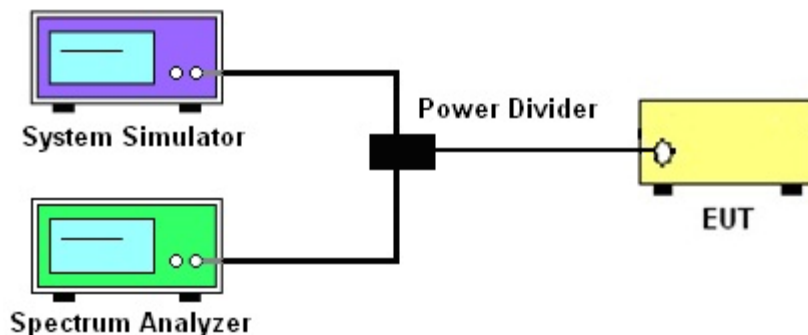

3.2.3 Frequency Stability

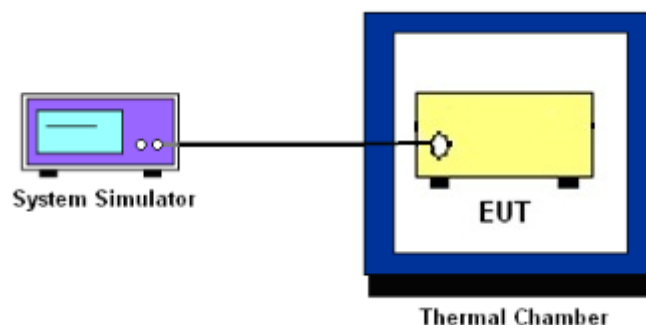

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for Band 7

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. For LTE Band 7 the other 40 dB, and 55 dB have additionally applied same calculation above.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.
11. For Band 7
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25$ dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

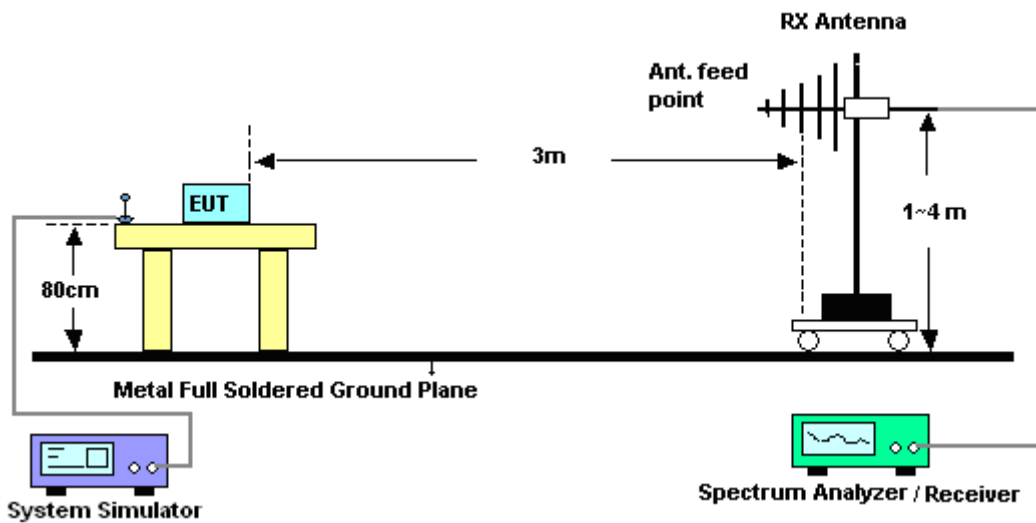

4.2.2 For radiated test above 1GHz

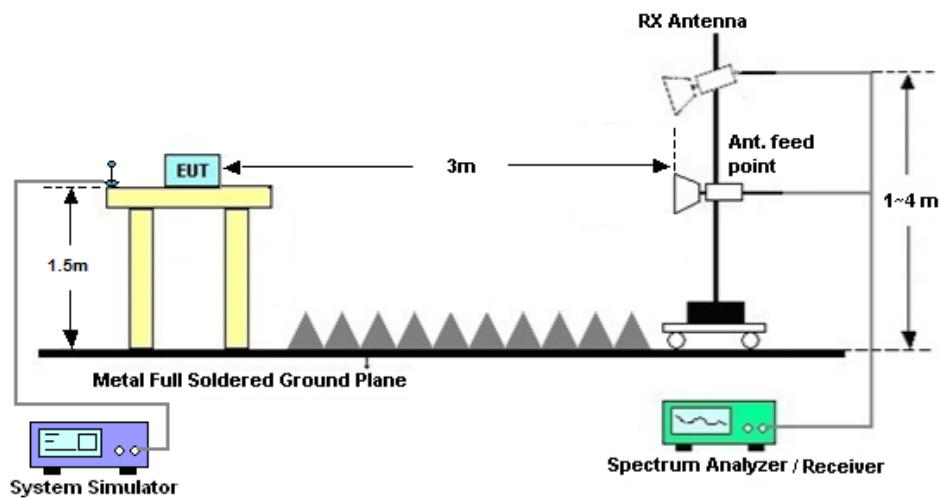

4.3 Test Result of Radiated Test

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)\text{dB}$ below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

13. For Band 7:

The limit line is derived from $55 + 10\log(P)\text{dB}$ below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2018	Sep. 30, 2018	Aug. 06, 2019	Conducted (TH01-KS)
Temperature & humidity	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jun. 27, 2018	Sep. 30, 2018	Jun. 26, 2019	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101041	10kHz~40GHz;Ma x 30dBm	Oct. 20, 2018	Oct. 20, 2018~ Oct. 21, 2018	Oct. 19, 2019	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	May 10, 2018	Oct. 20, 2018~ Oct. 21, 2018	May 09, 2019	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA	9120D-1285	1GHz~18GHz	Dec. 13, 2017	Oct. 20, 2018~ Oct. 21, 2018	Dec. 12, 2018	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Mar. 30, 2018	Oct. 20, 2018~ Oct. 21, 2018	Mar. 29, 2019	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 20, 2018	Oct. 20, 2018~ Oct. 21, 2018	Oct. 19, 2019	Radiation (03CH02-SZ)
HF Amplifier	Agilent	8449B	3008A01023	1GHz~26.5GHz	Oct. 20, 2018	Oct. 20, 2018~ Oct. 21, 2018	Oct. 19, 2019	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 30, 2018	Oct. 20, 2018~ Oct. 21, 2018	Jul. 29, 2019	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010002470	N/A	NCR	Oct. 20, 2018~ Oct. 21, 2018	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Oct. 20, 2018~ Oct. 21, 2018	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Oct. 20, 2018~ Oct. 21, 2018	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.3 dB
---	--------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	21.25	21.36	21.38
20	1	49		21.32	21.30	21.42
20	1	99		21.26	21.32	21.28
20	50	0		20.41	20.33	20.40
20	50	24		20.37	20.35	20.42
20	50	50		20.40	20.41	20.40
20	100	0		20.40	20.39	20.40
20	1	0	16-QAM	20.43	20.44	20.12
20	1	49		20.42	20.36	20.31
20	1	99		20.41	20.38	20.48
20	50	0		19.45	19.45	19.46
20	50	24		19.38	19.37	19.42
20	50	50		19.39	19.50	19.38
20	100	0		19.43	19.49	19.48
15	1	0	QPSK	21.24	21.15	21.37
15	1	37		21.31	21.40	21.45
15	1	74		21.26	21.42	21.40
15	36	0		20.29	20.47	20.34
15	36	20		20.29	20.33	20.43
15	36	39		20.27	20.38	20.41
15	75	0		20.36	20.38	20.37
15	1	0	16-QAM	20.10	20.45	19.92
15	1	37		20.42	20.48	20.25
15	1	74		20.21	20.43	20.11
15	36	0		19.25	19.42	19.37
15	36	20		19.36	19.41	19.50
15	36	39		19.41	19.41	19.45
15	75	0		19.44	19.47	19.38



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	20.99	20.95	21.26
10	1	25		21.30	21.39	21.49
10	1	49		21.10	21.23	21.41
10	25	0		20.38	20.38	20.41
10	25	12		20.38	20.34	20.43
10	25	25		20.27	20.39	20.38
10	50	0		20.40	20.33	20.50
10	1	0	16-QAM	20.12	20.21	20.02
10	1	25		20.47	20.47	20.50
10	1	49		20.41	20.10	20.49
10	25	0		19.36	19.32	19.37
10	25	12		19.33	19.41	19.42
10	25	25		19.30	19.37	19.39
10	50	0		19.31	19.33	19.40
5	1	0	QPSK	21.28	21.15	21.33
5	1	12		21.45	21.41	21.40
5	1	24		21.33	21.32	21.41
5	12	0		20.43	20.31	20.39
5	12	7		20.44	20.44	20.34
5	12	13		20.35	20.28	20.45
5	25	0		20.40	20.29	20.40
5	1	0	16-QAM	20.04	20.32	20.48
5	1	12		19.75	19.85	20.21
5	1	24		19.99	20.06	20.41
5	12	0		19.44	19.23	19.40
5	12	7		19.33	19.30	19.49
5	12	13		19.36	19.19	19.50
5	25	0		19.46	19.46	19.45

**ERP/EIRP**

LTE Band 7 (GT - LC = 0.50 dBi) QPSK			
Bandwidth	5M		
Channel	20775	21100	21425
	(Low)	(Mid)	(High)
Frequency	2502.5	2535	2567.5
(MHz)			
Conducted Power (dBm)	21.45	21.41	21.40
Conducted Power (Watts)	0.1396	0.1384	0.1380
EIRP(dBm)	21.95	21.91	21.90
EIRP(Watts)	0.1567	0.1552	0.1549

LTE Band 7 (GT - LC = 0.50 dBi) QPSK									
Bandwidth	10M			15M			20M		
Channel	20800	21100	21400	20825	21100	21375	20850	21100	21350
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2505	2535	2565	2507.5	2535	2562.5	2510	2535	2560
(MHz)									
Conducted Power (dBm)	21.30	21.39	21.49	21.31	21.40	21.45	21.32	21.30	21.42
Conducted Power (Watts)	0.1349	0.1377	0.1409	0.1352	0.1380	0.1396	0.1355	0.1349	0.1387
EIRP(dBm)	21.80	21.89	21.99	21.81	21.90	21.95	21.82	21.80	21.92
EIRP(Watts)	0.1514	0.1545	0.1581	0.1517	0.1549	0.1567	0.1521	0.1514	0.1556



LTE Band 7 (GT - LC = 0.50 dBi) 16QAM			
Bandwidth	5M		
Channel	20775	21100	21425
	(Low)	(Mid)	(High)
Frequency	2502.5	2535	2567.5
(MHz)			
Conducted Power (dBm)	20.04	20.32	20.48
Conducted Power (Watts)	0.1009	0.1076	0.1117
EIRP(dBm)	20.54	20.82	20.98
EIRP(Watts)	0.1132	0.1208	0.1253

LTE Band 7 (GT - LC = 0.50 dBi) 16QAM									
Bandwidth	10M			15M			20M		
Channel	20800	21100	21400	20825	21100	21375	20850	21100	21350
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2505	2535	2565	2507.5	2535	2562.5	2510	2535	2560
(MHz)									
Conducted Power (dBm)	20.47	20.47	20.50	20.42	20.48	20.25	20.41	20.38	20.48
Conducted Power (Watts)	0.1114	0.1114	0.1122	0.1102	0.1117	0.1059	0.1099	0.1091	0.1117
EIRP(dBm)	20.97	20.97	21.00	20.92	20.98	20.75	20.91	20.88	20.98
EIRP(Watts)	0.1250	0.1250	0.1259	0.1236	0.1253	0.1189	0.1233	0.1225	0.1253




Peak-to-Average Ratio

Mode	LTE Band 7 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.14	4.93	5.13	5.97	PASS
Middle CH	4.38	4.87	5.04	5.88	
Highest CH	4.32	4.78	5.22	5.77	




LTE Band 7 / 20MHz / QPSK


Lowest Channel / 1RB

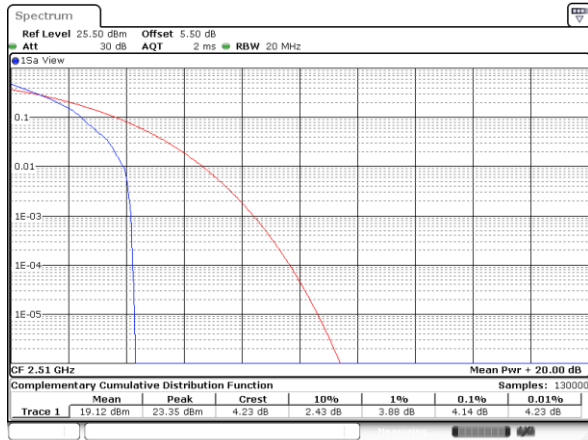


Lowest Channel / Full RB

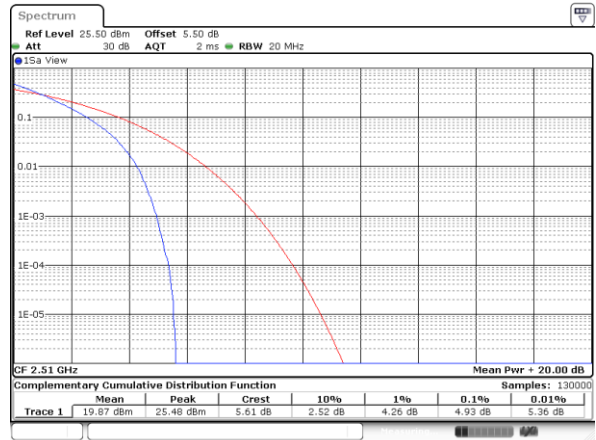


Middle Channel / 1RB

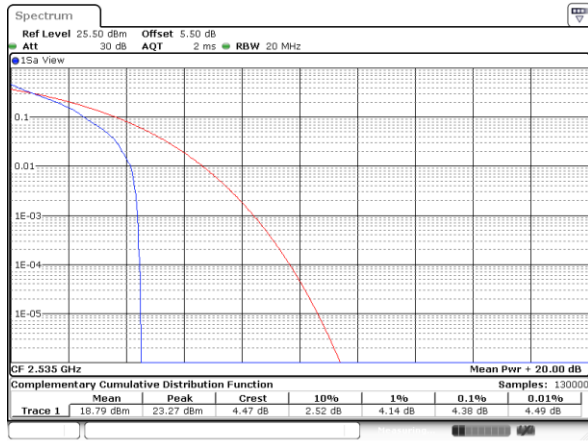


Middle Channel / Full RB

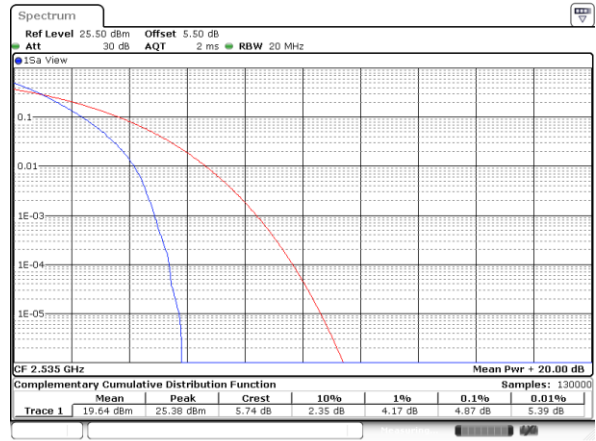

Highest Channel / 1RB

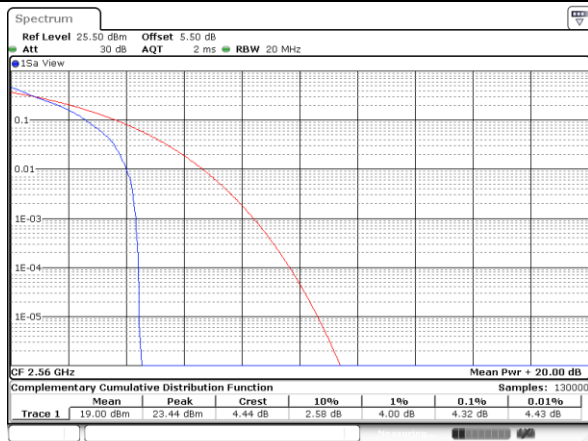

Highest Channel / Full RB

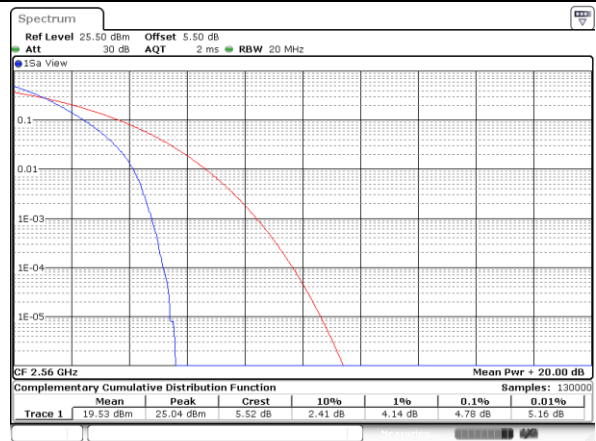




LTE Band 7 / 20MHz / 16QAM


Lowest Channel / 1RB




Lowest Channel / Full RB

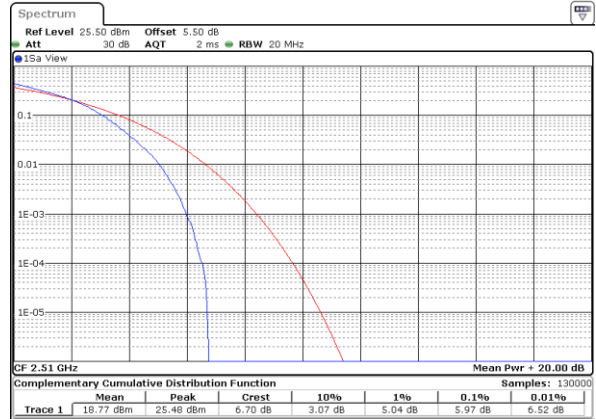

Middle Channel / 1RB

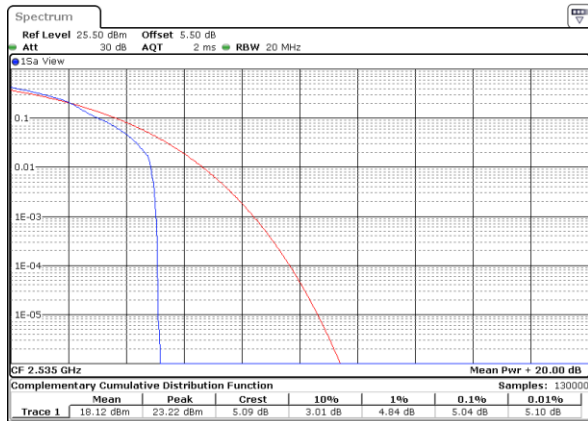


Middle Channel / Full RB

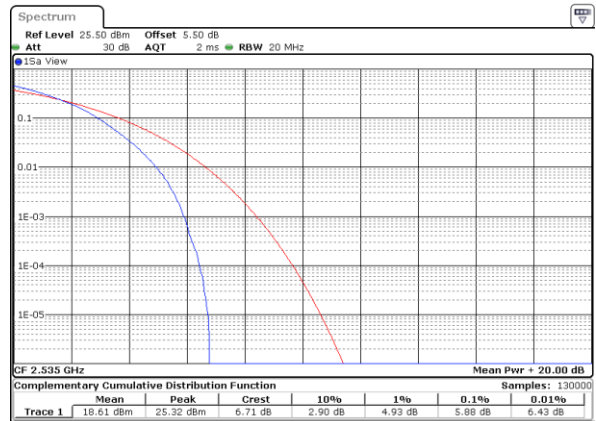

Highest Channel / 1RB



Highest Channel / Full RB

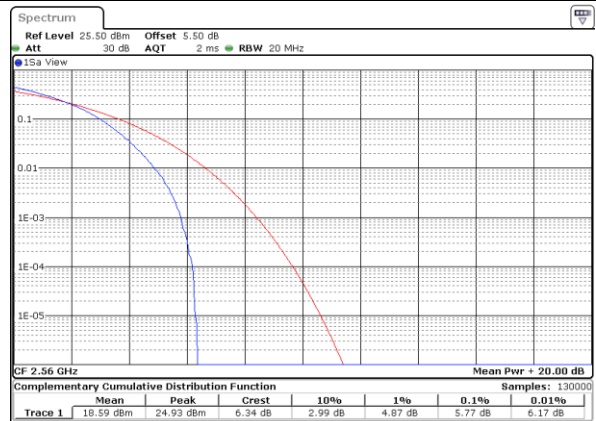




26dB Bandwidth

Mode	LTE Band 7 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.905	4.815	9.85	9.93	14.595	14.476	20.34	20.22
Middle CH	-	-	-	-	4.965	4.855	9.73	9.85	14.356	14.535	20.34	20.3
Highest CH	-	-	-	-	4.975	4.945	9.83	9.71	14.476	14.625	20.22	20.22




LTE Band 7

Lowest Channel / 5MHz / QPSK

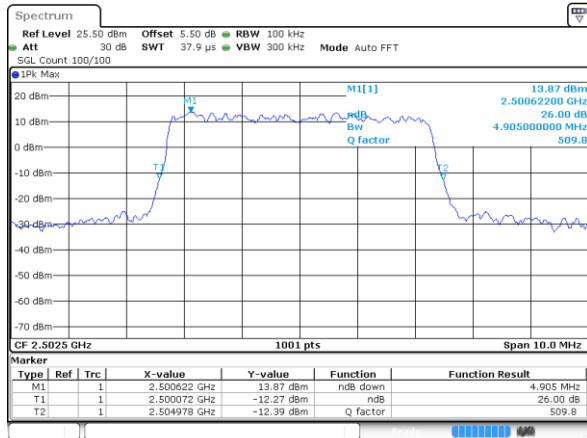


Date: 30 SEP 2018 22:28:11

Lowest Channel / 5MHz / 16QAM

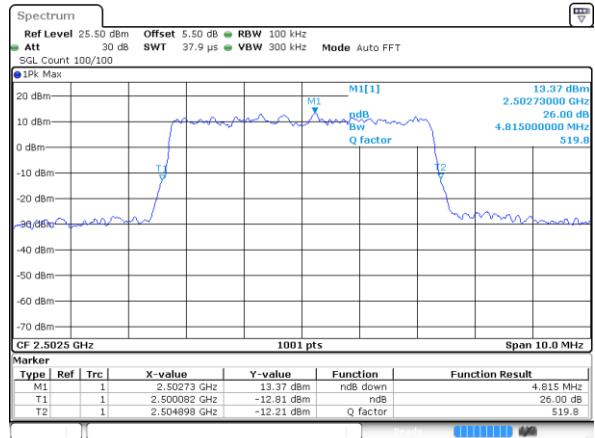


Date: 30 SEP 2018 22:28:32

Middle Channel / 5MHz / QPSK

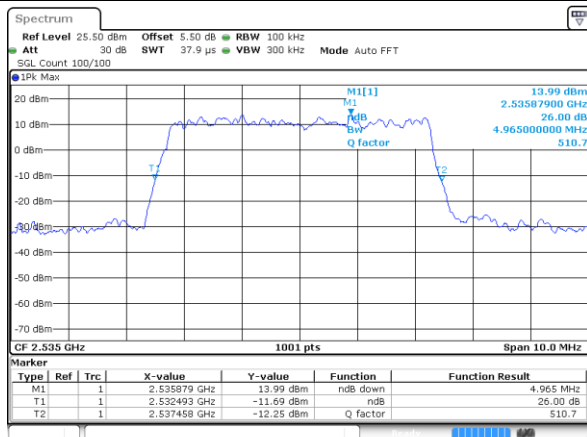


Date: 30 SEP 2018 22:32:45

Middle Channel / 5MHz / 16QAM

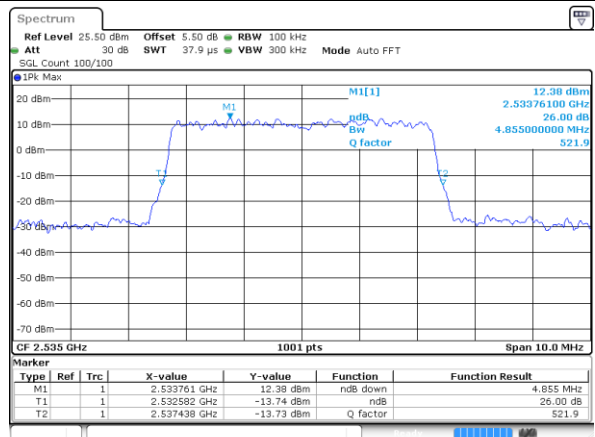


Date: 30 SEP 2018 22:32:24

Highest Channel / 5MHz / QPSK

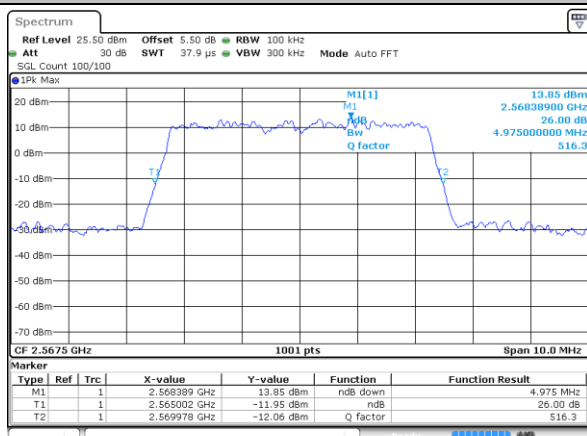

Date: 30 SEP 2018 22:33:04

Highest Channel / 5MHz / 16QAM

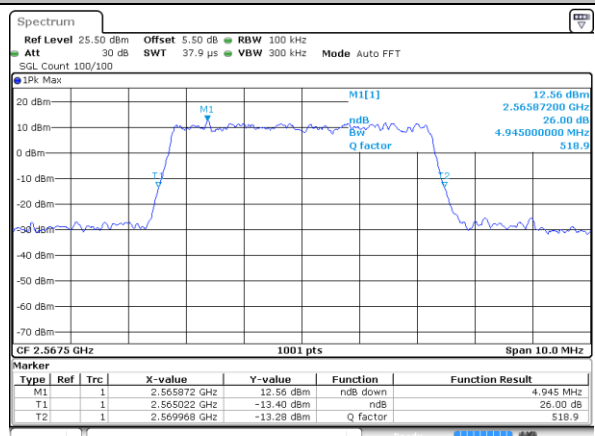


Date: 30 SEP 2018 22:33:25




LTE Band 7

Lowest Channel / 10MHz / QPSK

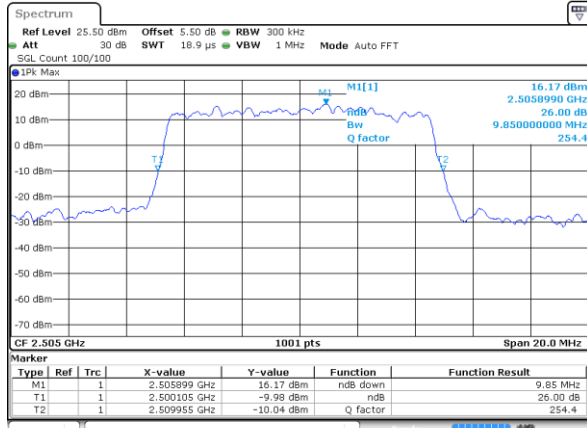


Date: 30 SEP 2018 22:40:09

Lowest Channel / 10MHz / 16QAM

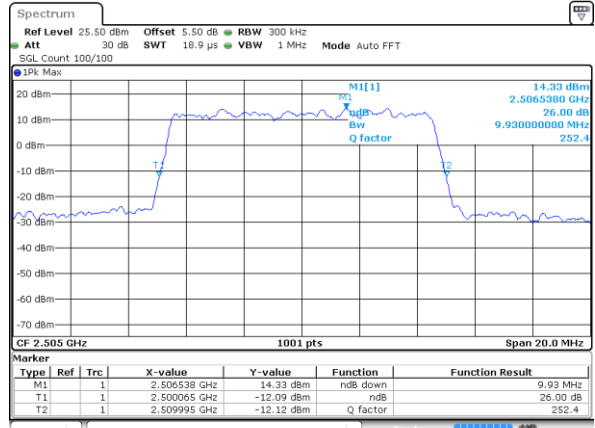


Date: 30 SEP 2018 22:40:29

Middle Channel / 10MHz / QPSK

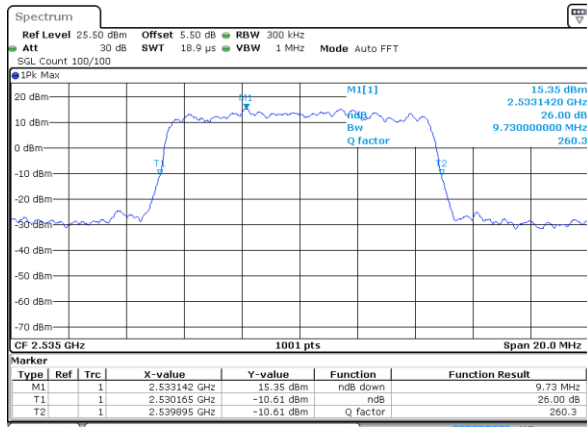


Date: 30 SEP 2018 22:44:42

Middle Channel / 10MHz / 16QAM

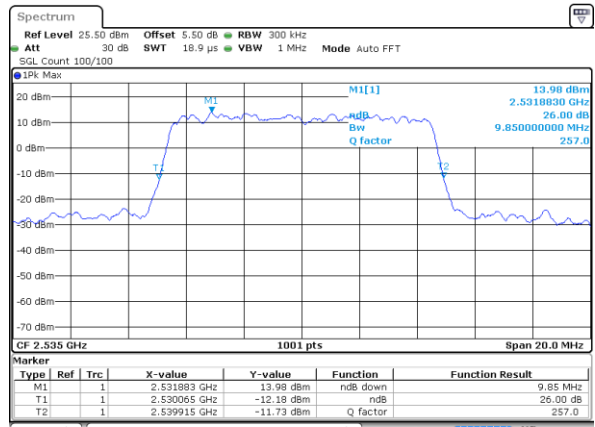


Date: 30 SEP 2018 22:44:21

Highest Channel / 10MHz / QPSK

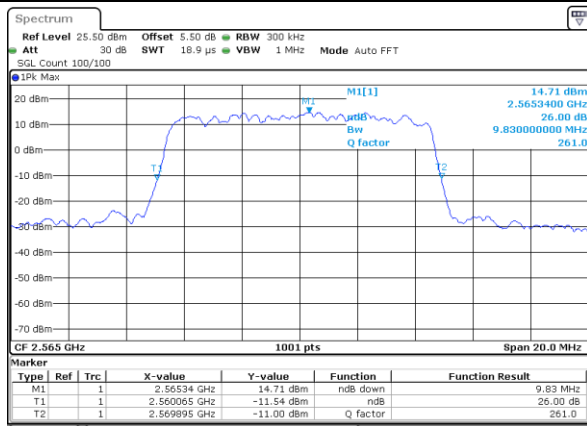

Date: 30 SEP 2018 22:45:02

Highest Channel / 10MHz / 16QAM

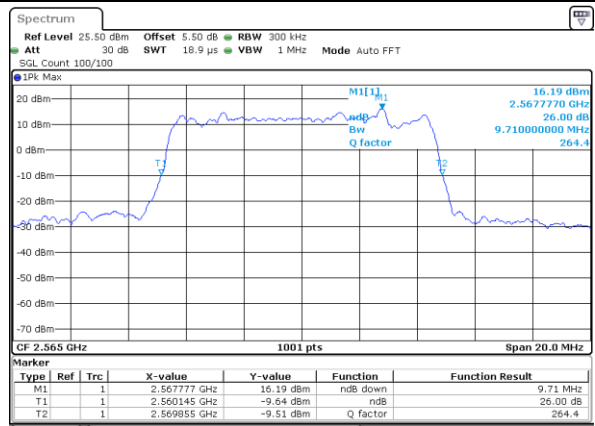


Date: 30 SEP 2018 22:45:21




LTE Band 7

Lowest Channel / 15MHz / QPSK

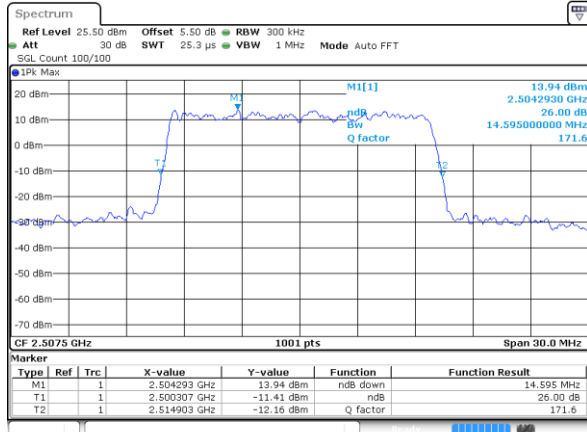


Date: 30 SEP 2018 22:52:05

Lowest Channel / 15MHz / 16QAM

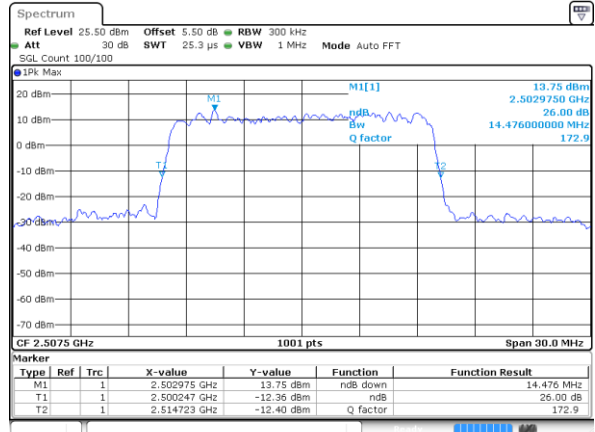


Date: 30 SEP 2018 22:52:25

Middle Channel / 15MHz / QPSK

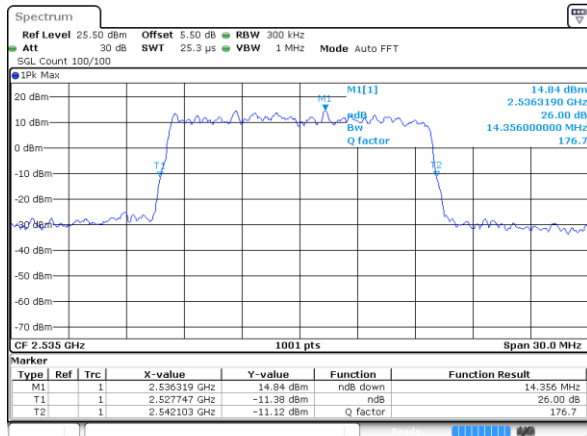


Date: 30 SEP 2018 22:56:38

Middle Channel / 15MHz / 16QAM

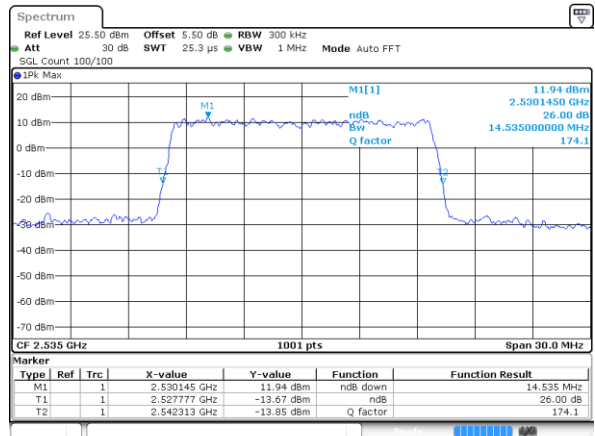


Date: 30 SEP 2018 22:56:18

Highest Channel / 15MHz / QPSK

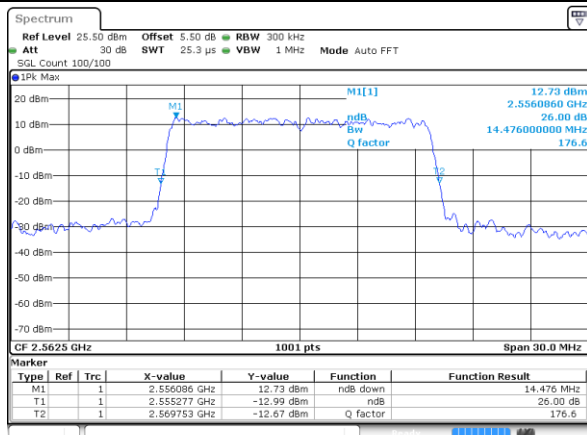

Date: 30 SEP 2018 22:56:58

Highest Channel / 15MHz / 16QAM

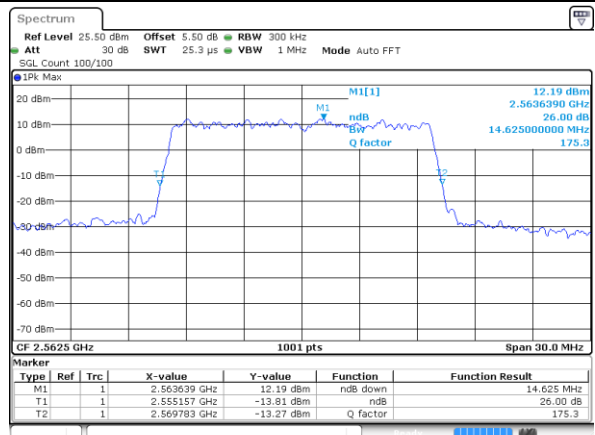


Date: 30 SEP 2018 22:57:18




LTE Band 7

Lowest Channel / 20MHz / QPSK

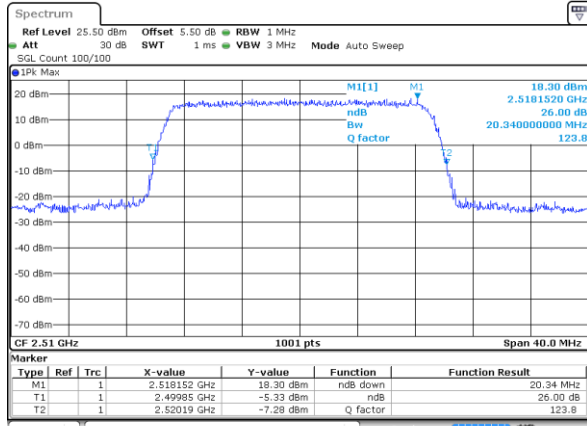


Date: 30 SEP 2018 23:04:02

Lowest Channel / 20MHz / 16QAM

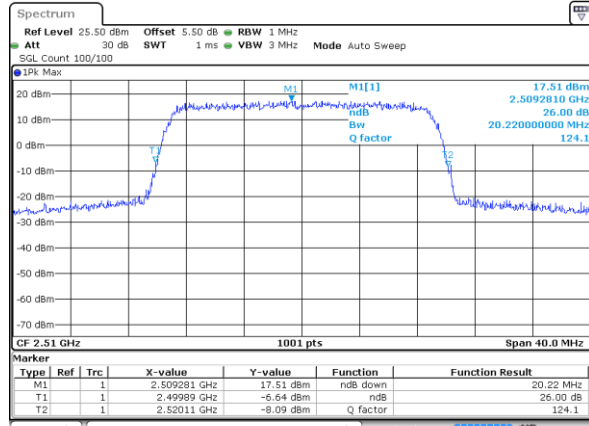


Date: 30 SEP 2018 23:04:22

Middle Channel / 20MHz / QPSK

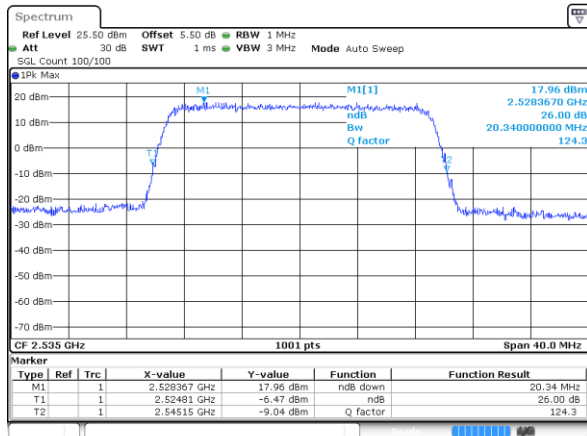


Date: 30 SEP 2018 23:08:35

Middle Channel / 20MHz / 16QAM

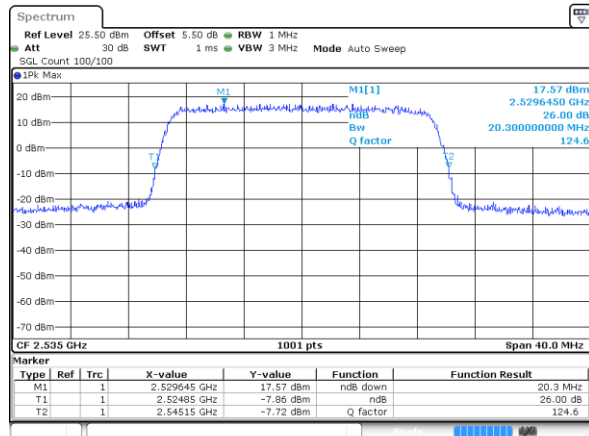


Date: 30 SEP 2018 23:08:15

Highest Channel / 20MHz / QPSK

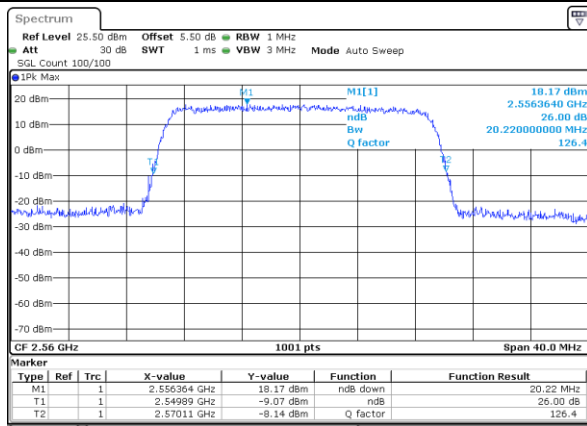

Date: 30 SEP 2018 23:08:55

Highest Channel / 20MHz / 16QAM

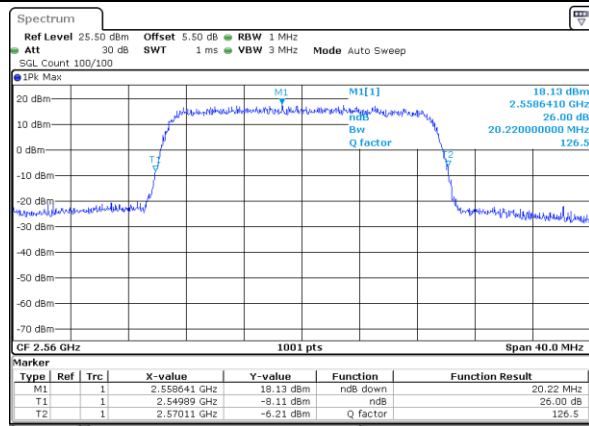

Date: 30 SEP 2018 23:09:15


**Occupied Bandwidth**

Mode	LTE Band 7 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.49	4.5	8.99	9.01	13.43	13.43	18.3	18.3
Middle CH	-	-	-	-	4.49	4.49	9.07	8.99	13.4	13.46	18.34	18.26
Highest CH	-	-	-	-	4.52	4.48	9.03	8.97	13.46	13.46	18.3	18.3




LTE Band 7

Lowest Channel / 5MHz / QPSK

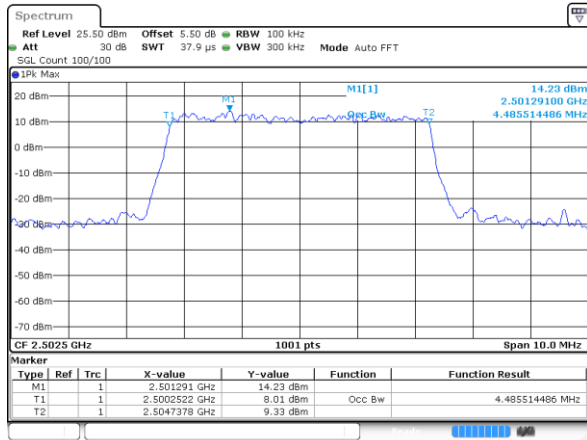


Date: 30 SEP 2018 22:28:01

Lowest Channel / 5MHz / 16QAM

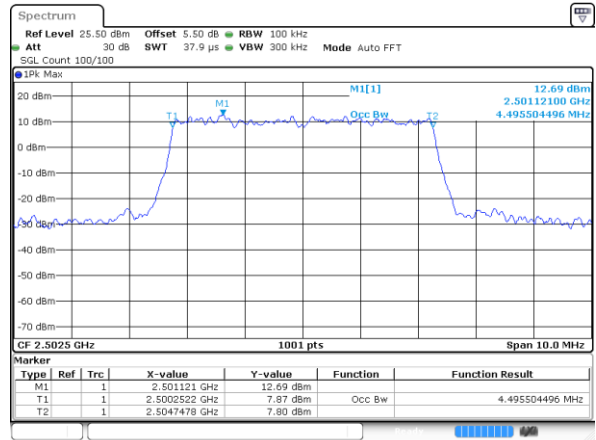


Date: 30 SEP 2018 22:28:22

Middle Channel / 5MHz / QPSK

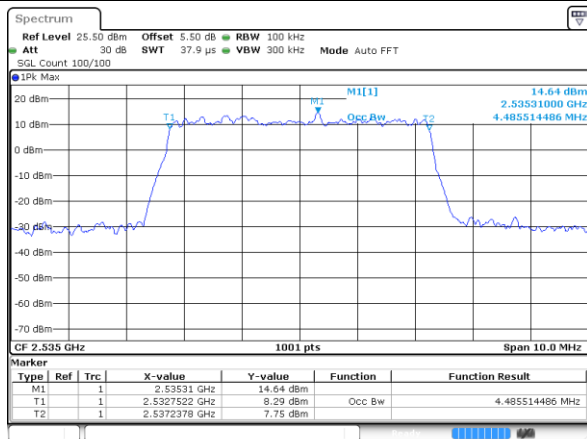


Date: 30 SEP 2018 22:32:34

Middle Channel / 5MHz / 16QAM

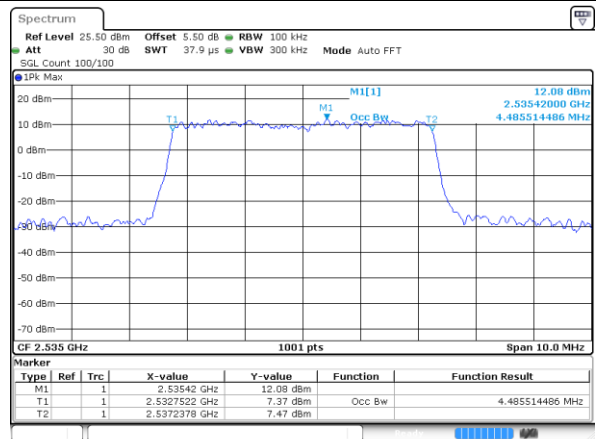


Date: 30 SEP 2018 22:32:14

Highest Channel / 5MHz / QPSK

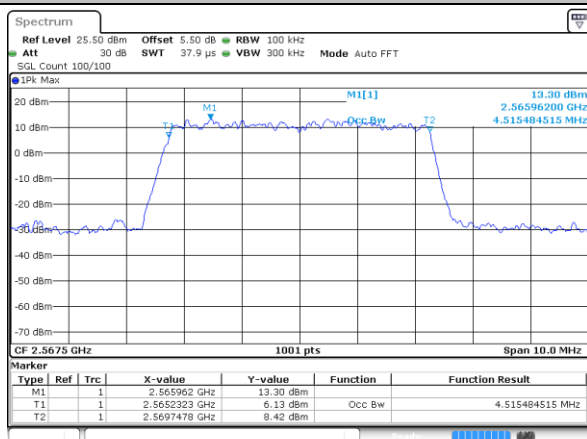

Date: 30 SEP 2018 22:32:55

Highest Channel / 5MHz / 16QAM

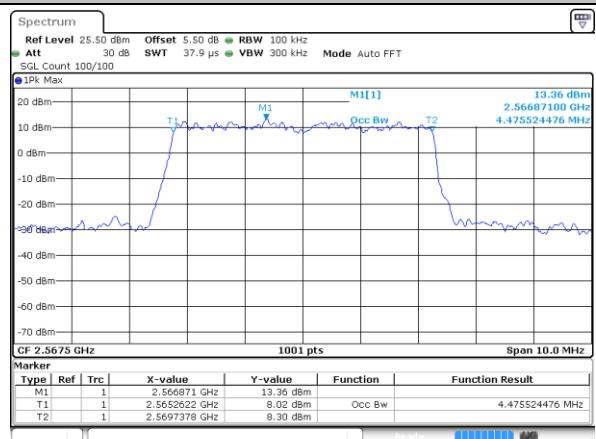


Date: 30 SEP 2018 22:33:15




LTE Band 7


Lowest Channel / 10MHz / QPSK

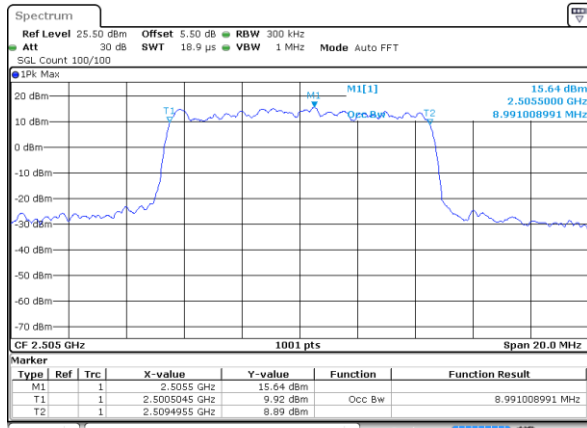


Lowest Channel / 10MHz / 16QAM

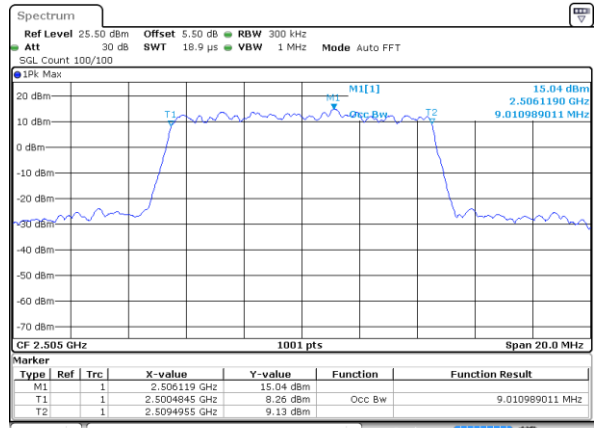


Middle Channel / 10MHz / QPSK

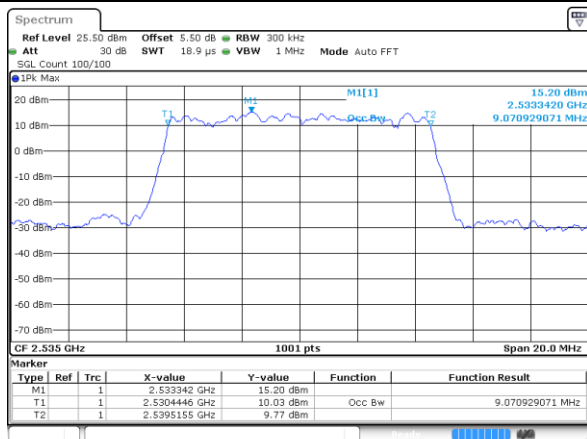


Middle Channel / 10MHz / 16QAM

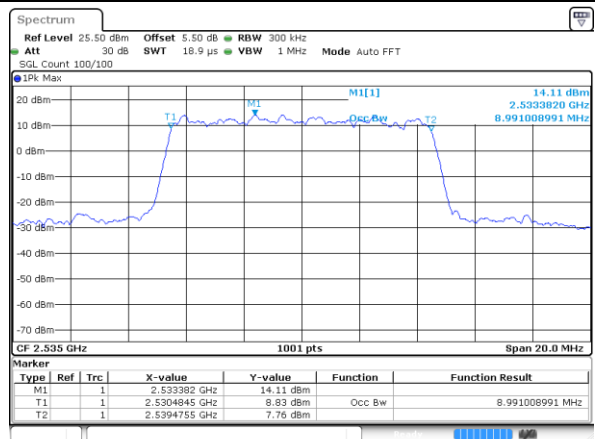

Highest Channel / 10MHz / QPSK

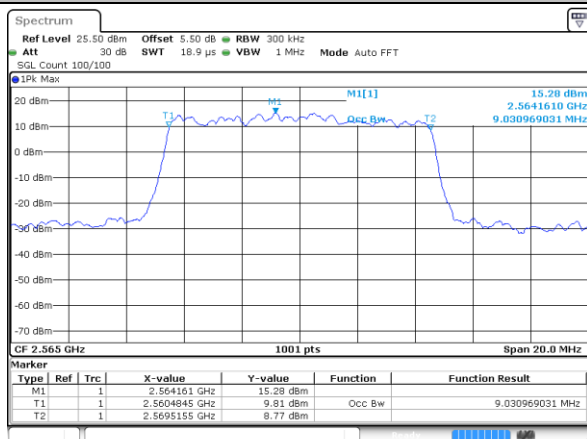


Highest Channel / 10MHz / 16QAM

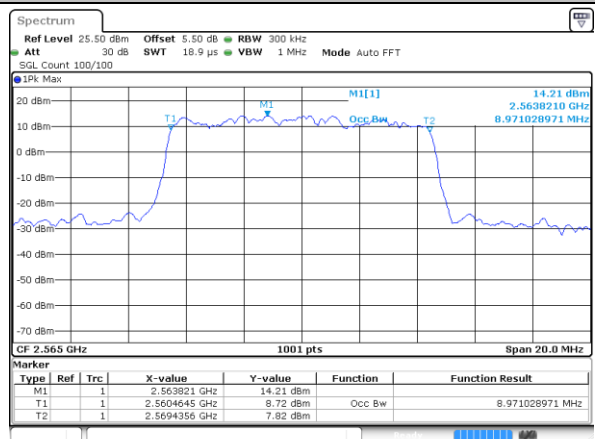




LTE Band 7

Lowest Channel / 15MHz / QPSK

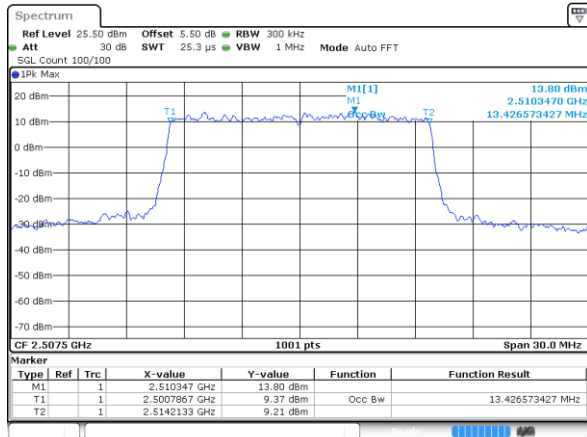


Date: 30 SEP 2018 22:51:55

Lowest Channel / 15MHz / 16QAM

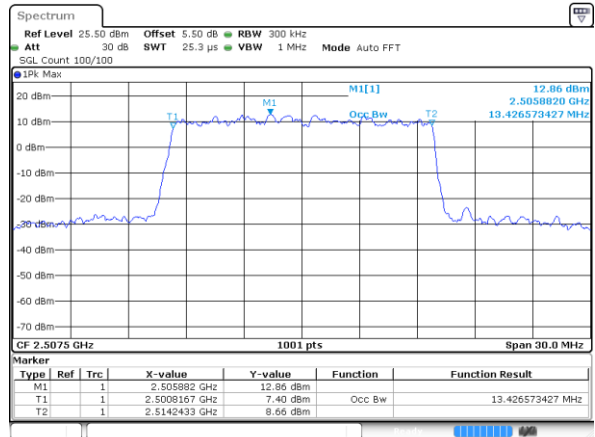


Date: 30 SEP 2018 22:52:15

Middle Channel / 15MHz / QPSK

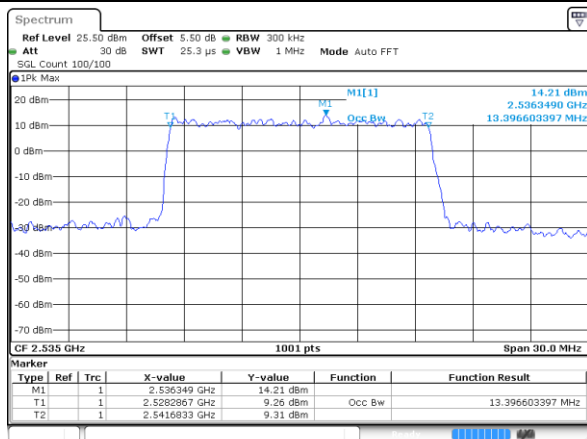


Date: 30 SEP 2018 22:56:28

Middle Channel / 15MHz / 16QAM

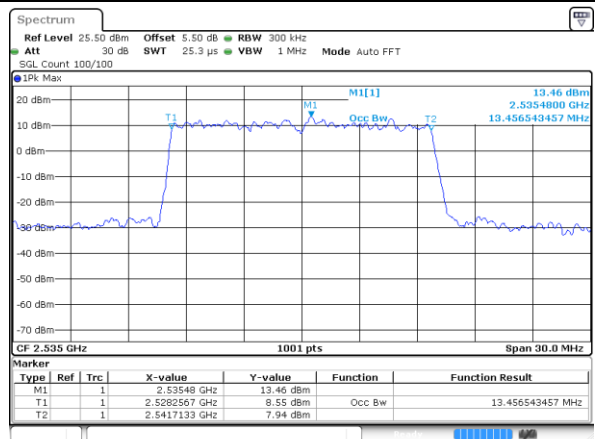


Date: 30 SEP 2018 22:56:08

Highest Channel / 15MHz / QPSK

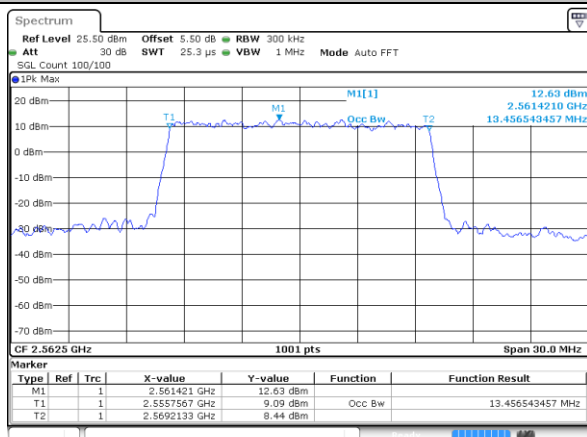

Date: 30 SEP 2018 22:56:48

Highest Channel / 15MHz / 16QAM

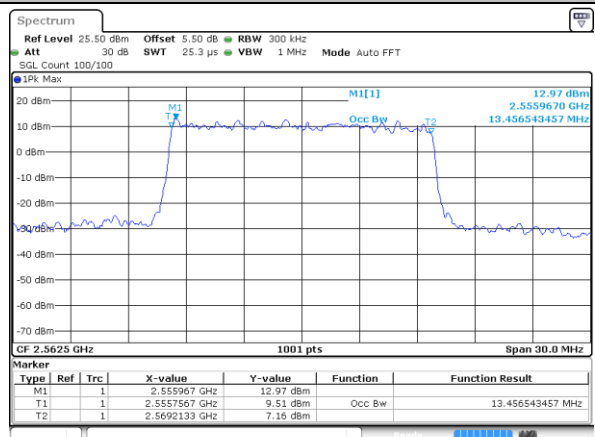


Date: 30 SEP 2018 22:57:08




LTE Band 7

Lowest Channel / 20MHz / QPSK

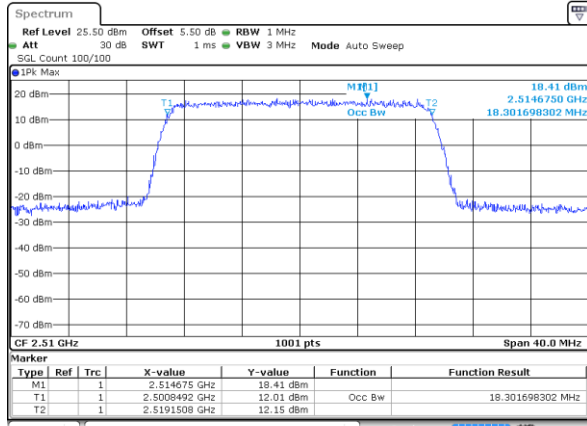


Date: 30 SEP 2018 23:03:52

Lowest Channel / 20MHz / 16QAM

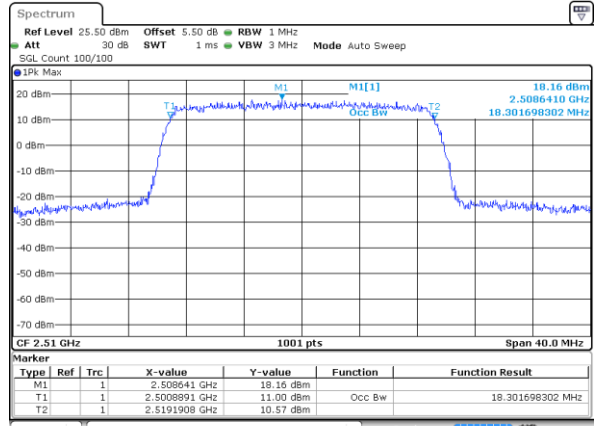


Date: 30 SEP 2018 23:04:12

Middle Channel / 20MHz / QPSK

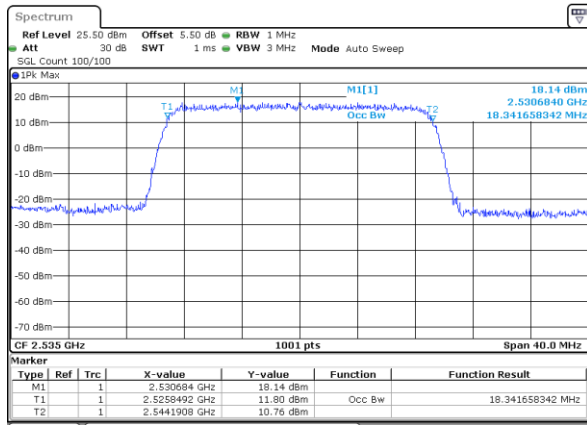


Date: 30 SEP 2018 23:08:25

Middle Channel / 20MHz / 16QAM

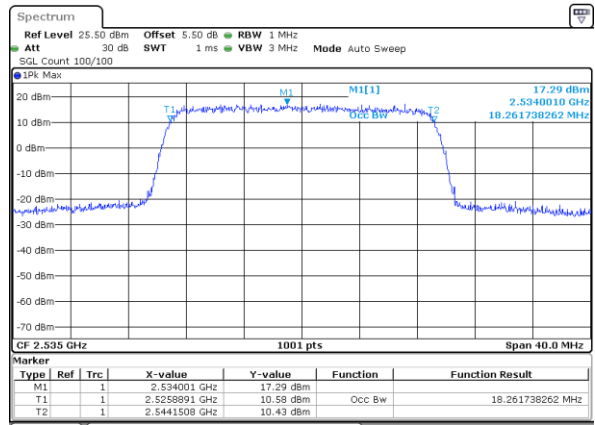


Date: 30 SEP 2018 23:08:05

Highest Channel / 20MHz / QPSK

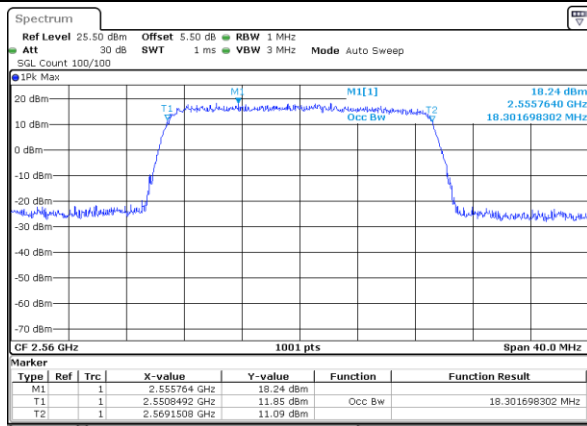

Date: 30 SEP 2018 23:08:45

Highest Channel / 20MHz / 16QAM

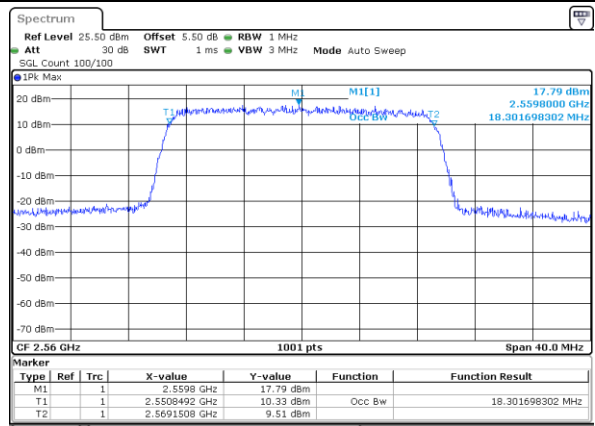


Date: 30 SEP 2018 23:09:05




Conducted Band Edge

LTE Band 7 / 5MHz / QPSK


Lowest Band Edge / 1 RB

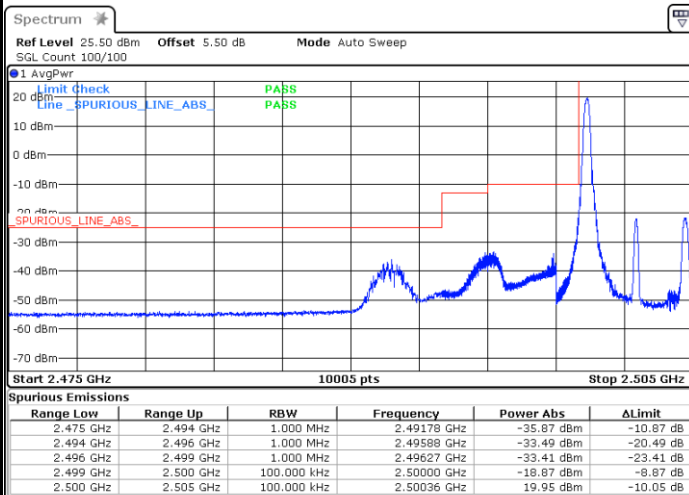


Highest Band Edge / 1 RB

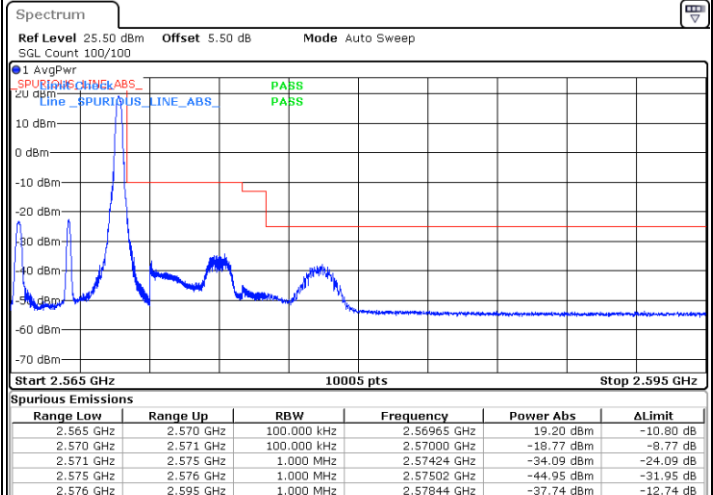

Lowest Band Edge / Full RB

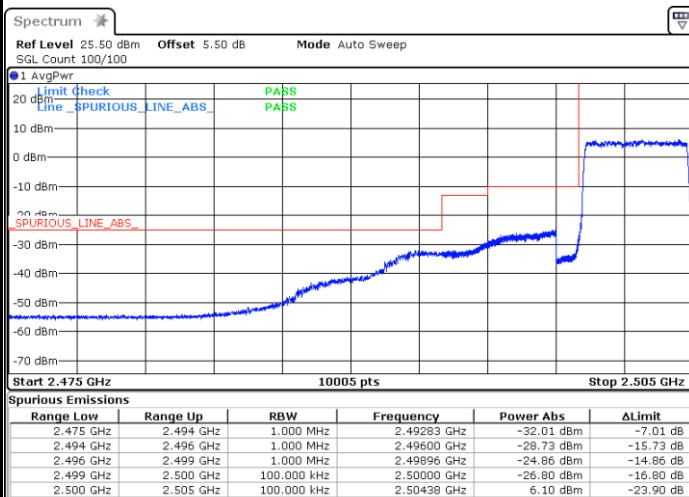


Highest Band Edge / Full RB

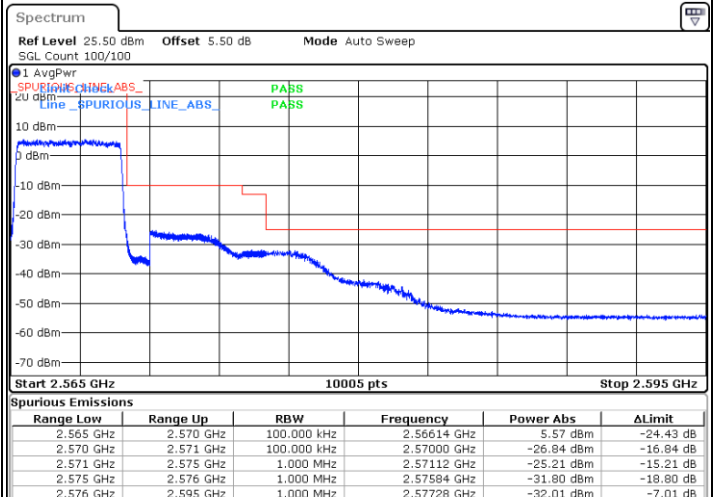




LTE Band 7 / 5MHz / 16QAM


Lowest Band Edge / 1 RB

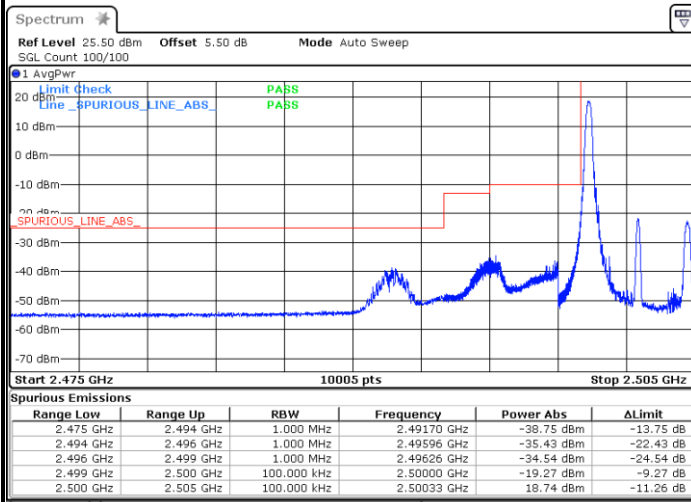


Highest Band Edge / 1 RB

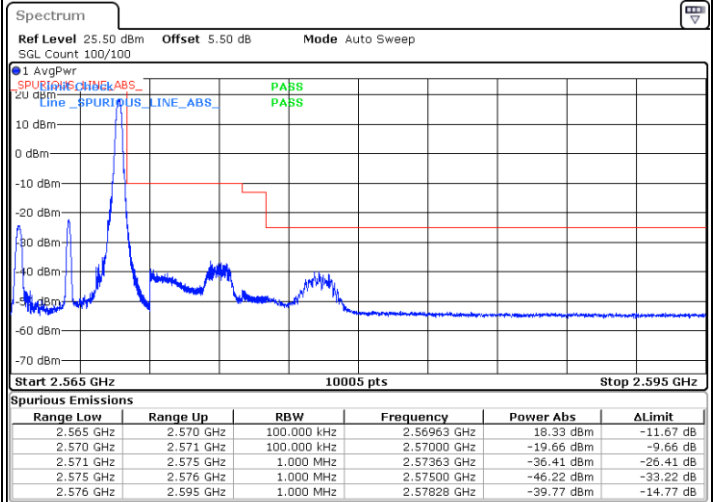

Lowest Band Edge / Full RB

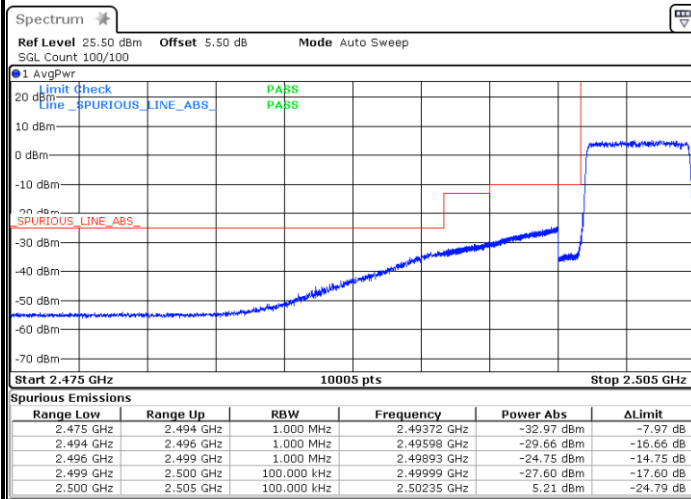


Highest Band Edge / Full RB

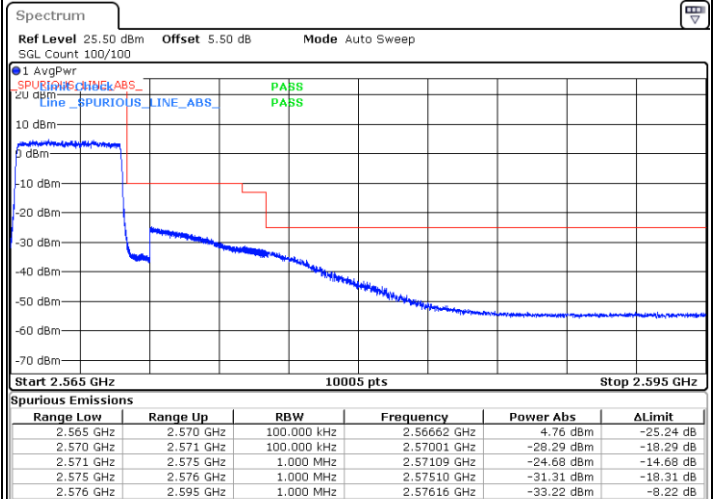




LTE Band 7 / 10MHz / QPSK


Lowest Band Edge / 1 RB

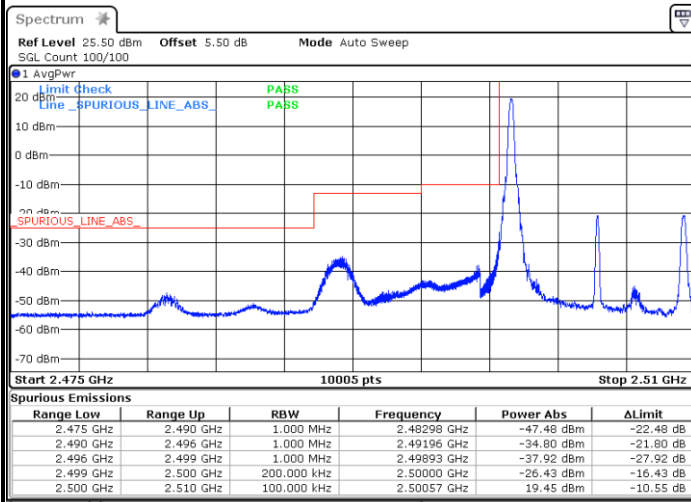


Highest Band Edge / 1 RB

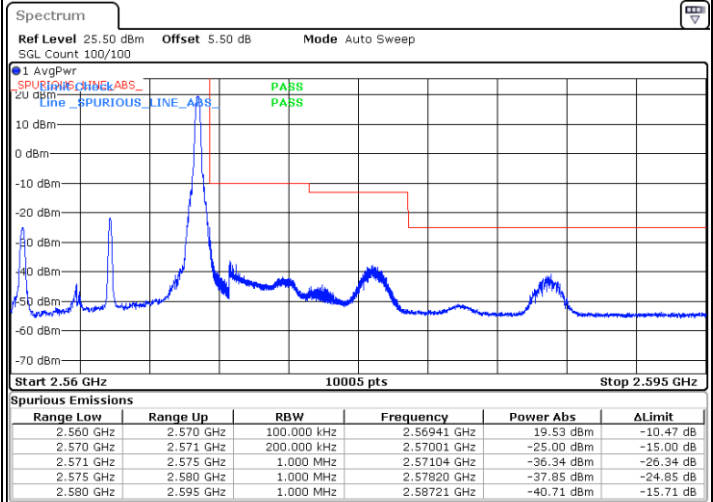

Lowest Band Edge / Full RB

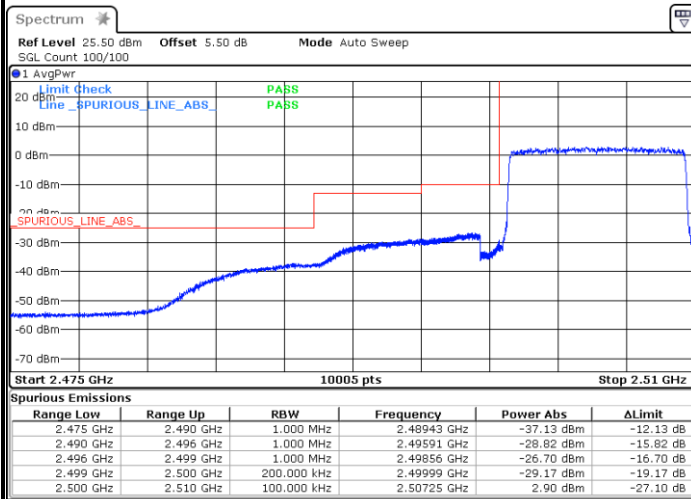


Highest Band Edge / Full RB

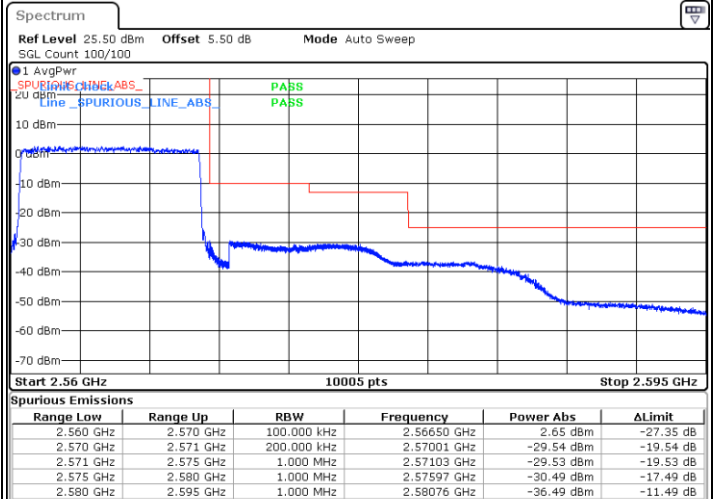




LTE Band 7 / 10MHz / 16QAM


Lowest Band Edge / 1 RB

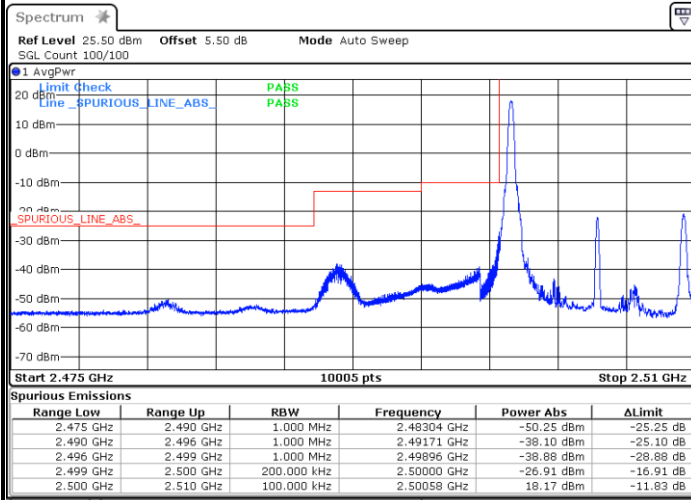


Highest Band Edge / 1 RB

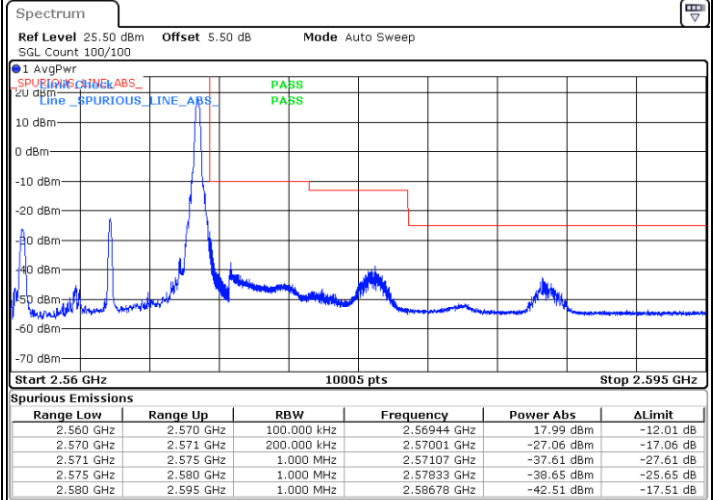

Lowest Band Edge / Full RB

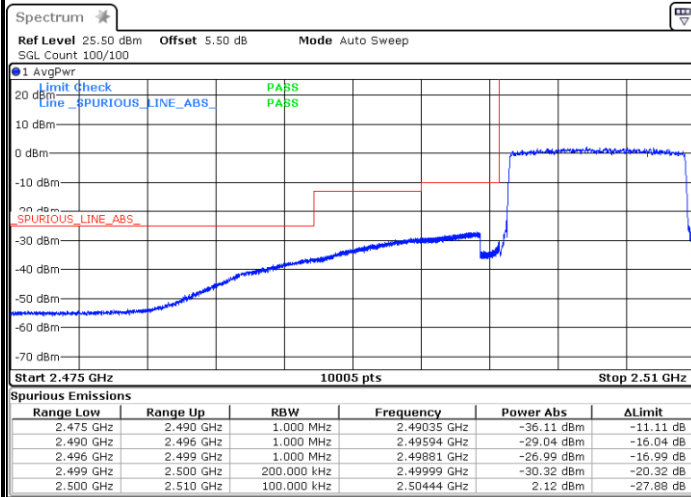


Highest Band Edge / Full RB

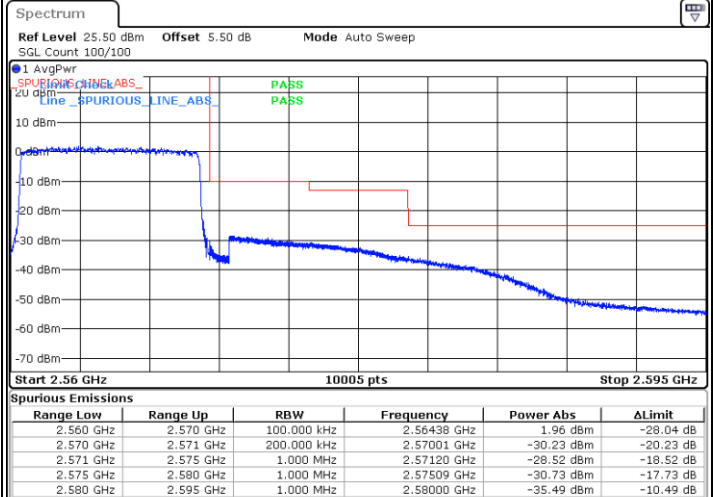




LTE Band 7 / 15MHz / QPSK


Lowest Band Edge / 1 RB

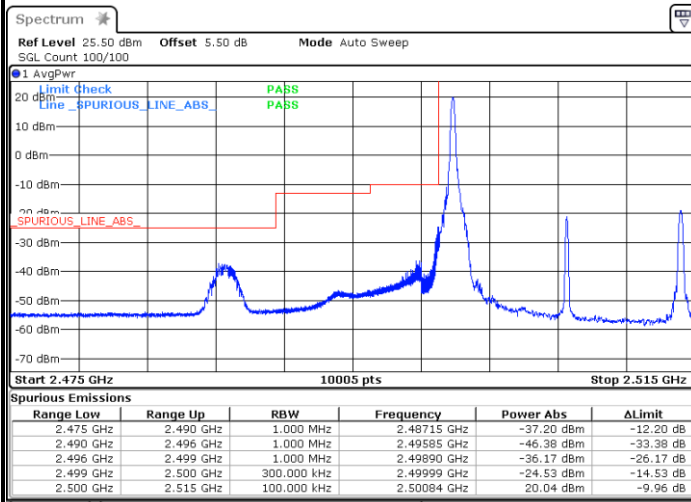


Highest Band Edge / 1 RB

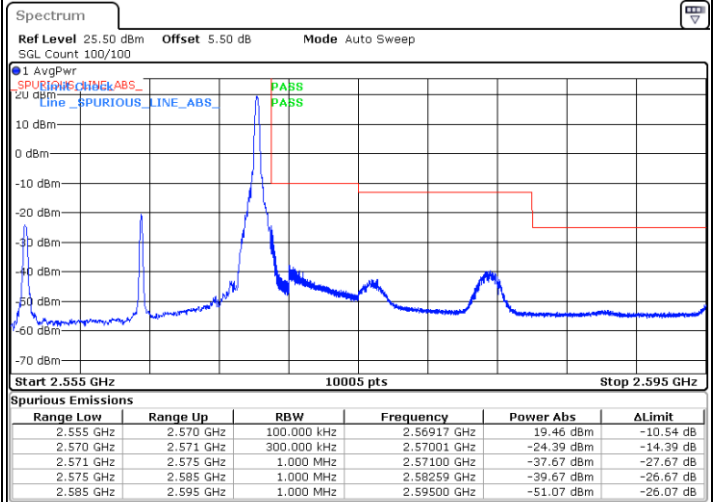

Lowest Band Edge / Full RB

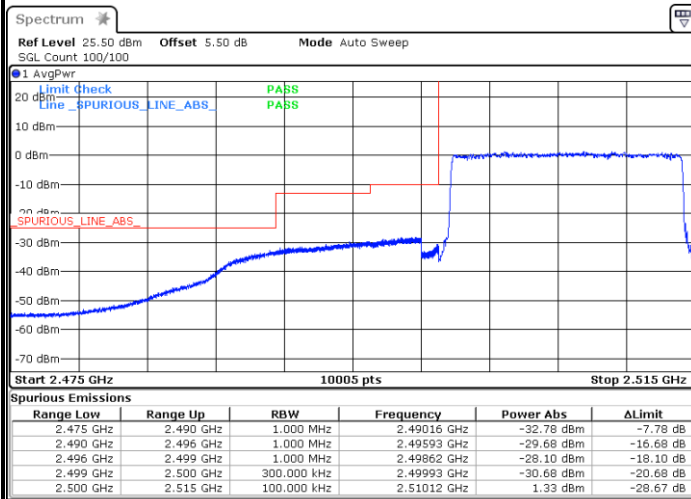


Highest Band Edge / Full RB

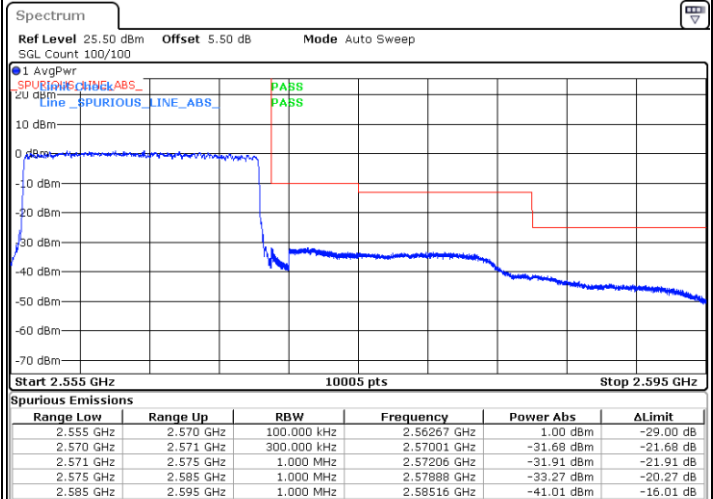




LTE Band 7 / 15MHz / 16QAM


Lowest Band Edge / 1 RB

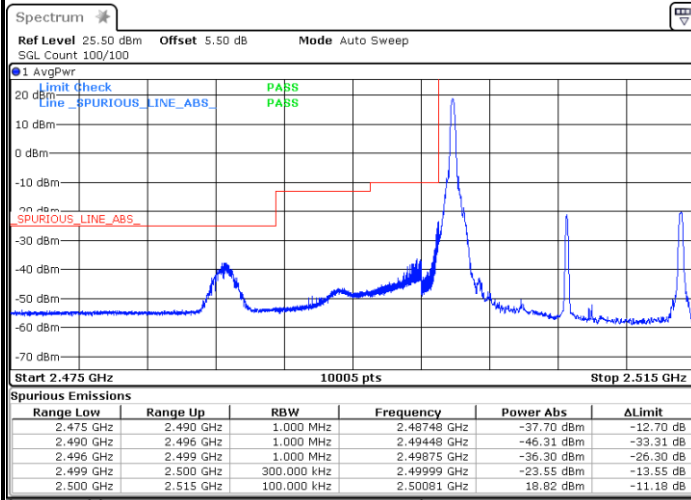


Highest Band Edge / 1 RB

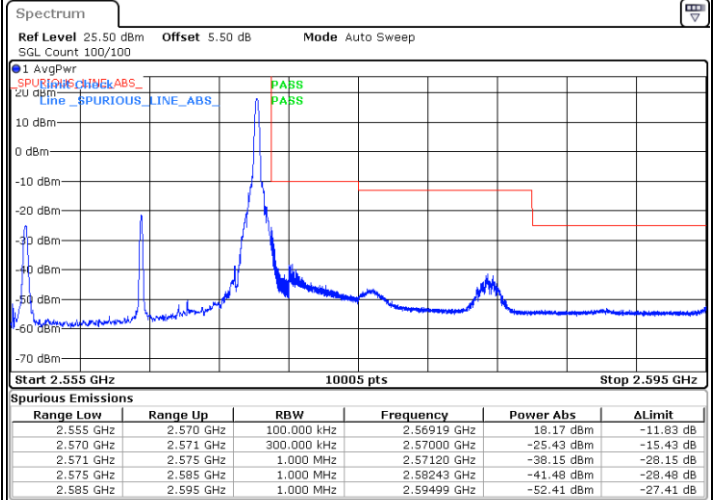

Lowest Band Edge / Full RB

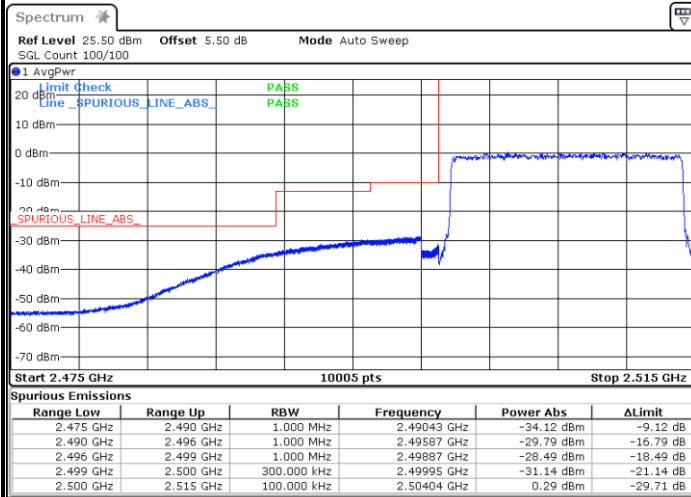


Highest Band Edge / Full RB

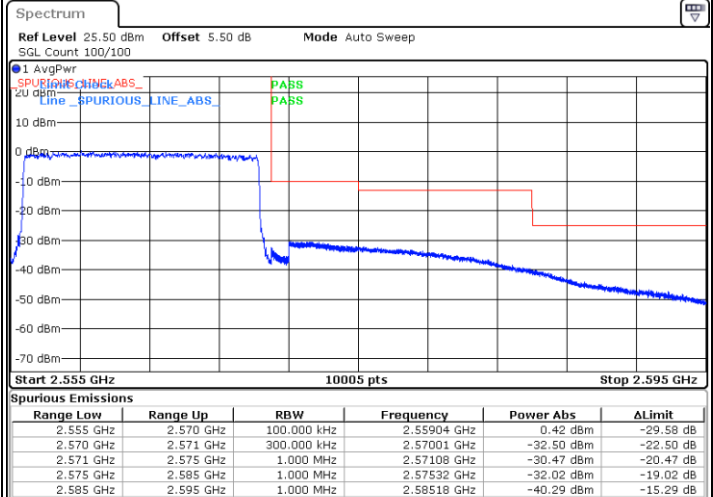




LTE Band 7 / 20MHz / QPSK


Lowest Band Edge / 1 RB

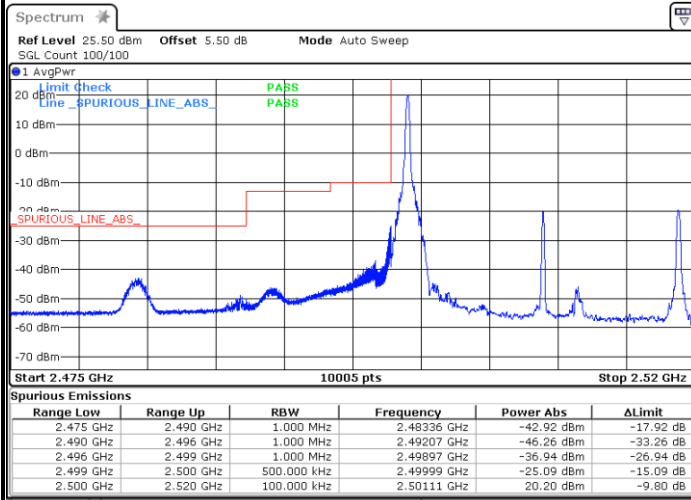


Highest Band Edge / 1 RB

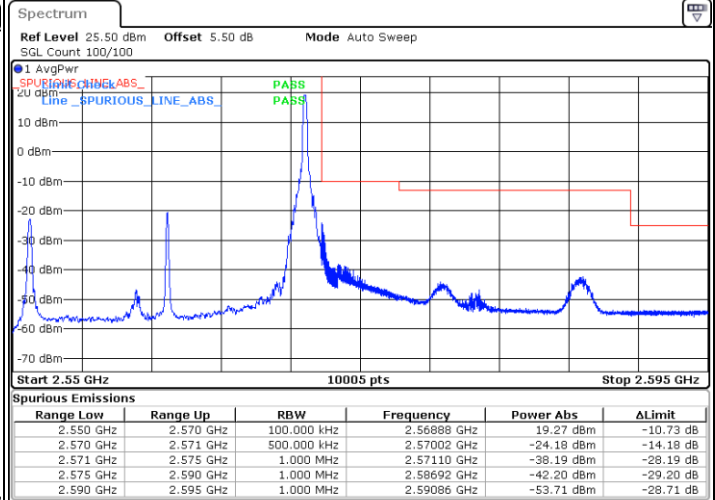

Lowest Band Edge / Full RB

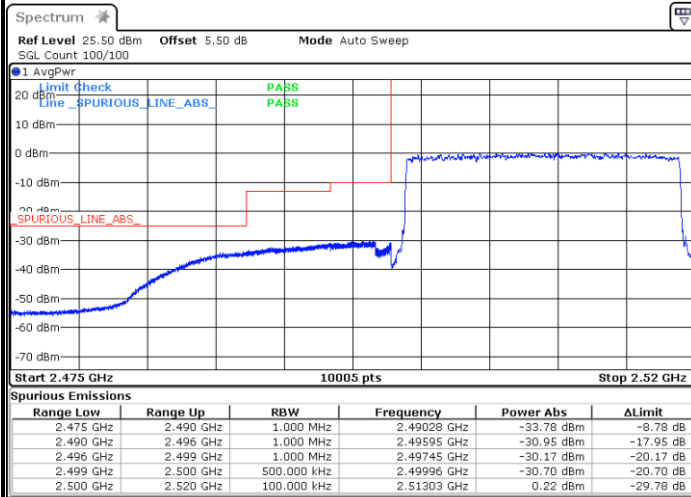


Highest Band Edge / Full RB

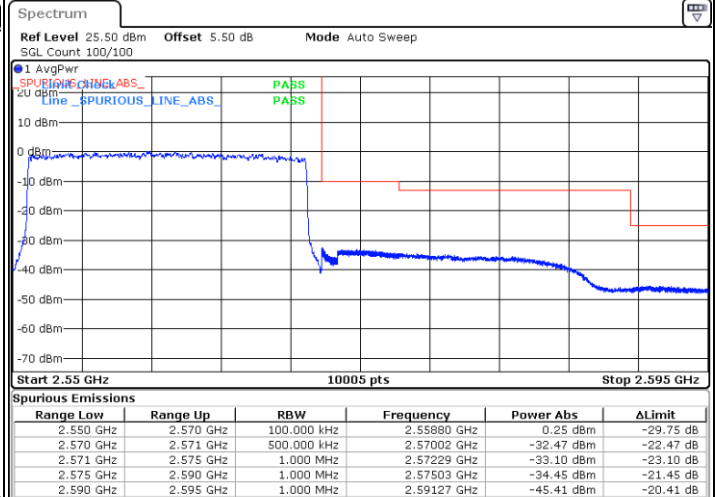




LTE Band 7 / 20MHz / 16QAM


Lowest Band Edge / 1 RB

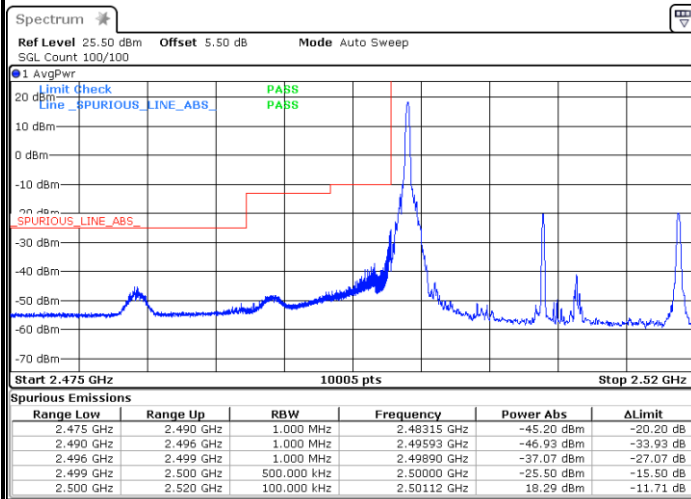


Highest Band Edge / 1RB

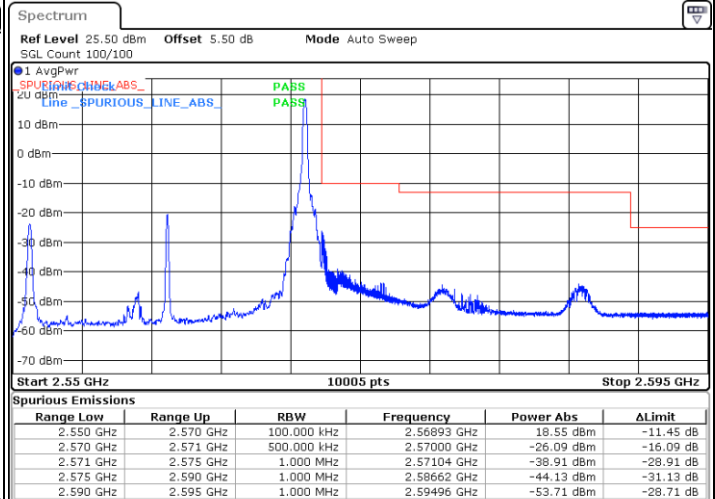

Lowest Band Edge / Full RB

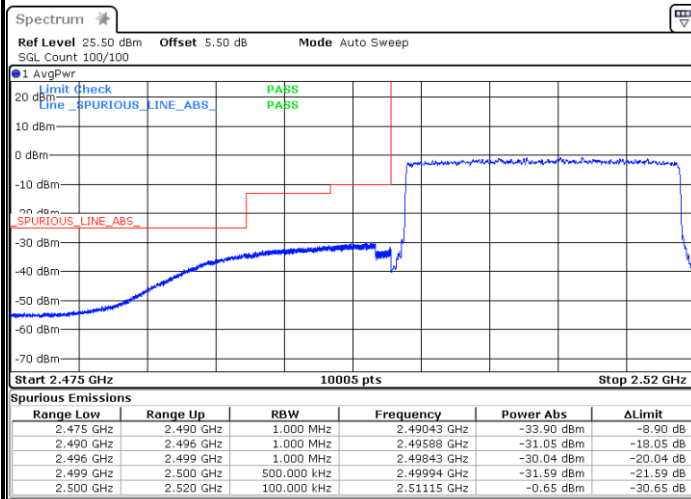

Highest Band Edge / Full RB

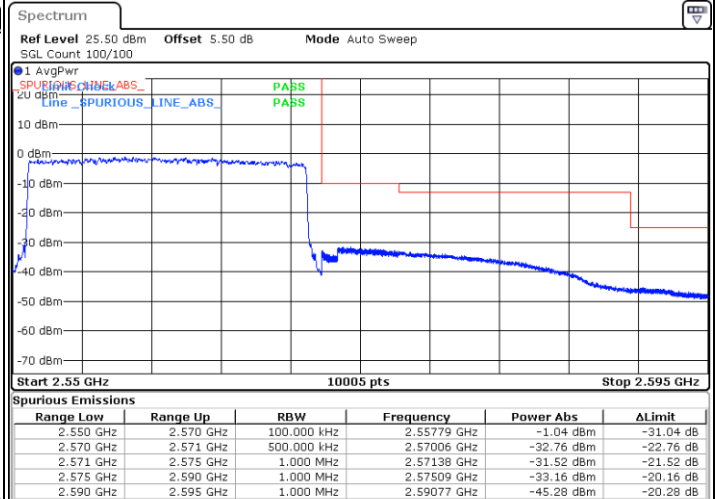




Conducted Spurious Emission


LTE Band 7 / 5MHz

Lowest Channel / QPSK

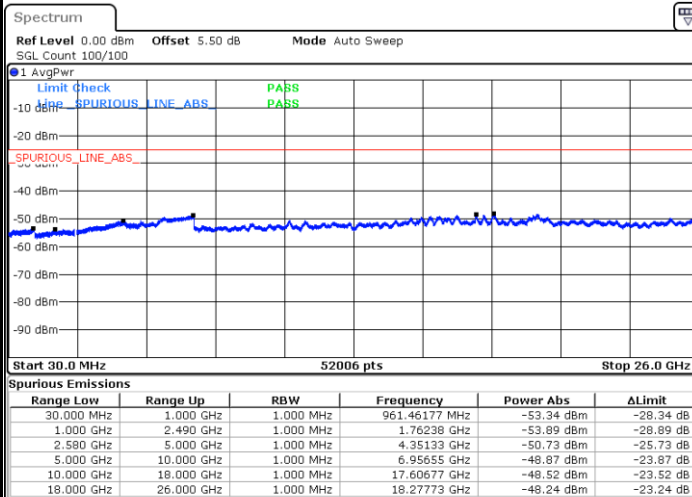


Date: 30 SEP.2018 22:30:18

Lowest Channel / 16QAM

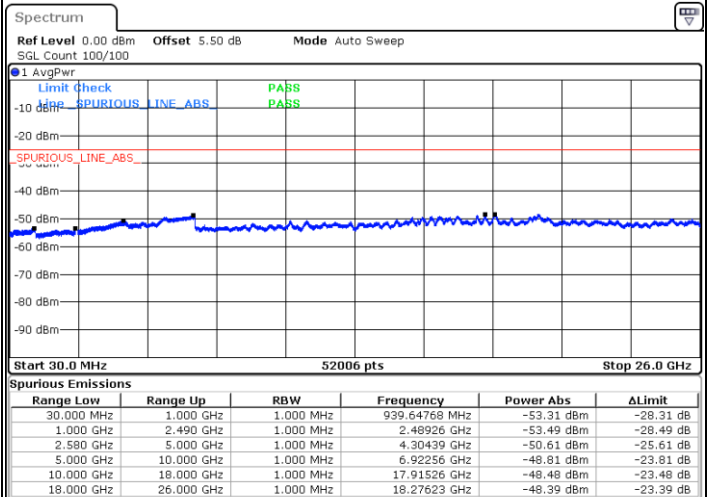


Date: 30 SEP.2018 22:29:25

Middle Channel / QPSK

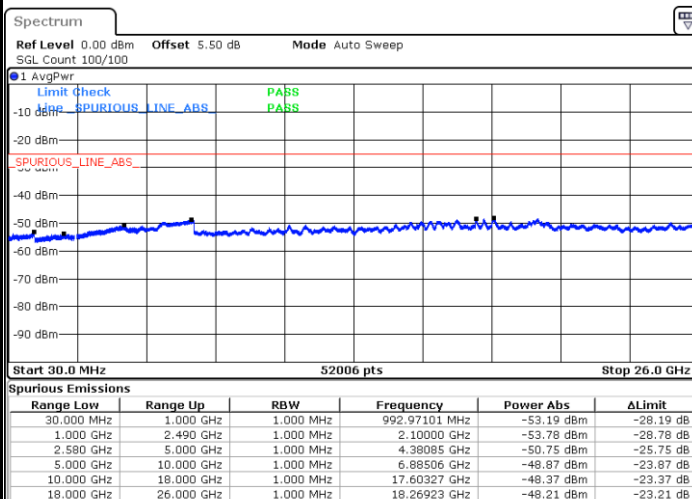

Date: 30 SEP.2018 22:31:11

Middle Channel / 16QAM

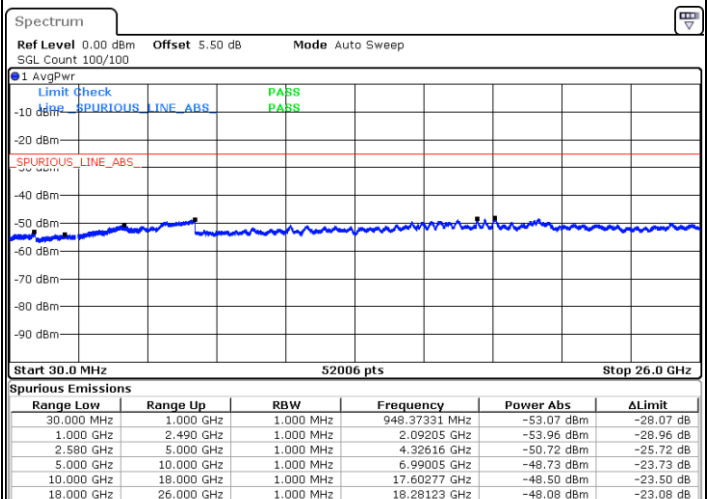


Date: 30 SEP.2018 22:32:04




LTE Band 7 / 5MHz

Highest Channel / QPSK

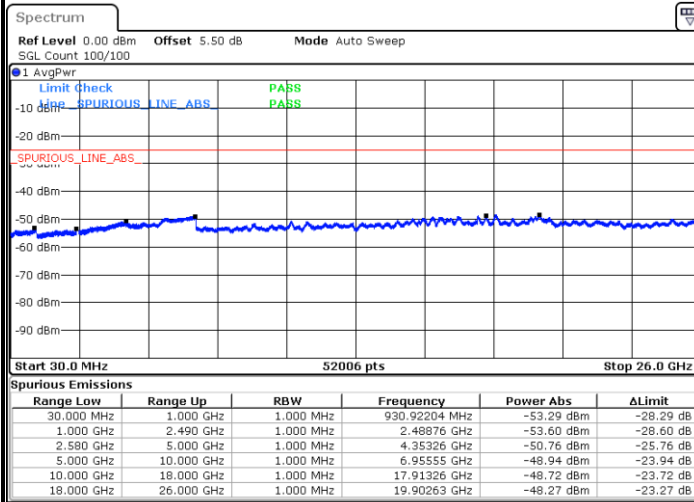

Date: 30 SEP 2018 22:39:49


Highest Channel / 16QAM

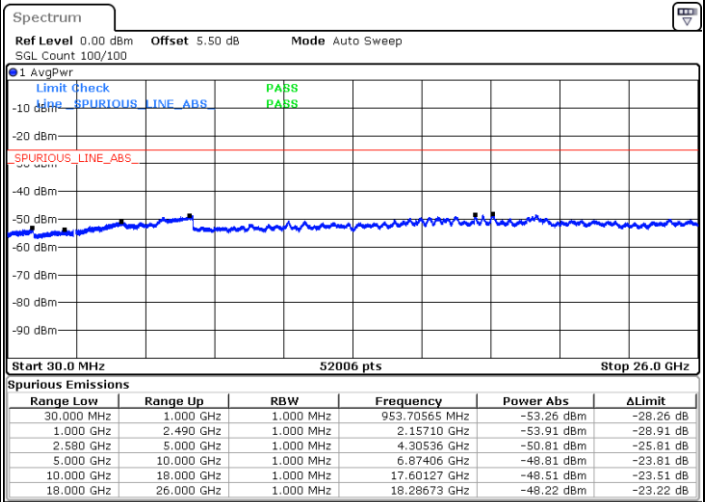

Date: 30 SEP 2018 22:38:55


LTE Band 7 / 10MHz

Lowest Channel / QPSK

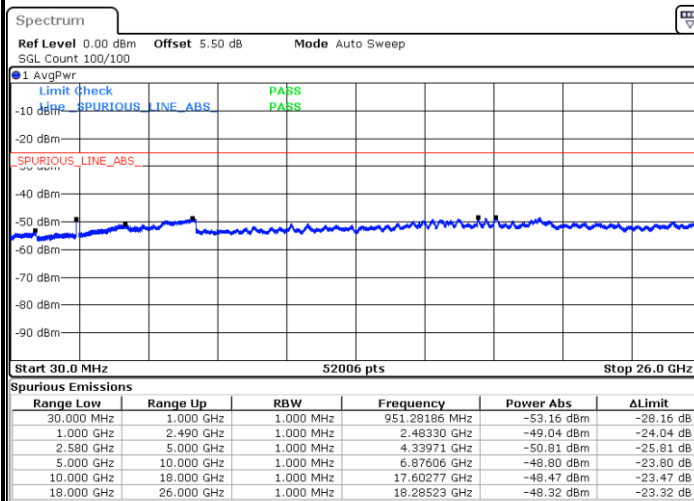

Date: 30 SEP 2018 22:42:15

Lowest Channel / 16QAM

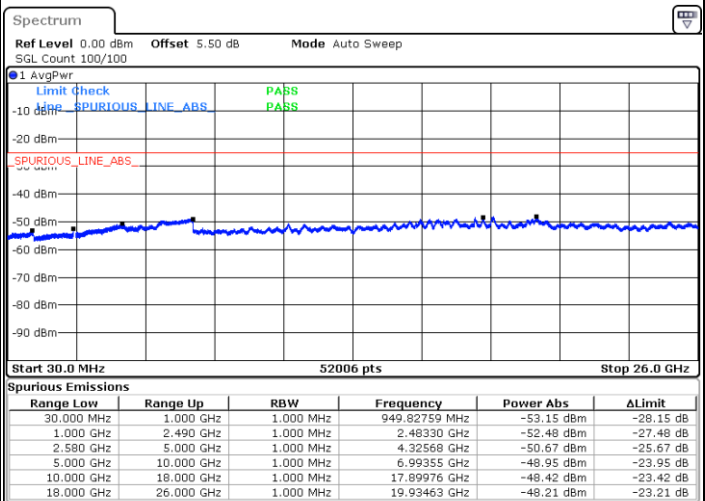

Date: 30 SEP 2018 22:41:22