



System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	10/21/2004 12:10:00 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Elliott	Relative Permittivity:	50.96
Relative Humidity:	50%	Conductivity:	1.861
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	6.00 mm
DUT Position:	antenna A against phantom	Max SAR Z-axis Location:	-132.40 mm
Antenna Configuration:	Integral	Max E Field:	8.68 V/m
Test Frequency:	2412MHz	SAR 1g:	0.088 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.041 W/kg
Conversion Factors:	0.585 / 0.585 / 0.585	SAR Start:	0.022 W/kg
Type of Modulation:		SAR End:	0.022 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	9/10/2004
Input Power Level:	maximum	Extrapolation:	poly4

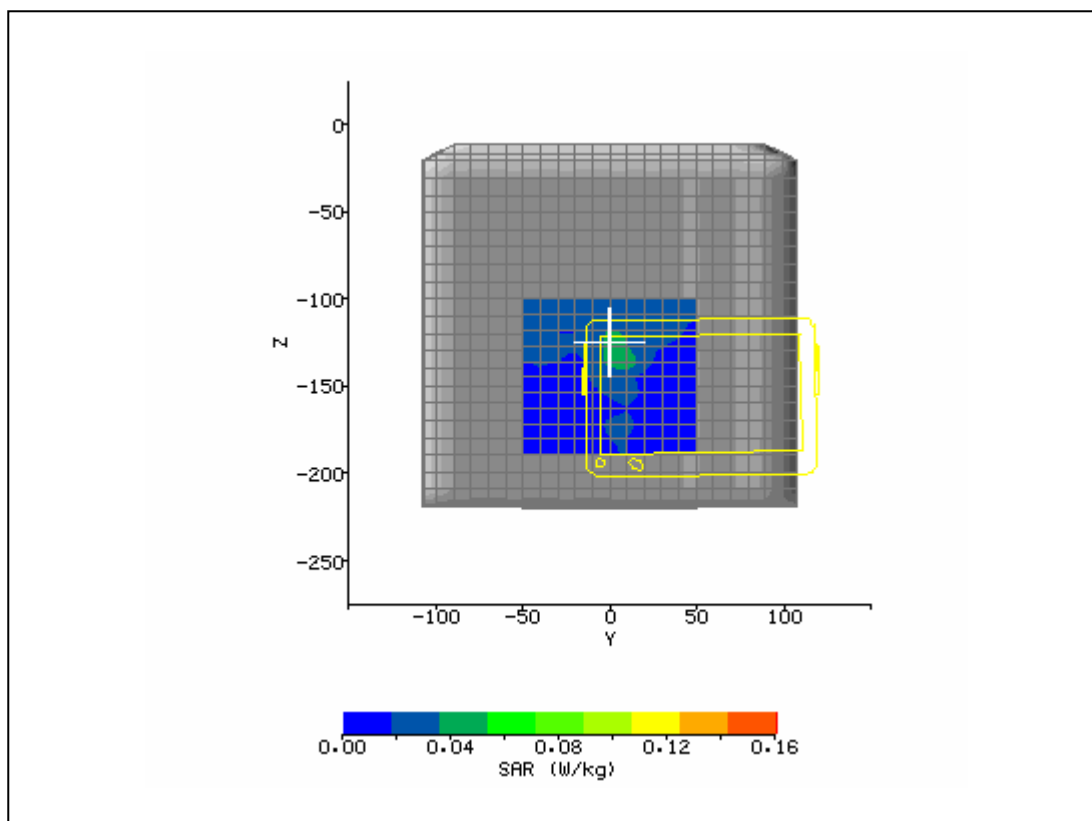

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	10/21/2004 12:47:40 PM	DUT Battery Model/No:	
Filename:	anta2437_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Elliott	Relative Permittivity:	50.99
Relative Humidity:	50%	Conductivity:	1.909
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-26.00 mm
DUT Position:	antenna B against phantom	Max SAR Z-axis Location:	-100.00 mm
Antenna Configuration:	Integral	Max E Field:	10.29 V/m
Test Frequency:	2437MHz	SAR 1g:	0.164 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.125 W/kg
Conversion Factors:	0.585 / 0.585 / 0.585	SAR Start:	0.066 W/kg
Type of Modulation:		SAR End:	0.066 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.002 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	9/10/2004
Input Power Level:	maximum	Extrapolation:	poly4

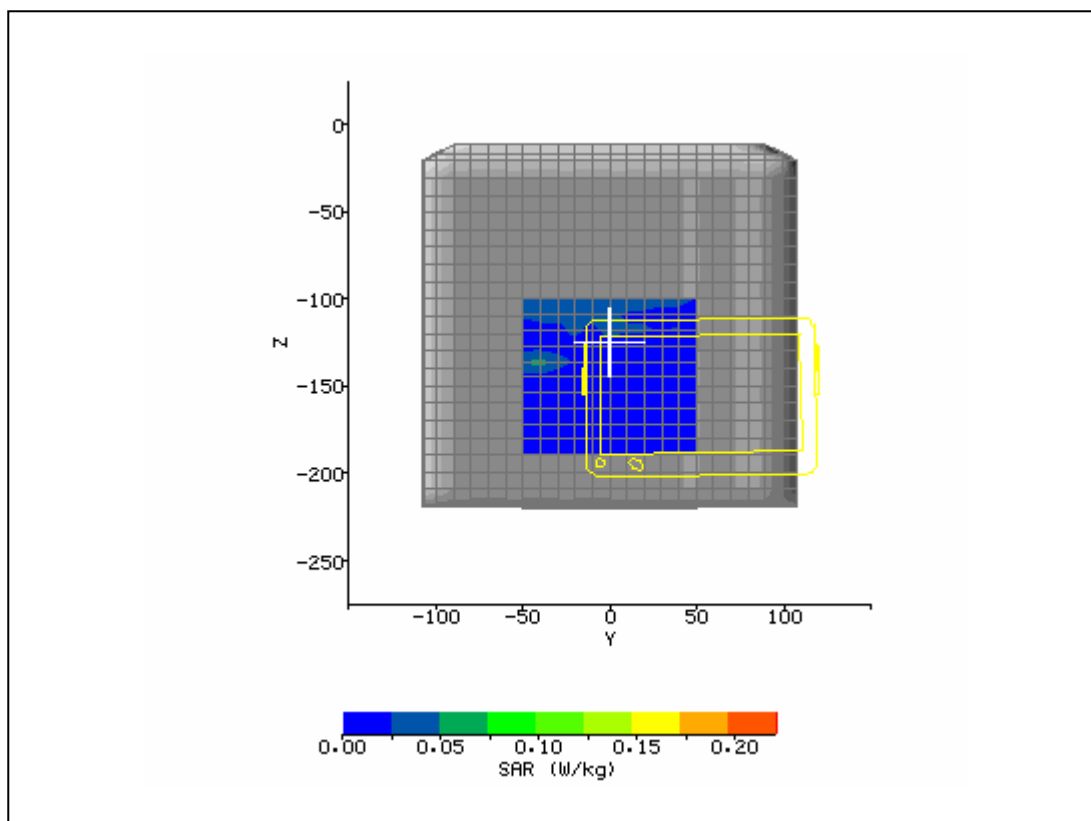

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	10/22/2004 3:52:28 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Elliott	Relative Permittivity:	50.82
Relative Humidity:	50%	Conductivity:	1.938
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-10.00 mm
DUT Position:	antenna B against phantom	Max SAR Z-axis Location:	-140.30 mm
Antenna Configuration:	Integral	Max E Field:	6.24 V/m
Test Frequency:	2612MHz	SAR 1g:	0.056 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.032 W/kg
Conversion Factors:	0.585 / 0.585 / 0.585	SAR Start:	0.022 W/kg
Type of Modulation:		SAR End:	0.022 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	9/10/2004
Input Power Level:	maximum	Extrapolation:	poly4

