

Test Laboratory: KES Co., Ltd.

System verification_450_HSL

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1084


Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 450$ MHz; $\sigma = 0.868$ mho/m; $\epsilon_r = 45.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: EX3DV4 - SN3879; ConvF(9.98, 9.98, 9.98); Calibrated: 2014-11-19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1344; Calibrated: 2014-11-12
- Phantom: ELI v5.0_2013_01_23; Type: QDOVA002AA; Serial: TP:1190
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat-Section_HSL_450/Area Scan (41x201x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.12 mW/g

Flat-Section_HSL_450/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 37.9 V/m; Power Drift = 0.140 dB
Peak SAR (extrapolated) = 1.54 W/kg
SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.779 mW/g
Maximum value of SAR (measured) = 1.20 mW/g

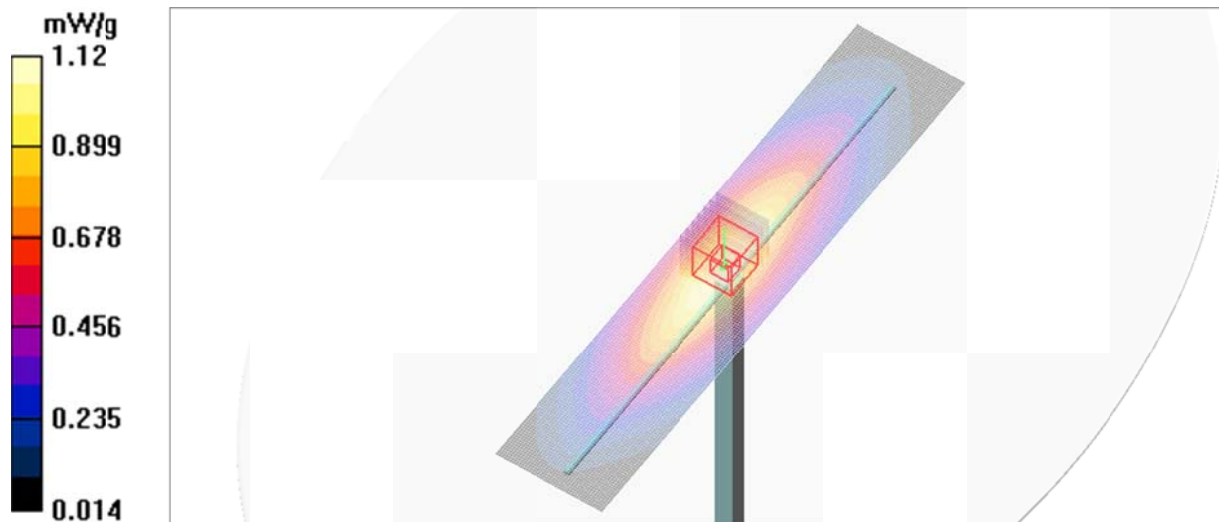

Date/Time: 2014-12-16 PM 4:39:31

Test Laboratory: KES Co., Ltd.

System verification_450_MSL

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1084

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 450$ MHz; $\sigma = 0.923$ mho/m; $\epsilon_r = 57.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: EX3DV4 - SN3879; ConvF(10.25, 10.25, 10.25); Calibrated: 2014-11-19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1344; Calibrated: 2014-11-12
- Phantom: ELI v5.0_2013_01_23; Type: QDOVA002AA; Serial: TP:1190
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat-Section_MSL_450/Area Scan (41x201x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.18 mW/g


Flat-Section_MSL_450/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.3 V/m; Power Drift = -0.108 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.756 mW/g

Maximum value of SAR (measured) = 1.18 mW/g

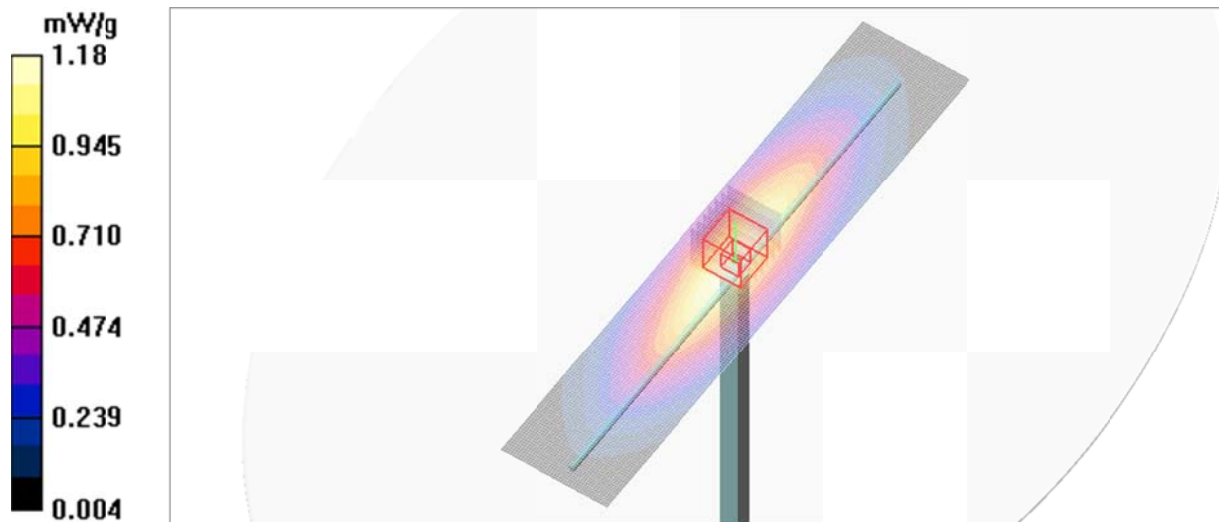

Plot 1

Date/Time: 2014-12-17 PM 2:13:38

Test Laboratory: KES Co., Ltd.

Face_GMRS_Analog_25mm Gap_462.6375

DUT: T75; Type: Bar; Serial: N/A

Communication System: CW; Frequency: 462.637 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 462.637$ MHz; $\sigma = 0.879$ mho/m; $\epsilon_r = 44.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: EX3DV4 - SN3879; ConvF(9.98, 9.98, 9.98); Calibrated: 2014-11-19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1344; Calibrated: 2014-11-12
- Phantom: ELI v5.0_2013_01_23; Type: QDOVA002AA; Serial: TP:1190
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Face_GMRS_Analog_25mm Gap_462.6375/Area Scan (51x121x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.888 mW/g

Face_GMRS_Analog_25mm Gap_462.6375/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 32.5 V/m; Power Drift = -0.195 dB

Peak SAR (extrapolated) = 0.926 W/kg

SAR(1 g) = 0.762 mW/g; SAR(10 g) = 0.611 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.793 mW/g

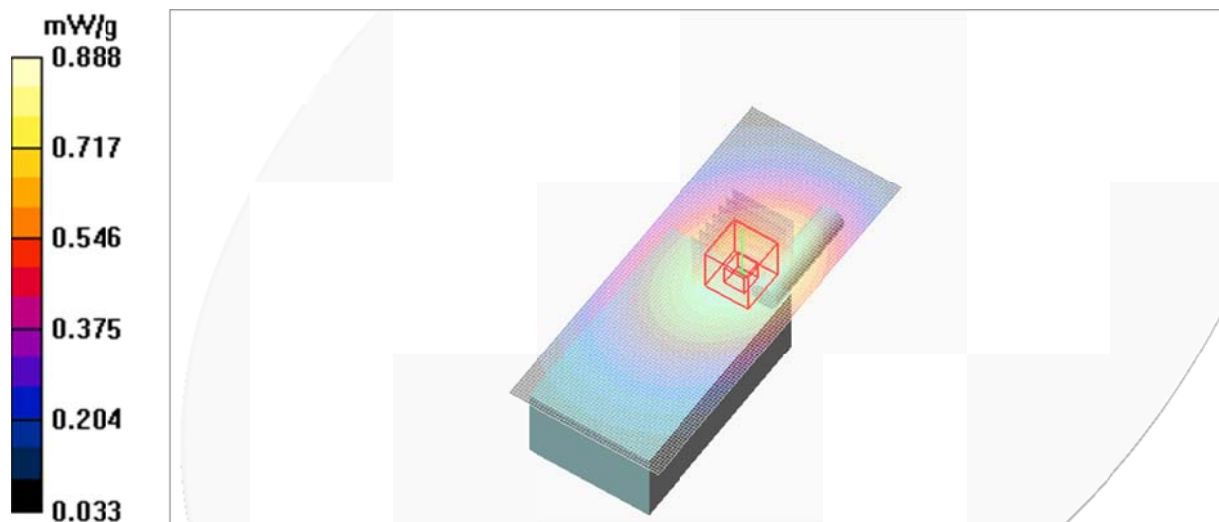

Test Laboratory: KES Co., Ltd.

Face_FRS_Analog_25mm Gap_467.6375

DUT: T75; Type: Bar; Serial: N/A

Communication System: CW; Frequency: 467.637 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 467.637$ MHz; $\sigma = 0.885$ mho/m; $\epsilon_r = 44.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: EX3DV4 - SN3879; ConvF(9.98, 9.98, 9.98); Calibrated: 2014-11-19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1344; Calibrated: 2014-11-12
- Phantom: ELI v5.0_2013_01_23; Type: QDOVA002AA; Serial: TP:1190
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Face_FRS_Analog_25mm Gap_467.6375/Area Scan (51x121x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.238 mW/g

Face_FRS_Analog_25mm Gap_467.6375/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 16.6 V/m; Power Drift = -0.200 dB

Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.221 mW/g; SAR(10 g) = 0.175 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.231 mW/g

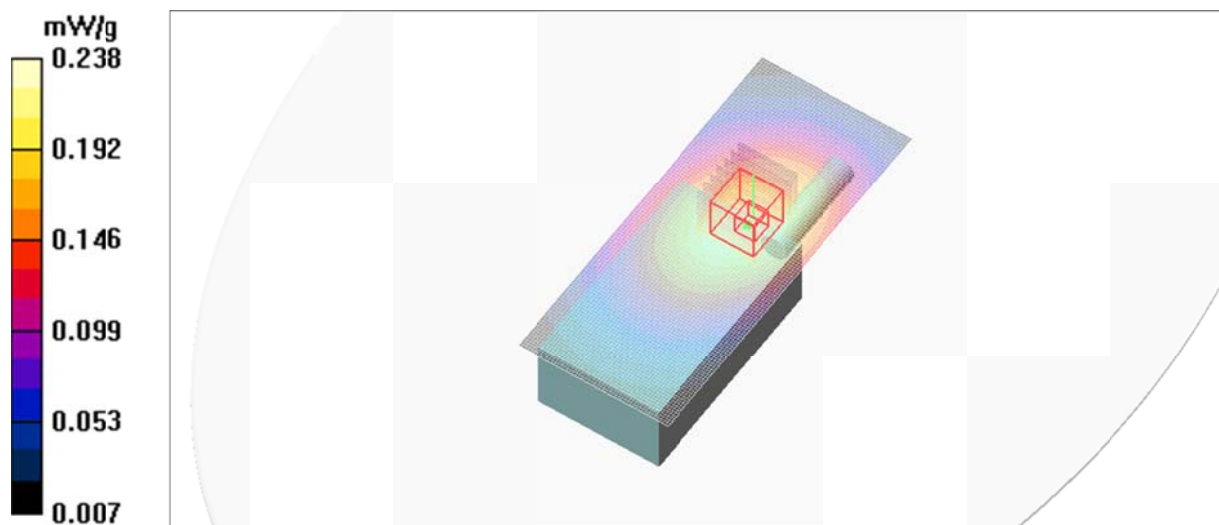

Test Laboratory: KES Co., Ltd.

Body_GMRS_Analog_Touch_462.6375

DUT: T75; Type: Bar; Serial: N/A

Communication System: CW; Frequency: 462.637 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 462.637$ MHz; $\sigma = 0.923$ mho/m; $\epsilon_r = 57.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: EX3DV4 - SN3879; ConvF(10.25, 10.25, 10.25); Calibrated: 2014-11-19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1344; Calibrated: 2014-11-12
- Phantom: ELI v5.0_2013_01_23; Type: QDOVA002AA; Serial: TP:1190
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body_GMRS_Analog_Touch_462.6375/Area Scan (51x121x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.14 mW/g

Body_GMRS_Analog_Touch_462.6375/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 33.8 V/m; Power Drift = -0.191 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.778 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.08 mW/g

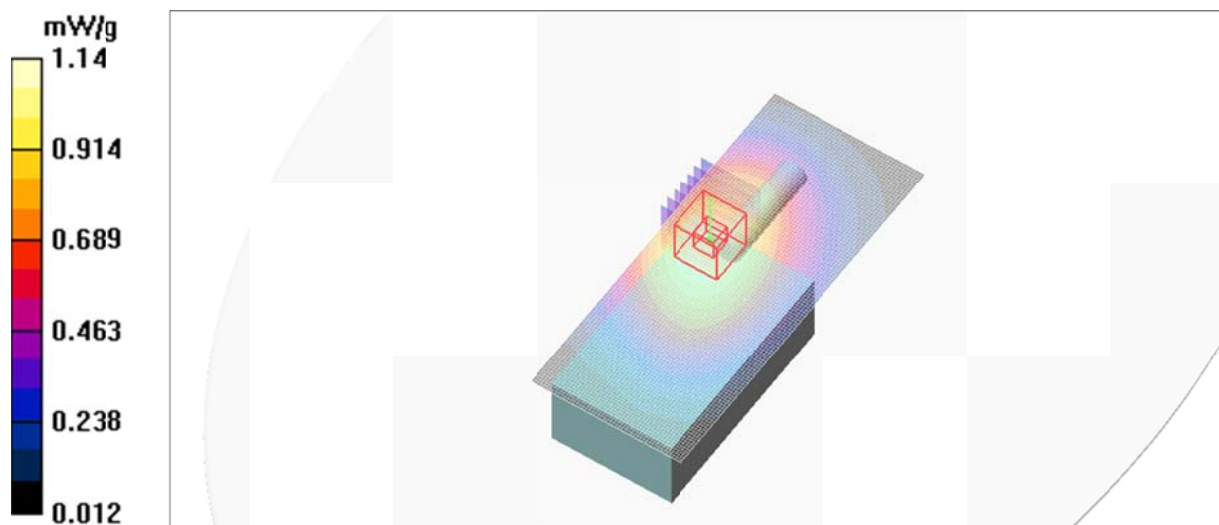

Test Laboratory: KES Co., Ltd.

Body_FRS_Analog_Touch_467.6375

DUT: T75; Type: Bar; Serial: N/A

Communication System: CW; Frequency: 467.637 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 467.637$ MHz; $\sigma = 0.927$ mho/m; $\epsilon_r = 56.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: EX3DV4 - SN3879; ConvF(10.25, 10.25, 10.25); Calibrated: 2014-11-19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1344; Calibrated: 2014-11-12
- Phantom: ELI v5.0_2013_01_23; Type: QDOVA002AA; Serial: TP:1190
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body_FRS_Analog_Touch_467.6375/Area Scan (51x121x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.288 mW/g

Body_FRS_Analog_Touch_467.6375/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.9 V/m; Power Drift = -0.143 dB

Peak SAR (extrapolated) = 0.356 W/kg

SAR(1 g) = 0.270 mW/g; SAR(10 g) = 0.199 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.286 mW/g

