

FCC

SAR

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
HUAWEI MateBook

ISSUED TO
Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co.,
Ltd., Bantian, Longgang District, Shenzhen, 518129, China

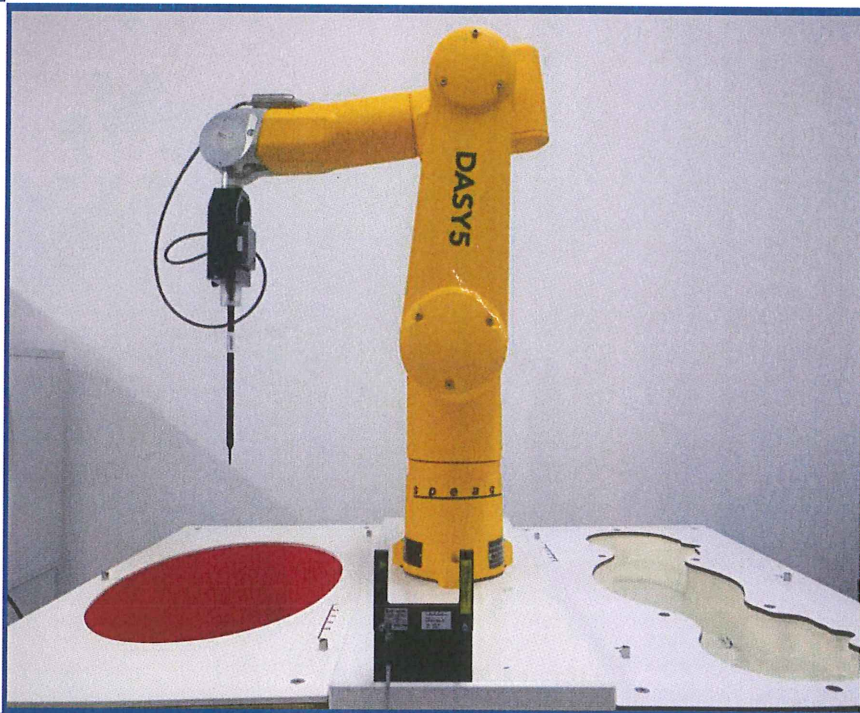

Tested by: Zong Liyao

Zong Liyao
(Engineer)

Date Nov. 05, 2018

Approved by: Wei Yanquan

Wei Yanquan
(Chief Engineer)

Date Nov. 05, 2018

Report No.: BL-SZ1880358-701

EUT Name: HUAWEI MateBook

Model Name: WRT-W19, WRT-W29

Brand Name: HUAWEI

FCC ID: QISWRT-WX9

Test Standard: FCC 47 CFR Part 2.1093

ANSI C95.1: 1999, IEEE 1528: 2013

Maximum SAR: Body (1 g): 0.50 W/kg

Test Conclusion: Pass

Test Date: Sep. 24, 2018 ~ Sep. 29, 2018

Date of Issue: Nov. 05, 2018

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Nov. 05, 2018</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
1.3	Test Environment Condition	4
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information	6
2.2	Manufacturer Information.....	6
2.3	Factory Information.....	6
2.4	General Description for Equipment under Test (EUT).....	6
2.5	Differences Description.....	7
2.6	Ancillary Equipment.....	8
2.7	Technical Information	10
3	SUMMARY OF TEST RESULT	11
3.1	Test Standards	11
3.2	Device Category and SAR Limit	12
3.3	Test Result Summary	13
3.4	Test Uncertainty	14
4	MEASUREMENT SYSTEM	15
4.1	Specific Absorption Rate (SAR) Definition	15
4.2	DASY SAR System	16
5	SYSTEM VERIFICATION	24
5.1	Purpose of System Check	24
5.2	System Check Setup	24
6	TEST POSITION CONFIGURATIONS	25
6.1	Body Supported Exposure Condition	25

7	MEASUREMENT PROCEDURE	26
7.1	Measurement Process Diagram	26
7.2	SAR Scan General Requirement	27
7.3	Measurement Procedure	28
7.4	Area & Zoom Scan Procedure	28
8	CONDUCTED RF OUPUT POWER	29
8.1	WIFI.....	29
8.2	Bluetooth (Main Antenna)	37
9	TEST EXCLUSION CONSIDERATION	38
9.1	SAR Test Exclusion Consideration Table	38
10	TEST RESULT	43
10.1	Bluetooth	43
10.2	WIFI 2.4GHz.....	43
10.3	WIFI 5GHz.....	44
11	SAR Measurement Variability	45
12	SIMULTANEOUS TRANSMISSION.....	46
12.1	Simultaneous Transmission Mode Consider	46
12.2	Sum SAR of Simultaneous Transmission	46
13	TEST EQUIPMENTS LIST	47
ANNEX A	SIMULATING LIQUID VERIFICATION RESULT	48
ANNEX B	SYSTEM CHECK RESULT	49
ANNEX C	TEST DATA.....	54
ANNEX D	EUT EXTERNAL PHOTOS	63
ANNEX E	SAR TEST SETUP PHOTOS	63
ANNEX F	CALIBRATION REPORT	63

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by American Association for Laboratory Accreditation (A2LA) according to ISO/IEC 17025. The accreditation certificate is 4344.01. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Test Environment Condition

Ambient Temperature	21°C to 23°C
Ambient Relative Humidity	36% to 48%
Ambient Pressure	100 KPa to 102 KPa

1.4 Announce

- (1) The test report reference to the report template version v2.2.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Huawei Technologies Co., Ltd.
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, China

2.2 Manufacturer Information

Manufacturer	Huawei Technologies Co., Ltd.
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, China

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	HUAWEI MateBook
Model Name Under Test	WRT-W19, WRT-W29
Series Model Name	WRT-WXXXXX (The "X" in model name can be 0 to 9, A to Z, a to z, "-" or blank, only differences are the appearance and model names for trading purpose)
Description of Model Name Differentiation	Refer section 2.5
Hardware Version	NX8309_PCB_MB_V5_HF
Software Version	1.4.0.11 (C001)
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Differences Description

	WRT-W29 (with GPU version)	WRT-W19 (with GPU version)	WRT-W29 (without GPU version)	WRT-W19 (without GPU version)
Main board	The same	The same	Delete GPU chip and related components	Delete GPU chip and related components
Frequency bands	The same, support Wi-Fi 2.4G&5G support BT	The same, support Wi-Fi 2.4G&5G support BT	The same, support Wi-Fi 2.4G&5G support BT	The same, support Wi-Fi 2.4G&5G support BT
BT/ Wi-Fi module	The same	The same	The same	The same
BT/ Wi-Fi antenna	The same	The same	The same	The same
Appearance	The same	The same	The same	The same
Dimension	The same	The same	The same	The same
CPU	Intel i7- 8565U, Support max4.6GHz	Intel i5- 8265U, Support max3.9GHz	Intel i7-8565U, Support max4.6GHz	Intel i5-8265U, Support max3.9GHz
GPU	support	support	Not support	Not support
Memory	16/8G	8G	8G	8G
SSD	512G/256G	256G	512G	512G/256G
Rear camera	Not support	Not support	Not support	Not support
Front camera	The same	The same	The same	The same
Adapter	The same	The same	The same	The same
Battery	The same	The same	The same	The same
Accessories	The same, Docking Station	The same, Docking Station	The same, Docking Station	The same, Docking Station
Note: Full SAR test is performed on WRT-W29 (with GPU version), WRT-W29 (without GPU version), WRT-W19 (with GPU version) and WRT-W19 (without GPU version) shares the same test data of WRT-W29 (with GPU version) for each same frequency band.				

2.6 Ancillary Equipment

Ancillary Equipment 1	Rechargeable Li-ion Polymer Battery 1	
	Brand Name	HUAWEI
	Model No.	HB4593J6ECW
	Serial No.	N/A
	Capacity	3660 mAh
	Rated Voltage	11.4 V
	Limit Charge Voltage	13.05 V
	Manufacturer	Huizhou Desay Battery Co., Ltd
Ancillary Equipment 2	Rechargeable Li-ion Polymer Battery 2	
	Brand Name	HUAWEI
	Model No.	HB4593J6ECW
	Serial No.	N/A
	Capacity	3660 mAh
	Rated Voltage	11.4 V
	Limit Charge Voltage	13.05 V
	Manufacturer	Dynapack international technology corp
Ancillary Equipment 3	Adapter 1	
	Brand Name	HUAWEI
	Model No.	HW-200325BP0 (UK Plug)
	Serial No.	C978Y9J7F00037
	Rated Input	100-240 V~, 1.8 A, 50/60 Hz
	Rated Output	5 V= 2 A / 9 V= 2 A / 12 V= 2 A / 15 V= 3 A / 20 V= 3.25 A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 4	Adapter 2	
	Brand Name	HUAWEI
	Model No.	HW-200325UP0 (US Plug)
	Serial No.	C976Y1J8P00106
	Rated Input	100-240 V~, 1.8 A, 50/60 Hz
	Rated Output	5 V= 2 A / 9 V= 2 A / 12 V= 2 A / 15 V= 3 A / 20 V= 3.25 A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 5	Adapter 3	
	Brand Name	HUAWEI
	Model No.	HW-200325EP0 (EU Plug)
	Serial No.	C974Y1J8W01182
	Rated Input	100-240 V~, 1.8 A, 50/60 Hz
	Rated Output	5 V= 2 A / 9 V= 2 A / 12 V= 2 A / 15 V= 3 A / 20 V= 3.25 A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 6	Adapter 4	
	Brand Name	HUAWEI
	Model No.	HW-200325CP0 (GB Plug)
	Serial No.	C973Y1J5S01577

	Rated Input	100-240 V~, 1.8 A, 50/60 Hz
	Rated Output	5 V= 2 A / 9 V= 2 A / 12 V= 2 A / 15 V= 3 A / 20 V= 3.25 A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 7	USB-A to RJ45	
	Model No.	AD70
	Serial No.	48XJU17A18011914
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 8	Docking Station	
	Model No.	AD11
	Serial No.	N/A
	Manufacturer	Huawei Technologies Co.,Ltd.
Ancillary Equipment 9	USB Cable	
	Length (Approx.)	1.8 m
Ancillary Equipment 10	USB-C to USB-A	
Note: All adapter models only with different plug for marketing purpose.		

2.7 Technical Information

Network and Wireless connectivity	Bluetooth 5.0 (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n(HT20/40) and 802.11ac 5.8G SRD
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	2.4G WLAN; 5G WLAN; Bluetooth	
Frequency Range	802.11b/g	2400 ~ 2483.5 MHz
	802.11n (HT20/HT40)	2400 ~ 2483.5 MHz
	802.11 a	5150 ~ 5350 MHz
		5470 ~ 5725 MHz
		5725 ~ 5850 MHz
	802.11 n(HT20/HT40)	5150 ~ 5350 MHz
		5470 ~ 5725 MHz
		5725 ~ 5850 MHz
	802.11 ac(VHT20/VHT40/VHT80/VHT160)	5150 ~ 5350 MHz
		5470 ~ 5725 MHz
		5725 ~ 5850 MHz
	Bluetooth	2400 ~ 2483.5 MHz
Antenna Type	WLAN	PIFA
	Bluetooth	PIFA
Hotspot Function	N/A	
Power Reduction	Not Support	
Exposure Category	General Population/Uncontrolled exposure	
EUT Stage	Portable Device	
Product	Type	
	☒ Production unit	☐ Identical prototype

3 SUMMARY OF TEST RESULT

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1999	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	KDB 248227 D01 v02r02	SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters
8	KDB 616217 D04v01r02	SAR for laptop and tablets

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Table of Exposure Limits:

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

General Population/Uncontrolled Exposure: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled Exposure: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

3.3.1 Highest SAR (1 g Value)

Band	Maximum Scaled SAR (W/kg)	Maximum Report SAR (W/kg)
	Body	Body
2.4 G Main Antenna	0.37	0.50
2.4 G Aux. Antenna	0.50	
5.3G Main Antenna	0.26	
5.3G Aux. Antenna	0.34	
5.6 G Main Antenna	0.36	
5.6 G Aux. Antenna	0.32	
5.8 G Main Antenna	0.30	
5.8 G Aux. Antenna	0.35	
Bluetooth Aux. Antenna	0.06	
Limit (W/kg)	1.60	
Verdict	Pass	

3.3.2 Highest Simultaneous SAR

Position	Simultaneous Configuration	Simultaneous SAR (W/kg)	Limit (W/kg)	Verdict
Body	WLAN 2.4G Main Antenna + 2.4 G WLAN Aux. Antenna	0.87	1.6	Pass

3.4 Test Uncertainty

According to KDB 865664 D01, when the highest measured 1 g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis is not required in SAR reports submitted for equipment approval.

The maximum 1 g SAR for the EUT in this report is 0.501 W/kg, which is lower than 1.5 W/kg, so the extensive SAR measurement uncertainty analysis is not required in this report.

4 MEASUREMENT SYSTEM

4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,

ρ is the mass density of the tissue and E is the RMS electrical field strength.

4.2 DASY SAR System

4.2.1 DASY SAR System Diagram

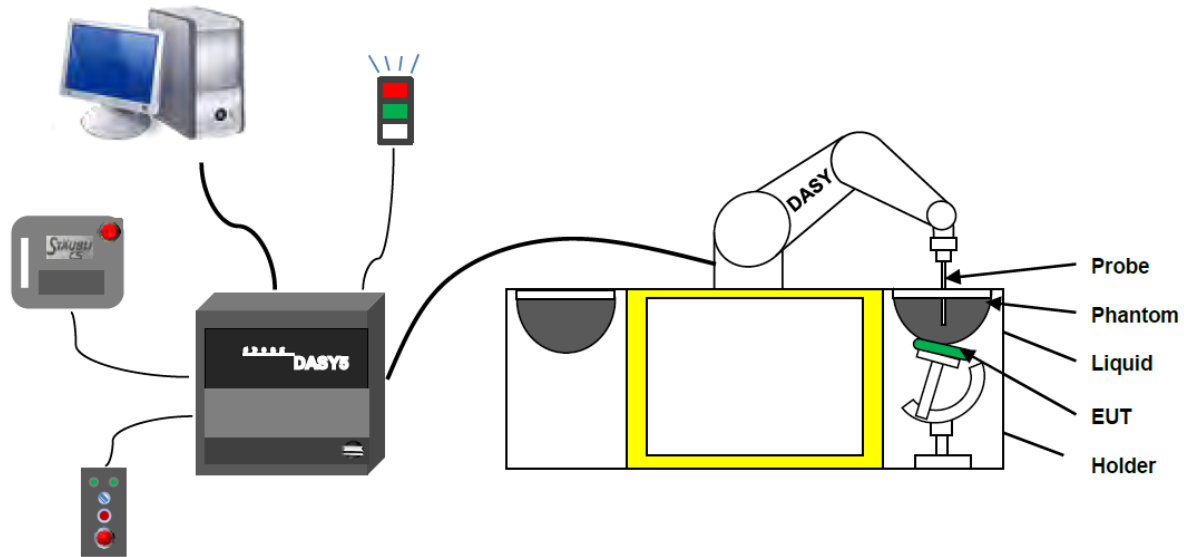

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

4.2.2 Robot

The Dasy SAR system uses the high precision robots. Symmetrical design with triangular core Built-in optical fiber for surface detection system For the 6-axis controller system, Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents). The robot series have many features that are important for our application:



- High precision
(repeatability ± 0.02 mm)
- High reliability
(industrial design)
- Low maintenance costs
(virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements
(brush less synchron motors; no stepper motors)
- Low ELF interference
(motor control _elds shielded via the closed metallic construction shields)

4.2.3 E-Field Probe

The probe is specially designed and calibrated for use in liquids with high permittivities for the measurements the Specific Dosimetric E-Field Probe EX3DV4-SN:7510 with following specifications is used.

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ; ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 9 mm) Tip diameter: 2.5 mm (Body: 10 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (EX3DV4)



E-Field Probe Calibration Process

Probe calibration is realized, in compliance with CENELEC EN 62209-1/-2 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 62209-1/2 annexe technique using reference guide at the five frequencies.

4.2.4 Data Acquisition Electronics


The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.



- Input Impedance: 200M Ω m
- The Inputs: Symmetrical and Floating
- Commom Mode Rejection: Above 80dB

4.2.5 Phantoms

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

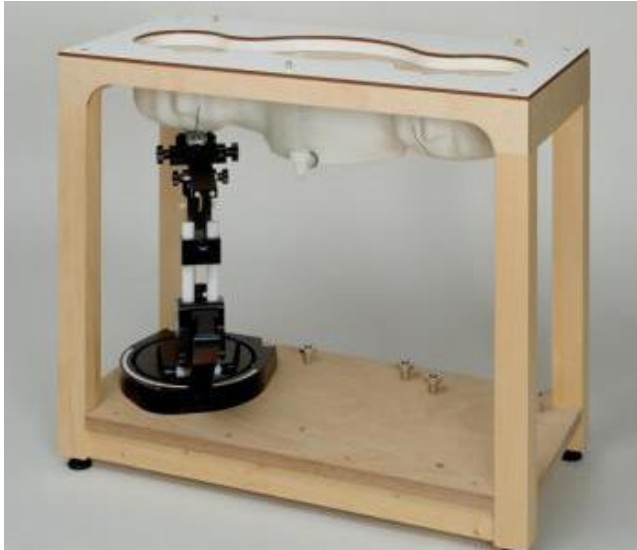

- Left hand
- Right hand
- Flat phantom

Photo of Phantom SN1857



Serial Number	Material	Length	Height
SN 1857 SAM	Vinylester, glass fiber reinforced	1000	500

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points.



•Flat phantom

Photo of Phantom SN1012



Serial Number	Shell Thickness (mm)	Major ellipse axis (mm)	Minor axis (mm)
SN 1012 ELI4	2.0 ± 0.2	600	500

4.2.6 Device Holder

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA"s only. If necessary an additional support of polystyrene material is used. Larger DUT"s (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.



The positioning system allows obtaining cheek and tilting position with a very good accuracy. Incompliance with CENELEC, the tilt angle uncertainty is lower than 1° .

4.2.7 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.



The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.

Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency (MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5
Frequency(MHz)	Water	DGBE (%)			Salt (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	78.60	21.40			/		5.54	47.86
5800	78.50	21.40			0.1		6.0	48.20


5 SYSTEM VERIFICATION

5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.2 System Check Setup


In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

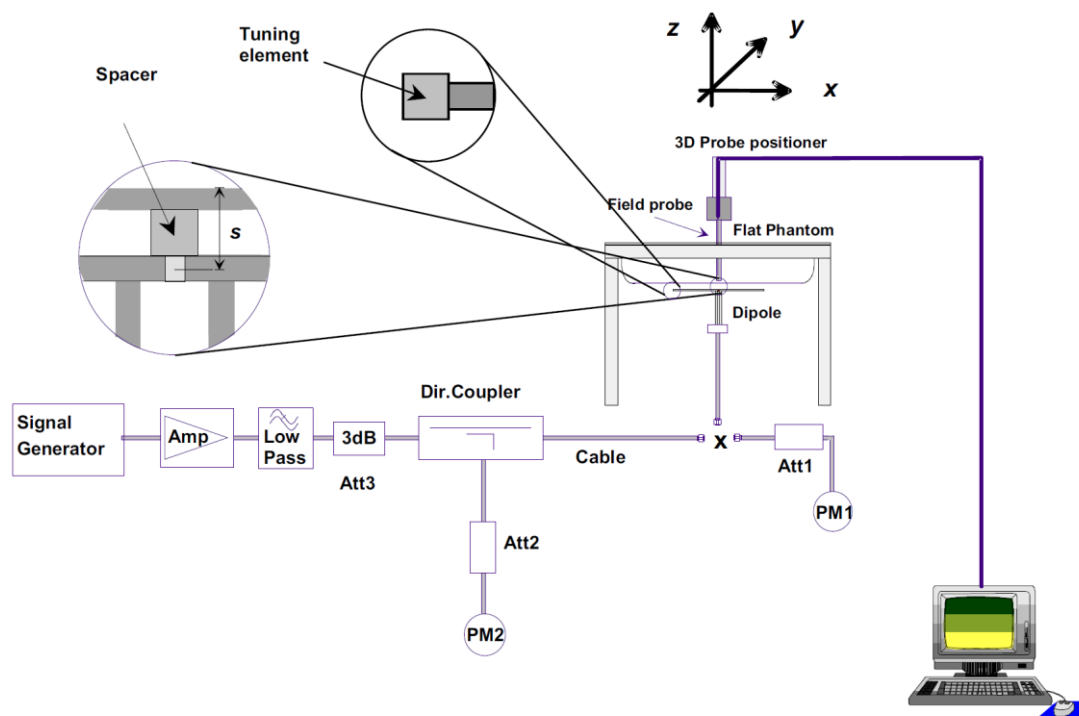

6 TEST POSITION CONFIGURATIONS


This DUT was tested in one position which is bottom of laptop touching with phantom 0 mm air gap.

6.1 Body Supported Exposure Condition

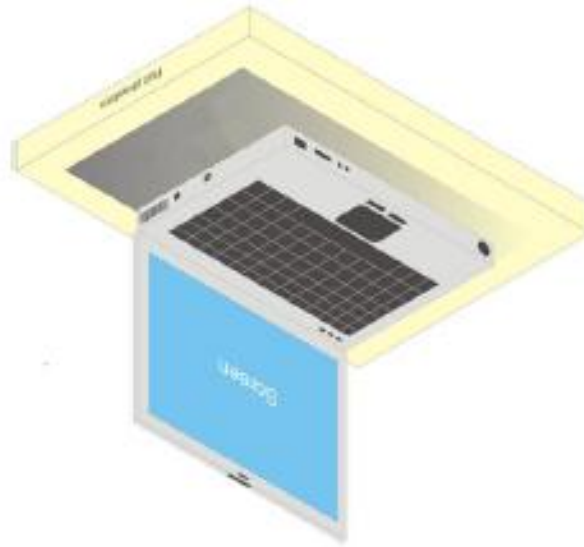

7 MEASUREMENT PROCEDURE

7.1 Measurement Process Diagram

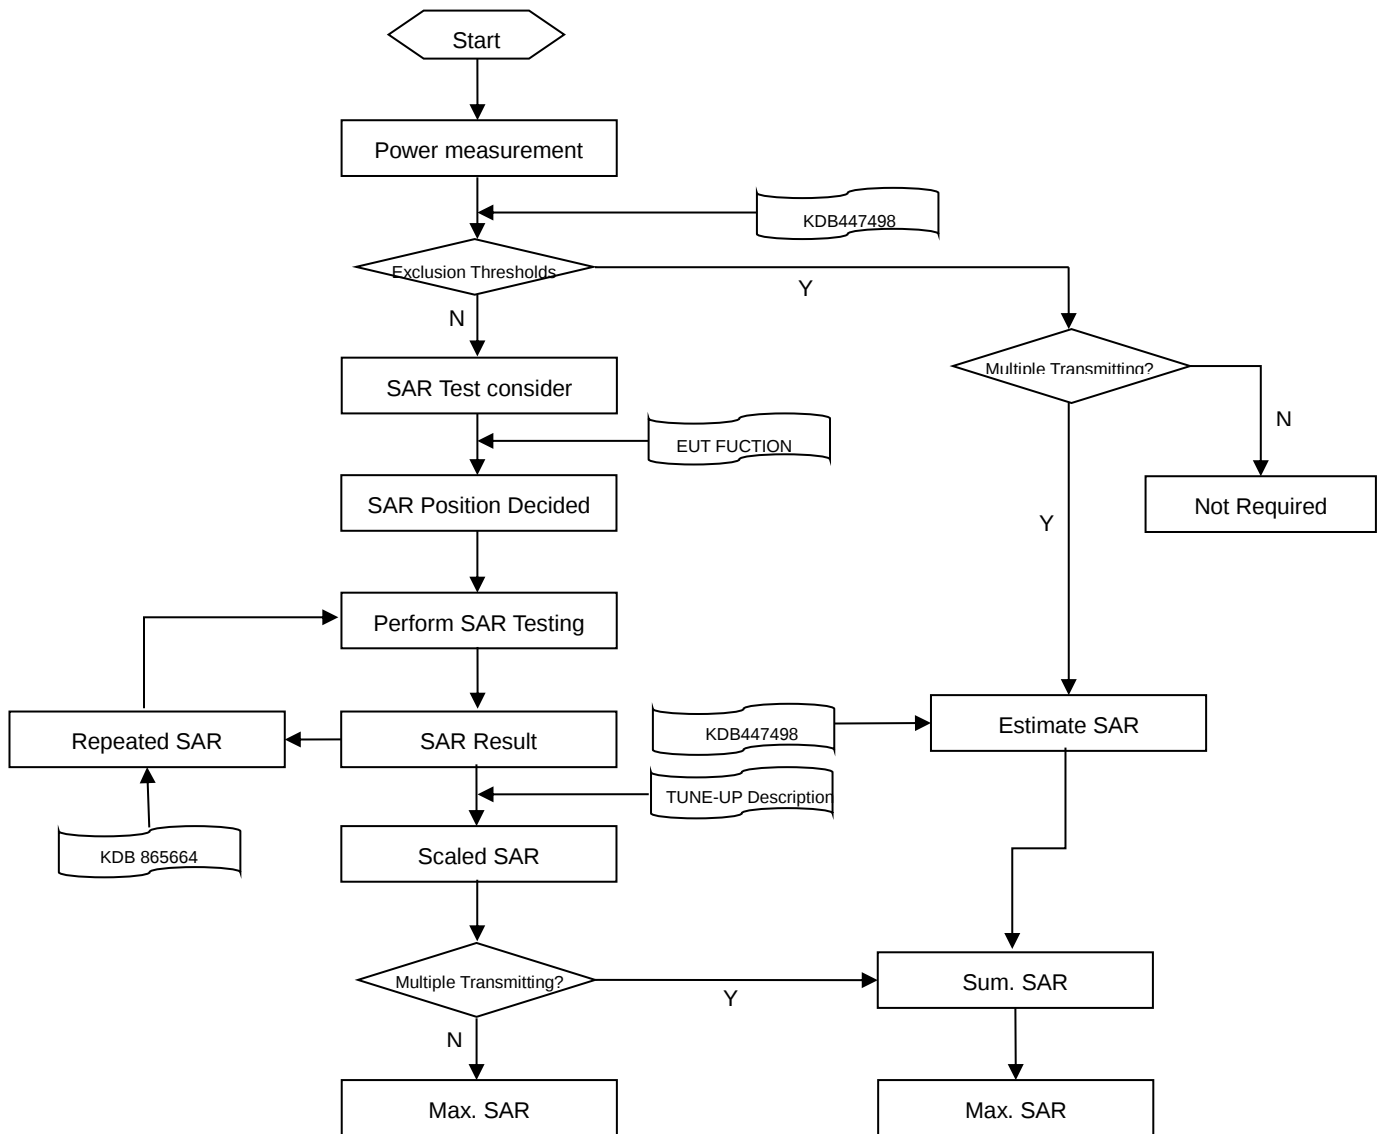

7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

			≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5±1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30°±1°	20°±1°
Maximum area scan spatial resolution: Δx Area , Δy Area			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx Zoom , Δy Zoom			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)		≤ 5 mm	3–4 GHz: ≤ 4 mm
				4–5 GHz: ≤ 3 mm
				5–6 GHz: ≤ 2 mm
	graded grid	Δz Zoom (1): between 1st two points closest to phantom surface	≤ 4 mm	3–4 GHz: ≤ 3 mm
				4–5 GHz: ≤ 2.5 mm
				5–6 GHz: ≤ 2 mm
		Δz Zoom (n>1): between subsequent points		≤ 1.5·Δz Zoom (n-1)
Minimum zoom scan volume	x, y, z		≥30 mm	3–4 GHz: ≥ 28 mm
				4–5 GHz: ≥ 25 mm
				5–6 GHz: ≥ 22 mm
Note:				
1. δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
2. * When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

8 CONDUCTED RF OUTPUT POWER

8.1 WIFI

8.1.1 2.4G WIFI (SISO Main Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	15.70	16.00	Yes
		6	2437	15.80	16.00	Yes
		11	2462	15.90	16.00	Yes
	802.11g	1	2412	15.50	16.00	No
		6	2437	15.60	16.00	No
		11	2462	15.90	16.00	No
	802.11n(HT20)	1	2412	15.50	16.00	No
		6	2437	15.50	16.00	No
		11	2462	15.80	16.00	No
	802.11n(HT40)	3	2422	15.90	16.00	No
		6	2437	15.80	16.00	No
		9	2452	15.70	16.00	No

8.1.2 2.4G WIFI (SISO Aux. Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	16.90	17.00	Yes
		6	2437	16.80	17.00	Yes
		11	2462	16.70	17.00	Yes
	802.11g	1	2412	16.80	17.00	No
		6	2437	16.70	17.00	No
		11	2462	15.60	16.00	No
	802.11n(HT20)	1	2412	16.70	17.00	No
		6	2437	16.60	17.00	No
		11	2462	16.50	17.00	No
	802.11n(HT40)	3	2422	15.90	16.00	No
		6	2437	15.50	16.00	No
		9	2452	15.70	16.00	No

8.1.3 2.4G WIFI (MIMO)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11n(HT20)	1	2412	16.60	17.00	No
		6	2437	16.60	17.00	No
		11	2462	16.70	17.00	No
	802.11n(HT40)	3	2422	15.70	16.00	No
		6	2437	15.60	16.00	No
		9	2452	15.70	16.00	No

Note: For 2.4G WIFI SAR testing was performed on single antenna RF power in SISO mode that is larger to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission used more conservative "Max. (main ant) + Max. (aux. ant) " method to determine SAR compliance. When the sum of 1-g SISO transmission SAR measurement is <1.6W/kg, 2.4G MIMO SAR test is not required.

8.1.4 5G WIFI (SISO Main Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11a	36	5180	12.10	12.50	No
		40	5200	12.20	12.50	No
		44	5220	12.30	12.50	No
		48	5240	12.20	12.50	No
	802.11n(HT20)	36	5180	12.10	12.50	No
		40	5200	12.40	12.50	No
		44	5220	12.30	12.50	No
		48	5240	12.20	12.50	No
	802.11n(HT40)	38	5190	12.10	12.50	No
		46	5230	12.40	12.50	No
	802.11ac(VHT20)	36	5180	12.20	12.50	No
		40	5200	12.40	12.50	No
		44	5220	12.20	12.50	No
		48	5240	12.30	12.50	No
	802.11ac(VHT40)	38	5190	12.10	12.50	No
		46	5230	12.40	12.50	No
	802.11ac(VHT80)	42	5210	12.20	12.50	Yes
	802.11ac(VHT160)	50	5250	12.30	12.50	No
5.3 (5.25~5.35)	802.11a	52	5260	12.40	12.50	No
		56	5280	12.30	12.50	No
		60	5300	12.20	12.50	No
		64	5320	12.20	12.50	No
	802.11n(HT20)	52	5260	12.20	12.50	No
		56	5280	12.30	12.50	No
		60	5300	12.10	12.50	No
		64	5320	12.10	12.50	No
	802.11n(HT40)	54	5270	12.20	12.50	No

		62	5310	12.00	12.50	No
	802.11ac(VHT20)	52	5260	12.10	12.50	No
		56	5280	12.40	12.50	No
		60	5300	12.30	12.50	No
		64	5320	12.10	12.50	No
	802.11ac(VHT40)	54	5270	12.30	12.50	No
		62	5310	12.00	12.50	No
	802.11ac(VHT80)	58	5290	12.10	12.50	Yes
5.6 (5.47~5.725)	802.11a	100	5500	12.10	12.50	No
		104	5520	12.20	12.50	No
		108	5540	12.40	12.50	No
		112	5560	12.30	12.50	No
		116	5580	12.20	12.50	No
		120	5600	12.30	12.50	No
		124	5620	12.40	12.50	No
		128	5640	12.30	12.50	No
		132	5660	12.10	12.50	No
		136	5680	12.20	12.50	No
		140	5700	12.40	12.50	No
		144	5720	12.20	12.50	No
	802.11n(HT20)	100	5500	12.00	12.50	No
		104	5520	12.40	12.50	No
		108	5540	12.20	12.50	No
		112	5560	12.30	12.50	No
		116	5580	12.20	12.50	No
		120	5600	12.40	12.50	No
		124	5620	12.10	12.50	No
		128	5640	12.20	12.50	No
		132	5660	12.20	12.50	No
		136	5680	12.30	12.50	No
		140	5700	12.50	12.50	No
		144	5720	12.20	12.50	No
	802.11n(HT40)	102	5510	12.00	12.50	No
		110	5550	12.30	12.50	No
		118	5590	12.30	12.50	No
		126	5630	12.20	12.50	No
		134	5670	12.40	12.50	No
		142	5710	12.10	12.50	No
	802.11ac(VHT20)	100	5500	12.10	12.50	No
		104	5520	12.40	12.50	No
		108	5540	12.20	12.50	No
		112	5560	12.30	12.50	No
		116	5580	12.20	12.50	No
		120	5600	12.20	12.50	No
		124	5620	12.30	12.50	No

		128	5640	12.10	12.50	No
		132	5660	12.20	12.50	No
		136	5680	12.40	12.50	No
		140	5700	12.50	12.50	No
		144	5720	12.20	12.50	No
	802.11ac(VHT40)	102	5510	12.00	12.50	No
		110	5550	12.30	12.50	No
		118	5590	12.30	12.50	No
		126	5630	12.20	12.50	No
		134	5670	12.40	12.50	No
		142	5710	12.10	12.50	No
	802.11ac(VHT80)	106	5530	12.10	12.50	No
		122	5610	12.10	12.50	No
		138	5690	12.00	12.50	No
	802.11ac(VHT160)	114	5570	12.40	12.50	Yes
5.8 (5.725~5.850)	802.11a	149	5745	12.30	12.50	No
		153	5765	12.30	12.50	No
		157	5785	12.40	12.50	No
		161	5805	12.30	12.50	No
		165	5825	12.40	12.50	No
	802.11n(HT20)	149	5745	12.20	12.50	No
		153	5765	12.30	12.50	No
		157	5785	12.30	12.50	No
		161	5805	12.40	12.50	No
		165	5825	12.30	12.50	No
	802.11n(HT40)	151	5755	12.40	12.50	No
		159	5790	12.30	12.50	No
	802.11ac(VHT20)	149	5745	12.20	12.50	No
		153	5765	12.20	12.50	No
		157	5785	12.30	12.50	No
		161	5805	12.30	12.50	No
		165	5825	12.30	12.50	No
	802.11ac(VHT40)	151	5755	12.50	12.50	No
		159	5790	12.30	12.50	No
	802.11ac(VHT80)	155	5775	12.20	12.50	Yes

8.1.5 5G WIFI (SISO Aux. Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11a	36	5180	11.50	11.50	No
		40	5200	11.40	11.50	No
		44	5220	11.40	11.50	No
		48	5240	11.30	11.50	No
	802.11n(HT20)	36	5180	11.40	11.50	No
		40	5200	11.20	11.50	No
		44	5220	11.30	11.50	No
		48	5240	11.20	11.50	No
	802.11n(HT40)	38	5190	11.30	11.50	No
		46	5230	11.20	11.50	No
	802.11ac(VHT20)	36	5180	11.40	11.50	No
		40	5200	11.20	11.50	No
		44	5220	11.20	11.50	No
		48	5240	11.20	11.50	No
	802.11ac(VHT40)	38	5190	11.30	11.50	No
		46	5230	11.20	11.50	No
	802.11ac(VHT80)	42	5210	11.30	11.50	Yes
	802.11ac(VHT160)	50	5250	11.30	11.50	No
5.3 (5.25~5.35)	802.11a	52	5260	11.20	11.50	No
		56	5280	11.10	11.50	No
		60	5300	11.40	11.50	No
		64	5320	11.40	11.50	No
	802.11n(HT20)	52	5260	11.30	11.50	No
		56	5280	11.00	11.50	No
		60	5300	11.10	11.50	No
		64	5320	11.40	11.50	No
	802.11n(HT40)	54	5270	11.10	11.50	No
		62	5310	11.40	11.50	No
	802.11ac(VHT20)	52	5260	11.30	11.50	No
		56	5280	11.10	11.50	No
		60	5300	11.20	11.50	No
		64	5320	11.40	11.50	No
	802.11ac(VHT40)	54	5270	11.10	11.50	No
		62	5310	11.40	11.50	No
	802.11ac(VHT80)	58	5290	11.10	11.50	Yes
5.6 (5.47~5.725)	802.11a	100	5500	11.30	11.50	No
		104	5520	11.10	11.50	No
		108	5540	11.20	11.50	No
		112	5560	11.30	11.50	No
		116	5580	11.00	11.50	No
		120	5600	11.30	11.50	No
		124	5620	11.40	11.50	No

		128	5640	11.20	11.50	No
		132	5660	11.10	11.50	No
		136	5680	11.20	11.50	No
		140	5700	11.30	11.50	No
		144	5720	11.20	11.50	No
	802.11n(HT20)	100	5500	11.20	11.50	No
		104	5520	11.30	11.50	No
		108	5540	11.20	11.50	No
		112	5560	11.10	11.50	No
		116	5580	11.10	11.50	No
		120	5600	11.20	11.50	No
		124	5620	11.30	11.50	No
		128	5640	11.20	11.50	No
		132	5660	11.40	11.50	No
		136	5680	11.20	11.50	No
		140	5700	11.20	11.50	No
		144	5720	11.20	11.50	No
	802.11n(HT40)	102	5510	11.40	11.50	No
		110	5550	11.20	11.50	No
		118	5590	11.30	11.50	No
		126	5630	11.10	11.50	No
		134	5670	11.20	11.50	No
		142	5710	11.30	11.50	No
	802.11ac(VHT20)	100	5500	11.30	11.50	No
		104	5520	11.40	11.50	No
		108	5540	11.30	11.50	No
		112	5560	11.10	11.50	No
		116	5580	11.10	11.50	No
		120	5600	11.20	11.50	No
		124	5620	11.00	11.50	No
		128	5640	11.20	11.50	No
		132	5660	11.30	11.50	No
		136	5680	11.10	11.50	No
		140	5700	11.20	11.50	No
		144	5720	11.20	11.50	No
	802.11ac(VHT40)	102	5510	11.40	11.50	No
		110	5550	11.20	11.50	No
		118	5590	11.30	11.50	No
		126	5630	11.20	11.50	No
		134	5670	11.20	11.50	No
		142	5710	11.20	11.50	No
	802.11ac(VHT80)	106	5530	11.20	11.50	No
		122	5610	11.00	11.50	No
		138	5690	11.00	11.50	No
	802.11ac(VHT160)	114	5570	11.10	11.50	Yes

5.8 (5.725~5.850)	802.11a	149	5745	11.30	11.50	No
		153	5765	11.20	11.50	No
		157	5785	11.30	11.50	No
		161	5805	11.10	11.50	No
		165	5825	11.40	11.50	No
	802.11n(HT20)	149	5745	11.30	11.50	No
		153	5765	11.20	11.50	No
		157	5785	11.30	11.50	No
		161	5805	11.10	11.50	No
		165	5825	11.20	11.50	No
	802.11n(HT40)	151	5755	11.20	11.50	No
		159	5790	11.30	11.50	No
	802.11ac(VHT20)	149	5745	11.40	11.50	No
		153	5765	11.30	11.50	No
		157	5785	11.30	11.50	No
		161	5805	11.20	11.50	No
		165	5825	11.30	11.50	No
	802.11ac(VHT40)	151	5755	11.20	11.50	No
		159	5790	11.20	11.50	No
	802.11ac(VHT80)	155	5775	11.30	11.50	Yes

8.1.6 5G WIFI (MIMO)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11n(HT20)	36	5180	11.70	12.00	No
		40	5200	11.70	12.00	No
		44	5220	11.80	12.00	No
		48	5240	11.70	12.00	No
	802.11n(HT40)	38	5190	11.60	12.00	No
		46	5230	11.90	12.00	No
	802.11ac(VHT20)	36	5180	11.90	12.00	No
		40	5200	11.80	12.00	No
		44	5220	11.50	12.00	No
		48	5240	11.60	12.00	No
	802.11ac(VHT40)	38	5190	11.70	12.00	No
		46	5230	11.70	12.00	No
	802.11ac(VHT80)	42	5210	11.60	12.00	No
	802.11ac(VHT160)	50	5250	11.80	12.00	No
5.3 (5.25~5.35)	802.11n(HT20)	52	5260	11.70	12.00	No
		56	5280	11.50	12.00	No
		60	5300	11.80	12.00	No
		64	5320	11.60	12.00	No
	802.11n(HT40)	54	5270	11.80	12.00	No
		62	5310	11.70	12.00	No

	802.11ac(VHT20)	52	5260	11.70	12.00	No
		56	5280	11.60	12.00	No
		60	5300	11.70	12.00	No
		64	5320	11.80	12.00	No
	802.11ac(VHT40)	54	5270	11.90	12.00	No
		62	5310	11.50	12.00	No
	802.11ac(VHT80)	58	5290	11.60	12.00	No
5.6 (5.47~5.725)	802.11n(HT20)	100	5500	11.60	12.00	No
		104	5520	11.70	12.00	No
		108	5540	11.80	12.00	No
		112	5560	11.80	12.00	No
		116	5580	11.60	12.00	No
		120	5600	11.60	12.00	No
		124	5620	11.60	12.00	No
		128	5640	11.60	12.00	No
		132	5660	11.50	12.00	No
		136	5680	11.60	12.00	No
		140	5700	11.60	12.00	No
		144	5720	11.50	12.00	No
	802.11n(HT40)	102	5510	11.60	12.00	No
		110	5550	11.70	12.00	No
		118	5590	11.70	12.00	No
		126	5630	11.80	12.00	No
		134	5670	11.90	12.00	No
		142	5710	11.50	12.00	No
	802.11ac(VHT20)	100	5500	11.90	12.00	No
		104	5520	11.70	12.00	No
		108	5540	11.90	12.00	No
		112	5560	11.80	12.00	No
		116	5580	11.60	12.00	No
		120	5600	11.60	12.00	No
		124	5620	11.70	12.00	No
		128	5640	11.80	12.00	No
		132	5660	11.60	12.00	No
		136	5680	11.70	12.00	No
		140	5700	11.60	12.00	No
		144	5720	11.60	12.00	No
	802.11ac(VHT40)	102	5510	11.70	12.00	No
		110	5550	11.80	12.00	No
		118	5590	11.80	12.00	No
		126	5630	11.50	12.00	No
		134	5670	11.80	12.00	No
		142	5710	11.80	12.00	No
	802.11ac(VHT80)	106	5530	11.60	12.00	No
		122	5610	11.60	12.00	No


5.8 (5.725~5.850)		138	5690	11.70	12.00	No
	802.11ac(VHT160)	114	5570	11.90	12.00	No
	802.11n(HT20)	149	5745	11.70	12.00	No
		153	5765	11.60	12.00	No
		157	5785	11.60	12.00	No
		161	5805	11.80	12.00	No
		165	5825	11.60	12.00	No
	802.11n(HT40)	151	5755	11.80	12.00	No
		159	5790	11.60	12.00	No
	802.11ac(VHT20)	149	5745	11.60	12.00	No
		153	5765	11.60	12.00	No
		157	5785	11.70	12.00	No
		161	5805	11.80	12.00	No
		165	5825	11.80	12.00	No
	802.11ac(VHT40)	151	5755	11.80	12.00	No
		159	5790	11.60	12.00	No
	802.11ac(VHT80)	155	5775	11.80	12.00	No

Note: For 5GHz SAR testing was performed on single antenna RF power in SISO mode that is larger to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission used more conservative “Max. (main ant) + Max. (aux. ant) ” method to determine SAR compliance. When the sum of 1-g SISO transmission SAR measurement is <1.6W/kg, 5G MIMO SAR test is not required.

8.2 Bluetooth (Aux. Antenna)

Mode	GFSK			$\pi/4$ -DQPSK		
Channel	0	39	78	0	39	78
Frequency (MHz)	2402	2441	2480	2402	2441	2480
Conducted Power (dBm)	7.26	7.75	8.29	8.24	8.73	9.42
Tune-Up Limit (dBm)	10.00			10.00		
Mode	8-DPSK			BLE (1Mbps)		
Channel	0	39	78	0	19	39
Frequency (MHz)	2402	2441	2480	2402	2440	2480
Conducted Power (dBm)	8.15	8.66	9.47	8.36	8.89	9.20
Tune-Up Limit (dBm)	10.00			10.00		
Mode	BLE (2Mbps)			-		
Channel	0	19	39	-		
Frequency (MHz)	2402	2440	2480	-		
Conducted Power (dBm)	7.56	8.07	8.76	-		
Tune-Up Limit (dBm)	10.00			-		

9 TEST EXCLUSION CONSIDERATION

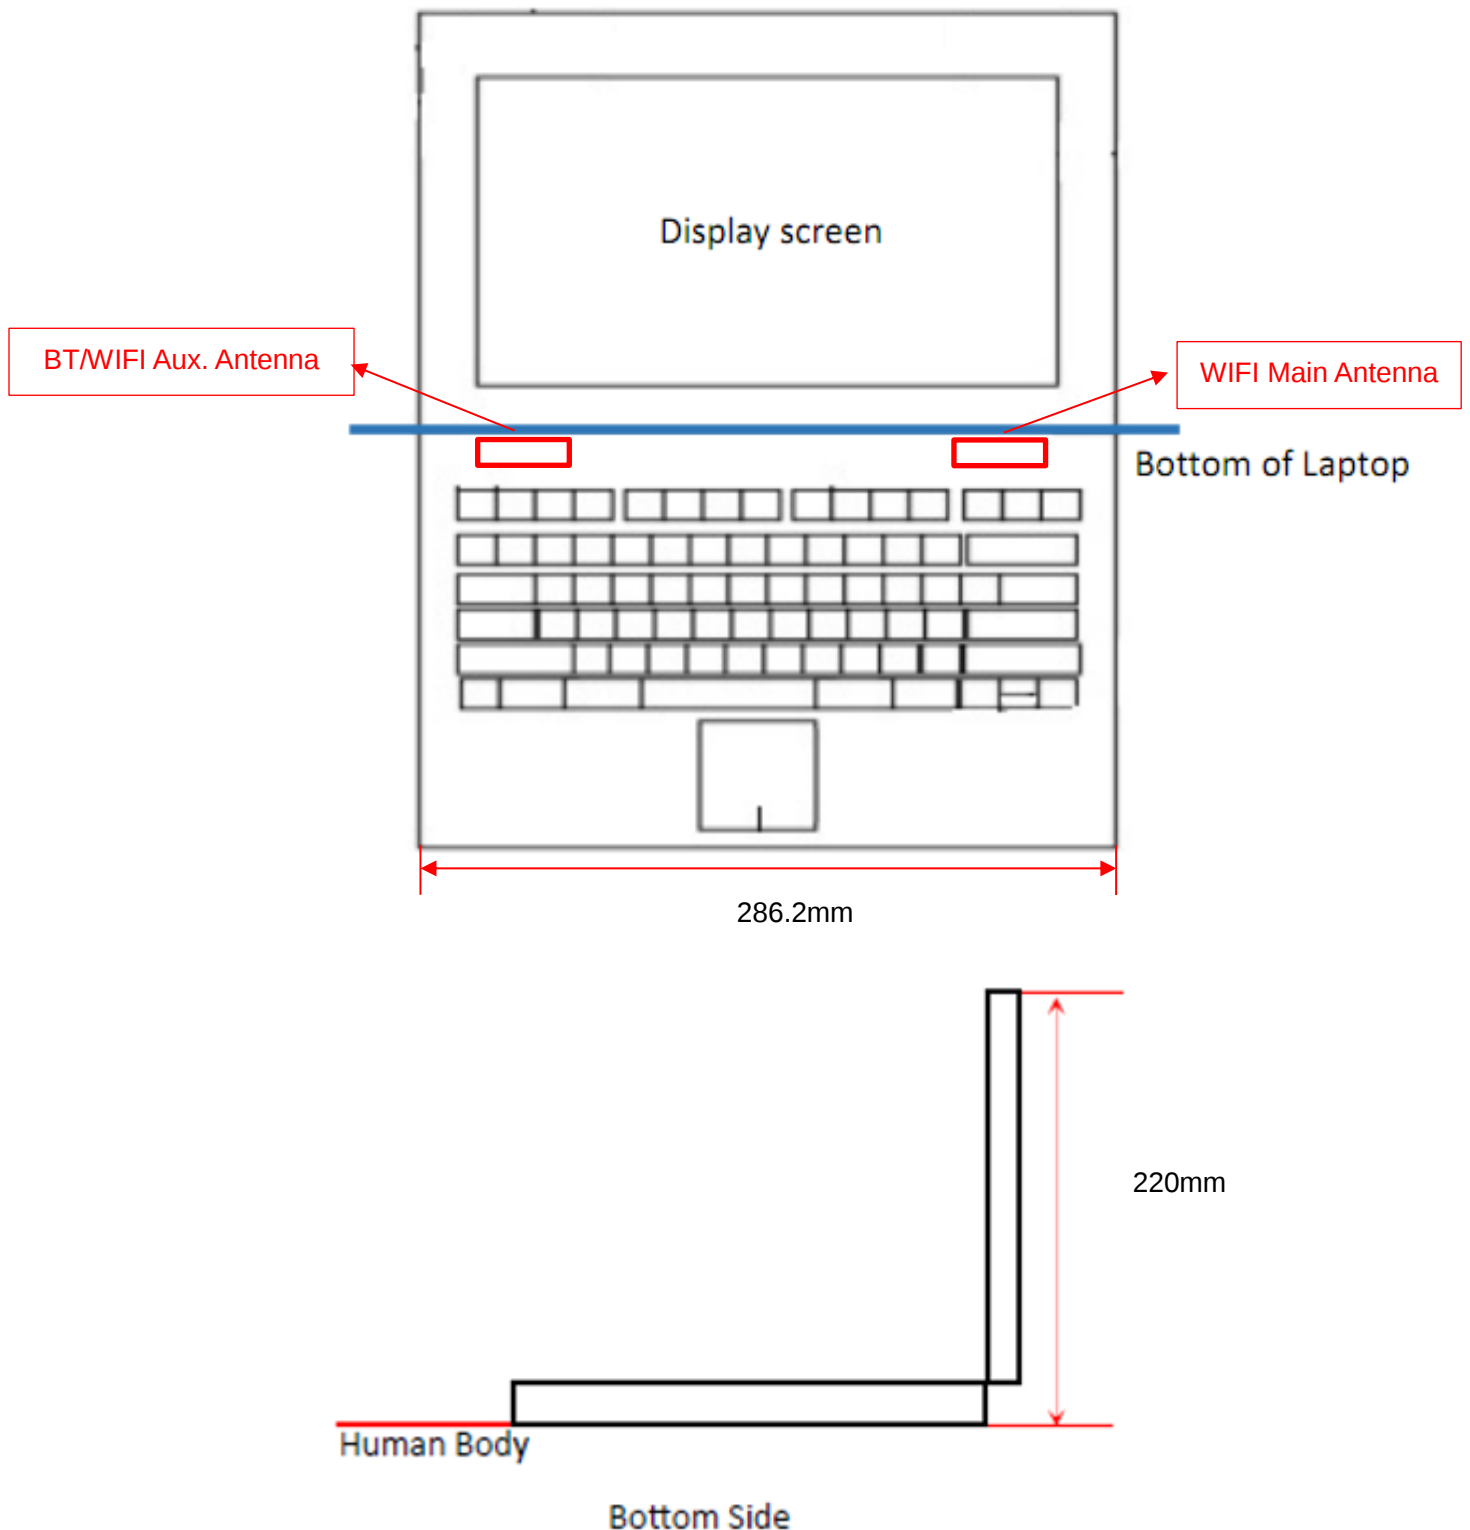

Note:

- 1) For feet in Laptop, the antenna location can be positioned against the user during normal use and the additional separation introduced by such protrusions between the outer housing and a flat phantom is <5mm;
- 2) The antenna is under the keyboard, perform the SAR tests for the bottom side of the keyboard with the display at 90 degrees.

9.1 SAR Test Exclusion Consideration Table

According with FCC KDB 447498 D01, Appendix A, <SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm> Table, this Device SAR test configurations consider as following :

Main Antenna

Band	Mode	Max. Conducted Power		Test Position Configurations
		dBm	mW	Bottom Edge
WLAN 2.4 G	Distance to User			<5mm
	802.11b	16.00	39.81	Yes
	802.11g	16.00	39.81	No
	802.11n(HT20)	16.00	39.81	No
	802.11n(HT40)	16.00	39.81	No
WLAN 5.2 G	Distance to User			<5mm
	802.11a	12.50	17.78	No
	802.11n(HT20)	12.50	17.78	No
	802.11n(HT40)	12.50	17.78	No
	802.11ac(VHT20)	12.50	17.78	No
	802.11ac(VHT40)	12.50	17.78	No
	802.11ac(VHT80)	12.50	17.78	Yes
	802.11ac(VHT160)	12.50	17.78	No
WLAN 5.3 G	Distance to User			<5mm
	802.11a	12.50	17.78	No
	802.11n(HT20)	12.50	17.78	No
	802.11n(HT40)	12.50	17.78	No
	802.11ac(VHT20)	12.50	17.78	No
	802.11ac(VHT40)	12.50	17.78	No
	802.11ac(VHT80)	12.50	17.78	Yes
	802.11ac(VHT160)	12.50	17.78	No
WLAN 5.6 G	Distance to User			<5mm
	802.11a	12.50	17.78	No
	802.11n(HT20)	12.50	17.78	No
	802.11n(HT40)	12.50	17.78	No
	802.11ac(VHT20)	12.50	17.78	No
	802.11ac(VHT40)	12.50	17.78	No
	802.11ac(VHT80)	12.50	17.78	No
	802.11ac(VHT160)	12.50	17.78	Yes
WLAN 5.8 G	Distance to User			<5mm
	802.11a	12.50	17.78	No
	802.11n(HT20)	12.50	17.78	No
	802.11n(HT40)	12.50	17.78	No
	802.11ac(VHT20)	12.50	17.78	No
	802.11ac(VHT40)	12.50	17.78	No

	802.11ac(VHT80)	12.50	17.78	Yes
Bluetooth	Distance to User			<5mm
	BR/EDR	10.00	10.00	Yes
	BLE	10.00	10.00	No

Aux. Antenna

Band	Mode	Max. Conducted Power		Test Position Configurations
		dBm	mW	Bottom Edge
WLAN 2.4 G	Distance to User			<5mm
	802.11b	17.00	50.12	Yes
	802.11g	17.00	50.12	No
	802.11n(HT20)	17.00	50.12	No
	802.11n(HT40)	16.00	39.81	No
WLAN 5.2 G	Distance to User			<5mm
	802.11a	11.50	14.13	No
	802.11n(HT20)	11.50	14.13	No
	802.11n(HT40)	11.50	14.13	No
	802.11ac(VHT20)	11.50	14.13	No
	802.11ac(VHT40)	11.50	14.13	No
	802.11ac(VHT80)	11.50	14.13	Yes
	802.11ac(VHT160)	11.50	14.13	No
WLAN 5.3 G	Distance to User			<5mm
	802.11a	11.50	14.13	No
	802.11n(HT20)	11.50	14.13	No
	802.11n(HT40)	11.50	14.13	No
	802.11ac(VHT20)	11.50	14.13	No
	802.11ac(VHT40)	11.50	14.13	No
	802.11ac(VHT80)	11.50	14.13	Yes
	802.11ac(VHT160)	11.50	14.13	No
WLAN 5.6 G	Distance to User			<5mm
	802.11a	11.50	14.13	No
	802.11n(HT20)	11.50	14.13	No
	802.11n(HT40)	11.50	14.13	No
	802.11ac(VHT20)	11.50	14.13	No
	802.11ac(VHT40)	11.50	14.13	No
	802.11ac(VHT80)	11.50	14.13	No
	802.11ac(VHT160)	11.50	14.13	Yes
WLAN 5.8 G	Distance to User			<5mm
	802.11a	11.50	14.13	No
	802.11n(HT20)	11.50	14.13	No
	802.11n(HT40)	11.50	14.13	No

	802.11ac(VHT20)	11.50	14.13	No
	802.11ac(VHT40)	11.50	14.13	No
	802.11ac(VHT80)	11.50	14.13	Yes
Bluetooth	Distance to User			<5mm
	BR/EDR	10.00	10.00	Yes
	BLE	10.00	10.00	No

Note:

- Maximum power is the source-based time-average power and represents the maximum RF output power among production units.
- Per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- Per KDB 447498 D01, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold
- Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
 - For < 50 mm distance, we just calculate mW of the exclusion threshold value (3.0) to do compare.
This formula is $[3.0] / [\sqrt{f(\text{GHz})}] \cdot [(\text{min. test separation distance, mm})] = \text{exclusion threshold of mW}.$
- Per KDB 447498 D01, at 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following:
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz
- Per KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions.
 - When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
 - When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel.
- Per KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions.
 - When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
 - When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- Per KDB 248227 D01 SAR is not required for the following U-NII-1 and U-NII-2A bands conditions.
 - When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
 - When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR

is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

- c. The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is $> 1.2 \text{ W/kg}$, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

9. Per KDB 248227 D01 5G WLAN Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.

- a. When SAR test exclusion provisions of KDB Publication 447498 D01 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
- b. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR is not required for that subsequent test configuration.

10 TEST RESULT

10.1 Bluetooth

Antenna	Battery No.	Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	Duty Cycle (%)	Duty Cycle Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Body															
Aux.	Battery 1	BT (3DH5)	Bottom Edge	0	78	2480	0.12	0.034	9.47	10.00	1.130	77.00	1.299	0.050	/
	Battery 1			0	0	2402	-0.04	0.032	8.15	10.00	1.531	77.00	1.299	0.063	1#
	Battery 1			0	39	2441	-0.03	0.034	8.66	10.00	1.361	77.00	1.299	0.059	/
	Battery 2	BT (3DH5)	Bottom Edge	0	78	2480	0.11	0.032	9.47	10.00	1.130	77.00	1.299	0.047	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.															

10.2 WIFI 2.4GHz

Antenna	Battery No.	Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	Duty Cycle (%)	Duty Cycle Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Body															
Main	Battery 1	802.11 b	Bottom Edge	0	11	2462	-0.10	0.354	15.90	16.00	1.023	97.00	1.031	0.373	2#
	Battery 1			0	1	2412	-0.19	0.322	15.70	16.00	1.072	97.00	1.031	0.356	/
	Battery 1			0	6	2437	0.03	0.321	15.80	16.00	1.047	97.00	1.031	0.347	/
	Battery 2	802.11 b	Bottom Edge	0	11	2462	0.11	0.332	15.90	16.00	1.023	97.00	1.031	0.350	/
Aux.	Battery 1	802.11 b	Bottom Edge	0	1	2412	0.04	0.460	16.90	17.00	1.023	97.00	1.031	0.485	/
	Battery 2	802.11 b	Bottom Edge	0	1	2412	-0.09	0.475	16.90	17.00	1.023	97.00	1.031	0.501	3#
	Battery 2			0	6	2437	0.15	0.400	16.80	17.00	1.047	97.00	1.031	0.432	/
	Battery 2			0	11	2462	0.07	0.395	16.70	17.00	1.072	97.00	1.031	0.436	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.															

10.3 WIFI 5GHz

Antenna	Battery No.	Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	Duty Cycle (%)	Duty Cycle Factor	1 g Scaled SAR (W/Kg)	Meas. No.
5.3G Body															
Main	Battery 1	802.11 ac	Bottom	0	42	5210	0.13	0.221	12.20	12.50	1.072	91.50	1.093	0.259	4#
	Battery 1	(VHT80)	Edge	0	58	5290	-0.12	0.208	12.10	12.50	1.096	91.50	1.093	0.249	/
	Battery 2	802.11 ac (VHT80)	Bottom Edge	0	42	5210	0.06	0.190	12.20	12.50	1.072	91.50	1.093	0.223	/
Aux.	Battery 1	802.11 ac	Bottom Edge	0	42	5210	-0.15	0.300	11.30	11.50	1.047	91.50	1.093	0.343	5#
	Battery 1	(VHT80)	Bottom Edge	0	58	5290	0.12	0.256	11.10	11.50	1.096	91.50	1.093	0.307	/
	Battery 2	802.11 ac (VHT80)	Bottom Edge	0	42	5210	-0.07	0.187	11.30	11.50	1.047	91.50	1.093	0.214	/
5.6G Body															
Main	Battery 1	802.11 ac	Bottom Edge	0	114	5570	0.07	0.299	12.40	12.50	1.023	86.00	1.163	0.356	6#
	Battery 2	(VHT160)	Bottom Edge	0	114	5570	0.05	0.272	12.40	12.50	1.023	86.00	1.163	0.324	/
Aux.	Battery 1	802.11 ac	Bottom Edge	0	114	5570	-0.15	0.243	11.10	11.50	1.096	86.00	1.163	0.310	/
	Battery 2	(VHT160)	Bottom Edge	0	114	5570	0.14	0.250	11.10	11.50	1.096	86.00	1.163	0.319	7#
5.8G Body															
Main	Battery 1	802.11 ac	Bottom Edge	0	155	5775	-0.11	0.255	12.20	12.50	1.072	91.50	1.093	0.299	8#
	Battery 2	(VHT80)	Bottom Edge	0	155	5775	0.08	0.241	12.20	12.50	1.072	91.50	1.093	0.282	/
Aux.	Battery 1	802.11 ac	Bottom Edge	0	155	5775	0.16	0.223	11.30	11.50	1.047	91.50	1.093	0.255	/
	Battery 2	(VHT80)	Bottom Edge	0	155	5775	-0.05	0.304	11.30	11.50	1.047	91.50	1.093	0.348	9#
Note: Refer to ANNEX C for the detailed test data for each test configuration.															

11 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

The highest measured SAR is 0.475 W/kg < 0.80 W/kg, so the repeated measurement is not required.

12 SIMULTANEOUS TRANSMISSION

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

12.1 Simultaneous Transmission Mode Consider

NO.	Mode	2.4G WLAN & 5G WLAN & 2.4G Bluetooth
		Body
1	WLAN 2.4G Main Antenna	+ 2.4 G WLAN Aux. Antenna
2	WLAN 2.4G Main Antenna	+ Bluetooth Aux. Antenna
3	WLAN 5G Main Antenna	+ 5 G WLAN Aux. Antenna
4	WLAN 5G Main Antenna	+ Bluetooth Aux. Antenna
5	WLAN 5G Main Antenna	+ 5 G WLAN Aux. Antenna + Bluetooth Aux. Antenna
Note: WLAN 2.4G Aux. and Bluetooth Aux. share the same antenna and cannot transmit simultaneously.		

12.2 Sum SAR of Simultaneous Transmission

12.2.1 Sum Body SAR of Simultaneous Transmission

Simultaneous Mode	Mode	Max. 1g SAR (W/kg)	1g Sum SAR (W/kg)	SPLSR (Yes/No)
WLAN 2.4G Main Antenna + 2.4 G WLAN Aux. Antenna	WLAN 2.4G Main Antenna	0.373	0.874	No
	2.4 G WLAN Aux. Antenna	0.501		
2.4 G WLAN Main Antenna + Bluetooth Aux. Antenna	2.4 G WLAN Main Antenna	0.373	0.436	No
	Bluetooth Aux. Antenna	0.063		
WLAN 5 G Main Antenna + 5 G WLAN Aux. Antenna	WLAN 5G Main Antenna	0.356	0.704	No
	5 G WLAN Aux. Antenna	0.348		
5 G WLAN Main Antenna + Bluetooth Aux. Antenna	5 G WLAN Main Antenna	0.356	0.419	No
	Bluetooth Aux. Antenna	0.063		
WLAN 5 G Main Antenna + 5 G WLAN Aux. Antenna + Bluetooth Aux. Antenna	WLAN 5G Main Antenna	0.356	0.767	No
	5 G WLAN Aux. Antenna	0.348		
	Bluetooth Aux. Antenna	0.063		

13 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
2450MHz Validation Dipole	Speag	D2450V2	SN: 952	2017/03/21	2020/03/20
5GHz Validation Dipole	Speag	D5GHzV2	SN: 1200	2017/06/29	2020/06/28
E-Field Probe	Speag	EX3DV4	SN: 7510	2018/07/14	2019/07/13
Data acquisition electronics	Speag	DAE4	SN: 1454	2018/01/11	2019/01/10
Signal Generator	R&S	SMBV100A	260592	2018/06/15	2019/06/14
Power Meter	Agilent	E4419B	GB40201833	2017/11/02	2018/11/01
Power Sensor	Agilent	E9300A	MY41498012	2017/11/02	2018/11/01
Power Sensor	Agilent	E9300A	MY41499891	2017/11/02	2018/11/01
Network Analyzer	Agilent	5071C	MY46103472	2018/03/14	2019/03/13
Thermometer	Elitech	RC-4HC	N/A	2017/11/13	2018/11/12
Dielectric Probe Kit	SATIMO	SCLMP	SN 25/13 OCPG56	N/A	N/A
Phantom1	Speag	SAM	SN: 1859	N/A	N/A
Phantom2	Speag	ELI4	SN: 1012	N/A	N/A
Power Amplifier	SATIMO	6552B	22374	N/A	N/A
Attenuator	COM-MW	ZA-S1-31	1305003187	N/A	N/A
Directional coupler	AA-MCS	AAMCS-UDC	000272	N/A	N/A

Note: For dipole antennas, BALUN has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss in within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.

ANNEX A SIMULATING LIQUID VERIFICATION RESULT

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

Date	Liquid Type	Fre. (MHz)	Temp. (°C)	Meas. Conductivity (σ) (S/m)	Meas. Permittivity (ϵ)	Target Conductivity (σ) (S/m)	Target Permittivity (ϵ)	Conductivity Tolerance (%)	Permittivity Tolerance (%)
2018.09.29	Body	2450	21.5	1.96	53.09	1.95	52.70	0.51	0.73
2018.09.25	Body	5250	21.1	5.32	49.82	5.36	48.95	-0.77	1.77
2018.09.24	Body	5600	21.3	5.80	48.02	5.77	48.47	0.64	-0.93
2018.09.24	Body	5750	21.3	6.01	47.52	5.97	48.24	1.94	-2.23
Note: The tolerance limit of Conductivity and Permittivity is $\pm 5\%$.									

ANNEX B SYSTEM CHECK RESULT

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 % (for 1 g).

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)	Targeted SAR (W/kg)	Tolerance (%)
2018.09.29	Body	2450	100	4.96	49.60	50.50	-1.78	52.40	-5.34
2018.09.25	Body	5250	100	7.81	78.10	75.20	3.86	76.50	2.09
2018.09.24	Body	5600	100	8.25	82.50	77.90	5.91	83.30	-0.96
2018.09.24	Body	5750	100	7.64	76.40	75.00	1.87	78.00	-2.05

Note: The tolerance limit of System validation $\pm 10\%$.

System Performance Check Data (2450MHz Body)

Date: 2018.09.29

Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 53.087$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.8, 7.8, 7.8); Calibrated: 2018.07.14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2018.01.11
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW2450-Body-100mw/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.97 W/kg


CW2450-Body-100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.81 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 10.61 W/kg

SAR(1 g) = 4.96 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 5.82 W/kg

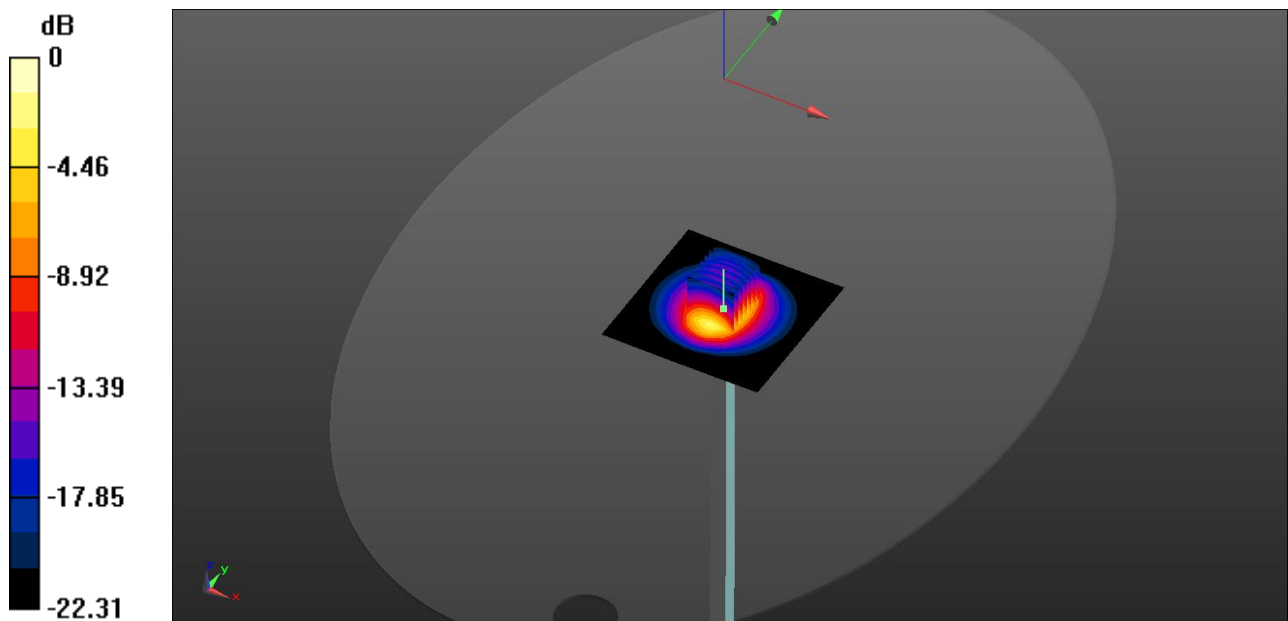

0 dB = 5.82 W/kg

System Performance Check Data (5250MHz Body)

Date: 2018.09.25

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250$ MHz; $\sigma = 5.317$ S/m; $\epsilon_r = 49.816$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.1

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.09, 5.09, 5.09); Calibrated: 2018.07.14;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2018.01.11
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 5250-Body-100mw /Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.82 W/kg


CW 5250-Body-100mw /Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 43.75 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 32.4 W/kg

SAR(1 g) = 7.81 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 19.7 W/kg

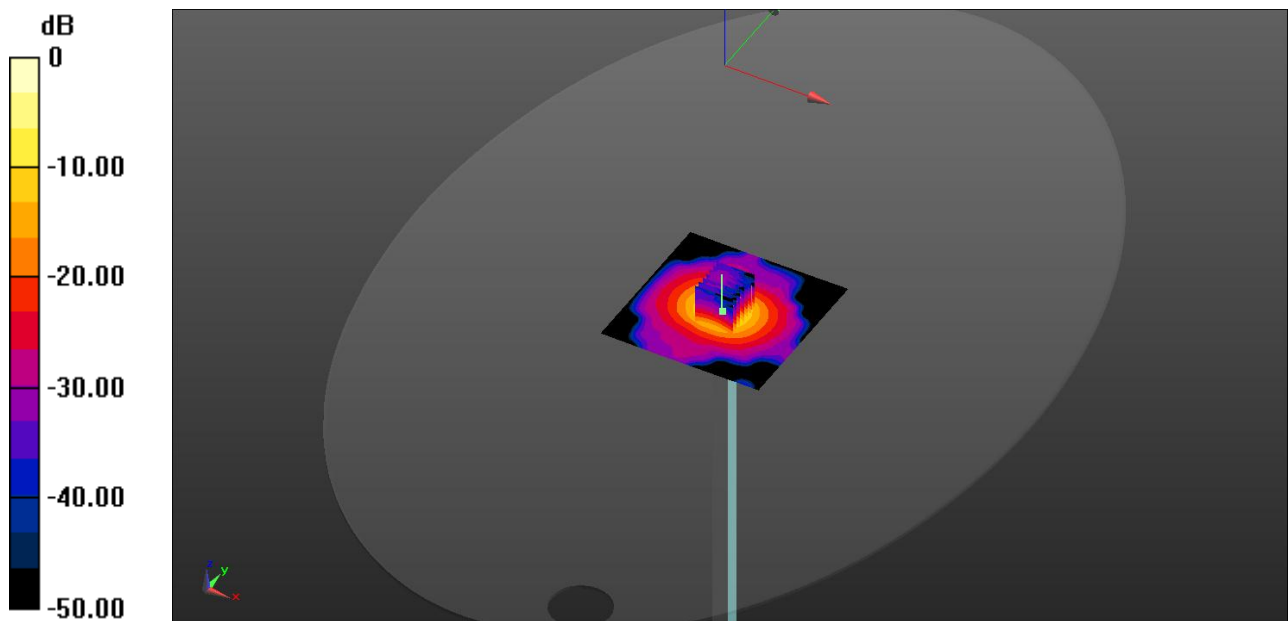

0 dB = 19.7 W/kg

System Performance Check Data (5600MHz Body)

Date: 2018.09.24

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.803$ S/m; $\epsilon_r = 48.018$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.35, 4.35, 4.35); Calibrated: 2018.07.14;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2018.01.11
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 5600-Body-100mw /Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.36 W/kg


CW 5600-Body-100mw /Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 41.32 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 36.5 W/kg

SAR(1 g) = 8.25 W/kg; SAR(10 g) = 2.31 W/kg

Maximum value of SAR (measured) = 21.6 W/kg

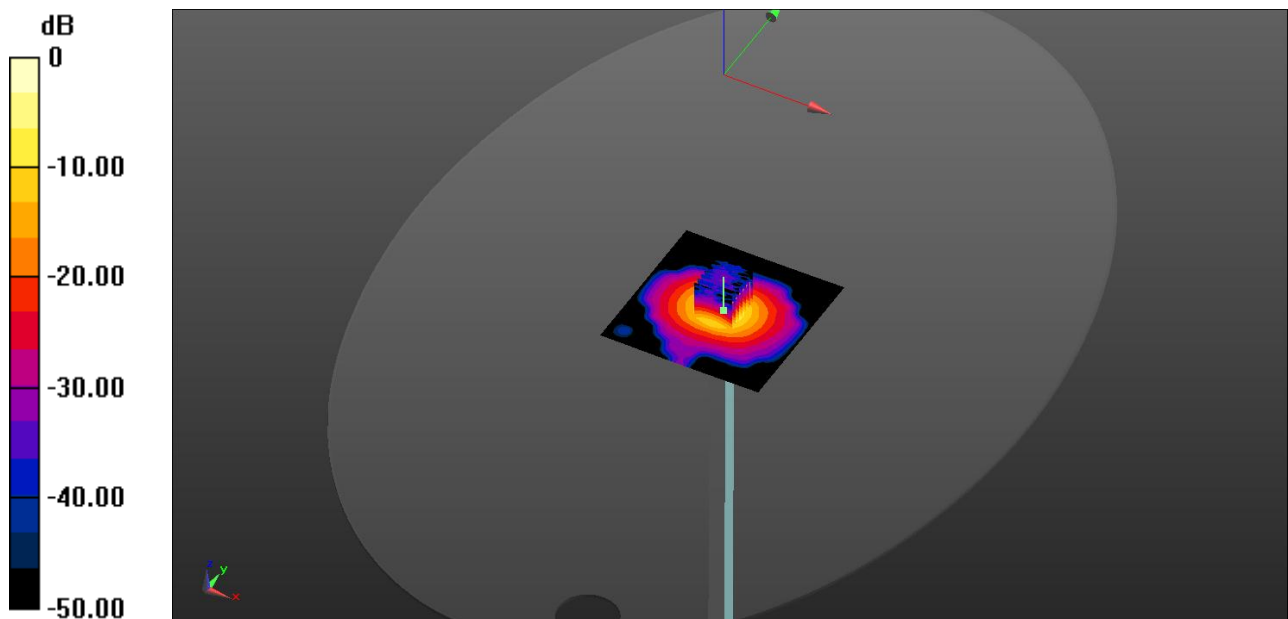

0 dB = 21.6 W/kg

System Performance Check Data (5750MHz Body)

Date: 2018.09.24

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750$ MHz; $\sigma = 6.011$ S/m; $\epsilon_r = 47.52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.52, 4.52, 4.52); Calibrated: 2018.07.14;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2018.01.11
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW5750-Body-100mw/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 7.68 W/kg


CW5750-Body-100mw/Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 40.22 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 36.8 W/kg

SAR(1 g) = 7.64 W/kg; SAR(10 g) = 2.15 W/kg

Maximum value of SAR (measured) = 19.4 W/kg

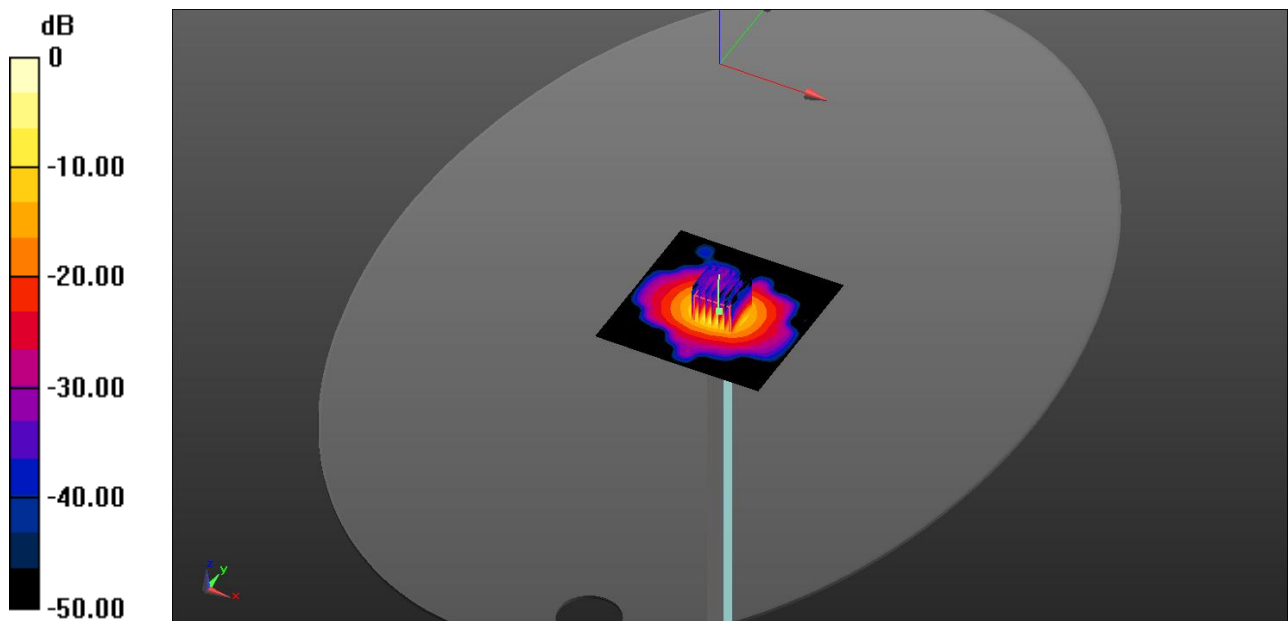

0 dB = 19.4 W/kg

ANNEX C TEST DATA

MEAS.1 Body Plane with Bottom Side 0mm on Low Channel in Bluetooth with Aux Antenna

Date: 2018.09.29

Communication System Band: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.299

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.875$ S/m; $\epsilon_r = 53.826$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.8, 7.8, 7.8); Calibrated: 2018.07.14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2018.01.11
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch0/Area Scan (81x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0645 W/kg


Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.6640 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0750 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0379 W/kg

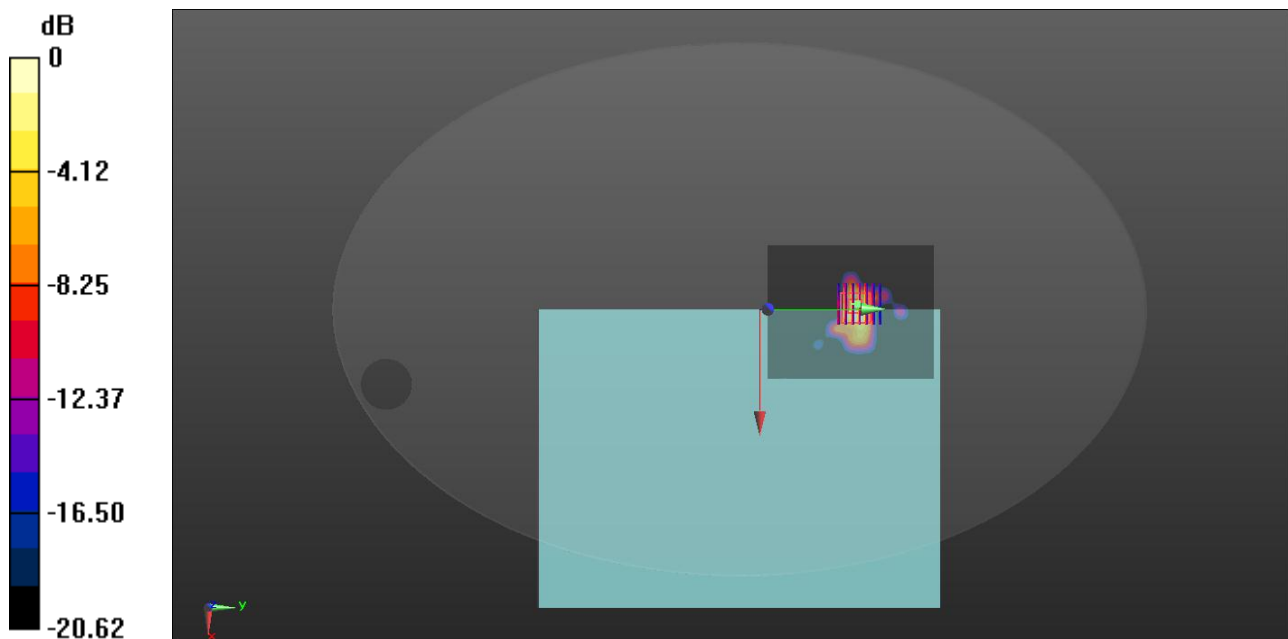

0 dB = 0.0379 W/kg

MEAS.2 Body Plane with Bottom Side 0mm on High Channel in IEEE802.11b mode with Main Antenna

Date: 2018.09.29

Communication System Band: WLAN(b); Frequency: 2462 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.995$ S/m; $\epsilon_r = 52.942$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.8, 7.8, 7.8); Calibrated: 2018.07.14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2018.01.11
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch11/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.400 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.607 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.826 W/kg

SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.420 W/kg

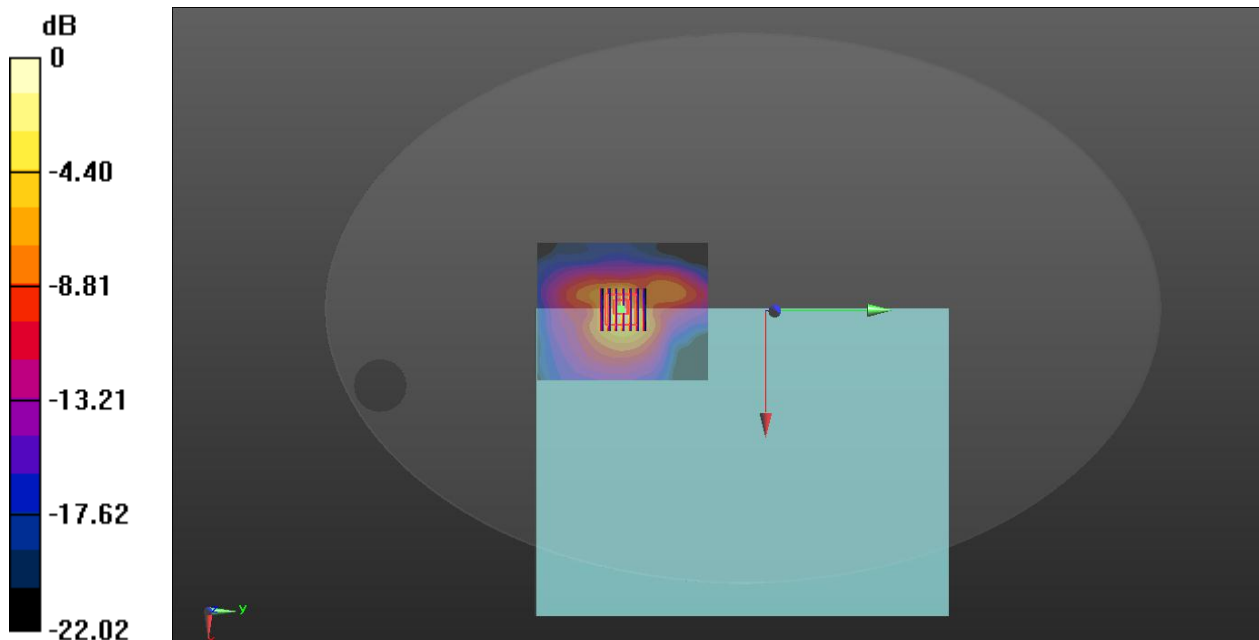

0 dB = 0.420 W/kg

MEAS.3 Body Plane with Bottom Side 0mm on Low Channel in IEEE802.11b mode with Aux Antenna

Date: 2018.09.29

Communication System Band: WLAN(b); Frequency: 2412 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.889$ S/m; $\epsilon_r = 53.618$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.8, 7.8, 7.8); Calibrated: 2018.07.14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2018.01.11
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.533 W/kg


Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.568 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 0.563 W/kg

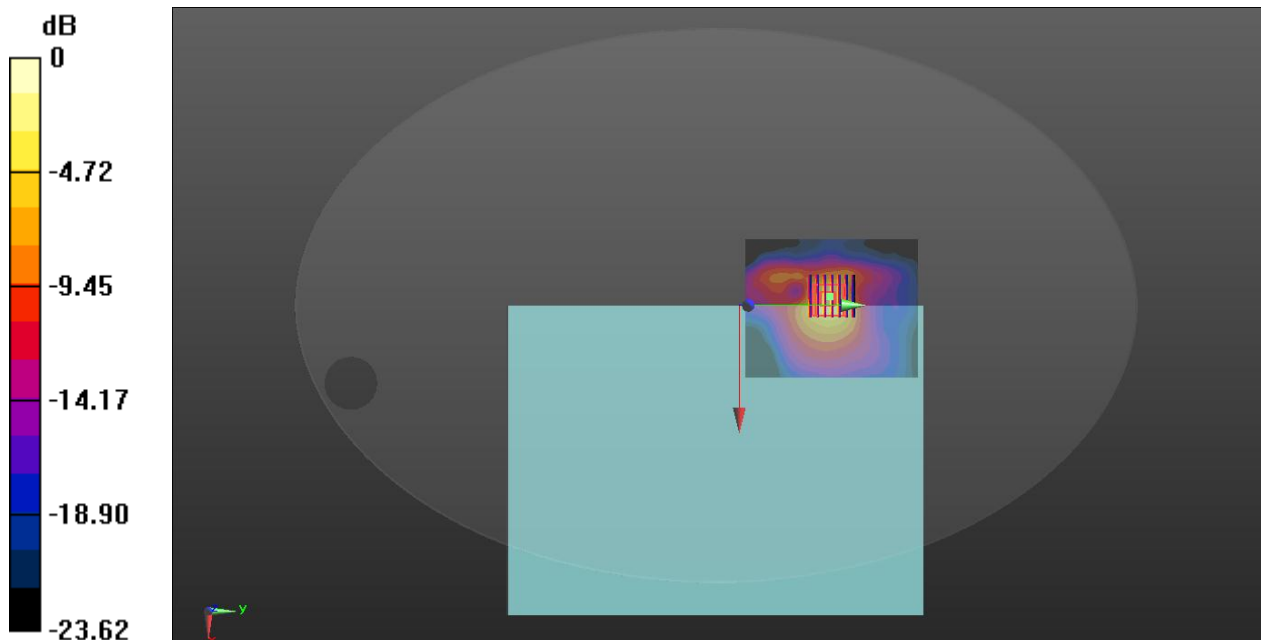

0 dB = 0.563 W/kg

MEAS.4 Body Plane with Bottom Side 0mm on Channel 42 in IEEE802.11ac(VHT80) mode with Main Antenna

Date: 2018.09.25

Communication System Band: WLAN(ac) 80Mhz; Frequency: 5210 MHz;Duty Cycle: 1:1.093

Medium parameters used: $f = 5210$ MHz; $\sigma = 5.237$ S/m; $\epsilon_r = 50.393$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4 Liquid Temperature:21.1

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.09, 5.09, 5.09); Calibrated: 2018.07.14;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2018.01.11
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch42/Area Scan (101x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.218 W/kg


Ch42/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.3640 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.911 W/kg

SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.412 W/kg

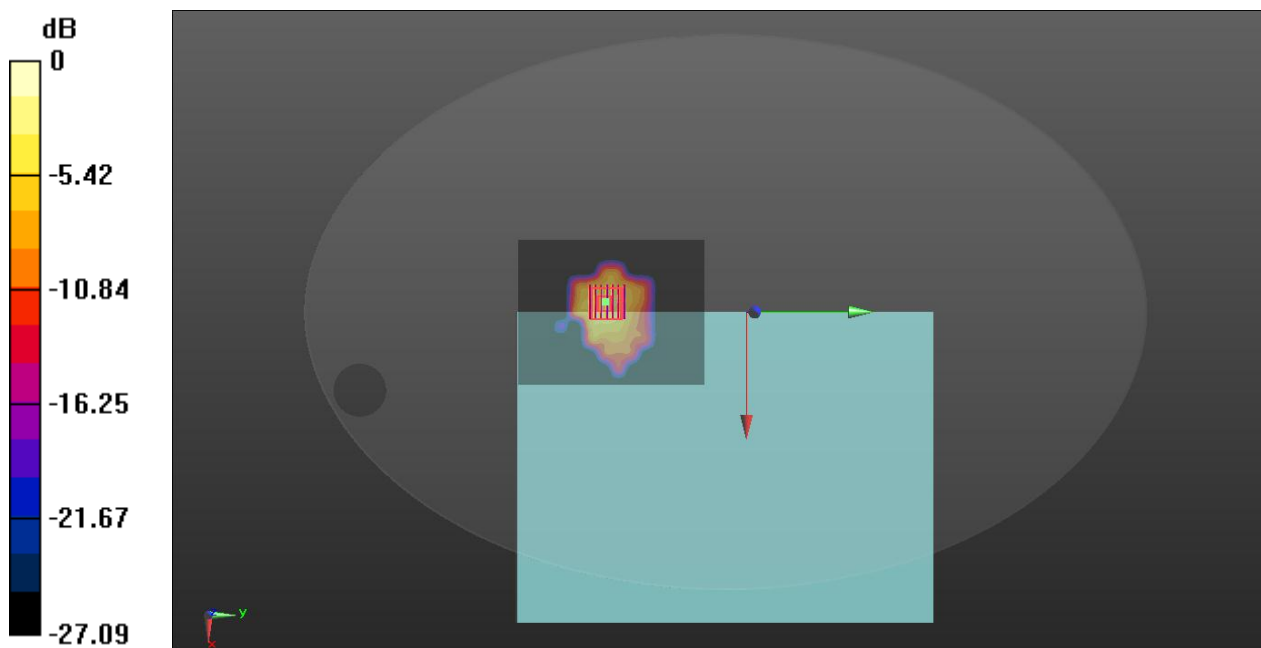

0 dB = 0.412 W/kg

MEAS.5 Body Plane with Bottom Side 0mm on Channel 42 in IEEE802.11ac(VHT80) mode with Aux Antenna

Date: 2018.09.25

Communication System Band: WLAN(ac) 80Mhz; Frequency: 5210 MHz;Duty Cycle: 1:1.093

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 5.237 \text{ S/m}$; $\epsilon_r = 50.393$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature:22.4 Liquid Temperature:21.1

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.09, 5.09, 5.09); Calibrated: 2018.07.14;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2018.01.11
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch42/Area Scan (101x131x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.304 W/kg


Ch42/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.3760 V/m ; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.300 W/kg ; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.578 W/kg

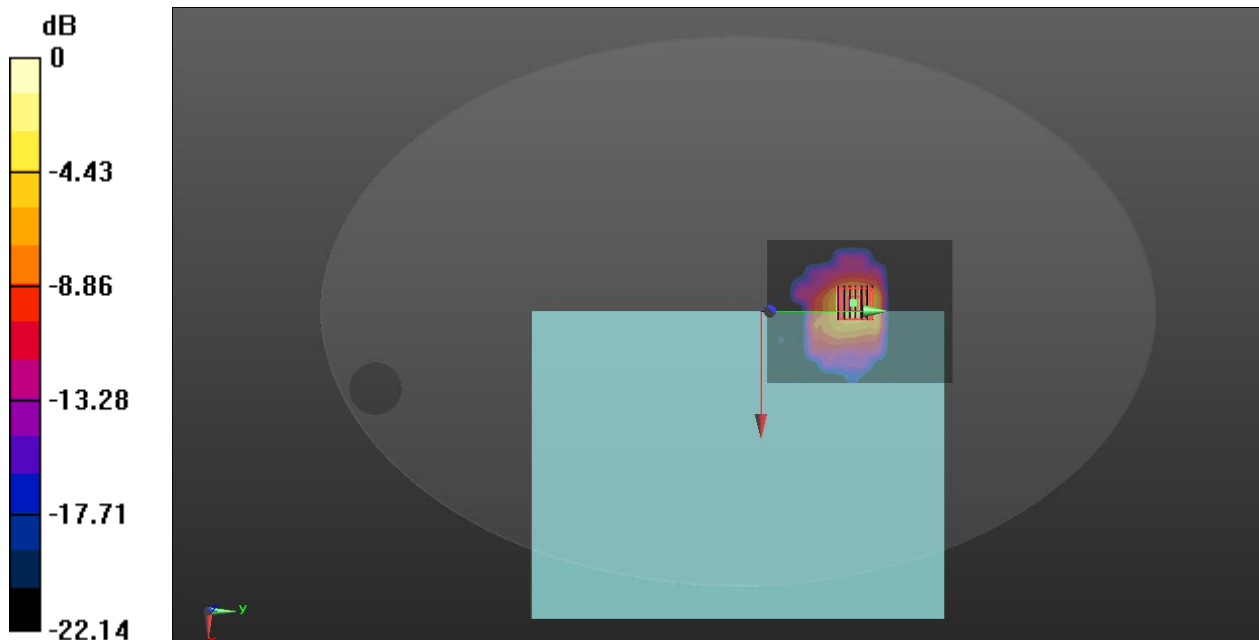

0 dB = 0.578 W/kg

MEAS.6 Body Plane with Bottom Side 0mm on Channel 114 in IEEE802.11ac(VHT160) mode with Main Antenna

Date: 2018.09.24

Communication System Band: WLAN(ac) 160Mhz; Frequency: 5570 MHz;Duty Cycle: 1:1.163

Medium parameters used: $f = 5570$ MHz; $\sigma = 5.681$ S/m; $\epsilon_r = 48.367$; $\rho = 1000$ kg/m³

Phantom section: Flat Section L

Ambient Temperature:22.6 Liquid Temperature:21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.35, 4.35, 4.35); Calibrated: 2018.07.14;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2018.01.11
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch114/Area Scan (101x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.291 W/kg


Ch114/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.546 W/kg

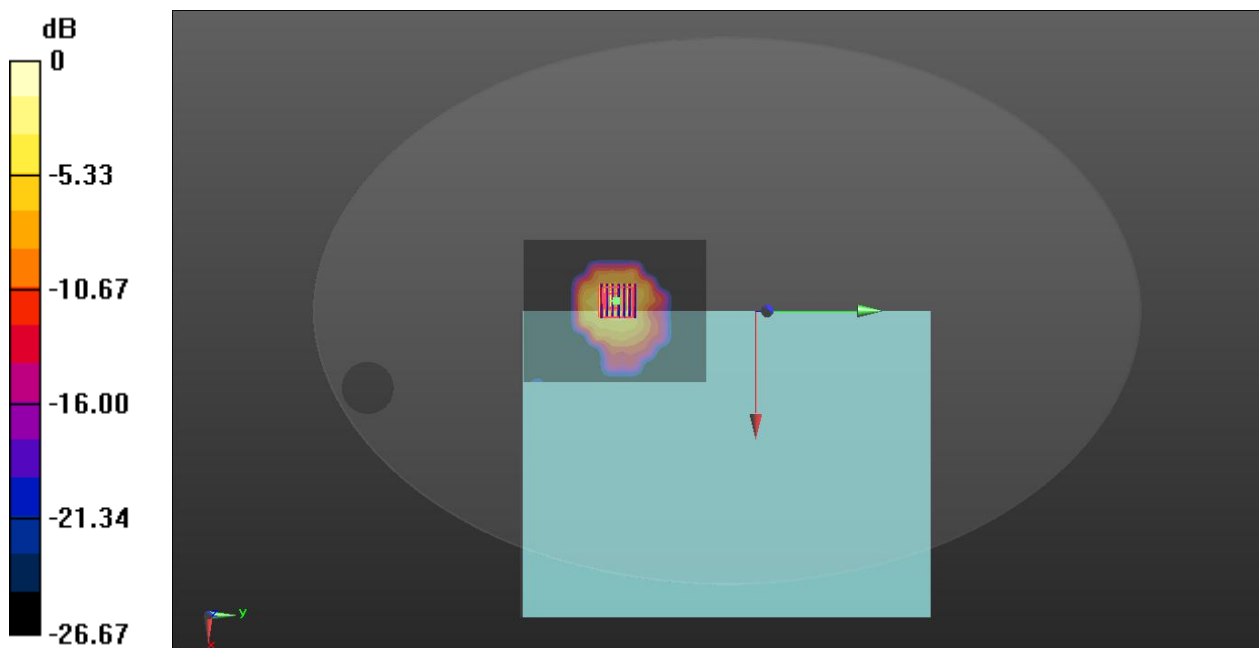

0 dB = 0.546 W/kg

MEAS.7 Body Plane with Bottom Side 0mm on Channel 114 in IEEE802.11ac(VHT160) mode with Aux Antenna

Date: 2018.09.24

Communication System Band: WLAN(ac) 160Mhz; Frequency: 5570 MHz;Duty Cycle: 1:1.163

Medium parameters used: $f = 5570$ MHz; $\sigma = 5.681$ S/m; $\epsilon_r = 48.367$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.6 Liquid Temperature:21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.35, 4.35, 4.35); Calibrated: 2018.07.14;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2018.01.11
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch114/Area Scan (101x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.271 W/kg


Ch114/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.6360 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.478 W/kg

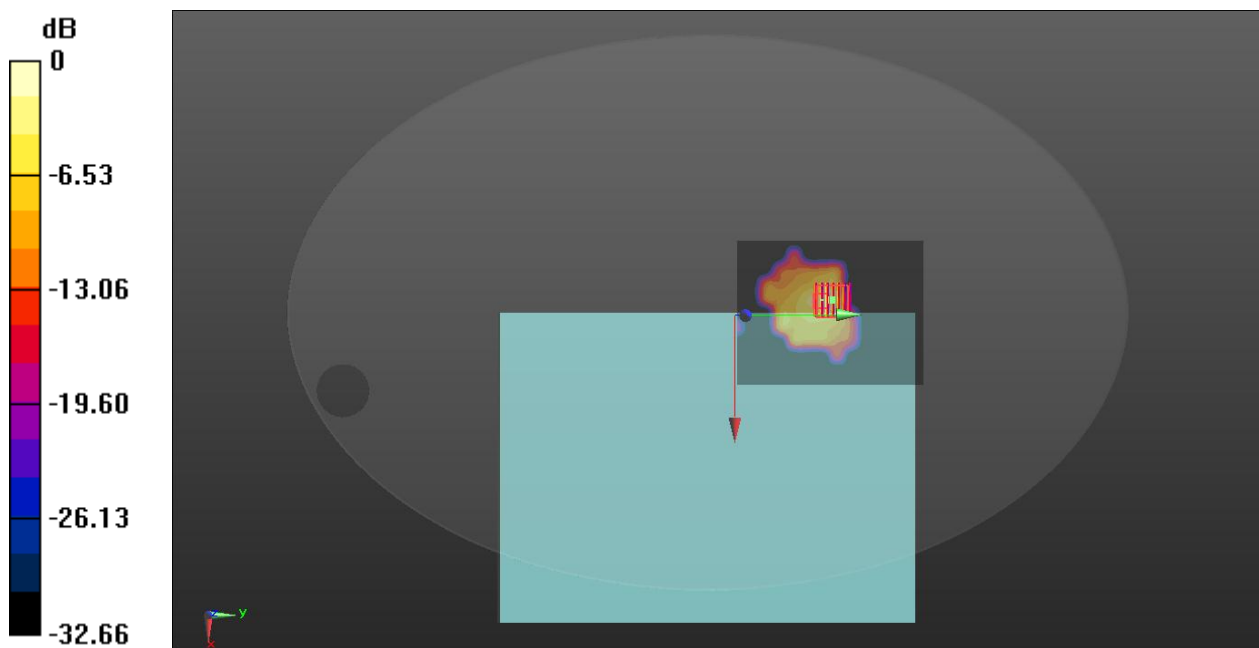

0 dB = 0.478 W/kg

MEAS.8 Body Plane with Bottom Side 0mm on Channel 155 in IEEE802.11ac(VHT80) mode with Main Antenna

Date: 2018.09.24

Communication System Band: WLAN(ac) 80Mhz; Frequency: 5775 MHz;Duty Cycle: 1:1.093

Medium parameters used: $f = 5775$ MHz; $\sigma = 6.087$ S/m; $\epsilon_r = 47.16$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.6 Liquid Temperature:21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.52, 4.52, 4.52); Calibrated: 2018.07.14;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2018.01.11
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch155/Area Scan (101x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.234 W/kg


Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.201 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.479 W/kg

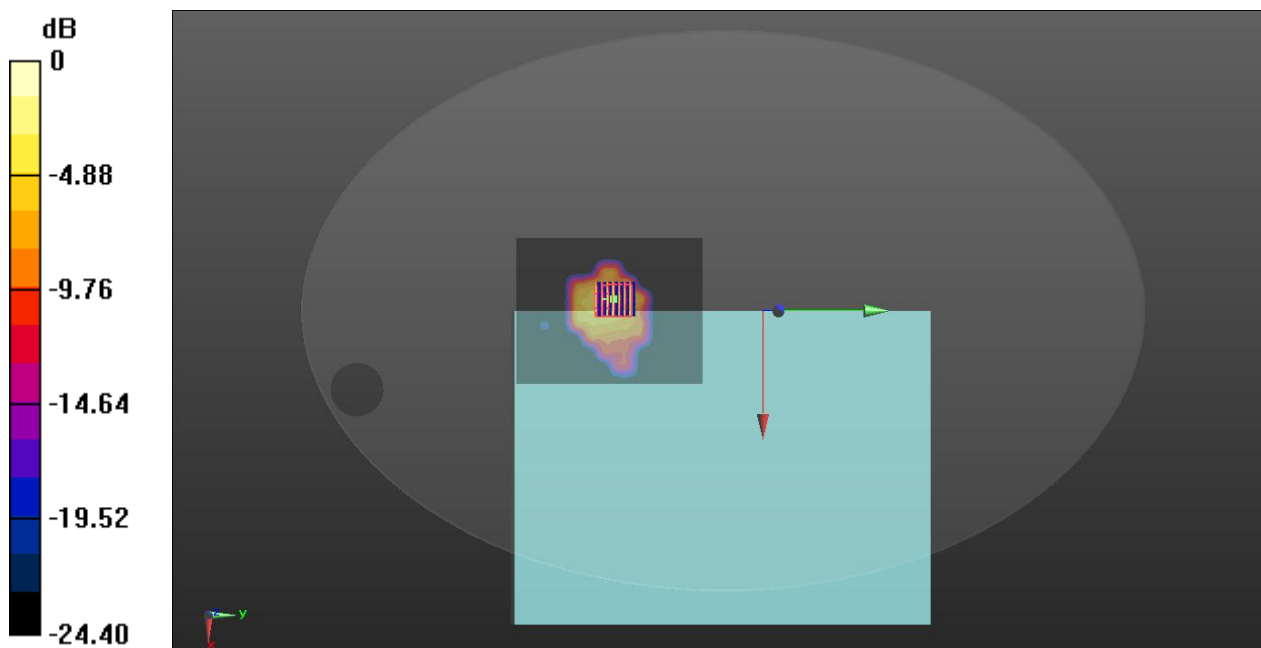

0 dB = 0.479 W/kg

MEAS.9 Body Plane with Bottom Side 0mm on Channel 155 in IEEE802.11ac(VHT80) mode with Aux Antenna

Date: 2018.09.24

Communication System Band: WLAN(ac) 80Mhz; Frequency: 5775 MHz;Duty Cycle: 1:1.093

Medium parameters used: $f = 5775$ MHz; $\sigma = 6.087$ S/m; $\epsilon_r = 47.16$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.6 Liquid Temperature:21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.52, 4.52, 4.52); Calibrated: 2018.07.14;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2018.01.11
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch155/Area Scan (101x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.282 W/kg


Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.8700 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.571 W/kg

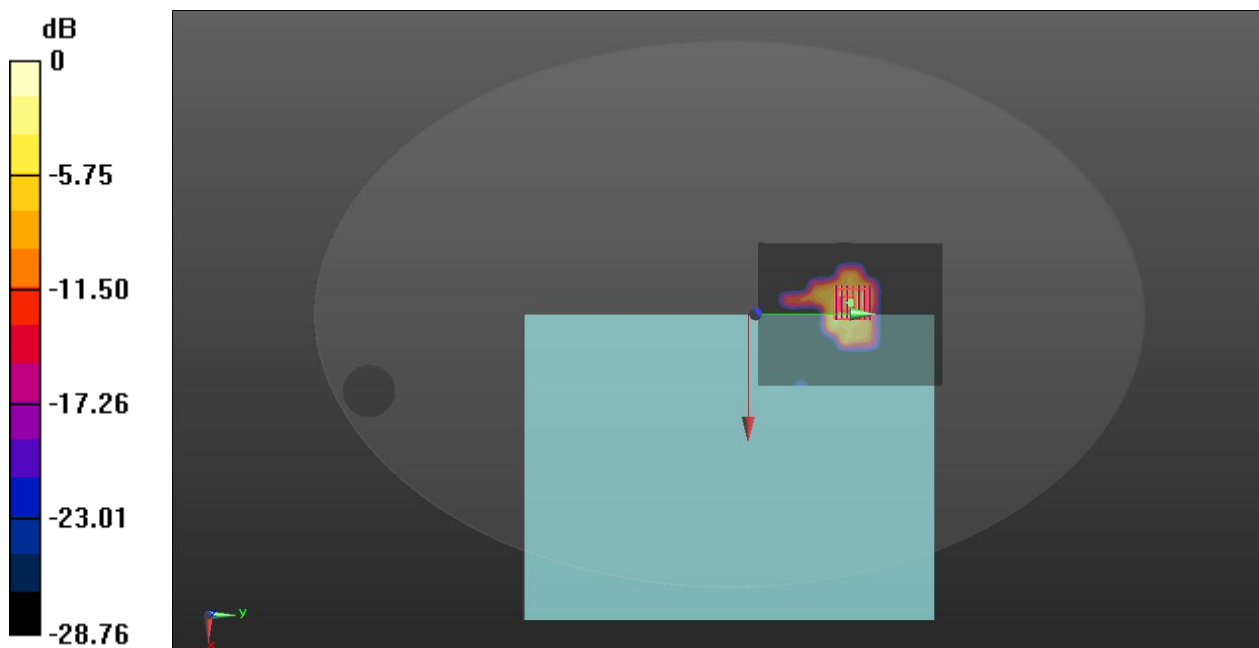

0 dB = 0.571 W/kg

ANNEX D EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ1880358-AW.pdf".

ANNEX E SAR TEST SETUP PHOTOS

Please refer the document "BL-SZ1880358-AS.pdf".

ANNEX F CALIBRATION REPORT

Please refer the document "CALIBRATION REPORT.pdf".

--END OF REPORT--