



FCC RF Test Report

APPLICANT : Espressif Systems (Shanghai)
Co.,Ltd.
EQUIPMENT : 2.4GHz Wi-Fi & BT IoT Module
BRAND NAME : ESPRESSIF
MODEL NAME : ESP8684-WROOM-02C
FCC ID : 2AC7Z-ESP868402C
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Oct. 31, 2022 ~ Nov. 24, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	13
3.3 Power Spectral Density Measurement	14
3.4 Conducted Band Edges and Spurious Emission Measurement	16
3.5 Radiated Band Edges and Spurious Emission Measurement	28
3.6 AC Conducted Emission Measurement.....	32
3.7 Antenna Requirements.....	34
4 LIST OF MEASURING EQUIPMENT	35
5 UNCERTAINTY OF EVALUATION	36
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR2O1801B	Rev. 01	Initial issue of report	Dec. 01, 2022

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.00 dB at 2483.51 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 7.06 dB at 0.156 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Applicant

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.2 Manufacturer

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	2.4GHz Wi-Fi & BT IoT Module
Brand Name	ESPRESSIF
Model Name	ESP8684-WROOM-02C
FCC ID	2AC7Z-ESP868402C
HW Version	V1.0
SW Version	v1.1.3.4
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 22.63 dBm (0.1832 W) 802.11g : 28.34 dBm (0.6823 W) 802.11n HT20 : 27.77 dBm (0.5984 W)
99% Occupied Bandwidth	802.11b : 13.04MHz 802.11g : 16.98MHz 802.11n HT20 : 17.93MHz
Antenna Type / Gain	PCB Antenna type with gain 3.26 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH07-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH07-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :WLAN TX(2.4G) + Charging from Notebook
Remark: 1. For Radiated Test Cases, The tests were performed with Notebook.	

2.3 Connection Diagram of Test System

<Radiated Emission >

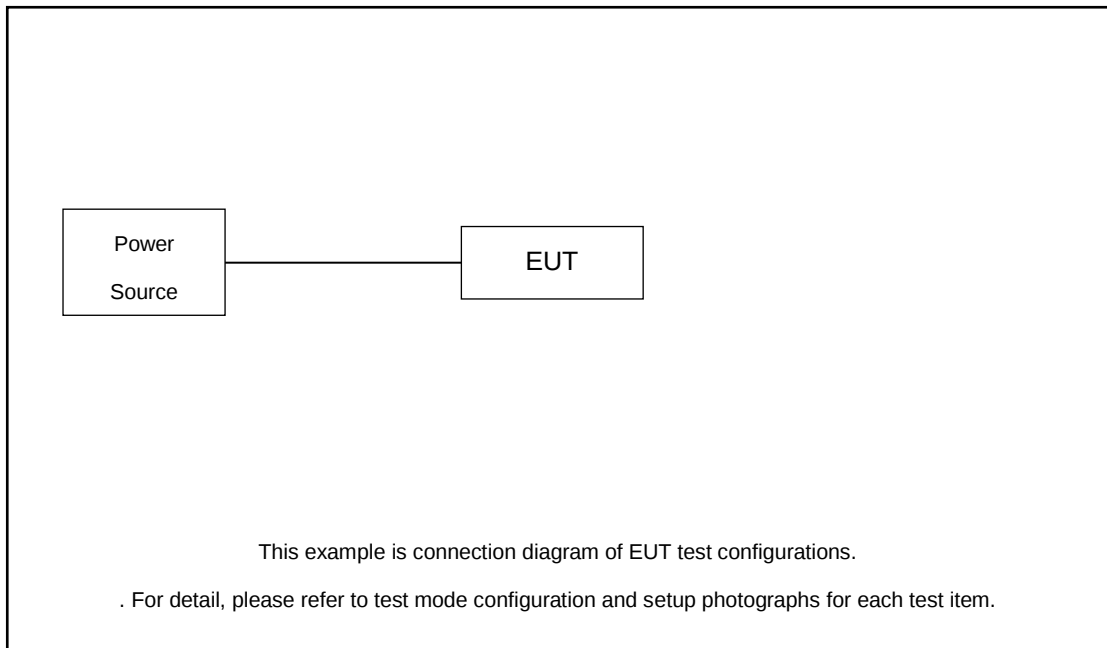

< AC Conducted Emission >

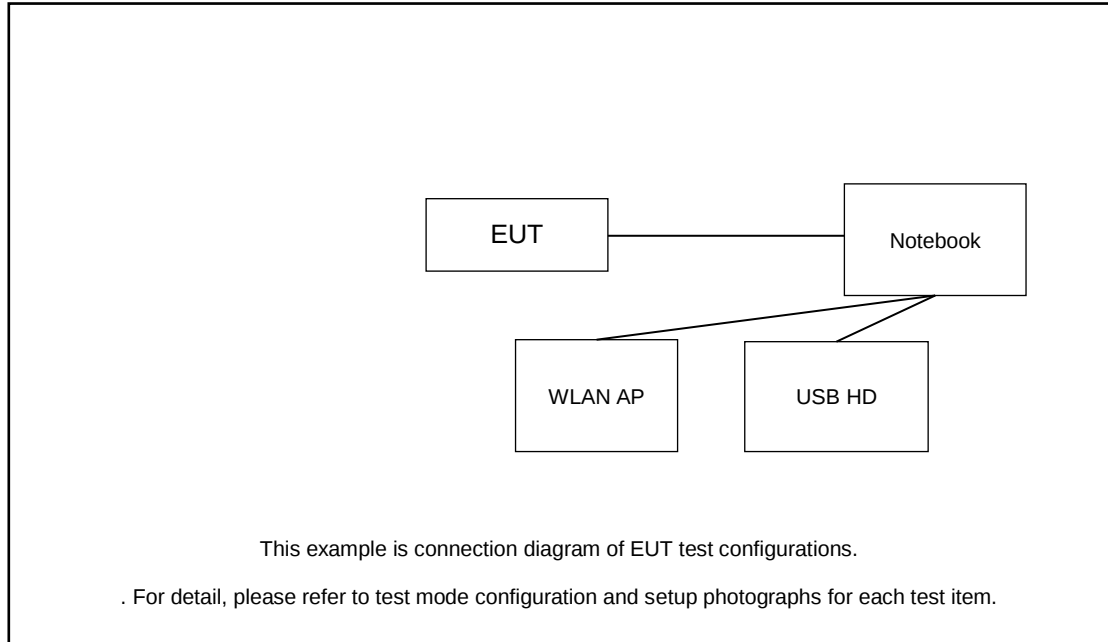

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	V130-14IKB004	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
3.	Test Jig	N/A	N/A	N/A	N/A	N/A
4.	Hard Disk	Lenovo	F310	N/A	Shielded, 1.2m	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss

Offset = RF cable loss

Following shows an offset computation example with cable loss 5.6dB

Offset(dB) = RF cable loss(dB)

= 5.6 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) = 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

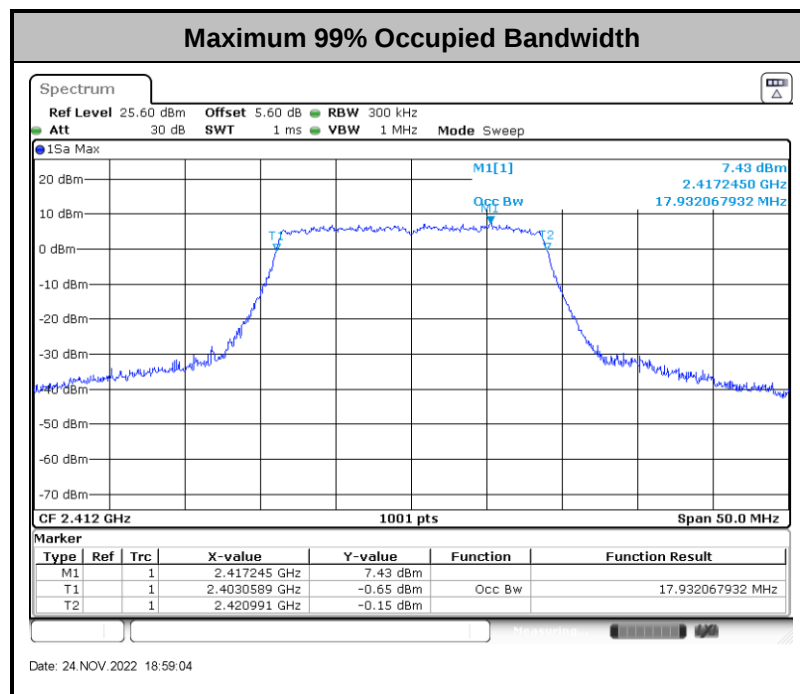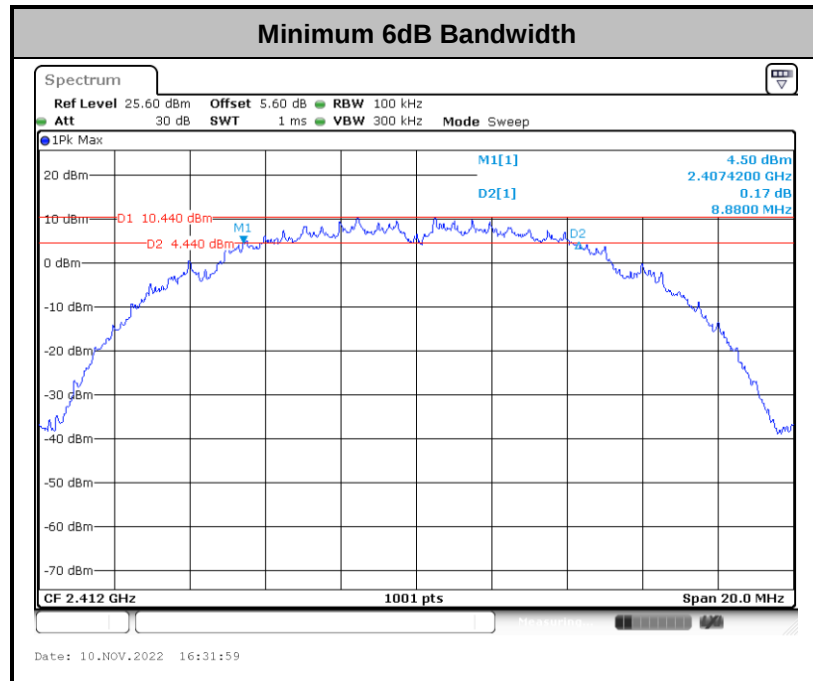

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

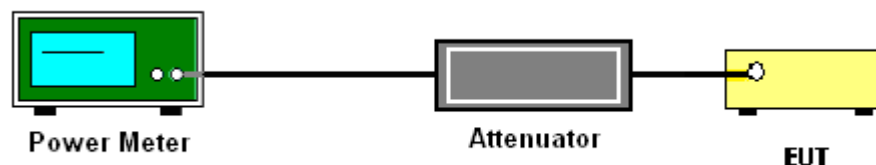

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

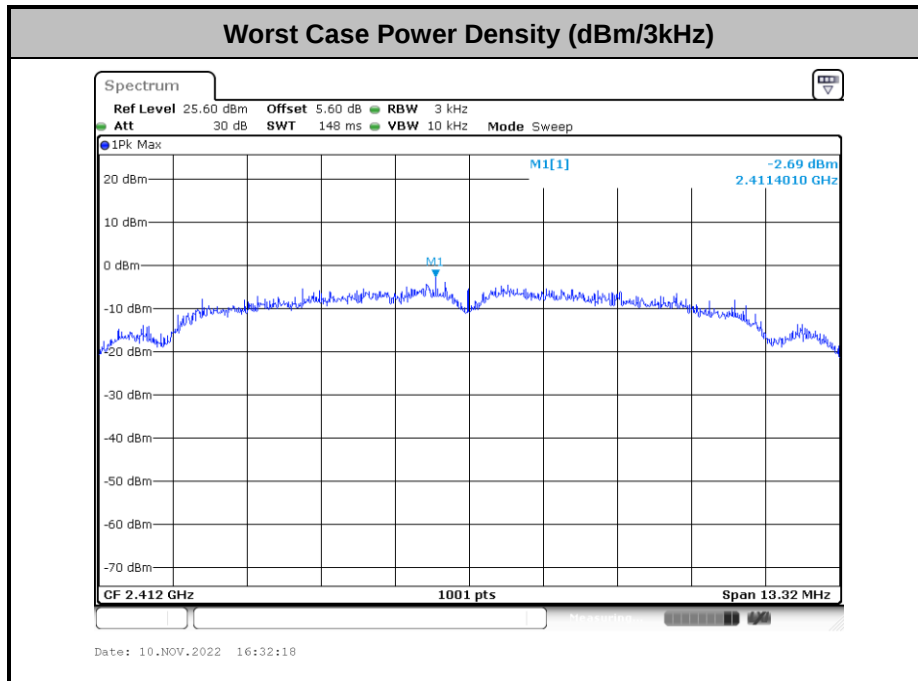

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup






3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Engineer :	Jacob Zhang	Temperature :	21~25°C
		Relative Humidity :	51~54%

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

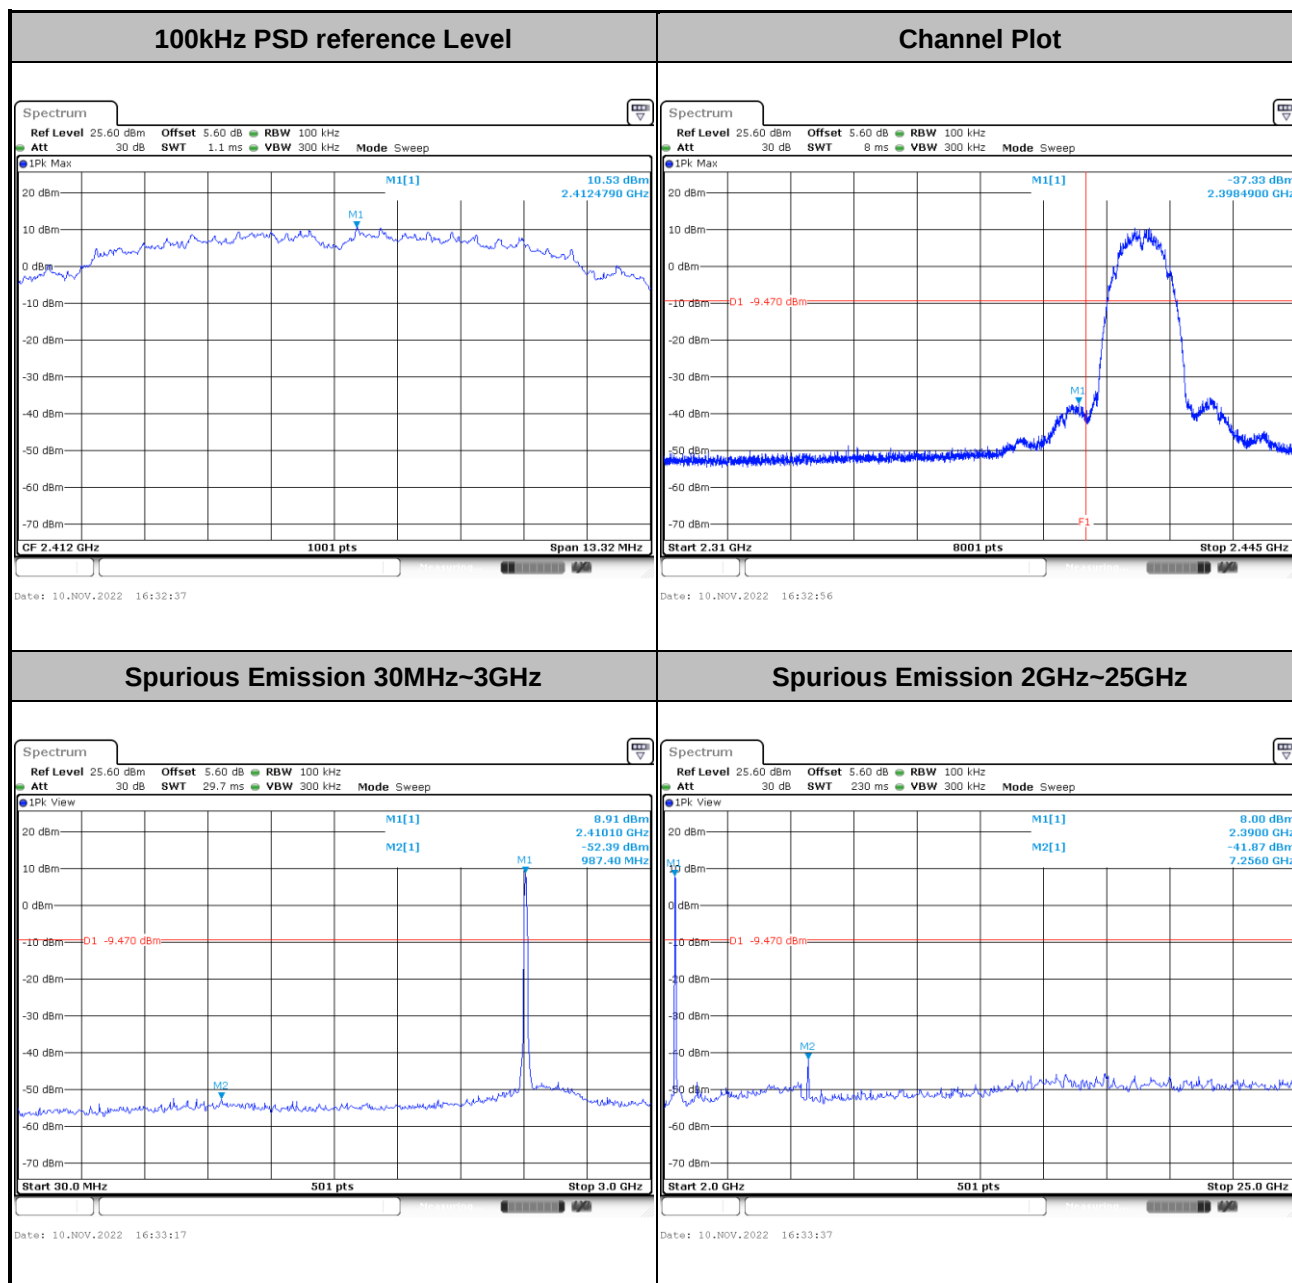




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

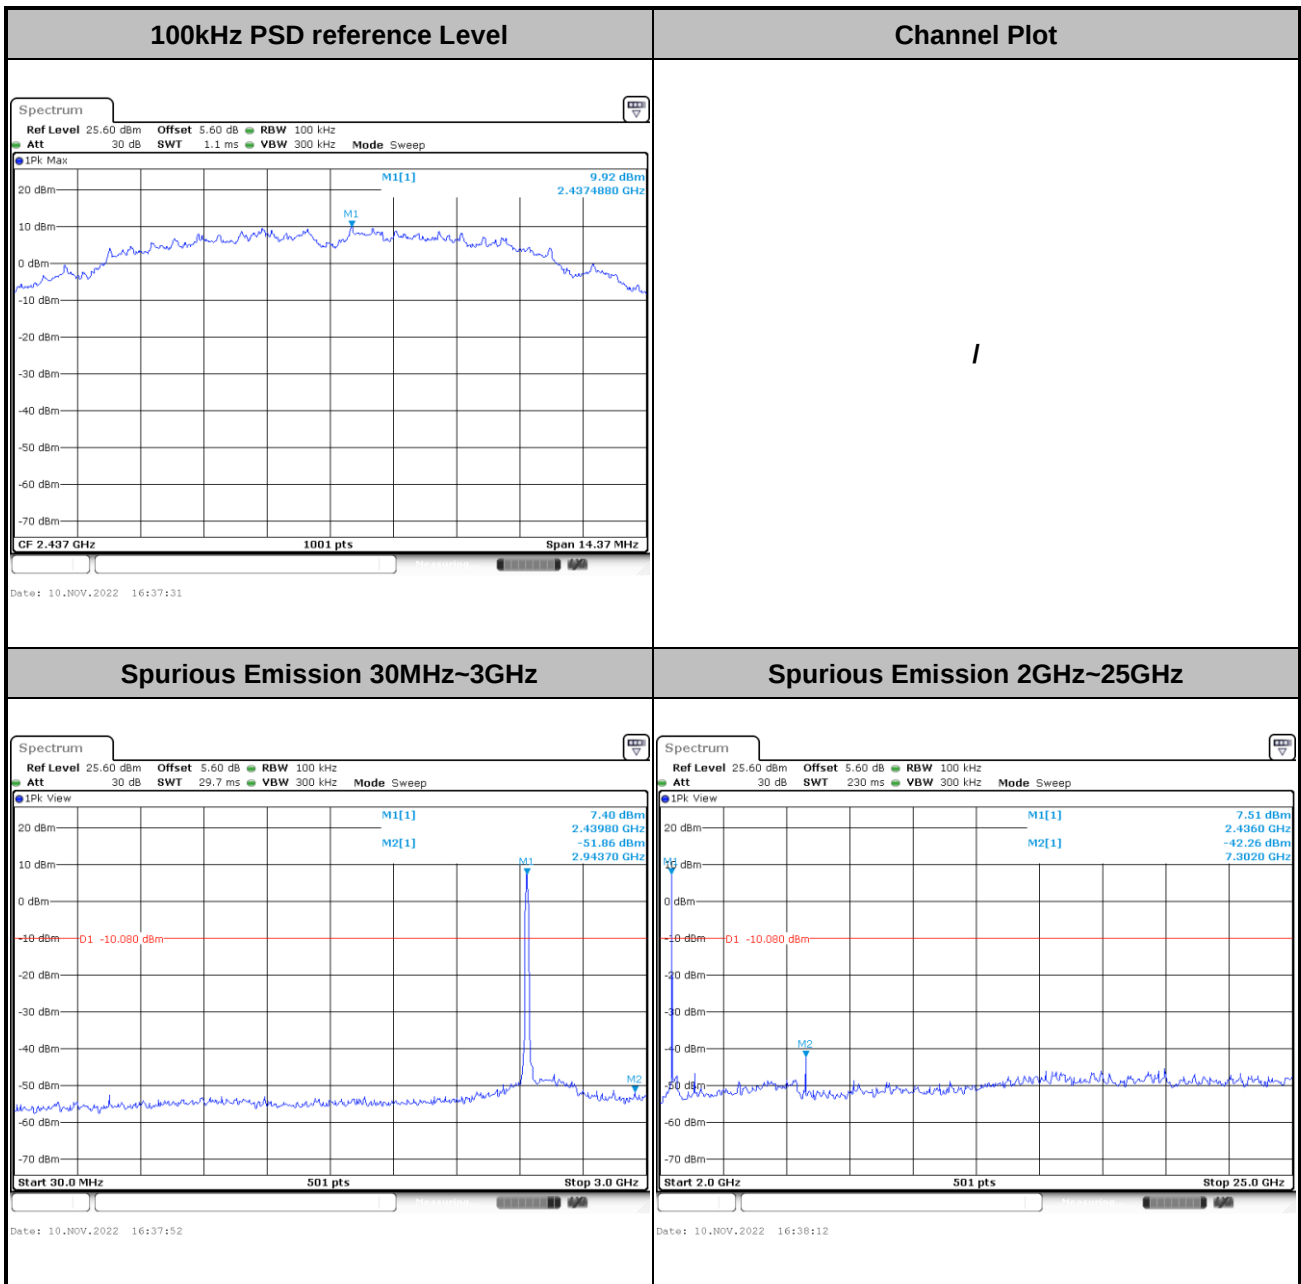




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

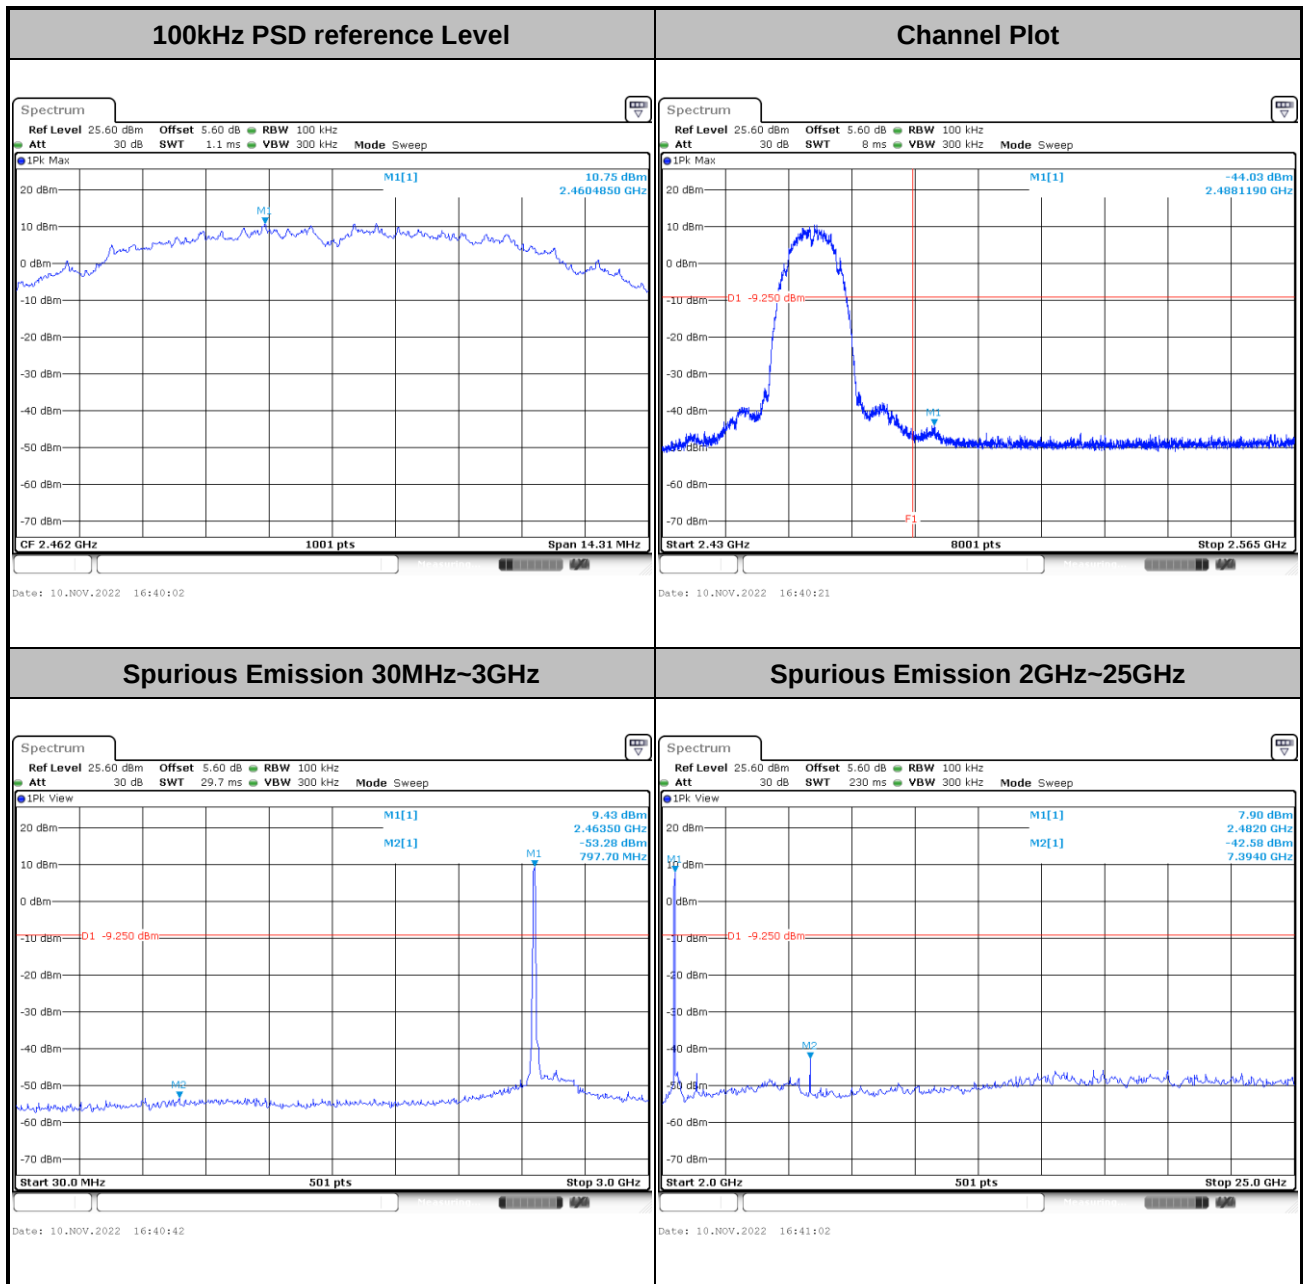




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----


100kHz PSD reference Level

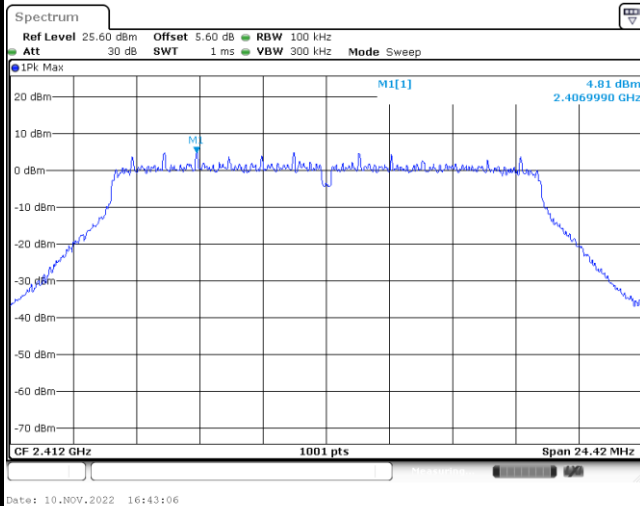


Channel Plot

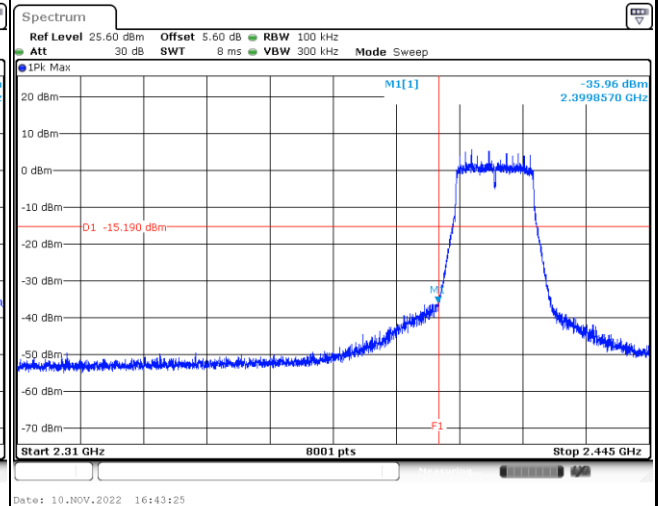

Spurious Emission 30MHz~3GHz

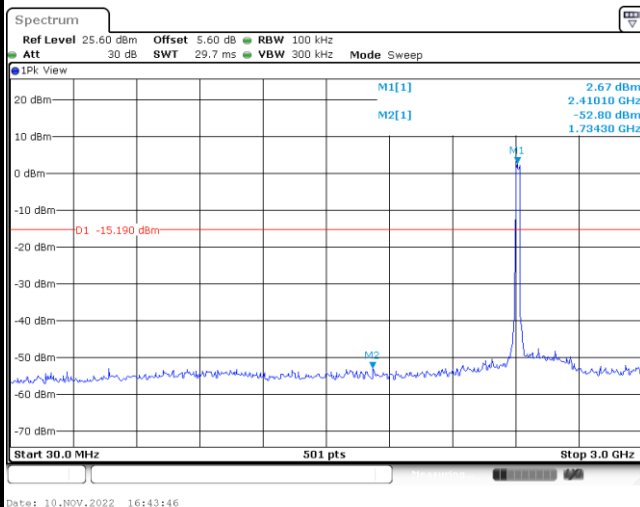


Spurious Emission 2GHz~25GHz

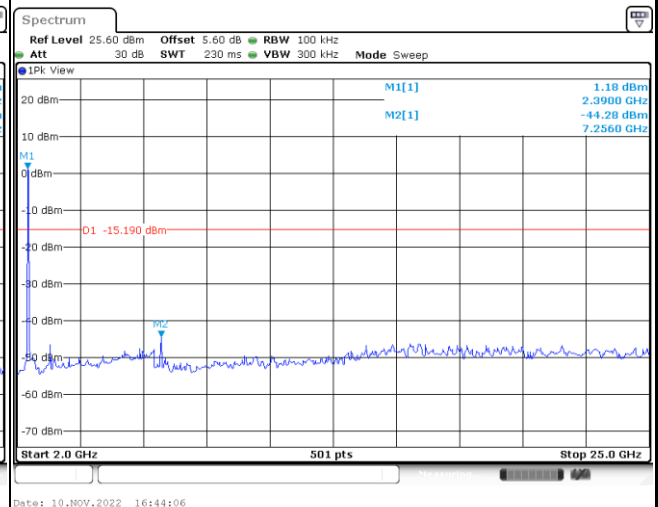




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

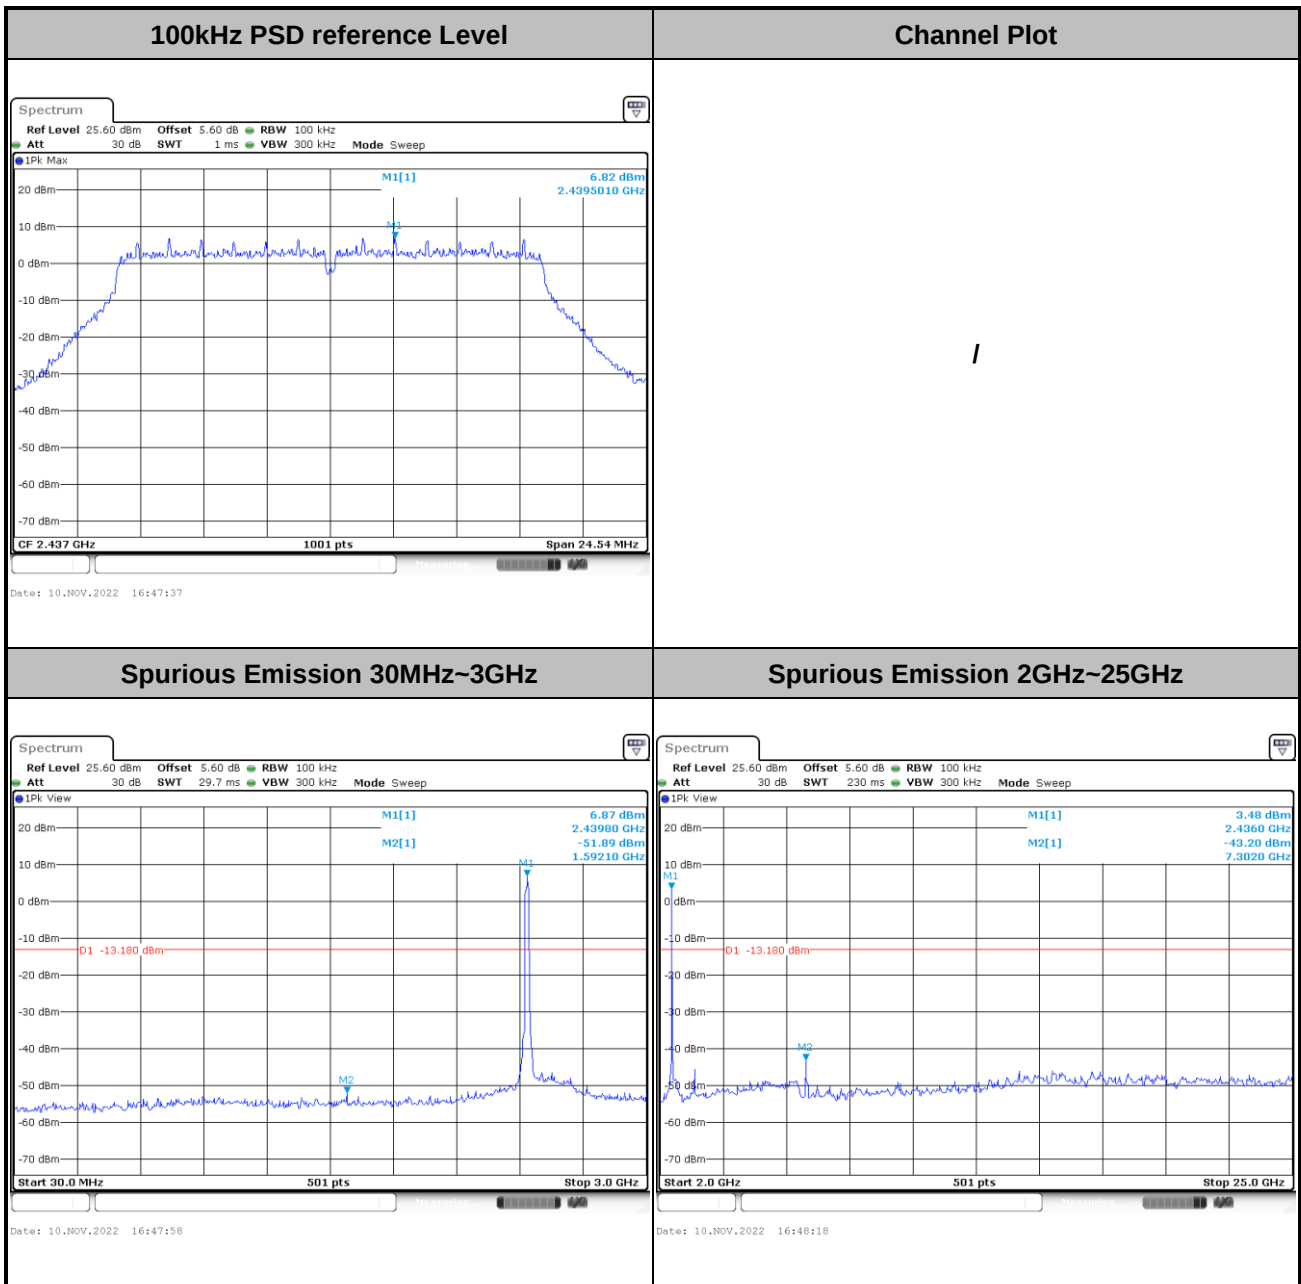




Test Mode :	802.11g	Test Channel :	10
-------------	---------	----------------	----

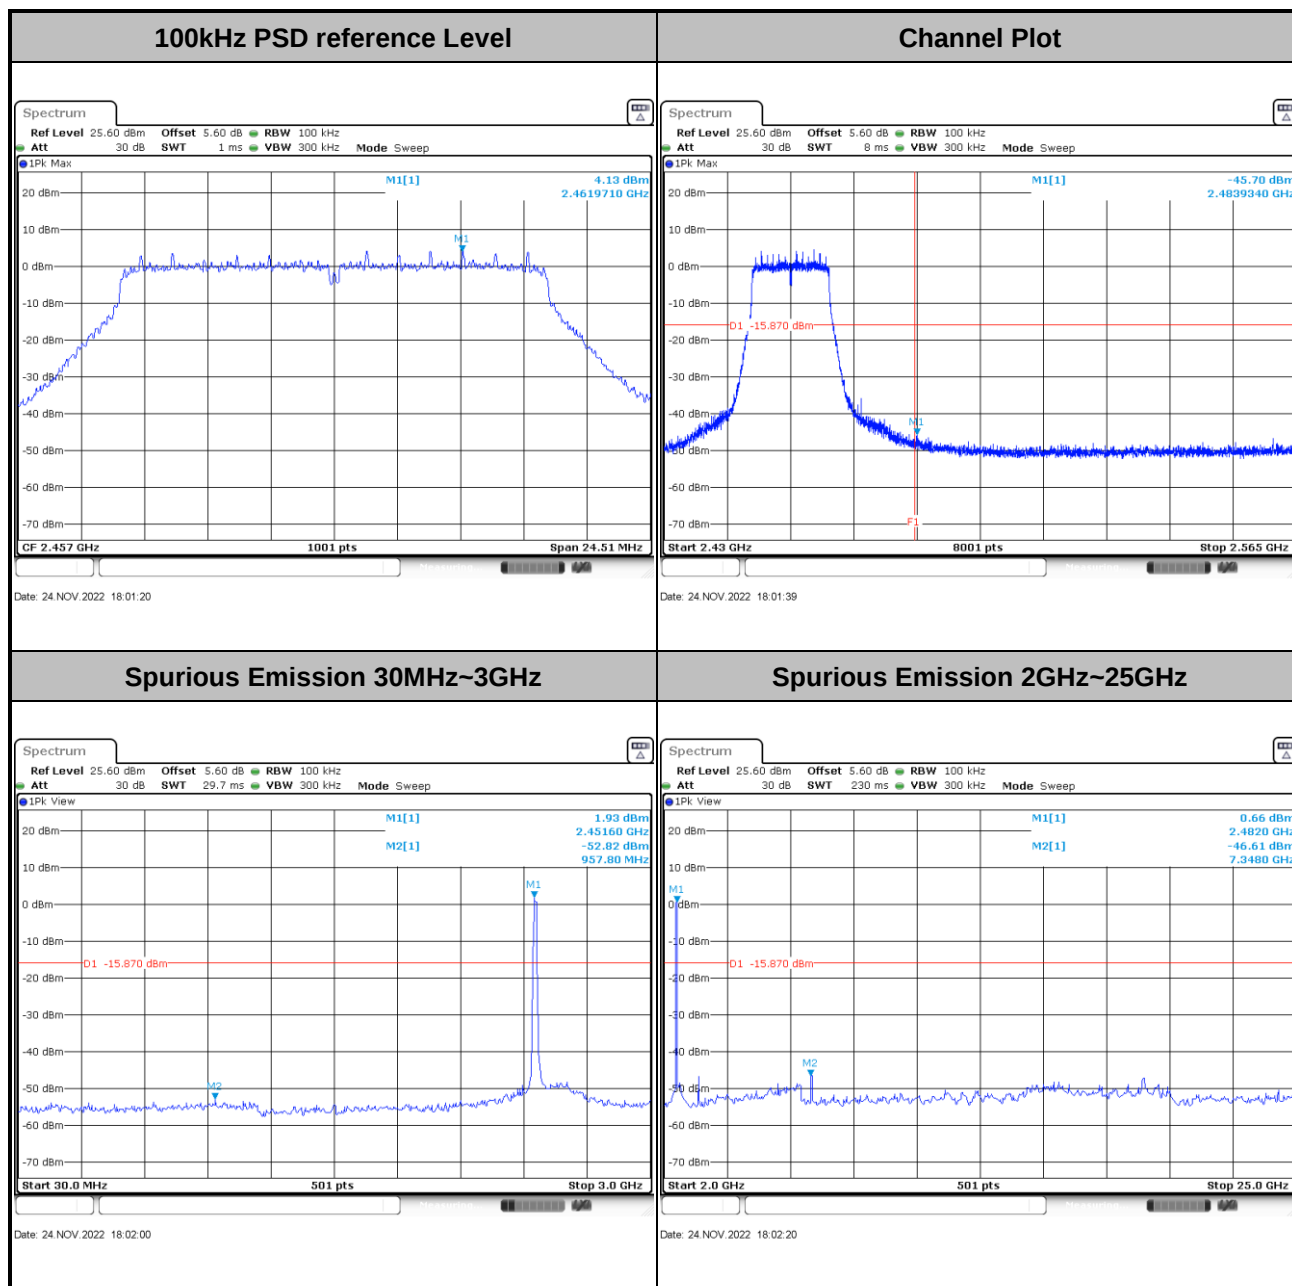




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

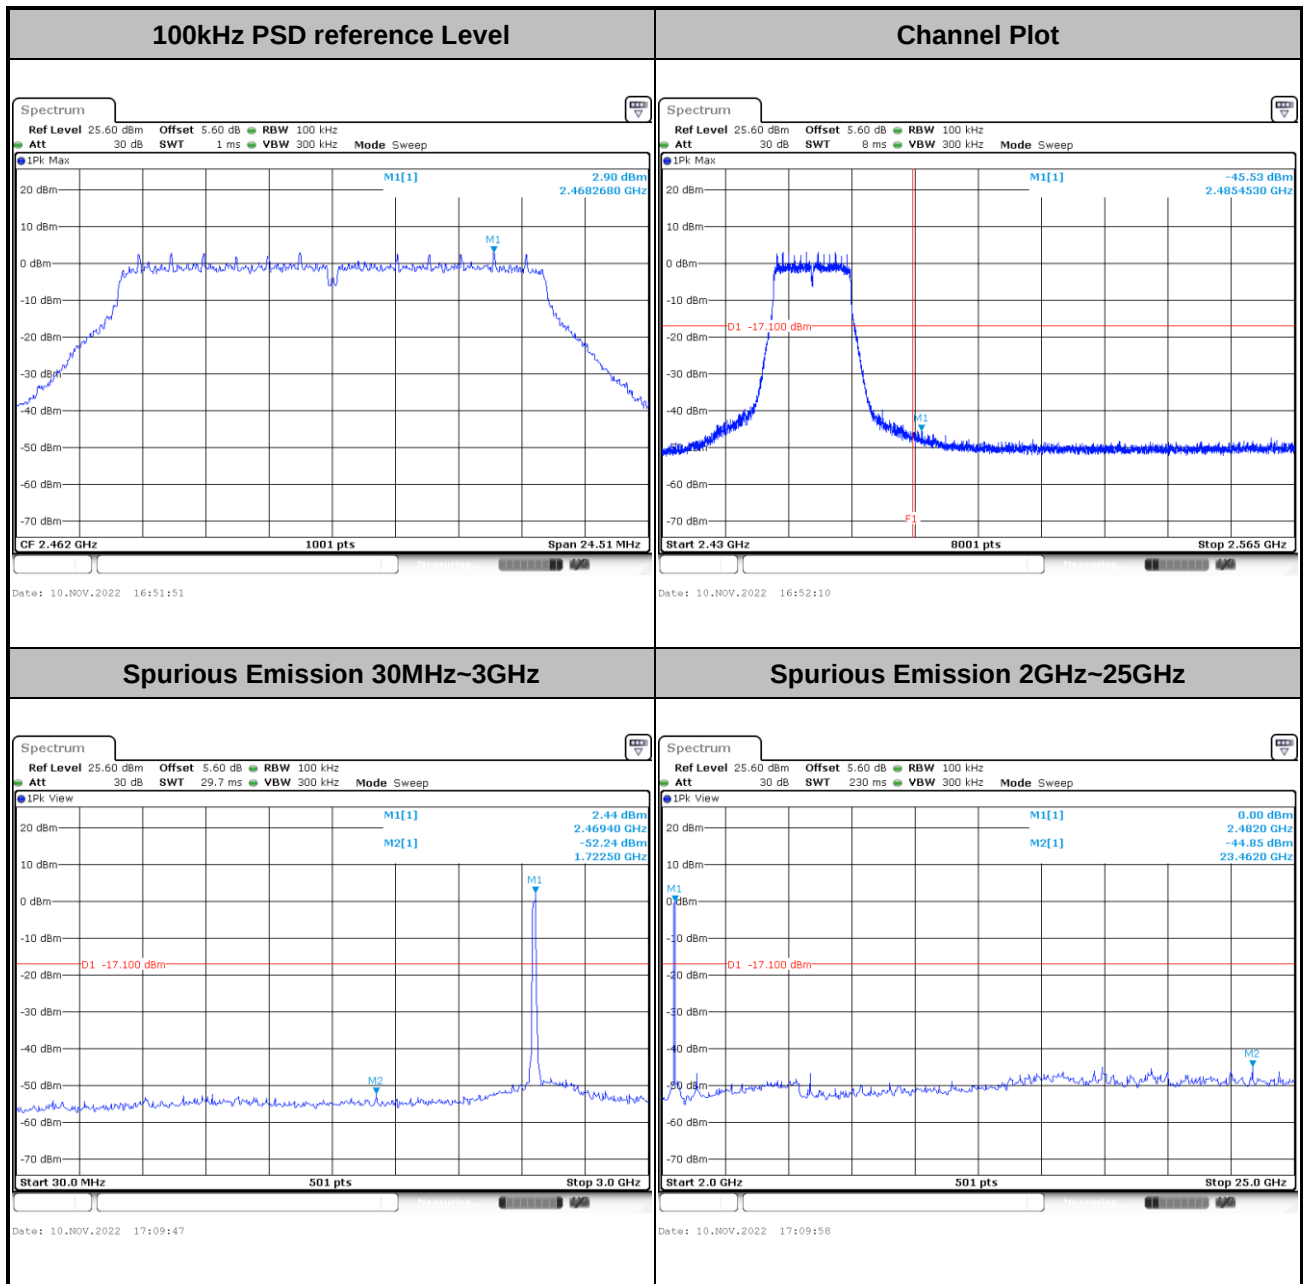




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

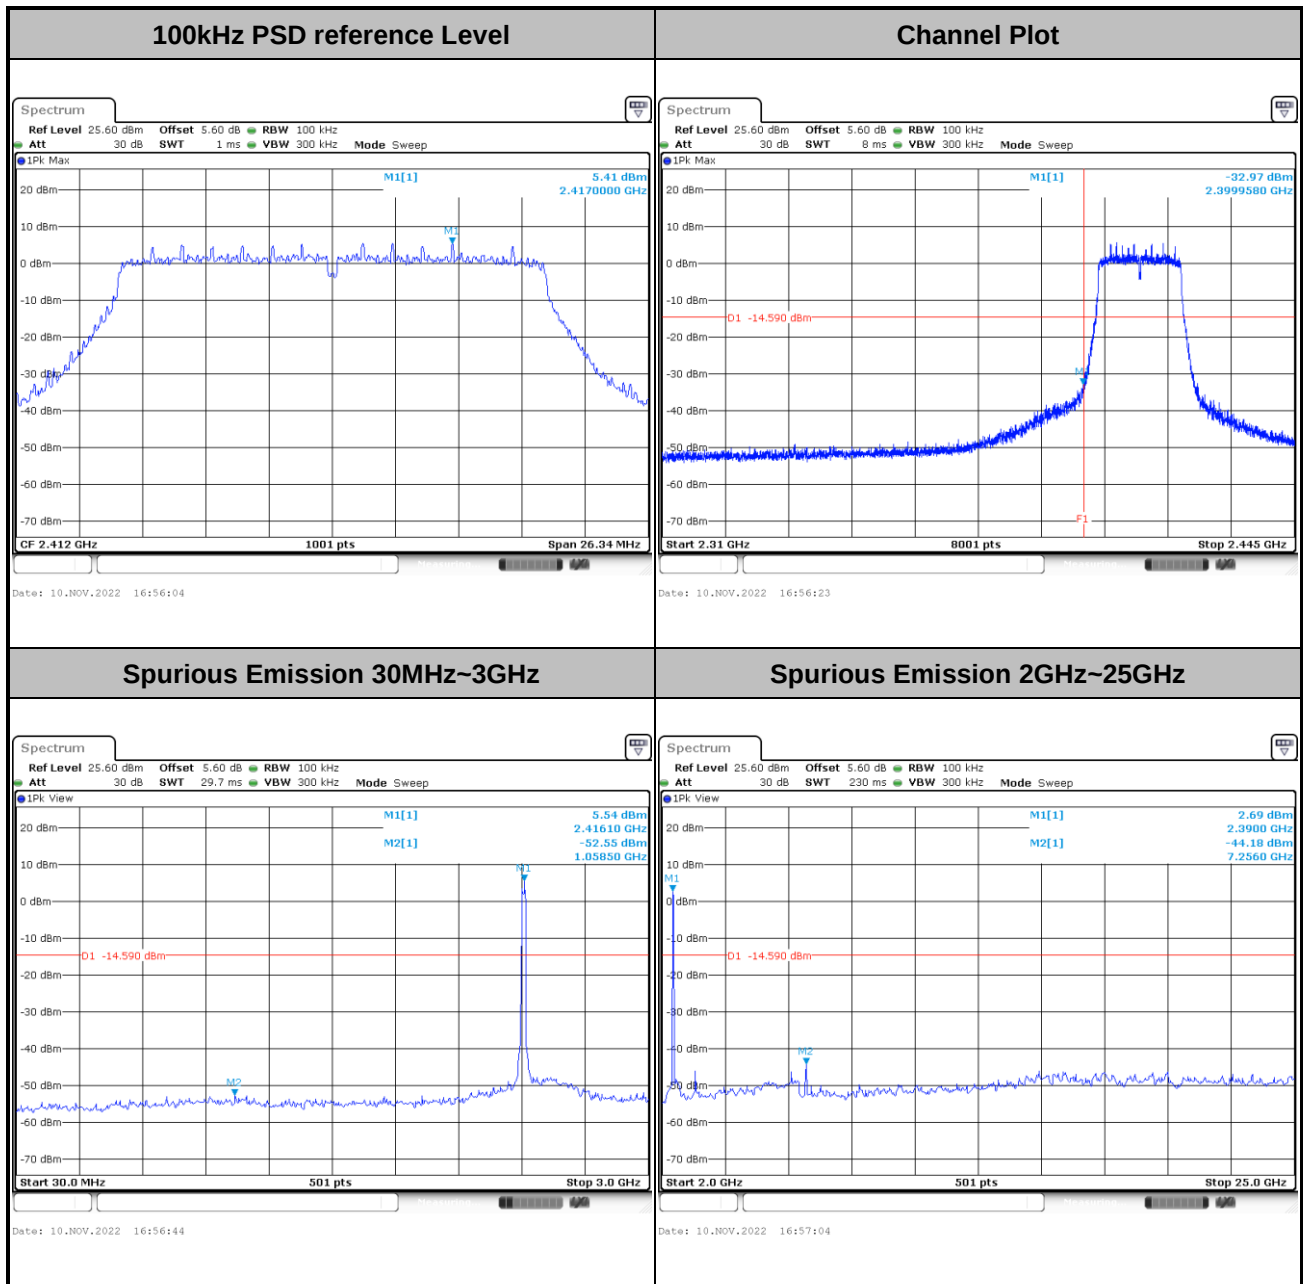




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

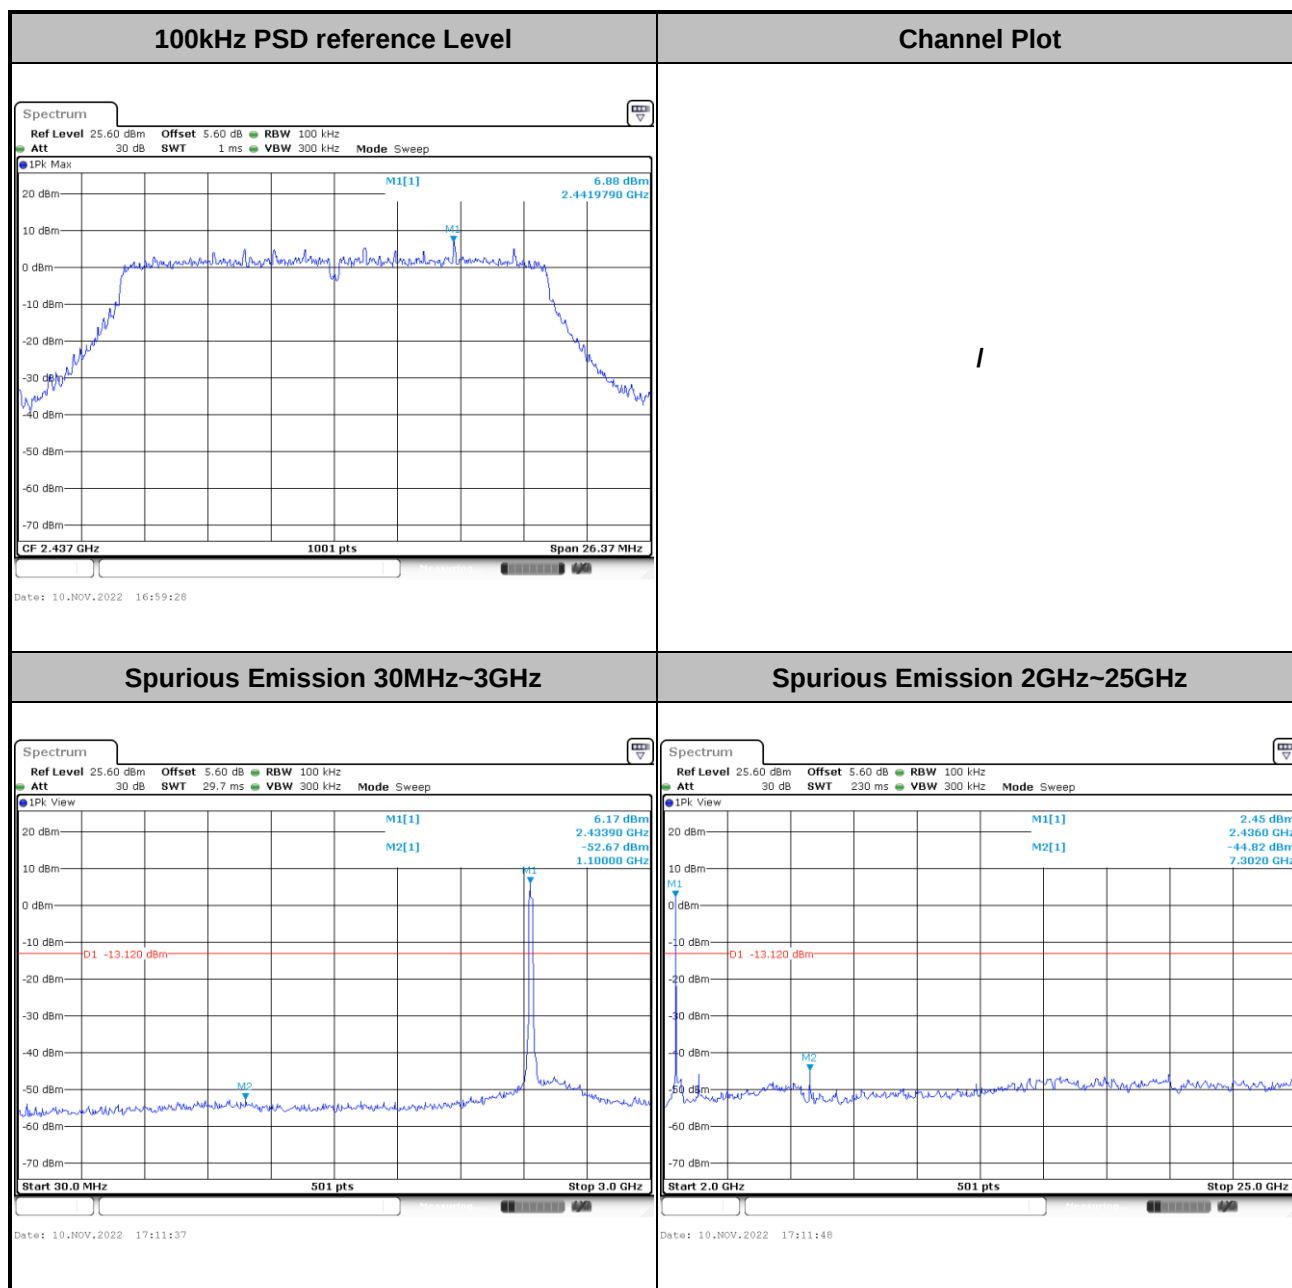




Test Mode :	802.11n HT20	Test Channel :	10
-------------	--------------	----------------	----

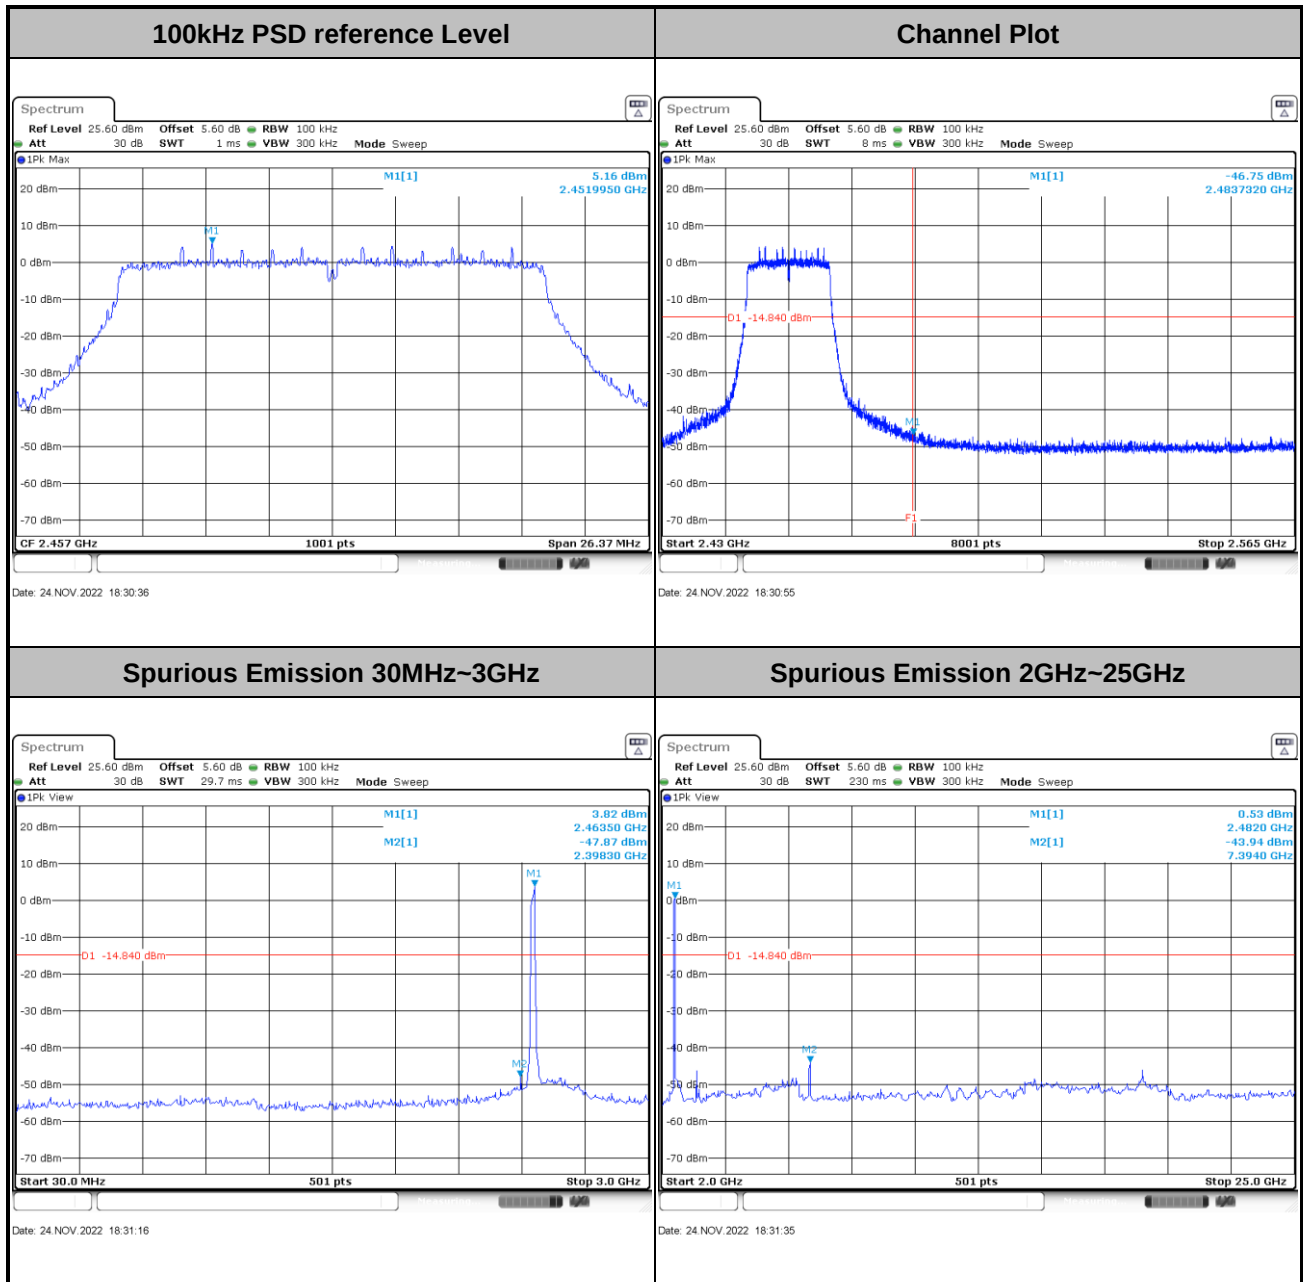



Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

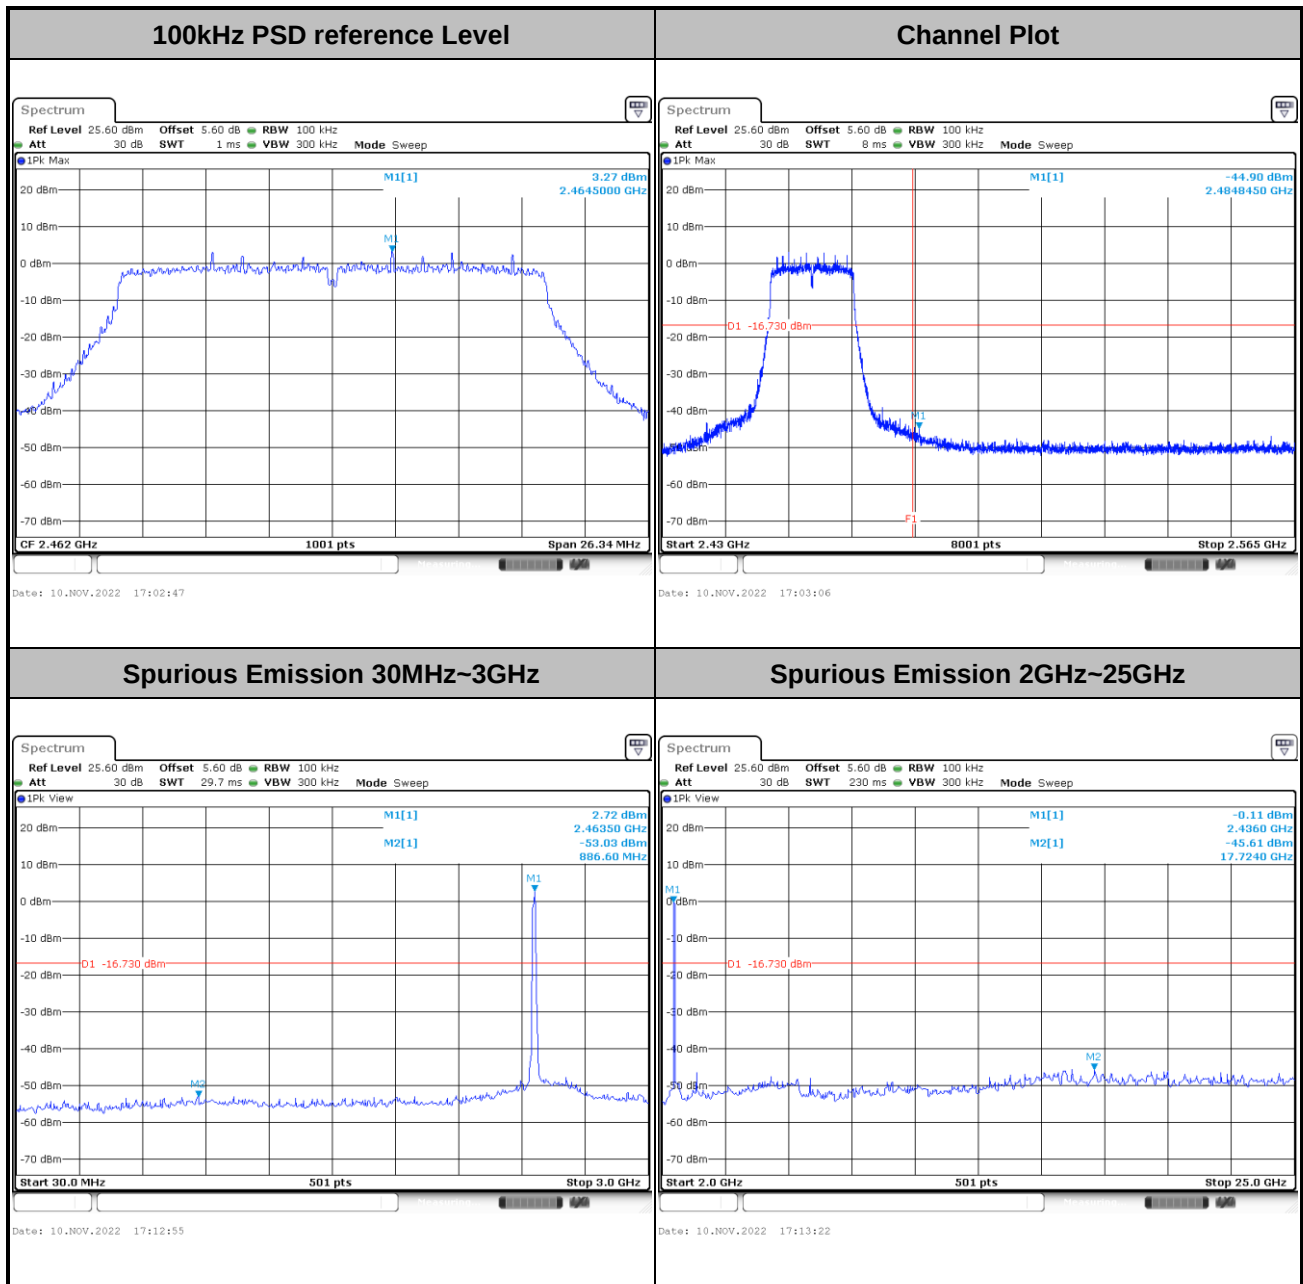

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

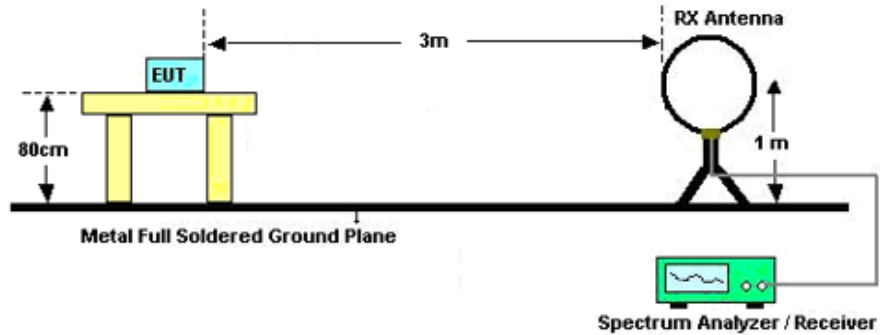

For radiated emissions from 30MHz to 1GHz

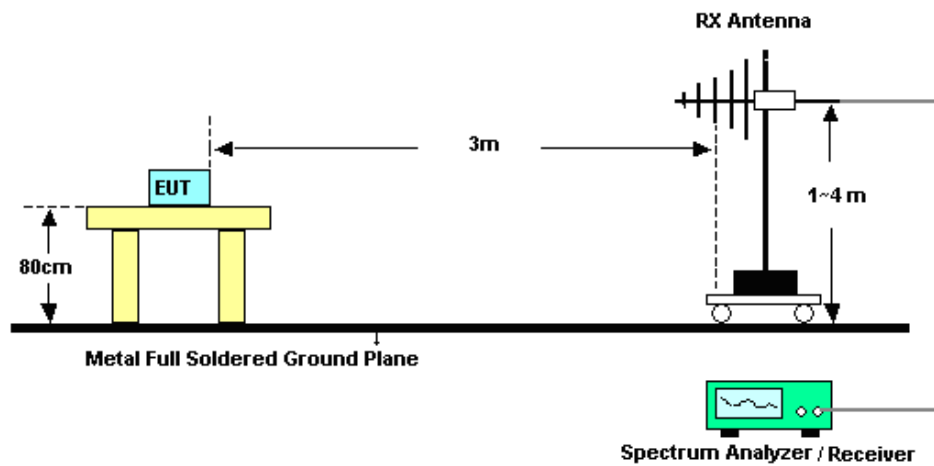

For radiated emissions above 1GHz

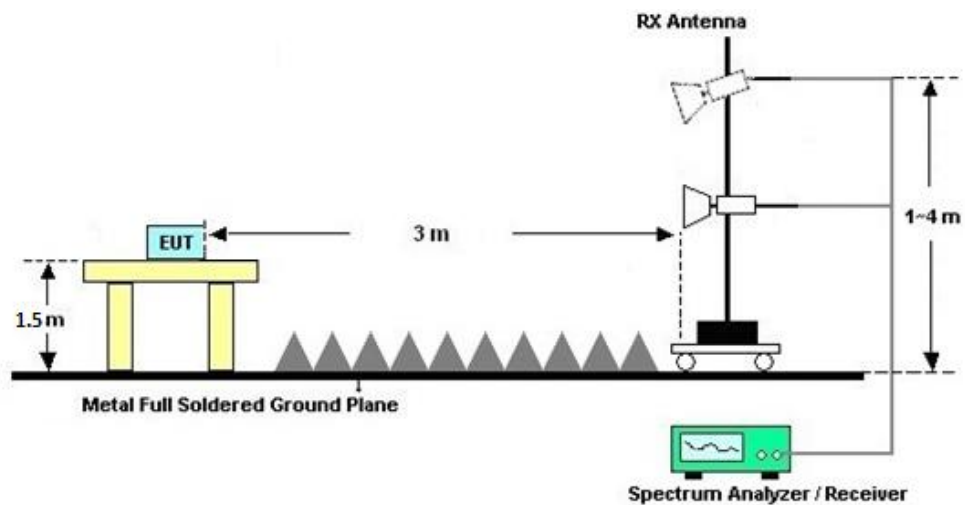

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

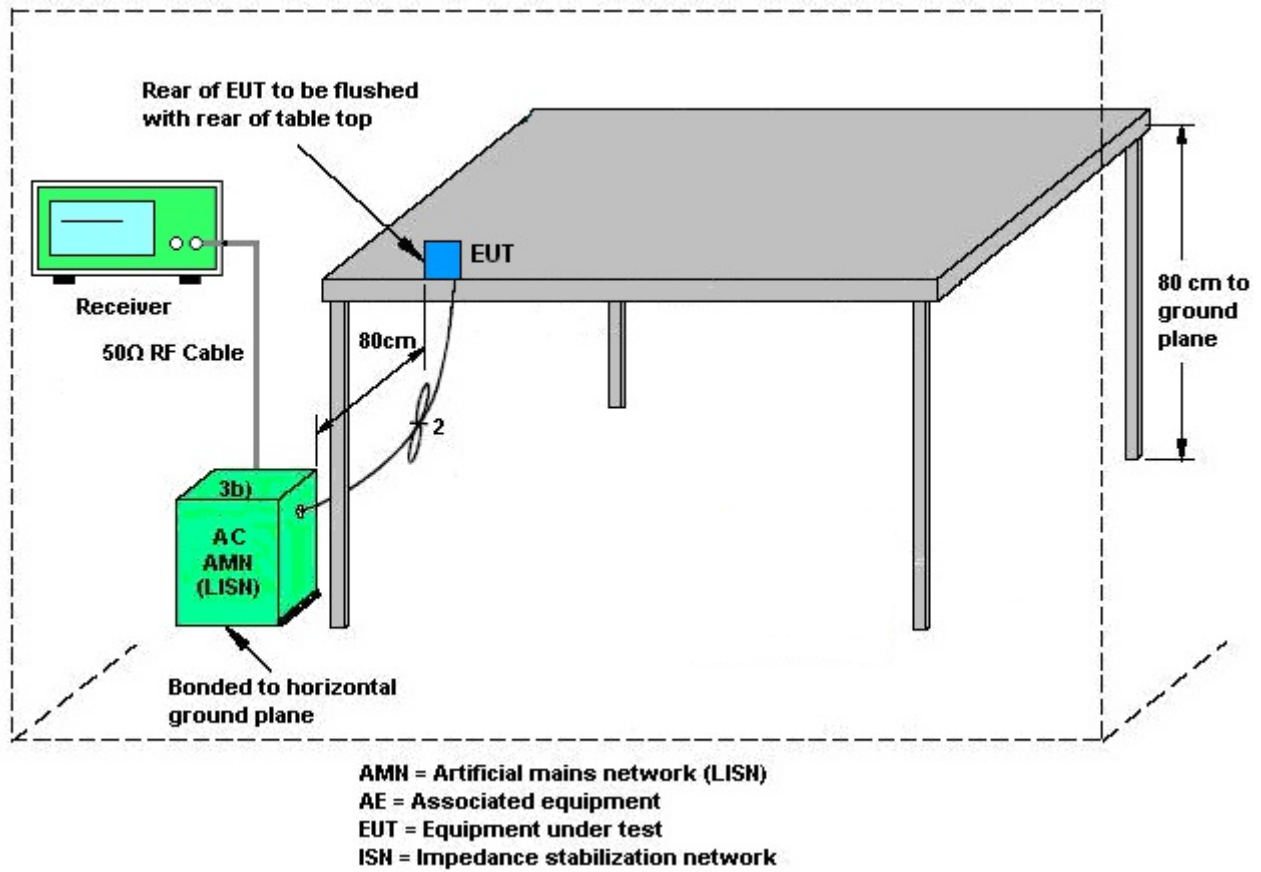

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

Non-standard antenna connector is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Nov. 10, 2022~ Nov. 24, 2022	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Nov. 10, 2022~ Nov. 24, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Nov. 10, 2022~ Nov. 24, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max x 30dBm	Oct. 12, 2022	Oct. 31, 2022~ Nov. 11, 2022	Oct. 11, 2023	Radiation (03CH07-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY553705 28	10Hz~44G,MAX 30dB	Oct. 12, 2022	Oct. 31, 2022~ Nov. 11, 2022	Oct. 11, 2023	Radiation (03CH07-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Oct. 31, 2022~ Nov. 11, 2022	Oct. 15, 2023	Radiation (03CH07-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Aug. 26, 2022	Oct. 31, 2022~ Nov. 11, 2022	Aug. 25, 2023	Radiation (03CH07-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 06, 2022	Oct. 31, 2022~ Nov. 11, 2022	Apr. 05, 2023	Radiation (03CH07-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Oct. 31, 2022~ Nov. 11, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 05, 2022	Oct. 31, 2022~ Nov. 11, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
Amplifier	EM	EM01G18GA	060834	1Ghz~18Ghz	Oct. 12, 2022	Oct. 31, 2022~ Nov. 11, 2022	Oct. 11, 2023	Radiation (03CH07-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Oct. 31, 2022~ Nov. 11, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz~18Ghz	Oct. 12, 2022	Oct. 31, 2022~ Nov. 11, 2022	Oct. 11, 2023	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	616010002 473	N/A	NCR	Oct. 31, 2022~ Nov. 11, 2022	NCR	Radiation (03CH07-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Oct. 31, 2022~ Nov. 11, 2022	NCR	Radiation (03CH07-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Oct. 31, 2022~ Nov. 11, 2022	NCR	Radiation (03CH07-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 20, 2022	Nov. 07, 2022	Apr. 19, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Nov. 07, 2022	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	May 24, 2022	Nov. 07, 2022	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Nov. 07, 2022	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	± 0.46 dB
Conducted Emissions	± 0.48 dB
Occupied Channel Bandwidth	± 0.1 %
Conducted Power Spectral Density	± 0.40 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Jacob Zhang	Temperature:	21~25	°C
Test Date:	2022/11/10~2022/11/24	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.04	8.88	0.50	Pass
11b	1Mbps	1	6	2437	12.99	9.58	0.50	Pass
11b	1Mbps	1	11	2462	13.04	9.54	0.50	Pass
11g	6Mbps	1	1	2412	16.98	16.28	0.50	Pass
11g	6Mbps	1	6	2437	16.98	16.36	0.50	Pass
11g	6Mbps	1	10	2457	16.98	16.34	0.50	Pass
11g	6Mbps	1	11	2462	16.98	16.34	0.50	Pass
HT20	MCS0	1	1	2412	17.93	17.56	0.50	Pass
HT20	MCS0	1	6	2437	17.88	17.58	0.50	Pass
HT20	MCS0	1	10	2457	17.88	17.58	0.50	Pass
HT20	MCS0	1	11	2462	17.93	17.56	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	22.63	30.00	3.26	25.89	36.00	Pass
11b	1Mbps	1	6	2437	21.93	30.00	3.26	25.19	36.00	Pass
11b	1Mbps	1	11	2462	22.62	30.00	3.26	25.88	36.00	Pass
11g	6Mbps	1	1	2412	25.70	30.00	3.26	28.96	36.00	Pass
11g	6Mbps	1	6	2437	28.34	30.00	3.26	31.60	36.00	Pass
11g	6Mbps	1	10	2457	26.85	30.00	3.26	30.11	36.00	Pass
11g	6Mbps	1	11	2462	24.91	30.00	3.26	28.17	36.00	Pass
HT20	MCS0	1	1	2412	27.31	30.00	3.26	30.57	36.00	Pass
HT20	MCS0	1	6	2437	27.77	30.00	3.26	31.03	36.00	Pass
HT20	MCS0	1	10	2457	27.58	30.00	3.26	30.84	36.00	Pass
HT20	MCS0	1	11	2462	25.68	30.00	3.26	28.94	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.00	19.06
11b	1Mbps	1	6	2437	0.00	18.31
11b	1Mbps	1	11	2462	0.00	18.87
11g	6Mbps	1	1	2412	0.00	16.23
11g	6Mbps	1	6	2437	0.00	18.32
11g	6Mbps	1	10	2457	0.00	16.34
11g	6Mbps	1	11	2462	0.00	14.48
HT20	MCS0	1	1	2412	0.00	16.83
HT20	MCS0	1	6	2437	0.00	17.45
HT20	MCS0	1	10	2457	0.00	16.65
HT20	MCS0	1	11	2462	0.00	14.39

Duty factor = 10 log (1/x), where x is the measured duty cycle


TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-2.69	3.26	8.00	Pass
11b	1Mbps	1	6	2437	-3.53	3.26	8.00	Pass
11b	1Mbps	1	11	2462	-3.35	3.26	8.00	Pass
11g	6Mbps	1	1	2412	-9.25	3.26	8.00	Pass
11g	6Mbps	1	6	2437	-7.10	3.26	8.00	Pass
11g	6Mbps	1	10	2457	-8.08	3.26	8.00	Pass
11g	6Mbps	1	11	2462	-8.67	3.26	8.00	Pass
HT20	MCS0	1	1	2412	-7.93	3.26	8.00	Pass
HT20	MCS0	1	6	2437	-7.51	3.26	8.00	Pass
HT20	MCS0	1	10	2457	-8.20	3.26	8.00	Pass
HT20	MCS0	1	11	2462	-9.00	3.26	8.00	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Wang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

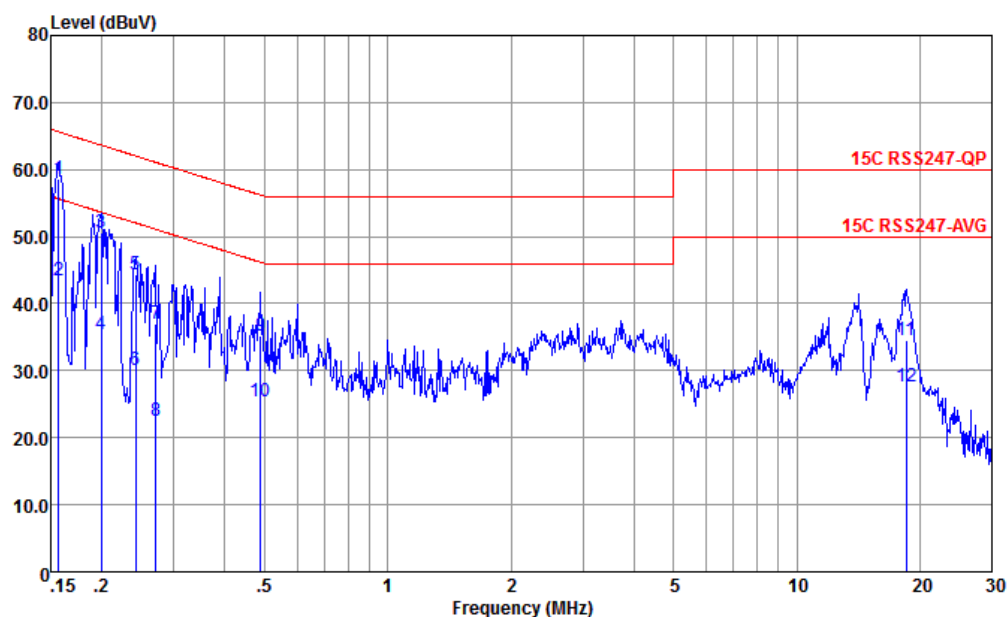


Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-LINE LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1 *	0.156	58.59	-7.06	65.65	48.10	0.06	10.43	QP
2	0.156	43.39	-12.26	55.65	32.90	0.06	10.43	Average
3	0.200	50.64	-12.98	63.62	40.20	0.02	10.42	QP
4	0.200	35.34	-18.28	53.62	24.90	0.02	10.42	Average
5	0.242	44.33	-17.71	62.04	33.90	0.04	10.39	QP
6	0.242	30.03	-22.01	52.04	19.60	0.04	10.39	Average
7	0.272	37.02	-24.05	61.07	26.60	0.05	10.37	QP
8	0.272	22.62	-28.45	51.07	12.20	0.05	10.37	Average
9	0.489	35.29	-20.90	56.19	25.10	-0.03	10.22	QP
10	0.489	25.49	-20.70	46.19	15.30	-0.03	10.22	Average
11	18.524	34.61	-25.39	60.00	23.60	-0.29	11.30	QP
12	18.524	27.61	-22.39	50.00	16.60	-0.29	11.30	Average



Test Engineer :	Amos Wang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

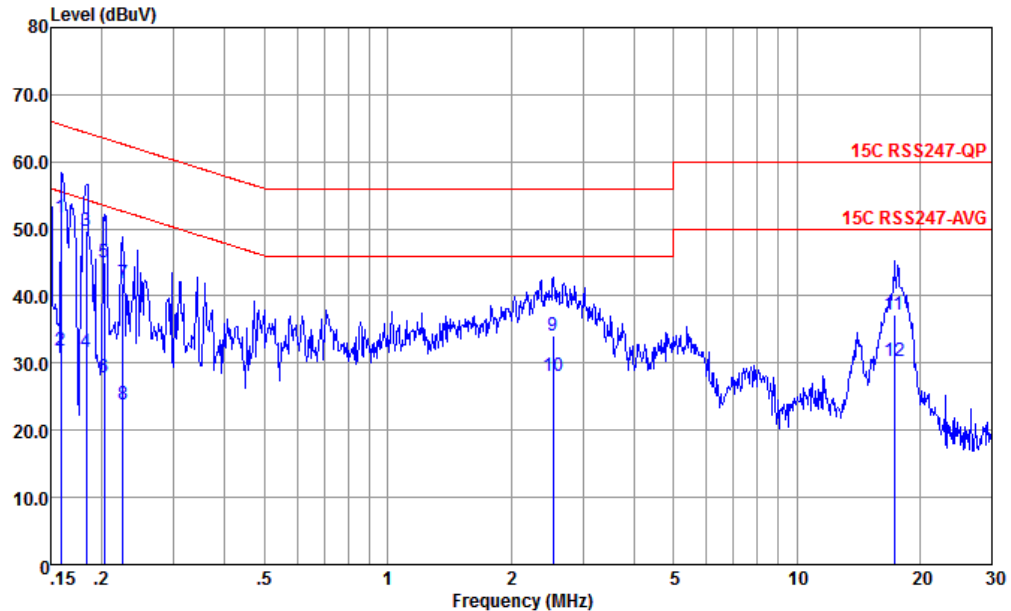

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.159	51.66	-13.86	65.52	41.20	0.03	10.43	QP
2	0.159	31.96	-23.56	55.52	21.50	0.03	10.43	Average
3	0.183	49.67	-14.66	64.33	39.21	0.04	10.42	QP
4	0.183	31.67	-22.66	54.33	21.21	0.04	10.42	Average
5	0.203	44.96	-18.53	63.49	34.49	0.05	10.42	QP
6	0.203	27.96	-25.53	53.49	17.49	0.05	10.42	Average
7	0.226	41.92	-20.69	62.61	31.50	0.02	10.40	QP
8	0.226	23.92	-28.69	52.61	13.50	0.02	10.40	Average
9	2.540	34.13	-21.87	56.00	24.20	-0.13	10.06	QP
10	2.540	28.13	-17.87	46.00	18.20	-0.13	10.06	Average
11	17.291	37.25	-22.75	60.00	26.20	-0.23	11.28	QP
12	17.291	30.35	-19.65	50.00	19.30	-0.23	11.28	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Carry Xu	Relative Humidity :	41~42 %
		Temperature :	22~23 °C

Channel	Power setting
WLAN 2.4G-11b-CH01	0
WLAN 2.4G-11b-CH06	0
WLAN 2.4G-11b-CH11	0
WLAN 2.4G-11g-CH01	13
WLAN 2.4G-11g-CH06	0
WLAN 2.4G-11g-CH10	10
WLAN 2.4G-11g-CH11	19
WLAN 2.4G-11n HT20-CH01	6
WLAN 2.4G-11n HT20-CH06	0
WLAN 2.4G-11n HT20-CH10	5
WLAN 2.4G-11n HT20-CH11	15



Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 7	2400-2483.5	1	802.11b	01	2412	1Mbps		
Mode 8	2400-2483.5	1	802.11b	06	2437	1Mbps		
Mode 9	2400-2483.5	1	802.11b	11	2462	1Mbps		
Mode 10	2400-2483.5	1	802.11g	01	2412	6Mbps		
Mode 11	2400-2483.5	1	802.11g	06	2437	6Mbps		
Mode 12	2400-2483.5	1	802.11g	11	2462	6Mbps		
Mode 13	2400-2483.5	1	802.11n HT20	01	2412	MCS0		
Mode 14	2400-2483.5	1	802.11n HT20	06	2437	MCS0		
Mode 15	2400-2483.5	1	802.11n HT20	11	2462	MCS0		
Mode 16	2400-2483.5	1	802.11g	10	2457	6Mbps		
Mode 17	2400-2483.5	1	802.11n HT20	10	2457	MCS0		







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
7	802.11b	01	2386.18	50.23	54.00	-3.77	H	AVERAGE	Pass	Band Edge
8	802.11b	06	4874.00	46.12	54.00	-7.88	V	AVERAGE	Pass	Harmonic
9	802.11b	11	2487.80	51.64	54.00	-2.36	H	AVERAGE	Pass	Band Edge
10	802.11g	01	2389.95	52.86	54.00	-1.14	H	AVERAGE	Pass	Band Edge
11	802.11g	06	7311.00	41.77	54.00	-12.23	H	AVERAGE	Pass	Harmonic
12	802.11g	11	2483.51	52.75	54.00	-1.25	H	AVERAGE	Pass	Band Edge
13	802.11n HT20	01	2389.95	52.68	54.00	-1.32	H	AVERAGE	Pass	Band Edge
14	802.11n HT20	06	7311.00	40.06	54.00	-13.94	V	AVERAGE	Pass	Harmonic
15	802.11n HT20	11	2483.51	52.77	54.00	-1.23	H	AVERAGE	Pass	Band Edge
16	802.11g	10	2483.51	53.00	54.00	-1.00	H	AVERAGE	Pass	Band Edge
17	802.11n HT20	10	2483.51	52.64	54.00	-1.36	H	AVERAGE	Pass	Band Edge

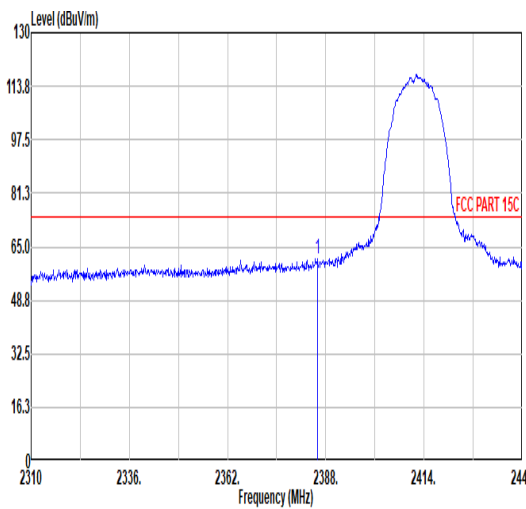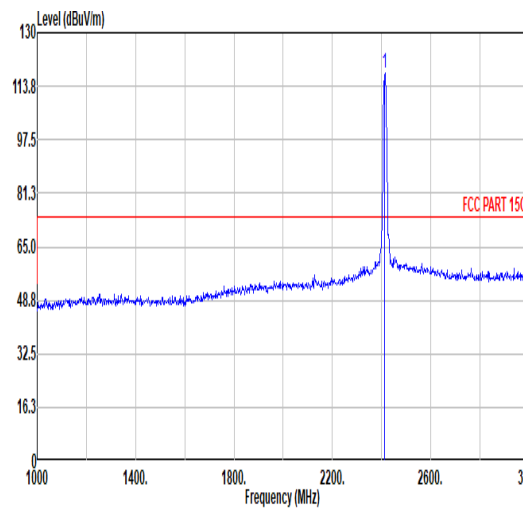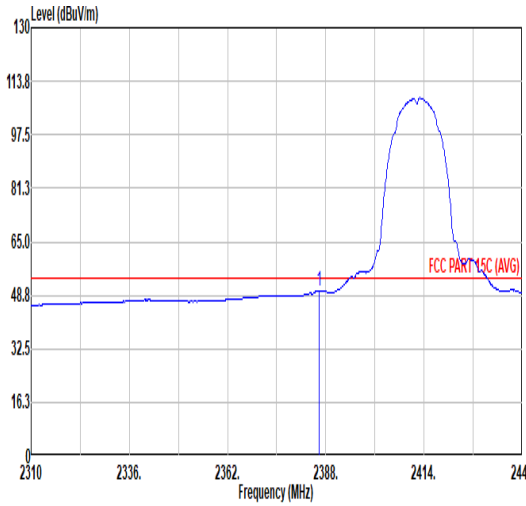
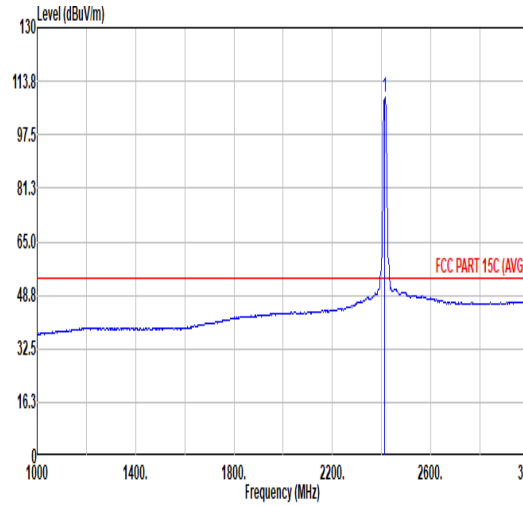


Mode	7																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																														
ANT	1																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.79</td><td>61.48</td><td>74.00</td><td>-12.52</td><td>47.29</td><td>31.97</td><td>7.11</td><td>30.89</td><td>6.00</td><td>131</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.79	61.48	74.00	-12.52	47.29	31.97	7.11	30.89	6.00	131	360	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>117.63</td><td>-----</td><td>-----</td><td>103.29</td><td>32.02</td><td>7.16</td><td>30.84</td><td>6.00</td><td>131</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	117.63	-----	-----	103.29	32.02	7.16	30.84	6.00	131	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2385.79	61.48	74.00	-12.52	47.29	31.97	7.11	30.89	6.00	131	360	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2412.00	117.63	-----	-----	103.29	32.02	7.16	30.84	6.00	131	360	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.18</td><td>50.23</td><td>54.00</td><td>-3.77</td><td>36.04</td><td>31.97</td><td>7.11</td><td>30.89</td><td>6.00</td><td>131</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.18	50.23	54.00	-3.77	36.04	31.97	7.11	30.89	6.00	131	360	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>108.75</td><td>-----</td><td>-----</td><td>94.41</td><td>32.02</td><td>7.16</td><td>30.84</td><td>6.00</td><td>131</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	108.75	-----	-----	94.41	32.02	7.16	30.84	6.00	131	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2386.18	50.23	54.00	-3.77	36.04	31.97	7.11	30.89	6.00	131	360	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2412.00	108.75	-----	-----	94.41	32.02	7.16	30.84	6.00	131	360	AVERAGE																																																																																																			

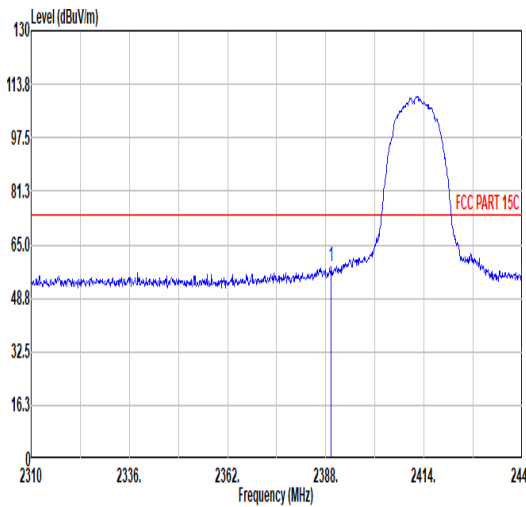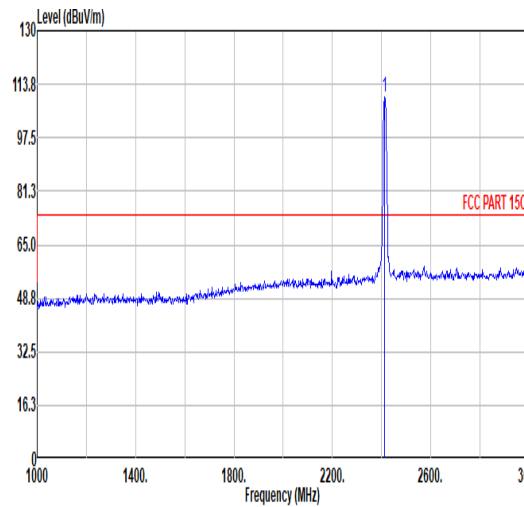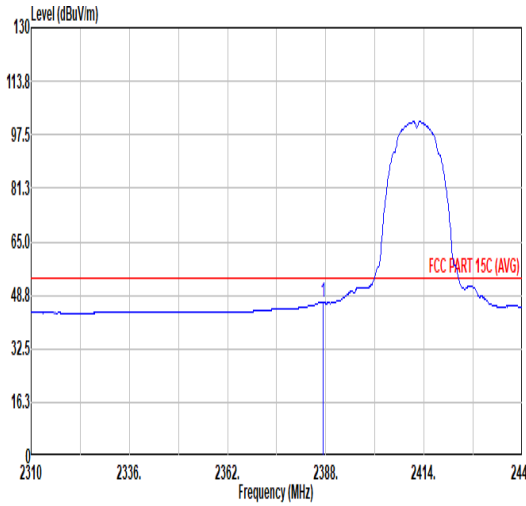
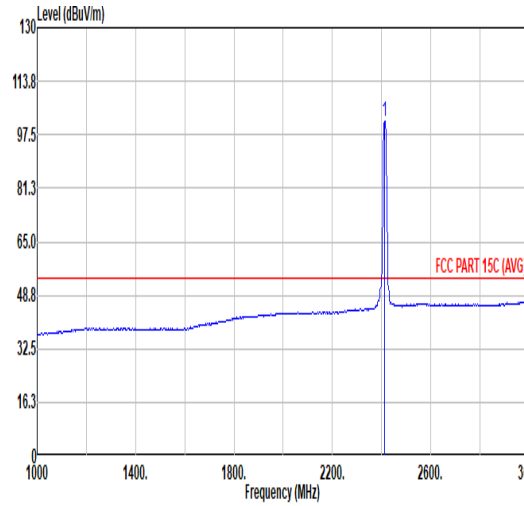


Mode	7																																																																																							
	Band Edge																																																																																							
	2400-2483.5_802.11b_CH01_2412MHz																																																																																							
ANT	1																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.43</td><td>58.31</td><td>74.00</td><td>-15.69</td><td>44.11</td><td>31.98</td><td>7.11</td><td>30.89</td><td>6.00</td><td>372</td><td>19 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	58.31	74.00	-15.69	44.11	31.98	7.11	30.89	6.00	372	19 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>109.70</td><td>-----</td><td>-----</td><td>95.38</td><td>32.02</td><td>7.15</td><td>30.85</td><td>6.00</td><td>372</td><td>19 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	109.70	-----	-----	95.38	32.02	7.15	30.85	6.00	372	19 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2389.43	58.31	74.00	-15.69	44.11	31.98	7.11	30.89	6.00	372	19 PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2412.00	109.70	-----	-----	95.38	32.02	7.15	30.85	6.00	372	19 PEAK																																																																													
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.35</td><td>46.50</td><td>54.00</td><td>-7.50</td><td>32.31</td><td>31.97</td><td>7.11</td><td>30.89</td><td>6.00</td><td>372</td><td>19 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.35	46.50	54.00	-7.50	32.31	31.97	7.11	30.89	6.00	372	19 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>101.58</td><td>-----</td><td>-----</td><td>87.24</td><td>32.02</td><td>7.16</td><td>30.84</td><td>6.00</td><td>372</td><td>19 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.58	-----	-----	87.24	32.02	7.16	30.84	6.00	372	19 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2387.35	46.50	54.00	-7.50	32.31	31.97	7.11	30.89	6.00	372	19 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2412.00	101.58	-----	-----	87.24	32.02	7.16	30.84	6.00	372	19 AVERAGE																																																																													



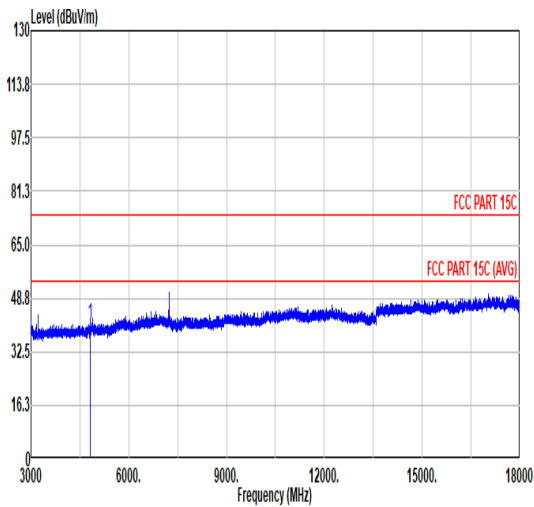
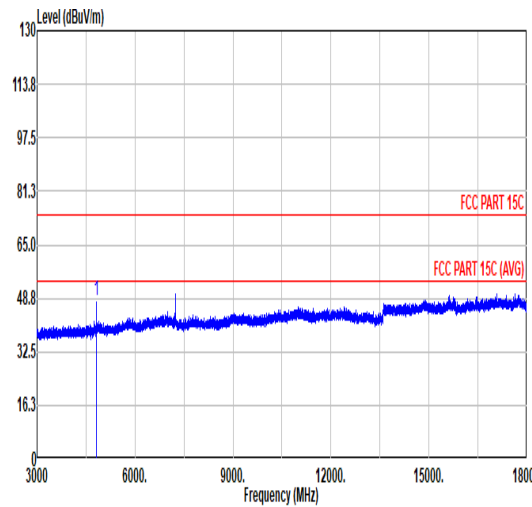


Mode	7																																																																																																			
	Harmonic																																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>41.39</td><td>74.00</td><td>-32.61</td><td>62.40</td><td>34.10</td><td>10.32</td><td>65.43</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	41.39	74.00	-32.61	62.40	34.10	10.32	65.43	0.00	300	0	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>47.90</td><td>74.00</td><td>-26.10</td><td>68.91</td><td>34.10</td><td>10.32</td><td>65.43</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	47.90	74.00	-26.10	68.91	34.10	10.32	65.43	0.00	100	0	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	4824.00	41.39	74.00	-32.61	62.40	34.10	10.32	65.43	0.00	300	0	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	4824.00	47.90	74.00	-26.10	68.91	34.10	10.32	65.43	0.00	100	0	PEAK																																																																																								



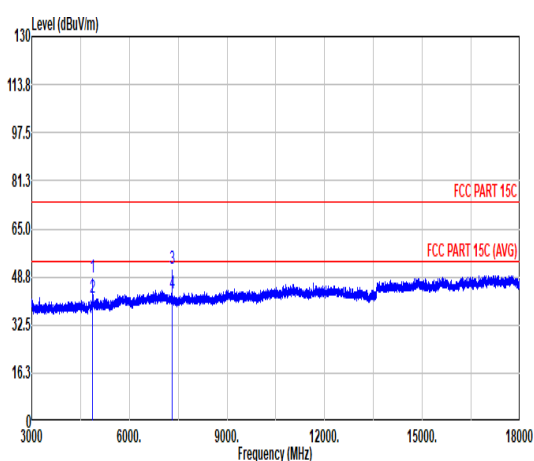
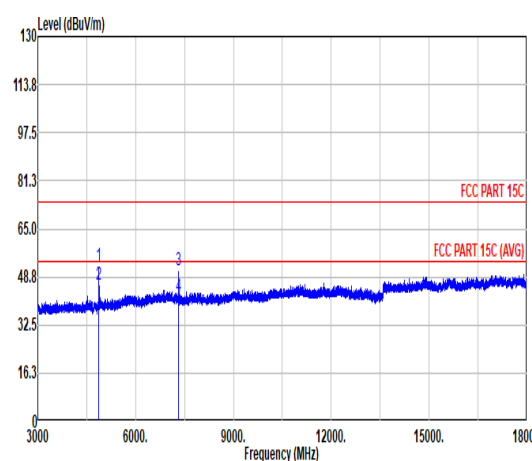


Mode	8																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																	
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																																																	
ANT	1																																																																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																																																																											
Peak Avg																																																																																																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>48.57</td><td>74.00</td><td>-25.43</td><td>69.53</td><td>34.10</td><td>10.38</td><td>65.44</td><td>0.00</td><td>298</td><td>331</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>41.00</td><td>54.00</td><td>-12.20</td><td>62.76</td><td>34.10</td><td>10.38</td><td>65.44</td><td>0.00</td><td>298</td><td>331</td><td>AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>51.68</td><td>74.00</td><td>-22.32</td><td>68.31</td><td>35.00</td><td>12.82</td><td>65.25</td><td>0.00</td><td>105</td><td>141</td><td>PEAK</td></tr><tr><td>4</td><td>7311.00</td><td>43.21</td><td>54.00</td><td>-10.79</td><td>59.84</td><td>35.00</td><td>12.82</td><td>65.25</td><td>0.00</td><td>105</td><td>141</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	48.57	74.00	-25.43	69.53	34.10	10.38	65.44	0.00	298	331	PEAK	2	4874.00	41.00	54.00	-12.20	62.76	34.10	10.38	65.44	0.00	298	331	AVERAGE	3	7311.00	51.68	74.00	-22.32	68.31	35.00	12.82	65.25	0.00	105	141	PEAK	4	7311.00	43.21	54.00	-10.79	59.84	35.00	12.82	65.25	0.00	105	141	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>52.61</td><td>74.00</td><td>-21.39</td><td>73.57</td><td>34.10</td><td>10.38</td><td>65.44</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>46.12</td><td>54.00</td><td>-7.88</td><td>67.08</td><td>34.10</td><td>10.38</td><td>65.44</td><td>0.00</td><td>100</td><td>0</td><td>AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>51.03</td><td>74.00</td><td>-22.97</td><td>67.66</td><td>35.00</td><td>12.82</td><td>65.25</td><td>0.00</td><td>310</td><td>47</td><td>PEAK</td></tr><tr><td>4</td><td>7311.00</td><td>42.40</td><td>54.00</td><td>-11.60</td><td>59.03</td><td>35.00</td><td>12.82</td><td>65.25</td><td>0.00</td><td>310</td><td>47</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	52.61	74.00	-21.39	73.57	34.10	10.38	65.44	0.00	100	0	PEAK	2	4874.00	46.12	54.00	-7.88	67.08	34.10	10.38	65.44	0.00	100	0	AVERAGE	3	7311.00	51.03	74.00	-22.97	67.66	35.00	12.82	65.25	0.00	310	47	PEAK	4	7311.00	42.40	54.00	-11.60	59.03	35.00	12.82	65.25	0.00	310	47	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																							
1	4874.00	48.57	74.00	-25.43	69.53	34.10	10.38	65.44	0.00	298	331	PEAK																																																																																																																																																																						
2	4874.00	41.00	54.00	-12.20	62.76	34.10	10.38	65.44	0.00	298	331	AVERAGE																																																																																																																																																																						
3	7311.00	51.68	74.00	-22.32	68.31	35.00	12.82	65.25	0.00	105	141	PEAK																																																																																																																																																																						
4	7311.00	43.21	54.00	-10.79	59.84	35.00	12.82	65.25	0.00	105	141	AVERAGE																																																																																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																								
1	4874.00	52.61	74.00	-21.39	73.57	34.10	10.38	65.44	0.00	100	0	PEAK																																																																																																																																																																						
2	4874.00	46.12	54.00	-7.88	67.08	34.10	10.38	65.44	0.00	100	0	AVERAGE																																																																																																																																																																						
3	7311.00	51.03	74.00	-22.97	67.66	35.00	12.82	65.25	0.00	310	47	PEAK																																																																																																																																																																						
4	7311.00	42.40	54.00	-11.60	59.03	35.00	12.82	65.25	0.00	310	47	AVERAGE																																																																																																																																																																						

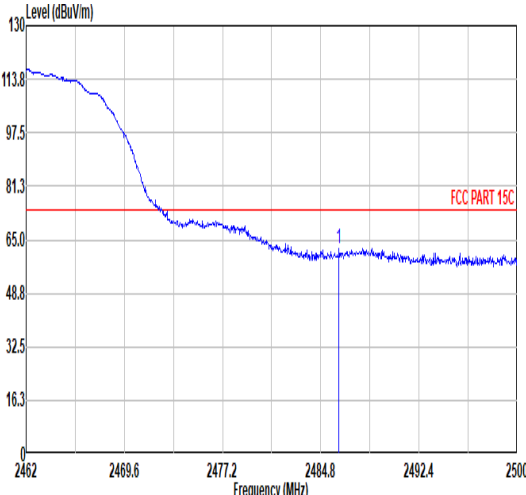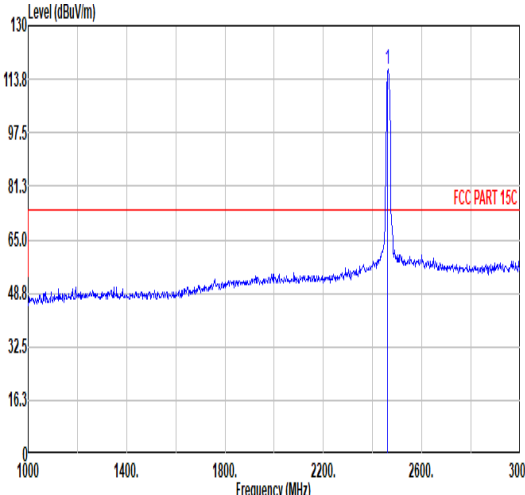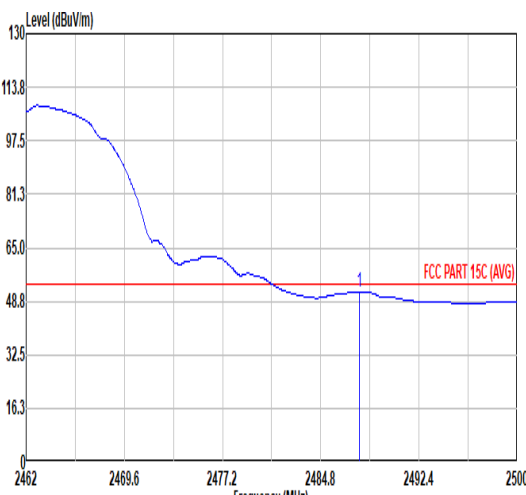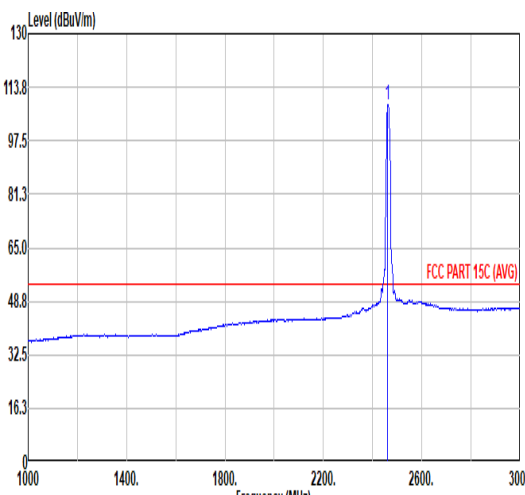

Mode	9																																																																																															
	Band Edge																																																																																															
	2400-2483.5_802.11b_CH11_2462MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal						Fundamental																																																																																									
Peak																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.21</td><td>62.29</td><td>74.00</td><td>-11.71</td><td>47.51</td><td>32.13</td><td>7.29</td><td>30.64</td><td>6.00</td><td>147</td><td>0 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.21	62.29	74.00	-11.71	47.51	32.13	7.29	30.64	6.00	147	0 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>116.72</td><td>-----</td><td>-----</td><td>102.07</td><td>32.10</td><td>7.25</td><td>30.70</td><td>6.00</td><td>147</td><td>0 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	116.72	-----	-----	102.07	32.10	7.25	30.70	6.00	147
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2486.21	62.29	74.00	-11.71	47.51	32.13	7.29	30.64	6.00	147	0 PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2462.00	116.72	-----	-----	102.07	32.10	7.25	30.70	6.00	147	0 PEAK																																																																																					
Avg																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.00</td><td>51.64</td><td>54.00</td><td>-2.36</td><td>36.84</td><td>32.13</td><td>7.30</td><td>30.63</td><td>6.00</td><td>147</td><td>0 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.00	51.64	54.00	-2.36	36.84	32.13	7.30	30.63	6.00	147	0 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>108.41</td><td>-----</td><td>-----</td><td>93.76</td><td>32.10</td><td>7.25</td><td>30.70</td><td>6.00</td><td>147</td><td>0 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	108.41	-----	-----	93.76	32.10	7.25	30.70	6.00	147
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2487.00	51.64	54.00	-2.36	36.84	32.13	7.30	30.63	6.00	147	0 AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2462.00	108.41	-----	-----	93.76	32.10	7.25	30.70	6.00	147	0 AVERAGE																																																																																					

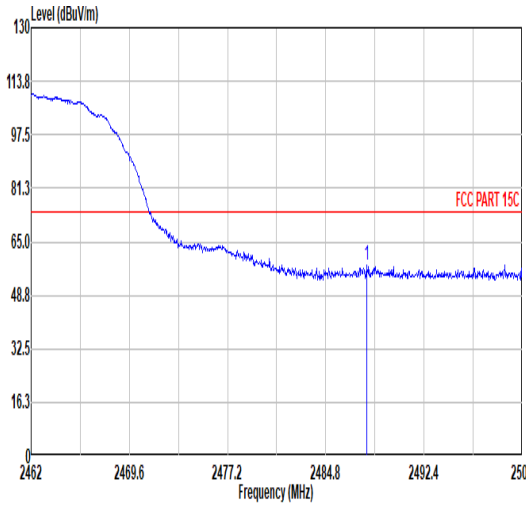
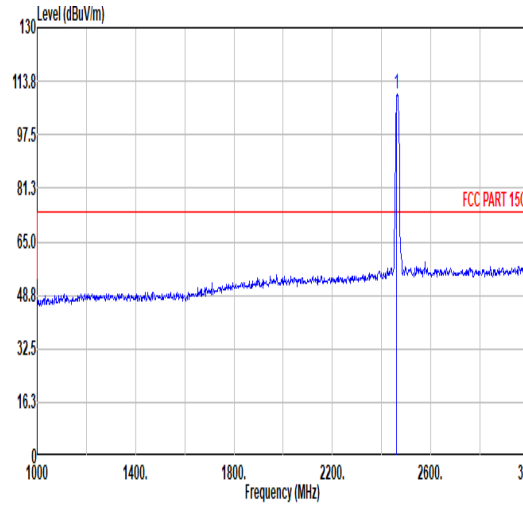
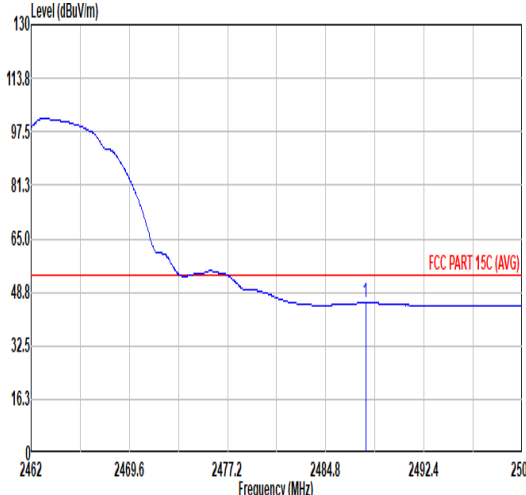
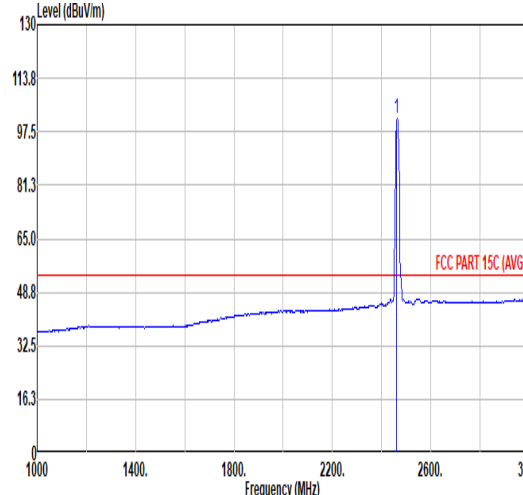


Mode	9																																																						
	Band Edge																																																						
	2400-2483.5_802.11b_CH11_2462MHz																																																						
ANT	1																																																						
Pol.	Vertical						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.95</td><td>57.84</td><td>74.00</td><td>-16.16</td><td>43.04</td><td>32.13</td><td>7.30</td><td>30.63</td><td>6.00</td><td>100</td><td>46</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.95	57.84	74.00	-16.16	43.04	32.13	7.30	30.63	6.00	100	46
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2487.95	57.84	74.00	-16.16	43.04	32.13	7.30	30.63	6.00	100	46	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>110.01</td><td>-----</td><td>-----</td><td>95.36</td><td>32.10</td><td>7.25</td><td>30.70</td><td>6.00</td><td>100</td><td>46</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	110.01	-----	-----	95.36	32.10	7.25	30.70	6.00	100	46
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	110.01	-----	-----	95.36	32.10	7.25	30.70	6.00	100	46	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.88</td><td>45.57</td><td>74.00</td><td>-8.43</td><td>30.77</td><td>32.13</td><td>7.30</td><td>30.63</td><td>6.00</td><td>100</td><td>46</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.88	45.57	74.00	-8.43	30.77	32.13	7.30	30.63	6.00	100	46
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2487.88	45.57	74.00	-8.43	30.77	32.13	7.30	30.63	6.00	100	46	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>101.70</td><td>-----</td><td>-----</td><td>87.05</td><td>32.10</td><td>7.25</td><td>30.70</td><td>6.00</td><td>100</td><td>46</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.70	-----	-----	87.05	32.10	7.25	30.70	6.00	100	46
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	101.70	-----	-----	87.05	32.10	7.25	30.70	6.00	100	46	AVERAGE																																											







Mode	9																																																																																																																																																																																
	Harmonic																																																																																																																																																																																
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																																																																
ANT	1																																																																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																																																																										
Peak Avg																																																																																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>51.08</td><td>74.00</td><td>-22.92</td><td>71.97</td><td>34.10</td><td>10.45</td><td>65.44</td><td>0.00</td><td>372</td><td>335</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>46.42</td><td>54.00</td><td>-7.58</td><td>67.31</td><td>34.10</td><td>10.45</td><td>65.44</td><td>0.00</td><td>372</td><td>335</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>52.33</td><td>74.00</td><td>-21.67</td><td>68.98</td><td>35.80</td><td>12.84</td><td>65.29</td><td>0.00</td><td>109</td><td>137</td><td>PEAK</td></tr><tr><td>4</td><td>7386.00</td><td>43.86</td><td>54.00</td><td>-10.14</td><td>60.51</td><td>35.80</td><td>12.84</td><td>65.29</td><td>0.00</td><td>109</td><td>137</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	51.08	74.00	-22.92	71.97	34.10	10.45	65.44	0.00	372	335	PEAK	2	4924.00	46.42	54.00	-7.58	67.31	34.10	10.45	65.44	0.00	372	335	AVERAGE	3	7386.00	52.33	74.00	-21.67	68.98	35.80	12.84	65.29	0.00	109	137	PEAK	4	7386.00	43.86	54.00	-10.14	60.51	35.80	12.84	65.29	0.00	109	137	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>52.11</td><td>74.00</td><td>-21.89</td><td>73.00</td><td>34.10</td><td>10.45</td><td>65.44</td><td>0.00</td><td>216</td><td>14</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>47.51</td><td>54.00</td><td>-6.49</td><td>68.40</td><td>34.10</td><td>10.45</td><td>65.44</td><td>0.00</td><td>216</td><td>14</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>51.39</td><td>74.00</td><td>-22.61</td><td>68.04</td><td>35.80</td><td>12.84</td><td>65.29</td><td>0.00</td><td>391</td><td>33</td><td>PEAK</td></tr><tr><td>4</td><td>7386.00</td><td>43.00</td><td>54.00</td><td>-11.00</td><td>59.65</td><td>35.80</td><td>12.84</td><td>65.29</td><td>0.00</td><td>391</td><td>33</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	52.11	74.00	-21.89	73.00	34.10	10.45	65.44	0.00	216	14	PEAK	2	4924.00	47.51	54.00	-6.49	68.40	34.10	10.45	65.44	0.00	216	14	AVERAGE	3	7386.00	51.39	74.00	-22.61	68.04	35.80	12.84	65.29	0.00	391	33	PEAK	4	7386.00	43.00	54.00	-11.00	59.65	35.80	12.84	65.29	0.00	391	33
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																							
1	4924.00	51.08	74.00	-22.92	71.97	34.10	10.45	65.44	0.00	372	335	PEAK																																																																																																																																																																					
2	4924.00	46.42	54.00	-7.58	67.31	34.10	10.45	65.44	0.00	372	335	AVERAGE																																																																																																																																																																					
3	7386.00	52.33	74.00	-21.67	68.98	35.80	12.84	65.29	0.00	109	137	PEAK																																																																																																																																																																					
4	7386.00	43.86	54.00	-10.14	60.51	35.80	12.84	65.29	0.00	109	137	AVERAGE																																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																							
1	4924.00	52.11	74.00	-21.89	73.00	34.10	10.45	65.44	0.00	216	14	PEAK																																																																																																																																																																					
2	4924.00	47.51	54.00	-6.49	68.40	34.10	10.45	65.44	0.00	216	14	AVERAGE																																																																																																																																																																					
3	7386.00	51.39	74.00	-22.61	68.04	35.80	12.84	65.29	0.00	391	33	PEAK																																																																																																																																																																					
4	7386.00	43.00	54.00	-11.00	59.65	35.80	12.84	65.29	0.00	391	33	AVERAGE																																																																																																																																																																					

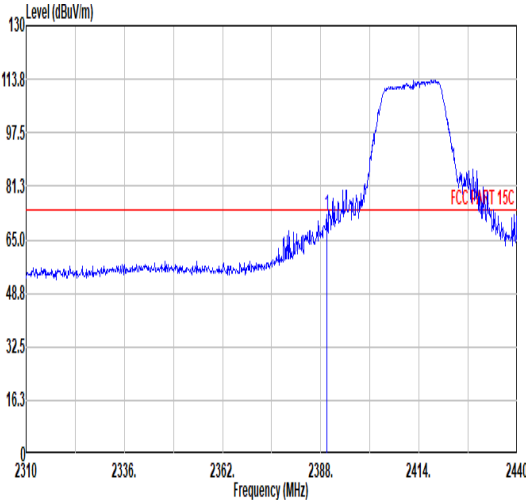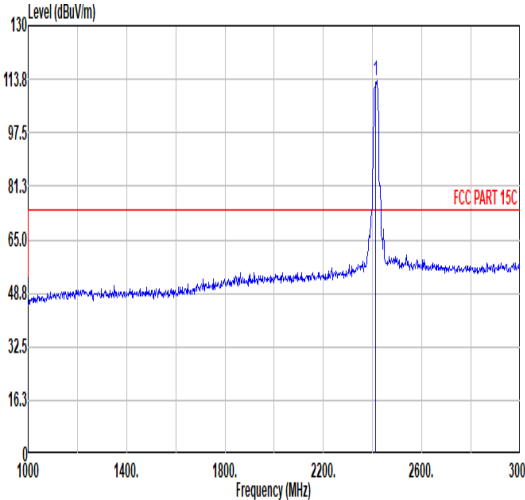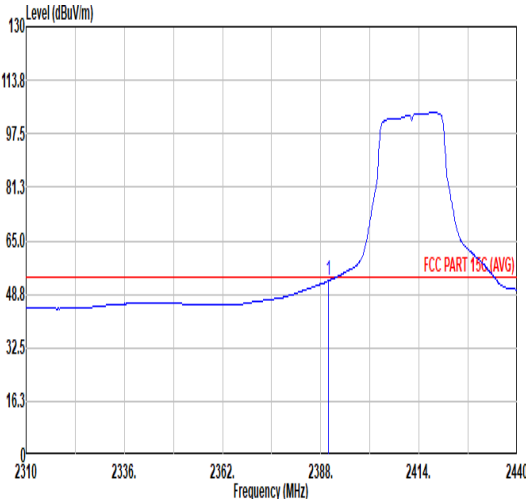
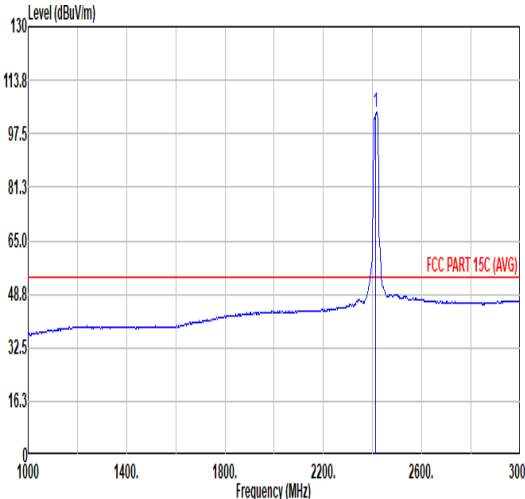


Mode	10																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11g_CH01_2412MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2389.69</td><td>72.40</td><td>74.00</td><td>-1.60</td><td>58.20</td><td>31.98</td><td>7.11</td><td>30.89</td><td>6.00 100 359 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	2389.69	72.40	74.00	-1.60	58.20	31.98	7.11	30.89	6.00 100 359 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>113.28</td><td>-----</td><td>-----</td><td>98.92</td><td>32.03</td><td>7.16</td><td>30.83</td><td>6.00 100 359 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	2412.00	113.28	-----	-----	98.92	32.03	7.16	30.83	6.00 100 359 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1	2389.69	72.40	74.00	-1.60	58.20	31.98	7.11	30.89	6.00 100 359 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1	2412.00	113.28	-----	-----	98.92	32.03	7.16	30.83	6.00 100 359 PEAK																																																																									
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>52.86</td><td>54.00</td><td>-1.14</td><td>38.66</td><td>31.98</td><td>7.11</td><td>30.89</td><td>6.00 100 359 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	2389.95	52.86	54.00	-1.14	38.66	31.98	7.11	30.89	6.00 100 359 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>104.01</td><td>-----</td><td>-----</td><td>89.65</td><td>32.03</td><td>7.16</td><td>30.83</td><td>6.00 100 359 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	2412.00	104.01	-----	-----	89.65	32.03	7.16	30.83	6.00 100 359 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1	2389.95	52.86	54.00	-1.14	38.66	31.98	7.11	30.89	6.00 100 359 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1	2412.00	104.01	-----	-----	89.65	32.03	7.16	30.83	6.00 100 359 AVERAGE																																																																									

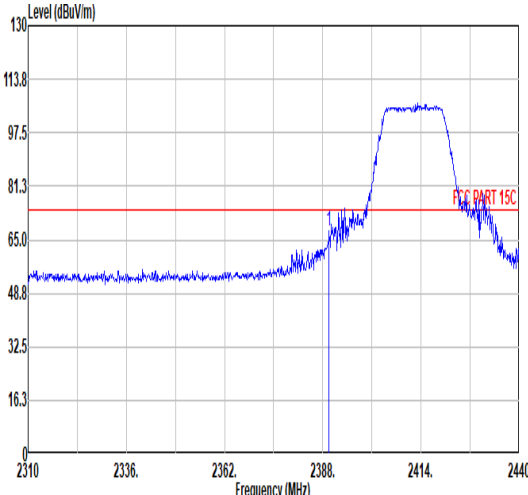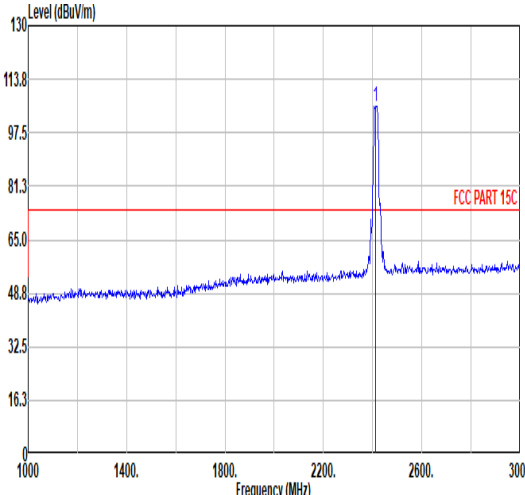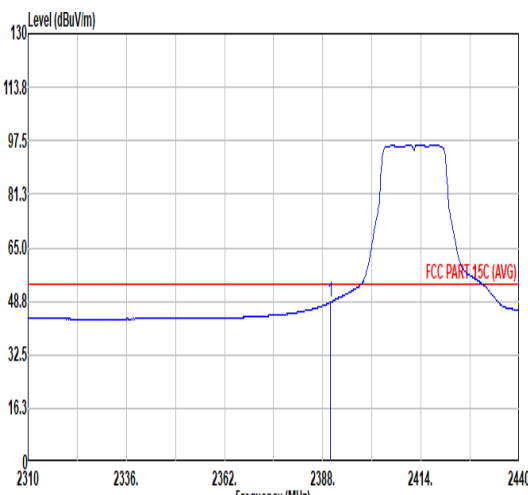
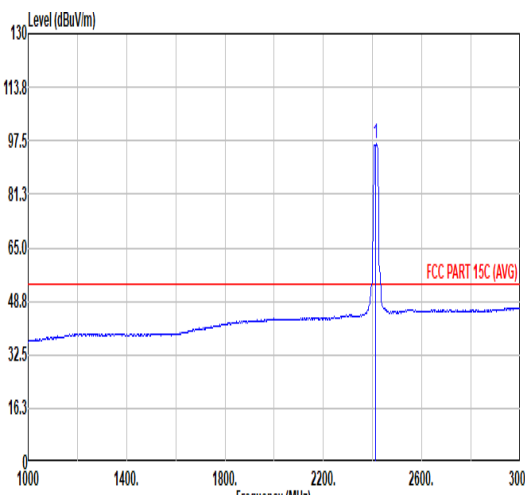


Mode	10																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>67.76</td><td>74.00</td><td>-6.24</td><td>53.56</td><td>31.98</td><td>7.11</td><td>30.89</td><td>6.00</td><td>377</td><td>29</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	67.76	74.00	-6.24	53.56	31.98	7.11	30.89	6.00	377	29	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>105.50</td><td>-----</td><td>-----</td><td>91.16</td><td>32.02</td><td>7.16</td><td>30.84</td><td>6.00</td><td>377</td><td>29</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.50	-----	-----	91.16	32.02	7.16	30.84	6.00	377	29
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.69	67.76	74.00	-6.24	53.56	31.98	7.11	30.89	6.00	377	29	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	105.50	-----	-----	91.16	32.02	7.16	30.84	6.00	377	29	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>48.43</td><td>54.00</td><td>-5.57</td><td>34.23</td><td>31.98</td><td>7.11</td><td>30.89</td><td>6.00</td><td>377</td><td>29</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	48.43	54.00	-5.57	34.23	31.98	7.11	30.89	6.00	377	29	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>96.43</td><td>-----</td><td>-----</td><td>82.09</td><td>32.02</td><td>7.16</td><td>30.84</td><td>6.00</td><td>377</td><td>29</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	96.43	-----	-----	82.09	32.02	7.16	30.84	6.00	377	29
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	48.43	54.00	-5.57	34.23	31.98	7.11	30.89	6.00	377	29	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	96.43	-----	-----	82.09	32.02	7.16	30.84	6.00	377	29	AVERAGE																																																																																							



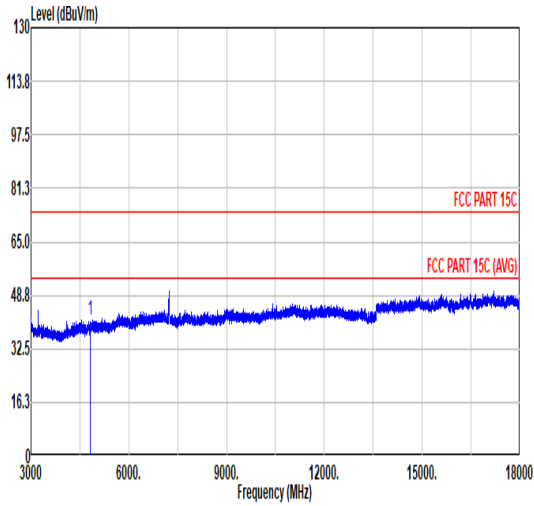
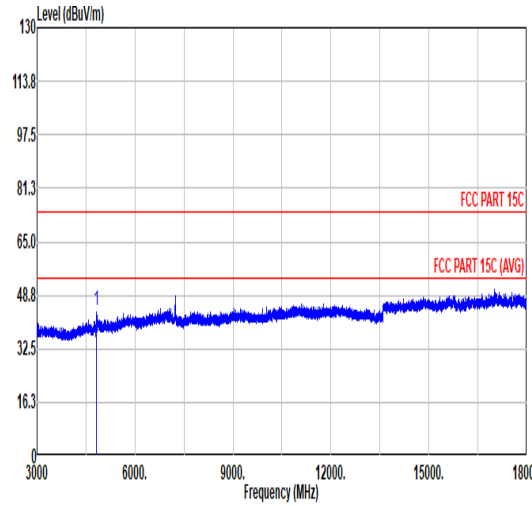


Mode	10																																																																																																			
	Harmonic																																																																																																			
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>41.09</td><td>74.00</td><td>-32.91</td><td>62.10</td><td>34.10</td><td>10.32</td><td>65.43</td><td>0.00</td><td>100</td><td>0 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	41.09	74.00	-32.91	62.10	34.10	10.32	65.43	0.00	100	0 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>43.99</td><td>74.00</td><td>-30.01</td><td>65.00</td><td>34.10</td><td>10.32</td><td>65.43</td><td>0.00</td><td>300</td><td>0 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	43.99	74.00	-30.01	65.00	34.10	10.32	65.43	0.00	300	0 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	4824.00	41.09	74.00	-32.91	62.10	34.10	10.32	65.43	0.00	100	0 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	4824.00	43.99	74.00	-30.01	65.00	34.10	10.32	65.43	0.00	300	0 PEAK																																																																																									



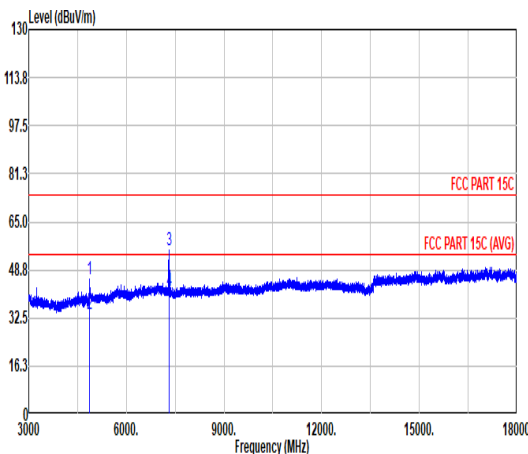
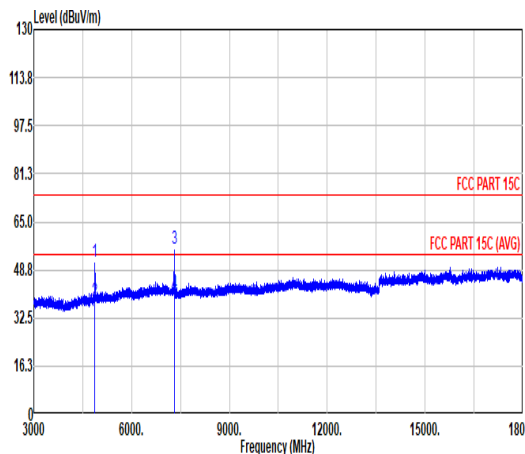


Mode	11																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal																																																																																																															
Peak Avg																																																																																																																
	<table><tr><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">Aux</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th></tr><tr><td>1</td><td>4874.00</td><td>45.72</td><td>74.00</td><td>-28.28</td><td>66.68</td><td>34.10</td><td>10.38</td><td>65.44</td><td>0.00</td><td>390</td><td>333</td><td>PEAK</td><td></td></tr><tr><td>2</td><td>4874.00</td><td>34.08</td><td>54.00</td><td>-19.92</td><td>55.04</td><td>34.10</td><td>10.38</td><td>65.44</td><td>0.00</td><td>390</td><td>333</td><td>AVERAGE</td><td></td></tr><tr><td>3</td><td>7311.00</td><td>55.57</td><td>74.00</td><td>-18.43</td><td>72.20</td><td>35.80</td><td>12.82</td><td>65.25</td><td>0.00</td><td>101</td><td>124</td><td>PEAK</td><td></td></tr><tr><td>4</td><td>7311.00</td><td>41.77</td><td>54.00</td><td>-12.23</td><td>58.40</td><td>35.80</td><td>12.82</td><td>65.25</td><td>0.00</td><td>101</td><td>124</td><td>AVERAGE</td><td></td></tr></table>														Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg				1	4874.00	45.72	74.00	-28.28	66.68	34.10	10.38	65.44	0.00	390	333	PEAK		2	4874.00	34.08	54.00	-19.92	55.04	34.10	10.38	65.44	0.00	390	333	AVERAGE		3	7311.00	55.57	74.00	-18.43	72.20	35.80	12.82	65.25	0.00	101	124	PEAK		4	7311.00	41.77	54.00	-12.23	58.40	35.80	12.82	65.25	0.00	101	124	AVERAGE
Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	4874.00	45.72	74.00	-28.28	66.68	34.10	10.38	65.44	0.00	390	333	PEAK																																																																																																				
2	4874.00	34.08	54.00	-19.92	55.04	34.10	10.38	65.44	0.00	390	333	AVERAGE																																																																																																				
3	7311.00	55.57	74.00	-18.43	72.20	35.80	12.82	65.25	0.00	101	124	PEAK																																																																																																				
4	7311.00	41.77	54.00	-12.23	58.40	35.80	12.82	65.25	0.00	101	124	AVERAGE																																																																																																				
Peak Avg																																																																																																																
	<table><tr><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">Aux</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th></tr><tr><td>1</td><td>4874.00</td><td>51.42</td><td>74.00</td><td>-22.58</td><td>72.38</td><td>34.10</td><td>10.38</td><td>65.44</td><td>0.00</td><td>246</td><td>14</td><td>PEAK</td><td></td></tr><tr><td>2</td><td>4874.00</td><td>38.24</td><td>54.00</td><td>-15.76</td><td>59.20</td><td>34.10</td><td>10.38</td><td>65.44</td><td>0.00</td><td>246</td><td>14</td><td>AVERAGE</td><td></td></tr><tr><td>3</td><td>7311.00</td><td>56.00</td><td>74.00</td><td>-18.00</td><td>72.63</td><td>35.80</td><td>12.82</td><td>65.25</td><td>0.00</td><td>370</td><td>35</td><td>PEAK</td><td></td></tr><tr><td>4</td><td>7311.00</td><td>40.96</td><td>54.00</td><td>-13.04</td><td>57.59</td><td>35.80</td><td>12.82</td><td>65.25</td><td>0.00</td><td>370</td><td>35</td><td>AVERAGE</td><td></td></tr></table>														Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg				1	4874.00	51.42	74.00	-22.58	72.38	34.10	10.38	65.44	0.00	246	14	PEAK		2	4874.00	38.24	54.00	-15.76	59.20	34.10	10.38	65.44	0.00	246	14	AVERAGE		3	7311.00	56.00	74.00	-18.00	72.63	35.80	12.82	65.25	0.00	370	35	PEAK		4	7311.00	40.96	54.00	-13.04	57.59	35.80	12.82	65.25	0.00	370	35	AVERAGE
Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	4874.00	51.42	74.00	-22.58	72.38	34.10	10.38	65.44	0.00	246	14	PEAK																																																																																																				
2	4874.00	38.24	54.00	-15.76	59.20	34.10	10.38	65.44	0.00	246	14	AVERAGE																																																																																																				
3	7311.00	56.00	74.00	-18.00	72.63	35.80	12.82	65.25	0.00	370	35	PEAK																																																																																																				
4	7311.00	40.96	54.00	-13.04	57.59	35.80	12.82	65.25	0.00	370	35	AVERAGE																																																																																																				

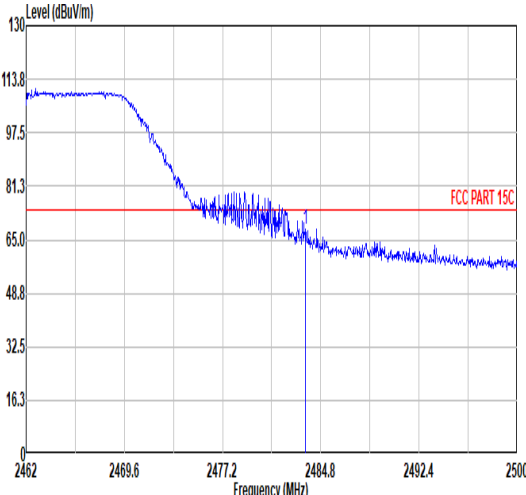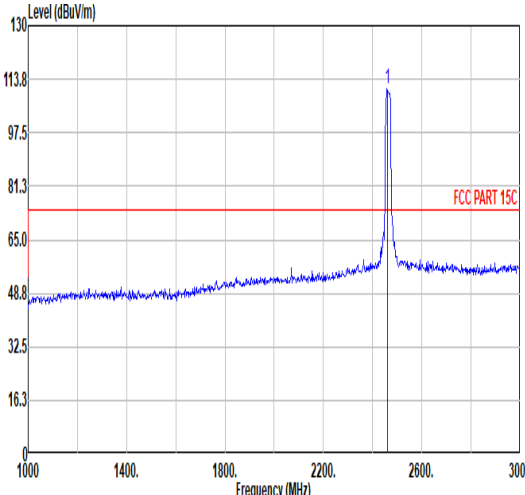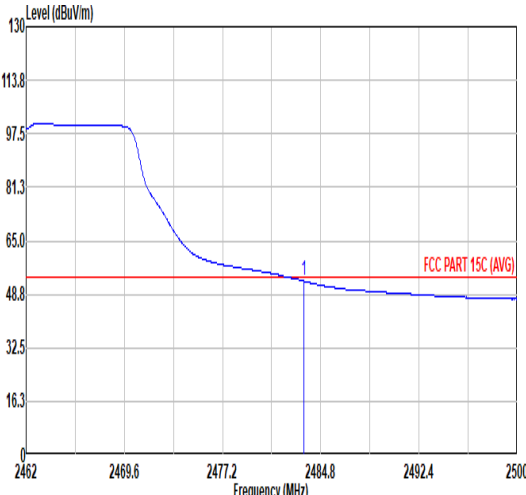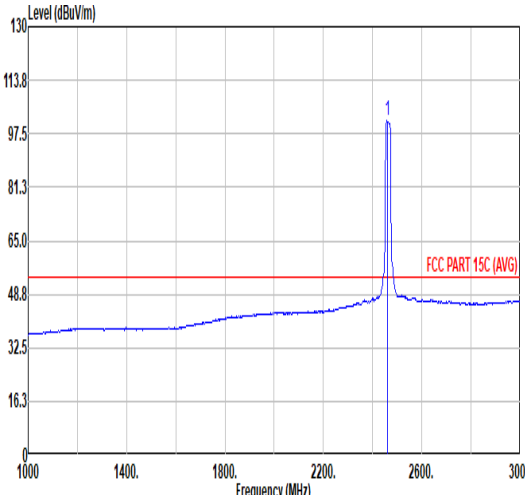

Mode	12																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>68.17</td><td>74.00</td><td>-5.83</td><td>53.40</td><td>32.13</td><td>7.29</td><td>30.65</td><td>6.00</td><td>147</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	68.17	74.00	-5.83	53.40	32.13	7.29	30.65	6.00	147	360	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>110.69</td><td>-----</td><td>-----</td><td>96.08</td><td>32.09</td><td>7.24</td><td>30.72</td><td>6.00</td><td>147</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	110.69	-----	-----	96.08	32.09	7.24	30.72	6.00	147	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.62	68.17	74.00	-5.83	53.40	32.13	7.29	30.65	6.00	147	360	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	110.69	-----	-----	96.08	32.09	7.24	30.72	6.00	147	360	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>52.75</td><td>54.00</td><td>-1.25</td><td>37.98</td><td>32.13</td><td>7.29</td><td>30.65</td><td>6.00</td><td>147</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	52.75	54.00	-1.25	37.98	32.13	7.29	30.65	6.00	147	360	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>101.57</td><td>-----</td><td>-----</td><td>86.97</td><td>32.08</td><td>7.24</td><td>30.72</td><td>6.00</td><td>147</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.57	-----	-----	86.97	32.08	7.24	30.72	6.00	147	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.51	52.75	54.00	-1.25	37.98	32.13	7.29	30.65	6.00	147	360	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	101.57	-----	-----	86.97	32.08	7.24	30.72	6.00	147	360	AVERAGE																																																																																							

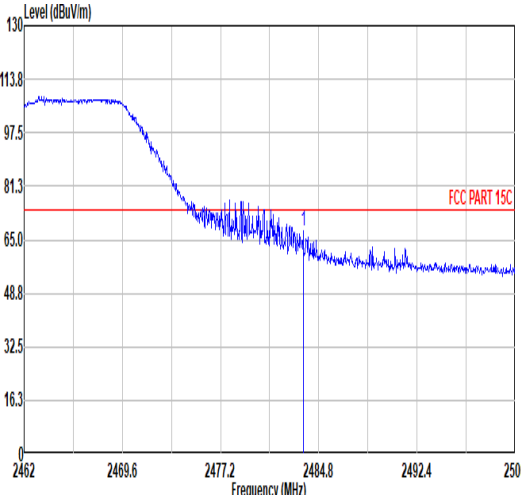
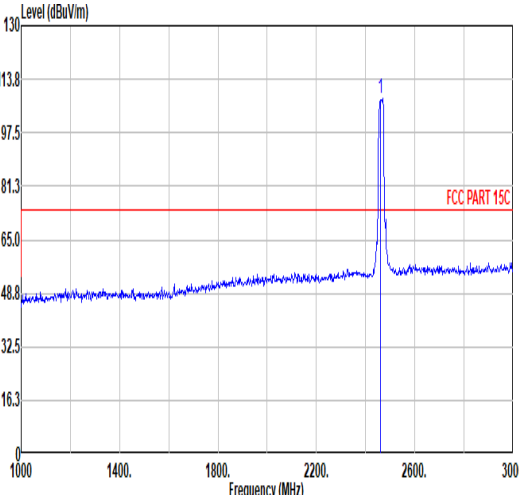
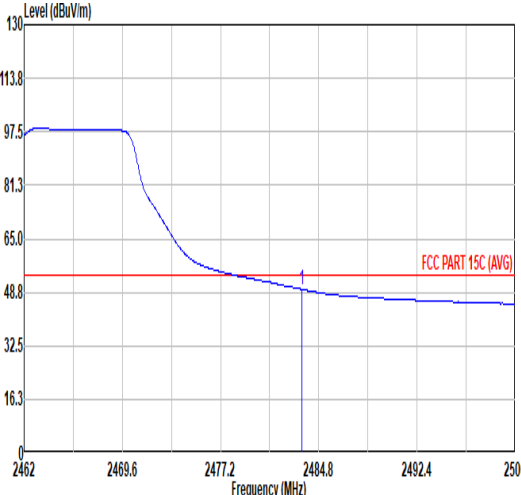
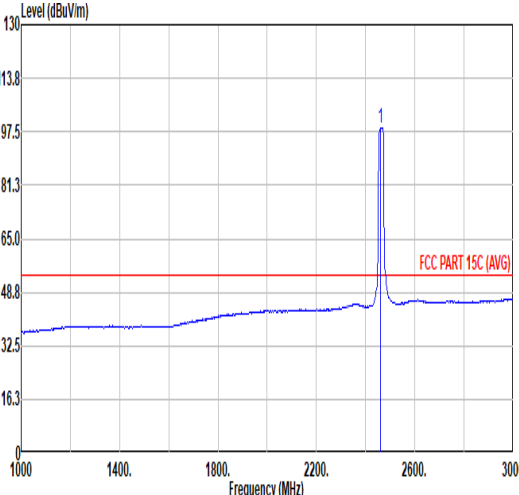


Mode	12																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.58</td><td>67.61</td><td>74.00</td><td>-6.39</td><td>52.84</td><td>32.13</td><td>7.29</td><td>30.65</td><td>6.00</td><td>398</td><td>66</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.58	67.61	74.00	-6.39	52.84	32.13	7.29	30.65	6.00	398	66	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>107.72</td><td>-----</td><td>-----</td><td>93.04</td><td>32.10</td><td>7.26</td><td>30.68</td><td>6.00</td><td>398</td><td>66</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	107.72	-----	-----	93.04	32.10	7.26	30.68	6.00	398	66
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.58	67.61	74.00	-6.39	52.84	32.13	7.29	30.65	6.00	398	66	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	107.72	-----	-----	93.04	32.10	7.26	30.68	6.00	398	66	PEAK																																																																																							
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>49.69</td><td>54.00</td><td>-4.31</td><td>34.92</td><td>32.13</td><td>7.29</td><td>30.65</td><td>6.00</td><td>398</td><td>66</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	49.69	54.00	-4.31	34.92	32.13	7.29	30.65	6.00	398	66	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>98.76</td><td>-----</td><td>-----</td><td>84.11</td><td>32.10</td><td>7.25</td><td>30.70</td><td>6.00</td><td>398</td><td>66</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.76	-----	-----	84.11	32.10	7.25	30.70	6.00	398	66
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.51	49.69	54.00	-4.31	34.92	32.13	7.29	30.65	6.00	398	66	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	98.76	-----	-----	84.11	32.10	7.25	30.70	6.00	398	66	AVERAGE																																																																																							







Mode	12																																																																																																																																																																				
	Harmonic																																																																																																																																																																				
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																																																				
ANT	1																																																																																																																																																																				
Pol.	Horizontal						Vertical																																																																																																																																																														
Peak Avg																																																																																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>42.46</td><td>74.00</td><td>-31.54</td><td>63.35</td><td>34.10</td><td>10.45</td><td>65.44</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>49.85</td><td>74.00</td><td>-24.15</td><td>66.50</td><td>35.00</td><td>12.84</td><td>65.29</td><td>0.00</td><td>106</td><td>141</td><td>PEAK</td></tr><tr><td>3</td><td>7386.00</td><td>35.24</td><td>54.00</td><td>-18.76</td><td>51.89</td><td>35.00</td><td>12.84</td><td>65.29</td><td>0.00</td><td>106</td><td>141</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	42.46	74.00	-31.54	63.35	34.10	10.45	65.44	0.00	100	0	PEAK	2	7386.00	49.85	74.00	-24.15	66.50	35.00	12.84	65.29	0.00	106	141	PEAK	3	7386.00	35.24	54.00	-18.76	51.89	35.00	12.84	65.29	0.00	106	141	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>45.36</td><td>74.00</td><td>-28.64</td><td>66.25</td><td>34.10</td><td>10.45</td><td>65.44</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>33.31</td><td>54.00</td><td>-20.69</td><td>54.20</td><td>34.10</td><td>10.45</td><td>65.44</td><td>0.00</td><td>300</td><td>0</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>44.77</td><td>74.00</td><td>-29.23</td><td>61.42</td><td>35.00</td><td>12.84</td><td>65.29</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr><tr><td>4</td><td>7386.00</td><td>31.74</td><td>54.00</td><td>-22.26</td><td>48.39</td><td>35.00</td><td>12.84</td><td>65.29</td><td>0.00</td><td>300</td><td>0</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	45.36	74.00	-28.64	66.25	34.10	10.45	65.44	0.00	300	0	PEAK	2	4924.00	33.31	54.00	-20.69	54.20	34.10	10.45	65.44	0.00	300	0	AVERAGE	3	7386.00	44.77	74.00	-29.23	61.42	35.00	12.84	65.29	0.00	300	0	PEAK	4	7386.00	31.74	54.00	-22.26	48.39	35.00	12.84	65.29	0.00	300	0	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																											
1	4924.00	42.46	74.00	-31.54	63.35	34.10	10.45	65.44	0.00	100	0	PEAK																																																																																																																																																									
2	7386.00	49.85	74.00	-24.15	66.50	35.00	12.84	65.29	0.00	106	141	PEAK																																																																																																																																																									
3	7386.00	35.24	54.00	-18.76	51.89	35.00	12.84	65.29	0.00	106	141	AVERAGE																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																											
1	4924.00	45.36	74.00	-28.64	66.25	34.10	10.45	65.44	0.00	300	0	PEAK																																																																																																																																																									
2	4924.00	33.31	54.00	-20.69	54.20	34.10	10.45	65.44	0.00	300	0	AVERAGE																																																																																																																																																									
3	7386.00	44.77	74.00	-29.23	61.42	35.00	12.84	65.29	0.00	300	0	PEAK																																																																																																																																																									
4	7386.00	31.74	54.00	-22.26	48.39	35.00	12.84	65.29	0.00	300	0	AVERAGE																																																																																																																																																									

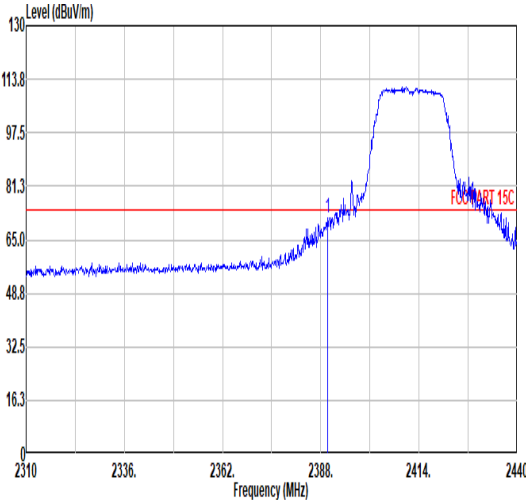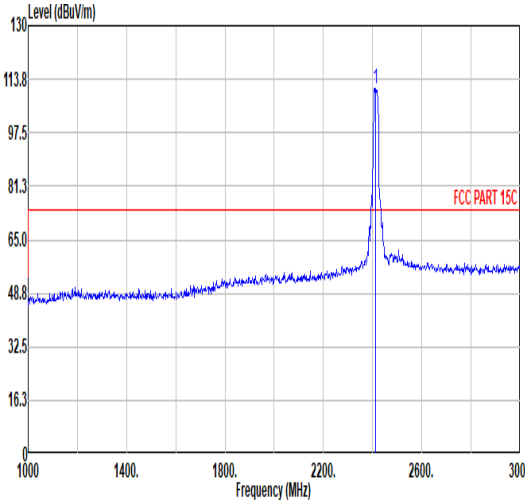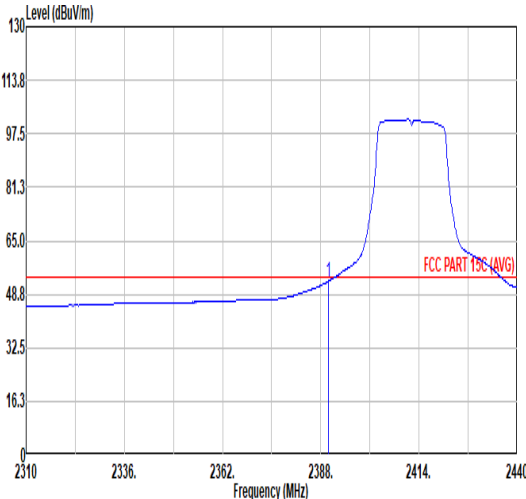
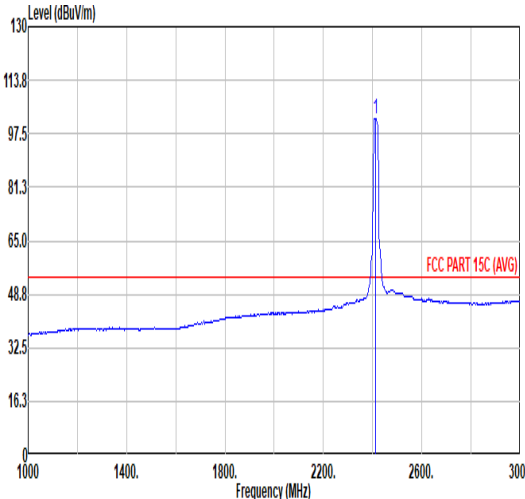


Mode	13																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																														
ANT	1																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>71.40</td><td>74.00</td><td>-2.60</td><td>57.20</td><td>31.98</td><td>7.11</td><td>30.89</td><td>6.00</td><td>123</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	71.40	74.00	-2.60	57.20	31.98	7.11	30.89	6.00	123	360	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>111.06</td><td>-----</td><td>-----</td><td>96.74</td><td>32.02</td><td>7.15</td><td>30.85</td><td>6.00</td><td>123</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	111.06	-----	-----	96.74	32.02	7.15	30.85	6.00	123	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2389.82	71.40	74.00	-2.60	57.20	31.98	7.11	30.89	6.00	123	360	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2412.00	111.06	-----	-----	96.74	32.02	7.15	30.85	6.00	123	360	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>52.68</td><td>54.00</td><td>-1.32</td><td>38.48</td><td>31.98</td><td>7.11</td><td>30.89</td><td>6.00</td><td>123</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	52.68	54.00	-1.32	38.48	31.98	7.11	30.89	6.00	123	360	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>102.03</td><td>-----</td><td>-----</td><td>87.71</td><td>32.02</td><td>7.15</td><td>30.85</td><td>6.00</td><td>123</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	102.03	-----	-----	87.71	32.02	7.15	30.85	6.00	123	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2389.95	52.68	54.00	-1.32	38.48	31.98	7.11	30.89	6.00	123	360	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2412.00	102.03	-----	-----	87.71	32.02	7.15	30.85	6.00	123	360	AVERAGE																																																																																																			

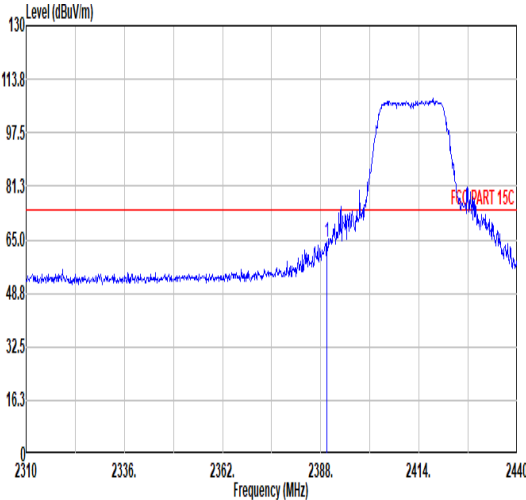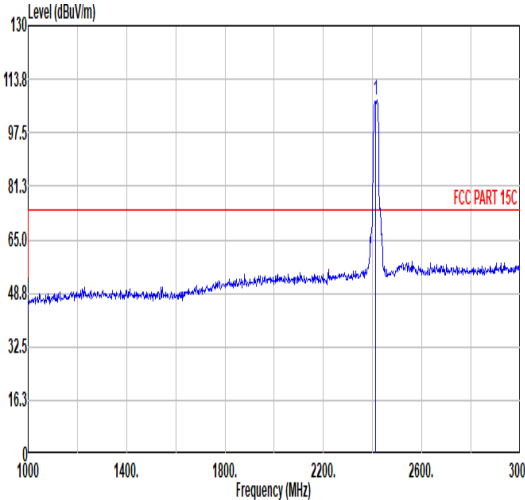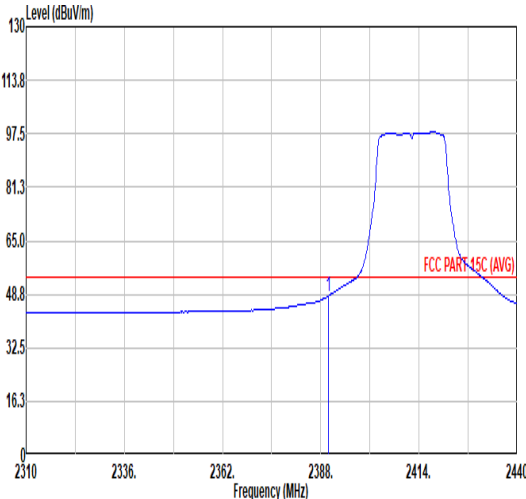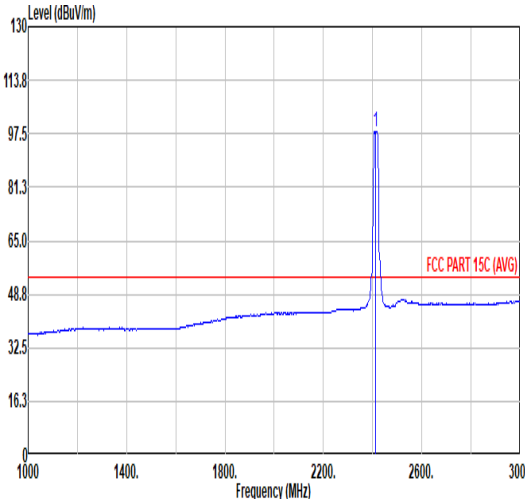

Mode	13																																																																																																												
	Band Edge																																																																																																												
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																												
ANT	1																																																																																																												
Pol.	Vertical						Fundamental																																																																																																						
Peak																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>64.35</td><td>74.00</td><td>-9.65</td><td>50.15</td><td>31.98</td><td>7.11</td><td>30.89</td><td>6.00</td><td>376</td><td>62 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	64.35	74.00	-9.65	50.15	31.98	7.11	30.89	6.00	376	62 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>107.21</td><td>-----</td><td>-----</td><td>92.83</td><td>32.03</td><td>7.17</td><td>30.82</td><td>6.00</td><td>376</td><td>62 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	107.21	-----	-----	92.83	32.03	7.17	30.82	6.00	376
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2389.69	64.35	74.00	-9.65	50.15	31.98	7.11	30.89	6.00	376	62 PEAK																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2412.00	107.21	-----	-----	92.83	32.03	7.17	30.82	6.00	376	62 PEAK																																																																																																		
Avg																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>48.14</td><td>54.00</td><td>-5.86</td><td>33.94</td><td>31.98</td><td>7.11</td><td>30.89</td><td>6.00</td><td>376</td><td>62 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	48.14	54.00	-5.86	33.94	31.98	7.11	30.89	6.00	376	62 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>98.20</td><td>-----</td><td>-----</td><td>83.84</td><td>32.03</td><td>7.16</td><td>30.83</td><td>6.00</td><td>376</td><td>62 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.20	-----	-----	83.84	32.03	7.16	30.83	6.00	376
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2389.95	48.14	54.00	-5.86	33.94	31.98	7.11	30.89	6.00	376	62 AVERAGE																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2412.00	98.20	-----	-----	83.84	32.03	7.16	30.83	6.00	376	62 AVERAGE																																																																																																		



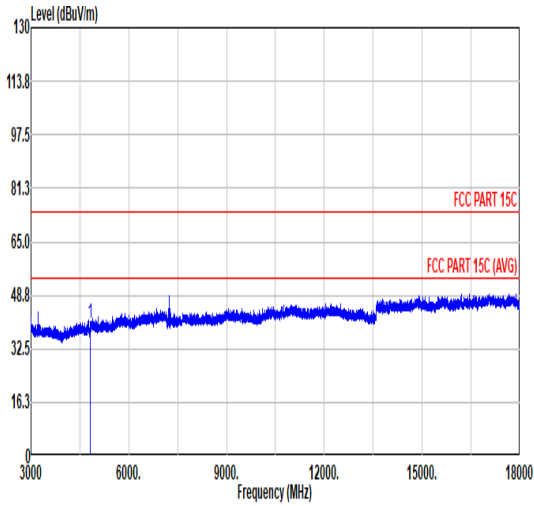
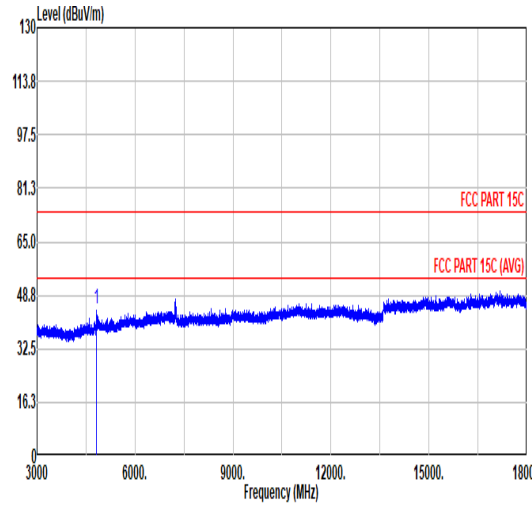


Mode	13																																																																																																		
	Harmonic																																																																																																		
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Vertical																																																																																												
Peak Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>40.47</td><td>74.00</td><td>-33.53</td><td>61.48</td><td>34.10</td><td>10.32</td><td>65.43</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	40.47	74.00	-33.53	61.48	34.10	10.32	65.43	0.00	100	0	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>44.80</td><td>74.00</td><td>-29.20</td><td>65.81</td><td>34.10</td><td>10.32</td><td>65.43</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	44.80	74.00	-29.20	65.81	34.10	10.32	65.43	0.00	300	0
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	4824.00	40.47	74.00	-33.53	61.48	34.10	10.32	65.43	0.00	100	0	PEAK																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	4824.00	44.80	74.00	-29.20	65.81	34.10	10.32	65.43	0.00	300	0	PEAK																																																																																							



Mode	14																																																																																																																																																																			
	Harmonic																																																																																																																																																																			
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																																																																																																			
ANT	1																																																																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																																																																													
Peak Avg																																																																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>41.28</td><td>74.00</td><td>-32.72</td><td>62.24</td><td>34.10</td><td>10.38</td><td>65.44</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>53.37</td><td>74.00</td><td>-20.63</td><td>70.00</td><td>35.00</td><td>12.82</td><td>65.25</td><td>0.00</td><td>379</td><td>118</td><td>PEAK</td></tr><tr><td>3</td><td>7311.00</td><td>39.12</td><td>54.00</td><td>-14.88</td><td>55.75</td><td>35.00</td><td>12.82</td><td>65.25</td><td>0.00</td><td>379</td><td>118</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	41.28	74.00	-32.72	62.24	34.10	10.38	65.44	0.00	100	0	PEAK	2	7311.00	53.37	74.00	-20.63	70.00	35.00	12.82	65.25	0.00	379	118	PEAK	3	7311.00	39.12	54.00	-14.88	55.75	35.00	12.82	65.25	0.00	379	118	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>47.76</td><td>74.00</td><td>-26.24</td><td>68.72</td><td>34.10</td><td>10.38</td><td>65.44</td><td>0.00</td><td>100</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>36.28</td><td>54.00</td><td>-17.72</td><td>57.24</td><td>34.10</td><td>10.38</td><td>65.44</td><td>0.00</td><td>100</td><td>360</td><td>AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>54.44</td><td>74.00</td><td>-19.56</td><td>71.07</td><td>35.00</td><td>12.82</td><td>65.25</td><td>0.00</td><td>381</td><td>29</td><td>PEAK</td></tr><tr><td>4</td><td>7311.00</td><td>40.06</td><td>54.00</td><td>-13.94</td><td>56.69</td><td>35.00</td><td>12.82</td><td>65.25</td><td>0.00</td><td>381</td><td>29</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	47.76	74.00	-26.24	68.72	34.10	10.38	65.44	0.00	100	360	PEAK	2	4874.00	36.28	54.00	-17.72	57.24	34.10	10.38	65.44	0.00	100	360	AVERAGE	3	7311.00	54.44	74.00	-19.56	71.07	35.00	12.82	65.25	0.00	381	29	PEAK	4	7311.00	40.06	54.00	-13.94	56.69	35.00	12.82	65.25	0.00	381	29
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	4874.00	41.28	74.00	-32.72	62.24	34.10	10.38	65.44	0.00	100	0	PEAK																																																																																																																																																								
2	7311.00	53.37	74.00	-20.63	70.00	35.00	12.82	65.25	0.00	379	118	PEAK																																																																																																																																																								
3	7311.00	39.12	54.00	-14.88	55.75	35.00	12.82	65.25	0.00	379	118	AVERAGE																																																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	4874.00	47.76	74.00	-26.24	68.72	34.10	10.38	65.44	0.00	100	360	PEAK																																																																																																																																																								
2	4874.00	36.28	54.00	-17.72	57.24	34.10	10.38	65.44	0.00	100	360	AVERAGE																																																																																																																																																								
3	7311.00	54.44	74.00	-19.56	71.07	35.00	12.82	65.25	0.00	381	29	PEAK																																																																																																																																																								
4	7311.00	40.06	54.00	-13.94	56.69	35.00	12.82	65.25	0.00	381	29	AVERAGE																																																																																																																																																								

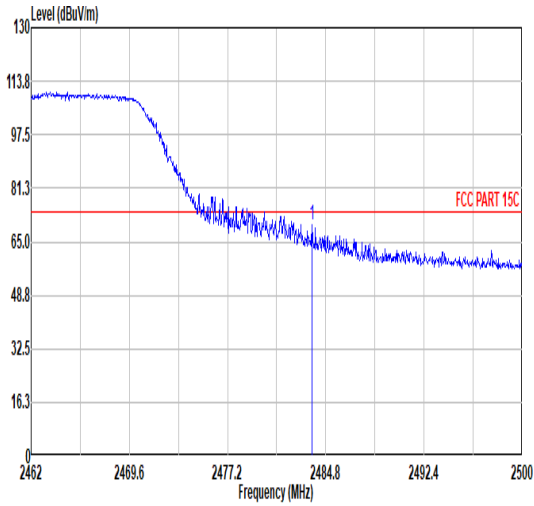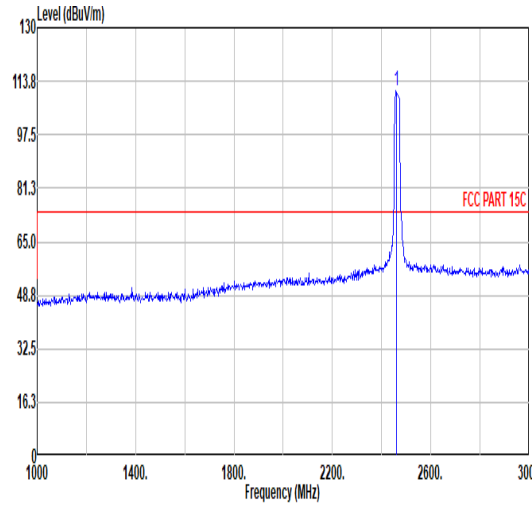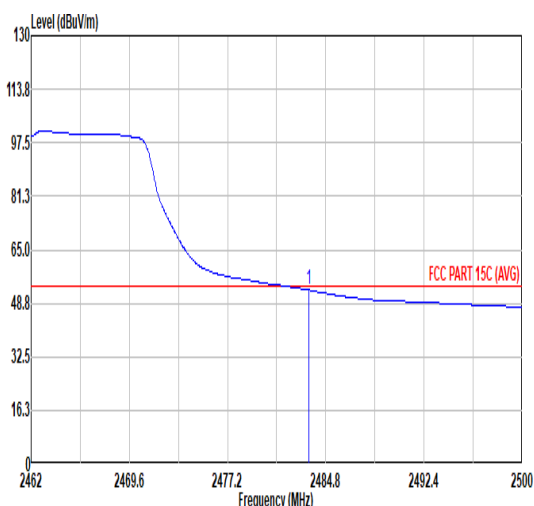
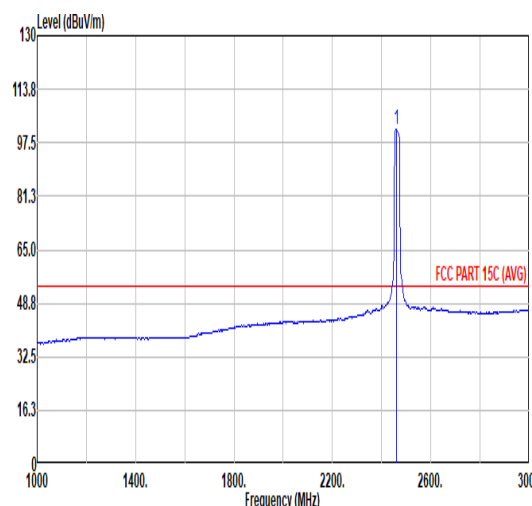


Mode	15																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																
ANT	1																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.74</td><td>70.01</td><td>74.00</td><td>-3.99</td><td>55.24</td><td>32.13</td><td>7.29</td><td>30.65</td><td>6.00</td><td>151</td><td>0 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.74	70.01	74.00	-3.99	55.24	32.13	7.29	30.65	6.00	151	0 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>110.65</td><td>-----</td><td>-----</td><td>96.04</td><td>32.09</td><td>7.24</td><td>30.72</td><td>6.00</td><td>151</td><td>0 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	110.65	-----	-----	96.04	32.09	7.24	30.72	6.00	151
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.74	70.01	74.00	-3.99	55.24	32.13	7.29	30.65	6.00	151	0 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	110.65	-----	-----	96.04	32.09	7.24	30.72	6.00	151	0 PEAK																																																																																						
Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>52.77</td><td>54.00</td><td>-1.23</td><td>38.00</td><td>32.13</td><td>7.29</td><td>30.65</td><td>6.00</td><td>151</td><td>0 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	52.77	54.00	-1.23	38.00	32.13	7.29	30.65	6.00	151	0 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>101.59</td><td>-----</td><td>-----</td><td>86.98</td><td>32.09</td><td>7.24</td><td>30.72</td><td>6.00</td><td>151</td><td>0 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.59	-----	-----	86.98	32.09	7.24	30.72	6.00	151
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.51	52.77	54.00	-1.23	38.00	32.13	7.29	30.65	6.00	151	0 AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	101.59	-----	-----	86.98	32.09	7.24	30.72	6.00	151	0 AVERAGE																																																																																						







Mode	15																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																
ANT	1																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.93</td><td>67.34</td><td>74.00</td><td>-6.66</td><td>52.57</td><td>32.13</td><td>7.29</td><td>30.65</td><td>6.00</td><td>400</td><td>59 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.93	67.34	74.00	-6.66	52.57	32.13	7.29	30.65	6.00	400	59 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>107.01</td><td>-----</td><td>-----</td><td>92.36</td><td>32.10</td><td>7.25</td><td>30.70</td><td>6.00</td><td>400</td><td>59 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	107.01	-----	-----	92.36	32.10	7.25	30.70	6.00	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.93	67.34	74.00	-6.66	52.57	32.13	7.29	30.65	6.00	400	59 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	107.01	-----	-----	92.36	32.10	7.25	30.70	6.00	400	59 PEAK																																																																																						
Avg																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>50.86</td><td>54.00</td><td>-3.14</td><td>36.09</td><td>32.13</td><td>7.29</td><td>30.65</td><td>6.00</td><td>400</td><td>59 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	50.86	54.00	-3.14	36.09	32.13	7.29	30.65	6.00	400	59 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>98.10</td><td>-----</td><td>-----</td><td>83.45</td><td>32.10</td><td>7.25</td><td>30.70</td><td>6.00</td><td>400</td><td>59 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.10	-----	-----	83.45	32.10	7.25	30.70	6.00	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.51	50.86	54.00	-3.14	36.09	32.13	7.29	30.65	6.00	400	59 AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	98.10	-----	-----	83.45	32.10	7.25	30.70	6.00	400	59 AVERAGE																																																																																						



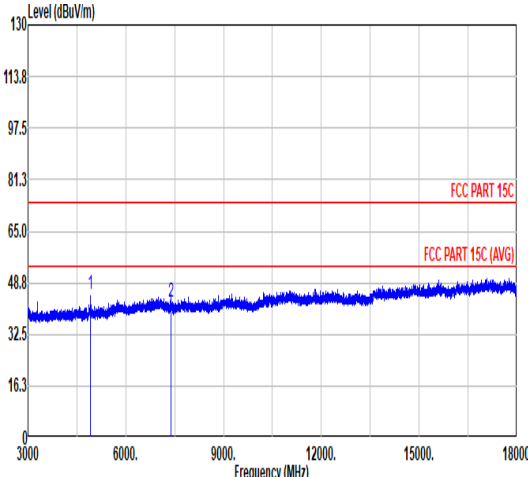
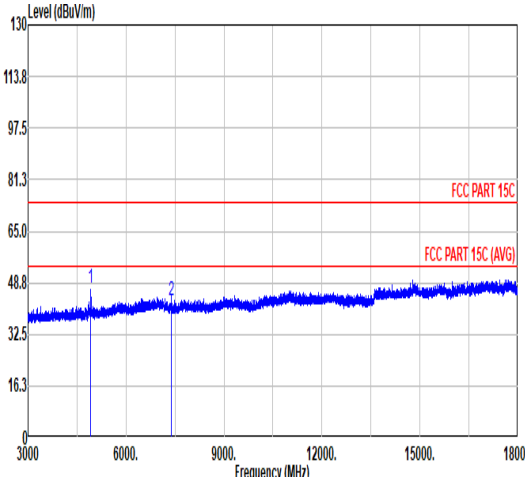



Mode	15																																																																																																																																																									
	Harmonic																																																																																																																																																									
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																																																									
ANT	1																																																																																																																																																									
Pol.	Horizontal												Vertical																																																																																																																																													
Peak Avg																																																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="4"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="4">Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th></tr><tr><td>1</td><td>4924.00</td><td>44.98</td><td>74.00</td><td>-29.02</td><td>65.87</td><td>34.10</td><td>10.45</td><td>65.44</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>59.22</td><td>35.80</td><td>12.84</td><td>65.29</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos					Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	4924.00	44.98	74.00	-29.02	65.87	34.10	10.45	65.44	0.00	300	0	PEAK	2	7386.00	42.57	74.00	-31.43	59.22	35.80	12.84	65.29	0.00	300	0	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="4"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="4">Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th></tr><tr><td>1</td><td>4924.00</td><td>47.21</td><td>74.00</td><td>-26.79</td><td>68.10</td><td>34.10</td><td>10.45</td><td>65.44</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>43.11</td><td>74.00</td><td>-30.89</td><td>59.76</td><td>35.80</td><td>12.84</td><td>65.29</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos					Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	4924.00	47.21	74.00	-26.79	68.10	34.10	10.45	65.44	0.00	100	0	PEAK	2	7386.00	43.11	74.00	-30.89	59.76	35.80	12.84	65.29	0.00	100	0	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																
1	4924.00	44.98	74.00	-29.02	65.87	34.10	10.45	65.44	0.00	300	0	PEAK																																																																																																																																														
2	7386.00	42.57	74.00	-31.43	59.22	35.80	12.84	65.29	0.00	300	0	PEAK																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																
1	4924.00	47.21	74.00	-26.79	68.10	34.10	10.45	65.44	0.00	100	0	PEAK																																																																																																																																														
2	7386.00	43.11	74.00	-30.89	59.76	35.80	12.84	65.29	0.00	100	0	PEAK																																																																																																																																														

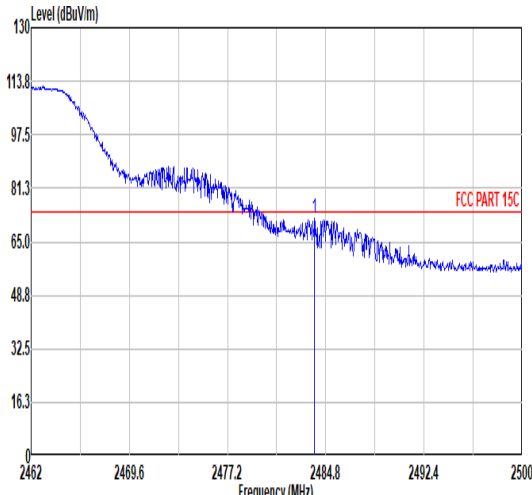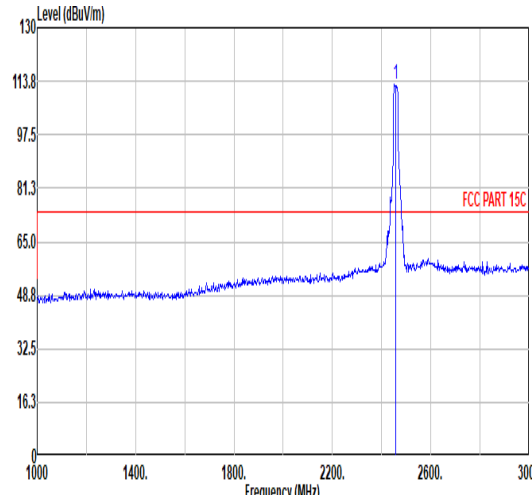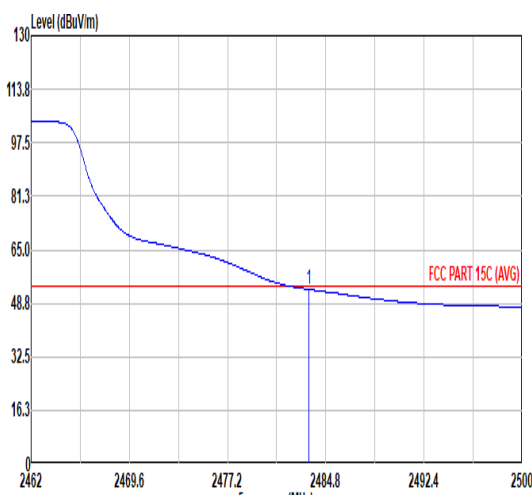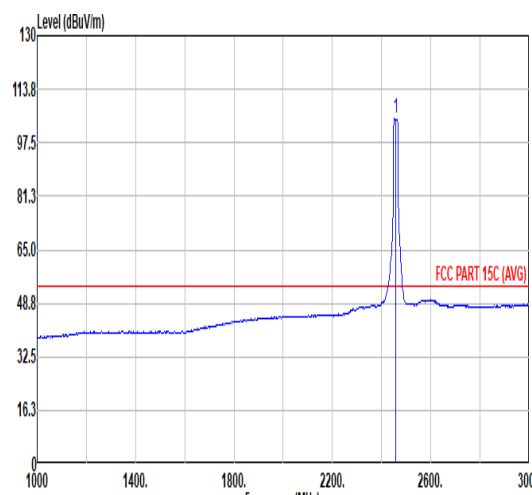

Mode	16																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11g_CH10_2457MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.93</td><td>71.99</td><td>74.00</td><td>-2.01</td><td>56.52</td><td>32.13</td><td>7.99</td><td>30.65</td><td>6.00</td><td>325</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.93	71.99	74.00	-2.01	56.52	32.13	7.99	30.65	6.00	325	360	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2457.00</td><td>112.91</td><td>-----</td><td>-----</td><td>97.61</td><td>32.08</td><td>7.95</td><td>30.73</td><td>6.00</td><td>325</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	112.91	-----	-----	97.61	32.08	7.95	30.73	6.00	325	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.93	71.99	74.00	-2.01	56.52	32.13	7.99	30.65	6.00	325	360	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2457.00	112.91	-----	-----	97.61	32.08	7.95	30.73	6.00	325	360	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>53.00</td><td>54.00</td><td>-1.00</td><td>37.53</td><td>32.13</td><td>7.99</td><td>30.65</td><td>6.00</td><td>325</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	53.00	54.00	-1.00	37.53	32.13	7.99	30.65	6.00	325	360	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2457.00</td><td>104.74</td><td>-----</td><td>-----</td><td>89.44</td><td>32.08</td><td>7.95</td><td>30.73</td><td>6.00</td><td>325</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	104.74	-----	-----	89.44	32.08	7.95	30.73	6.00	325	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.51	53.00	54.00	-1.00	37.53	32.13	7.99	30.65	6.00	325	360	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2457.00	104.74	-----	-----	89.44	32.08	7.95	30.73	6.00	325	360	AVERAGE																																																																																							

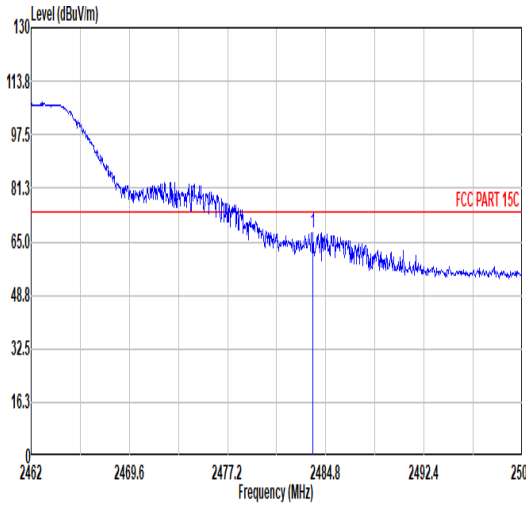
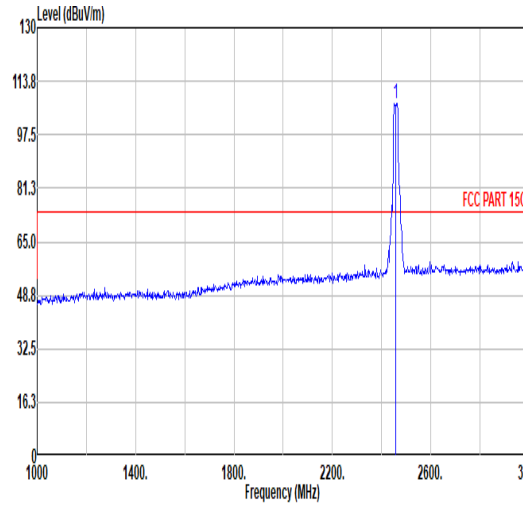
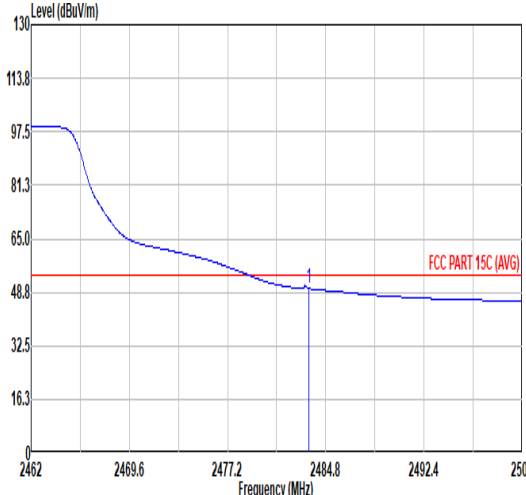
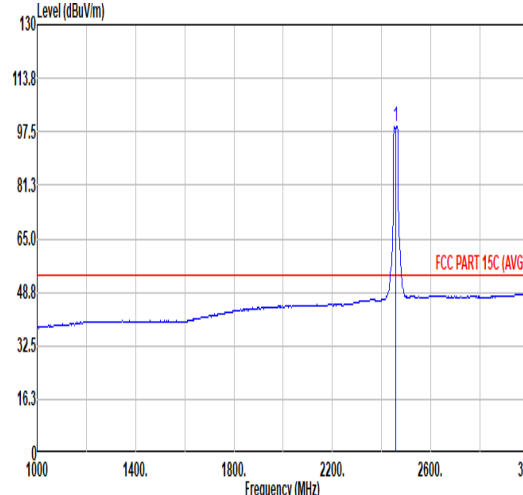


Mode	16																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_802.11g_CH10_2457MHz																																																																																																														
ANT	1																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.81</td><td>67.79</td><td>74.00</td><td>-6.21</td><td>52.32</td><td>32.13</td><td>7.99</td><td>30.65</td><td>6.00</td><td>357</td><td>80</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.81	67.79	74.00	-6.21	52.32	32.13	7.99	30.65	6.00	357	80	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2457.00</td><td>107.06</td><td>-----</td><td>-----</td><td>91.76</td><td>32.08</td><td>7.95</td><td>30.73</td><td>6.00</td><td>357</td><td>80</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	107.06	-----	-----	91.76	32.08	7.95	30.73	6.00	357	80
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2483.81	67.79	74.00	-6.21	52.32	32.13	7.99	30.65	6.00	357	80	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2457.00	107.06	-----	-----	91.76	32.08	7.95	30.73	6.00	357	80	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>49.94</td><td>54.00</td><td>-4.06</td><td>34.47</td><td>32.13</td><td>7.99</td><td>30.65</td><td>6.00</td><td>357</td><td>80</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	49.94	54.00	-4.06	34.47	32.13	7.99	30.65	6.00	357	80	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2457.00</td><td>99.27</td><td>-----</td><td>-----</td><td>83.90</td><td>32.10</td><td>7.97</td><td>30.70</td><td>6.00</td><td>357</td><td>80</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	99.27	-----	-----	83.90	32.10	7.97	30.70	6.00	357	80
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2483.51	49.94	54.00	-4.06	34.47	32.13	7.99	30.65	6.00	357	80	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2457.00	99.27	-----	-----	83.90	32.10	7.97	30.70	6.00	357	80	AVERAGE																																																																																																			




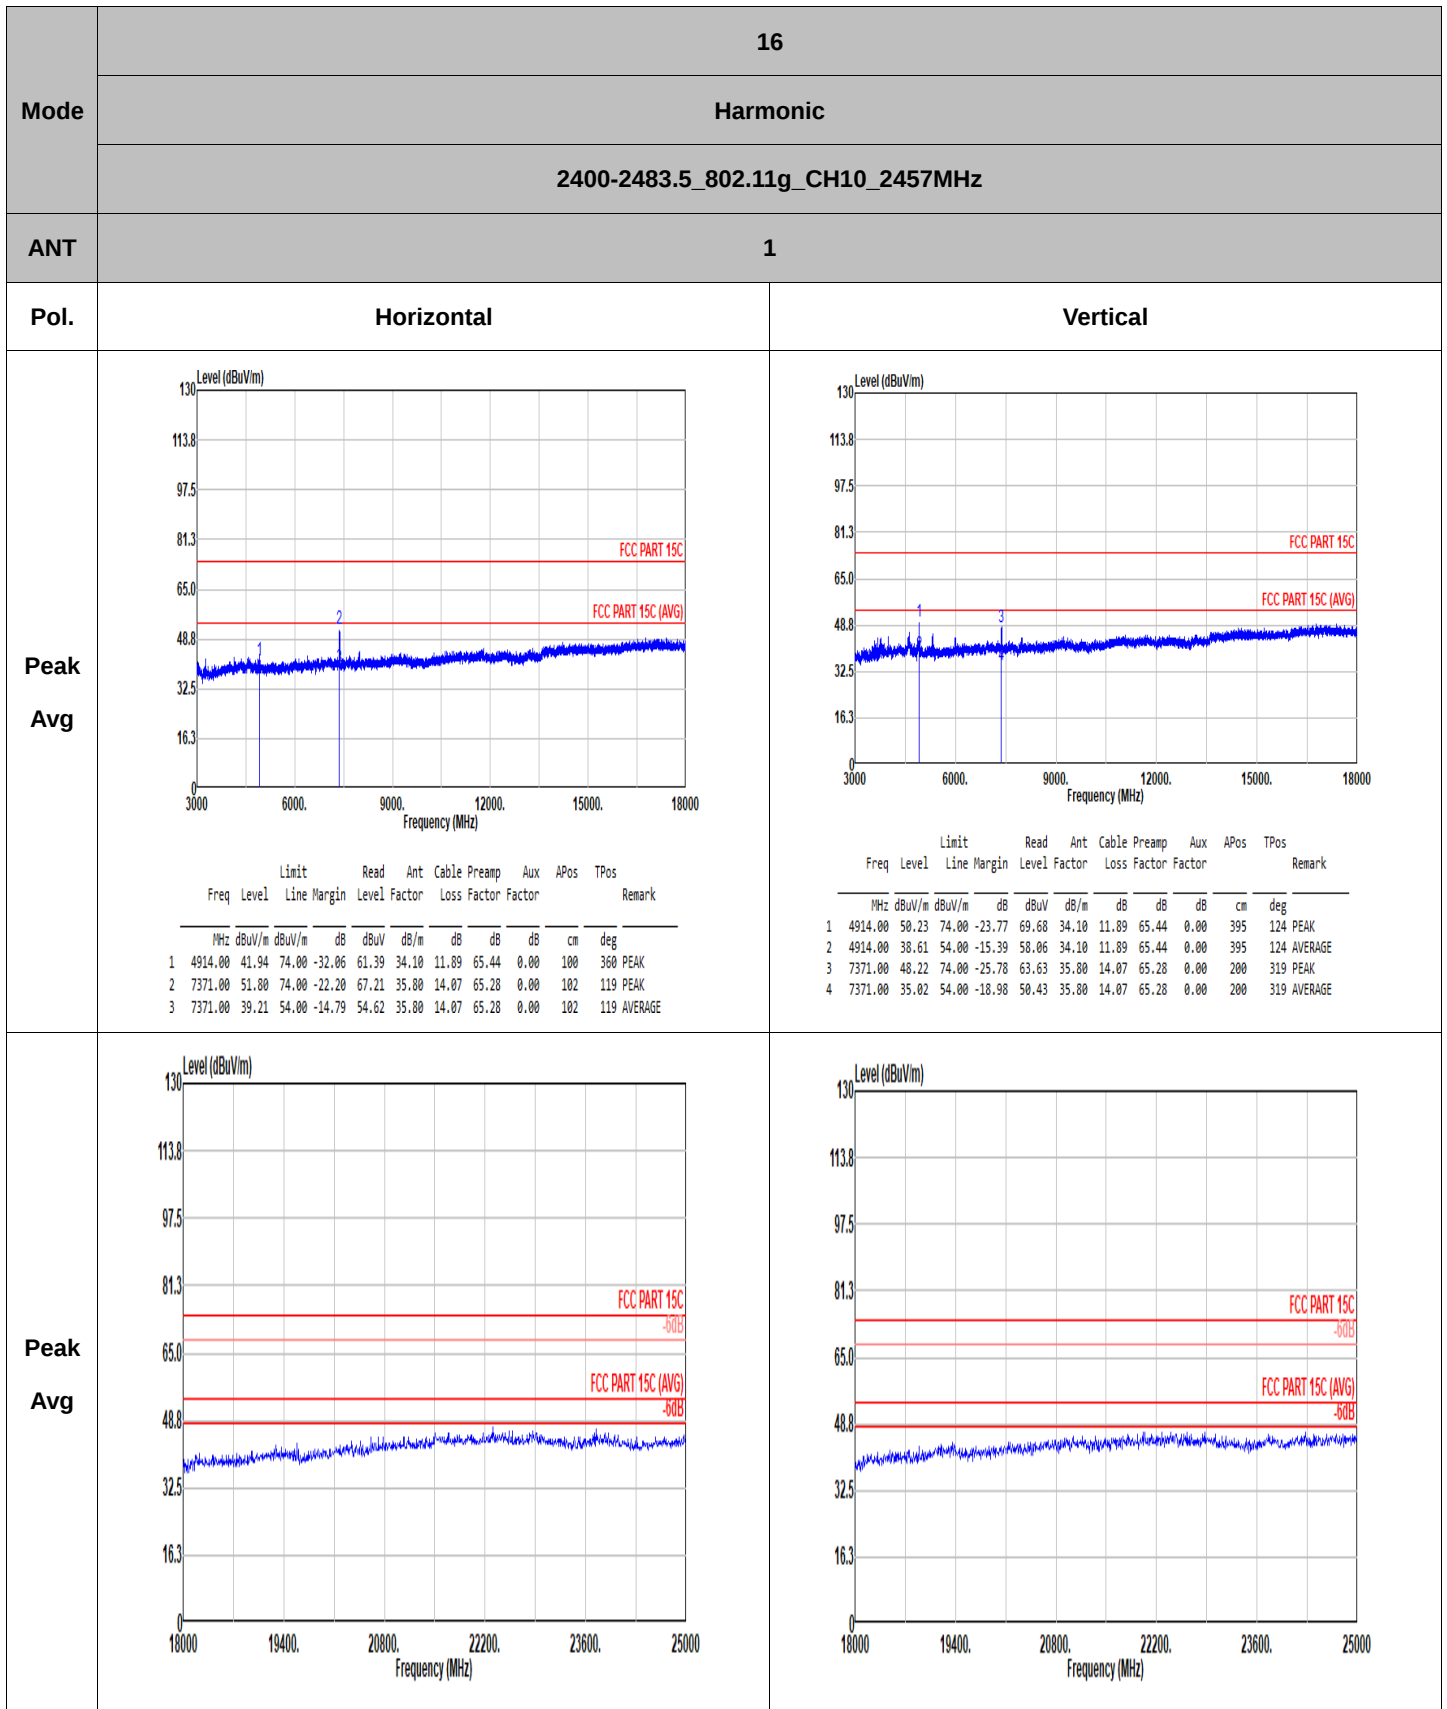


Note: For 18GHz to 25GHz, only worse case is verified in this report.

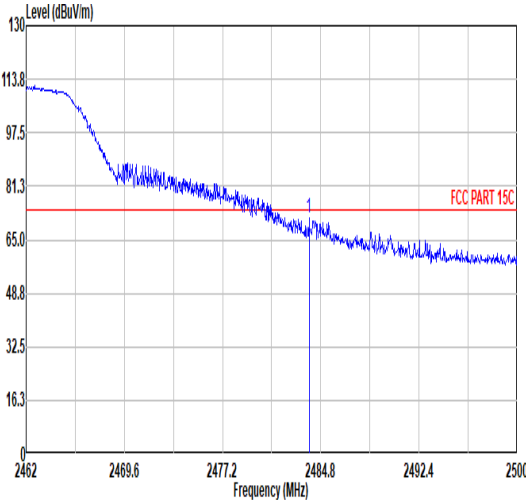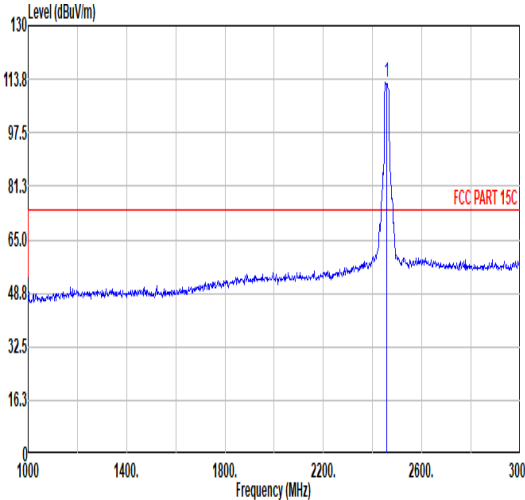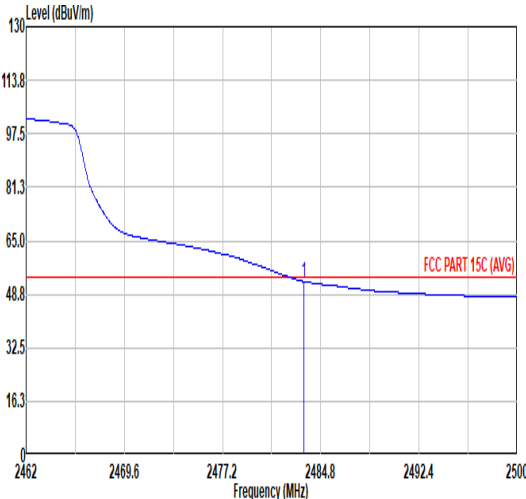
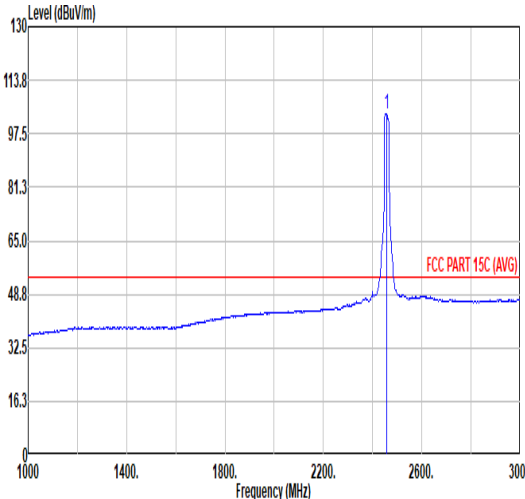


Mode	17																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_802.11n HT20_CH10_2457MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal						Fundamental																																																																																														
Peak																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.89</td><td>71.78</td><td>74.00</td><td>-2.22</td><td>56.31</td><td>32.13</td><td>7.99</td><td>30.65</td><td>6.00</td><td>172</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.89	71.78	74.00	-2.22	56.31	32.13	7.99	30.65	6.00	172	360	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2457.00</td><td>112.77</td><td>-----</td><td>-----</td><td>97.47</td><td>32.08</td><td>7.95</td><td>30.73</td><td>6.00</td><td>172</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2457.00	112.77	-----	-----	97.47	32.08	7.95	30.73	6.00	172	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2483.89	71.78	74.00	-2.22	56.31	32.13	7.99	30.65	6.00	172	360	PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2457.00	112.77	-----	-----	97.47	32.08	7.95	30.73	6.00	172	360	PEAK																																																																																									
Avg																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.51</td><td>52.64</td><td>54.00</td><td>-1.36</td><td>37.17</td><td>32.13</td><td>7.99</td><td>30.65</td><td>6.00</td><td>172</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.51	52.64	54.00	-1.36	37.17	32.13	7.99	30.65	6.00	172	360	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2457.00</td><td>103.58</td><td>-----</td><td>-----</td><td>88.28</td><td>32.08</td><td>7.95</td><td>30.73</td><td>6.00</td><td>172</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2457.00	103.58	-----	-----	88.28	32.08	7.95	30.73	6.00	172	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2483.51	52.64	54.00	-1.36	37.17	32.13	7.99	30.65	6.00	172	360	AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2457.00	103.58	-----	-----	88.28	32.08	7.95	30.73	6.00	172	360	AVERAGE																																																																																									

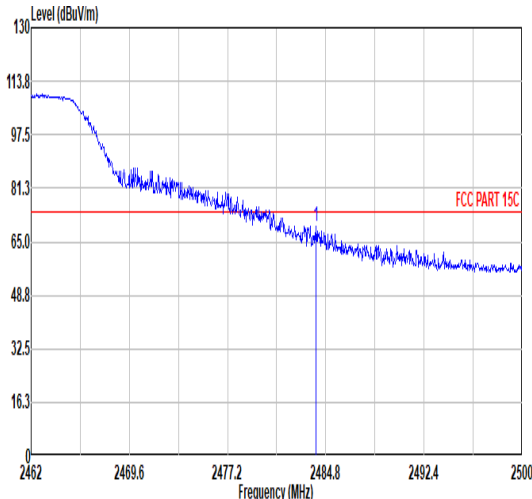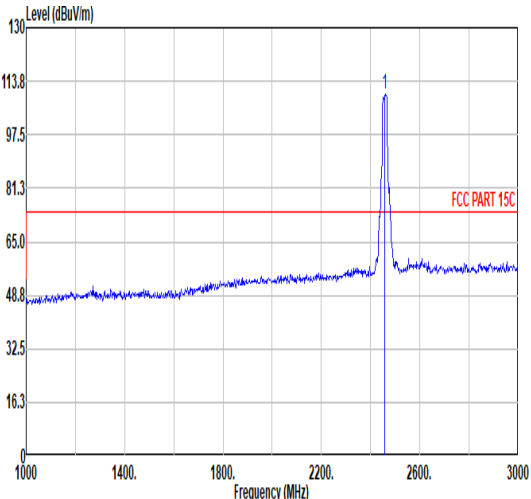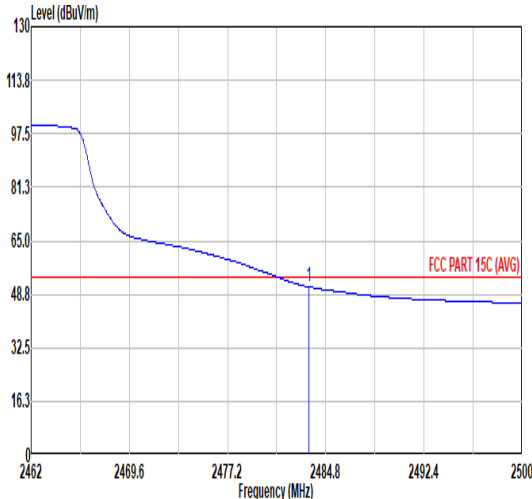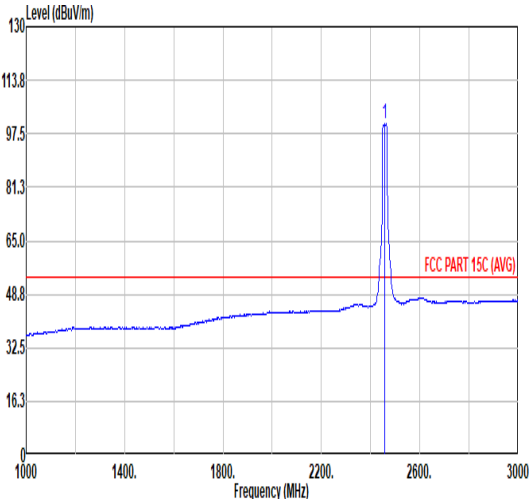

Mode	17																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11n HT20_CH10_2457MHz																																																																																																
ANT	1																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.04</td><td>69.63</td><td>74.00</td><td>-4.37</td><td>54.15</td><td>32.13</td><td>7.99</td><td>30.64</td><td>6.00</td><td>400</td><td>52 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.04	69.63	74.00	-4.37	54.15	32.13	7.99	30.64	6.00	400	52 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2457.00</td><td>110.03</td><td>-----</td><td>-----</td><td>94.69</td><td>32.09</td><td>7.96</td><td>30.71</td><td>6.00</td><td>400</td><td>52 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	110.03	-----	-----	94.69	32.09	7.96	30.71	6.00	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2484.04	69.63	74.00	-4.37	54.15	32.13	7.99	30.64	6.00	400	52 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2457.00	110.03	-----	-----	94.69	32.09	7.96	30.71	6.00	400	52 PEAK																																																																																						
Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>50.92</td><td>54.00</td><td>-3.08</td><td>35.45</td><td>32.13</td><td>7.99</td><td>30.65</td><td>6.00</td><td>400</td><td>52 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	50.92	54.00	-3.08	35.45	32.13	7.99	30.65	6.00	400	52 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2457.00</td><td>100.36</td><td>-----</td><td>-----</td><td>84.99</td><td>32.10</td><td>7.97</td><td>30.70</td><td>6.00</td><td>400</td><td>52 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	100.36	-----	-----	84.99	32.10	7.97	30.70	6.00	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.51	50.92	54.00	-3.08	35.45	32.13	7.99	30.65	6.00	400	52 AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2457.00	100.36	-----	-----	84.99	32.10	7.97	30.70	6.00	400	52 AVERAGE																																																																																						

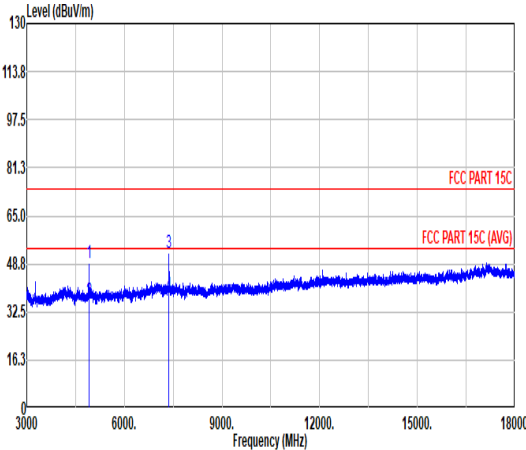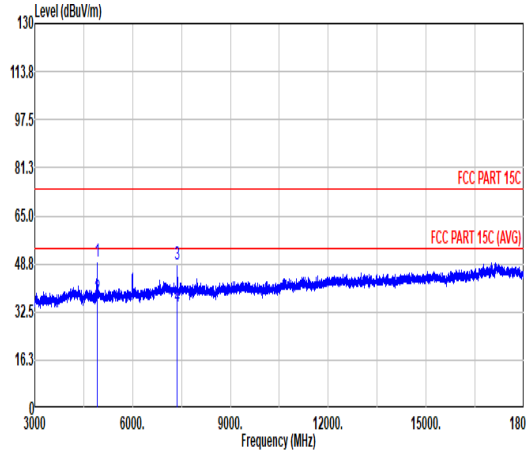

Mode	17																																																																																																				
	Harmonic																																																																																																				
	2400-2483.5_802.11n_HT20_CH10_2457MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal						Vertical																																																																																														
Peak Avg																																																																																																					
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4914.00</td><td>49.10</td><td>74.00</td><td>-24.90</td><td>68.55</td><td>34.10</td><td>11.89</td><td>65.44</td><td>0.00</td><td>101</td><td>149</td><td>PEAK</td></tr><tr><td>2</td><td>4914.00</td><td>36.44</td><td>54.00</td><td>-17.56</td><td>55.89</td><td>34.10</td><td>11.89</td><td>65.44</td><td>0.00</td><td>101</td><td>149</td><td>AVERAGE</td></tr><tr><td>3</td><td>7371.00</td><td>52.30</td><td>74.00</td><td>-21.70</td><td>67.71</td><td>35.80</td><td>14.07</td><td>65.28</td><td>0.00</td><td>104</td><td>142</td><td>PEAK</td></tr><tr><td>4</td><td>7371.00</td><td>38.02</td><td>54.00</td><td>-15.98</td><td>53.43</td><td>35.80</td><td>14.07</td><td>65.28</td><td>0.00</td><td>104</td><td>142</td><td>AVERAGE</td></tr></table>														Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	4914.00	49.10	74.00	-24.90	68.55	34.10	11.89	65.44	0.00	101	149	PEAK	2	4914.00	36.44	54.00	-17.56	55.89	34.10	11.89	65.44	0.00	101	149	AVERAGE	3	7371.00	52.30	74.00	-21.70	67.71	35.80	14.07	65.28	0.00	104	142	PEAK	4	7371.00	38.02	54.00	-15.98	53.43	35.80	14.07	65.28	0.00	104	142	AVERAGE
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	4914.00	49.10	74.00	-24.90	68.55	34.10	11.89	65.44	0.00	101	149	PEAK																																																																																									
2	4914.00	36.44	54.00	-17.56	55.89	34.10	11.89	65.44	0.00	101	149	AVERAGE																																																																																									
3	7371.00	52.30	74.00	-21.70	67.71	35.80	14.07	65.28	0.00	104	142	PEAK																																																																																									
4	7371.00	38.02	54.00	-15.98	53.43	35.80	14.07	65.28	0.00	104	142	AVERAGE																																																																																									




Mode																																																																																																																																																																																								
	Emission below 1GHz																																																																																																																																																																																							
	2400-2483.5_802.11g_CH10_2457MHz																																																																																																																																																																																							
ANT	1																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																						
Peak QP	Horizontal Polarization Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a red line for FCC PART 15C and a blue line for the measured signal. Peaks are labeled 1 through 6. <table><tr><th></th><th>Over Freq</th><th>Limit Level</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>37.76</td><td>26.84</td><td>-13.16</td><td>40.00</td><td>37.61</td><td>20.79</td><td>0.60</td><td>32.16</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>68.00</td><td>30.18</td><td>-9.82</td><td>40.00</td><td>49.00</td><td>12.24</td><td>1.04</td><td>32.18</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>132.82</td><td>29.99</td><td>-13.51</td><td>43.50</td><td>42.92</td><td>17.54</td><td>1.66</td><td>32.13</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>154.16</td><td>29.09</td><td>-14.41</td><td>43.50</td><td>42.67</td><td>16.73</td><td>1.79</td><td>32.10</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>268.62</td><td>23.35</td><td>-22.65</td><td>46.00</td><td>34.11</td><td>19.01</td><td>2.39</td><td>32.16</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>452.92</td><td>24.48</td><td>-21.52</td><td>46.00</td><td>30.77</td><td>22.82</td><td>3.10</td><td>32.21</td><td>---</td><td>---</td><td>Peak</td></tr></table>		Over Freq	Limit Level	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	37.76	26.84	-13.16	40.00	37.61	20.79	0.60	32.16	---	---	Peak	2	68.00	30.18	-9.82	40.00	49.00	12.24	1.04	32.18	---	---	Peak	3	132.82	29.99	-13.51	43.50	42.92	17.54	1.66	32.13	---	---	Peak	4	154.16	29.09	-14.41	43.50	42.67	16.73	1.79	32.10	---	---	Peak	5	268.62	23.35	-22.65	46.00	34.11	19.01	2.39	32.16	---	---	Peak	6	452.92	24.48	-21.52	46.00	30.77	22.82	3.10	32.21	---	---	Peak	Vertical Polarization Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a red line for FCC PART 15C and a blue line for the measured signal. Peaks are labeled 1 through 6. <table><tr><th></th><th>Over Freq</th><th>Limit Level</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>50.37</td><td>33.20</td><td>-6.72</td><td>40.00</td><td>50.38</td><td>14.33</td><td>0.77</td><td>32.20</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>83.35</td><td>34.20</td><td>-5.80</td><td>40.00</td><td>51.38</td><td>13.73</td><td>1.23</td><td>32.14</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>114.39</td><td>32.30</td><td>-11.12</td><td>43.50</td><td>45.06</td><td>17.14</td><td>1.55</td><td>32.17</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>136.70</td><td>34.01</td><td>-9.49</td><td>43.50</td><td>46.97</td><td>17.48</td><td>1.69</td><td>32.13</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>152.22</td><td>30.74</td><td>-12.76</td><td>43.50</td><td>44.19</td><td>16.67</td><td>1.78</td><td>32.10</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>250.19</td><td>22.06</td><td>-23.94</td><td>46.00</td><td>33.59</td><td>18.37</td><td>2.30</td><td>32.20</td><td>---</td><td>---</td><td>Peak</td></tr></table>		Over Freq	Limit Level	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	50.37	33.20	-6.72	40.00	50.38	14.33	0.77	32.20	---	---	Peak	2	83.35	34.20	-5.80	40.00	51.38	13.73	1.23	32.14	---	---	Peak	3	114.39	32.30	-11.12	43.50	45.06	17.14	1.55	32.17	---	---	Peak	4	136.70	34.01	-9.49	43.50	46.97	17.48	1.69	32.13	---	---	Peak	5	152.22	30.74	-12.76	43.50	44.19	16.67	1.78	32.10	---	---	Peak	6	250.19	22.06	-23.94	46.00	33.59	18.37	2.30	32.20	---	---	Peak
		Over Freq	Limit Level	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																																
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																																																																															
1	37.76	26.84	-13.16	40.00	37.61	20.79	0.60	32.16	---	---	Peak																																																																																																																																																																													
2	68.00	30.18	-9.82	40.00	49.00	12.24	1.04	32.18	---	---	Peak																																																																																																																																																																													
3	132.82	29.99	-13.51	43.50	42.92	17.54	1.66	32.13	---	---	Peak																																																																																																																																																																													
4	154.16	29.09	-14.41	43.50	42.67	16.73	1.79	32.10	---	---	Peak																																																																																																																																																																													
5	268.62	23.35	-22.65	46.00	34.11	19.01	2.39	32.16	---	---	Peak																																																																																																																																																																													
6	452.92	24.48	-21.52	46.00	30.77	22.82	3.10	32.21	---	---	Peak																																																																																																																																																																													
	Over Freq	Limit Level	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																																	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																																																																															
1	50.37	33.20	-6.72	40.00	50.38	14.33	0.77	32.20	---	---	Peak																																																																																																																																																																													
2	83.35	34.20	-5.80	40.00	51.38	13.73	1.23	32.14	---	---	Peak																																																																																																																																																																													
3	114.39	32.30	-11.12	43.50	45.06	17.14	1.55	32.17	---	---	Peak																																																																																																																																																																													
4	136.70	34.01	-9.49	43.50	46.97	17.48	1.69	32.13	---	---	Peak																																																																																																																																																																													
5	152.22	30.74	-12.76	43.50	44.19	16.67	1.78	32.10	---	---	Peak																																																																																																																																																																													
6	250.19	22.06	-23.94	46.00	33.59	18.37	2.30	32.20	---	---	Peak																																																																																																																																																																													



Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	99.27	-	-	10Hz
802.11n HT20	100	-	-	10HZ

802.11b

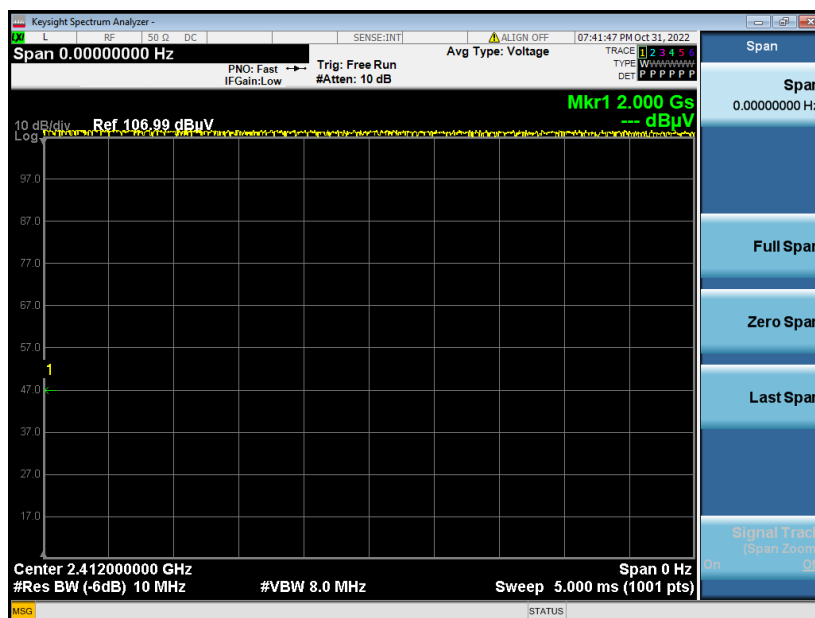



802.11g

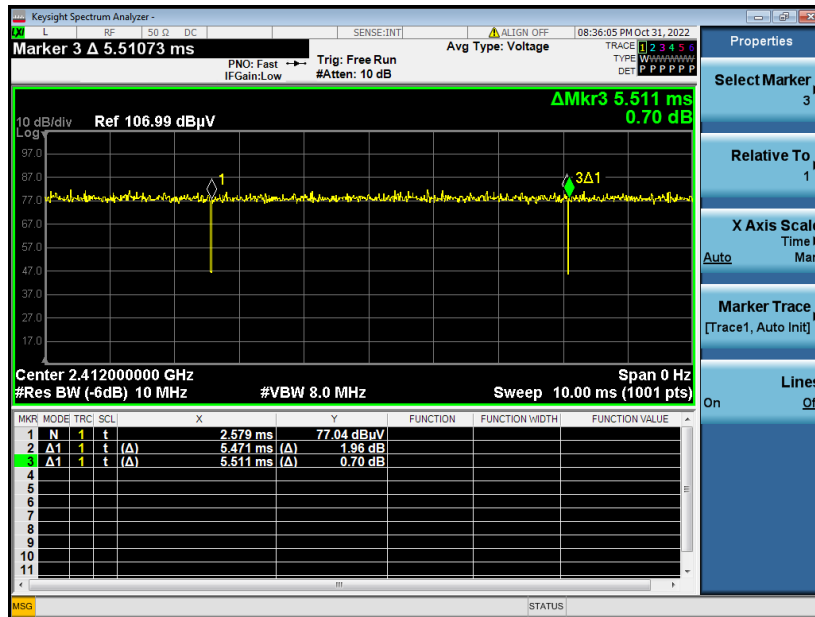

802.11n HT20

