


Add:4F-1, No.106, Ruiguang Rd., Neihu Dist., Taipei City 114, Taiwan



Specifications

Frequency Range	902 – 928 MHz
Gain	2 dBi
V.S.W.R	≤ 2.0
Radiation	Omni
Polarization	Vertical
Impedance	50 Ω
Connector	SMA male
Dimensions	∅13.3 x 195 mm
Weight	20 g
Temperature	-40 °C to 85 °C
Humidity	95% @ 25 °C

Pattern

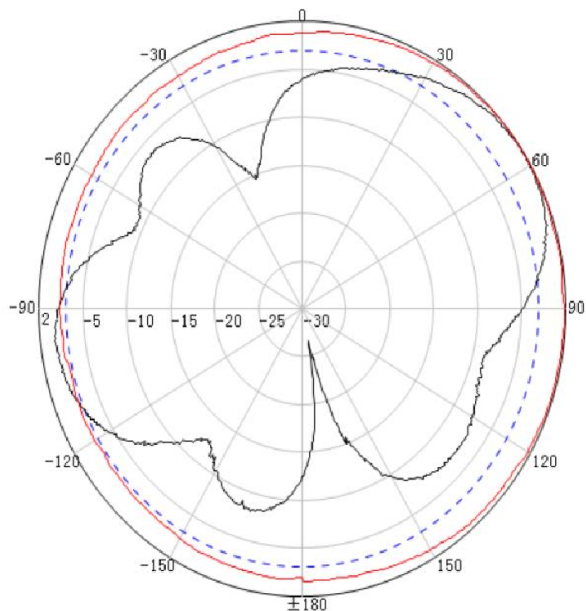

V.S.W.R

