


< LABEL >

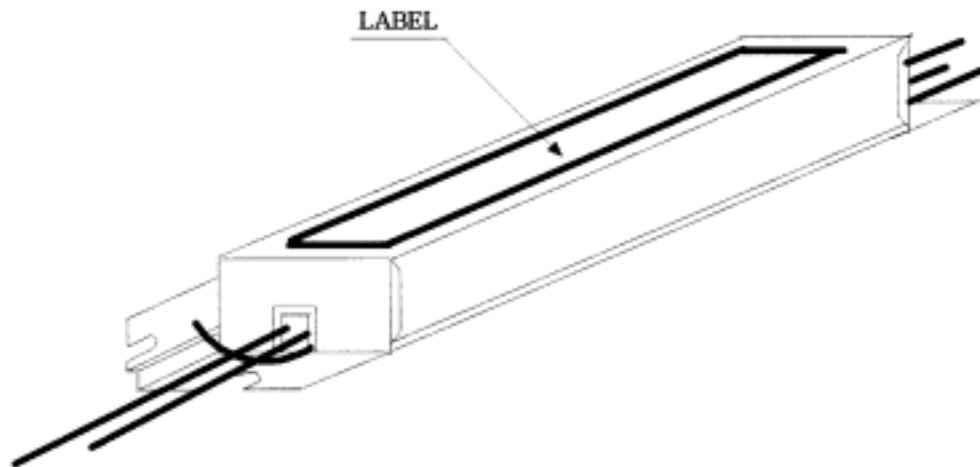

FCC ID. : O2MISE WHEN OPERATING ONE LAMP, INSULATE ONE RED FROM GROUND AND ALL OTHER LEADS.	CLASS P TYPE 1 THERMALLY PROTECTED Replace only with Ballast of same type	ELECTRONIC BALLAST WMB-920E FOR USE WITH ANY (1) OR (2) LAMP COMBINATION OF FBT5 OR F13T5 LAMPS 120VAC 60Hz 0.4A MAX. OUTPUT 600V MIN. BALLST START : -20°F MIN. LAMPT START : SEE LAMP SPECS  ISE TELECOMMUNICATION CO., LTD.	INSTALL IN ACCORDANCE WITH NATIONAL ELECTRICAL CODES. SUITABLE FOR OUTDOOR USE POUR EMPLOI AL'EXTÉRIEUR MADE IN KOREA
---	--	--	---