



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

TEST REPORT

No. ARSO00037/1

performed in accordance with

FCC Rules: Code of Federal Regulations (CFR) no. 47
Part 15 Subpart F Section 15.509

PRODUCT	Ground penetrating radar
MODEL(s) TESTED	OPERA DUO
FCC ID	UFW-OPERADUO
TRADE MARK(s)	IDS INGEGNERIA DEI SISTEMI S.p.A

APPLICANT	IDS INGEGNERIA DEI SISTEMI S.p.A. Via E. Calabresi, 20 – I-56121 PISA
-----------	--

Tested by	Robertino Torri	
Approved by	Roberto Colombo <i>[Laboratory manager]</i>	

Revision Sheet

Release No.	Date	Revision Description
Rev. 0	2014-04-17	First edition Digital signed - ARSO00037-1_TR_FCC Part 15F 15.509_IDS_Georadar Opera Duo

The results of tests and checks reported in this Test Report refer exclusively to the samples tested and described in the Report itself.
This Report shall not be reproduced partially without the written approval of IMQ S.p.A..

1. GENERAL DATA

SAMPLE		
Samples received on	2014-04-01	(item sent and sampling by applicant)
IMQ reference samples	BEM	72545
Samples tested No.	1	
Object under analysis recognition	Not carried out Except where stated, characteristics of products were taken from client description and were not verified by the laboratory	
TEST LOCATION		
Testing dates	2014-04-01 ÷ 2014-04-02	
Testing laboratory.	IMQ S.p.A. - Via Quintiliano, 43 – I-20138 Milano	
Testing site	Viale Lombardia, 20 – I-20021 Bollate (MI)	
ENVIRONMENTAL CONDITIONING		
Parameter	Measured	
Ambient Temperature	25 ÷ 27 °C	
Relative Humidity	50 ÷ 60 %	
Atmospheric Pressure	900 ÷ 1000 mbar	



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

2. REFERENCE DOCUMENT

	DOCUMENT	DATE	TITLE
☒	47 CFR Part 15	2010	Radio Frequency Device
☒	ANSI C63.4	2009	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
☒	ANSI C63.10 (*)	2009	American National Standard for Testing Unlicensed Wireless Devices
☒	FCC Order, ET Docket No. 98-153 (FCC 02-48) (*)	2002	Revision of Part 15 of the Commission's Rules Regarding Ultra-Wideband Transmission Systems
☒	KDB Publication No. 393764 (*)	2007	UWB Compliance Measurements

(*) not accredited by ACCREDIA

3. UNIT UNDER TEST (EUT) DETAILS

GENERAL DATA

Model	OPERA DUO
FCC ID	UFW-OPERADUO

Manufacturer	IDS INGEGNERIA DEI SISTEMI S.p.A. Via E. Calabresi, 20 – I-56121 PISA
---------------------	--

EUT classification	Ground penetrating radar (GPR)
General overview	The OPERA DUO system is a Ground penetrating radar (GPR) system, i.e., according to the FCC definition, a field disturbance sensor that is designed to operate only when in contact with the ground for the purpose of detecting or obtaining the images of buried objects or determining the physical properties within the ground. The energy from the GPR is intentionally directed down into the ground for this purpose. The OPERA DUO product includes • The OPERA DUO antenna (including one couple of transmitting and receiving dipoles) • The control unit (hereinafter referred as D.A.D – Digital Antenna Driver) that is linked to a laptop computer for storing the collected data.
Power supply type	DC 12 V battery supplied
Operating frequency	67.20 to 279.24 MHz (10 dB Bandwidth)
Channel Spacing	Not applicable
Pulse Repetition Frequency (PRF)	400 kHz
Antenna description	Integral permanently attached
Antenna Type	Dipole

4. TEST CONFIGURATION OF UNIT UNDER TEST

EUT CONFIGURATION

The Equipment under test was powered with a battery and placed directly on the dry sand with no ground plane under it.



STATE OF THE EUT DURING TESTS

Ref.	Mode	Description
#1	Operating	Continuous transmission with the antenna fitted in a manner typical of normal indented use.

SUPPORT EQUIPMENT

Defined as equipment needed for correct operation or loading of the EUT, but not considered as tested:

Equipment	Manufacturer	Model
None	/	/

EUT TECHNICAL DOCUMENTATION

Document	Reference
DAD & antenna block diagrams	/
User Manual	N doc:MN/2014/024 - Rev. 1.0 Config.: Opera DUO-PRCS-OUT-MN
Technical description of the system	Technical description of the unit - OPERADUO



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it





LAB N° 0121



5. TEST SET-UP DESCRIPTION

Type of test facilities	Open Area Test Site (OATS) The test site is flat and the level area is clear of overhead wires and reflecting structures, it is sufficiently large to permit measuring antenna placement at specified distance. Adequate spacing distance is assured between the EUT and measuring antenna to any adjacent large reflecting structures.
Test distance	• 3 meters measuring distance. • 1 meter above 960 MHz for measurement to device not placed on the ground plane with the antenna pointed in the direction of the radiating head.
Ground plane	Galvanized sheet steel soldered panels is installed on the floor, electric contact between the individual plates is provided via continues metallic strips. Dimensions: 6.0m x 4.0m x 3.0mm (LxWxD)
Antenna positioner	Semi-Automatic remotely controlled Antenna mast, scan over a range of 1 to 4 meters above the ground plane. Manual antenna polarization change.
Sandpit	2.0m x 4.0m x 50cm (LxWxD) sandpit area filled with dry sand placed in front of the ground plane (test on UWB Ground penetrating radar).

Drawing

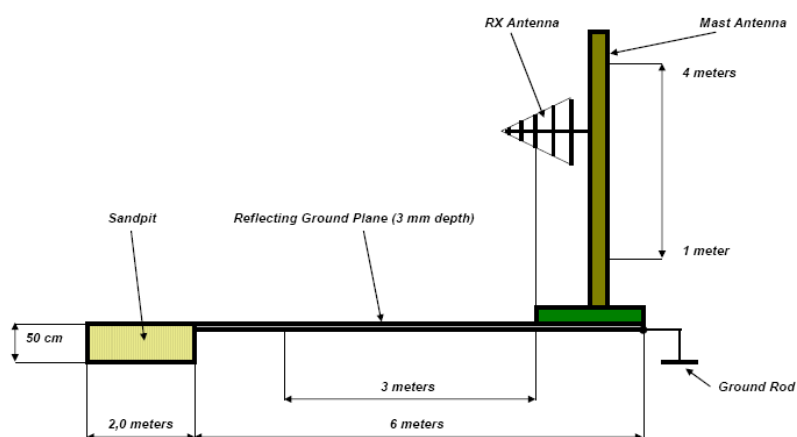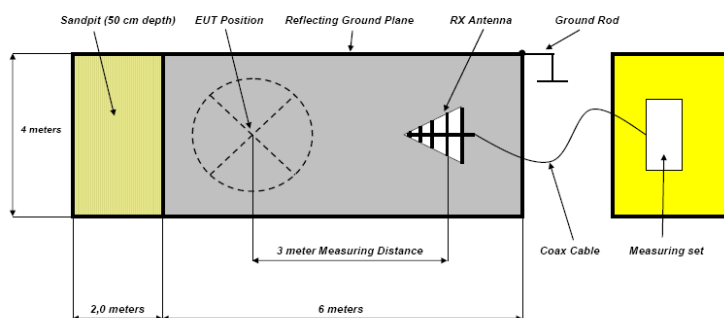

Radiated measurement below 960 MHz

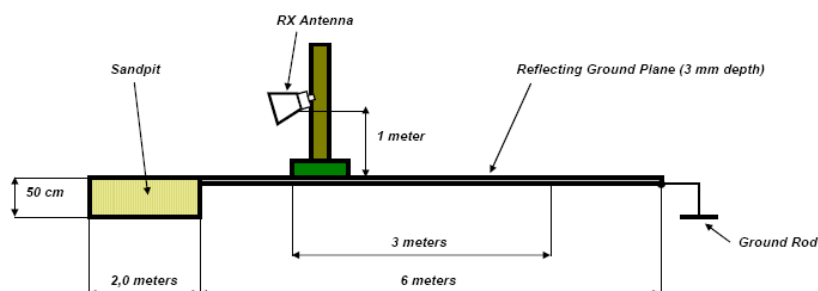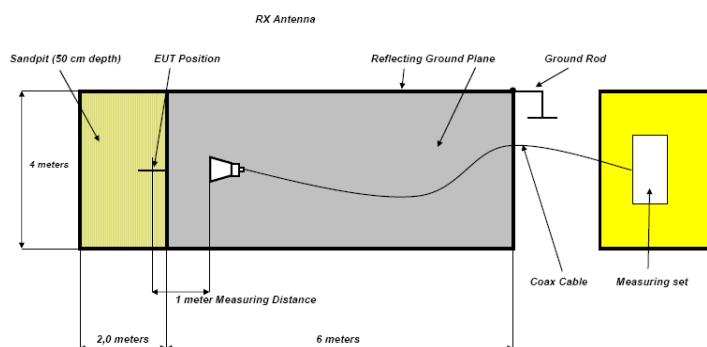

Radiated measurement above 960 MHz

6. SUMMARY OF TEST RESULTS

POSSIBLE TEST CASE VERDICTS:	
Test object does meet the requirement	PASS
Test object does not meet the requirement	FAIL
Test case does not apply to the test object	N.A.
Test not performed	N.P.

CFR47 Part 15	TITLE	RESULT
§ 15.207(a)	Conducted Emission	N.A. ¹
§ 15.505	Cross reference	PASS
§ 15.507	Marketing of UWB equipment	PASS
§ 15.509	Pulse Repetition Frequency (PRF)	PASS
§ 15.509(a)	UWB Bandwidth	PASS
§ 15.509(c)	Transmission duration	PASS
§ 15.509(c) § 15.209	Radiated emission ≤ 960 MHz	PASS
§ 15.509(d)	Radiated emission > 960 MHz	PASS
§ 15.509(e)	Radiated emission in GPS bands	PASS
§ 15.509(f)	Highest radiated emission at f_M	PASS
§ 15.521	Technical requirements applicable to all UWB devices	PASS
§ 15.525 § 15.509(b)	Coordination requirement	PASS

Note 1	Port not present, battery operating device
---------------	--

7. TEST RESULTS

7.1 CROSS REFERENCE

TEST REQUIREMENT

- a) Except where specifically stated otherwise within this subpart, the provisions of Subparts A and B and of Sections 15.201 through 15.204 and Section 15.207 of Subpart C of this part apply to unlicensed UWB intentional radiators. The provisions of Sections 15.35(c) and 15.205 do not apply to devices operated under this subpart. The provisions of Footnote US 246 to the Table of Frequency Allocations contained in Section 2.106 of this chapter does not apply to devices operated under this subpart.
- b) The requirements of Subpart F apply only to the radio transmitter, i.e., the intentional radiator, contained in the UWB device. Other aspects of the operation of a UWB device may be subject to requirements contained elsewhere in this chapter. In particular, a UWB device that contains digital circuitry not directly associated with the operation of the transmitter also is subject to the requirements for unintentional radiators in Subpart B of this chapter. Similarly, an associated receiver that operates (tunes) within the frequency range 30 MHz to 960 MHz is subject to the requirements in Subpart B of this chapter.

REQUIREMENT	DESCRIPTION
15.505(a)	Equipment under test complies with all the relevant and applicable requirements of Subpart A, Subpart B and Section 15.201 through 15.204 and Section 15.207 of Subpart C.
15.505(b)	The Digital circuitry portion of the EUT has been tested and verified to comply with 47 CFR Part 15, subpart B.

TEST RESULT

The EUT meets the requirements of sections 15.505.



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

7.2 MARKETING OF UWB EQUIPMENT

TEST REQUIREMENT

In some cases, the operation of UWB devices is limited to specific parties, e.g., law enforcement, fire and rescue organizations operating under the auspices of a state or local government. The marketing of UWB devices must be directed solely to parties eligible to operate the equipment. The responsible party, as defined in Section 2.909 of this chapter, is responsible for ensuring that the equipment is marketed only to eligible parties. Marketing of the equipment in any other manner may be considered grounds for revocation of the grant of certification issued for the equipment

REQUIREMENT	DESCRIPTION
§ 15.507 § 2.909	The responsible party is properly informed about the responsible for ensuring that the equipment is marketed only to eligible parties, and provide correct information on the customers and users. (See Important note for the US customers of the “OPERA DUO - User manual”)


TEST RESULT

The EUT meets the requirements of sections 15.507.

7.3 PULSE REPETITION FREQUENCY (PRF)

TEST REQUIREMENT

Test definition	Pulse Repetition Frequency (PRF) is the trigger repetition frequency
Test setup	ANSI C63.4
Test facility	Open Area Test Site (OATS)
Test distance	3 meters
RBW bandwidth	30 kHz
VBW bandwidth	30 kHz
Detector	A-Peak
Deviation to test procedure	None
EUT operating condition	#1
Remark	None

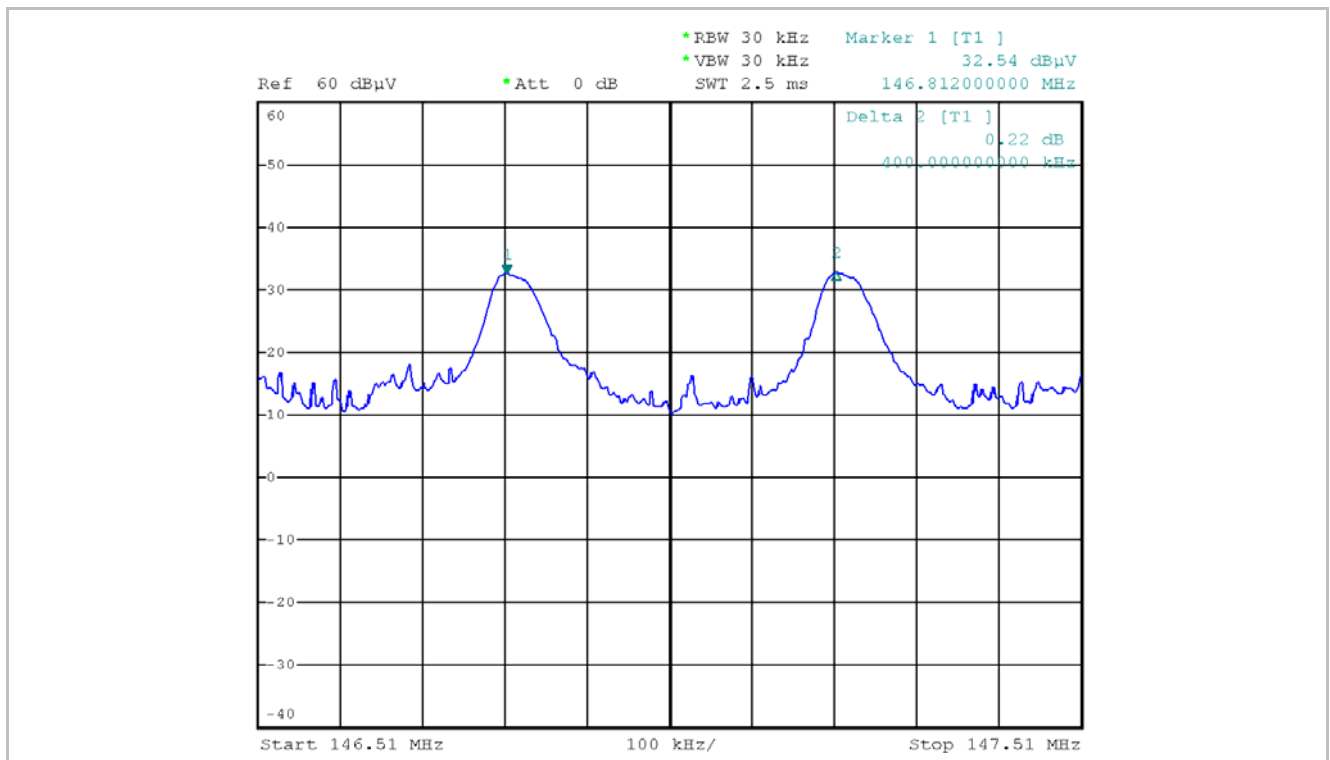

PRF Declared	PRF Measured	Result
400 kHz	400 kHz	PASS



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

7.4 UWB BANDWIDTH

TEST REQUIREMENT	
UWB definition	The bandwidth of a UWB emission is defined by the points on the emission spectrum where the amplitude is 10 dB below the maximum emission amplitude (i.e., the -10 dB points). In cases where the measured emission spectrum contains multiple (more than two) -10 dB points, the outermost points define the bandwidth (i.e., the widest bandwidth is assumed).
Test setup	ANSI C63.4
Test facility	Open Area Test Site (OATS)
Test distance	3 meters
RBW bandwidth	1 MHz
VBW bandwidth	3 MHz
Detector	Peak
Deviation to test procedure	None
EUT operating condition	#1
Remark	Frequency span is large enough to display a full spectrum of the RF emission

LIMITS
The UWB bandwidth of an imaging system operating under the provisions of this section must be below 10.6 GHz.



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

TEST PROCEDURE

- 1) The receiving antenna which varied from 1 to 4 m to find the highest emission is positioned 3 m away from the EUT.
- 2) Measure the Highest radiated emission at f_M as described in the test No. 8.
- 3) Recorded the upper and lower frequency that are at the side of the band bounded by the points at 10 dB below the highest radiated UWB emission level.

Measuring the bandwidth of a UWB device using a radiated test set-up, it is imperative that appropriate adjustments be made to the measured amplitude levels to account for the frequency-dependent components of the measurement system (e.g., antenna gain or factor, pre-amplifier gain, cable loss, etc). Since UWB emissions can have bandwidths several GHz wide, these frequency-dependent characteristics can vary dramatically over the fundamental emission.

According to the nature of the broadband emission characteristics, significant care must be taken to capture the true spectrum of emission, extremely narrow sweep widths is recommended.

- 4) The UWB bandwidth is the different of the upper and lower frequency recorded.

SUMMARY OF TEST RESULT DATA

Frequency of Maximum emission level f_M	Receiver Antenna polarization	Maximum emission level @ 1 MHz RBW (Peak/QP)	Lower and Upper -10 dB frequencies		10 dB Bandwidth	Result
			Lower f_L	Upper f_H		
(MHz)	[V/H]	(dB μ V/m)	(MHz)	(MHz)	(MHz)	
141.60	V	32.81	67.20	279.24	212.04	PASS

TEST RESULT

The EUT meets the requirements of sections 15.509(a)


7.5 TRANSMISSION DURATION

TEST REQUIREMENT

- c) A GPR that is designed to be operated while being hand held and a wall imaging system shall contain a manually operated switch that causes the transmitter to cease operation within 10 seconds of being released by the operator. In lieu of a switch located on the imaging system, it is permissible to operate an imaging system by remote control provided the imaging system ceases transmission within 10 seconds of the remote switch being released by the operator

DESCRIPTION

The equipment is not an hand held device. When normal use is interrupted, the equipment is deactivated by a software switch.

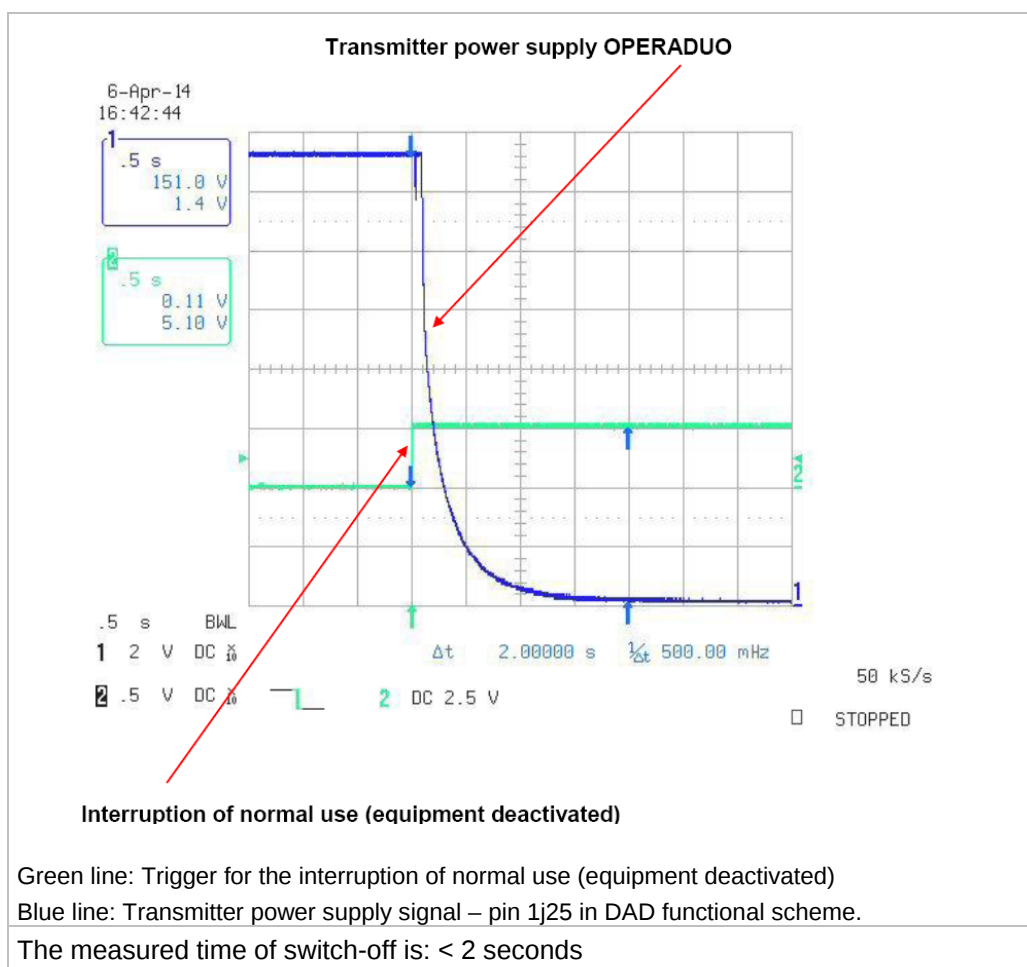

TEST RESULT

The EUT meets the requirements of sections 15.509(c)

7.5 RADIATED DISTURBANCES ≤ 960 MHz

TEST REQUIREMENT	
Test definition	The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in Section 15.209
Test setup	ANSI C63.4
Test facility	Open Area Test Site (OATS)
Test distance	3 meters
RBW bandwidth	120 kHz
VBW bandwidth	1 MHz
Detector	Quasi-Peak
EUT operating condition	#1
Remark	None

LIMITS			
Frequency (MHz)	Field Strengths Limits (dB μ V/m)	Measuring RBW (kHz)	Distance (meters)
0.009-0.490	67.6-20*Logf(kHz)	1	300
0.490-1.705	87.6-20*Logf(kHz)	9	30
1.705-30	29.5	9	30
30-88	40.0	120	3
88-216	43.5	120	3
216-960	46.0	120	3

TEST PROCEDURE

- 1) The EUT was placed on sandpit area filled with dry sand initially placed in front of the ground plane (0° degree position)
- 2) The receiving antenna which varied from 1 to 4 m to find the highest emission is positioned 3 m away from the EUT.
- 3) The receiving antenna was positioned in horizontal polarization.
- 4) The measurements were made with the detector set to peak with a bandwidth of 120 kHz during monitoring the frequency range below 960 MHz.
- 5) Upon detection of a suspect emission signal, its amplitude and frequency were noted.
- 6) It is recommended to demodulate the received signals for suitable discrimination of the ambient emission from the EUT emission.
- 7) At the worst case combination of the EUT operating mode and antenna height, the field strength measure was recorded. At each of the frequencies where a field strength was recorded the final measurement was performed with a Quasi-Peak detector.
- 8) The receiving antenna was positioned in vertical polarization and the steps 2 to 6 was repeated.
- 9) The EUT was rotating from 0° to 360° degrees with 45° step increment and the steps 4 to 7 was repeated.
- 10) All the worst case combination field strength emissions founded of each EUT position and antenna polarization was recorded in the following table and compared with the applicable limits.

SUMMARY OF TEST RESULT DATA

Frequency (MHz)	EUT Position (angle °)	Antenna Polarization (V/H)	Correcting reading (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
41.16	180	H	38.49	40	-1.51	PASS
61.62	45	V	35.03	40	-4.97	PASS
72.78	90	V	37.73	40	-2.27	PASS
141.60	225	V	43.19	43.5	-0.31	PASS
147.18	225	V	43.31	43.5	-0.19	PASS
154.62	90	V	43.06	43.5	-0.44	PASS
234.60	315	V	43.79	46	-2.21	PASS
281.10	314	V	40.67	46	-5.33	PASS
392.70	45	V	35.66	46	-10.34	PASS

Remark: Ambient signal were detected in the different frequency ranges, each of measured signal close or above the limits was examined with relation to the EUT.

TEST RESULT

The EUT meets the requirements of sections 15.509(d) and 15.209.

TEST DATA DETAILS

EUT Position (angle °)			0	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
41.16	18.56	17.1	0.66	0	36.32	40.00	-3.68
61.62	15.12	10.9	0.81	0	26.83	40.00	-13.17
72.78	24.53	9.1	0.87	0	34.50	40.00	-5.50
141.60	25.91	9.8	1.13	0	36.84	43.50	-6.66
147.18	27.00	9.5	1.13	0	37.63	43.50	-5.87
154.62	28.78	8.2	1.18	0	38.16	43.50	-5.34
234.60	19.74	11.6	1.43	0	32.77	46.00	-13.23
281.10	19.22	12.4	1.55	0	33.17	46.00	-12.83
392.70	16.57	15	1.81	0	33.38	46.00	-12.62
818.64	11.00	20.1	2.55	0	33.65	46.00	-12.35
894.90	12.72	20.9	2.65	0	36.27	46.00	-9.73

EUT Position (angle °)			45	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
41.16	12.54	17.1	0.66	0	30.30	40.00	-9.70
61.62	14.09	10.9	0.81	0	25.80	40.00	-14.20
72.78	26.06	9.1	0.87	0	36.03	40.00	-3.97
141.60	21.27	9.8	1.13	0	32.20	43.50	-11.30
147.18	31.44	9.5	1.13	0	42.07	43.50	-1.43
154.62	20.44	8.2	1.18	0	29.82	43.50	-13.68
234.60	20.29	11.6	1.43	0	33.32	46.00	-12.68
281.10	19.61	12.4	1.55	0	33.56	46.00	-12.44
392.70	14.75	15	1.81	0	31.56	46.00	-14.44
818.64	19.35	20.1	2.55	0	42.00	46.00	-4.00
894.90	12.07	20.9	2.65	0	35.62	46.00	-10.38

EUT Position (angle °)			90	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
41.16	12.71	17.1	0.66	0	30.47	40.00	-9.53
61.62	13.95	10.9	0.81	0	25.66	40.00	-14.34
72.78	17.65	9.1	0.87	0	27.62	40.00	-12.38
141.60	20.55	9.8	1.13	0	31.48	43.50	-12.02
147.18	19.38	9.5	1.13	0	30.01	43.50	-13.49
154.62	25.16	8.2	1.18	0	34.54	43.50	-8.96
234.60	19.71	11.6	1.43	0	32.74	46.00	-13.26
281.10	20.20	12.4	1.55	0	34.15	46.00	-11.85
392.70	16.17	15	1.81	0	32.98	46.00	-13.02
818.64	19.14	20.1	2.55	0	41.79	46.00	-4.21
894.90	15.64	20.9	2.65	0	39.19	46.00	-6.81

EUT Position (angle °)			135	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
41.16	12.53	17.1	0.66	0	30.29	40.00	-9.71
61.62	14.39	10.9	0.81	0	26.10	40.00	-13.90
72.78	20.47	9.1	0.87	0	30.44	40.00	-9.56
141.60	27.60	9.8	1.13	0	38.53	43.50	-4.97
147.18	28.66	9.5	1.13	0	39.29	43.50	-4.21
154.62	32.28	8.2	1.18	0	41.66	43.50	-1.84
234.60	22.91	11.6	1.43	0	35.94	46.00	-10.06
281.10	22.95	12.4	1.55	0	36.90	46.00	-9.10
392.70	15.45	15	1.81	0	32.26	46.00	-13.74
818.64	10.42	20.1	2.55	0	33.07	46.00	-12.93
894.90	11.42	20.9	2.65	0	34.97	46.00	-11.03

EUT Position (angle °)			180	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
41.16	20.73	17.1	0.66	0	38.49	40.00	-1.51
61.62	13.63	10.9	0.81	0	25.34	40.00	-14.66
72.78	17.29	9.1	0.87	0	27.26	40.00	-12.74
141.60	28.54	9.8	1.13	0	39.47	43.50	-4.03
147.18	29.55	9.5	1.13	0	40.18	43.50	-3.32
154.62	30.72	8.2	1.18	0	40.10	43.50	-3.40
234.60	26.31	11.6	1.43	0	39.34	46.00	-6.66
281.10	24.26	12.4	1.55	0	38.21	46.00	-7.79
392.70	17.09	15	1.81	0	33.90	46.00	-12.10
818.64	19.55	20.1	2.55	0	42.20	46.00	-3.80
894.90	19.84	20.9	2.65	0	43.39	46.00	-2.61

EUT Position (angle °)			225	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
41.16	12.62	17.1	0.66	0	30.38	40.00	-9.62
61.62	13.45	10.9	0.81	0	25.16	40.00	-14.84
72.78	19.86	9.1	0.87	0	29.83	40.00	-10.17
141.60	25.90	9.8	1.13	0	36.83	43.50	-6.67
147.18	25.07	9.5	1.13	0	35.70	43.50	-7.80
154.62	27.66	8.2	1.18	0	37.04	43.50	-6.46
234.60	23.84	11.6	1.43	0	36.87	46.00	-9.13
281.10	18.09	12.4	1.55	0	32.04	46.00	-13.96
392.70	14.48	15	1.81	0	31.29	46.00	-14.71
818.64	10.13	20.1	2.55	0	32.78	46.00	-13.22
894.90	10.44	20.9	2.65	0	33.99	46.00	-12.01

EUT Position (angle °)			270	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
41.16	12.76	17.1	0.66	0	30.52	40.00	-9.48
61.62	12.97	10.9	0.81	0	24.68	40.00	-15.32
72.78	25.91	9.1	0.87	0	35.88	40.00	-4.12
141.60	17.39	9.8	1.13	0	28.32	43.50	-15.18
147.18	18.09	9.5	1.13	0	28.72	43.50	-14.78
154.62	22.77	8.2	1.18	0	32.15	43.50	-11.35
234.60	22.54	11.6	1.43	0	35.57	46.00	-10.43
281.10	20.94	12.4	1.55	0	34.89	46.00	-11.11
392.70	16.51	15	1.81	0	33.32	46.00	-12.68
818.64	17.71	20.1	2.55	0	40.36	46.00	-5.64
894.90	20.77	20.9	2.65	0	44.32	46.00	-1.68

EUT Position (angle °)			315	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
41.16	12.31	17.1	0.66	0	30.07	40.00	-9.93
61.62	22.97	10.9	0.81	0	34.68	40.00	-5.32
72.78	24.25	9.1	0.87	0	34.22	40.00	-5.78
141.60	26.16	9.8	1.13	0	37.09	43.50	-6.41
147.18	27.23	9.5	1.13	0	37.86	43.50	-5.64
154.62	28.92	8.2	1.18	0	38.30	43.50	-5.20
234.60	24.13	11.6	1.43	0	37.16	46.00	-8.84
281.10	19.38	12.4	1.55	0	33.33	46.00	-12.67
392.70	16.40	15	1.81	0	33.21	46.00	-12.79
818.64	18.55	20.1	2.55	0	41.20	46.00	-4.80
894.90	15.33	20.9	2.65	0	38.88	46.00	-7.12

EUT Position (angle °)			0	Antenna Polarization			V
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
41.16	18.58	17.1	0.66	0	36.34	40.00	-3.66
61.62	21.48	10.9	0.81	0	33.19	40.00	-6.81
72.78	23.30	9.1	0.87	0	33.27	40.00	-6.73
141.60	26.54	9.8	1.13	0	37.47	43.50	-6.03
147.18	27.00	9.5	1.13	0	37.63	43.50	-5.87
154.62	27.48	8.2	1.18	0	36.86	43.50	-6.64
234.60	17.87	11.6	1.43	0	30.90	46.00	-15.10
281.10	22.57	12.4	1.55	0	36.52	46.00	-9.48
392.70	14.35	15	1.81	0	31.16	46.00	-14.84
818.64	14.64	20.1	2.55	0	37.29	46.00	-8.71
894.90	12.61	20.9	2.65	0	36.16	46.00	-9.84

EUT Position (angle °)			45	Antenna Polarization			V
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
41.16	19.20	17.1	0.66	0	36.96	40.00	-3.04
61.62	23.32	10.9	0.81	0	35.03	40.00	-4.97
72.78	27.70	9.1	0.87	0	37.67	40.00	-2.33
141.60	22.91	9.8	1.13	0	33.84	43.50	-9.66
147.18	31.80	9.5	1.13	0	42.43	43.50	-1.07
154.62	30.33	8.2	1.18	0	39.71	43.50	-3.79
234.60	20.66	11.6	1.43	0	33.69	46.00	-12.31
281.10	26.43	12.4	1.55	0	40.38	46.00	-5.62
392.70	18.85	15	1.81	0	35.66	46.00	-10.34
818.64	11.04	20.1	2.55	0	33.69	46.00	-12.31
894.90	13.56	20.9	2.65	0	37.11	46.00	-8.89

EUT Position (angle °)			90	Antenna Polarization			V
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
41.16	16.43	17.1	0.66	0	34.19	40.00	-5.81
61.62	20.39	10.9	0.81	0	32.10	40.00	-7.90
72.78	27.76	9.1	0.87	0	37.73	40.00	-2.27
141.60	26.51	9.8	1.13	0	37.44	43.50	-6.06
147.18	32.61	9.5	1.13	0	43.24	43.50	-0.26
154.62	33.68	8.2	1.18	0	43.06	43.50	-0.44
234.60	27.88	11.6	1.43	0	40.91	46.00	-5.09
281.10	20.62	12.4	1.55	0	34.57	46.00	-11.43
392.70	18.28	15	1.81	0	35.09	46.00	-10.91
818.64	12.28	20.1	2.55	0	34.93	46.00	-11.07
894.90	11.00	20.9	2.65	0	34.55	46.00	-11.45

EUT Position (angle °)			135	Antenna Polarization			V
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
41.16	13.52	17.1	0.66	0	31.28	40.00	-8.72
61.62	16.78	10.9	0.81	0	28.49	40.00	-11.51
72.78	23.95	9.1	0.87	0	33.92	40.00	-6.08
141.60	26.00	9.8	1.13	0	36.93	43.50	-6.57
147.18	29.46	9.5	1.13	0	40.09	43.50	-3.41
154.62	31.16	8.2	1.18	0	40.54	43.50	-2.96
234.60	27.21	11.6	1.43	0	40.24	46.00	-5.76
281.10	24.43	12.4	1.55	0	38.38	46.00	-7.62
392.70	15.67	15	1.81	0	32.48	46.00	-13.52
818.64	12.73	20.1	2.55	0	35.38	46.00	-10.62
894.90	17.05	20.9	2.65	0	40.60	46.00	-5.40

EUT Position (angle °)			180	Antenna Polarization			V
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
41.16	13.61	17.1	0.66	0	31.37	40.00	-8.63
61.62	14.43	10.9	0.81	0	26.14	40.00	-13.86
72.78	24.19	9.1	0.87	0	34.16	40.00	-5.84
141.60	23.33	9.8	1.13	0	34.26	43.50	-9.24
147.18	24.68	9.5	1.13	0	35.31	43.50	-8.19
154.62	25.99	8.2	1.18	0	35.37	43.50	-8.13
234.60	20.81	11.6	1.43	0	33.84	46.00	-12.16
281.10	18.64	12.4	1.55	0	32.59	46.00	-13.41
392.70	15.36	15	1.81	0	32.17	46.00	-13.83
818.64	20.81	20.1	2.55	0	43.46	46.00	-2.54
894.90	19.86	20.9	2.65	0	43.41	46.00	-2.59

EUT Position (angle °)			225	Antenna Polarization			V
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
41.16	13.89	17.1	0.66	0	31.65	40.00	-8.35
61.62	18.34	10.9	0.81	0	30.05	40.00	-9.95
72.78	26.78	9.1	0.87	0	36.75	40.00	-3.25
141.60	32.26	9.8	1.13	0	43.19	43.50	-0.31
147.18	32.68	9.5	1.13	0	43.31	43.50	-0.19
154.62	32.31	8.2	1.18	0	41.69	43.50	-1.81
234.60	27.75	11.6	1.43	0	40.78	46.00	-5.22
281.10	25.16	12.4	1.55	0	39.11	46.00	-6.89
392.70	17.07	15	1.81	0	33.88	46.00	-12.12
818.64	21.71	20.1	2.55	0	44.36	46.00	-1.64
894.90	18.08	20.9	2.65	0	41.63	46.00	-4.37

EUT Position (angle °)			270	Antenna Polarization			V
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
41.16	18.45	17.1	0.66	0	36.21	40.00	-3.79
61.62	19.35	10.9	0.81	0	31.06	40.00	-8.94
72.78	27.55	9.1	0.87	0	37.52	40.00	-2.48
141.60	32.18	9.8	1.13	0	43.11	43.50	-0.39
147.18	29.93	9.5	1.13	0	40.56	43.50	-2.94
154.62	29.70	8.2	1.18	0	39.08	43.50	-4.42
234.60	24.26	11.6	1.43	0	37.29	46.00	-8.71
281.10	20.56	12.4	1.55	0	34.51	46.00	-11.49
392.70	18.73	15	1.81	0	35.54	46.00	-10.46
818.64	13.69	20.1	2.55	0	36.34	46.00	-9.66
894.90	12.61	20.9	2.65	0	36.16	46.00	-9.84

EUT Position (angle °)			315	Antenna Polarization			V
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
41.16	15.40	17.1	0.66	0	33.16	40.00	-6.84
61.62	18.86	10.9	0.81	0	30.57	40.00	-9.43
72.78	25.57	9.1	0.87	0	35.54	40.00	-4.46
141.60	25.58	9.8	1.13	0	36.51	43.50	-6.99
147.18	27.68	9.5	1.13	0	38.31	43.50	-5.19
154.62	28.41	8.2	1.18	0	37.79	43.50	-5.71
234.60	30.76	11.6	1.43	0	43.79	46.00	-2.21
281.10	26.72	12.4	1.55	0	40.67	46.00	-5.33
392.70	18.09	15	1.81	0	34.90	46.00	-11.10
818.64	21.70	20.1	2.55	0	44.35	46.00	-1.65
894.90	13.31	20.9	2.65	0	36.86	46.00	-9.14

7.6 RADIATED DISTURBANCES > 960 MHz

TEST REQUIREMENT	
Test definition	The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz.
Test setup	ANSI C63.4
Test facility	Open Area Test Site (OATS)
Test distance	1 meter
RBW bandwidth	1 MHz
VBW bandwidth	1 MHz
Detector	RMS
EUT operating condition	#1
Remark	None

LIMITS			
Frequency (MHz)	EIRP @ 3 meters (1 MHz BW) (dBm)	Field strength @ 3 meters (1 MHz BW) (dBμV/m)	Field strength @ 1 meters (1 MHz BW) (dBμV/m)
960-1610	-65.3	29.9	39.4
1610-1990	-53.3	41.9	51.4
1990-3100	-51.3	43.9	53.4
3100-10600	-41.3	53.9	63.4
Above 10600	-51.3	43.9	53.4

Note: The limits were converted from EIRP to field strength at 3 and 1 meter according to FCC 15.503(k).

TEST PROCEDURE

- 1) The EUT was placed on sandpit area filled with dry sand initially placed in front of the ground plane (0° degree position)
- 2) The receiving antenna is placed at 1 meter away from the EUT and it is pointed in the direction of the radiating head with an inclination of -10° to find the highest emission.
- 3) The receiving antenna was positioned in horizontal polarization.
- 4) The measurements were made with the detector set to RMS with a bandwidth of 1 MHz during monitoring the frequency range above 960 MHz.
- 5) Upon detection of a suspect emission signal, its amplitude and frequency were noted.
- 6) It is recommended to demodulate the received signals for suitable discrimination of the ambient emission from the EUT emission.
- 7) At the worst case combination of the EUT operating mode and antenna height, the field strength measure was recorded.
- 8) The receiving antenna was positioned in vertical polarization and the steps 2 to 6 was repeated.
- 9) The EUT was rotating from 0° to 360° degrees with 45° step increment and the steps 4 to 7 was repeated.
- 10) All the worst case combination field strength emissions founded of each EUT position and antenna polarization was recorded in the following table and compared with the applicable limits.

SUMMARY OF TEST RESULT DATA

All maximum Field strength emission are found at the following test set-up conditions

Frequency (MHz)	EUT Position (angle °)	Antenna Polarization (V/H)	Correcting reading (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
984,16	45	H	39,12	39,40	-0,28	PASS
996,40	180	H	36,99	39,40	-2,41	PASS
1008,32	315	H	38,16	39,40	-1,24	PASS
1044,56	0	H	38,78	39,40	-0,62	PASS
1189,52	315	H	37,87	39,40	-1,53	PASS
1213,68	315	H	37,83	39,40	-1,57	PASS
1358,64	135	V	34,93	39,40	-4,47	PASS
1539,84	90	V	34,12	39,40	-5,28	PASS
1612,32	180	H	36,38	51,40	-15,02	PASS
1708,96	180	H	37,08	51,40	-14,32	PASS
1757,28	180	H	35,14	51,40	-16,26	PASS
2010,96	225	H	41,36	53,40	-12,04	PASS
2059,34	315	H	37,21	53,40	-16,19	PASS
2240,48	315	H	37,64	53,40	-15,76	PASS
2808,24	225	H	37,31	53,40	-16,09	PASS
3061,92	180	H	33,02	53,40	-20,38	PASS
3569,28	0	H	34,28	63,40	-29,12	PASS
4076,64	0	H	33,23	63,40	-30,17	PASS
4523,60	0	H	34,34	63,40	-29,06	PASS
5163,84	0	H	36,07	63,40	-27,33	PASS
5453,76	0	H	42,66	63,40	-20,74	PASS
6033,60	45	V	38,69	63,40	-24,71	PASS
6589,28	0	H	40,78	63,40	-22,62	PASS

TEST RESULT

The EUT meets the requirements of sections 15.509(d)

TEST DATA DETAILS

EUT Position (angle °)			0	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
984.16	53.80	24.62	-2.89	39.17	36.36	39.40	-3.04
996.40	51.93	24.65	-2.91	39.15	34.52	39.40	-4.88
1008.32	54.64	24.75	-2.94	39.12	37.33	39.40	-2.07
1044.56	56.03	24.79	-2.99	39.05	38.78	39.40	-0.62
1189.52	51.63	24.99	-3.15	38.75	34.72	39.40	-4.68
1213.68	49.77	25.12	-3.18	38.7	33.01	39.40	-6.39
1358.64	49.19	25.28	-3.36	38.43	32.68	39.40	-6.72
1539.84	49.41	25.57	-3.55	38.1	33.33	39.40	-6.07
1612.32	49.24	25.7	-3.67	37.97	33.30	51.40	-18.10
1708.96	49.95	25.83	-3.75	37.79	34.24	51.40	-17.16
1757.28	48.51	25.9	-3.83	37.75	32.83	51.40	-18.57
2010.96	55.52	26.39	-4.1	37.57	40.24	53.40	-13.16
2059.34	49.45	26.56	-4.14	37.54	34.33	53.40	-19.07
2240.48	49.24	26.97	-4.33	37.6	34.28	53.40	-19.12
2808.24	47.99	28.41	-4.92	37.64	33.84	53.40	-19.56
3061.92	46.43	28.84	-5.17	37.58	32.52	53.40	-20.88
3569.28	47.77	29.43	-5.68	37.24	34.28	63.40	-29.12
4076.64	45.63	30.64	-6.07	36.97	33.23	63.40	-30.17
4523.60	45.75	31.84	-6.43	36.82	34.34	63.40	-29.06
5163.84	46.85	32.88	-6.88	36.78	36.07	63.40	-27.33
5453.76	53.98	32.51	-7.07	36.76	42.66	63.40	-20.74
6033.60	48.74	33.96	-7.42	36.84	38.44	63.40	-24.96
6589.28	49.36	36.13	-7.72	36.99	40.78	63.40	-22.62



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

EUT Position (angle °)			45	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
984.16	56.56	24.62	-2.89	39.17	39.12	39.40	-0.28
996.40	54.10	24.65	-2.91	39.15	36.69	39.40	-2.71
1008.32	53.42	24.75	-2.94	39.12	36.11	39.40	-3.29
1044.56	51.16	24.79	-2.99	39.05	33.91	39.40	-5.49
1189.52	49.60	24.99	-3.15	38.75	32.69	39.40	-6.71
1213.68	50.63	25.12	-3.18	38.7	33.87	39.40	-5.53
1358.64	46.82	25.28	-3.36	38.43	30.31	39.40	-9.09
1539.84	48.45	25.57	-3.55	38.1	32.37	39.40	-7.03
1612.32	48.09	25.7	-3.67	37.97	32.15	51.40	-19.25
1708.96	49.42	25.83	-3.75	37.79	33.71	51.40	-17.69
1757.28	48.34	25.9	-3.83	37.75	32.66	51.40	-18.74
2010.96	55.00	26.39	-4.1	37.57	39.72	53.40	-13.68
2059.34	49.27	26.56	-4.14	37.54	34.15	53.40	-19.25
2240.48	48.90	26.97	-4.33	37.6	33.94	53.40	-19.46
2808.24	50.50	28.41	-4.92	37.64	36.35	53.40	-17.05
3061.92	46.40	28.84	-5.17	37.58	32.49	53.40	-20.91
3569.28	47.29	29.43	-5.68	37.24	33.80	63.40	-29.60
4076.64	45.32	30.64	-6.07	36.97	32.92	63.40	-30.48
4523.60	44.97	31.84	-6.43	36.82	33.56	63.40	-29.84
5163.84	46.58	32.88	-6.88	36.78	35.80	63.40	-27.60
5453.76	47.44	32.51	-7.07	36.76	36.12	63.40	-27.28
6033.60	48.25	33.96	-7.42	36.84	37.95	63.40	-25.45
6589.28	49.20	36.13	-7.72	36.99	40.62	63.40	-22.78



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

EUT Position (angle °)			90	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
984.16	54.47	24.62	-2.89	39.17	37.03	39.40	-2.37
996.40	52.38	24.65	-2.91	39.15	34.97	39.40	-4.43
1008.32	52.78	24.75	-2.94	39.12	35.47	39.40	-3.93
1044.56	52.58	24.79	-2.99	39.05	35.33	39.40	-4.07
1189.52	49.70	24.99	-3.15	38.75	32.79	39.40	-6.61
1213.68	49.67	25.12	-3.18	38.7	32.91	39.40	-6.49
1358.64	49.10	25.28	-3.36	38.43	32.59	39.40	-6.81
1539.84	48.21	25.57	-3.55	38.1	32.13	39.40	-7.27
1612.32	48.15	25.7	-3.67	37.97	32.21	51.40	-19.19
1708.96	50.13	25.83	-3.75	37.79	34.42	51.40	-16.98
1757.28	48.30	25.9	-3.83	37.75	32.62	51.40	-18.78
2010.96	54.13	26.39	-4.1	37.57	38.85	53.40	-14.55
2059.34	48.83	26.56	-4.14	37.54	33.71	53.40	-19.69
2240.48	49.18	26.97	-4.33	37.6	34.22	53.40	-19.18
2808.24	47.44	28.41	-4.92	37.64	33.29	53.40	-20.11
3061.92	46.35	28.84	-5.17	37.58	32.44	53.40	-20.96
3569.28	47.38	29.43	-5.68	37.24	33.89	63.40	-29.51
4076.64	45.45	30.64	-6.07	36.97	33.05	63.40	-30.35
4523.60	45.27	31.84	-6.43	36.82	33.86	63.40	-29.54
5163.84	46.29	32.88	-6.88	36.78	35.51	63.40	-27.89
5453.76	47.64	32.51	-7.07	36.76	36.32	63.40	-27.08
6033.60	48.89	33.96	-7.42	36.84	38.59	63.40	-24.81
6589.28	48.95	36.13	-7.72	36.99	40.37	63.40	-23.03

EUT Position (angle °)			135	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
984.16	56.14	24.62	-2.89	39.17	38.70	39.40	-0.70
996.40	54.07	24.65	-2.91	39.15	36.66	39.40	-2.74
1008.32	54.76	24.75	-2.94	39.12	37.45	39.40	-1.95
1044.56	51.82	24.79	-2.99	39.05	34.57	39.40	-4.83
1189.52	51.74	24.99	-3.15	38.75	34.83	39.40	-4.57
1213.68	50.48	25.12	-3.18	38.7	33.72	39.40	-5.68
1358.64	48.85	25.28	-3.36	38.43	32.34	39.40	-7.06
1539.84	46.54	25.57	-3.55	38.1	30.46	39.40	-8.94
1612.32	47.53	25.7	-3.67	37.97	31.59	51.40	-19.81
1708.96	49.35	25.83	-3.75	37.79	33.64	51.40	-17.76
1757.28	46.71	25.9	-3.83	37.75	31.03	51.40	-20.37
2010.96	56.10	26.39	-4.1	37.57	40.82	53.40	-12.58
2059.34	48.94	26.56	-4.14	37.54	33.82	53.40	-19.58
2240.48	49.49	26.97	-4.33	37.6	34.53	53.40	-18.87
2808.24	47.76	28.41	-4.92	37.64	33.61	53.40	-19.79
3061.92	46.72	28.84	-5.17	37.58	32.81	53.40	-20.59
3569.28	47.22	29.43	-5.68	37.24	33.73	63.40	-29.67
4076.64	45.32	30.64	-6.07	36.97	32.92	63.40	-30.48
4523.60	45.16	31.84	-6.43	36.82	33.75	63.40	-29.65
5163.84	46.05	32.88	-6.88	36.78	35.27	63.40	-28.13
5453.76	47.36	32.51	-7.07	36.76	36.04	63.40	-27.36
6033.60	48.22	33.96	-7.42	36.84	37.92	63.40	-25.48
6589.28	48.77	36.13	-7.72	36.99	40.19	63.40	-23.21



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

EUT Position (angle °)			180	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
984.16	55.89	24.62	-2.89	39.17	38.45	39.40	-0.95
996.40	54.40	24.65	-2.91	39.15	36.99	39.40	-2.41
1008.32	55.09	24.75	-2.94	39.12	37.78	39.40	-1.62
1044.56	52.84	24.79	-2.99	39.05	35.59	39.40	-3.81
1189.52	52.95	24.99	-3.15	38.75	36.04	39.40	-3.36
1213.68	52.26	25.12	-3.18	38.7	35.50	39.40	-3.90
1358.64	46.98	25.28	-3.36	38.43	30.47	39.40	-8.93
1539.84	48.68	25.57	-3.55	38.1	32.60	39.40	-6.80
1612.32	52.32	25.7	-3.67	37.97	36.38	51.40	-15.02
1708.96	52.79	25.83	-3.75	37.79	37.08	51.40	-14.32
1757.28	50.82	25.9	-3.83	37.75	35.14	51.40	-16.26
2010.96	55.33	26.39	-4.1	37.57	40.05	53.40	-13.35
2059.34	50.21	26.56	-4.14	37.54	35.09	53.40	-18.31
2240.48	50.19	26.97	-4.33	37.6	35.23	53.40	-18.17
2808.24	47.43	28.41	-4.92	37.64	33.28	53.40	-20.12
3061.92	46.93	28.84	-5.17	37.58	33.02	53.40	-20.38
3569.28	47.65	29.43	-5.68	37.24	34.16	63.40	-29.24
4076.64	45.33	30.64	-6.07	36.97	32.93	63.40	-30.47
4523.60	44.89	31.84	-6.43	36.82	33.48	63.40	-29.92
5163.84	46.08	32.88	-6.88	36.78	35.30	63.40	-28.10
5453.76	47.37	32.51	-7.07	36.76	36.05	63.40	-27.35
6033.60	48.37	33.96	-7.42	36.84	38.07	63.40	-25.33
6589.28	48.73	36.13	-7.72	36.99	40.15	63.40	-23.25

EUT Position (angle °)			225	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
984.16	53.46	24.62	-2.89	39.17	36.02	39.40	-3.38
996.40	52.16	24.65	-2.91	39.15	34.75	39.40	-4.65
1008.32	53.39	24.75	-2.94	39.12	36.08	39.40	-3.32
1044.56	52.62	24.79	-2.99	39.05	35.37	39.40	-4.03
1189.52	51.54	24.99	-3.15	38.75	34.63	39.40	-4.77
1213.68	50.74	25.12	-3.18	38.7	33.98	39.40	-5.42
1358.64	48.87	25.28	-3.36	38.43	32.36	39.40	-7.04
1539.84	49.02	25.57	-3.55	38.1	32.94	39.40	-6.46
1612.32	48.73	25.7	-3.67	37.97	32.79	51.40	-18.61
1708.96	50.54	25.83	-3.75	37.79	34.83	51.40	-16.57
1757.28	47.28	25.9	-3.83	37.75	31.60	51.40	-19.80
2010.96	56.64	26.39	-4.1	37.57	41.36	53.40	-12.04
2059.34	49.47	26.56	-4.14	37.54	34.35	53.40	-19.05
2240.48	49.80	26.97	-4.33	37.6	34.84	53.40	-18.56
2808.24	51.46	28.41	-4.92	37.64	37.31	53.40	-16.09
3061.92	46.47	28.84	-5.17	37.58	32.56	53.40	-20.84
3569.28	47.42	29.43	-5.68	37.24	33.93	63.40	-29.47
4076.64	45.21	30.64	-6.07	36.97	32.81	63.40	-30.59
4523.60	45.21	31.84	-6.43	36.82	33.80	63.40	-29.60
5163.84	46.25	32.88	-6.88	36.78	35.47	63.40	-27.93
5453.76	47.29	32.51	-7.07	36.76	35.97	63.40	-27.43
6033.60	48.17	33.96	-7.42	36.84	37.87	63.40	-25.53
6589.28	48.72	36.13	-7.72	36.99	40.14	63.40	-23.26



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

EUT Position (angle °)			270	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
984.16	52.10	24.62	-2.89	39.17	34.66	39.40	-4.74
996.40	51.70	24.65	-2.91	39.15	34.29	39.40	-5.11
1008.32	52.73	24.75	-2.94	39.12	35.42	39.40	-3.98
1044.56	50.69	24.79	-2.99	39.05	33.44	39.40	-5.96
1189.52	50.20	24.99	-3.15	38.75	33.29	39.40	-6.11
1213.68	49.74	25.12	-3.18	38.7	32.98	39.40	-6.42
1358.64	47.66	25.28	-3.36	38.43	31.15	39.40	-8.25
1539.84	47.26	25.57	-3.55	38.1	31.18	39.40	-8.22
1612.32	47.15	25.7	-3.67	37.97	31.21	51.40	-20.19
1708.96	49.86	25.83	-3.75	37.79	34.15	51.40	-17.25
1757.28	47.15	25.9	-3.83	37.75	31.47	51.40	-19.93
2010.96	56.54	26.39	-4.1	37.57	41.26	53.40	-12.14
2059.34	49.15	26.56	-4.14	37.54	34.03	53.40	-19.37
2240.48	49.97	26.97	-4.33	37.6	35.01	53.40	-18.39
2808.24	48.24	28.41	-4.92	37.64	34.09	53.40	-19.31
3061.92	46.34	28.84	-5.17	37.58	32.43	53.40	-20.97
3569.28	47.11	29.43	-5.68	37.24	33.62	63.40	-29.78
4076.64	45.15	30.64	-6.07	36.97	32.75	63.40	-30.65
4523.60	45.39	31.84	-6.43	36.82	33.98	63.40	-29.42
5163.84	45.97	32.88	-6.88	36.78	35.19	63.40	-28.21
5453.76	47.03	32.51	-7.07	36.76	35.71	63.40	-27.69
6033.60	48.20	33.96	-7.42	36.84	37.90	63.40	-25.50
6589.28	48.72	36.13	-7.72	36.99	40.14	63.40	-23.26

EUT Position (angle °)			315	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
984.16	54.37	24.62	-2.89	39.17	36.93	39.40	-2.47
996.40	53.17	24.65	-2.91	39.15	35.76	39.40	-3.64
1008.32	55.47	24.75	-2.94	39.12	38.16	39.40	-1.24
1044.56	52.05	24.79	-2.99	39.05	34.80	39.40	-4.60
1189.52	54.78	24.99	-3.15	38.75	37.87	39.40	-1.53
1213.68	54.59	25.12	-3.18	38.7	37.83	39.40	-1.57
1358.64	49.77	25.28	-3.36	38.43	33.26	39.40	-6.14
1539.84	48.92	25.57	-3.55	38.1	32.84	39.40	-6.56
1612.32	49.27	25.7	-3.67	37.97	33.33	51.40	-18.07
1708.96	51.75	25.83	-3.75	37.79	36.04	51.40	-15.36
1757.28	47.93	25.9	-3.83	37.75	32.25	51.40	-19.15
2010.96	55.44	26.39	-4.1	37.57	40.16	53.40	-13.24
2059.34	52.33	26.56	-4.14	37.54	37.21	53.40	-16.19
2240.48	52.60	26.97	-4.33	37.6	37.64	53.40	-15.76
2808.24	49.53	28.41	-4.92	37.64	35.38	53.40	-18.02
3061.92	46.92	28.84	-5.17	37.58	33.01	53.40	-20.39
3569.28	47.27	29.43	-5.68	37.24	33.78	63.40	-29.62
4076.64	44.86	30.64	-6.07	36.97	32.46	63.40	-30.94
4523.60	45.16	31.84	-6.43	36.82	33.75	63.40	-29.65
5163.84	46.13	32.88	-6.88	36.78	35.35	63.40	-28.05
5453.76	47.15	32.51	-7.07	36.76	35.83	63.40	-27.57
6033.60	48.15	33.96	-7.42	36.84	37.85	63.40	-25.55
6589.28	48.62	36.13	-7.72	36.99	40.04	63.40	-23.36



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

EUT Position (angle °)			0	Antenna Polarization			V
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
984.16	50.89	24.62	-2.89	39.17	33.45	39.40	-5.95
996.40	50.06	24.65	-2.91	39.15	32.65	39.40	-6.75
1008.32	49.20	24.75	-2.94	39.12	31.89	39.40	-7.51
1044.56	48.04	24.79	-2.99	39.05	30.79	39.40	-8.61
1189.52	45.95	24.99	-3.15	38.75	29.04	39.40	-10.36
1213.68	45.61	25.12	-3.18	38.7	28.85	39.40	-10.55
1358.64	46.78	25.28	-3.36	38.43	30.27	39.40	-9.13
1539.84	45.66	25.57	-3.55	38.1	29.58	39.40	-9.82
1612.32	45.81	25.7	-3.67	37.97	29.87	51.40	-21.53
1708.96	46.83	25.83	-3.75	37.79	31.12	51.40	-20.28
1757.28	46.85	25.9	-3.83	37.75	31.17	51.40	-20.23
2010.96	51.99	26.39	-4.1	37.57	36.71	53.40	-16.69
2059.34	47.81	26.56	-4.14	37.54	32.69	53.40	-20.71
2240.48	48.05	26.97	-4.33	37.6	33.09	53.40	-20.31
2808.24	48.17	28.41	-4.92	37.64	34.02	53.40	-19.38
3061.92	45.72	28.84	-5.17	37.58	31.81	53.40	-21.59
3569.28	47.25	29.43	-5.68	37.24	33.76	63.40	-29.64
4076.64	45.49	30.64	-6.07	36.97	33.09	63.40	-30.31
4523.60	45.13	31.84	-6.43	36.82	33.72	63.40	-29.68
5163.84	46.61	32.88	-6.88	36.78	35.83	63.40	-27.57
5453.76	47.21	32.51	-7.07	36.76	35.89	63.40	-27.51
6033.60	48.90	33.96	-7.42	36.84	38.60	63.40	-24.80
6589.28	48.99	36.13	-7.72	36.99	40.41	63.40	-22.99



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

EUT Position (angle °)			45	Antenna Polarization			V
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
984.16	54.98	24.62	-2.89	39.17	37.54	39.40	-1.86
996.40	52.51	24.65	-2.91	39.15	35.10	39.40	-4.30
1008.32	51.22	24.75	-2.94	39.12	33.91	39.40	-5.49
1044.56	48.83	24.79	-2.99	39.05	31.58	39.40	-7.82
1189.52	48.53	24.99	-3.15	38.75	31.62	39.40	-7.78
1213.68	48.39	25.12	-3.18	38.7	31.63	39.40	-7.77
1358.64	48.83	25.28	-3.36	38.43	32.32	39.40	-7.08
1539.84	50.10	25.57	-3.55	38.1	34.02	39.40	-5.38
1612.32	50.35	25.7	-3.67	37.97	34.41	51.40	-16.99
1708.96	50.05	25.83	-3.75	37.79	34.34	51.40	-17.06
1757.28	49.71	25.9	-3.83	37.75	34.03	51.40	-17.37
2010.96	53.25	26.39	-4.1	37.57	37.97	53.40	-15.43
2059.34	49.55	26.56	-4.14	37.54	34.43	53.40	-18.97
2240.48	48.82	26.97	-4.33	37.6	33.86	53.40	-19.54
2808.24	48.28	28.41	-4.92	37.64	34.13	53.40	-19.27
3061.92	45.36	28.84	-5.17	37.58	31.45	53.40	-21.95
3569.28	47.38	29.43	-5.68	37.24	33.89	63.40	-29.51
4076.64	45.42	30.64	-6.07	36.97	33.02	63.40	-30.38
4523.60	45.29	31.84	-6.43	36.82	33.88	63.40	-29.52
5163.84	46.21	32.88	-6.88	36.78	35.43	63.40	-27.97
5453.76	47.30	32.51	-7.07	36.76	35.98	63.40	-27.42
6033.60	48.99	33.96	-7.42	36.84	38.69	63.40	-24.71
6589.28	48.93	36.13	-7.72	36.99	40.35	63.40	-23.05



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

EUT Position (angle °)			90	Antenna Polarization			V
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
984.16	54.78	24.62	-2.89	39.17	37.34	39.40	-2.06
996.40	50.74	24.65	-2.91	39.15	33.33	39.40	-6.07
1008.32	50.97	24.75	-2.94	39.12	33.66	39.40	-5.74
1044.56	53.80	24.79	-2.99	39.05	36.55	39.40	-2.85
1189.52	48.58	24.99	-3.15	38.75	31.67	39.40	-7.73
1213.68	49.28	25.12	-3.18	38.7	32.52	39.40	-6.88
1358.64	48.18	25.28	-3.36	38.43	31.67	39.40	-7.73
1539.84	50.20	25.57	-3.55	38.1	34.12	39.40	-5.28
1612.32	49.80	25.7	-3.67	37.97	33.86	51.40	-17.54
1708.96	50.84	25.83	-3.75	37.79	35.13	51.40	-16.27
1757.28	50.31	25.9	-3.83	37.75	34.63	51.40	-16.77
2010.96	54.89	26.39	-4.1	37.57	39.61	53.40	-13.79
2059.34	50.05	26.56	-4.14	37.54	34.93	53.40	-18.47
2240.48	48.89	26.97	-4.33	37.6	33.93	53.40	-19.47
2808.24	47.65	28.41	-4.92	37.64	33.50	53.40	-19.90
3061.92	45.83	28.84	-5.17	37.58	31.92	53.40	-21.48
3569.28	47.20	29.43	-5.68	37.24	33.71	63.40	-29.69
4076.64	45.22	30.64	-6.07	36.97	32.82	63.40	-30.58
4523.60	44.98	31.84	-6.43	36.82	33.57	63.40	-29.83
5163.84	46.24	32.88	-6.88	36.78	35.46	63.40	-27.94
5453.76	47.30	32.51	-7.07	36.76	35.98	63.40	-27.42
6033.60	48.30	33.96	-7.42	36.84	38.00	63.40	-25.40
6589.28	49.19	36.13	-7.72	36.99	40.61	63.40	-22.79



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

EUT Position (angle °)			135	Antenna Polarization			V
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
984.16	49.82	24.62	-2.89	39.17	32.38	39.40	-7.02
996.40	50.85	24.65	-2.91	39.15	33.44	39.40	-5.96
1008.32	51.44	24.75	-2.94	39.12	34.13	39.40	-5.27
1044.56	52.94	24.79	-2.99	39.05	35.69	39.40	-3.71
1189.52	47.81	24.99	-3.15	38.75	30.90	39.40	-8.50
1213.68	48.09	25.12	-3.18	38.7	31.33	39.40	-8.07
1358.64	51.44	25.28	-3.36	38.43	34.93	39.40	-4.47
1539.84	48.31	25.57	-3.55	38.1	32.23	39.40	-7.17
1612.32	46.03	25.7	-3.67	37.97	30.09	51.40	-21.31
1708.96	48.55	25.83	-3.75	37.79	32.84	51.40	-18.56
1757.28	48.02	25.9	-3.83	37.75	32.34	51.40	-19.06
2010.96	52.74	26.39	-4.1	37.57	37.46	53.40	-15.94
2059.34	48.00	26.56	-4.14	37.54	32.88	53.40	-20.52
2240.48	48.89	26.97	-4.33	37.6	33.93	53.40	-19.47
2808.24	48.03	28.41	-4.92	37.64	33.88	53.40	-19.52
3061.92	45.40	28.84	-5.17	37.58	31.49	53.40	-21.91
3569.28	47.46	29.43	-5.68	37.24	33.97	63.40	-29.43
4076.64	45.31	30.64	-6.07	36.97	32.91	63.40	-30.49
4523.60	44.95	31.84	-6.43	36.82	33.54	63.40	-29.86
5163.84	46.21	32.88	-6.88	36.78	35.43	63.40	-27.97
5453.76	47.28	32.51	-7.07	36.76	35.96	63.40	-27.44
6033.60	48.52	33.96	-7.42	36.84	38.22	63.40	-25.18
6589.28	49.01	36.13	-7.72	36.99	40.43	63.40	-22.97



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

EUT Position (angle °)			180	Antenna Polarization			V
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
984.16	49.35	24.62	-2.89	39.17	31.91	39.40	-7.49
996.40	49.43	24.65	-2.91	39.15	32.02	39.40	-7.38
1008.32	49.75	24.75	-2.94	39.12	32.44	39.40	-6.96
1044.56	47.82	24.79	-2.99	39.05	30.57	39.40	-8.83
1189.52	46.35	24.99	-3.15	38.75	29.44	39.40	-9.96
1213.68	45.73	25.12	-3.18	38.7	28.97	39.40	-10.43
1358.64	46.66	25.28	-3.36	38.43	30.15	39.40	-9.25
1539.84	45.83	25.57	-3.55	38.1	29.75	39.40	-9.65
1612.32	45.50	25.7	-3.67	37.97	29.56	51.40	-21.84
1708.96	46.85	25.83	-3.75	37.79	31.14	51.40	-20.26
1757.28	46.44	25.9	-3.83	37.75	30.76	51.40	-20.64
2010.96	52.88	26.39	-4.1	37.57	37.60	53.40	-15.80
2059.34	48.04	26.56	-4.14	37.54	32.92	53.40	-20.48
2240.48	48.41	26.97	-4.33	37.6	33.45	53.40	-19.95
2808.24	47.28	28.41	-4.92	37.64	33.13	53.40	-20.27
3061.92	45.21	28.84	-5.17	37.58	31.30	53.40	-22.10
3569.28	47.24	29.43	-5.68	37.24	33.75	63.40	-29.65
4076.64	45.31	30.64	-6.07	36.97	32.91	63.40	-30.49
4523.60	45.23	31.84	-6.43	36.82	33.82	63.40	-29.58
5163.84	46.15	32.88	-6.88	36.78	35.37	63.40	-28.03
5453.76	47.29	32.51	-7.07	36.76	35.97	63.40	-27.43
6033.60	48.24	33.96	-7.42	36.84	37.94	63.40	-25.46
6589.28	48.90	36.13	-7.72	36.99	40.32	63.40	-23.08



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

EUT Position (angle °)			225	Antenna Polarization			V
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
984.16	52.36	24.62	-2.89	39.17	34.92	39.40	-4.48
996.40	51.39	24.65	-2.91	39.15	33.98	39.40	-5.42
1008.32	52.80	24.75	-2.94	39.12	35.49	39.40	-3.91
1044.56	51.67	24.79	-2.99	39.05	34.42	39.40	-4.98
1189.52	51.72	24.99	-3.15	38.75	34.81	39.40	-4.59
1213.68	49.19	25.12	-3.18	38.7	32.43	39.40	-6.97
1358.64	47.10	25.28	-3.36	38.43	30.59	39.40	-8.81
1539.84	45.52	25.57	-3.55	38.1	29.44	39.40	-9.96
1612.32	47.40	25.7	-3.67	37.97	31.46	51.40	-19.94
1708.96	48.53	25.83	-3.75	37.79	32.82	51.40	-18.58
1757.28	49.46	25.9	-3.83	37.75	33.78	51.40	-17.62
2010.96	53.41	26.39	-4.1	37.57	38.13	53.40	-15.27
2059.34	48.81	26.56	-4.14	37.54	33.69	53.40	-19.71
2240.48	49.05	26.97	-4.33	37.6	34.09	53.40	-19.31
2808.24	47.57	28.41	-4.92	37.64	33.42	53.40	-19.98
3061.92	45.35	28.84	-5.17	37.58	31.44	53.40	-21.96
3569.28	47.38	29.43	-5.68	37.24	33.89	63.40	-29.51
4076.64	44.94	30.64	-6.07	36.97	32.54	63.40	-30.86
4523.60	45.17	31.84	-6.43	36.82	33.76	63.40	-29.64
5163.84	46.37	32.88	-6.88	36.78	35.59	63.40	-27.81
5453.76	46.87	32.51	-7.07	36.76	35.55	63.40	-27.85
6033.60	48.49	33.96	-7.42	36.84	38.19	63.40	-25.21
6589.28	48.70	36.13	-7.72	36.99	40.12	63.40	-23.28



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

EUT Position (angle °)			270	Antenna Polarization			V
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
984.16	53.15	24.62	-2.89	39.17	35.71	39.40	-3.69
996.40	53.27	24.65	-2.91	39.15	35.86	39.40	-3.54
1008.32	51.29	24.75	-2.94	39.12	33.98	39.40	-5.42
1044.56	51.77	24.79	-2.99	39.05	34.52	39.40	-4.88
1189.52	50.55	24.99	-3.15	38.75	33.64	39.40	-5.76
1213.68	50.19	25.12	-3.18	38.7	33.43	39.40	-5.97
1358.64	47.07	25.28	-3.36	38.43	30.56	39.40	-8.84
1539.84	46.12	25.57	-3.55	38.1	30.04	39.40	-9.36
1612.32	48.74	25.7	-3.67	37.97	32.80	51.40	-18.60
1708.96	49.20	25.83	-3.75	37.79	33.49	51.40	-17.91
1757.28	48.91	25.9	-3.83	37.75	33.23	51.40	-18.17
2010.96	53.51	26.39	-4.1	37.57	38.23	53.40	-15.17
2059.34	48.89	26.56	-4.14	37.54	33.77	53.40	-19.63
2240.48	48.50	26.97	-4.33	37.6	33.54	53.40	-19.86
2808.24	48.01	28.41	-4.92	37.64	33.86	53.40	-19.54
3061.92	45.15	28.84	-5.17	37.58	31.24	53.40	-22.16
3569.28	47.13	29.43	-5.68	37.24	33.64	63.40	-29.76
4076.64	45.02	30.64	-6.07	36.97	32.62	63.40	-30.78
4523.60	44.92	31.84	-6.43	36.82	33.51	63.40	-29.89
5163.84	45.93	32.88	-6.88	36.78	35.15	63.40	-28.25
5453.76	51.42	32.51	-7.07	36.76	40.10	63.40	-23.30
6033.60	48.11	33.96	-7.42	36.84	37.81	63.40	-25.59
6589.28	48.73	36.13	-7.72	36.99	40.15	63.40	-23.25



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

EUT Position (angle °)			315	Antenna Polarization			V
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
984.16	52.22	24.62	-2.89	39.17	34.78	39.40	-4.62
996.40	51.99	24.65	-2.91	39.15	34.58	39.40	-4.82
1008.32	51.48	24.75	-2.94	39.12	34.17	39.40	-5.23
1044.56	53.40	24.79	-2.99	39.05	36.15	39.40	-3.25
1189.52	46.76	24.99	-3.15	38.75	29.85	39.40	-9.55
1213.68	46.25	25.12	-3.18	38.7	29.49	39.40	-9.91
1358.64	47.44	25.28	-3.36	38.43	30.93	39.40	-8.47
1539.84	48.60	25.57	-3.55	38.1	32.52	39.40	-6.88
1612.32	48.50	25.7	-3.67	37.97	32.56	51.40	-18.84
1708.96	47.42	25.83	-3.75	37.79	31.71	51.40	-19.69
1757.28	47.72	25.9	-3.83	37.75	32.04	51.40	-19.36
2010.96	52.18	26.39	-4.1	37.57	36.90	53.40	-16.50
2059.34	48.38	26.56	-4.14	37.54	33.26	53.40	-20.14
2240.48	47.77	26.97	-4.33	37.6	32.81	53.40	-20.59
2808.24	47.46	28.41	-4.92	37.64	33.31	53.40	-20.09
3061.92	45.16	28.84	-5.17	37.58	31.25	53.40	-22.15
3569.28	47.32	29.43	-5.68	37.24	33.83	63.40	-29.57
4076.64	45.18	30.64	-6.07	36.97	32.78	63.40	-30.62
4523.60	44.95	31.84	-6.43	36.82	33.54	63.40	-29.86
5163.84	46.13	32.88	-6.88	36.78	35.35	63.40	-28.05
5453.76	46.99	32.51	-7.07	36.76	35.67	63.40	-27.73
6033.60	48.20	33.96	-7.42	36.84	37.90	63.40	-25.50
6589.28	48.58	36.13	-7.72	36.99	40.00	63.40	-23.40



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

7.7 RADIATED EMISSION IN GPS BANDS

TEST REQUIREMENT	
Test definition	In addition to the radiated emission limits specified for frequency above 960 MHz, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz in the GPS frequency bands.
Test setup	ANSI C63.4
Test facility	Open Area Test Site (OATS)
Test distance	1 meter
RBW bandwidth	1 kHz
VBW bandwidth	3 MHz
Detector	RMS
EUT operating condition	#1
Remark	None

LIMITS			
Frequency (MHz)	EIRP @ 3 meters (1 MHz BW) (dBm)	Field strength @ 3 meters (1 MHz BW) (dBμV/m)	Field strength @ 1 meters (1 MHz BW) (dBμV/m)
1164-1240	-75.3	19.9	29.4
1559-1610	-75.3	19.9	29.4

Note: The limits were converted from EIRP to field strength at 3 and 1 meter according to FCC 15.503(k).

TEST PROCEDURE

- 1) The EUT was placed on sandpit area filled with dry sand initially placed in front of the ground plane (0° degree position)
- 2) The receiving antenna is placed at 1 meter away from the EUT and it is pointed in the direction of the radiating head with an inclination of -10° to find the highest emission.
- 3) The receiving antenna was positioned in horizontal polarization.
- 4) The measurements were made with the detector set to RMS with a bandwidth of 1 kHz during monitoring the GPS frequency ranges.
- 5) Upon detection of a suspect emission signal, its amplitude and frequency were noted.
- 6) It is recommended to demodulate the received signals for suitable discrimination of the ambient emission from the EUT emission.
- 7) At the worst case combination of the EUT operating mode and antenna height, the field strength measure was recorded.
- 8) The receiving antenna was positioned in vertical polarization and the steps 2 to 6 was repeated.
- 9) The EUT was rotating from 0° to 360° degrees with 45° step increment and the steps 4 to 7 was repeated.
- 10) All the worst case combination field strength emissions founded of each EUT position and antenna polarization was recorded in the following table and compared with the applicable limits.

SUMMURY OF TEST RESULT DATA

All maximum Field strength emission are found at the following test set-up conditions

EUT Position (angle °)			315	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
1164.45	18.88	24.9	-3.15	38.8	1.83	29.40	-27.57
1168.86	18.36	24.9	-3.15	38.8	1.31	29.40	-28.09
1220.08	17.61	25	-3.2	38.7	0.71	29.40	-28.69
1232.55	17.79	25.2	-3.2	38.7	1.09	29.40	-28.31

EUT Position (angle °)			180	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
1571.24	20.38	25.6	-3.6	38.05	4.33	29.40	-25.07
1574.50	20.75	25.6	-3.6	38.05	4.70	29.40	-24.70
1594.08	21.42	25.65	-3.65	38	5.42	29.40	-23.98
1607.34	21.09	25.65	-3.75	37.95	5.04	29.40	-24.36

TEST RESULT

The EUT meets the requirements of sections 15.509(d)

7.8 HIGHEST RADIATED EMISSION AT f_M

TEST REQUIREMENT	
Test definition	For UWB devices where the frequency at which the highest radiated emission occurs, f_M , is above 960 MHz, there is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on f_M .
Test setup	ANSI C63.4
Test facility	Open Area Test Site (OATS)
Test distance	3 meters
RBW bandwidth	1 MHz
VBW bandwidth	3 MHz
Detector	Peak
EUT operating condition	#1
Remark	None

LIMITS		
The peak emission level contained within a 50 MHz bandwidth centered on f_M must be limited to a maximum of 0 dBm EIRP.		
EIRP limit (dBm)	Field strength limit @ 3 meters (dB μ V/m)	Field strength limit @ 3 meters (measured with 1 MHz RBW) (dB μ V/m)
0	95.2	61.2
Note: The limits were converted from EIRP to field strength at 3 meter according to FCC 15.503(k). As the measurement was employed with a 1 MHz resolution bandwidth the applicable limit is adjusted with a $20\log(1/50)$ dB factor.		



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

TEST PROCEDURE

- 1) The EUT was placed on sandpit area filled with dry sand initially placed in front of the ground plane (0° degree position)
- 2) The receiving antenna which varied from 1 to 4 m to find the highest emission is positioned 3 m away from the EUT.
- 3) The receiving antenna was positioned in horizontal polarization.
- 4) The measurements were made with the detector set to peak with a bandwidth of 1 MHz during monitoring the frequency range inside the UWB of the EUT..
- 5) At the worst case combination of the EUT operating mode and antenna height , the field strength measure was recorded.
- 6) The receiving antenna was positioned in vertical polarization and the steps 4 to 6 was repeated.
- 7) The EUT was rotating from 0° to 360° degrees with 45° step increment and the steps 4 to 7 was repeated.
- 8) Record the peak emission from the EUT.

SUMMARY OF TEST RESULT DATA

Maximum Peak emission contained within 50 MHz is found at the following test set-up conditions

EUT Position (angle °)			0	Antenna Polarization			H
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
141.60	49.09	9.8	1.13	0	60.02	61.20	-1.18

TEST RESULT

The highest radiated emission, f_M , has been found below than 960 MHz.

The EUT meets the requirements of sections 15.509(f)



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

7.9 TECHNICAL REQUIREMENTS APPLICABLE TO ALL UWB DEVICES

REQUIREMENT	DESCRIPTION
§ 15.521(a)	The EUT is not employed for the operation of toys, operation onboard an aircraft, ship and satellite.
§ 15.521(b)	Permanent attached antenna, no External radio frequency power amplifiers and antenna modifications are permitted.
§ 15.521(c)	The Digital circuitry portion of the EUT has been tested and verified to comply with 47 CFR Part 15, subpart B.
§ 15.521(d)	Considered
§ 15.521(e)	The fM, frequency at which the highest radiated emission occurs is contained within the measured UWB bandwidth.
§ 15.521(f)	The EUT is not intended to detection of tags or the transfer or data or voice information.
§ 15.521(g)	Considered
§ 15.521(h)	Considered
§ 15.521(i)	Prohibition in Sections 2.201(f) and 15.5(d) of this chapter against Class B (damped wave) emissions is not applied.
§ 15.521(j)	Battery operating device not connected to AC power lines.

TEST RESULT

The EUT meets the requirements of sections 15.521.



IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

7.10 COORDINATION REQUIREMENT

TEST REQUIREMENT

- (a) UWB imaging systems require coordination through the FCC before the equipment may be used. The operator shall comply with any constraints on equipment usage resulting from this coordination.
- (b) The users of UWB imaging devices shall supply operational areas to the FCC Office of Engineering and Technology, which shall coordinate this information with the Federal Government through the National Telecommunications and Information Administration.
- (c) The manufacturers, or their authorized sales agents, must inform purchasers and users of their systems of the requirement to undertake detailed coordination of operational areas with the FCC prior to the equipment being operated.
- (d) Users of authorized, coordinated UWB systems may transfer them to other qualified users. and to different locations upon coordination of change of ownership or location to the FCC and coordination with existing authorized operations.
- (e) The FCC/NTIA coordination report shall identify those geographical areas within which the operation of an imaging system requires additional coordination or within which the operation of an imaging system is prohibited.
- (f) The coordination of routine UWB operations shall not take longer than 15 business days from the receipt of the coordination request by NTIA.

REQUIREMENT	DESCRIPTION
§ 15.525 § 15.509(b)	The responsible party is properly informed about the required coordination requirement and provide correct information to the customers and users about their specific care and legislative obligations. (See Important note for the US customers of the "OPERA DUO - User manual")

TEST RESULT

The EUT meets the requirements of sections 15.525 and 15.509(b).

8. MEASUREMENTS AND TESTS UNCERTAINTY

The expanded uncertainty was calculated for all measurements and tests listed in this test report according to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements", with UKAS document LAB 34 and is documented in the quality system accordance to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device

Methods	Expanded Uncertainty	Unit	confidence level	Coverage factor	Degree of freedom
Radiated emission (30 ÷ 200 MHz)	5.1	dB	95 %	2	9
Radiated emission (200 ÷ 1000 MHz)	5.2	dB	95 %	2	9
Radiated emission (1 ÷ 6 GHz)	5.1	dB	95 %	2	9
Radiated emission (above 6 GHz)	5.4	dB	95 %	2	9

9. LIST OF MEASURING EQUIPMENT AND CALIBRATION INFORMATION

IMQ Serial Number	Instrument	Manufacturer	Type	Last Cal.	Cal. Period.	Calibration Company
S03463	Horn Antenna	Schwarzbeck	BBHA 9120D	09-11	36	NPL
S03511	Log-Per. Antenna	Ara	LPB-2520/1	04-12	36	NPL
S05562	EMI Receiver	Rohde & Schwarz	ESU 8	08-13	12	Rohde & Schwarz
S03629	Spectrum Analyzer	Rohde & Schwarz	FSP40	12-13	12	Rohde & Schwarz
S03542	Preamplifier	Hewlett Packard	HP 8449B	06-13	24	IMQ
S05585	RF Coax Cable	Rosenberger micro-coax	N 50 Ohm	06-13	12	IMQ
S04322	RF Coax Cable	Rosenberger micro-coax	N 50 Ohm	06-13	12	IMQ
S03745	Oscilloscope	Yokogawa	DL 7200	09-13	12	AVIATRONIK
S04159	Multimeter	Fluke	45	04-13	12	IMQ
S06523	Datalogger	DELTA OHM	HD206-1	07-13	12	DELTA STRUMENTI
P01723	Antenna Mast	Sunol Sciences	TWR 93-4	/	/	/

10. PHOTOGRAPHIC DOCUMENTATION

EUT IDENTIFICATION



SET-UP

Test set-up below 960 MHz



Test set-up above 960 MHz





IMQ S.p.A. – Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 – info@imq.it – www.imq.it



LAB N° 0121

11. OPINIONS AND INTERPRETATIONS - NOT OBJECT TO ACCREDIA ACCREDITATION

Not Applicable

END OF REPORT