



FCC Part 15.247

TEST REPORT

For

Avalue Technology Inc.

7F, 228, Lian-cheng Road, Zhonghe Dist., New Taipei City 235, Taiwan

FCC ID: XBG-EBC05M1

| | |
|--|---|
| Report Type Original Report | Product Type: 5.65" E-ink Bedside Card |
| Report Producer : | Himiko Chen <i>Himiko Chen</i> |
| Report Number : | RLK1808008-00B |
| Report Date : | 2018/10/07 |
| Reviewed By: | Jerry Chang <i>Jerry Chang</i> |
| Prepared By: Bay Area Compliance Laboratories Corp.(Taiwan) 70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C. Tel: +886 (2)2647 6898 Fax: +886 (2) 2647 6895 www.bacl.com.tw | |

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Taiwan)

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Taiwan)

Revision History


| Revision | Report Number | Issue Date | Description | Author/Revised by |
|----------|----------------|------------|-----------------|-------------------|
| 1.0 | RLK1808008-00B | 2018/10/07 | Original Report | Himiko Chen |

TABLE OF CONTENTS

| | | |
|-----------|--|-----------|
| 1 | GENERAL INFORMATION | 4 |
| 1.1 | PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) | 4 |
| 1.2 | OPERATION CONDITION OF EUT | 4 |
| 1.3 | OBJECTIVE AND TEST METHODOLOGY | 5 |
| 1.4 | MEASUREMENT UNCERTAINTY | 5 |
| 1.5 | TEST FACILITY | 5 |
| 2 | SYSTEM TEST CONFIGURATION..... | 6 |
| 2.1 | TEST CHANNELS AND DESCRIPTION OF WORST TEST CONFIGURATION..... | 6 |
| 2.2 | SUPPORT EQUIPMENT LIST AND EXTERNAL CABLE LIST | 6 |
| 2.3 | BLOCK DIAGRAM OF TEST SETUP | 7 |
| 2.4 | DUTY CYCLE | 7 |
| 3 | SUMMARY OF TEST RESULTS..... | 8 |
| 4 | FCC§15.247(I), §1.1310, § 2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE) | 9 |
| 4.1 | APPLICABLE STANDARD | 9 |
| 4.2 | RF EXPOSURE EVALUATION RESULT | 9 |
| 5 | FCC §15.203 - ANTENNA REQUIREMENTS | 10 |
| 5.1 | APPLICABLE STANDARD | 10 |
| 5.2 | ANTENNA LIST AND DETAILS | 10 |
| 6 | FCC §15.209, §15.205, §15.247(D) – SPURIOUS EMISSIONS | 11 |
| 6.1 | APPLICABLE STANDARD | 11 |
| 6.2 | EUT SETUP AND TEST PROCEDURE..... | 13 |
| 6.3 | TEST EQUIPMENT LIST AND DETAILS | 14 |
| 6.4 | TEST ENVIRONMENTAL CONDITIONS | 14 |
| 6.5 | RADIATED EMISSION TEST PLOT AND DATA..... | 15 |
| 7 | FCC §15.247(A)(2) – 6 DB EMISSION BANDWIDTH | 20 |
| 7.1 | APPLICABLE STANDARD | 20 |
| 7.2 | TEST PROCEDURE | 20 |
| 7.3 | TEST EQUIPMENT LIST AND DETAILS | 20 |
| 7.4 | TEST ENVIRONMENTAL CONDITIONS | 20 |
| 7.5 | TEST RESULTS | 21 |
| 8 | FCC §15.247(B) (3) – MAXIMUM OUTPUT POWER..... | 23 |
| 8.1 | APPLICABLE STANDARD | 23 |
| 8.2 | TEST PROCEDURE | 23 |
| 8.3 | TEST EQUIPMENT LIST AND DETAILS | 23 |
| 8.4 | TEST ENVIRONMENTAL CONDITIONS | 23 |
| 8.5 | TEST RESULTS | 24 |
| 9 | FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE | 25 |
| 9.1 | APPLICABLE STANDARD | 25 |
| 9.2 | TEST PROCEDURE | 25 |
| 9.3 | TEST EQUIPMENT LIST AND DETAILS | 26 |
| 9.4 | TEST ENVIRONMENTAL CONDITIONS | 26 |
| 9.5 | TEST RESULTS | 26 |
| 10 | FCC §15.247(E) – POWER SPECTRAL DENSITY | 27 |
| 10.1 | APPLICABLE STANDARD | 27 |
| 10.2 | TEST PROCEDURE | 27 |
| 10.3 | TEST EQUIPMENT LIST AND DETAILS | 27 |
| 10.4 | TEST ENVIRONMENTAL CONDITIONS | 27 |
| 10.5 | TEST RESULTS | 28 |

1 General Information

1.1 Product Description for Equipment under Test (EUT)

| | |
|--------------------------------------|---|
| Applicant | Avalue Technology Inc. 7F, 228, Lian-cheng Road, Zhonghe Dist., New Taipei City 235, Taiwan |
| Manufacturer | Avalue Technology Inc. 7F, 228, Lian-cheng Road, Zhonghe Dist., New Taipei City 235, Taiwan |
| Brand(Trade) Name |  |
| Product (Equipment) | 5.65" E-ink Bedside Card |
| Model Name | EBC-05M1 |
| Frequency Range | 903 MHz ~ 927 MHz |
| Number of Channels | 9 channels |
| Output Power | 7.89 dBm (0.0062W) |
| Received Date | Aug. 29, 2018. |
| Date of Test | Sep 21, 2018 ~ Sep 25, 2018 |
| Modulation Type | GFSK |
| Related Submittal(s)/Grant(s) | FCC Part 15.247 DTS with FCC ID: 2AFXU-MA903A1 |

**All measurement and test data in this report was gathered from production sample serial number: 1810003 (Assigned by BACL, Taiwan).*

1.2 Operation Condition of EUT

| | |
|--|--|
| Power Operation (Voltage Range) | <input type="checkbox"/> AC 120V/60Hz <input type="checkbox"/> Adapter <input type="checkbox"/> By Power Core |
| | <input checked="" type="checkbox"/> DC Type <input type="checkbox"/> DC Power Supply <input checked="" type="checkbox"/> Battery 3Vdc (4*AAAA. Two Battery were in series, then parallel) <input type="checkbox"/> External from USB Cable <input type="checkbox"/> External DC Adapter |
| | <input type="checkbox"/> Host System |

1.3 Objective and Test Methodology

The Objective of this Test Report was to document the compliance of the Avalue Technology Inc. Appliance (Model: EBC-05M1) to the requirements of the following Standards:

-Part 2, Subpart J, Part 15, Subparts A and C, section 15.247 of the Federal Communication Commission's rules.

- ANSI C63.10-2013 of the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.4 Measurement Uncertainty

| Parameter | Expanded Measurement uncertainty |
|----------------------------------|----------------------------------|
| RF output power with Power Meter | ± 0.55 dB |
| Occupied Channel Bandwidth | ± 4.45 % |
| RF Conducted test with Spectrum | ± 1.45 dB |
| AC Power Line Conducted Emission | ± 4.64 dB |
| Radiated Below 1G | ± 5.83 dB |
| Radiated Above 1G-18G | ± 5.35 dB |
| Radiated Above 18G-40G | ± 4.49 dB |

1.5 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Taiwan) to collect test data is located on

☒ 70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.

☒ 68-3, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database. The FCC Registration No.: 974454. Designation No.: TW3180

2 System Test Configuration

2.1 Test Channels and Description of Worst Test Configuration

The system was configured for testing in testing mode which was provided by manufacturer.

No special accessory, No modification was made to the EUT and No special equipment used during test.

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 1 | 903 | 6 | 921 |
| 2 | 906 | 7 | 924 |
| 3 | 909 | 8 | 927 |
| 4 | 915 | 9 | 923 |
| 5 | 918 | - | - |

Channel 1, 5 and 8 were tested.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power and PSD across all data rates bandwidths, and modulations.

Radiated below 1G were tested worst output power mode.

| Worst Case of Power Setting | | | | |
|-----------------------------|-----|---------|--------|---------|
| EUT Exercise Software | | Command | | |
| Configuration | NTX | Low CH | Mid CH | High CH |
| 903 MHz ~ 927 MHz | 1 | 10 | 10 | 10 |


2.2 Support Equipment List and External Cable List

| No. | Description | Manufacturer | Model Number | BSMI | FCC ID / DoC |
|-----|-------------|--------------|--------------|--------|--------------|
| A | Notebook PC | DELL | PP27LA | R33002 | DoC |

| No. | Cable Description | Length (m) | From | To |
|-----|-------------------|------------|------|-----|
| 1 | N/A | N/A | N/A | N/A |

2.3 Block Diagram of Test Setup

Radiation

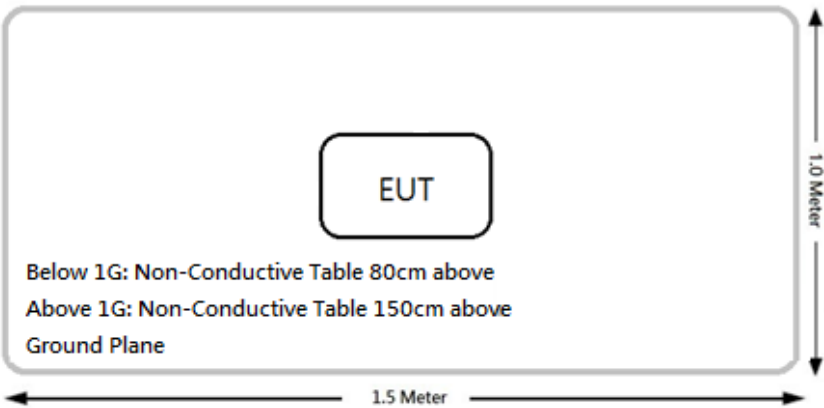


2.4 Duty Cycle

According to KDB 558074 D01 15.247 Meas Guidance v05,:

All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum power transmission duration, T, are required for each tested mode of operation.

| Configuration | On Time (ms) | Period (ms) | Duty Cycle (%) | Duty Factor (dB) |
|--------------------|--------------|-------------|----------------|------------------|
| 903 – 927 MHz Band | 1.8841 | 1.8841 | 100 % | 0 dB |

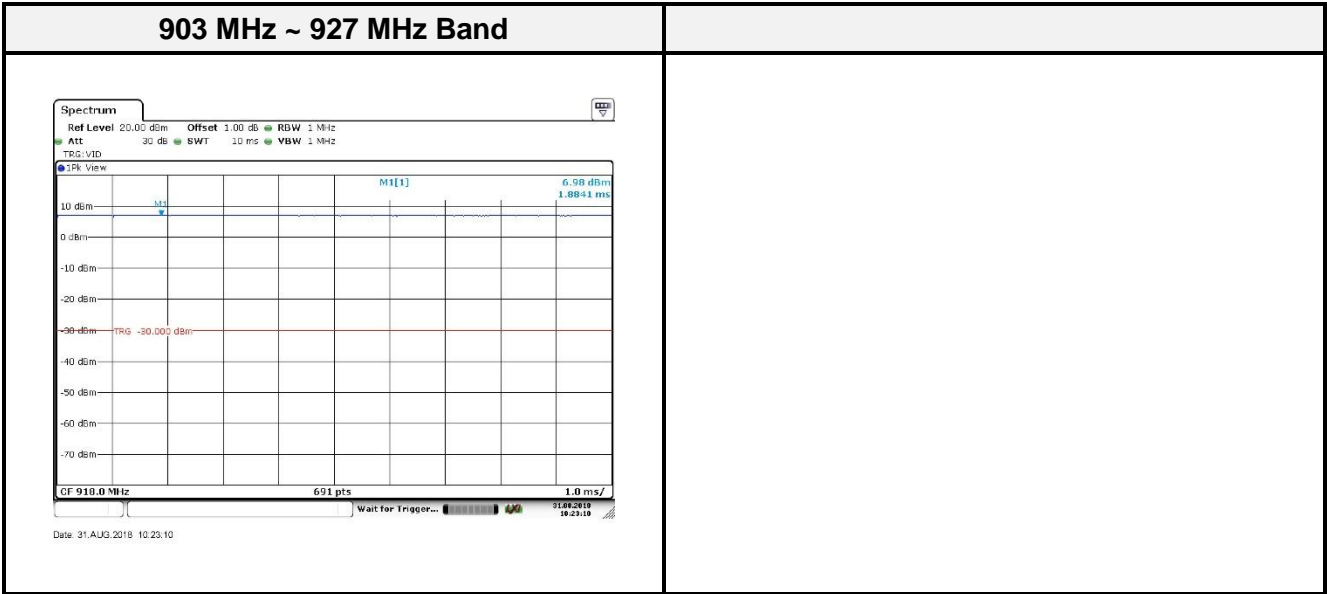

*Note: Duty Factor = 10*log (1/Duty cycle)

3 Summary of Test Results

| FCC Rules | Description of Test | Result |
|------------------------------|--|---------------|
| §15.247(i), §1.1310, §2.1091 | Maximum Permissible Exposure (MPE) | Compliance |
| §15.203 | Antenna Requirement | Compliance |
| §15.207(a) | AC Line Conducted Emissions | Not Appliance |
| §15.205, §15.209, §15.247(d) | Spurious Emissions | Compliance |
| §15.247(a)(2) | 6 dB Emission Bandwidth | Compliance |
| §15.247(b)(3) | Maximum Peak Output Power | Compliance |
| §15.247(d) | 100 kHz Bandwidth of Frequency Band Edge | Compliance |
| §15.247(e) | Power Spectral Density | Compliance |

* Not Appliance: EUT power by 4 x AAAA battery(3Vdc).

4 FCC§15.247(i), §1.1310, § 2.1091 - Maximum Permissible Exposure (MPE)

4.1 Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

| (B) Limits for General Population/Uncontrolled Exposure | | | | |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Frequency Range (MHz) | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm ²) | Averaging Time (minutes) |
| 0.3–1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34–30 | 824/f | 2.19/f | *(180/f ²) | 30 |
| 30–300 | 27.5 | 0.073 | 0.2 | 30 |
| 300–1500 | / | / | f/1500 | 30 |
| 1500–100,000 | / | / | 1.0 | 30 |

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary: Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

4.2 RF Exposure Evaluation Result

MPE evaluation:

| Frequency Range (MHz) | Antenna Gain | | Target Power | | Evaluation Distance (cm) | Power Density (mW/cm ²) | MPE Limit (mW/cm ²) |
|-----------------------|--------------|-----------|--------------|--------|--------------------------|-------------------------------------|---------------------------------|
| | (dBi) | (numeric) | (dBm) | (mW) | | | |
| 903-927 | 0.3 | 1.072 | 8.00 | 6.3096 | 20 | 0.0013 | 0.618 |

Result: MPE evaluation meet 20 cm the requirement of standard.

5 FCC §15.203 - Antenna Requirements

5.1 Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna does not exceed 6dBi

5.2 Antenna List and Details

| Manufacturer | Model | Antenna Type | Antenna Gain | Result |
|--------------------------------|-------------|------------------|--------------|------------|
| Resilient Technology Co., Ltd. | AN13-000038 | Internal Antenna | 0.3 dBi | Compliance |

The EUT has an internal antenna arrangement, which was permanently attached, fulfill the requirement of this section.

6 FCC §15.209, §15.205, §15.247(d) – Spurious Emissions

6.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 13.36-13.41 | 399.9-410 | 4.5-5.15 |
| 0.495-0.505 | 16.42-16.423 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.69475-16.69525 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | Above 38.6 |


As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (micro volts/meter) | Measurement Distance (meters) |
|-----------------|------------------------------------|-------------------------------|
| 0.009 - 0.490 | 2400/F(kHz) | 300 |
| 0.490 - 1.705 | 24000/F(kHz) | 30 |
| 1.705 - 30.0 | 30 | 30 |
| 30 - 88 | 100** | 3 |
| 88 - 216 | 150** | 3 |
| 216 - 960 | 200** | 3 |
| Above 960 | 500 | 3 |

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2 EUT Setup and Test Procedure

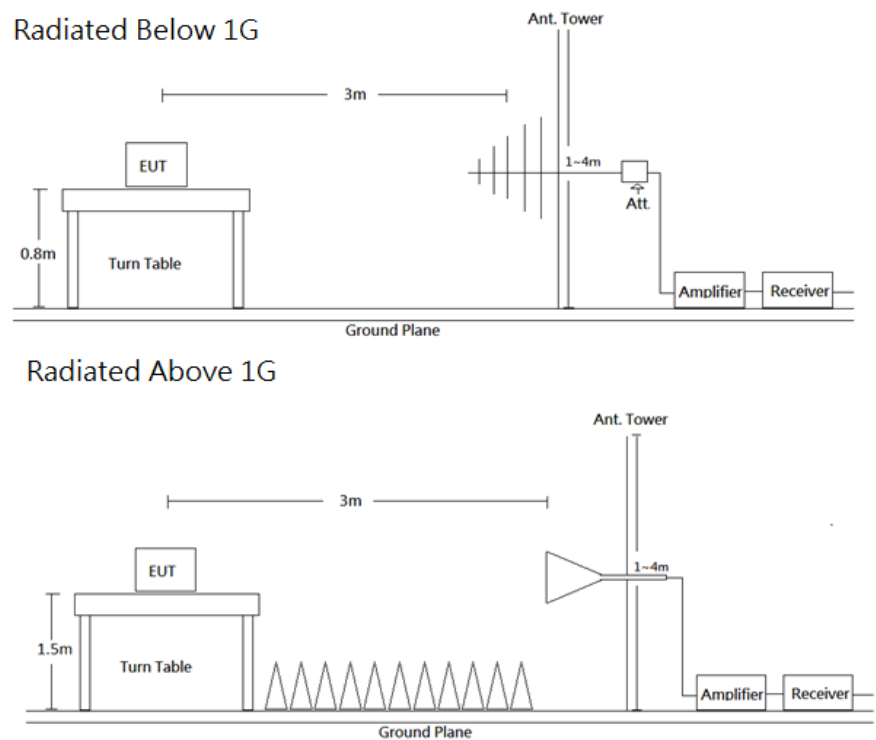

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

The system was investigated from 30 MHz to 10 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

| Frequency Range | RBW | VBW | Detector | Duty cycle | Measurement method |
|-----------------|---------|-------|----------|------------|--------------------|
| 30-1000 MHz | 120 kHz | / | QP | - | QP |
| Above 1 GHz | 1 MHz | 3 MHz | PK | - | PK |
| | 1 MHz | 3 MHz | RMS | >98% | Ave |
| | 1 MHz | 1/T | PK | <98% | Ave |

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations. All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

6.3 Test Equipment List and Details

| Description | Manufacture | Model | Serial No. | Cal. Date. | Cal. Due. |
|------------------------------------|--------------------------------|--------------------------|---------------------|------------|------------|
| 966A Room | | | | | |
| Active Loop Antenna | ETS-Lindgren | 6502 | 00035796 | 2018/03/13 | 2019/03/12 |
| Bilog Antenna with 6 dB Attenuator | SUNOL SCIENCES & MINI-CIRCUITS | JB6/UNAT-6+ | A050115/15542_01 | 2017/12/20 | 2018/12/19 |
| Horn Antenna | EMCO | 3115 | 9311-4158 | 2018/04/20 | 2019/04/19 |
| Horn Antenna | ETS-Lindgren | 3116 | 62638 | 2018/08/29 | 2019/08/28 |
| Preamplifier | Sonoma | 310N | 130602 | 2018/07/04 | 2019/07/03 |
| Preamplifier | EM Electronics Corp. | EM01G18G | 060657 | 2017/12/14 | 2018/12/13 |
| Microwave Preamplifier | EM Electronics Corporation | EM18G40G | 060656 | 2018/01/15 | 2019/01/14 |
| EMI Test Receiver | Rohde & Schwarz | ESR7 | 101419 | 2017/11/06 | 2018/11/05 |
| Spectrum Analyzer | Spectrum Analyzer | FSV40 | 101435 | 2018/02/12 | 2019/02/13 |
| Micro flex Cable | UTIFLEX | FSCM 64639 / (2M) | 93D0127 | 2018/07/31 | 2019/07/30 |
| Micro flex Cable | UTIFLEX | UFA210A-1-3149-300300 | MFR64639 226389-002 | 2017/11/10 | 2018/11/09 |
| Micro flex Cable | ROSNOL | K1K50-UP0264-K1K50-450CM | 160309-1 | 2018/03/05 | 2019/03/04 |
| Micro flex Cable | ROSNOL | K1K50-UP0264-K1K50-80CM | 160309-2 | 2018/01/17 | 2019/01/16 |
| Turn Table | Champro | TT-2000 | 060772-T | N.C.R | N.C.R |
| Antenna Tower | Champro | AM-BS-4500-B | 060772-A | N.C.R | N.C.R |
| Controller | Champro | EM1000 | 60772 | N.C.R | N.C.R |
| Software | AUDIX | e3 | E3LK-01 | N.C.R | N.C.R |
| Conducted Room | | | | | |
| Spectrum Analyzer | Rohde & Schwarz | FSV40 | 101140 | 2017/11/15 | 2018/11/14 |
| Cable | WOKEN | SFL402 | S02-160323-07 | 2018/02/12 | 2019/02/11 |

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).


6.4 Test Environmental Conditions

| | | | |
|----------------------|------------|---------------------|------------|
| Temperature: | 23.3 °C | Relative Humidity: | 54.2 % |
| ATM Pressure: | 1014hPa | Test Engineer: | Leo Chang |
| Conducted Test Date: | 2018-09-21 | Radiated Test Date: | 2018-09-24 |

6.5 Radiated Emission Test Plot and Data

Transmitting mode (Pre-scan with three orthogonal axis, and worse case as Z axis)

Below 1G (30 MHz-1 GHz) test the output power worst mode: High Channel

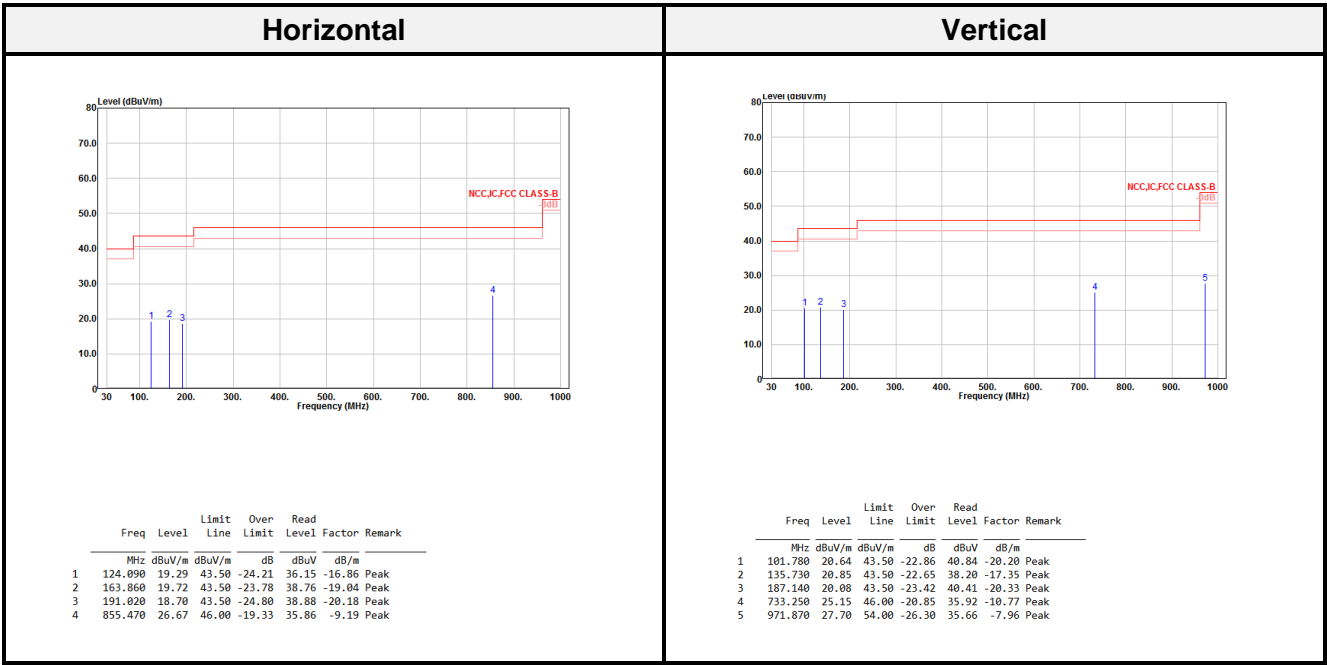

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported

Band Edge

| Low CH | | | | | | | | | | | | |
|------------|--------|---------------|---------------|---------------|--------|--------|----------|--------|---------------|---------------|---------------|---------------|
| Horizontal | | | | | | | Vertical | | | | | |
| Freq | Level | Limit Line | Over Limit | Read Level | Factor | Remark | Freq | Level | Limit Line | Over Limit | Read Level | Factor Remark |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m |
| 901.984 | 53.02 | 66.00 | -12.98 | 61.95 | -8.93 | Peak | 901.955 | 52.89 | 66.00 | -13.11 | 61.82 | -8.93 Peak |
| 901.984 | 39.15 | 46.00 | -6.85 | 48.08 | -8.93 | QP | 901.955 | 39.31 | 46.00 | -6.69 | 48.24 | -8.93 QP |
| 902.840 | 105.07 | | | 113.99 | -8.92 | Peak | 903.215 | 104.48 | | | 113.39 | -8.91 Peak |
| 902.840 | 96.72 | | | 105.64 | -8.92 | QP | 903.215 | 96.15 | | | 105.07 | -8.92 QP |

| Middle CH | | | | | | | | | | | | |
|------------|--------|---------------|---------------|---------------|--------|--------|----------|--------|---------------|---------------|---------------|---------------|
| Horizontal | | | | | | | Vertical | | | | | |
| Freq | Level | Limit Line | Over Limit | Read Level | Factor | Remark | Freq | Level | Limit Line | Over Limit | Read Level | Factor Remark |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m |
| 918.215 | 103.15 | | | 111.89 | -8.74 | Peak | 917.841 | 103.00 | | | 111.75 | -8.75 Peak |
| 918.215 | 95.01 | | | 103.76 | -8.75 | QP | 917.841 | 94.77 | | | 103.52 | -8.75 QP |

| High CH | | | | | | | | | | | | |
|------------|--------|---------------|---------------|---------------|--------|--------|----------|--------|---------------|---------------|---------------|---------------|
| Horizontal | | | | | | | Vertical | | | | | |
| Freq | Level | Limit Line | Over Limit | Read Level | Factor | Remark | Freq | Level | Limit Line | Over Limit | Read Level | Factor Remark |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m |
| 927.210 | 102.11 | | | 110.74 | -8.63 | Peak | 926.835 | 101.58 | | | 110.21 | -8.63 Peak |
| 927.210 | 96.86 | | | 105.49 | -8.63 | QP | 926.835 | 96.26 | | | 104.89 | -8.63 QP |
| 928.000 | 50.67 | 66.00 | -15.33 | 59.29 | -8.62 | Peak | 928.000 | 51.51 | 66.00 | -14.49 | 60.13 | -8.62 Peak |
| 928.000 | 39.49 | 46.00 | -6.51 | 48.11 | -8.62 | QP | 928.000 | 39.29 | 46.00 | -6.71 | 47.91 | -8.62 QP |


Above 1G (1 GHz-10 GHz)

| Low CH | | | | | | | | | | | | | |
|------------|--------|--------|--------|-------|--------|---------|----------|--------|--------|--------|-------|--------|---------|
| Horizontal | | | | | | | Vertical | | | | | | |
| Freq | Level | Limit | Over | Read | Factor | Remark | Freq | Level | Limit | Over | Read | Factor | Remark |
| MHz | dBuV/m | dBuV/m | dB | dBuV | | | MHz | dBuV/m | dBuV/m | dB | dBuV | | |
| 1806.000 | 45.52 | 54.00 | -8.48 | 55.23 | -9.71 | Average | 1806.000 | 47.94 | 54.00 | -6.06 | 57.65 | -9.71 | Average |
| 1806.000 | 49.26 | 74.00 | -24.74 | 58.97 | -9.71 | Peak | 1806.000 | 51.62 | 74.00 | -22.38 | 61.33 | -9.71 | Peak |
| 2709.000 | 40.25 | 54.00 | -13.75 | 48.29 | -8.04 | Average | 2709.000 | 44.65 | 54.00 | -9.35 | 52.69 | -8.04 | Average |
| 2709.000 | 47.59 | 74.00 | -26.41 | 55.63 | -8.04 | Peak | 2709.000 | 51.35 | 74.00 | -22.65 | 59.39 | -8.04 | Peak |

| Middle CH | | | | | | | | | | | | | |
|------------|--------|--------|--------|-------|--------|---------|----------|--------|--------|--------|-------|--------|---------|
| Horizontal | | | | | | | Vertical | | | | | | |
| Freq | Level | Limit | Over | Read | Factor | Remark | Freq | Level | Limit | Over | Read | Factor | Remark |
| MHz | dBuV/m | dBuV/m | dB | dBuV | | | MHz | dBuV/m | dBuV/m | dB | dBuV | | |
| 1836.000 | 42.37 | 54.00 | -11.63 | 51.82 | -9.45 | Average | 1836.000 | 44.36 | 54.00 | -9.64 | 53.87 | -9.51 | Average |
| 1836.000 | 47.05 | 74.00 | -26.95 | 56.50 | -9.45 | Peak | 1836.000 | 48.35 | 74.00 | -25.65 | 57.86 | -9.51 | Peak |
| 2754.000 | 43.77 | 54.00 | -10.23 | 51.65 | -7.88 | Average | 2754.000 | 47.75 | 54.00 | -6.25 | 55.63 | -7.88 | Average |
| 2754.000 | 50.52 | 74.00 | -23.48 | 58.40 | -7.88 | Peak | 2754.000 | 53.94 | 74.00 | -20.06 | 61.82 | -7.88 | Peak |

| High CH | | | | | | | | | | | | | |
|------------|--------|--------|--------|-------|--------|---------|----------|--------|--------|--------|-------|--------|---------|
| Horizontal | | | | | | | Vertical | | | | | | |
| Freq | Level | Limit | Over | Read | Factor | Remark | Freq | Level | Limit | Over | Read | Factor | Remark |
| MHz | dBuV/m | dBuV/m | dB | dBuV | | | MHz | dBuV/m | dBuV/m | dB | dBuV | | |
| 1854.000 | 41.89 | 54.00 | -12.11 | 51.19 | -9.30 | Average | 1854.000 | 43.34 | 54.00 | -10.66 | 52.64 | -9.30 | Average |
| 1854.000 | 46.20 | 74.00 | -27.80 | 55.50 | -9.30 | Peak | 1854.000 | 47.74 | 74.00 | -26.26 | 57.04 | -9.30 | Peak |
| 2781.000 | 43.51 | 54.00 | -10.49 | 51.31 | -7.80 | Average | 2781.000 | 46.05 | 54.00 | -7.95 | 53.85 | -7.80 | Average |
| 2781.000 | 48.03 | 74.00 | -25.97 | 55.83 | -7.80 | Peak | 2781.000 | 52.77 | 74.00 | -21.23 | 60.57 | -7.80 | Peak |

Above 1G (1 GHz-10 GHz): test the output power worst mode: High Channel

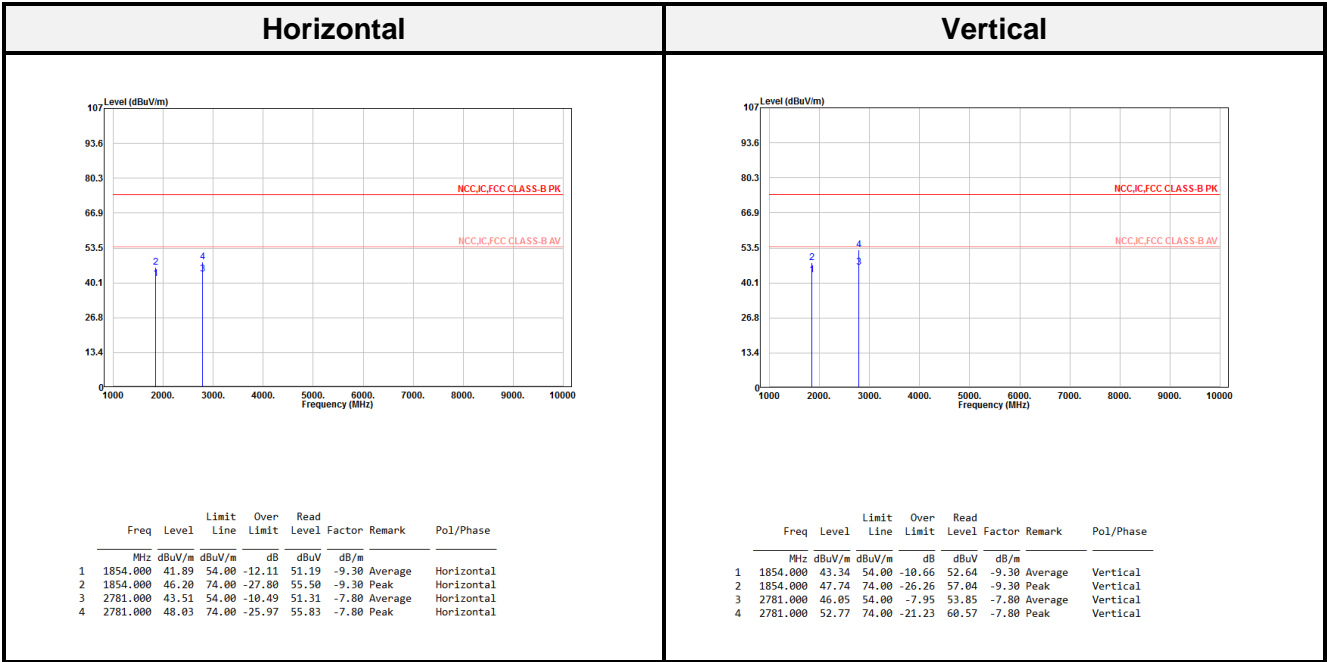

Result = Reading + Correct Factor

Margin = Result – Limit


Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported

Conducted Spurious Emissions:

| Channel | Frequency (MHz) | Delta Peak to Band Emission (dBc) | Limit (dBc) | Result |
|---------|-----------------|-----------------------------------|-------------|------------|
| Low | 903 | 57.48 | ≥ 20 | Compliance |
| Mid | 918 | 54.73 | ≥ 20 | Compliance |
| High | 927 | 53.83 | ≥ 20 | Compliance |

903 MHz ~ 927 MHz

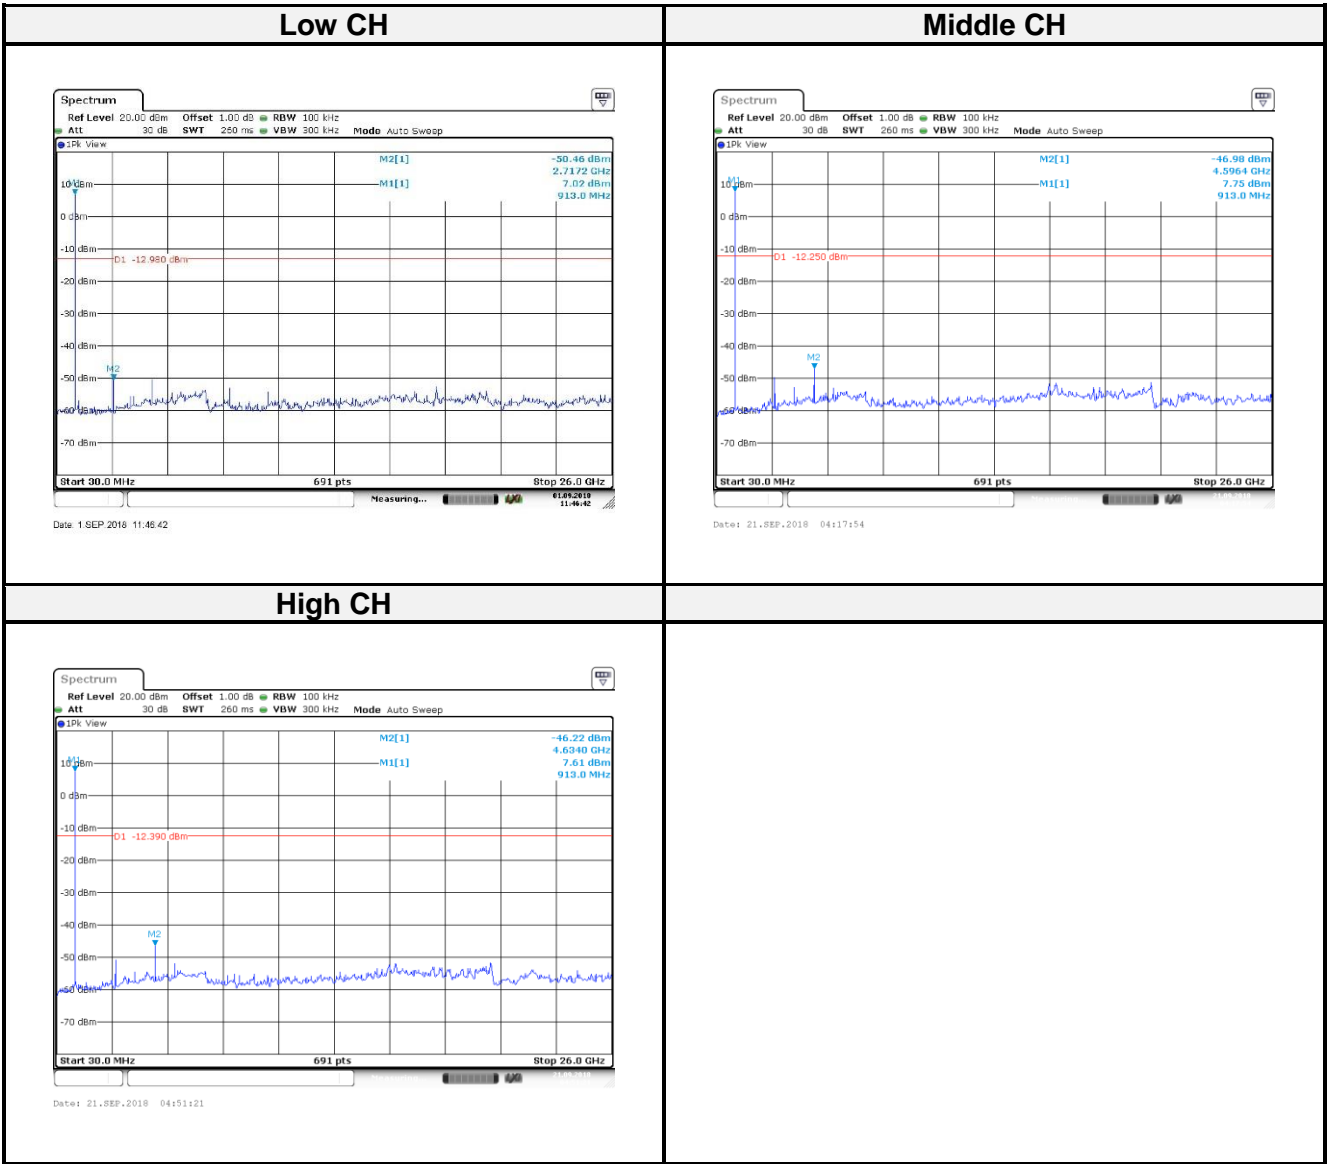

High CH

7 FCC §15.247(a)(2) – 6 dB Emission Bandwidth

7.1 Applicable Standard

According to FCC §15.247(a) (2),

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

7.2 Test Procedure

According to ANSI C63.10-2013, the steps for the first option are as follows:

(1) Set RBW = 100 kHz. (2) Set the VBW $\geq [3 \times \text{RBW}]$. (3) Detector = peak. (4) Trace mode = max hold. (5) Sweep = auto couple. (6) Allow the trace to stabilize. (7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 Test Equipment List and Details

| Description | Manufacture | Model | Serial No. | Cal. Date. | Cal. Due. |
|-------------------|-----------------|--------|---------------|------------|------------|
| Conducted Room | | | | | |
| Spectrum Analyzer | Rohde & Schwarz | FSV40 | 101140 | 2017/11/15 | 2018/11/14 |
| Cable | WOKEN | SFL402 | S02-160323-07 | 2018/02/12 | 2019/02/11 |

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

7.4 Test Environmental Conditions


| | | | |
|----------------------|------------|--------------------|-----------|
| Temperature: | 23.5 °C | Relative Humidity: | 55.4 % |
| ATM Pressure: | 1015hPa | Test Engineer: | Leo Chang |
| Conducted Test Date: | 2018-09-21 | - | - |

7.5 Test Results

| Channel | Frequency (MHz) | 99% OBW (MHz) | 6 dB BW (MHz) | 6dB Limit (MHz) | Result |
|---------|-----------------|---------------|---------------|-----------------|------------|
| Low | 903 | 0.634 | 0.543 | > 0.5 | Compliance |
| Middle | 918 | 0.647 | 0.543 | > 0.5 | Compliance |
| High | 927 | 0.638 | 0.543 | > 0.5 | Compliance |

99% OBW


Low CH

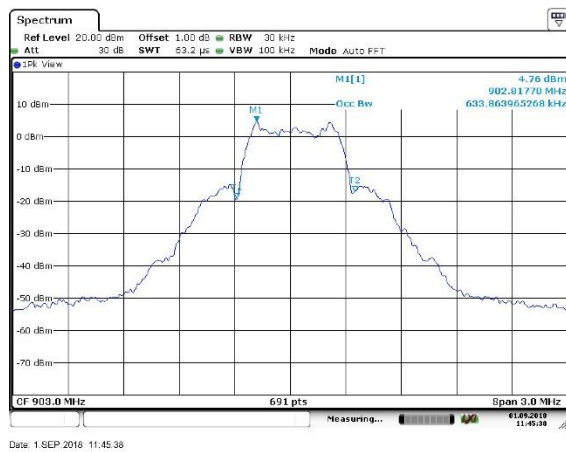

Date: 1.SEP.2018 11:45:38


6 dB BW

Low CH

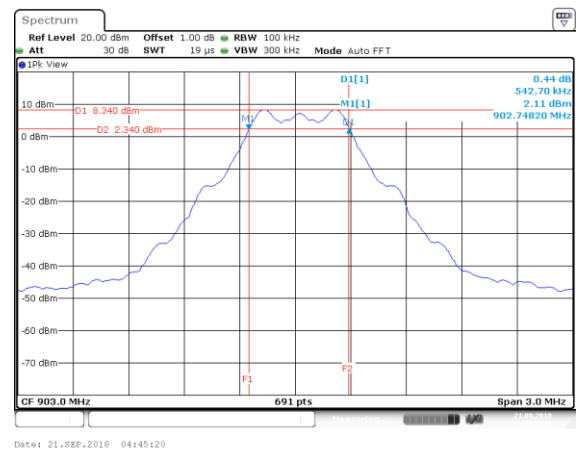


Date: 21.SEP.2018 04:45:20

Middle CH

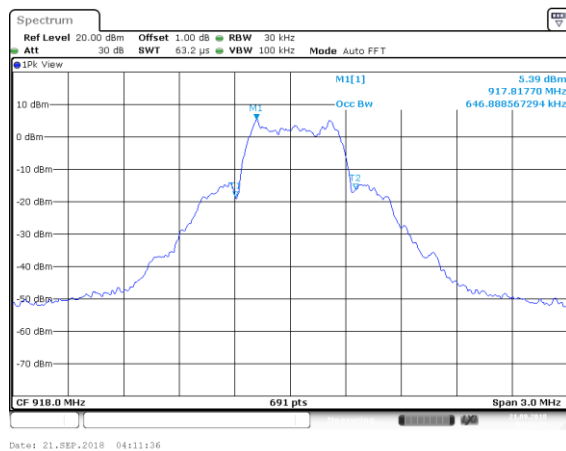


Date: 21.SEP.2018 04:11:36

Middle CH

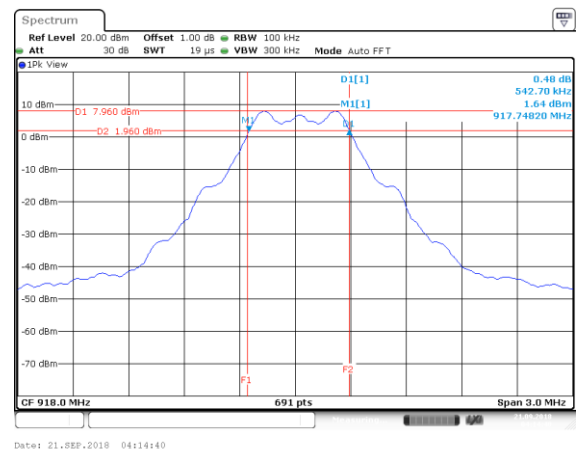

Date: 21.SEP.2018 04:14:40

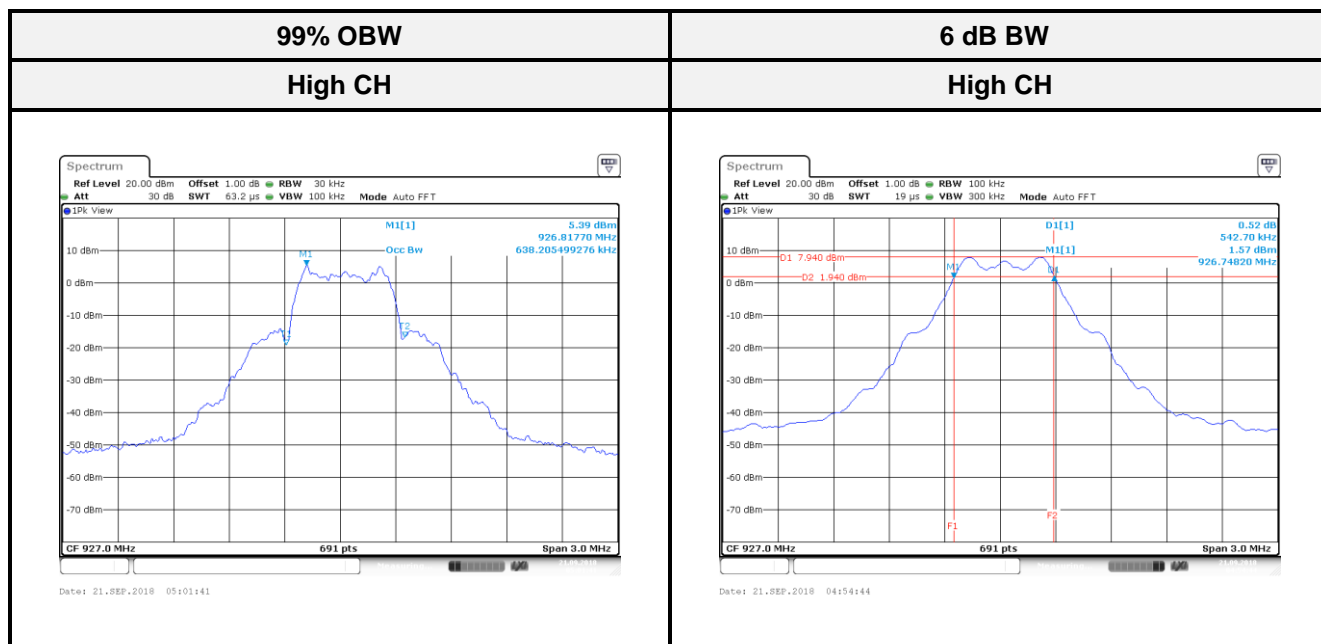

8 FCC §15.247(b) (3) – Maximum Output Power

8.1 Applicable Standard

According to FCC §15.247(b) (3),

Systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

8.2 Test Procedure

- (1) Place the EUT on a bench and set it in transmitting mode.
- (2) Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to measuring equipment.
- (3). Add a correction factor to the display.

8.3 Test Equipment List and Details

| Description | Manufacture | Model | Serial No. | Cal. Date. | Cal. Due. |
|-------------------|-----------------|--------|---------------|------------|------------|
| Conducted Room | | | | | |
| Spectrum Analyzer | Rohde & Schwarz | FSV40 | 101140 | 2017/11/15 | 2018/11/14 |
| Cable | WOKEN | SFL402 | S02-160323-07 | 2018/02/12 | 2019/02/11 |

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

8.4 Test Environmental Conditions

| | | | |
|----------------------|------------|--------------------|-----------|
| Temperature: | 23.5 °C | Relative Humidity: | 55.4 % |
| ATM Pressure: | 1015hPa | Test Engineer: | Leo Chang |
| Conducted Test Date: | 2018-09-21 | - | - |

8.5 Test Results

| Channel | Frequency (MHz) | Peak Output Power (dBm) | Peak Output Power (W) | Limit (dBm) | Result |
|---------|-----------------|-------------------------|-----------------------|-------------|------------|
| Low | 903 | 7.71 | 0.0059 | 30 | Compliance |
| Middle | 918 | 7.46 | 0.0056 | 30 | Compliance |
| High | 927 | 7.89 | 0.0062 | 30 | Compliance |

9 FCC §15.247(d) – 100 kHz Bandwidth of Frequency Band Edge

9.1 Applicable Standard

According to FCC §15.247(d),

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

9.2 Test Procedure

- (1) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- (2) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- (3) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- (4) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

9.3 Test Equipment List and Details

| Description | Manufacture | Model | Serial No. | Cal. Date. | Cal. Due. |
|-------------------|-----------------|--------|---------------|------------|------------|
| Conducted Room | | | | | |
| Spectrum Analyzer | Rohde & Schwarz | FSV40 | 101140 | 2017/11/15 | 2018/11/14 |
| Cable | WOKEN | SFL402 | S02-160323-07 | 2018/02/12 | 2019/02/11 |


***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

9.4 Test Environmental Conditions

| | | | |
|----------------------|------------|--------------------|-----------|
| Temperature: | 23.5 °C | Relative Humidity: | 55.4 % |
| ATM Pressure: | 1015hPa | Test Engineer: | Leo Chang |
| Conducted Test Date: | 2018-09-21 | - | - |

9.5 Test Results

| Channel | Frequency (MHz) | Delta Peak to Band Emission (dBc) | Limit (dBc) | Result |
|---------|-----------------|-----------------------------------|-------------|------------|
| Low | 903 | 52.93 | ≥ 20 | Compliance |
| High | 927 | 50.14 | ≥ 20 | Compliance |

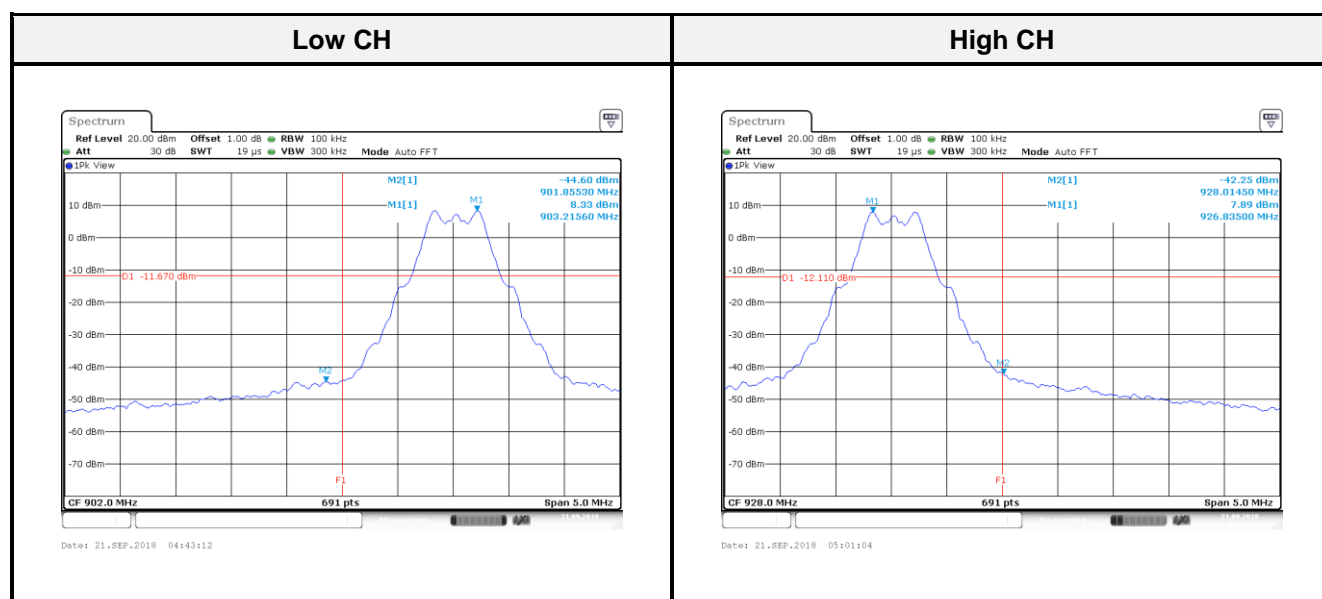

10 FCC §15.247(e) – Power Spectral Density

10.1 Applicable Standard

According to FCC §15.247(e),

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

10.2 Test Procedure

According to ANSI C63.10-2013,

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth. (3) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- (4) Set the VBW $\geq [3 \times \text{RBW}]$. (5) Detector = peak. (6) Sweep time = auto couple.
- (7) Trace mode = max hold. (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level within the RBW.
- (10) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

10.3 Test Equipment List and Details

| Description | Manufacture | Model | Serial No. | Cal. Date. | Cal. Due. |
|-------------------|-----------------|--------|---------------|------------|------------|
| Conducted Room | | | | | |
| Spectrum Analyzer | Rohde & Schwarz | FSV40 | 101140 | 2017/11/15 | 2018/11/14 |
| Cable | WOKEN | SFL402 | S02-160323-07 | 2018/02/12 | 2019/02/11 |


***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

10.4 Test Environmental Conditions

| | | | |
|----------------------|------------|--------------------|-----------|
| Temperature: | 23.5 °C | Relative Humidity: | 55.4 % |
| ATM Pressure: | 1015hPa | Test Engineer: | Leo Chang |
| Conducted Test Date: | 2018-09-21 | - | - |

10.5 Test Results

| Channel | Frequency (MHz) | PSD (dBm/3 kHz) | Limit (dBm/3 kHz) | Result |
|---------|-----------------|-----------------|-------------------|------------|
| Low | 903 | -4.46 | 8 | Compliance |
| Middle | 918 | -4.79 | 8 | Compliance |
| High | 927 | -5.00 | 8 | Compliance |

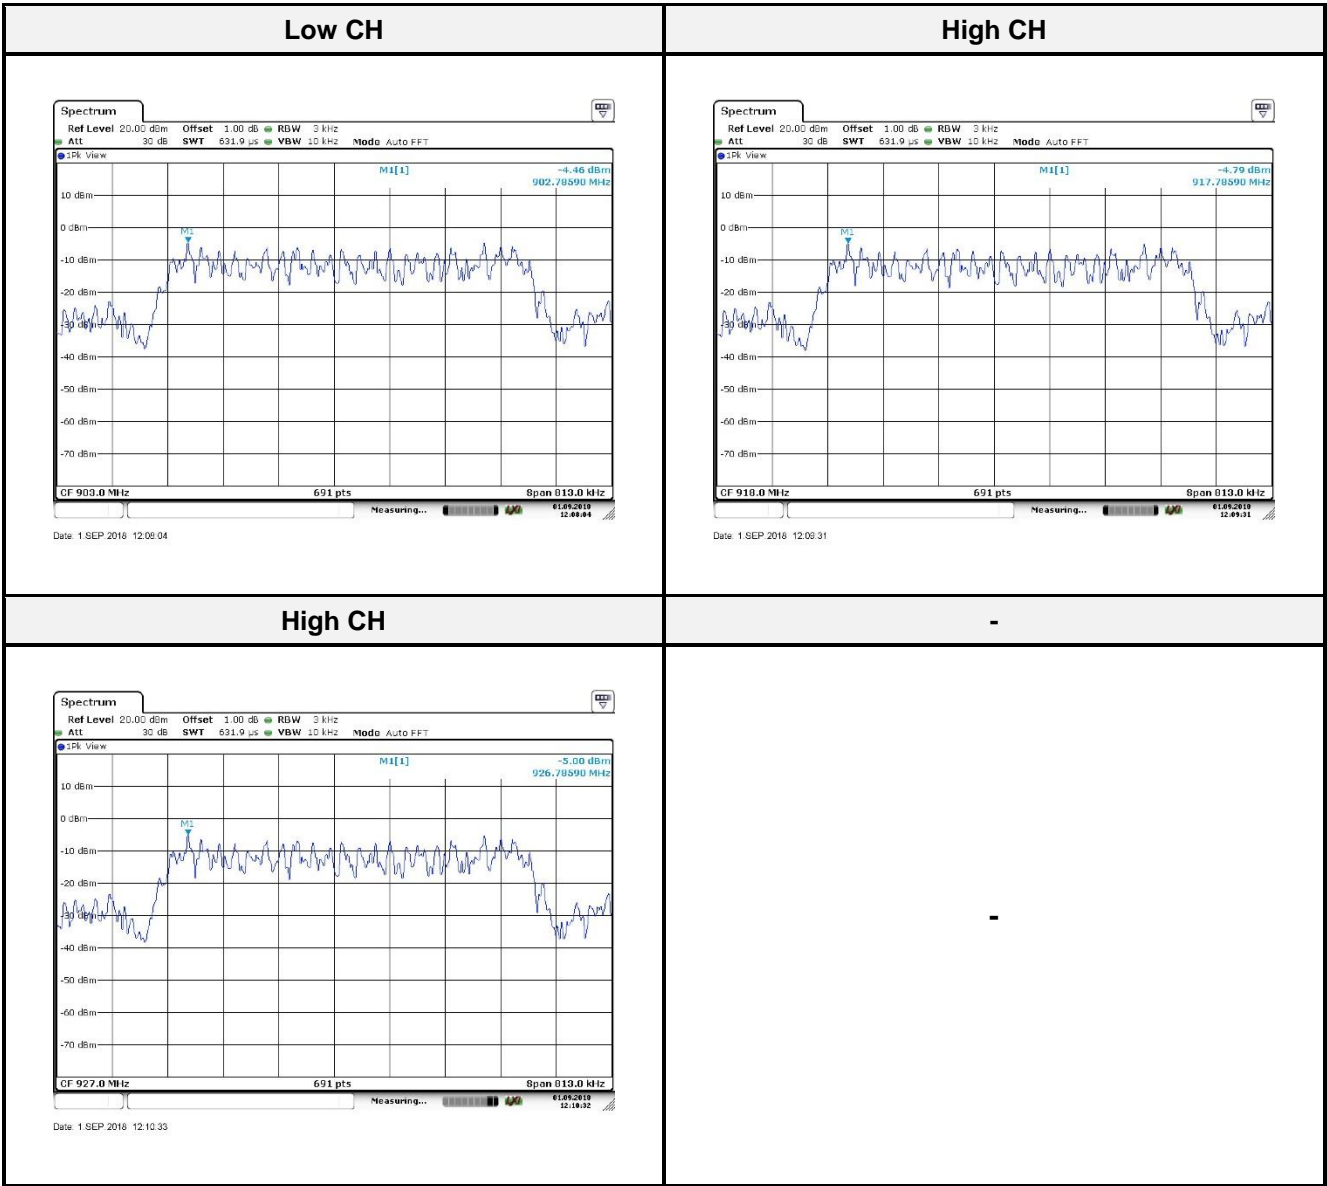

----- END OF REPORT -----