



REPORT No.: SZ18100073W01

# TEST REPORT

**APPLICANT** : BLU Products, Inc.

**PRODUCT NAME** : 3G Feature Phone

**MODEL NAME** : JOY 3G

**BRAND NAME** : BLU

**FCC ID** : YHLBLUJOY3G

**STANDARD(S)** : 47 CFR Part 15 Subpart C

**TEST DATE** : 2018-10-19 to 2018-11-09

**ISSUE DATE** : 2018-11-09

Tested by:

Wang Meng  
Wang Meng (Test Engineer)

Approved by:

Peng Huarui  
Peng Huarui ( Supervisor )

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB**

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.  
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





## DIRECTORY

<b>1. Technical Information .....</b>	<b>4</b>
<b>1.1. Applicant and Manufacturer Information.....</b>	<b>4</b>
<b>1.2. Equipment Under Test (EUT) Description.....</b>	<b>4</b>
<b>1.3. Test Standards and Results .....</b>	<b>6</b>
<b>1.4. Environmental Conditions .....</b>	<b>6</b>
<b>2. 47 CFR Part 15C Requirements.....</b>	<b>7</b>
<b>2.1. Antenna requirement.....</b>	<b>7</b>
<b>2.2. Number of Hopping Frequency.....</b>	<b>7</b>
<b>2.3. Peak Output Power .....</b>	<b>11</b>
<b>2.4. 20dB Bandwidth .....</b>	<b>18</b>
<b>2.5. Carried Frequency Separation.....</b>	<b>25</b>
<b>2.6. Time of Occupancy (Dwell time) .....</b>	<b>28</b>
<b>2.7. Conducted Spurious Emissions .....</b>	<b>35</b>
<b>2.8. Conducted Emission .....</b>	<b>48</b>
<b>2.9. Restricted Frequency Bands .....</b>	<b>52</b>
<b>2.10. Radiated Emission .....</b>	<b>61</b>
<b>Annex A Test Uncertainty .....</b>	<b>74</b>
<b>Annex B Testing Laboratory Information.....</b>	<b>75</b>



REPORT No.: SZ18100073W01

Change History		
Issue	Date	Reason for change
1.0	2018-11-09	First edition



# 1. Technical Information

**Note:** Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	BLU Products, Inc.
<b>Applicant Address:</b>	10814 NW 33rd St # 100 Doral, FL 33172, USA
<b>Manufacturer:</b>	BLU Products, Inc.
<b>Manufacturer Address:</b>	10814 NW 33rd St # 100 Doral, FL 33172, USA

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	3G Feature Phone	
<b>Serial No:</b>	(N/A, marked #1 by test site)	
<b>Hardware Version:</b>	3703-MB-V0.3	
<b>Software Version:</b>	3708_03C_CFZZ_BLU_QQVGA_Y64_BT_FM_SC_V01_20181103_1623	
<b>Modulation Type:</b>	FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))	
<b>Operating Frequency Range:</b>	The frequency range used is 2402MHz – 2480MHz (79 channels, at intervals of 1MHz);	
<b>Bluetooth Version:</b>	Bluetooth classic	
<b>Antenna Type:</b>	PIFA Antenna	
<b>Antenna Gain:</b>	-0.65 dBi	
<b>Accessory Information:</b>	Battery	
	<b>Brand Name:</b>	BLU
	<b>Model No.:</b>	C624043100L
	<b>Serial No.:</b>	(N/A, marked #1 by test site)
	<b>Capacity:</b>	1000mAh
	<b>Rated Voltage:</b>	3.7V
	<b>Charge Limit:</b>	4.2V



<b>Accessory Information:</b>	AC Adapter	
	Brand Name:	BLU
	Model No.:	US-NB-0550
	Serial No.:	(N/A, marked #1 by test site)
	Rated Input:	~ 100-240V, 50/60Hz, 0.15A
	Rated Output:	≡5V, 0.55A

**Note 1:** The EUT contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies is  $F(\text{MHz})=2402+1*n$  ( $0 \leq n \leq 78$ ). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

**Note 2:** The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT into the test mode, and then use MT8852B base station to control the EUT continuous transmission.

**Note 3:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



### 1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	15.247(a)	Number of Hopping Frequency	Oct 19, 2018	Wang Meng	PASS
3	15.247(b)	Peak Output Power	Oct 19, 2018	Wang Meng	PASS
4	15.247(a)	20dB Bandwidth	Oct 19, 2018	Wang Meng	PASS
5	15.247(a)	Carrier Frequency Separation	Oct 19, 2018	Wang Meng	PASS
6	15.247(a)	Time of Occupancy (Dwell time)	Oct 19, 2018	Wang Meng	PASS
7	15.247(d)	Conducted Spurious Emission	Oct 19, 2018	Wang Meng	PASS
8	15.207	Conducted Emission	Nov 09, 2018	Zheng Fengjian	PASS
9	15.247(d)	Restricted Frequency Bands	Nov 08, 2018	Zheng Fengjian	PASS
10	15.209, 15.247(d)	Radiated Emission	Nov 08, 2018	Zheng Fengjian	PASS

**Note 1:** The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013.

### 1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

## 2. 47 CFR Part 15C Requirements

### 2.1. Antenna requirement

#### 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


### 2.2. Number of Hopping Frequency

#### 2.2.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

#### 2.2.2. Test Description

##### A. Test Setup:

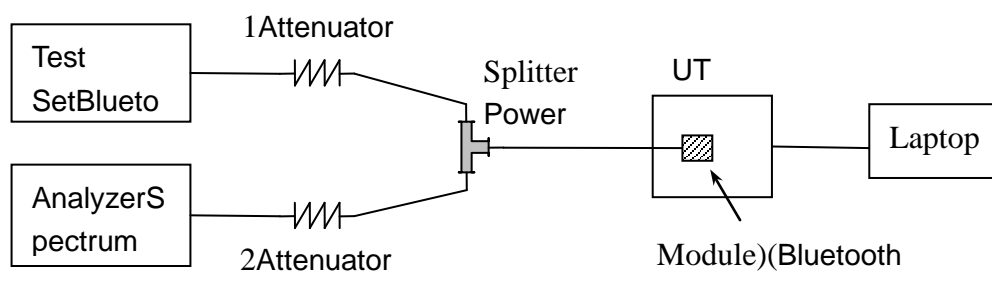

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

**B. Equipments List:**

Please reference ANNEX B(4).

**2.2.3. Test Procedure**

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW  $\geq$  1% of the span

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

**2.2.4. Test Result**

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.


**A. Test Verdict:**

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	PASS
8-DPSK	2400 - 2483.5	79	15	PASS







## B. Test Plots:

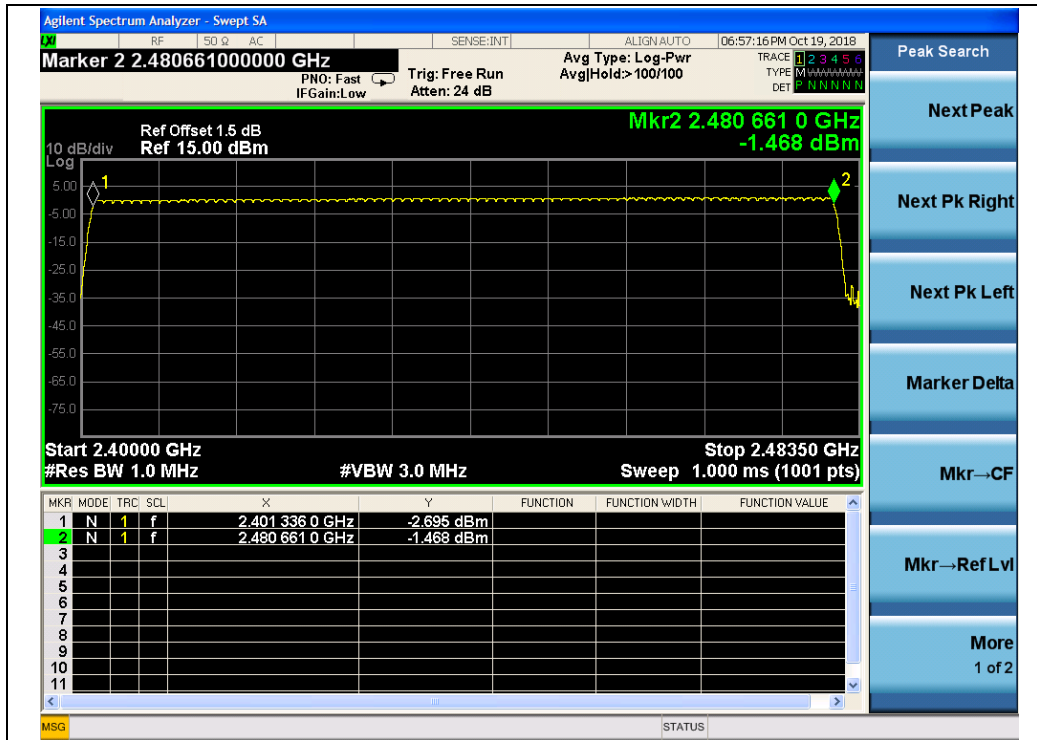

(GFSK)

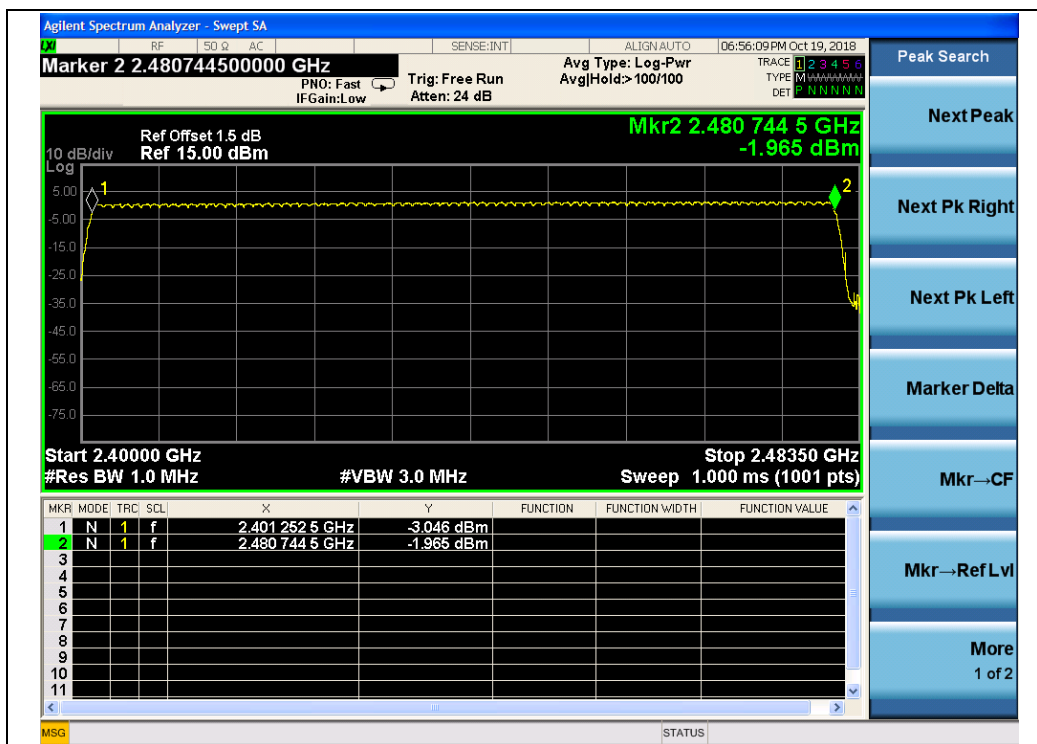 $(\pi/4\text{-DQPSK})$

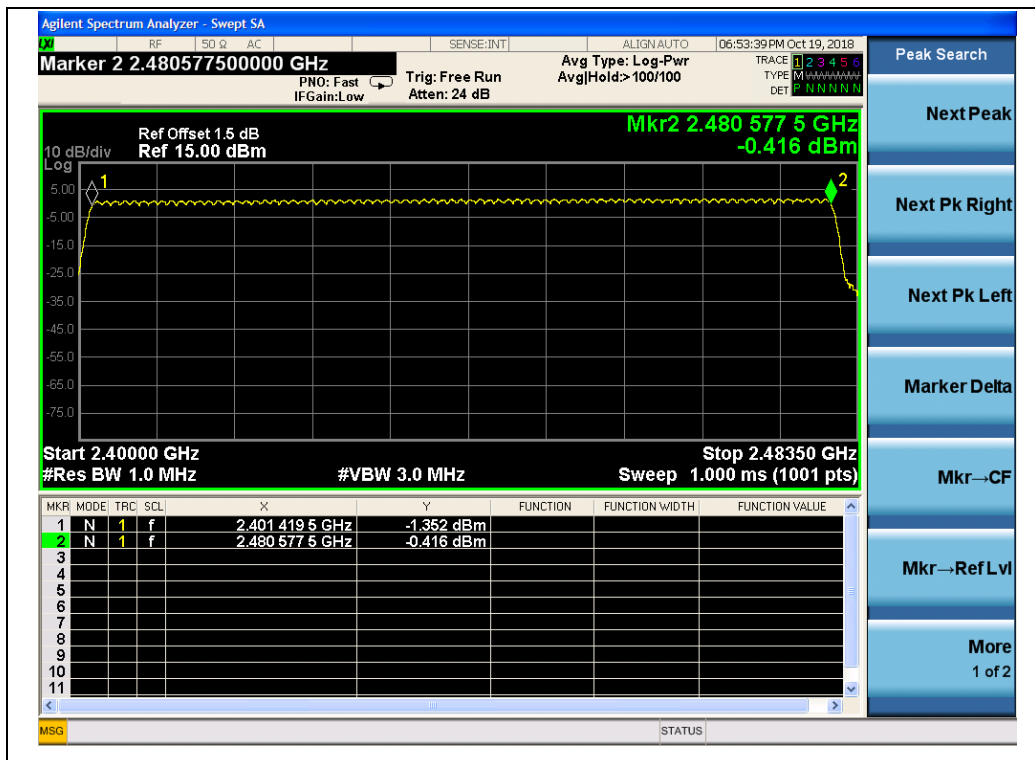

(8-DPSK)


## 2.3. Peak Output Power

### 2.3.1. Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

### 2.3.2. Test Description

#### A. Test Setup:

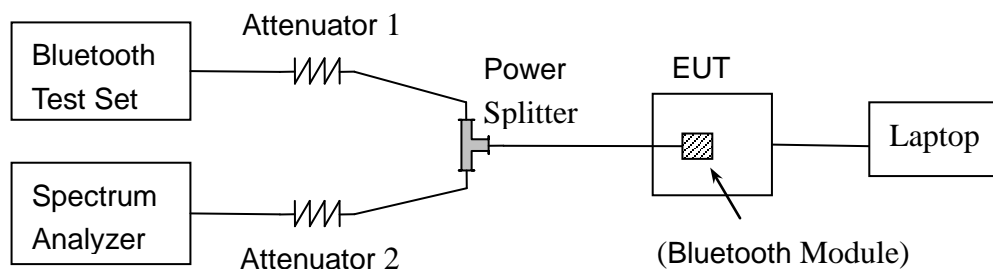

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

#### B. Equipments List:

Please refer ANNEX B(4).

### 2.3.3. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the module. The lowest, middle and highest channel were tested by USB Wideband Power Sensor.



## GFSK Mode


### A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	0.39	0.001	20.97	0.125	PASS
39	2441	0.98	0.001			PASS
78	2480	0.82	0.001			PASS


### B. Test Plots:



(GFSK, Channel 0, 2402MHz)

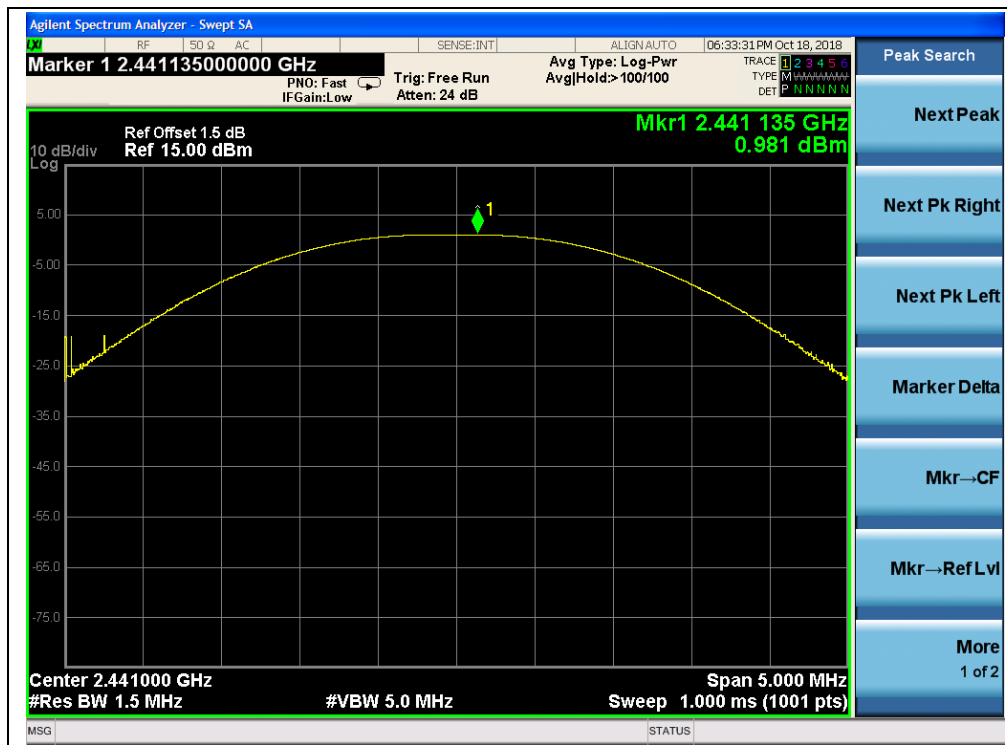


(GFSK, Channel 39, 2441MHz)

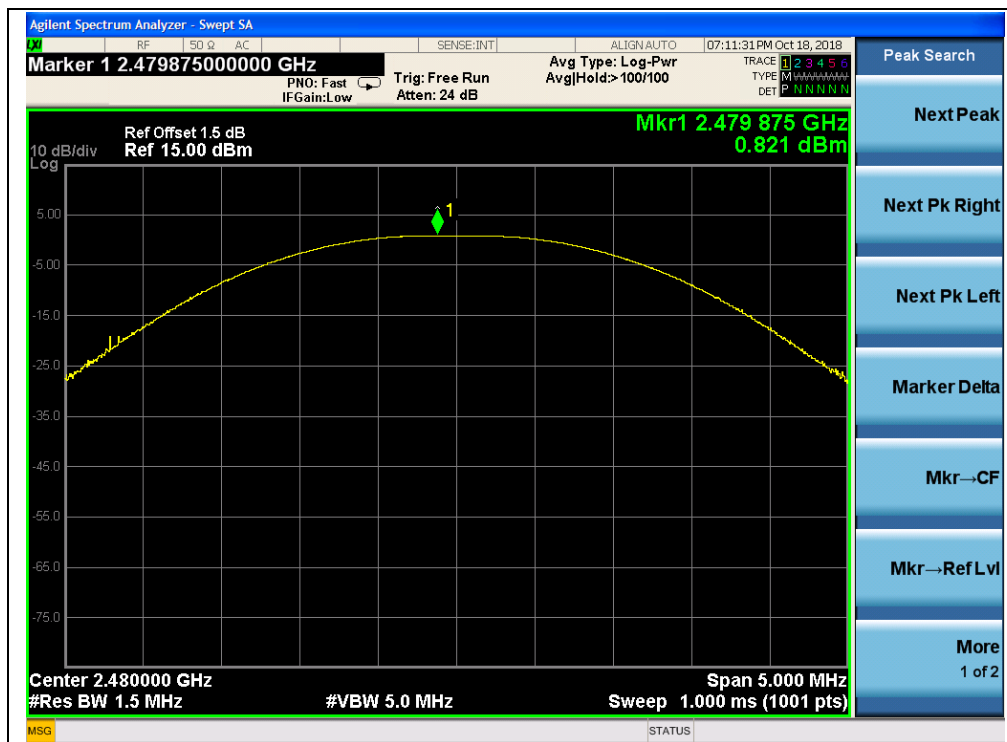


(GFSK, Channel 78, 2480MHz)

 **$\pi/4$ -DQPSK Mode****A. Test Verdict:**


Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	0.39	0.001	20.97	0.125	PASS
39	2441	0.91	0.001			PASS
78	2480	0.83	0.001			PASS

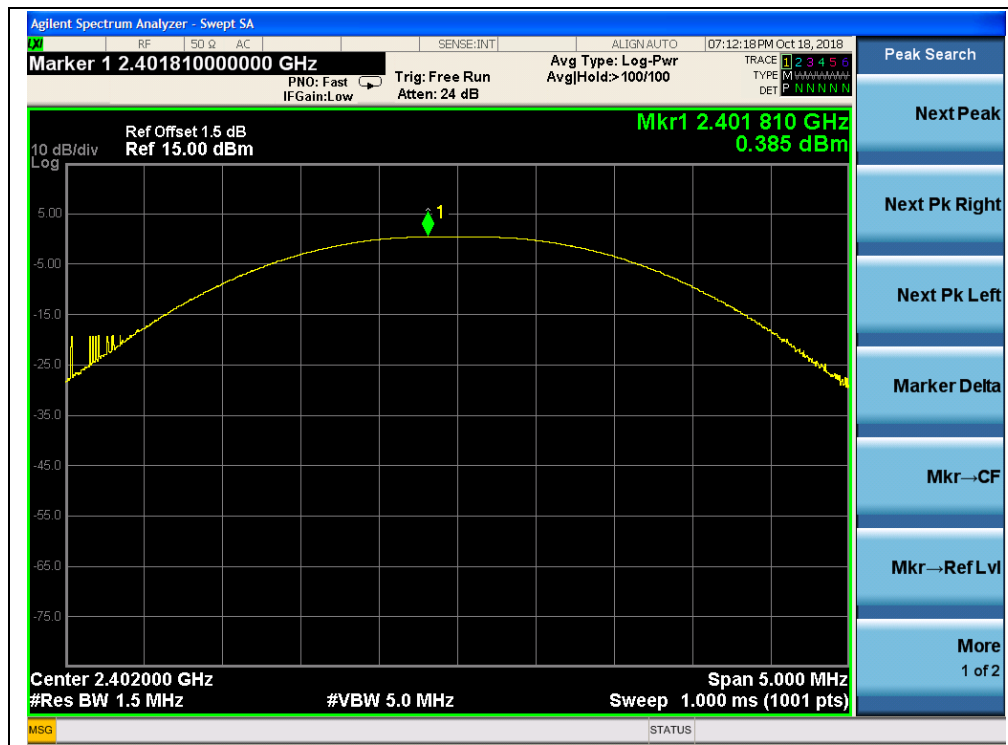**B. Test Plots:**

(π/4-DQPSK, Channel 0, 2402MHz)

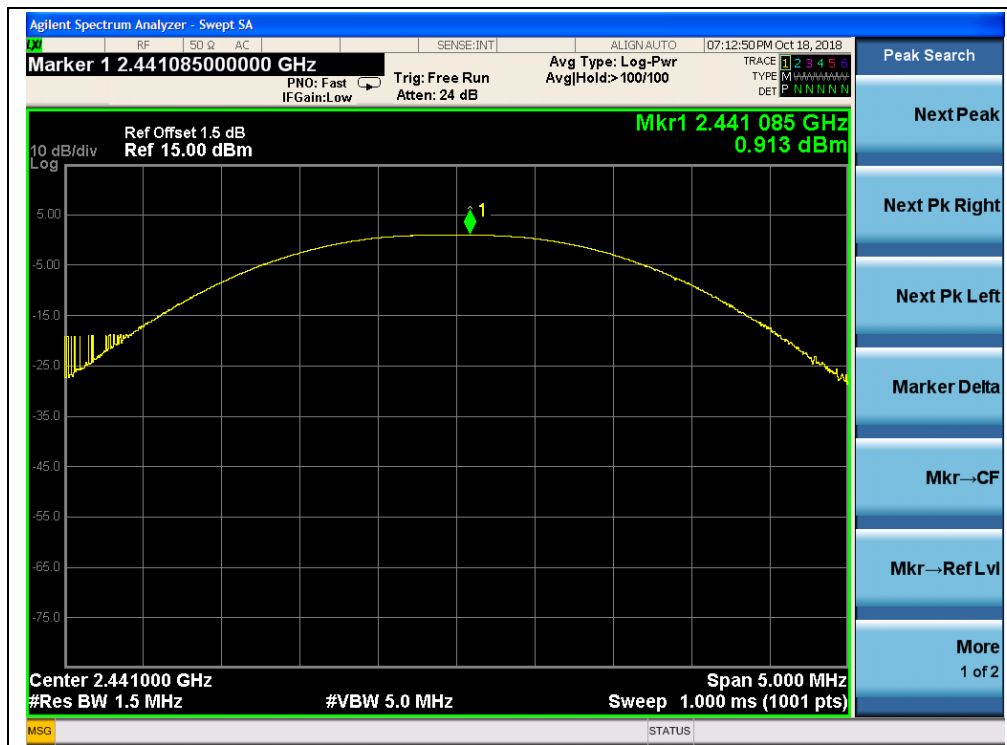


(π/4-DQPSK, Channel 39, 2441MHz)

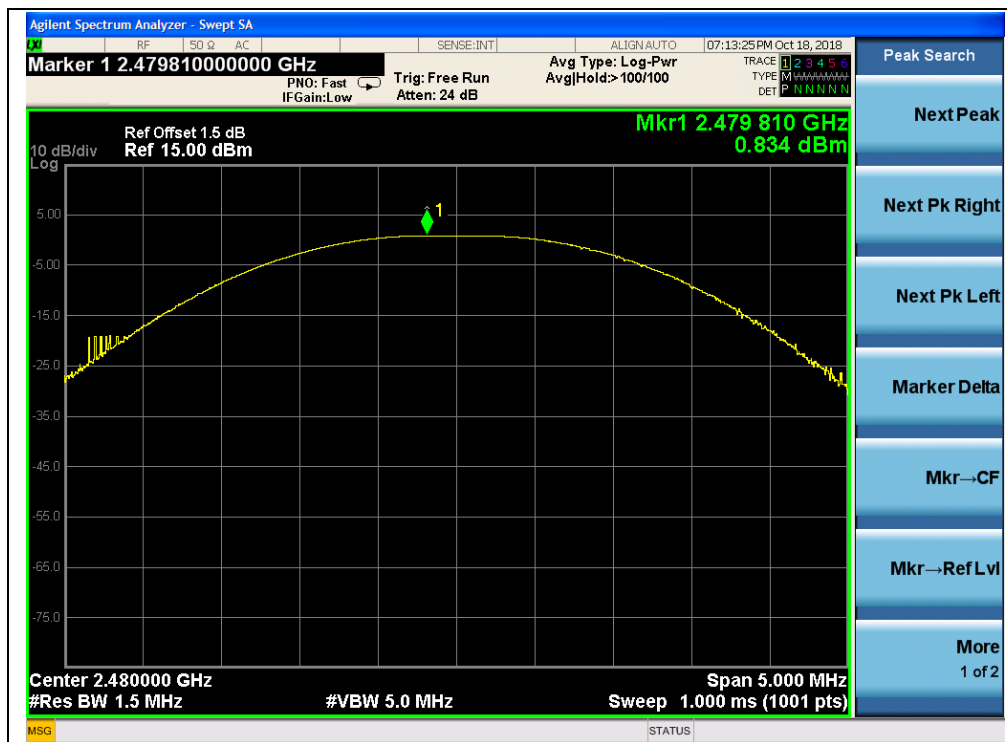

(π/4-DQPSK, Channel 78, 2480MHz)


**8-DPSK Mode****A. Test Verdict:**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	1.66	0.001	20.97	0.125	PASS
39	2441	2.17	0.002			PASS
78	2480	2.07	0.002			PASS

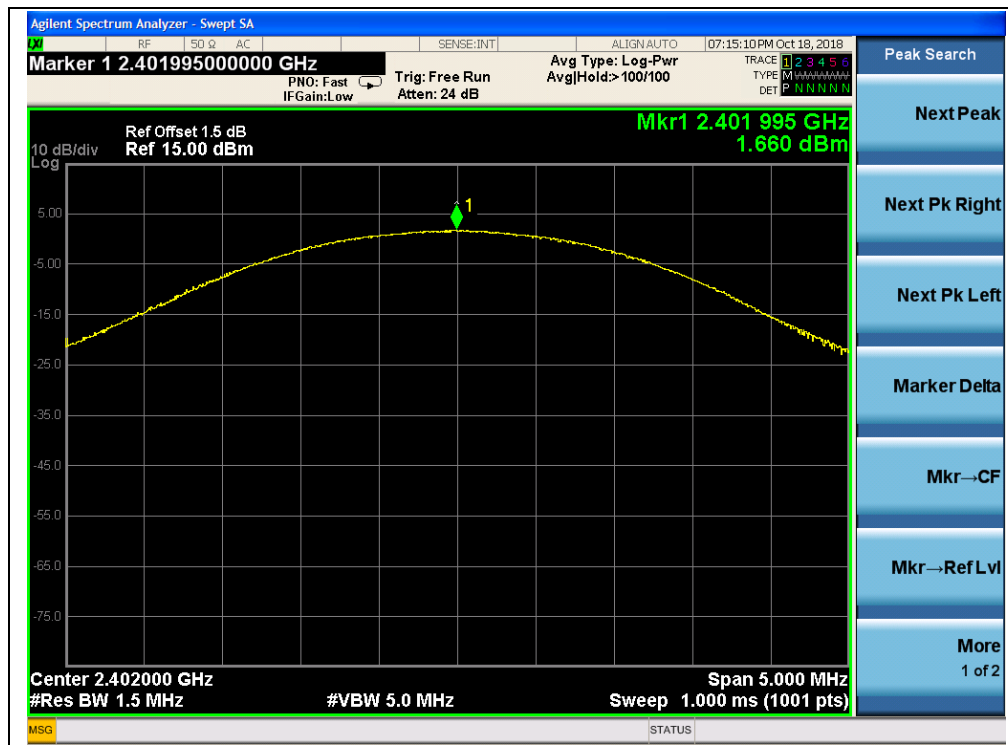
**B. Test Plots:**

(8-DPSK, Channel 0, 2402MHz)



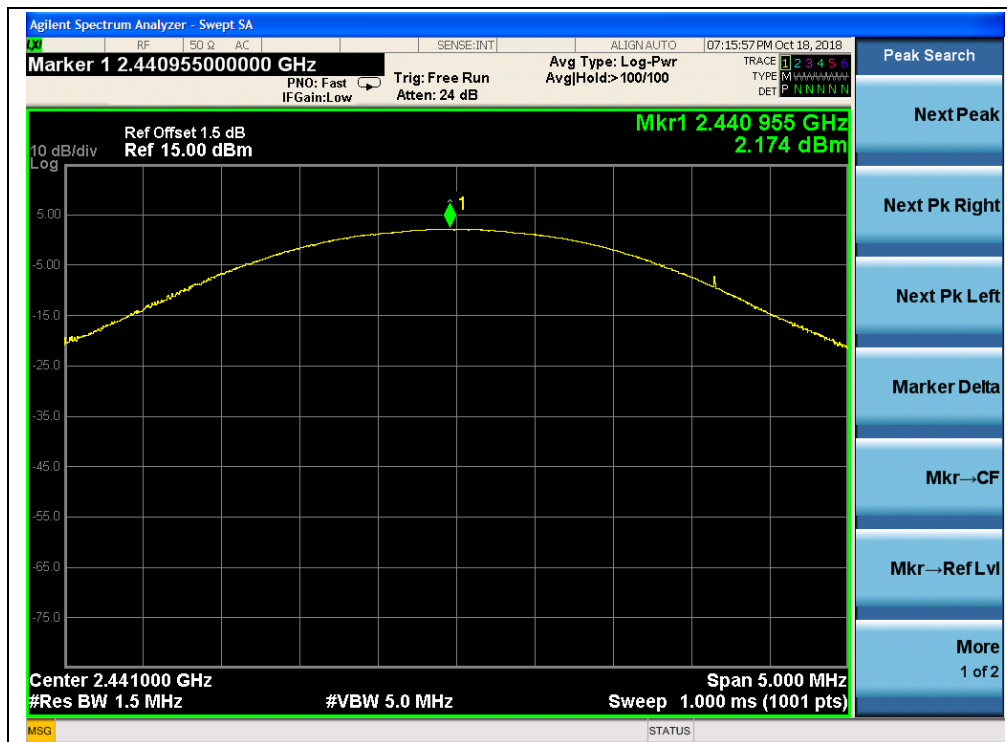

(8-DPSK, Channel 39, 2441MHz)

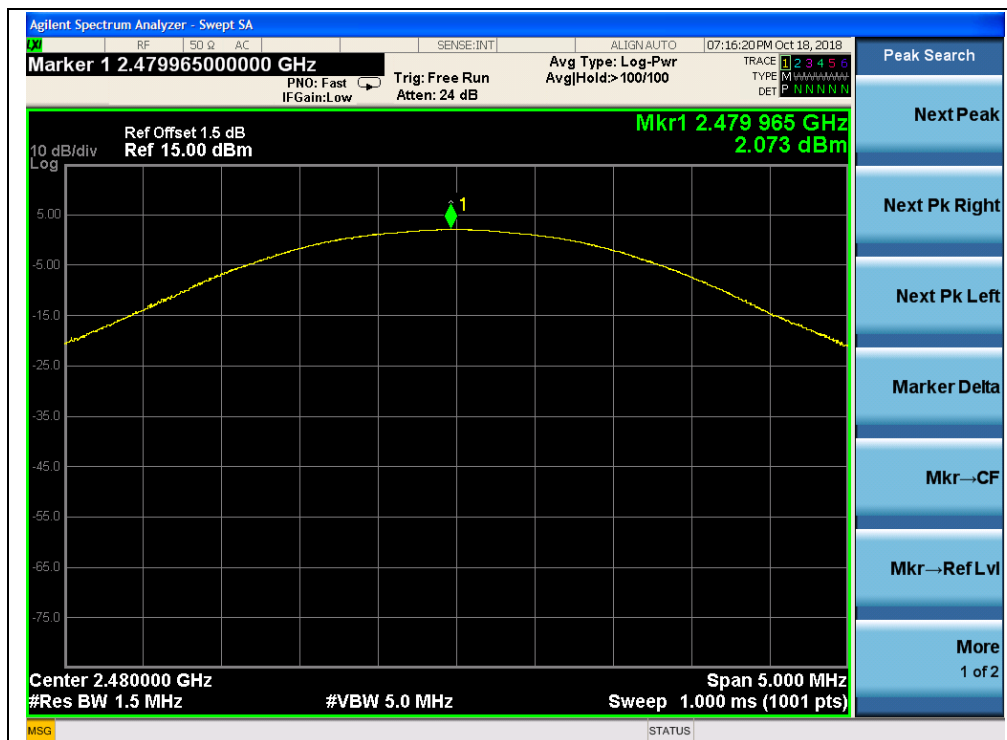

(8-DPSK, Channel 78, 2480MHz)


## 2.4. 20dB Bandwidth

### 2.4.1. Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ( $10 \cdot \log 1\% = 20\text{dB}$ ) taking the total RF output power.

### 2.4.2. Test Description

#### A. Test Setup:

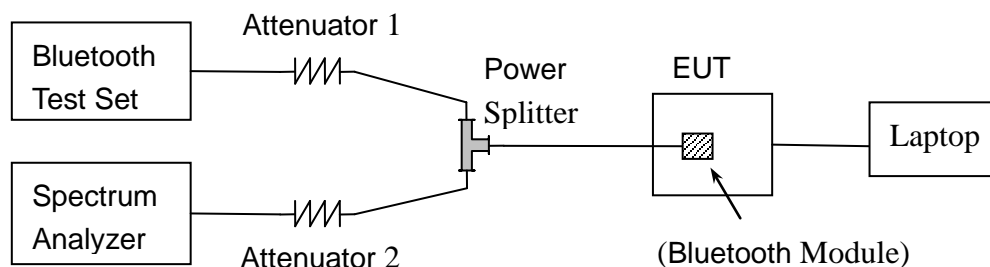

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

#### B. Equipments List:

Please refer ANNEX B(4).

### 2.4.3. Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW  $\geq$  1% of the 20 dB bandwidth

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold



#### 2.4.4. Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.

#### GFSK Mode


##### A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	0.936	PASS
39	2441	0.946	PASS
78	2480	0.946	PASS

##### B. Test Plots:

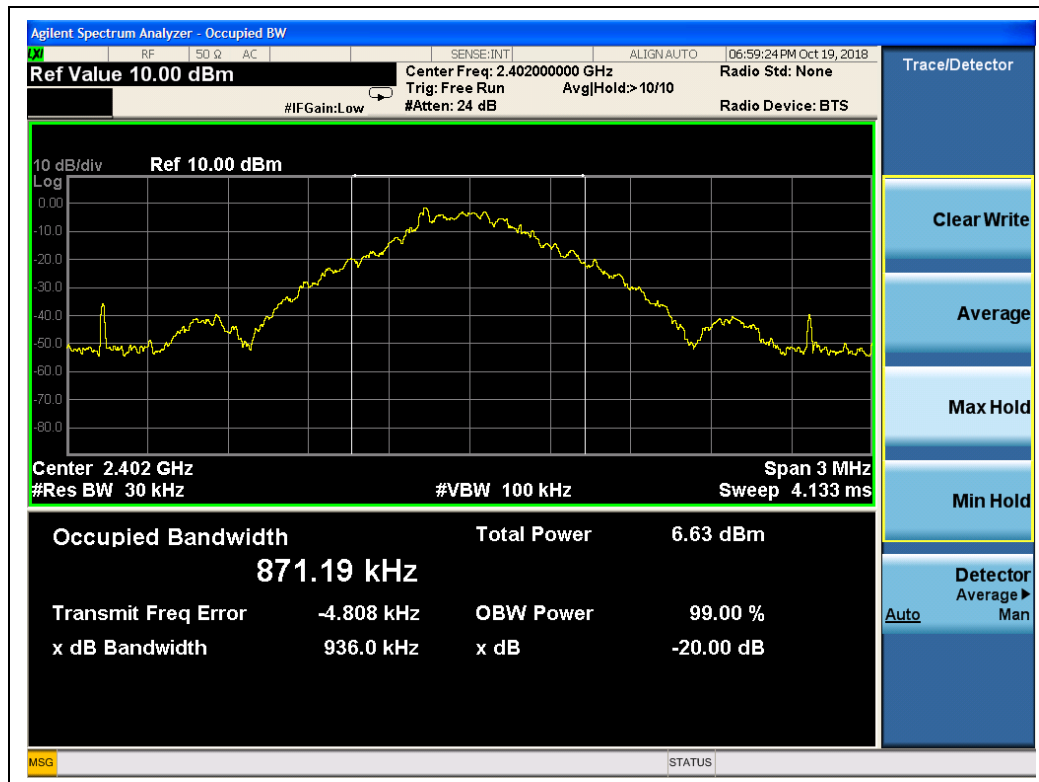

(GFSK, Channel 0, 2402MHz)

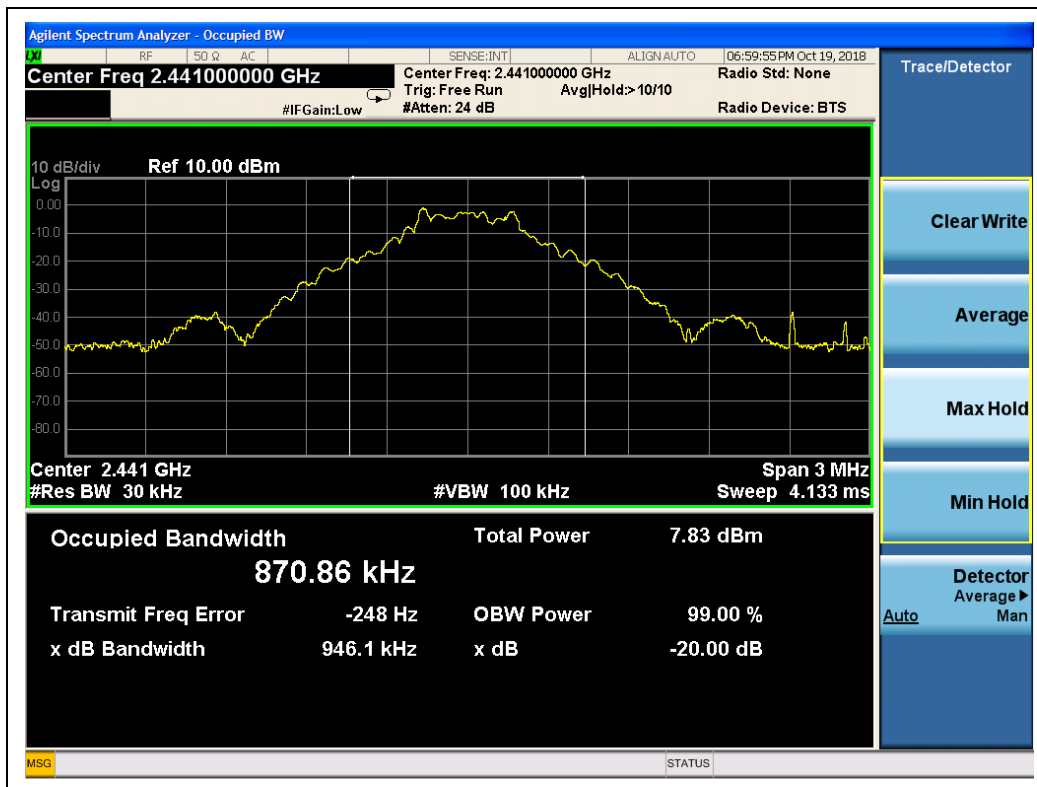

(GFSK, Channel 39, 2441MHz)




(GFSK, Channel 78, 2480MHz)

 $\pi/4$ -DQPSK Mode


## A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.272	PASS
39	2441	1.275	PASS
78	2480	1.273	PASS


## B. Test Plots:

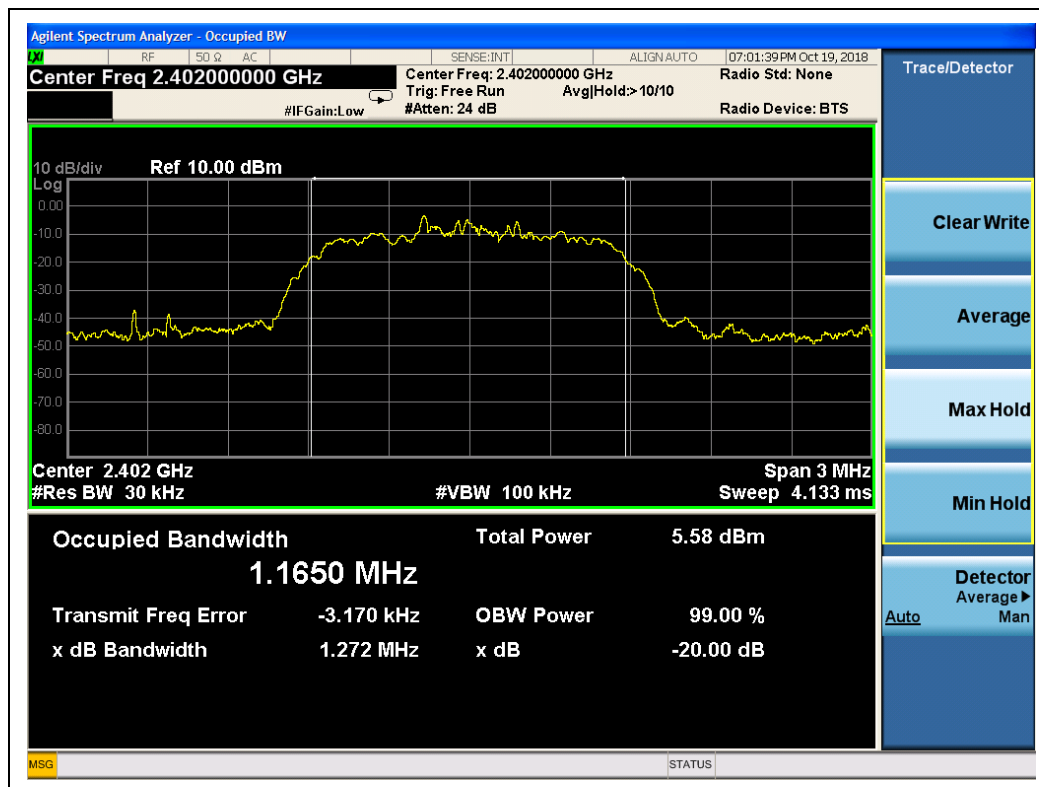

(π/4-DQPSK, Channel 0, 2402MHz)

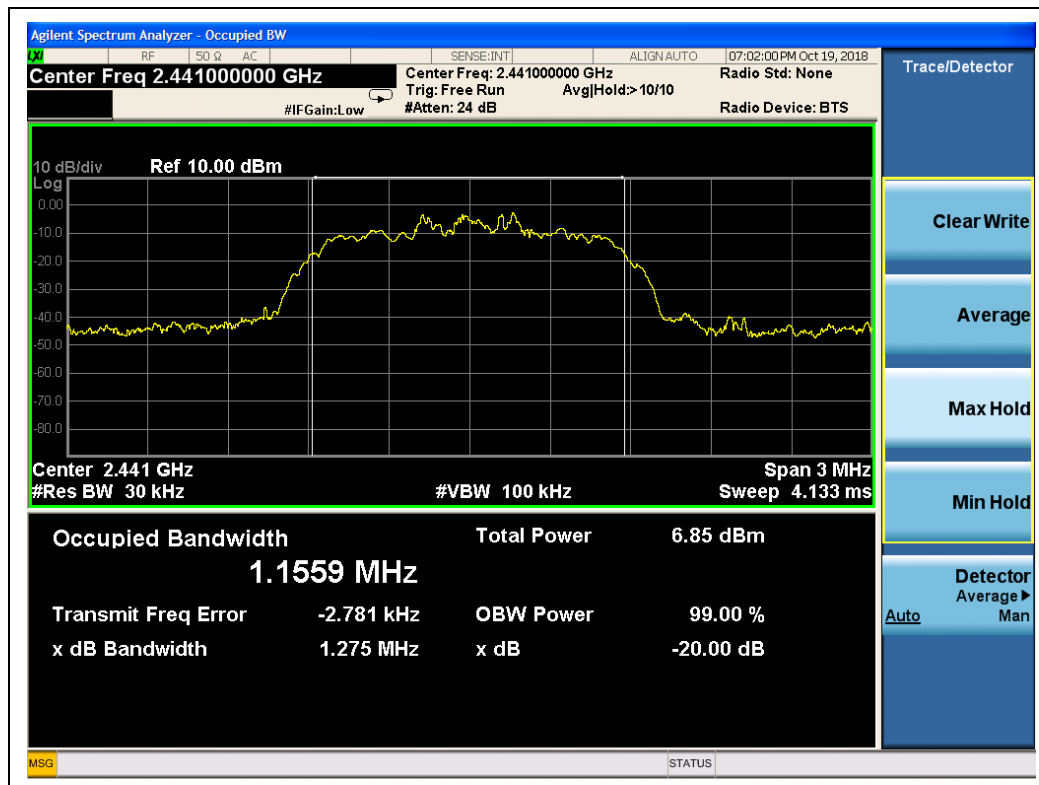

(π/4-DQPSK, Channel 39, 2441MHz)

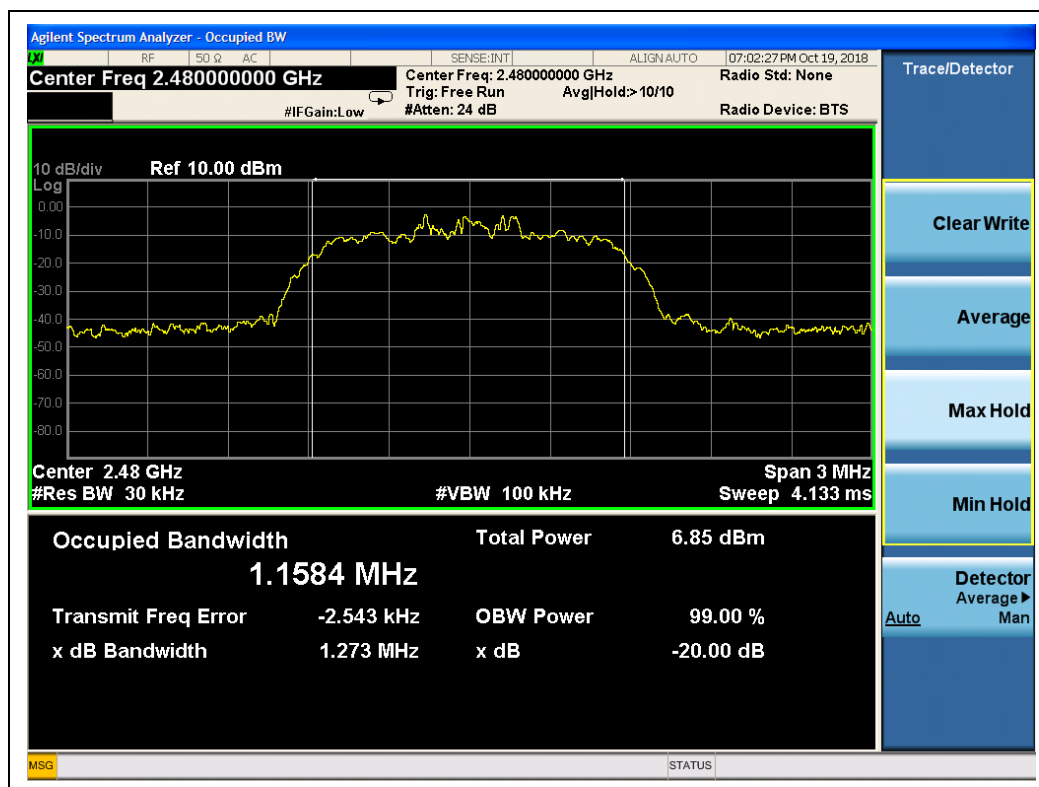

(π/4-DQPSK, Channel 78, 2480MHz)




## 8-DPSK Mode


### A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.267	PASS
39	2441	1.266	PASS
78	2480	1.264	PASS


### B. Test Plots:

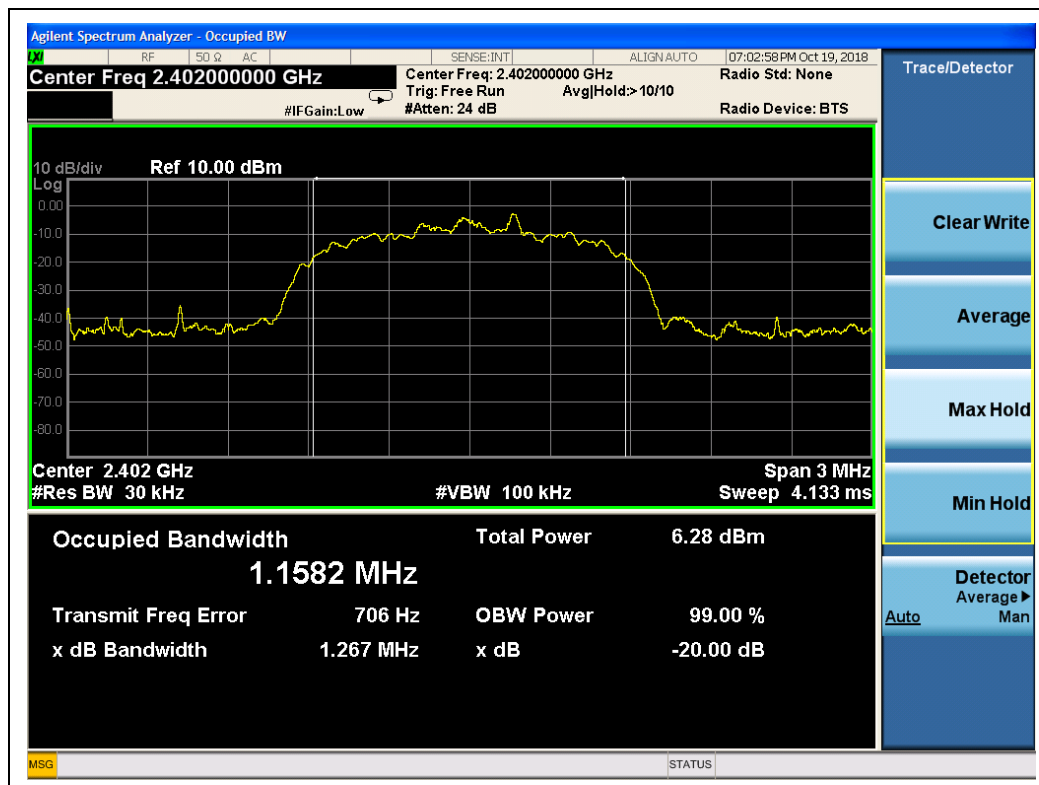

(8-DPSK, Channel 0, 2402MHz)

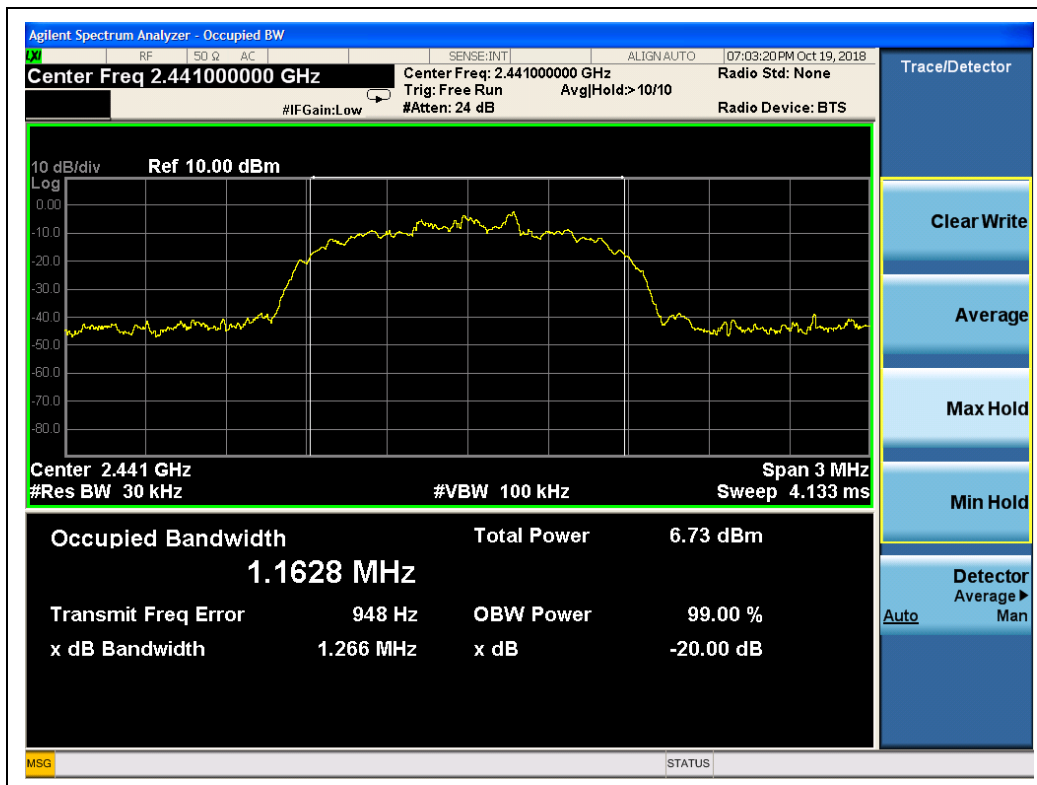

(8-DPSK, Channel 39, 2441MHz)

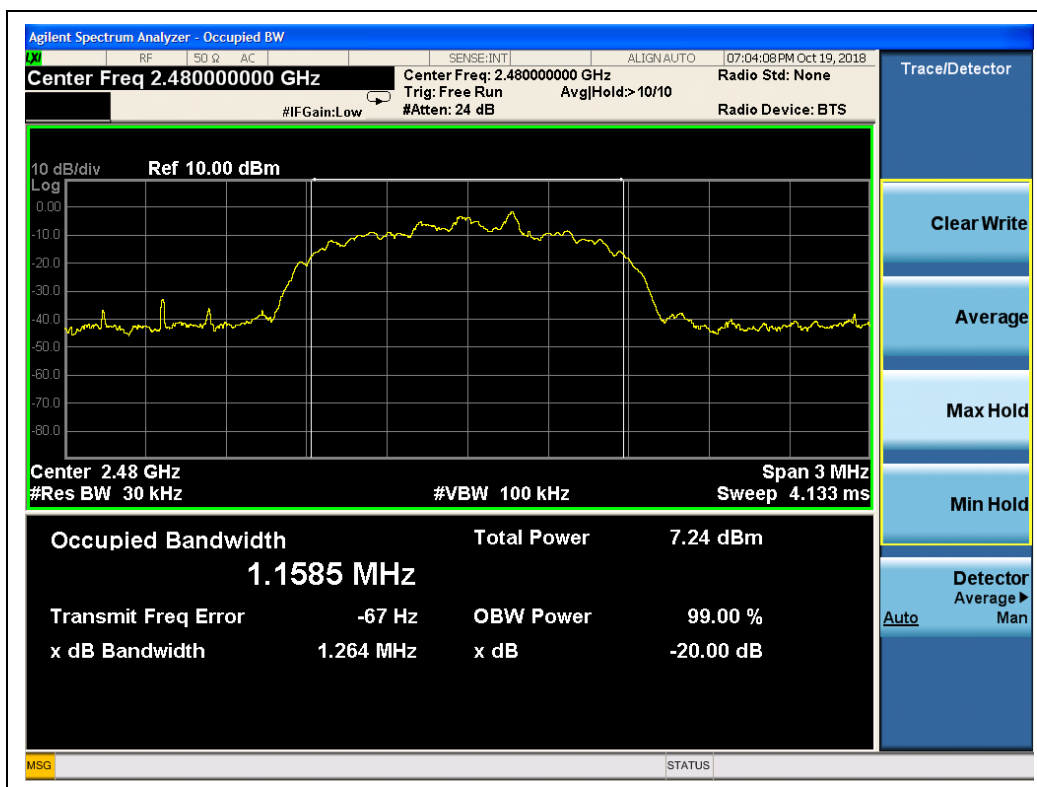

(8-DPSK, Channel 78, 2480MHz)




## 2.5. Carried Frequency Separation

### 2.5.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

### 2.5.2. Test Description

#### A. Test Setup:

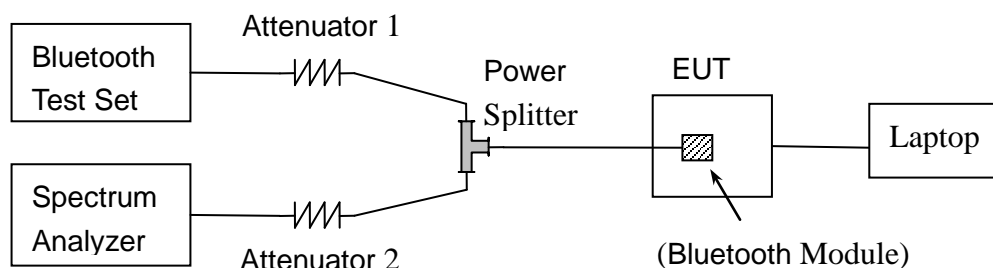

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

#### B. Equipments List:

Please refer ANNEX B(4).

### 2.5.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW)  $\geq 1\%$  of the span

Video (or Average) Bandwidth (VBW)  $\geq$  RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.


#### 2.5.4. Test Result

The Bluetooth Module operates at hopping-on test mode. For any adjacent channels (e.g. the channel 39 and 40 as showed below), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 2.4.4), whichever is greater. So, the verdict is PASSING.

Test Mode	Measured Channel Numbers	Carried Frequency Separation	20dB bandwidth (MHz)	Min. Limit	Verdict
GFSK	39 and 40	1.002	0.936	two-thirds of the 20dB bandwidth	PASS
$\pi/4$ -DQPSK	39 and 40	1.002	1.272		PASS
8-DPSK	39 and 40	1.008	1.264		PASS

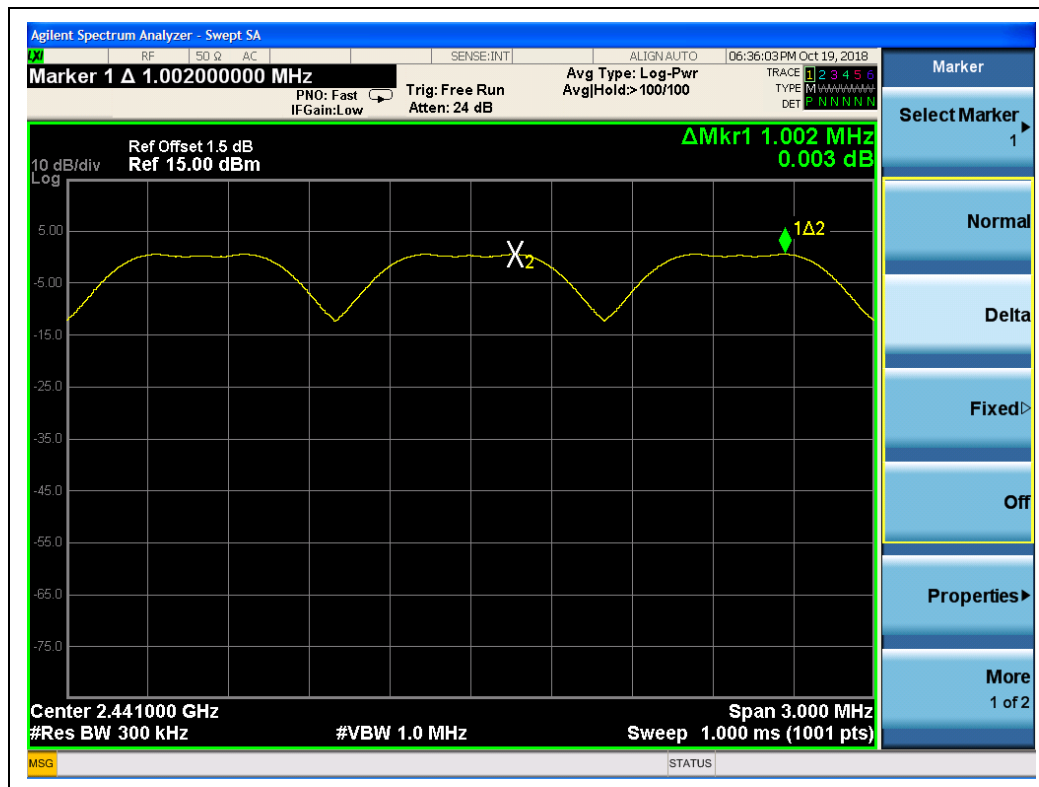

(GFSK)

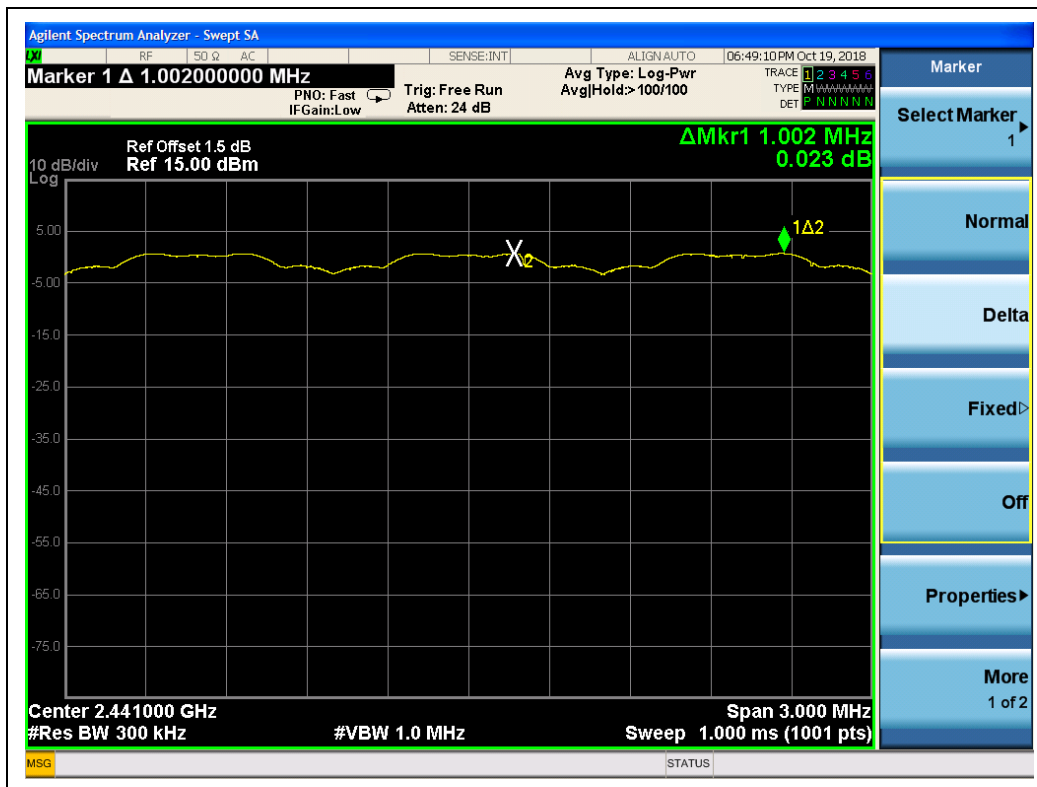 $(\pi/4\text{-DQPSK})$  $(8\text{-DPSK})$


## 2.6. Time of Occupancy (Dwell time)

### 2.6.1. Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 2.6.2. Test Description

#### A. Test Setup:

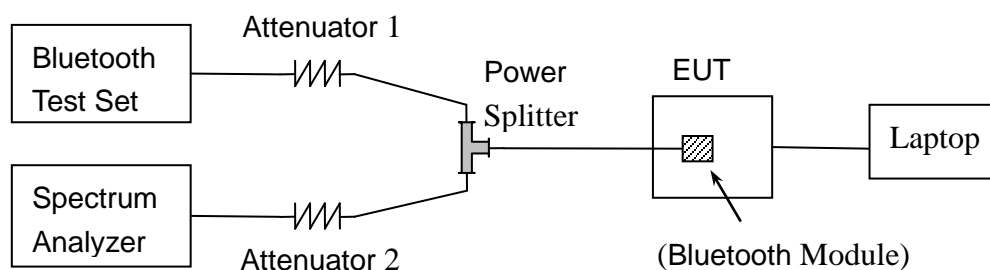

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

#### B. Equipments List:

Please refer ANNEX B(4).

### 2.6.3. Test Procedure

Option 1:

DH1: Dwell time equal to Pulse time (ms) \* (1600 / 2 / 79) \* 31.6 Millisecond  
DH3: Dwell time equal to Pulse time (ms) \* (1600 / 4 / 79) \* 31.6 Millisecond  
DH5: Dwell time equal to Pulse Time (ms) \* (1600 / 6 / 79) \* 31.6 Millisecond



AFH Mode:

DH1: Dwell time equal to Pulse time (ms)  $\times (800 / 2 / 20) \times (0.4 \times 20)$  Millisecond  
 DH3: Dwell time equal to Pulse time (ms)  $\times (800 / 4 / 20) \times (0.4 \times 20)$  Millisecond  
 DH5: Dwell time equal to Pulse Time (ms)  $\times (800 / 6 / 20) \times (0.4 \times 20)$  Millisecond


#### 2.6.4. Test Result

##### GFSK Mode


##### A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.41	131.20	65.60	0.4	PASS
DH3	1.61	257.60	128.80		PASS
DH5	2.85	304.00	152.00		PASS


##### B. Test Plots:

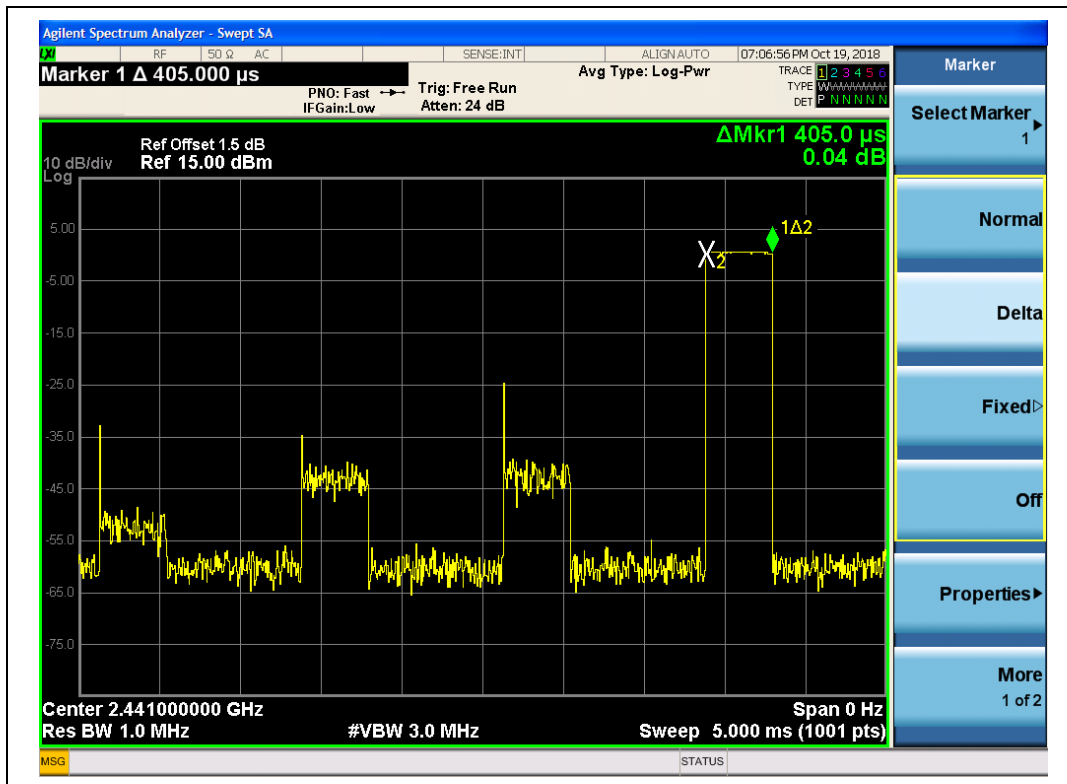

(DH1, GFSK)

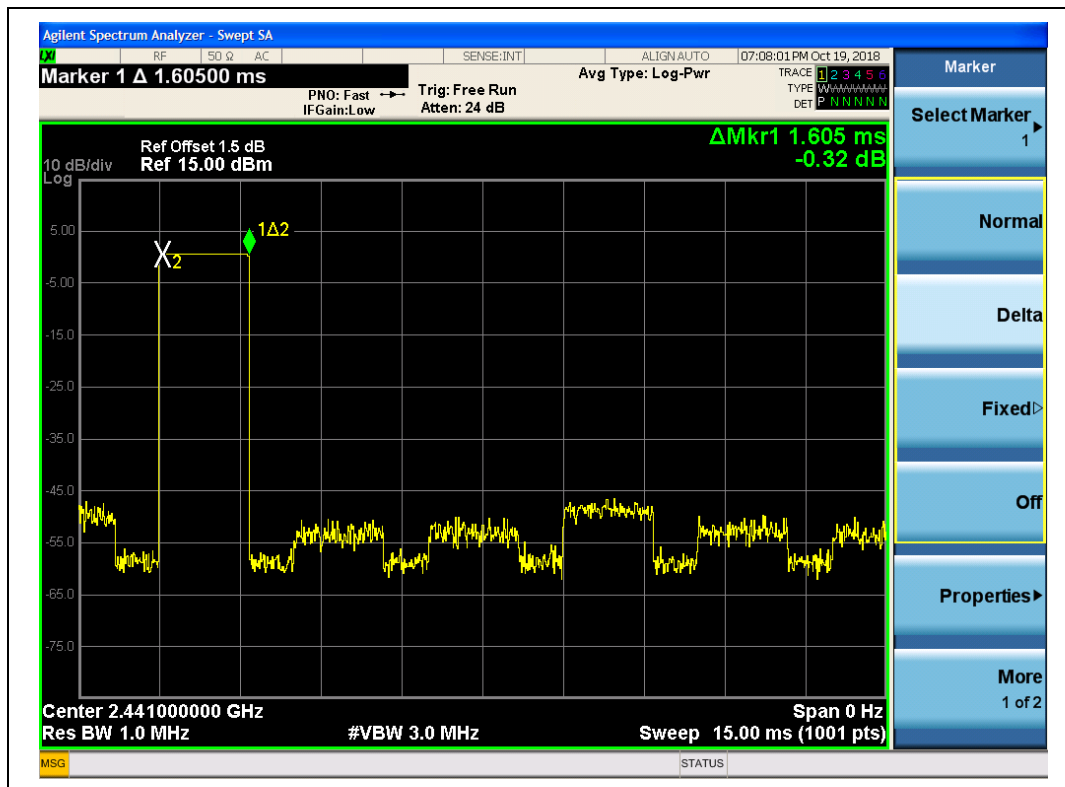

(DH3, GFSK)

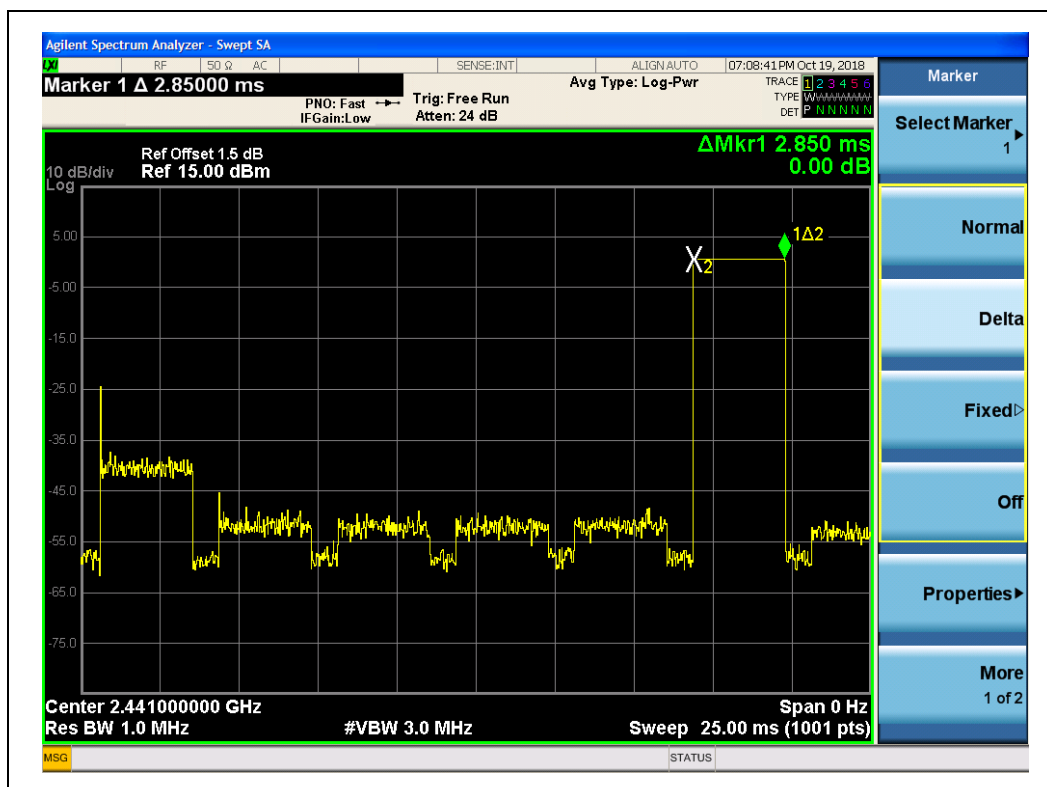

(DH5, GFSK)




## $\pi/4$ -DQPSK Mode


### A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.40	128.00	64.00	0.4	PASS
DH3	1.62	259.20	129.60		PASS
DH5	2.88	307.20	153.60		PASS

### B. Test Plots:

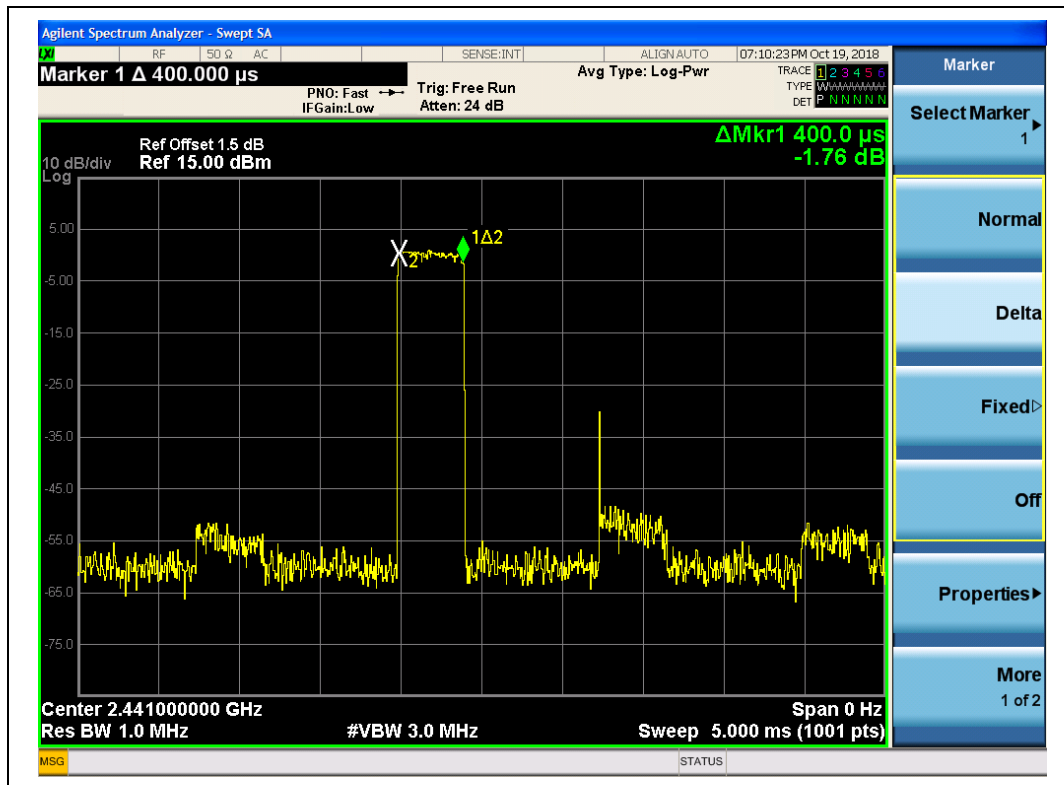

(DH1,  $\pi/4$ -DQPSK)

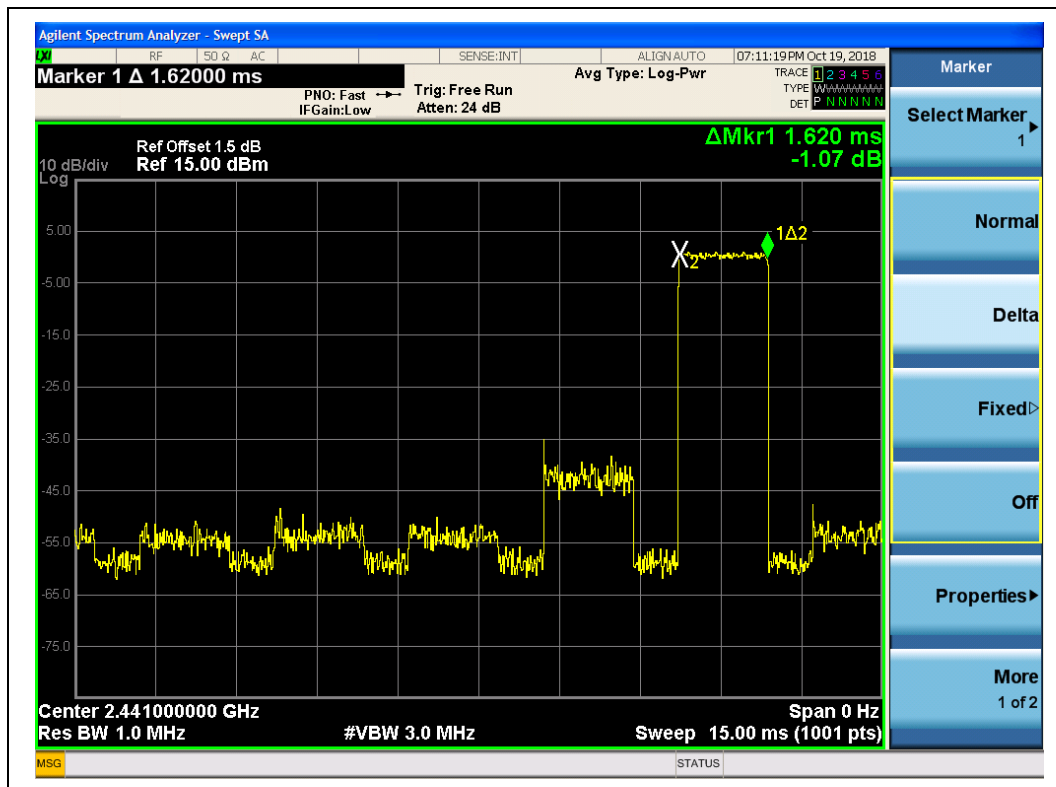
(DH3,  $\pi/4$ -DQPSK)

(DH5,  $\pi/4$ -DQPSK)






## 8-DPSK mode


### A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.40	128.00	64.00	0.4	PASS
DH3	1.64	262.40	131.20		PASS
DH5	2.85	304.00	152.00		PASS


### B. Test Plots:

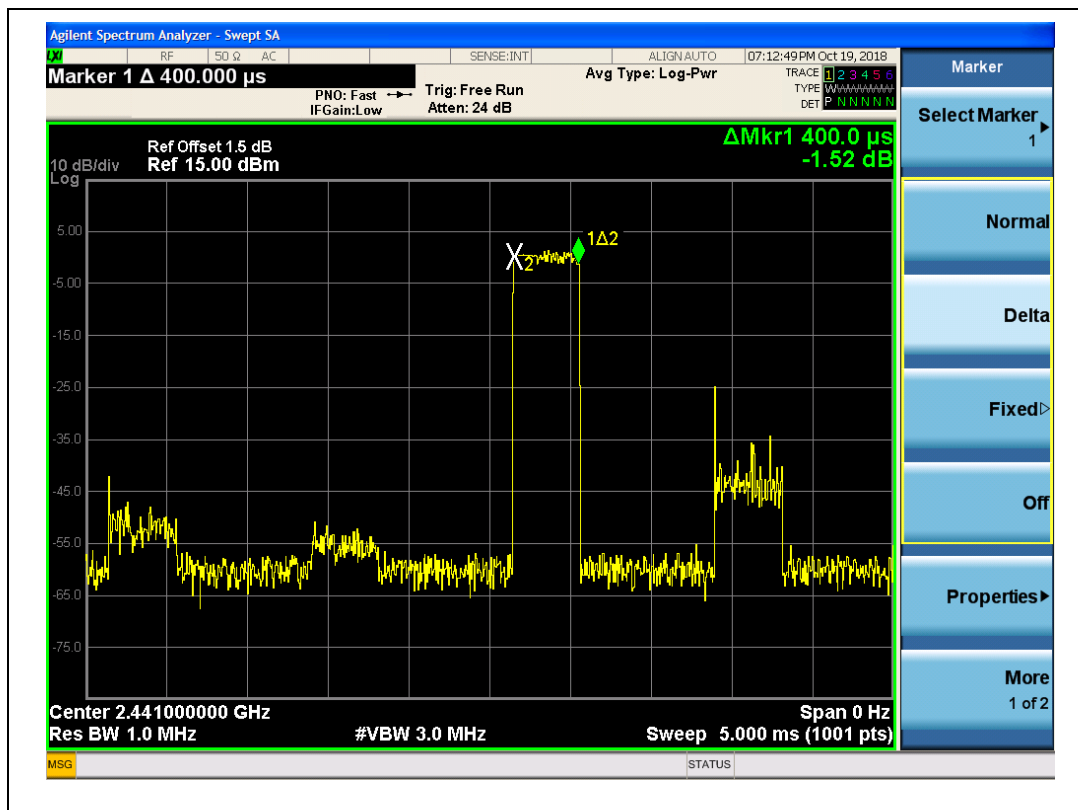

(DH1, 8-DPSK)

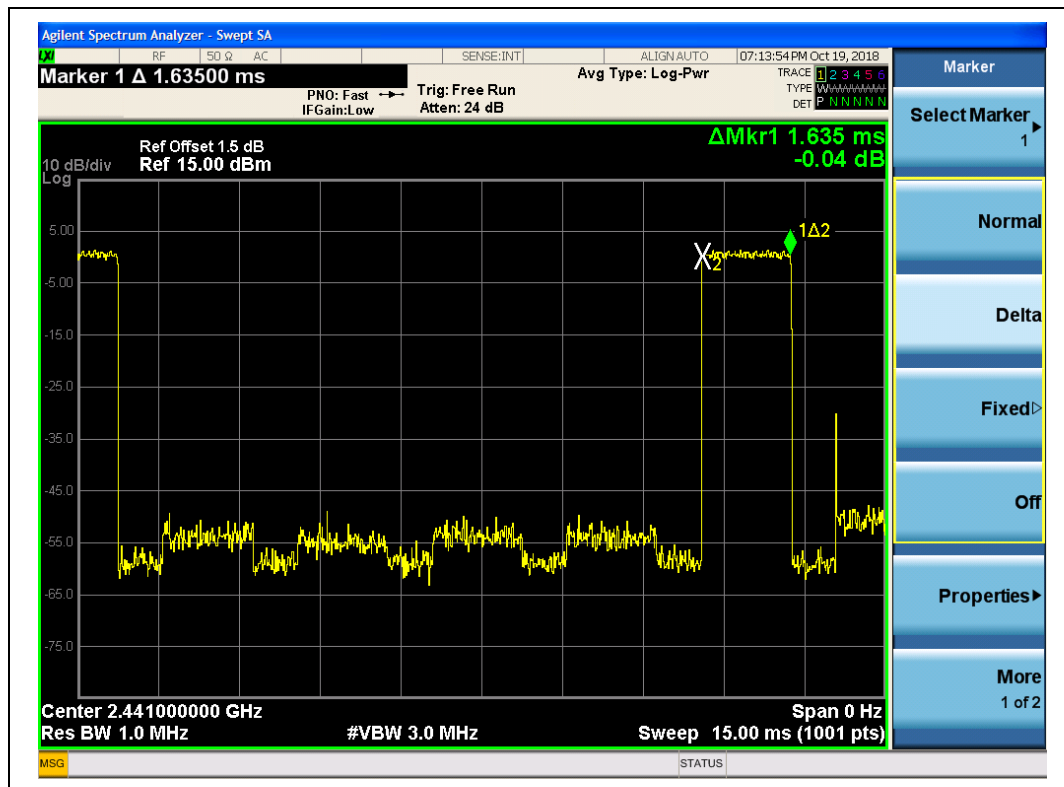

(DH3, 8-DPSK)

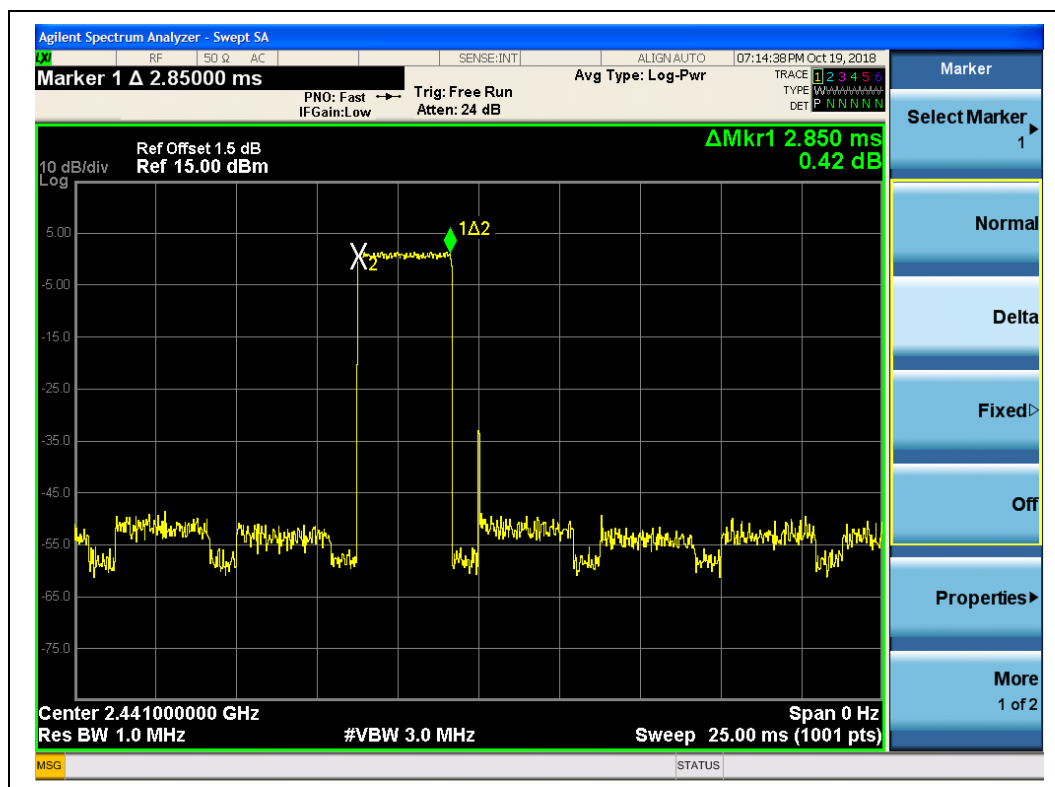

(DH5, 8-DPSK)


## 2.7. Conducted Spurious Emissions

### 2.7.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.7.2. Test Description

#### A. Test Setup:

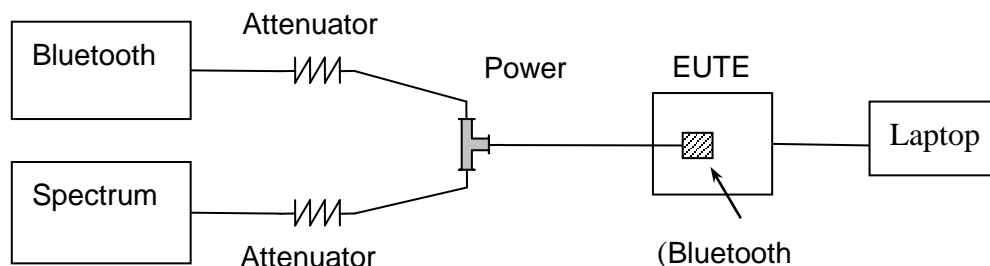

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

#### B. Equipments List:

Please refer ANNEX B(4).

### 2.7.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak



Trace = max hold

Allow the trace to stabilize.

#### 2.7.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


#### GFSK Mode

##### A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-32.74	-0.86	-20.86	PASS
39	2441	-33.45	0.55	-19.45	PASS
78	2480	-34.93	0.27	-19.73	PASS

##### B. Test Plots:


**Note:** The power of the Module transmitting frequency should be ignored.

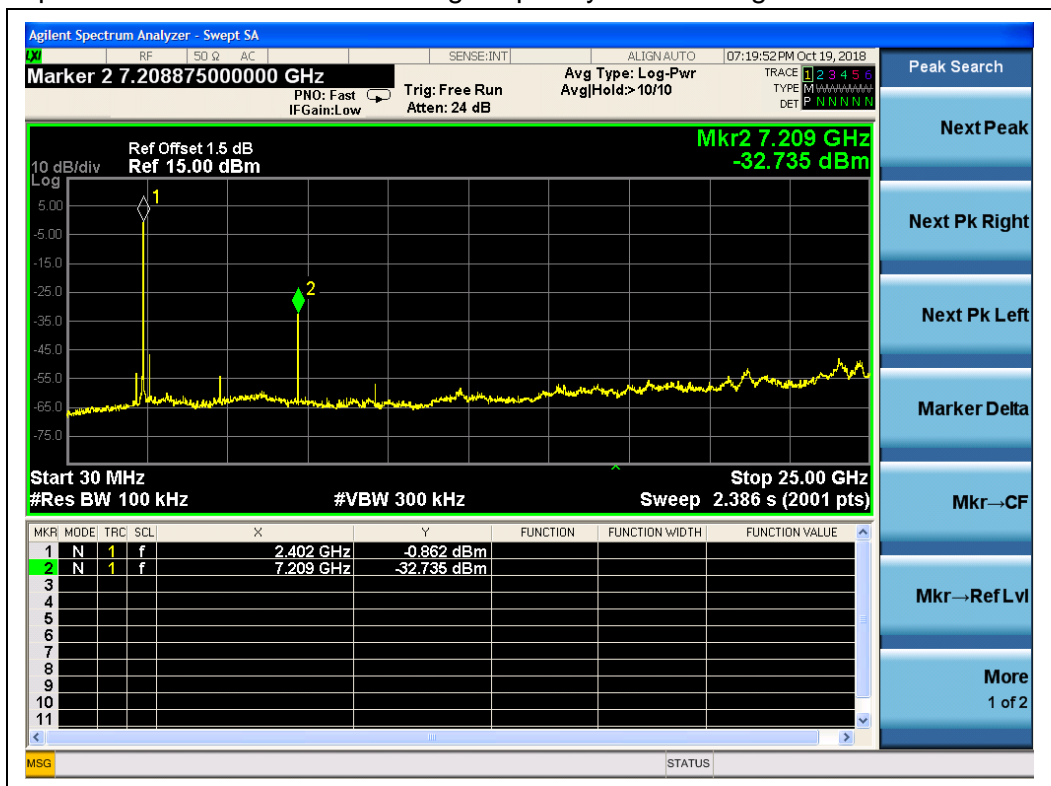


(Channel = 0, 30MHz to 25GHz, GFSK Mode)

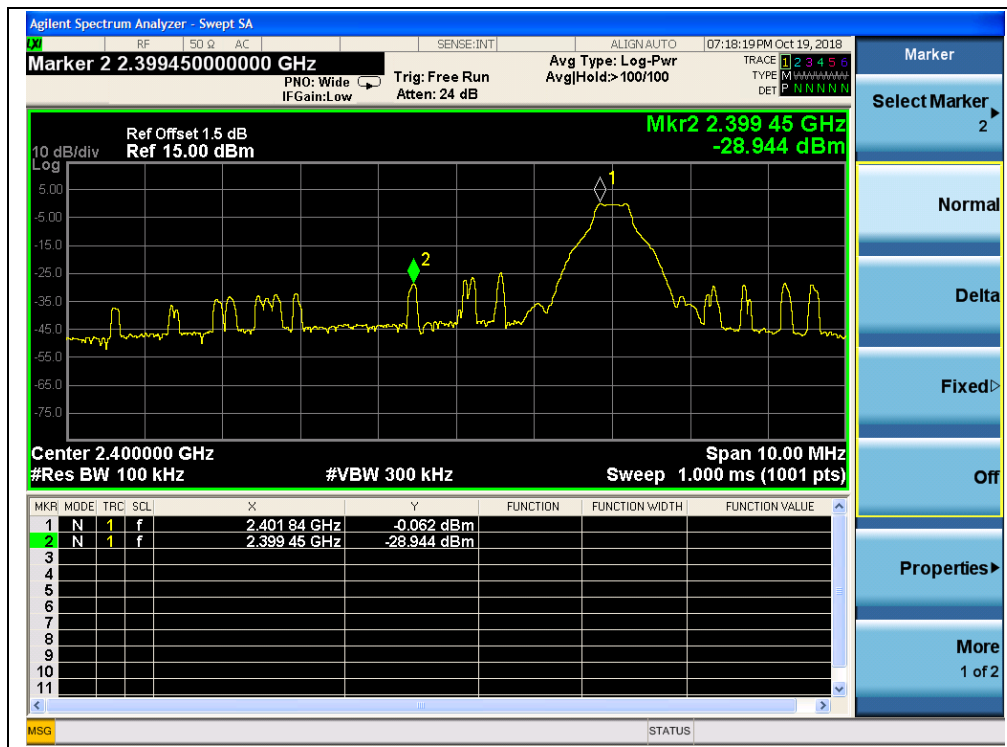


(Channel = 0, Band edge, GFSK Mode)

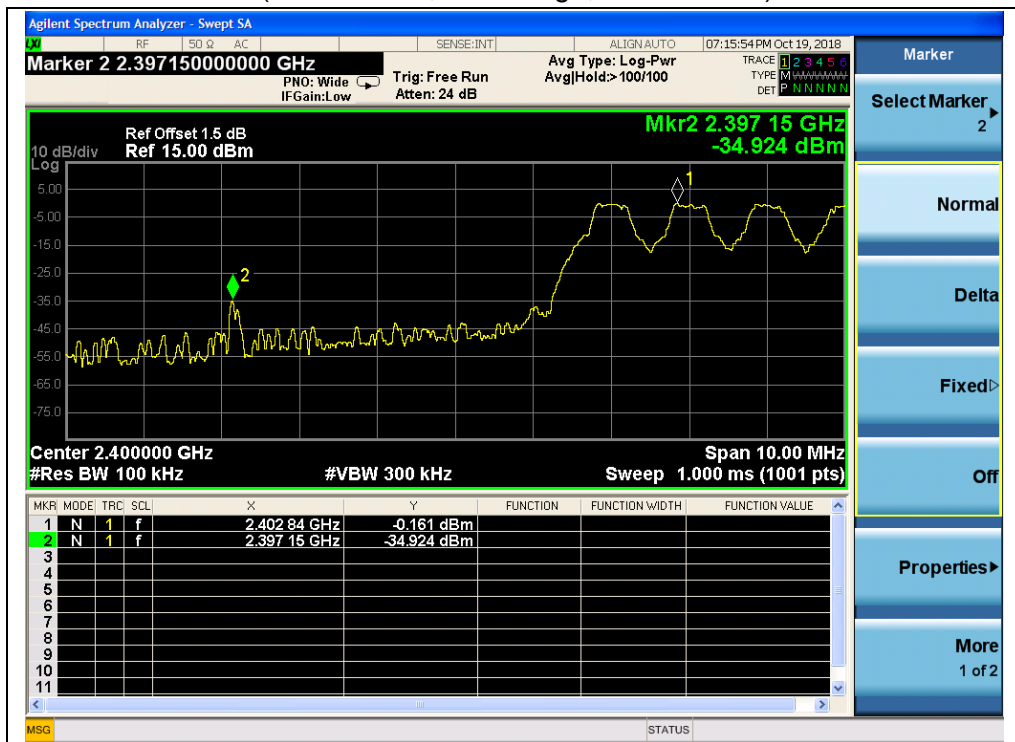


(Channel = 0, Band edge with hopping on, GFSK Mode)

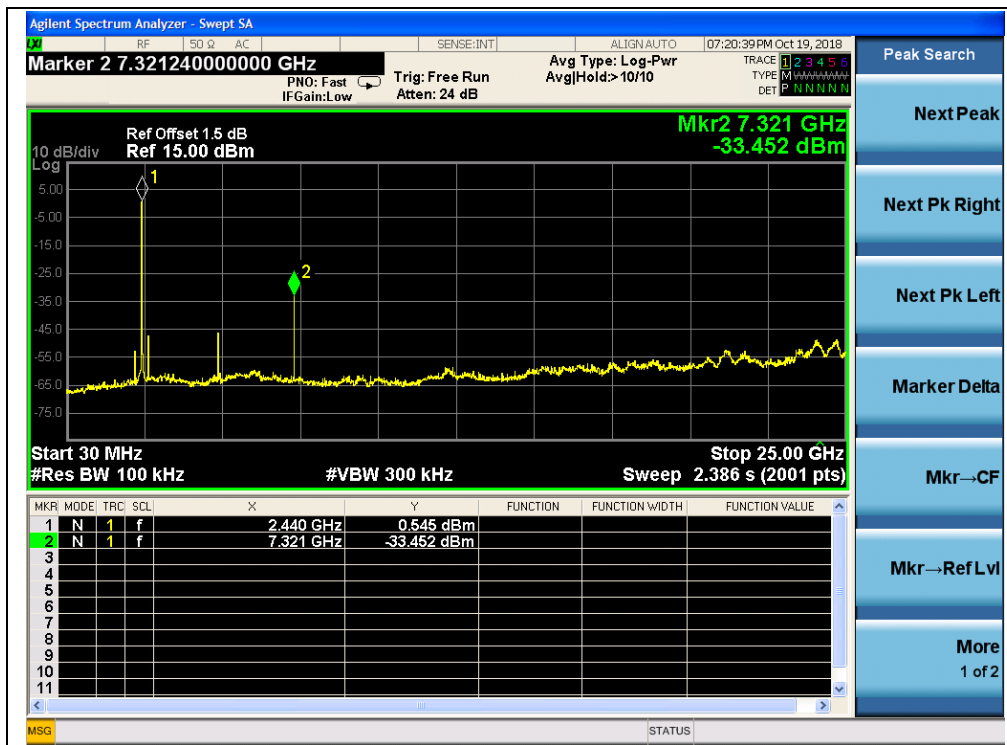


(Channel = 39, 30MHz to 25GHz, GFSK Mode)

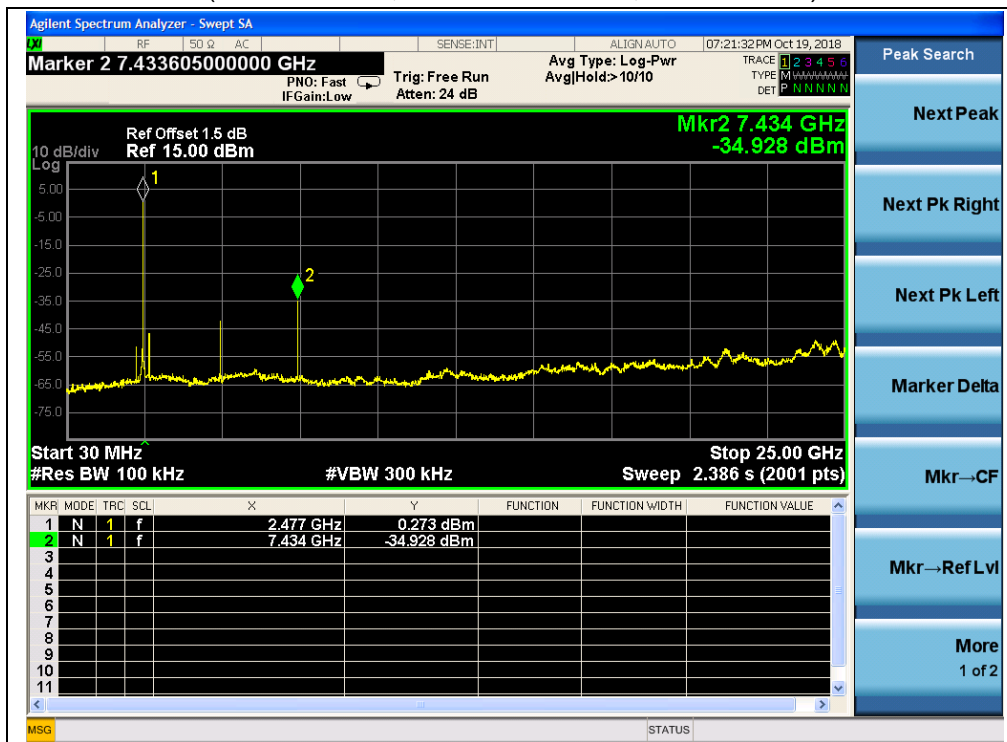

(Channel = 78, 30MHz to 25GHz, GFSK Mode)

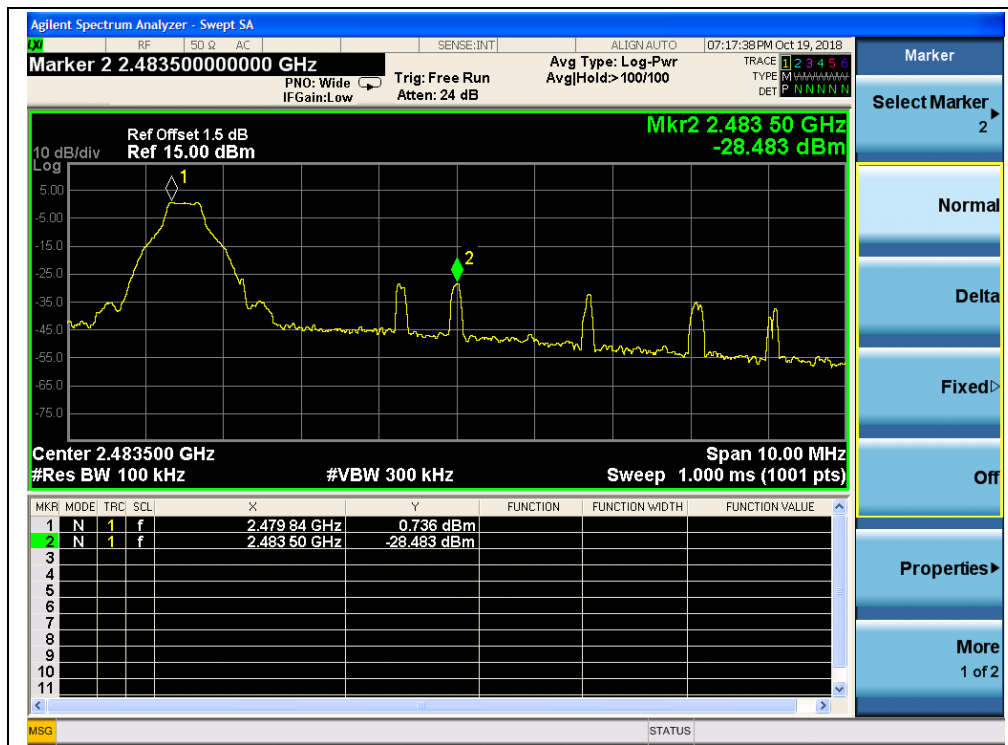

(Channel = 78, Band edge, GFSK Mode)

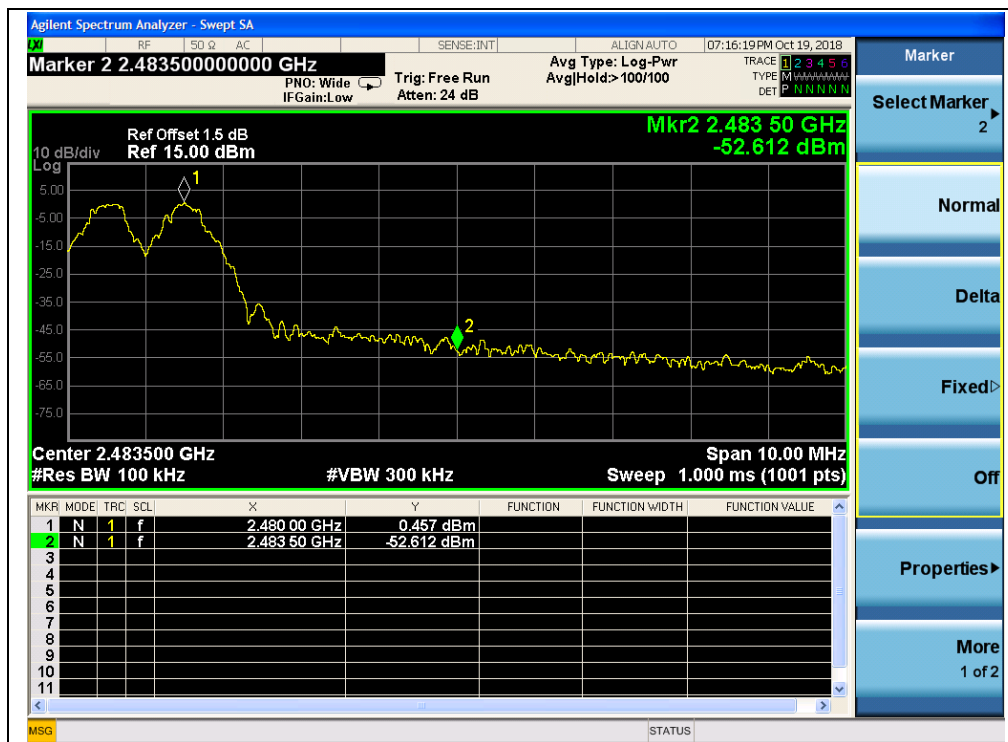

(Channel = 78, Band edge with hopping on, GFSK Mode)




$\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-35.45	-0.90	-20.90	PASS
39	2441	-32.97	-3.62	-23.62	PASS
78	2480	-38.26	-3.49	-23.49	PASS


B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.

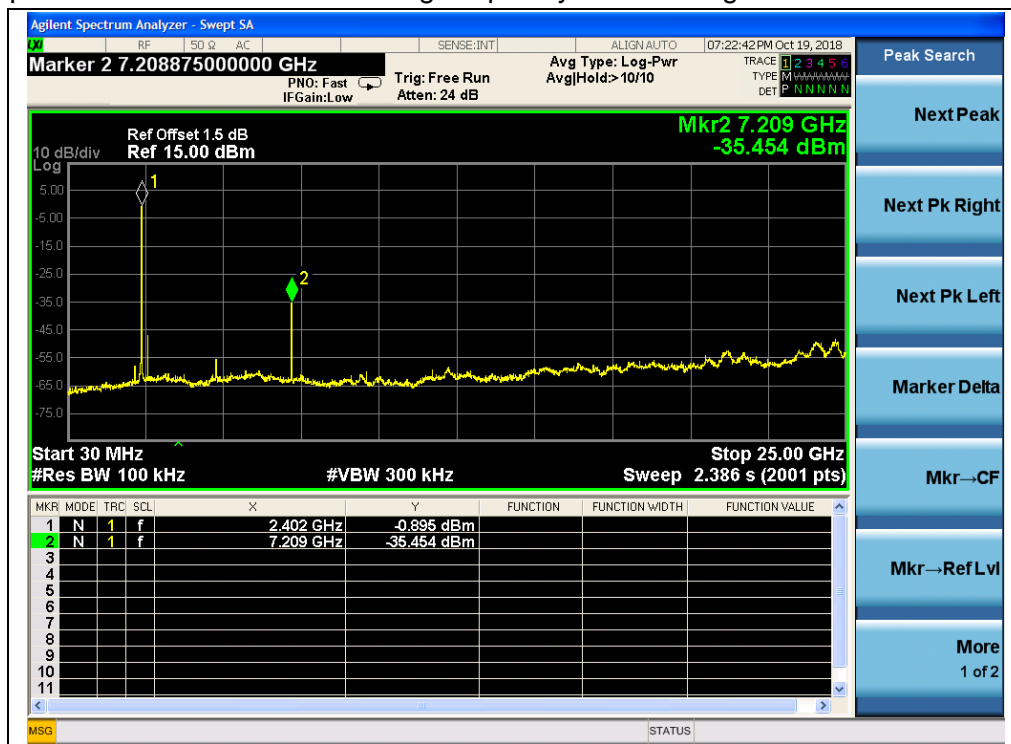


(Channel = 0, 30MHz to 25GHz,  $\pi/4$ -DQPSK)





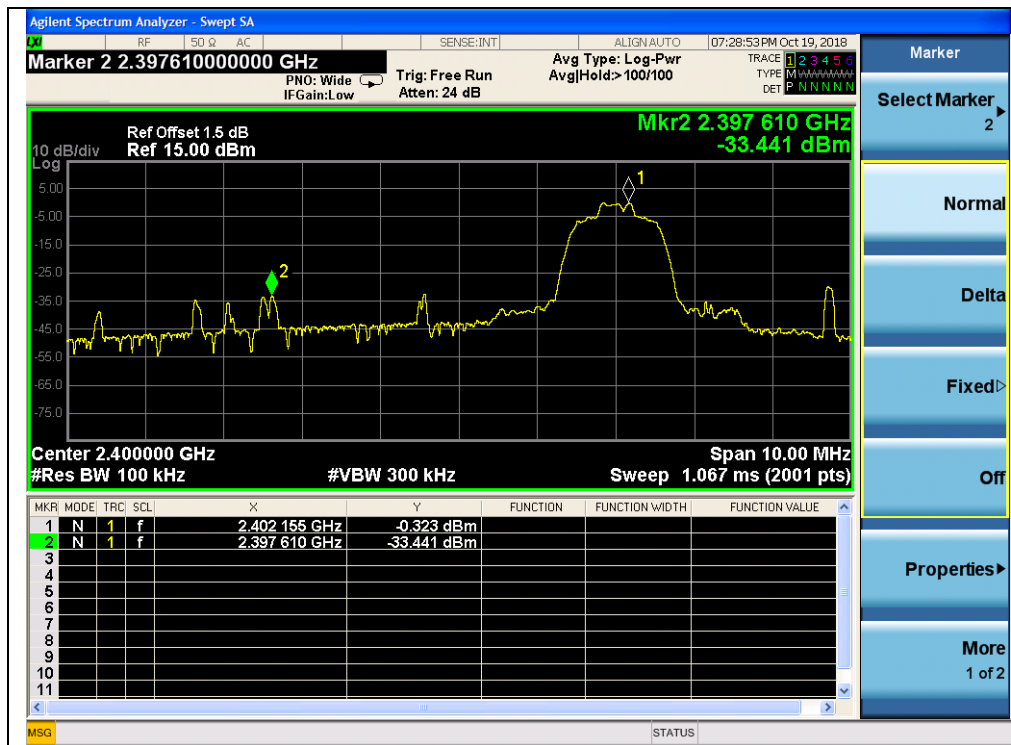


(Channel = 0, Band edge,  $\pi/4$ -DQPSK)

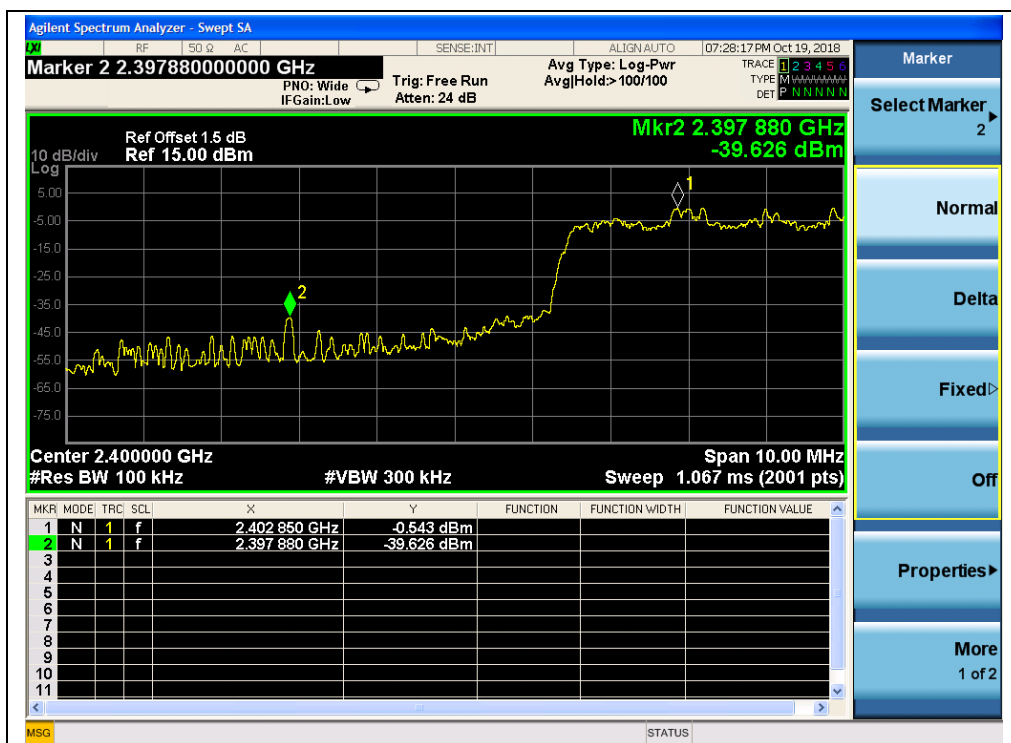


(Channel = 0, Band edge with hopping on,  $\pi/4$ -DQPSK)

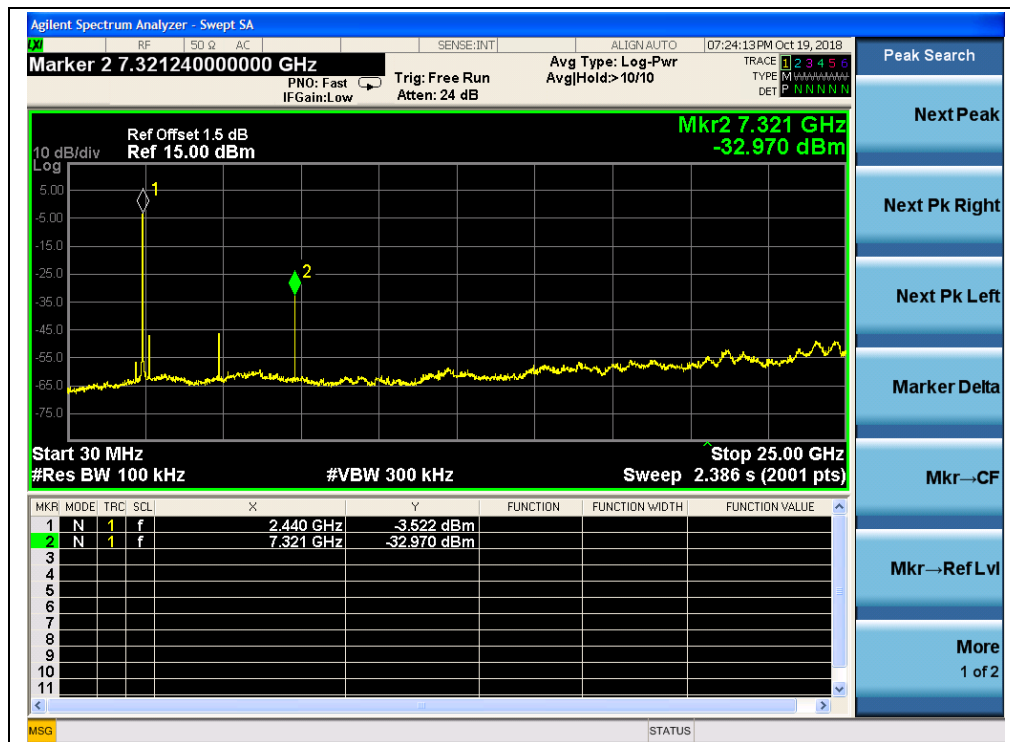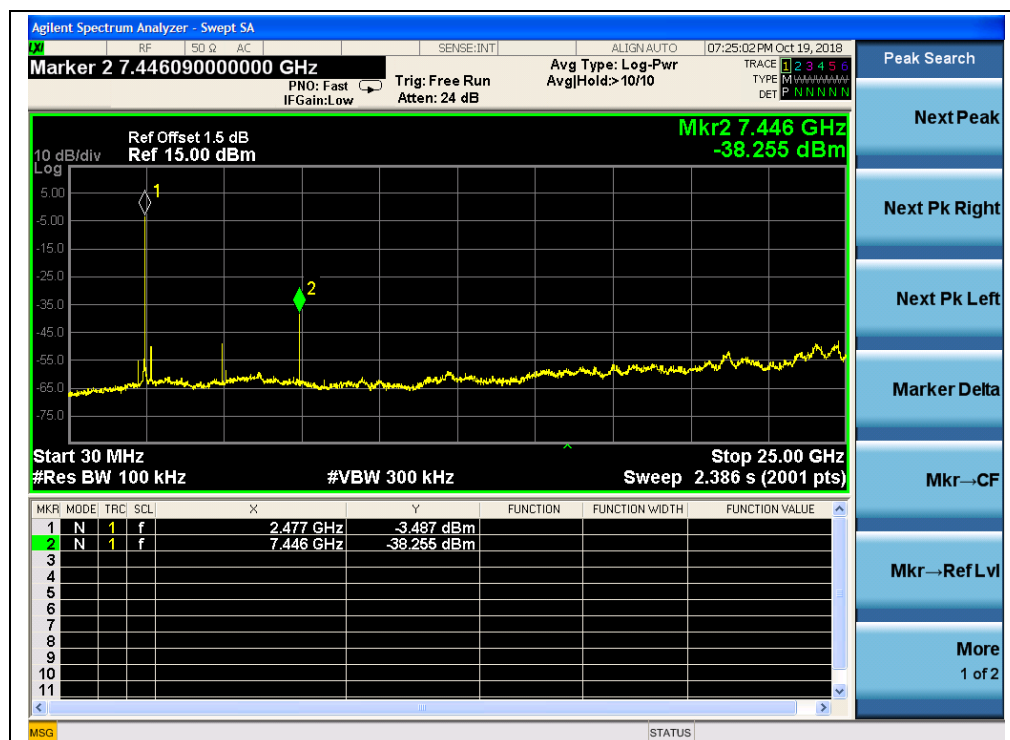(Channel = 39, 30MHz to 25GHz,  $\pi/4$ -DQPSK)(Channel = 78, 30MHz to 25GHz,  $\pi/4$ -DQPSK)

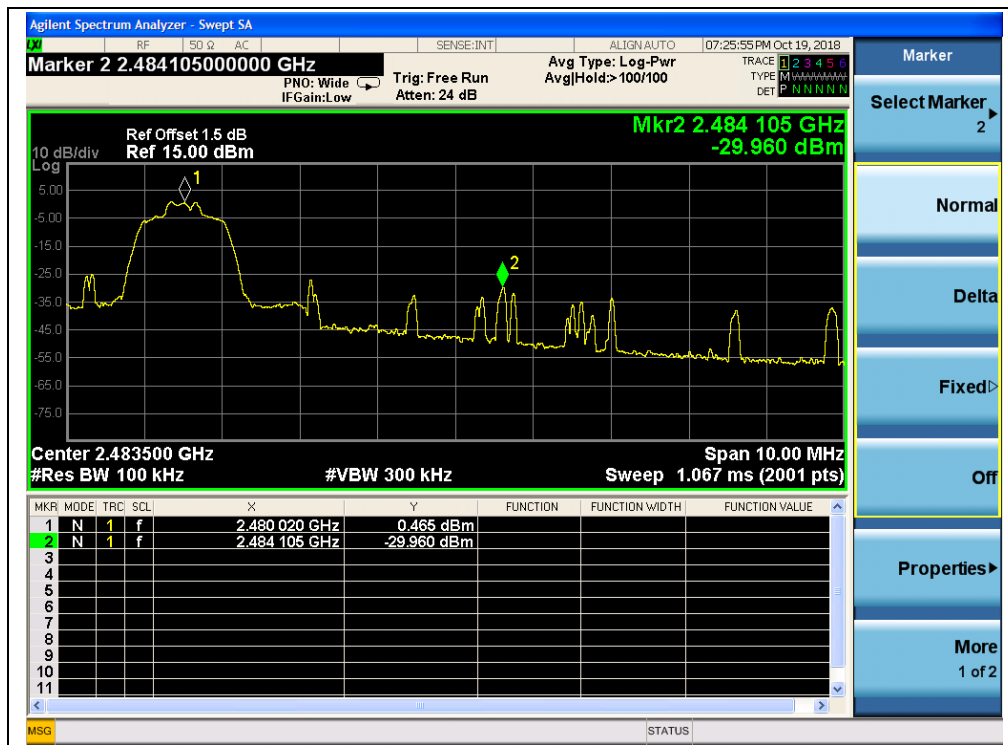

(Channel = 78, Band edge,  $\pi/4$ -DQPSK)

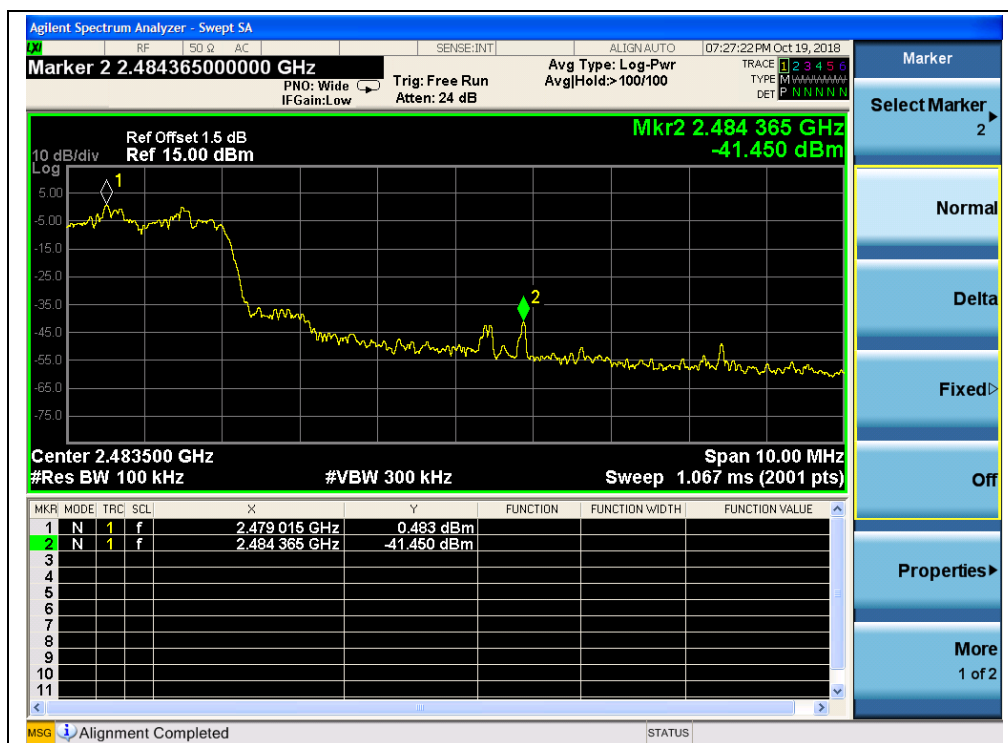

(Channel = 78, Band edge with hopping on,  $\pi/4$ -DQPSK)




## 8-DPSK Mode

### A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-32.10	-0.25	-20.25	PASS
39	2441	-33.23	-2.87	-22.87	PASS
78	2480	-36.44	0.68	-19.32	PASS

### B. Test Plots:


**Note:** the power of the Module transmitting frequency should be ignored.

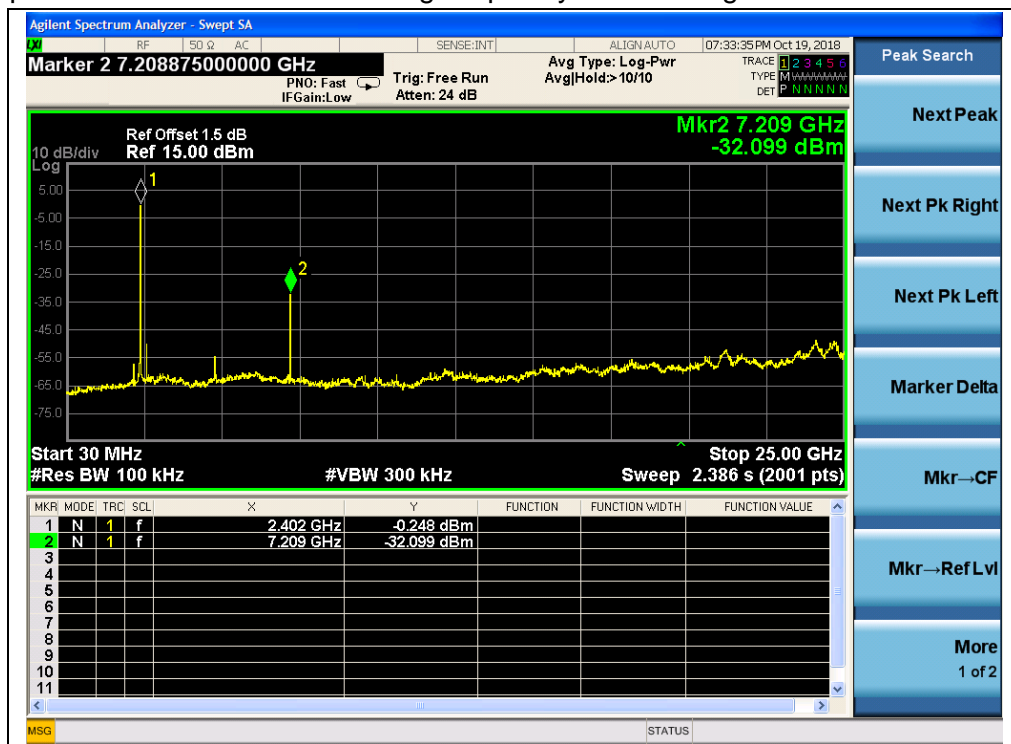


(Channel = 0, 30MHz to 25GH, 8-DPSK)

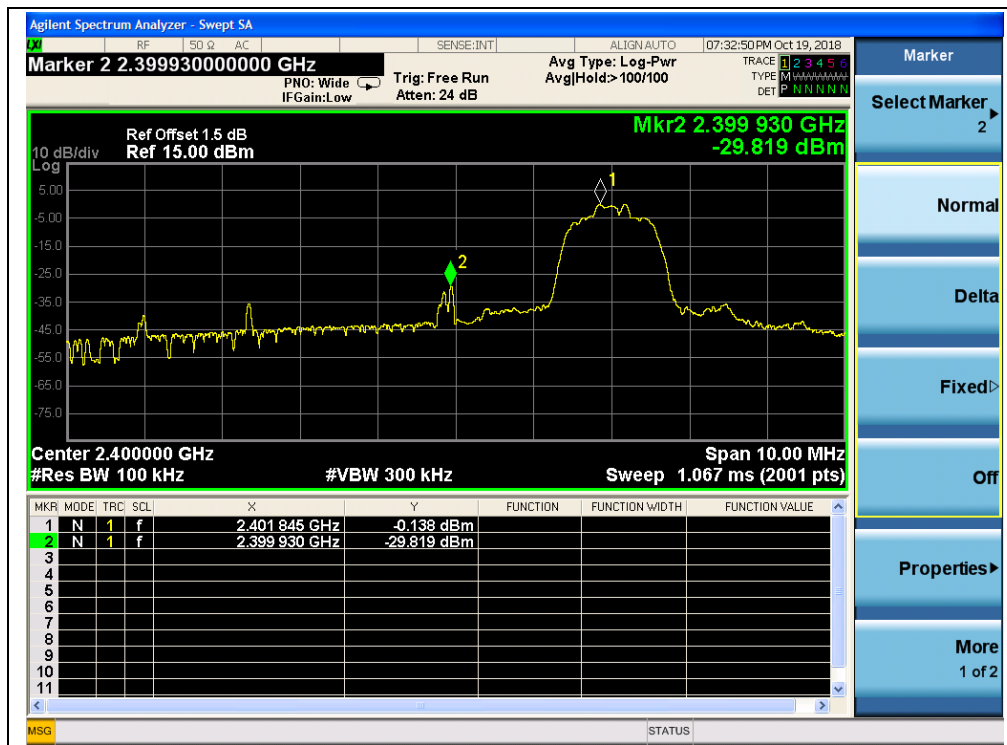


(Channel = 0, Band edge, 8-DPSK)

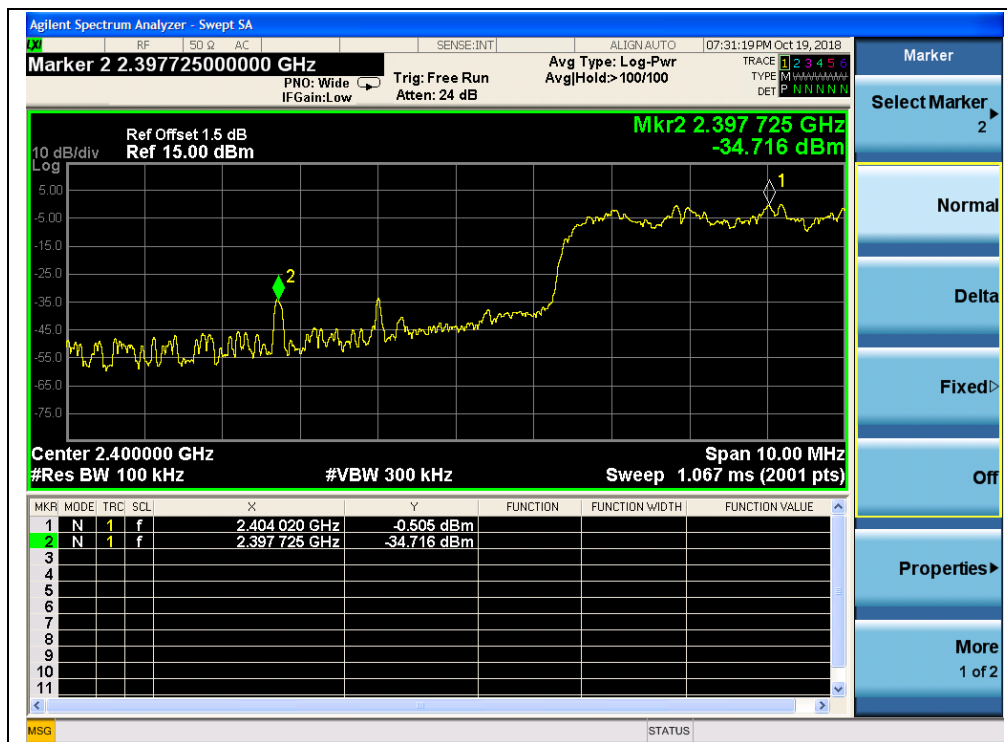


(Channel = 0, Band edge with hopping on, 8-DPSK)

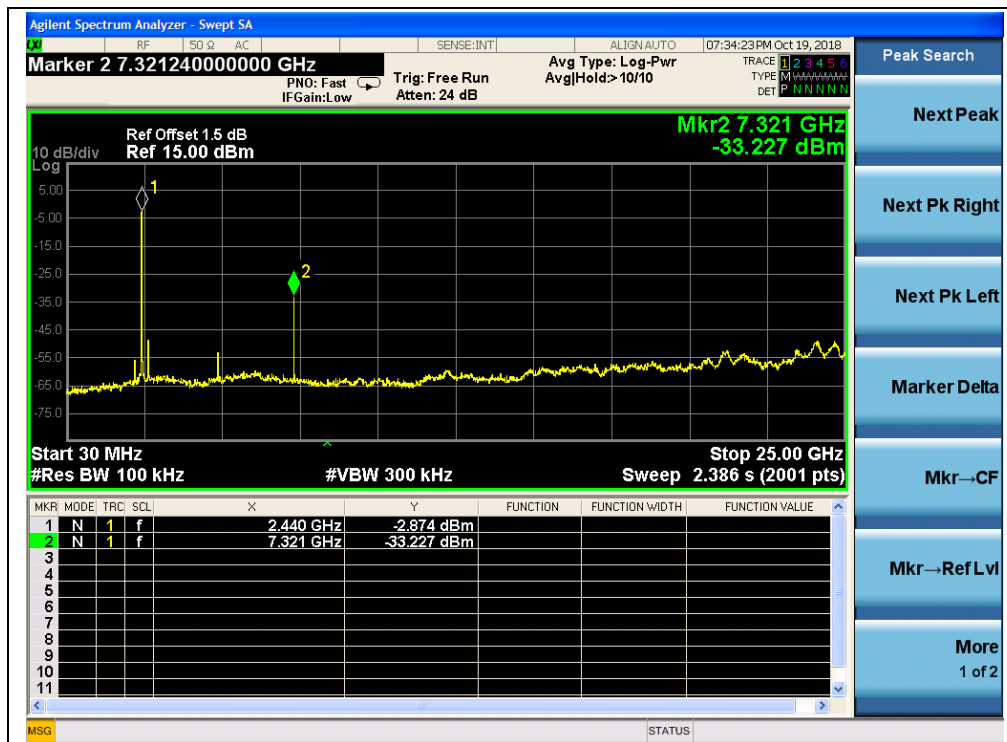


(Channel = 39, 30MHz to 25GHz, 8-DPSK)

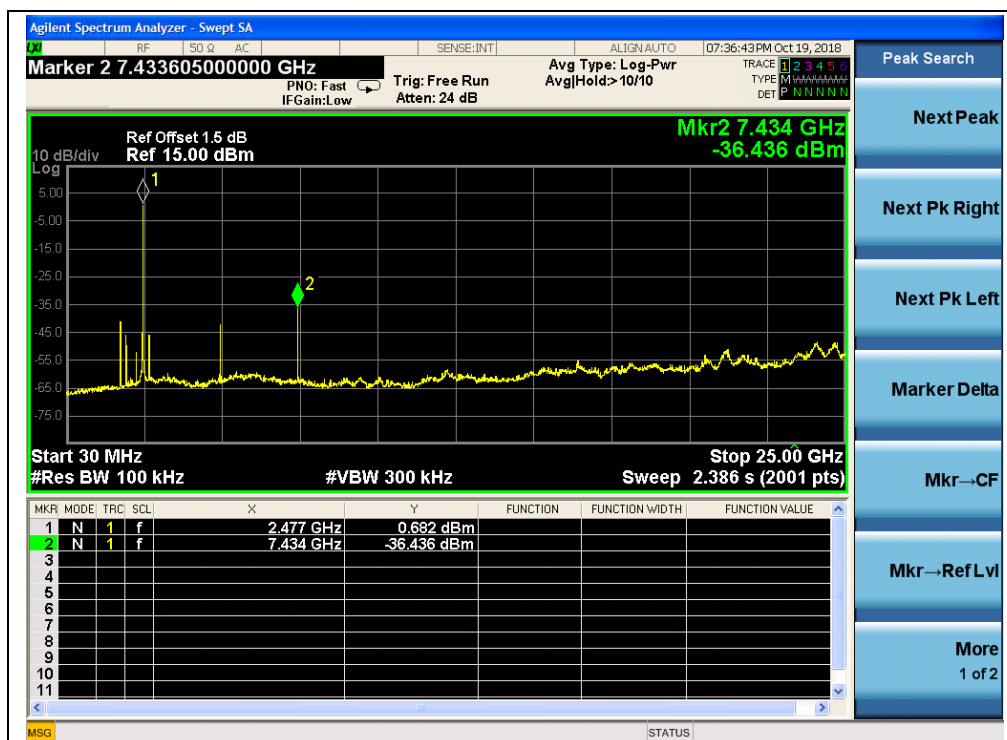

(Channel = 78, 30MHz to 25GH, 8-DPSK)

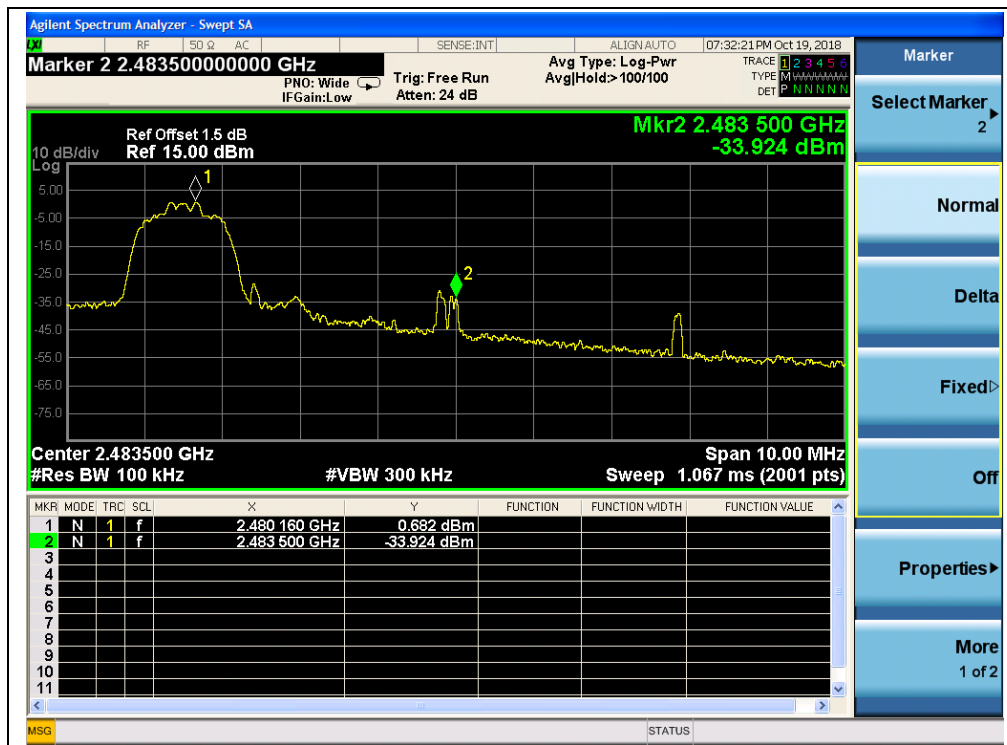

(Channel = 78, Band edge, 8-DPSK)

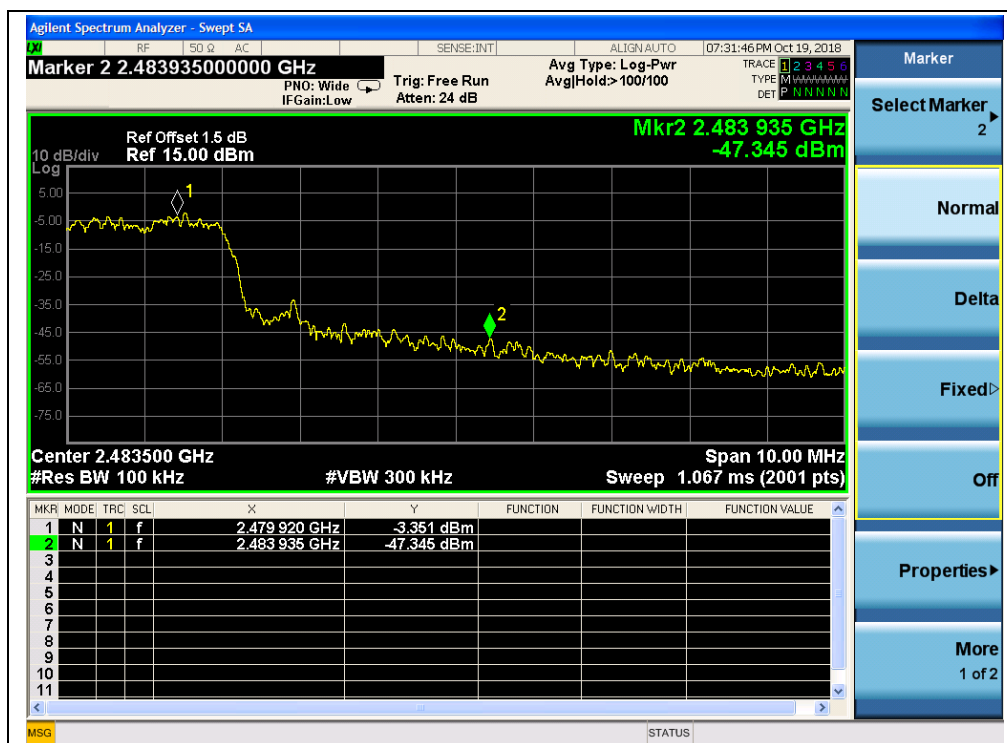

(Channel = 78, Band edge with hopping on, 8-DPSK)



## 2.8. Conducted Emission

### 2.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency (MHz)	range	Conducted Limit (dB $\mu$ V)	
		Quai-peak	Average
0.15 - 0.50		66 to 56	56 to 46
0.50 - 5		56	46
5- 30		60	50

#### NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.8.2. Test Description

#### A. Test Setup:



The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth





EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

**B. Equipments List:**

Please reference ANNEX B(4)..

**2.8.3. Test Result**

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

**A. Test setup:**

The EUT configuration of the emission tests is Adaptor + EUT + Link.


**Note:** The test voltage is AC 120V/60Hz.

## B. Test Plots:

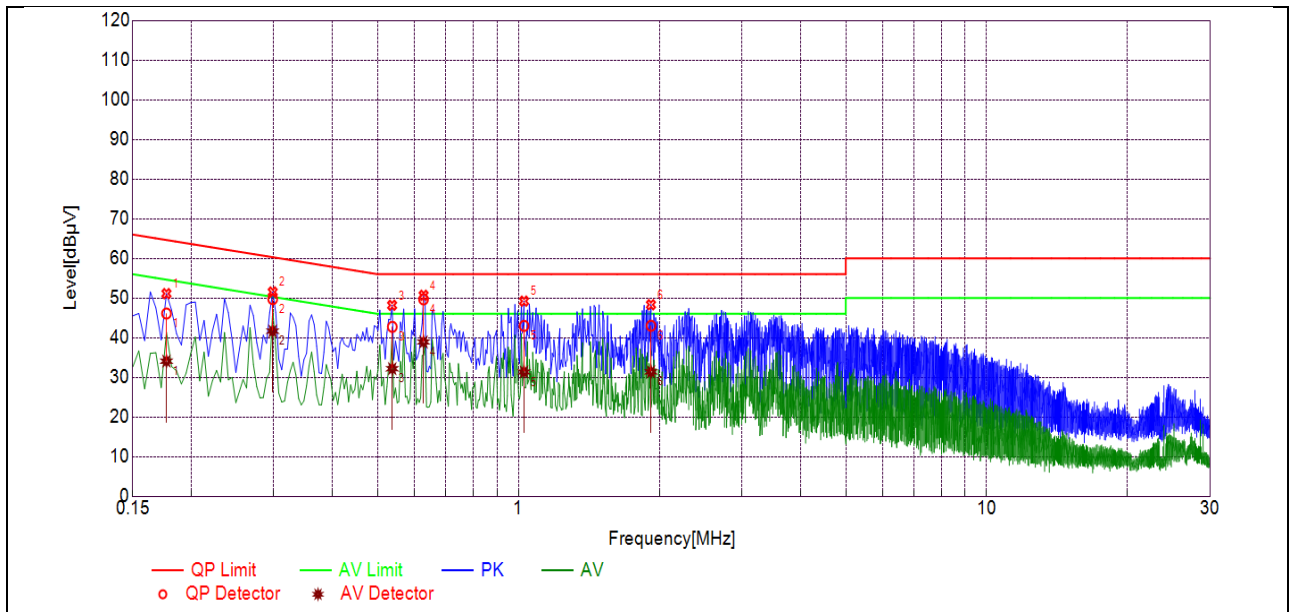

(L Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1770	46.09	34.08	64.63	54.63	Line	PASS
2	0.2984	49.73	41.65	60.29	50.29		PASS
3	0.5374	42.72	32.17	56.00	46.00		PASS
4	0.6267	49.66	38.91	56.00	46.00		PASS
5	1.0275	42.97	31.36	56.00	46.00		PASS
6	1.9185	42.99	31.39	56.00	46.00		PASS

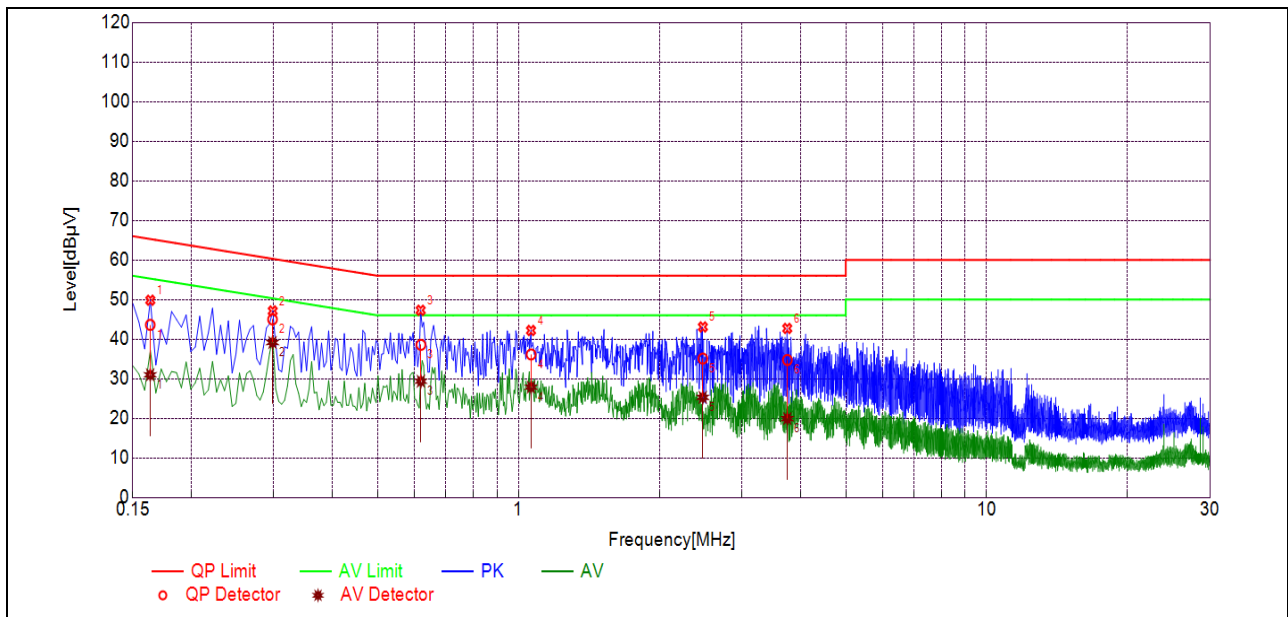

(N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1634	43.61	30.97	65.29	55.29	Neutral	PASS
2	0.2982	44.98	39.15	60.29	50.29		PASS
3	0.6186	38.56	29.36	56.00	46.00		PASS
4	1.0637	36.12	27.88	56.00	46.00		PASS
5	2.4750	35.08	25.30	56.00	46.00		PASS
6	3.7515	34.73	19.91	56.00	46.00		PASS


## 2.9. Restricted Frequency Bands

### 2.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 2.9.2. Test Description

#### A. Test Setup:

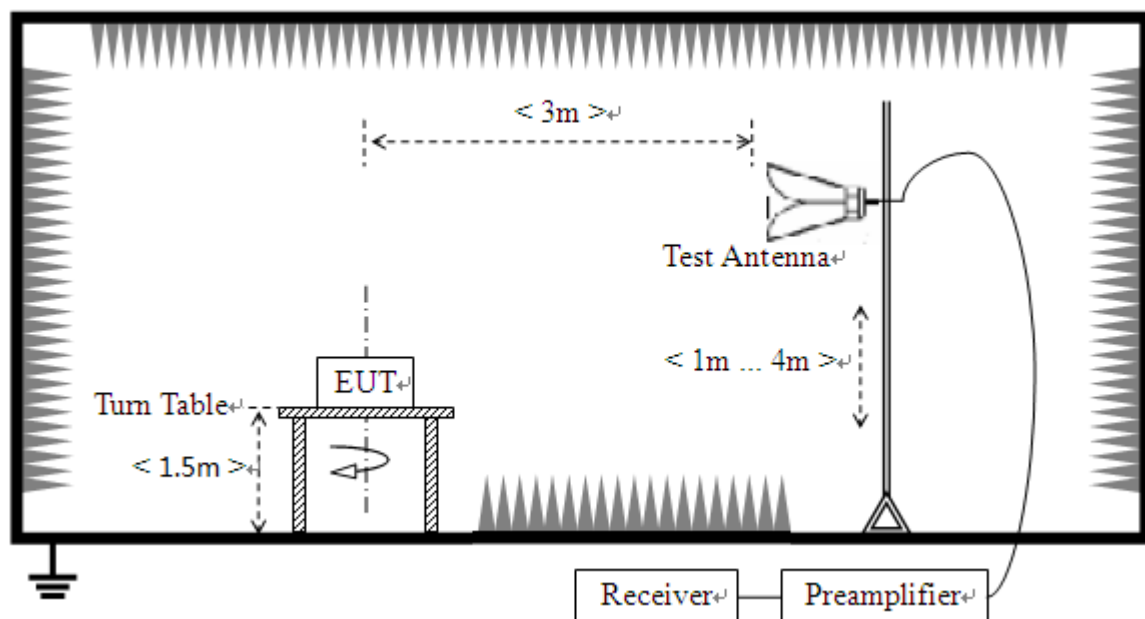

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under non hopping-on test mode transmitting 339 bytes DH5, 679 bytes 2DH5 and 1021 bytes 3DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

**B. Equipments List:**

Please refer ANNEX B(4).

**2.9.3. Test Procedure**

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1\text{GHz}$ , 100 KHz for  $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

**2.9.4. Test Result**

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m


**Note:** Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

**GFSK Mode****A. Test Verdict:**


Channel	Frequency (MHz)	Detector	Receiver Reading $U_R$ (dBuV)	$A_T$ (dB)	$A_{\text{Factor}}$ (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2372.07	PK	47.62	-29.67	32.56	50.51	74	PASS
0	2390.00	AV	35.19	-29.67	32.56	38.08	54	PASS
78	2483.82	PK	61.14	-29.67	32.56	64.03	74	PASS
78	2483.50	AV	35.79	-29.67	32.56	38.68	54	PASS



## B. Test Plots:

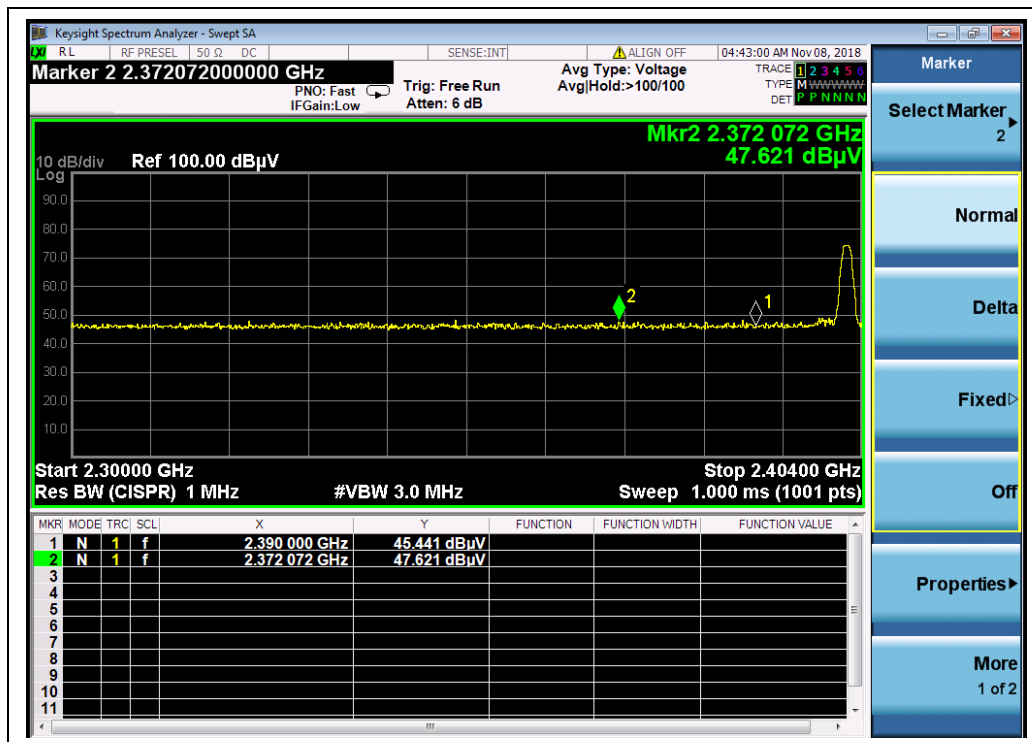


(Channel = 0, PEAK, GFSK)

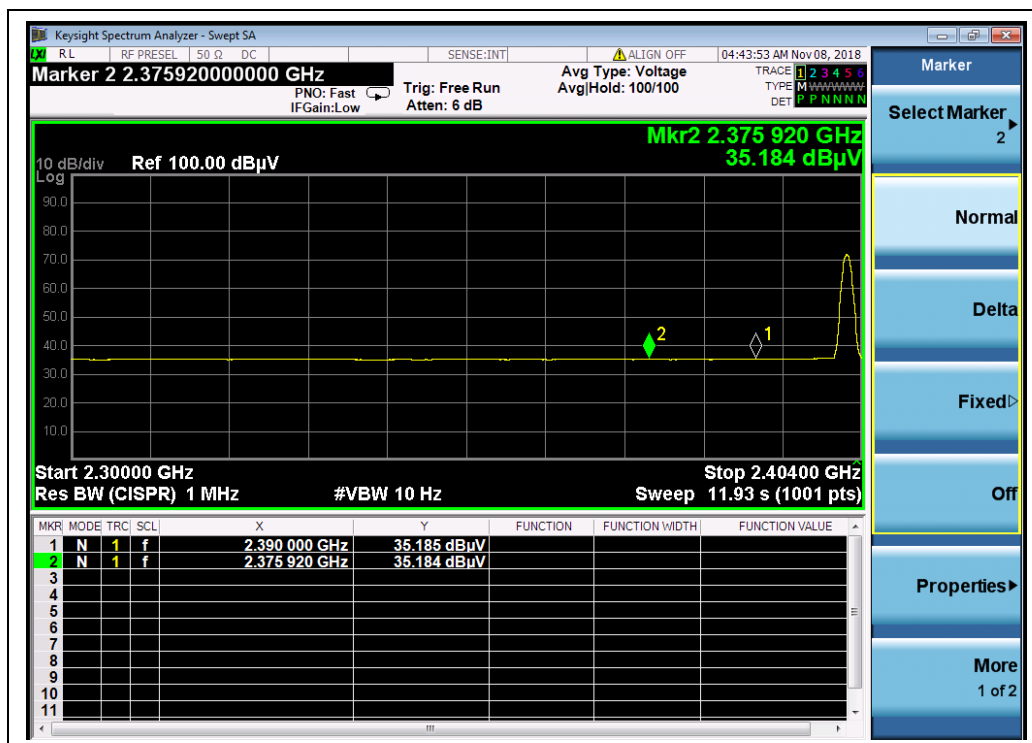

(Channel = 0, AVERAGE, GFSK)



(Channel = 78, PEAK, GFSK)

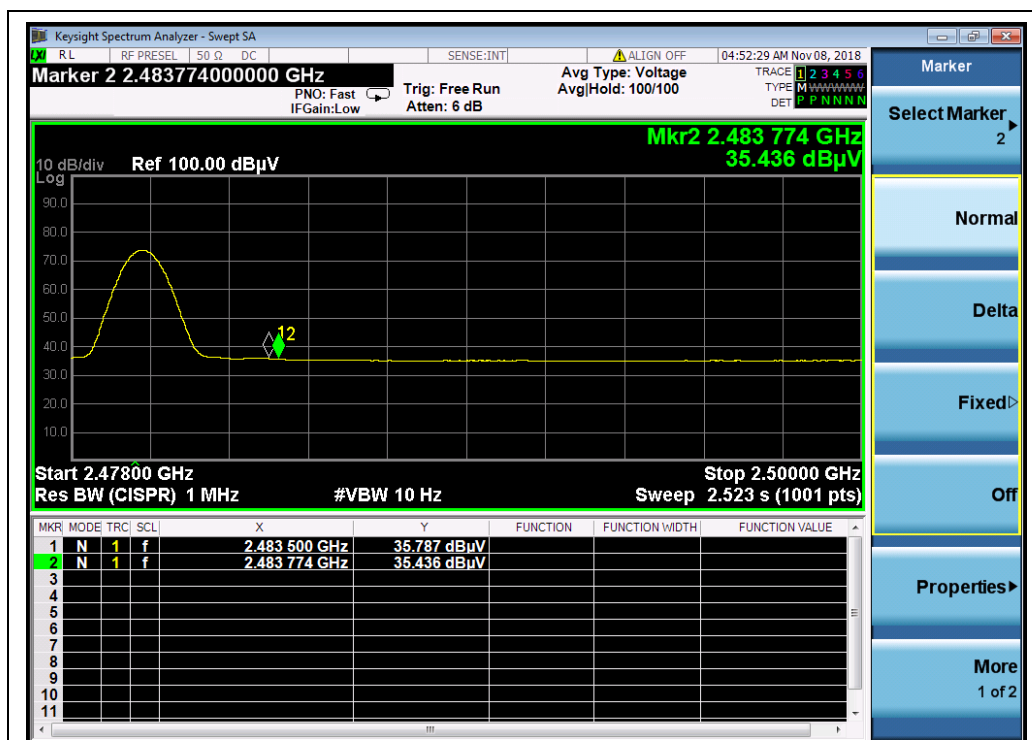

(Channel = 78, AVERAGE, GFSK)




$\pi/4$ -DQPSK Mode

**A. Test Verdict:**



Channel	Frequency (MHz)	Detector	Receiver Reading $U_R$ (dBuV)	$A_T$ (dB)	$A_{Factor}$ (dB@3m)	Max. Emission $E$ (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Verdict
		PK/ AV						
0	2373.74	PK	47.99	-29.67	32.56	50.88	74	Pass
0	2354.29	AV	35.19	-29.67	32.56	38.08	54	Pass
78	2483.77	PK	61.30	-29.67	32.56	64.19	74	Pass
78	2483.97	AV	35.71	-29.67	32.56	38.60	54	Pass


**B. Test Plots:**

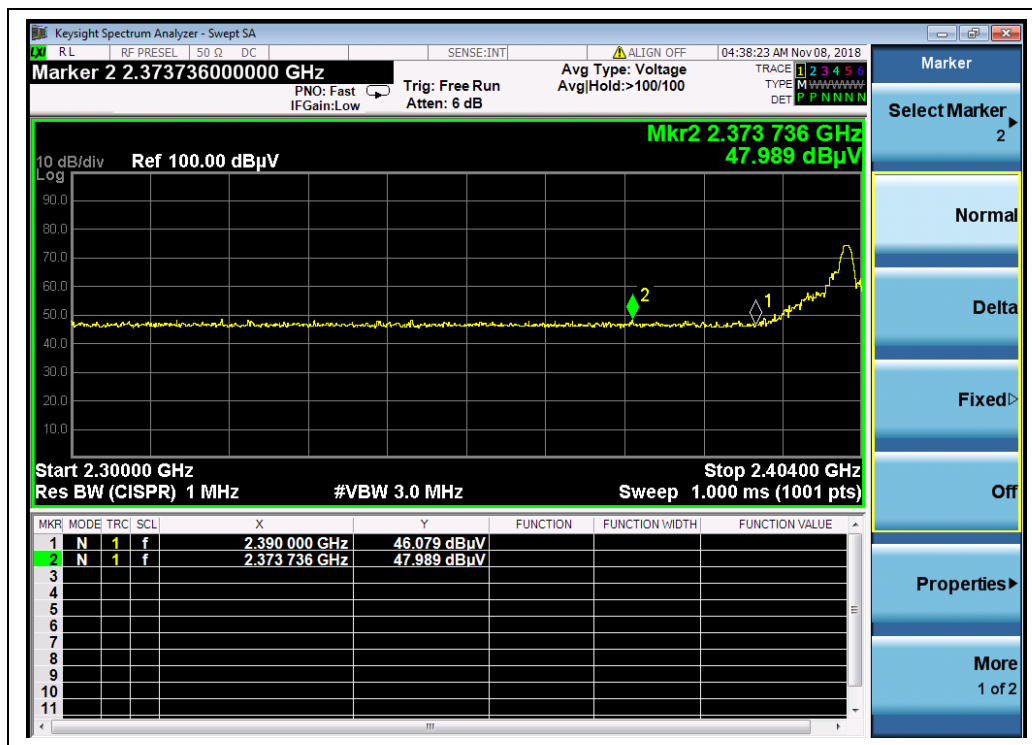

(Channel = 0, PEAK,  $\pi/4$ -DQPSK)

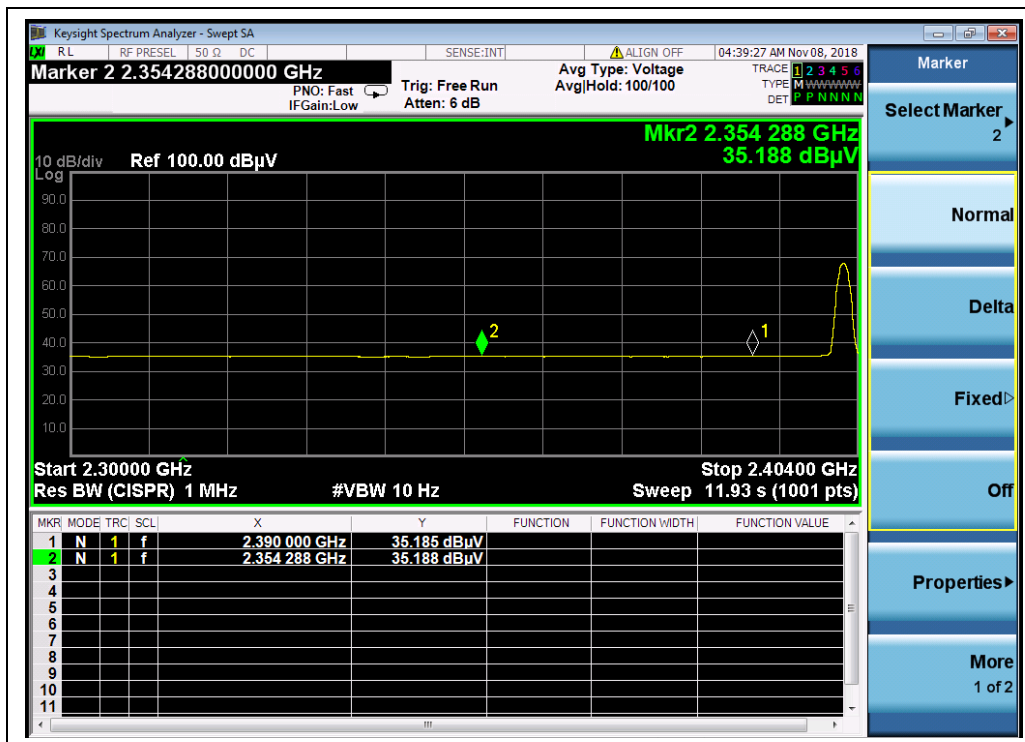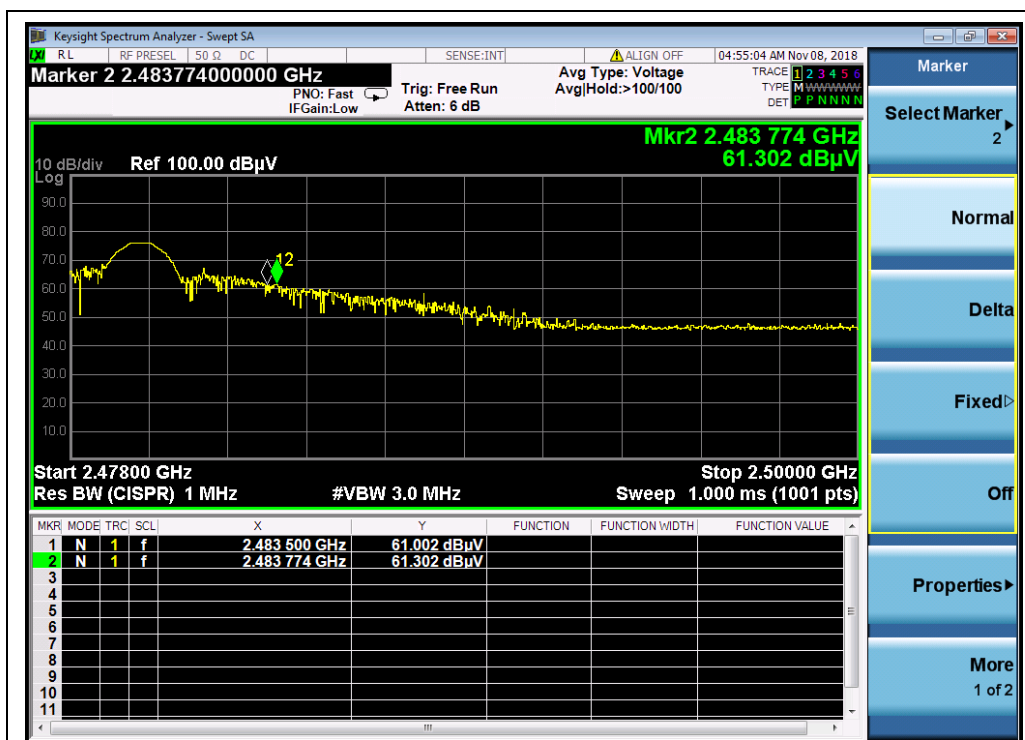

(Channel = 0, AVERAGE,  $\pi/4$ -DQPSK)(Channel = 78, PEAK,  $\pi/4$ -DQPSK)

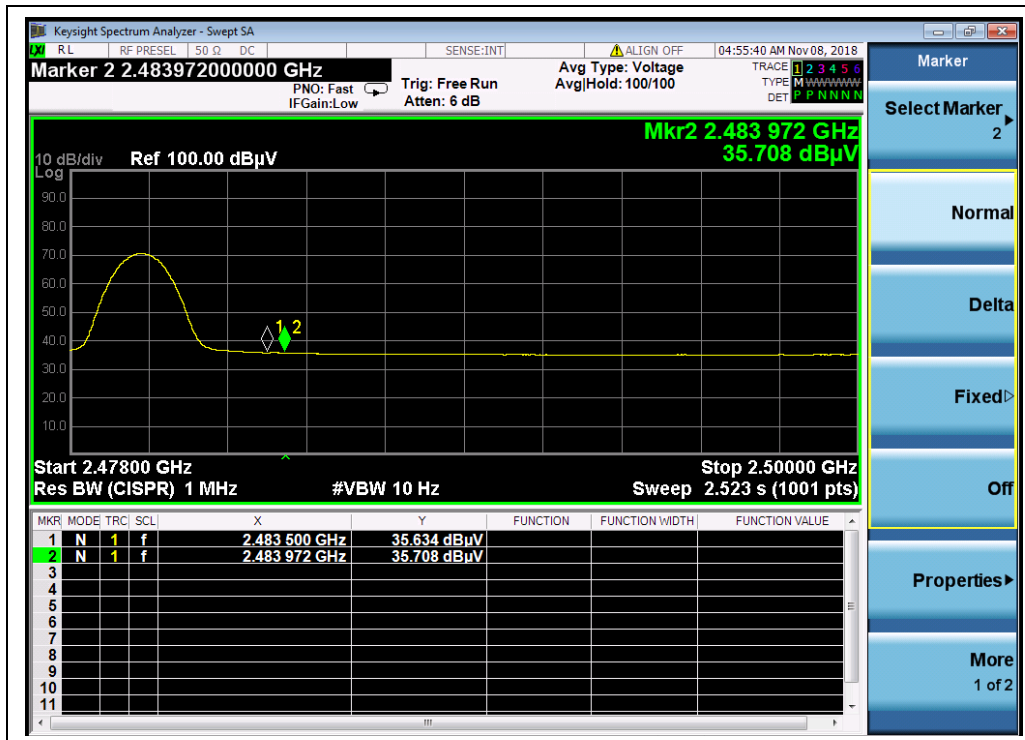

(Channel = 78, AVERAGE,  $\pi/4$ -DQPSK)

## 8-DPSK Mode

### A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading $U_R$ (dBuV)	$A_T$ (dB)	$A_{Factor}$ (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2366.87	PK	47.24	-29.67	32.56	50.13	74	Pass
0	2390.00	AV	35.18	-29.67	32.56	38.07	54	Pass
78	2483.73	PK	61.68	-29.67	32.56	64.57	74	Pass
78	2483.50	AV	35.56	-29.67	32.56	38.45	54	Pass


## B. Test Plots:




(Channel = 0, PEAK, 8-DPSK)



(Channel = 0, AVERAGE, 8-DPSK)

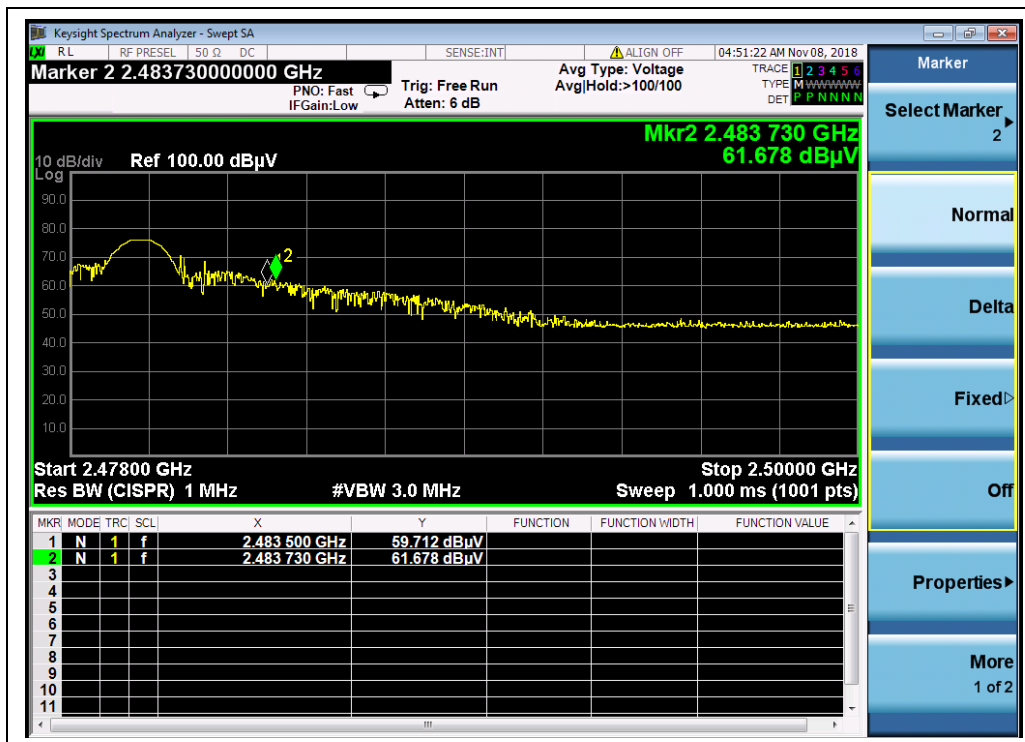

(Channel = 78, PEAK, 8-DPSK)

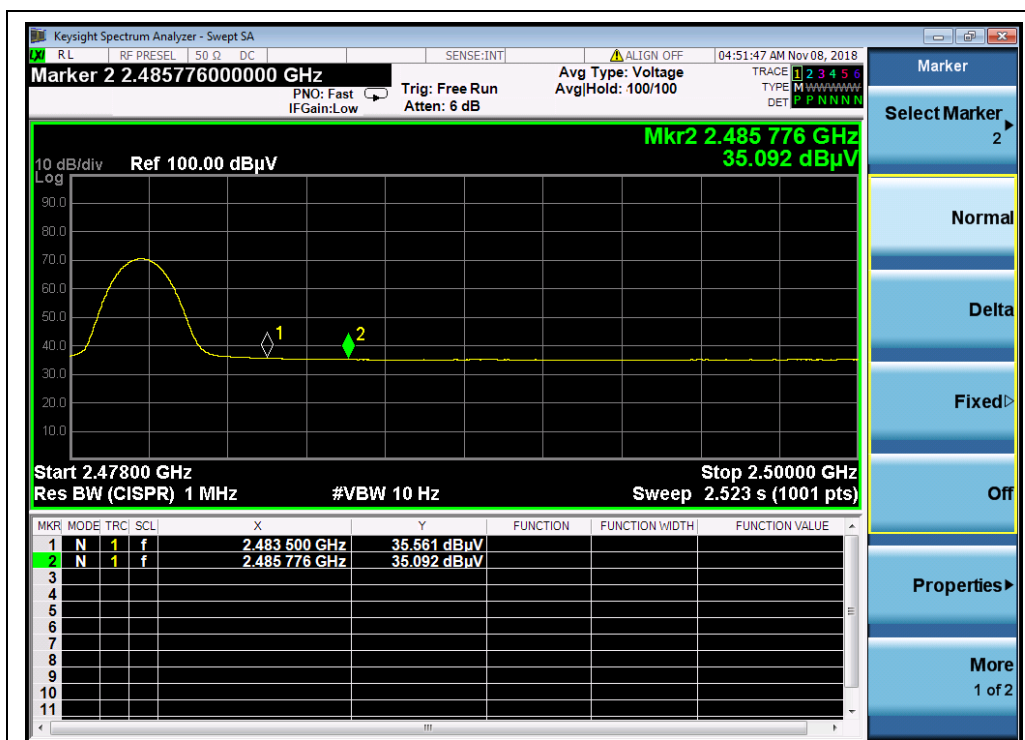

(Channel = 78, AVERAGE, 8-DPSK)

## 2.10. Radiated Emission

### 2.10.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:**


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


## 2.10.2. Test Description

### A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

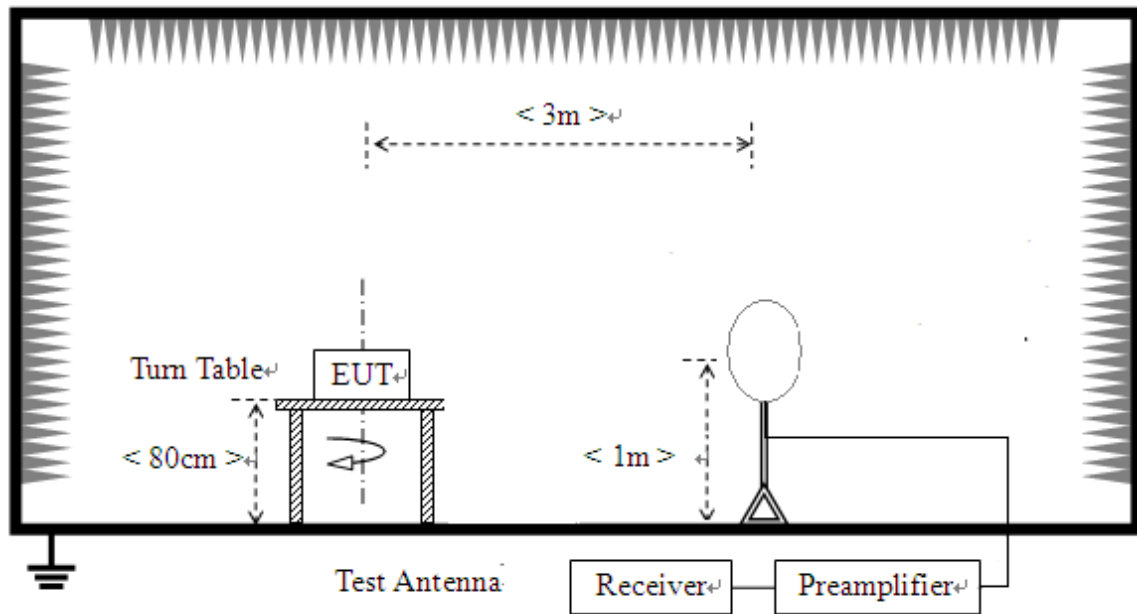

- 2) For radiated emissions from 30MHz to 1GHz

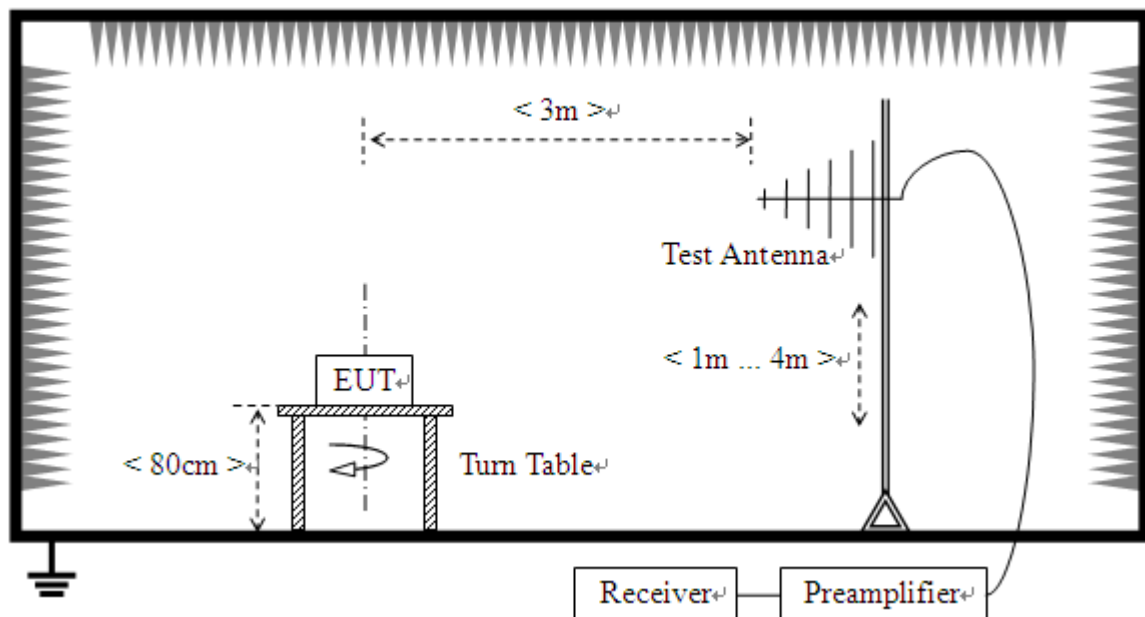

### 3) For radiated emissions above 1GHz

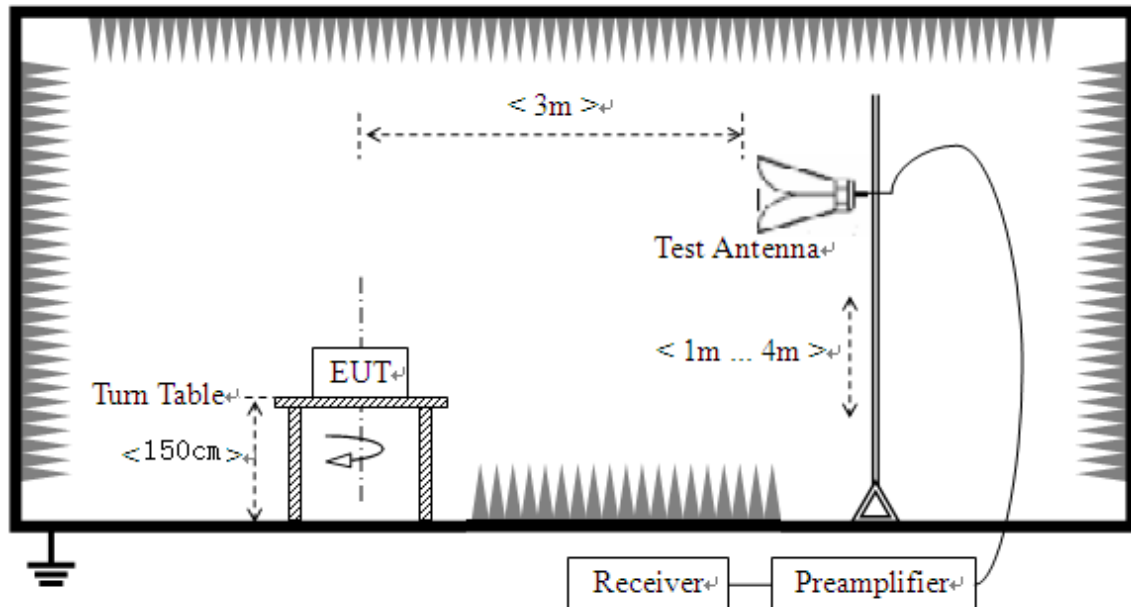

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, the EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be



higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

## B. Equipments List:

Please reference ANNEX B(4).

### 2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 2.10.4. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.

**Note1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


**Note2:** For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

**Note3:** For the frequency, which started from 25GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.




**GFSK Mode**

Plots for Channel = 0

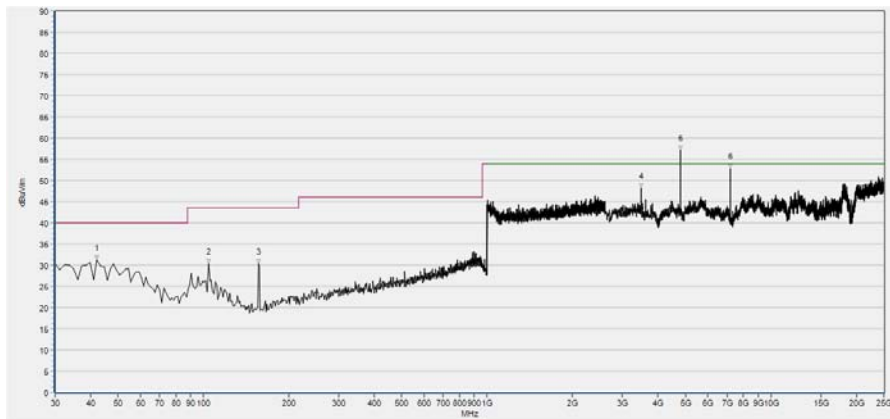

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
42.140	31.27	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	30.29	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
156.258	30.44	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
3488.016	48.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4804.300	57.05	N/A	46.67	74.00	N/A	54.00	Horizontal	PASS
7207.092	52.95	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 0)

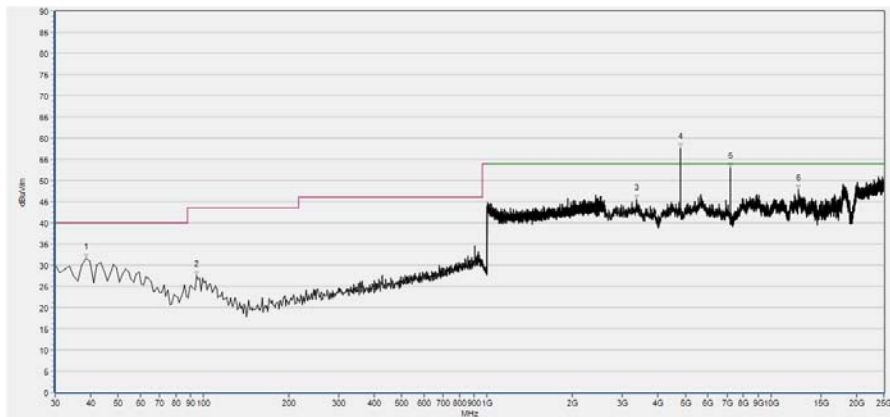

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
38.498	31.57	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
94.343	27.46	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
3353.592	45.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4804.000	57.05	N/A	52.20	74.00	N/A	54.00	Vertical	PASS
7207.092	53.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12514.821	47.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical, GFSK, channel 0)

### Plot for Channel = 39

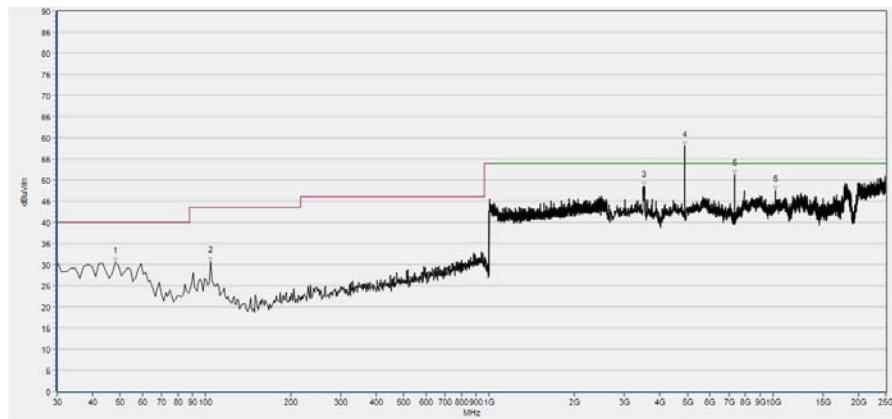

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	30.54	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	30.79	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
3508.383	48.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4881.600	58.78	N/A	51.11	74.00	N/A	54.00	Horizontal	PASS
7321.149	51.25	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10205.165	47.44	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 39)

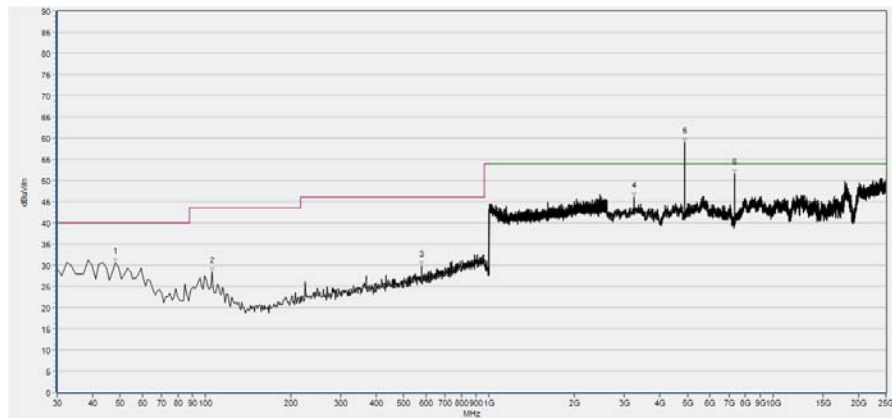


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	30.51	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
105.269	28.32	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
577.522	29.79	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
3239.534	46.02	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4882.200	58.34	N/A	52.61	74.00	N/A	54.00	Vertical	PASS
7321.149	51.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical, GFSK, channel 39)




## Plot for Channel = 78

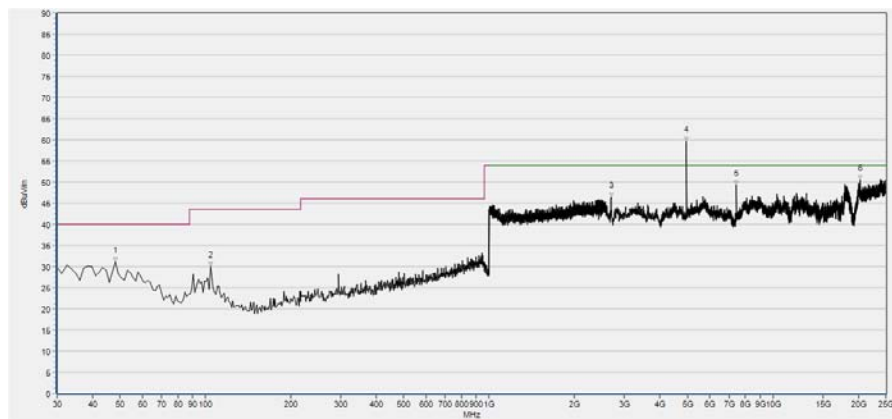


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	31.14	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	29.93	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2689.616	46.42	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4959.600	60.03	N/A	52.60	74.00	N/A	54.00	Horizontal	PASS
7439.280	49.36	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
20307.365	50.60	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 78)

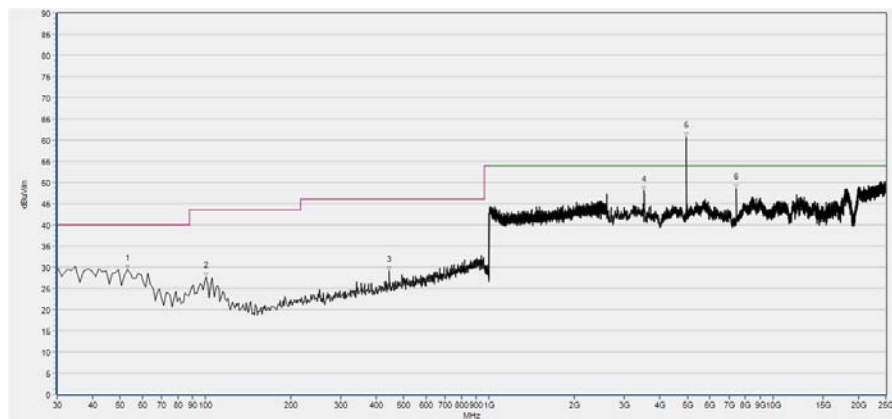


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
53.066	29.53	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
100.413	27.74	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
443.980	29.11	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
3516.530	47.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4960.300	60.58	N/A	52.85	74.00	N/A	54.00	Vertical	PASS
7439.280	48.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical, GFSK, channel 78)

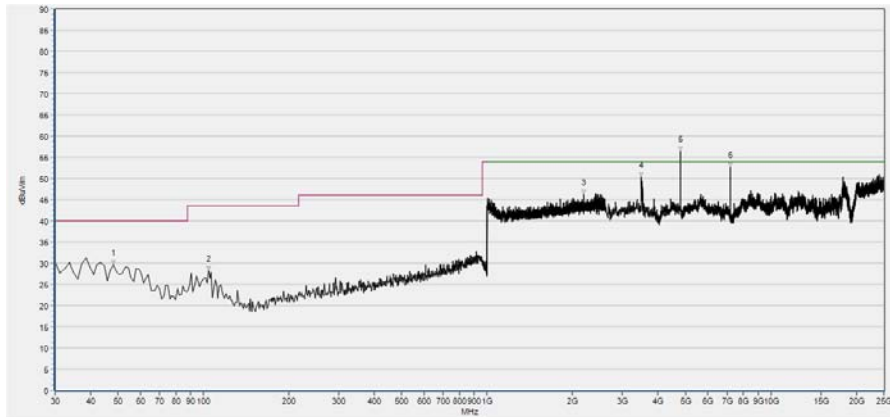 **$\pi/4$ -DQPSK Mode****Plots for Channel = 0**


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	29.65	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	28.28	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2194.078	46.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3492.089	50.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4804.200	53.20	N/A	43.34	74.00	N/A	54.00	Horizontal	PASS
7207.092	52.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

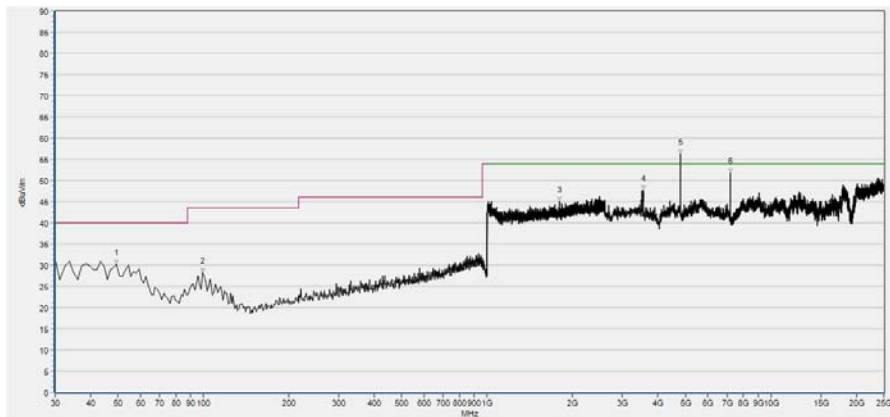(30MHz to 25GHz, Antenna Horizontal,  $\pi/4$ -DQPSK, channel 0)

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	30.20	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
99.199	28.17	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1791.997	45.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3549.118	47.70	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4804.300	56.80	N/A	48.12	74.00	N/A	54.00	Vertical	PASS
7207.092	51.73	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical,  $\pi/4$ -DQPSK, channel 0)

### Plot for Channel = 39

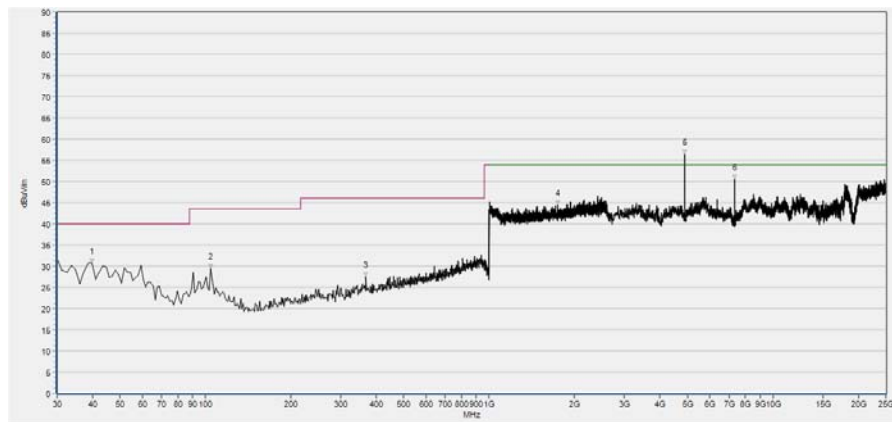

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
39.712	30.74	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	29.46	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
367.497	27.54	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1747.179	44.43	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4882.000	52.70	N/A	40.88	74.00	N/A	54.00	Horizontal	PASS
7325.223	50.58	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal,  $\pi/4$ -DQPSK, channel 39)

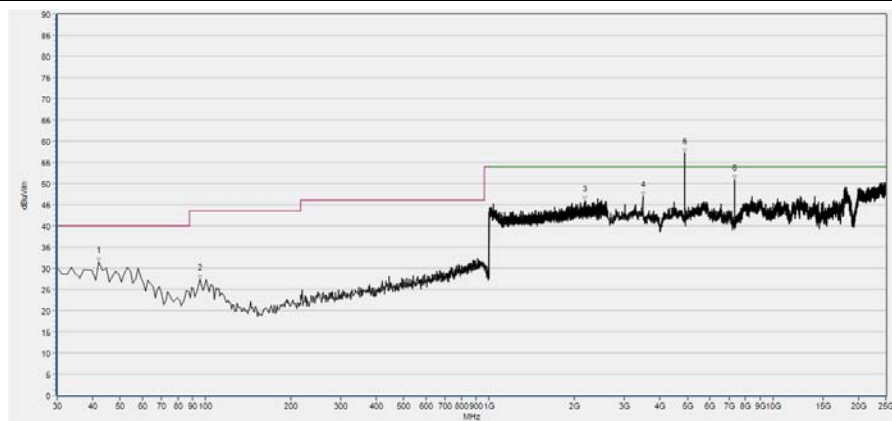

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
42.140	31.38	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
95.557	27.40	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2173.589	45.92	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3479.869	46.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4881.600	57.82	N/A	49.13	74.00	N/A	54.00	Vertical	PASS
7321.149	50.82	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical,  $\pi/4$ -DQPSK, channel 39)

### Plot for Channel = 78

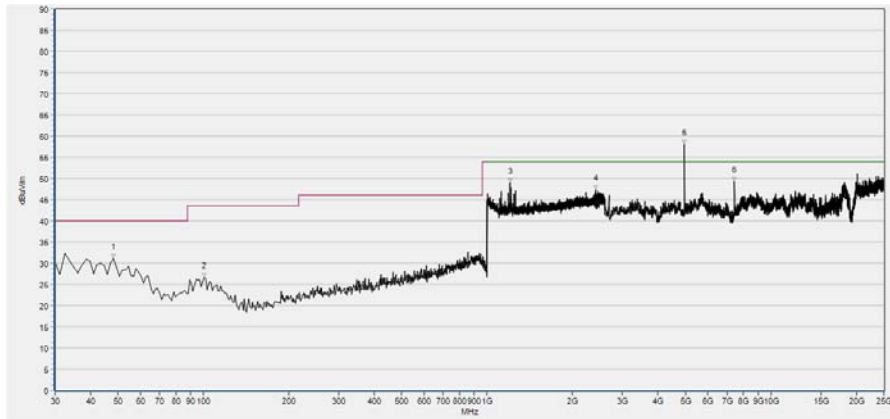

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	31.09	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
100.413	26.61	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1202.961	48.84	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2409.844	47.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4960.300	53.81	N/A	43.66	74.00	N/A	54.00	Horizontal	PASS
7439.280	49.33	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal,  $\pi/4$ -DQPSK, channel 78)

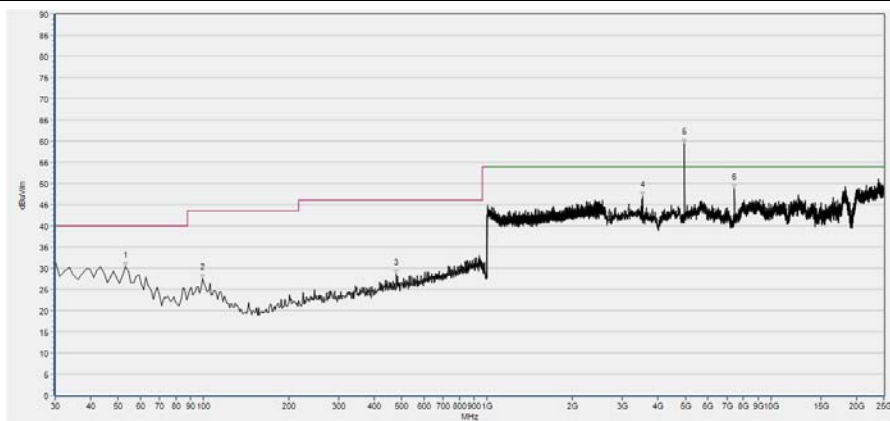


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
53.066	30.31	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
99.199	27.55	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
477.972	28.54	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
3524.677	46.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4959.700	59.72	N/A	50.44	74.00	N/A	54.00	Vertical	PASS
7439.280	48.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical,  $\pi/4$ -DQPSK, channel 78)


**8-DPSK Mode**

Plots for Channel = 0

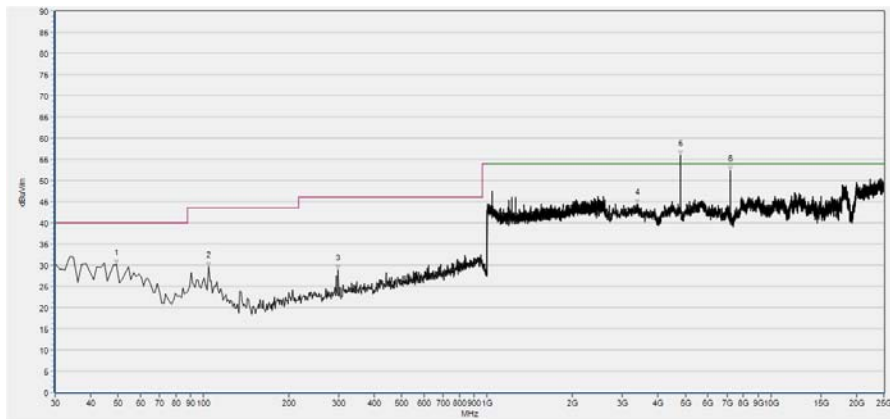

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	30.11	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	29.72	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
298.298	28.94	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
3382.106	44.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4804.100	55.91	N/A	45.65	74.00	N/A	54.00	Horizontal	PASS
7207.092	52.27	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal, 8-DPSK, channel 0)

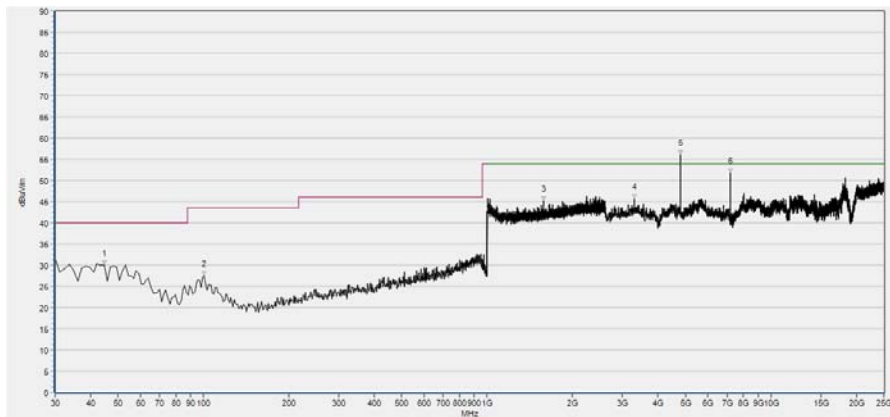

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
44.568	30.00	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
100.413	27.48	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1575.590	45.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3296.563	45.63	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4804.100	56.33	N/A	46.31	74.00	N/A	54.00	Vertical	PASS
7207.092	51.79	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical, 8-DPSK, channel 0)

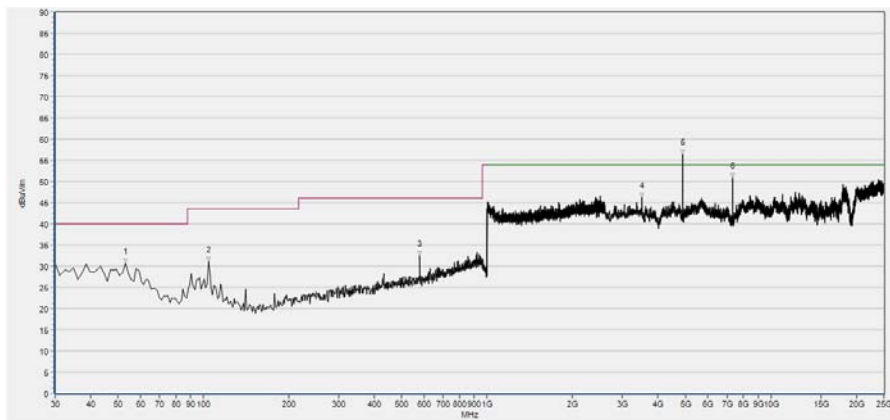

Plot for Channel = 39

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
53.066	30.79	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	31.05	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
578.736	32.59	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
3512.457	46.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4881.500	57.01	N/A	46.89	74.00	N/A	54.00	Horizontal	PASS
7321.149	50.90	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal, 8-DPSK, channel 39)

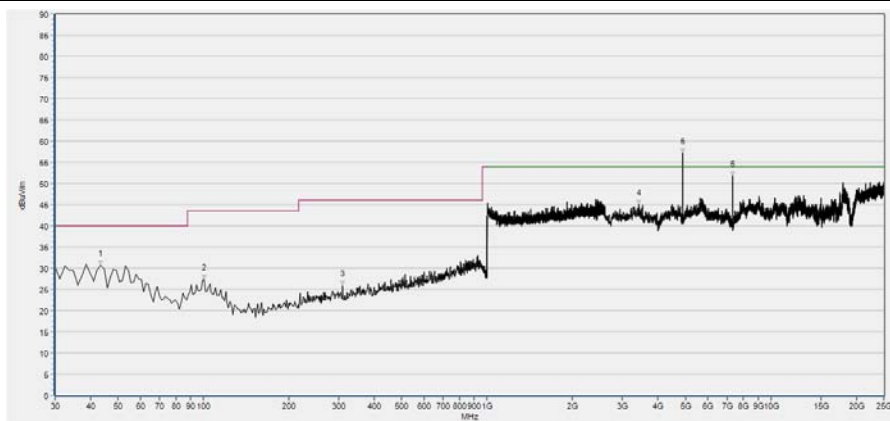


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.354	30.69	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
100.413	27.29	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
309.224	25.89	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
3426.914	45.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4881.600	57.10	N/A	51.01	74.00	N/A	54.00	Vertical	PASS
7321.149	51.82	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical, 8-DPSK, channel 39)






## Plot for Channel = 78

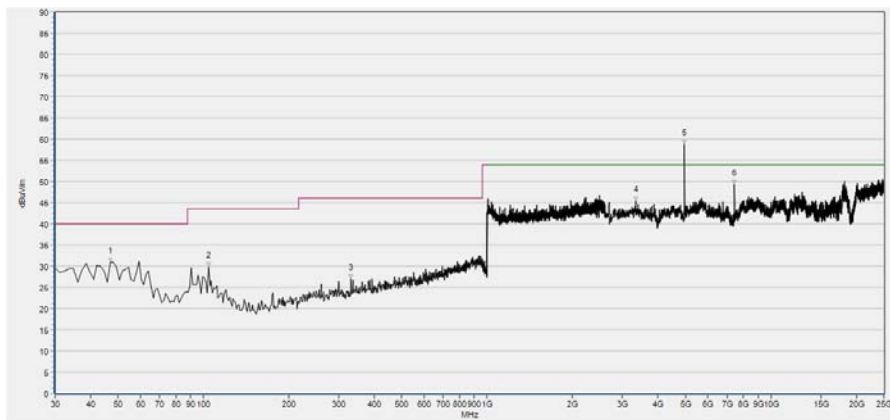

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
46.996	30.86	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	29.89	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
331.076	27.02	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
3333.224	45.31	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4959.600	55.94	N/A	46.10	74.00	N/A	54.00	Horizontal	PASS
7439.280	49.29	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal, 8-DPSK, channel 78)

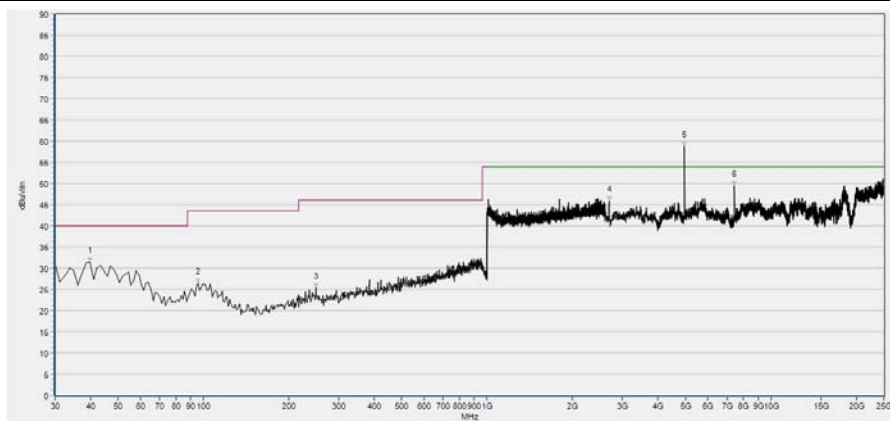

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
39.712	31.46	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
95.557	26.45	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
248.523	25.30	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2689.616	45.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4959.600	60.15	N/A	50.82	74.00	N/A	54.00	Vertical	PASS
7439.280	49.49	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical, 8-DPSK, channel 78)

## Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Number of Hopping Frequency	±5%
Peak Output Power	±2.22dB
20dB Bandwidth	±5%
Carrier Frequency Separation	±5%
Time of Occupancy (Dwell time)	±5%
Conducted Spurious Emission	±2.77 dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Company Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Department:</b>	Morlab Laboratory
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
<b>Responsible Test Lab Manager:</b>	Mr. Su Feng
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



#### 4. Test Equipments Utilized

##### 4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Bluetooth Base Station	6K00006210	MT8852B	Anritsu	2018.04.17	2019.04.16
Power Splitter	NW521	1506A	Weinschel	2018.04.17	2019.04.16
Attenuator 1	(N/A.)	10dB	Resnet	2018.04.17	2019.04.16
Attenuator 2	(N/A.)	3dB	Resnet	2018.04.17	2019.04.16
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2017.12.03	2018.12.02
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

##### 4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2018.05.08	2019.05.07
LISN	812744	NSLK 8127	Schwarzbeck	2018.05.08	2019.05.07
Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2018.05.08	2019.05.07
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

##### 4.3 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V 1.0

**4.4 Radiated Test Equipments**

<b>Equipment Name</b>	<b>Serial No.</b>	<b>Type</b>	<b>Manufacturer</b>	<b>Cal. Date</b>	<b>Cal. Due</b>
Receiver	MY54130016	N9038A	Agilent	2018.08.04	2019.08.03
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2018.05.18	2019.05.17
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2018.03.03	2019.03.02
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2018.08.06	2019.08.05
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2018.08.02	2019.08.01
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

————— END OF REPORT —————