

APPLICATION CERTIFICATION FCC Part 15C
On Behalf of
LEEDARSON LIGHTING CO., LTD.

Water Leak Sensor
Model No.: 6AA-SS-ZF-H0

FCC ID: 2AB2Q-6AA-SS-ZF-H0

Prepared for : LEEDARSON LIGHTING CO., LTD.
Address : Xingda Road, Xingtai Industrial Zone, Changtai
County, Zhangzhou, Fujian, China.

Prepared by : Shenzhen Accurate Technology Co., Ltd.
Address : 1/F., Building A, Changyuan New Material Port,
Science & Industry Park, Nanshan District,
Shenzhen, Guangdong, P.R. China.

Tel: +86-755-26503290
Fax: +86-755-26503396

Report No. : ATE20171552
Date of Test : July 15, 2017-July 26, 2017
Date of Report : July 27, 2017

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels	6
1.3. Accessory and Auxiliary Equipment	6
1.4. Description of Test Facility	7
1.5. Measurement Uncertainty.....	7
2. MEASURING DEVICE AND TEST EQUIPMENT	8
3. OPERATION OF EUT DURING TESTING	9
3.1. Operating Mode	9
3.2. Configuration and peripherals	9
4. TEST PROCEDURES AND RESULTS	10
5. 6DB BANDWIDTH MEASUREMENT.....	11
5.1. Block Diagram of Test Setup.....	11
5.2. The Requirement For Section 15.247(a)(2).....	11
5.3. EUT Configuration on Measurement	11
5.4. Operating Condition of EUT	11
5.5. Test Procedure	11
5.6. Test Result	12
6. MAXIMUM CONDUCTED PEAK OUTPUT POWER.....	14
6.1. Block Diagram of Test Setup.....	14
6.2. The Requirement For Section 15.247(b)(3).....	14
6.3. EUT Configuration on Measurement	14
6.4. Operating Condition of EUT	14
6.5. Test Procedure	14
6.6. Test Result	15
7. POWER SPECTRAL DENSITY MEASUREMENT.....	17
7.1. Block Diagram of Test Setup.....	17
7.2. The Requirement For Section 15.247(e).....	17
7.3. EUT Configuration on Measurement	17
7.4. Operating Condition of EUT	17
7.5. Test Procedure	17
7.6. Test Result	18
8. BAND EDGE COMPLIANCE TEST	20
8.1. Block Diagram of Test Setup.....	20
8.2. The Requirement For Section 15.247(d)	20
8.3. EUT Configuration on Measurement	20
8.4. Operating Condition of EUT	20
8.5. Test Procedure	21
8.6. Test Result	21
9. RADIATED SPURIOUS EMISSION TEST	28
9.1. Block Diagram of Test Setup.....	28
9.2. The Limit For Section 15.247(d)	29

9.3.	Restricted bands of operation	30
9.4.	Configuration of EUT on Measurement	30
9.5.	Operating Condition of EUT	31
9.6.	Test Procedure	31
9.7.	The Field Strength of Radiation Emission Measurement Results	31
10.	99% OCCUPIED BANDWIDTH	59
10.1.	Block Diagram of Test Setup.....	59
10.2.	EUT Configuration on Measurement	59
10.3.	Operating Condition of EUT	59
10.4.	Test Procedure	59
10.5.	Measurement Result	60
11.	CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST	62
11.1.	Block Diagram of Test Setup.....	62
11.2.	The Requirement For Section 15.247(d)	62
11.3.	EUT Configuration on Measurement	62
11.4.	Operating Condition of EUT	62
11.5.	Test Procedure	63
11.6.	Test Result	63
12.	ANTENNA REQUIREMENT	66
12.1.	The Requirement	66
12.2.	Antenna Construction	66

Test Report Certification

Applicant : LEEDARSON LIGHTING CO., LTD.
Address : Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou, Fujian, China
Manufacturer : LEEDARSON LIGHTING CO., LTD.
Address : Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou, Fujian, China
Product : Water Leak Sensor
Model No. : 6AA-SS-ZF-H0
Trade name : n.a

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247: 2016
ANSI C63.10: 2013

The EUT was tested according to DTS test procedure of Apr 05, 2017 KDB558074 D01 DTS Meas Guidance v04 for compliance to FCC 47CFR 15.247 requirements

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements. This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : July 15, 2017-July 26, 2017
Date of Report: July 27, 2017

Prepared by :



(Tim Zhang, Engineer)

Approved & Authorized Signer :


(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	Water Leak Sensor
Model Number	:	6AA-SS-ZF-H0
Frequency Range	:	2405-2480MHz
Number of Channels	:	16
Antenna Gain	:	1.05dBi
Type of Antenna	:	Integral Antenna
Power Supply	:	DC 3V(Powered by Battery)
Channel Spacing	:	5MHz
Modulation Type	:	O-QPSK
Applicant	:	LEEDARSON LIGHTING CO., LTD.
Address	:	Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou, Fujian, China.
Manufacturer	:	LEEDARSON LIGHTING CO., LTD.
Address	:	Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou, Fujian, China.
Date of sample received	:	July 15, 2017
Date of Test	:	July 15, 2017-July 26, 2017

1.2.Carrier Frequency of Channels

Channel	Freq.(MHz)	Channel	Freq.(MHz)
11	2405	19	2445
12	2410	20	2450
13	2415	21	2455
14	2420	22	2460
15	2425	23	2465
16	2430	24	2470
17	2435	25	2475
18	2440	26	2480

1.3.Accessory and Auxiliary Equipment

PC

Manufacturer: LENOVO

M/N: 4290-RT8

S/N: R9-FW93G 11/08

1.4. Description of Test Facility

EMC Lab	:	Recognition of accreditation by Federal Communications Commission (FCC) The Designation Number is CN1189 The Registration Number is 708358
		Listed by Innovation, Science and Economic Development Canada (ISED) The Registration Number is 5077A-2
		Accredited by China National Accreditation Service for Conformity Assessment (CNAS) The Registration Number is CNAS L3193
		Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01
Name of Firm	:	Shenzhen Accurate Technology Co., Ltd
Site Location	:	1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

1.5. Measurement Uncertainty

Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty (9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty (30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty (Above 1GHz)	=	4.06dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment


Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 07, 2017	1 Year
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 07, 2017	1 Year
Spectrum Analyzer	Rohde&Schwarz	FSV-40	101495	Jan. 07, 2017	1 Year
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 07, 2017	1 Year
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 07, 2017	1 Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 13, 2017	1 Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 13, 2017	1 Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 13, 2017	1 Year
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 13, 2017	1 Year
Open Switch and Control Unit	Rohde&Schwarz	OSP120 + OSP-B157	101244 + 100866	Jan. 07, 2017	1 Year
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 07, 2017	1 Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 07, 2017	1 Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 07, 2017	1 Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 07, 2017	1 Year

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode

The mode is used: **Transmitting mode**
Low Channel: 2405MHz
Middle Channel: 2445MHz
High Channel: 2480MHz

3.2.Configuration and peripherals

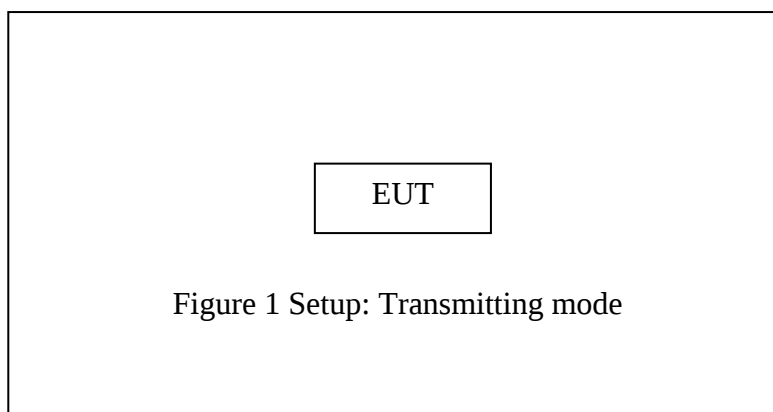


4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Power Line Conducted Emission	n.a
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
KDB558074 D01 DTS Meas Guidance v04	OBW	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

Note: The power supply mode of the EUT is DC 3V, According to the FCC standard requirements, conducted emission is not applicable

5. 6DB BANDWIDTH MEASUREMENT

5.1. Block Diagram of Test Setup



5.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX modes and measure it. The transmit frequency is 2405-2480MHz. We select 2405MHz, 2445MHz and 2480MHz TX frequency to transmit.

5.5. Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


5.6. Test Result

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2405	1.6064	> 0.5MHz
Middle	2445	1.8408	> 0.5MHz
High	2480	1.5977	> 0.5MHz

The spectrum analyzer plots are attached as below.


6dB Bandwidth

Low Channel 2405MHz

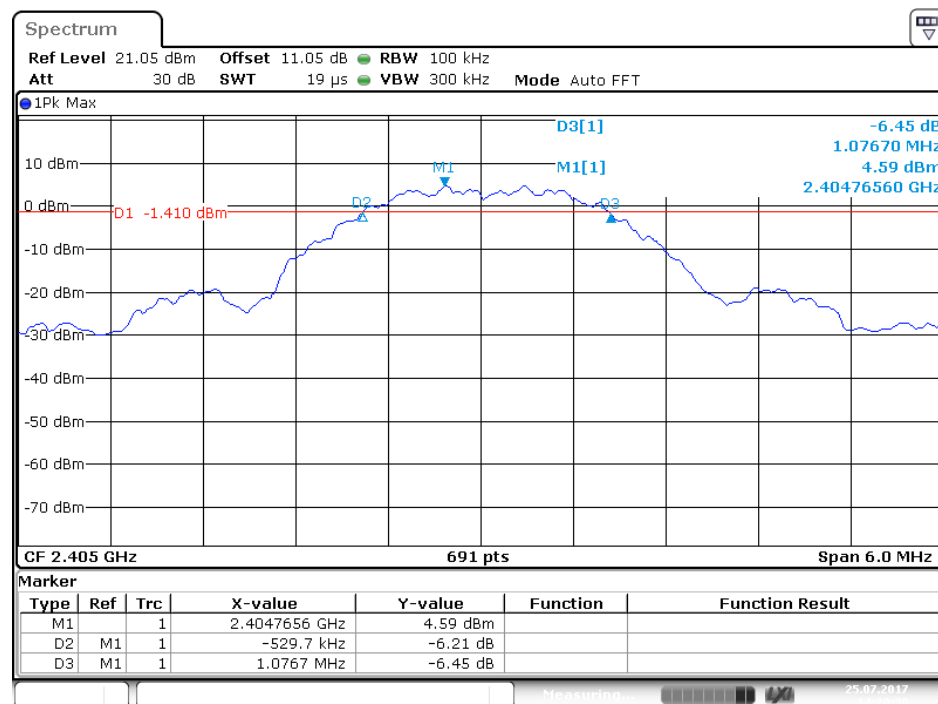


Date: 25.JUL.2017 14:20:30

Middle Channel 2445MHz

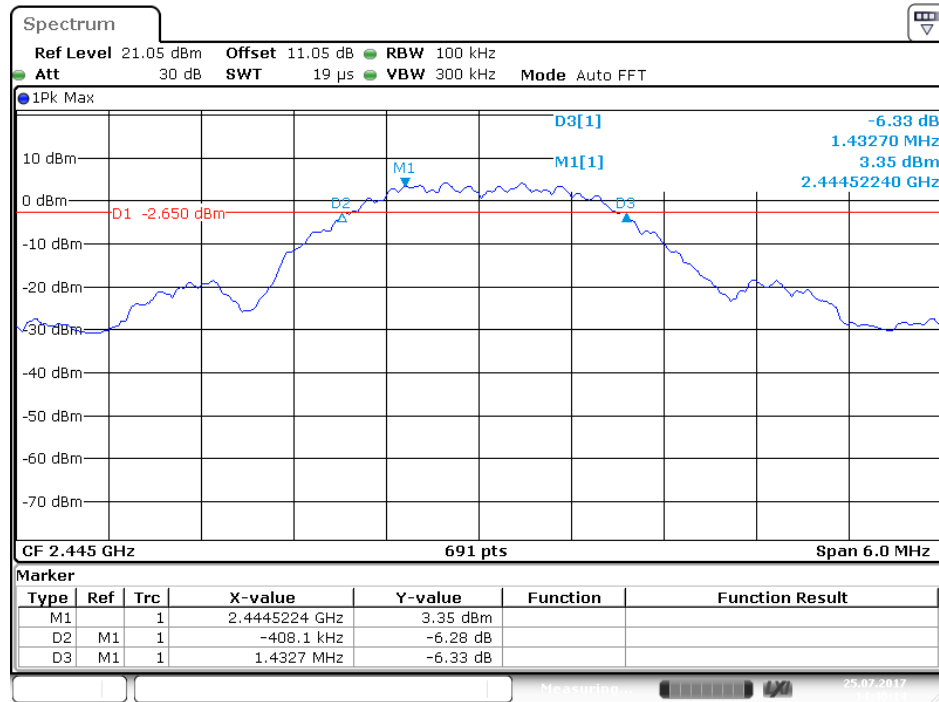

Date: 25.JUL.2017 14:40:14

High Channel 2480MHz

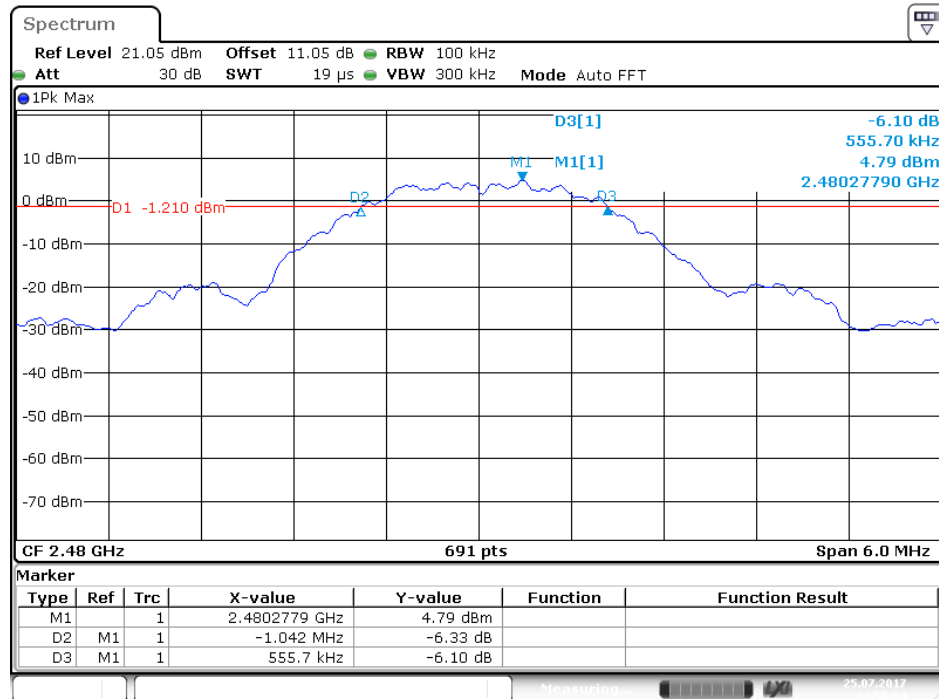

Date: 25.JUL.2017 14:50:04

6. MAXIMUM CONDUCTED PEAK OUTPUT POWER

6.1. Block Diagram of Test Setup



6.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

6.3. EUT Configuration on Measurement

The equipment is installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes then measure it. The transmit frequency is 2405-2480MHz. We select 2405MHz, 2445MHz and 2480MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The EUT was tested according to DTS test procedure of Apr 05, 2017 KDB5580 74 D01 DTS Meas Guidance v04 for compliance to FCC 47CFR 15.247 requirements.

6.5.2. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.3. Set RBW $\geq$ DTS bandwidth.

6.5.4. Set VBW $\geq 3 \times$ RBW, VBW=10MHz.

6.5.5. Set span $\geq 3 \times$ RBW, Span=10MHz.

6.5.6. Detector = peak.

6.5.7.Sweep time =auto couple.

6.5.8.Trace mode = max hold.


6.5.9.Allow trace to fully stability, Use peak marker function to determine the peak amplitude level.

6.6.Test Result


Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2405	7.30	30	PASS
Middle	2445	7.06	30	PASS
High	2480	7.20	30	PASS

The spectrum analyzer plots are attached as below.


Low Channel 2405MHz

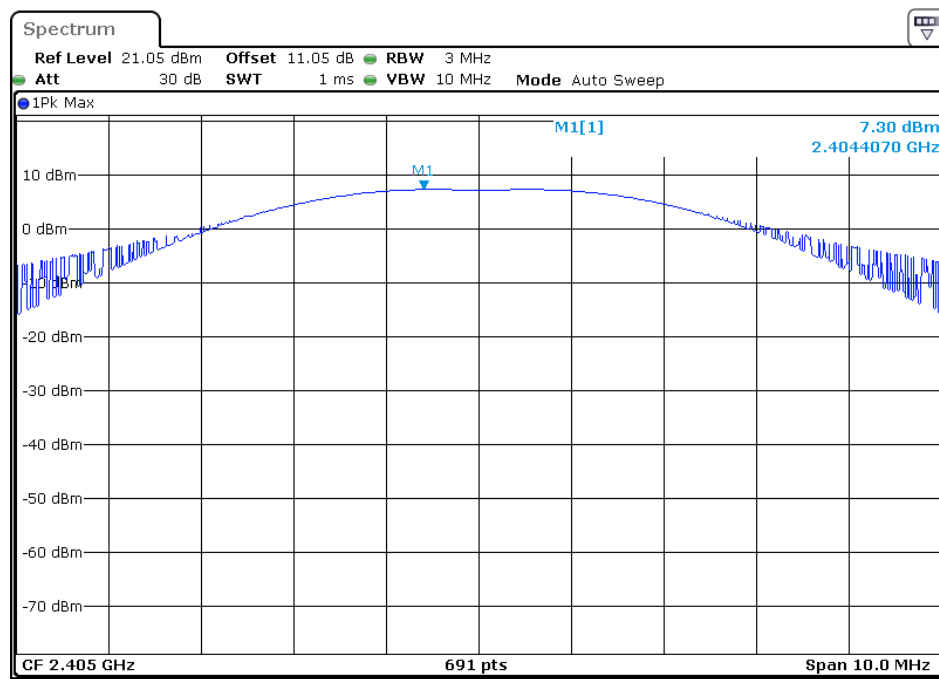

Channel Middle 2445MHz

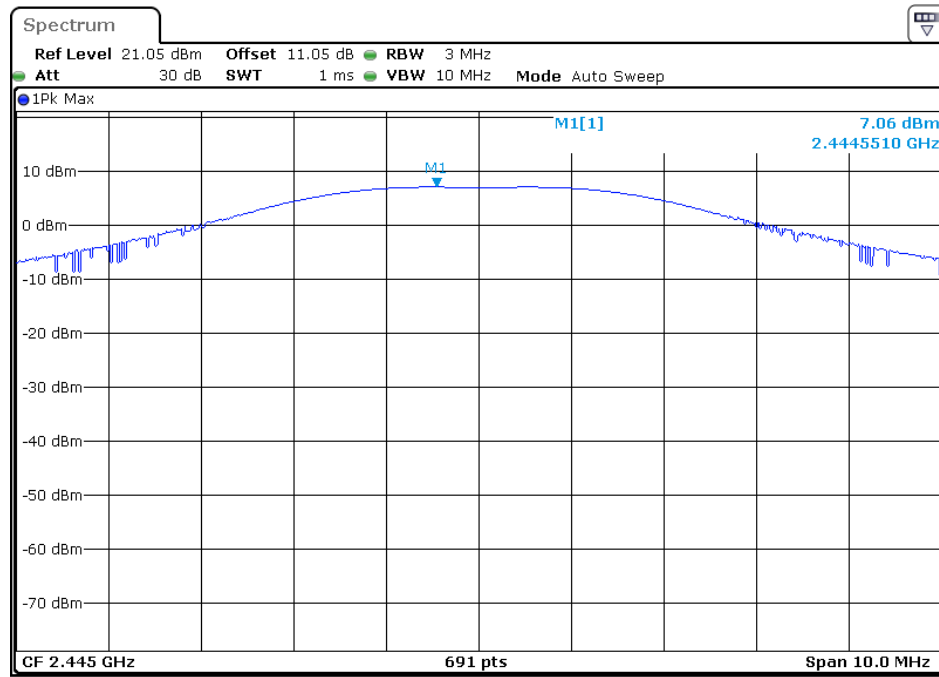


Channel High 2480MHz

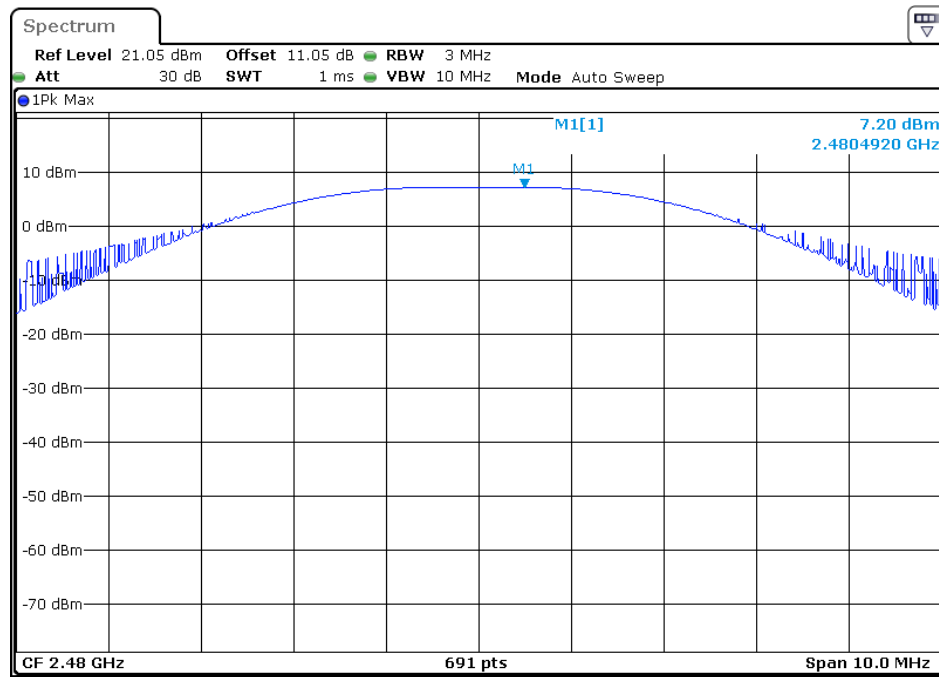

7. POWER SPECTRAL DENSITY MEASUREMENT

7.1. Block Diagram of Test Setup



7.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes then measure it. The transmit frequency is 2405-2480MHz. We select 2405MHz, 2445MHz and 2480MHz TX frequency to transmit.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Measurement Procedure PKPSD:

7.5.3. This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.

7.6.Test Result

CHANNEL NUMBER	FREQUENCY (MHz)	PSD (dBm/3KHz)	LIMIT (dBm/3KHz)	PASS/FAIL
Low	2405	-4.15	8	PASS
Middle	2445	-4.38	8	PASS
High	2480	-3.99	8	PASS


The spectrum analyzer plots are attached as below.

Low channel

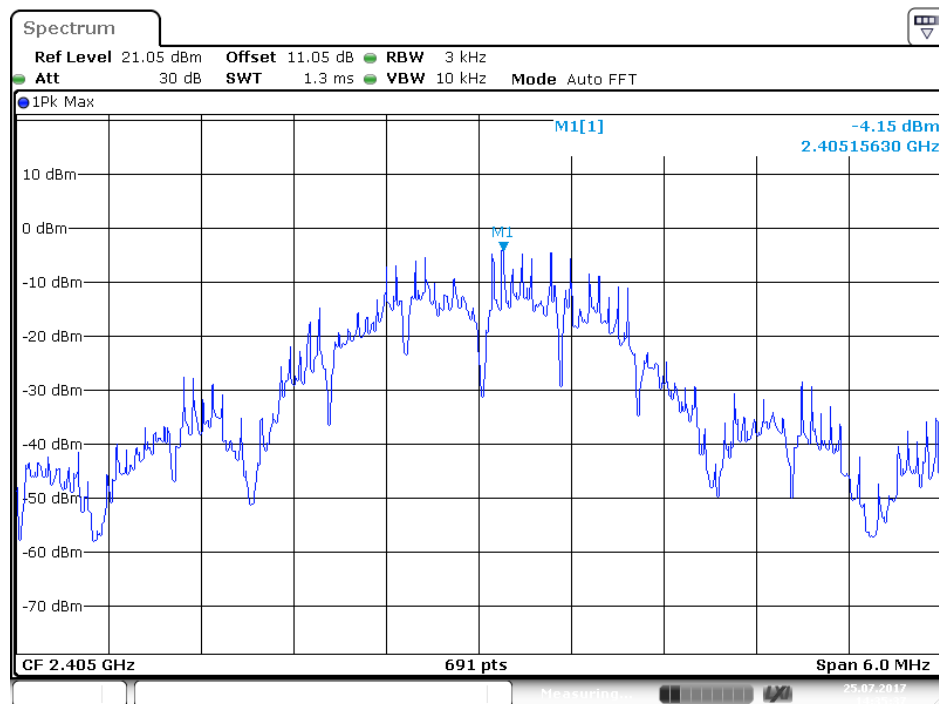


Date: 25.JUL.2017 14:35:37

Middle channel

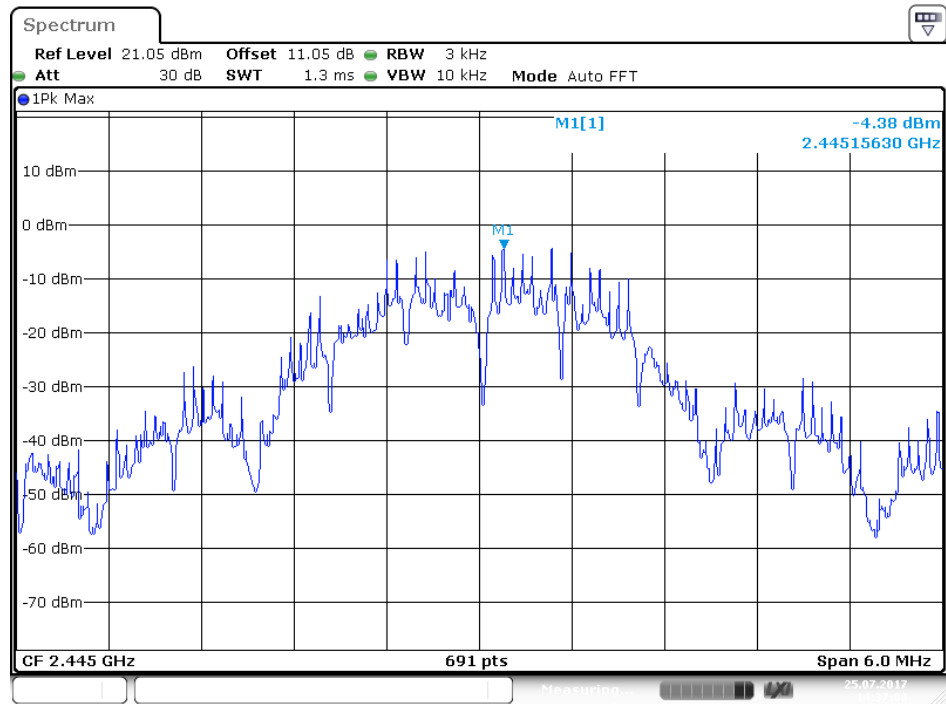

Date: 25.JUL.2017 14:37:08


High channel

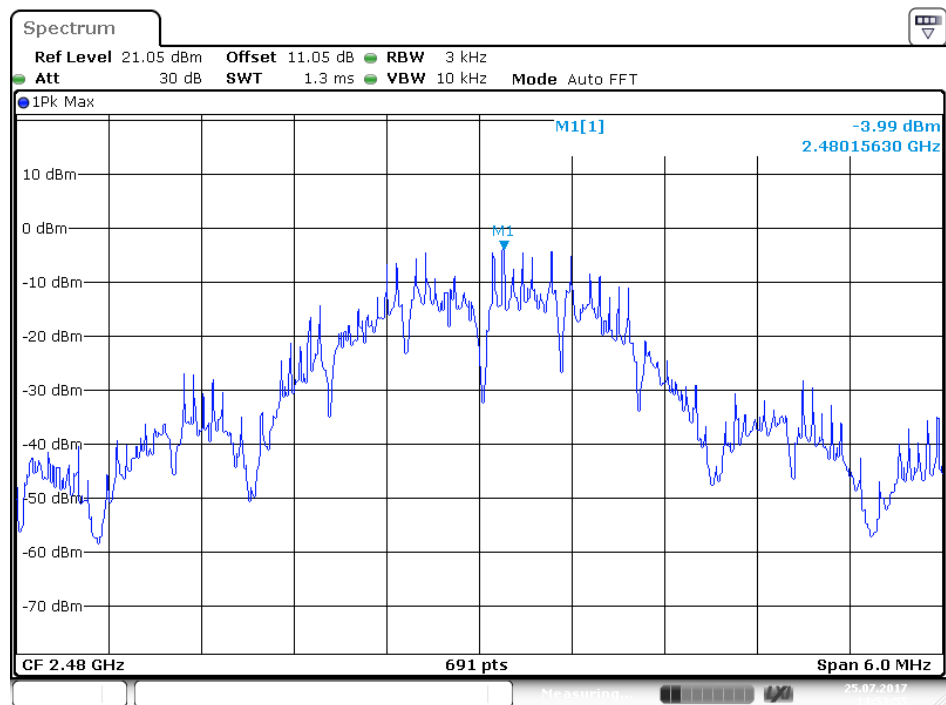

Date: 25.JUL.2017 14:53:55

8. BAND EDGE COMPLIANCE TEST

8.1. Block Diagram of Test Setup



8.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

8.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes then measure it. The transmit frequency is 2405-2480MHz. We select 2405MHz, 2445MHz and 2480MHz TX frequency to transmit.

8.5. Test Procedure

Conducted Band Edge:

8.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

8.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.

Radiate Band Edge:

8.5.3. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.

8.5.4. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

8.5.5. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

8.5.6. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:


8.5.7. RBW=1MHz, VBW=1MHz

8.5.8. The band edges was measured and recorded.

8.6. Test Result


Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2390	53.21	> 20dBc
2483.5	41.21	> 20dBc

Low Channel 2405MHz

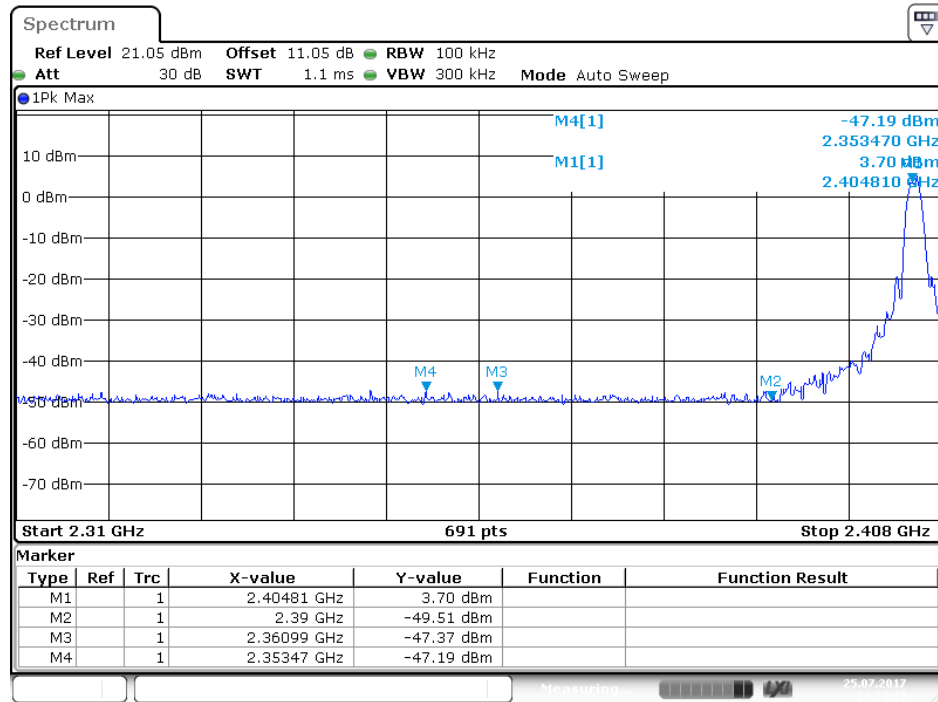

Date: 25.JUL.2017 14:24:24

High Channel 2480MHz

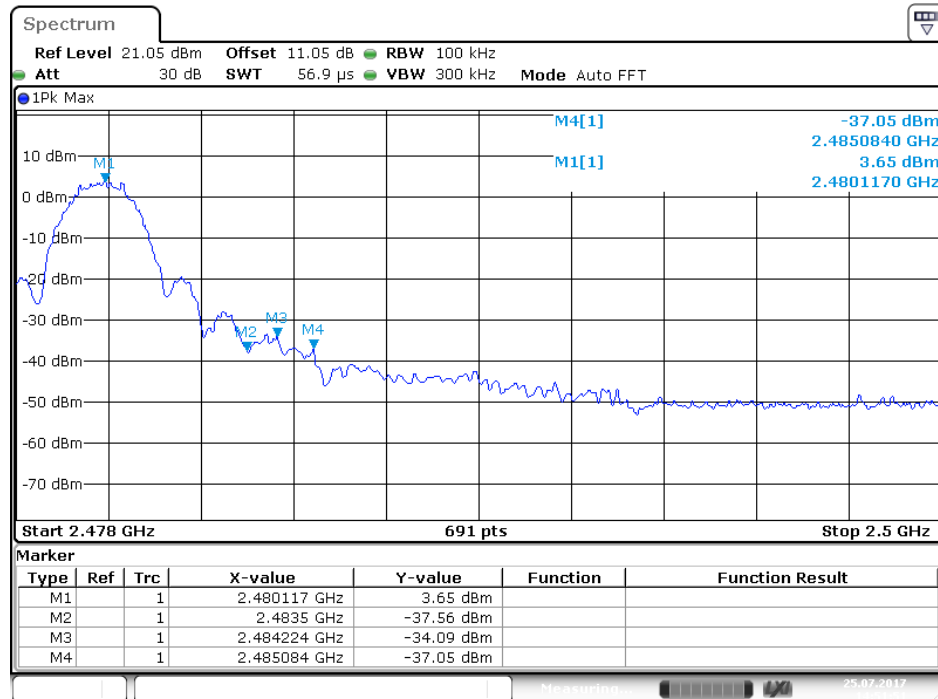

Date: 25.JUL.2017 14:51:51

Radiated Band Edge Result

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

3. Display the measurement of peak values.

Test Procedure:

The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground(Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

Let the EUT work in TX modes then measure it.

We select 2405MHz, 2480MHz TX frequency to transmit.


During the radiated emission test, the spectrum analyzer was set with the following configurations:

- 1.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz.
- 2.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- 3.All modes of operation were investigated and the worst-case emissions are reported.

Job No.: LGW2017 #3496
Standard: FCC (Bans Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2405MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Horizontal
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

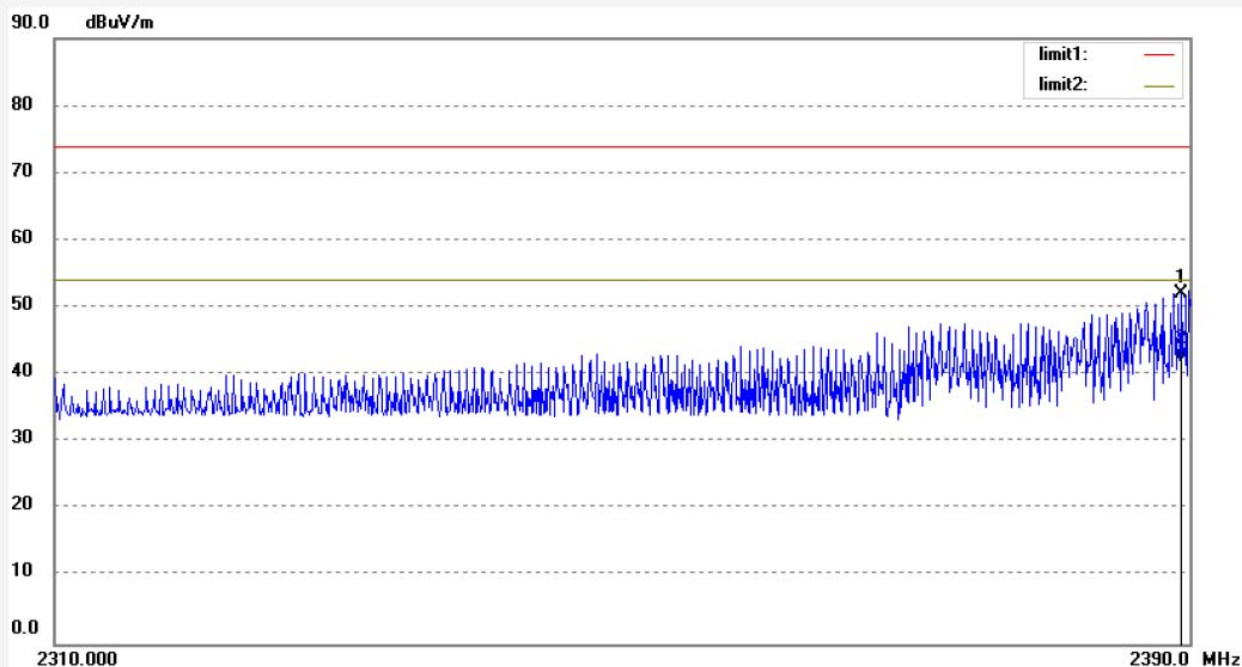


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2389.440	53.89	-1.71	52.18	74.00	-21.82	peak			
2	2389.440	43.86	-1.71	42.15	54.00	-11.85	AVG			

Job No.: LGW2017 #3495
Standard: FCC (Bans Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2405MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Vertical
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

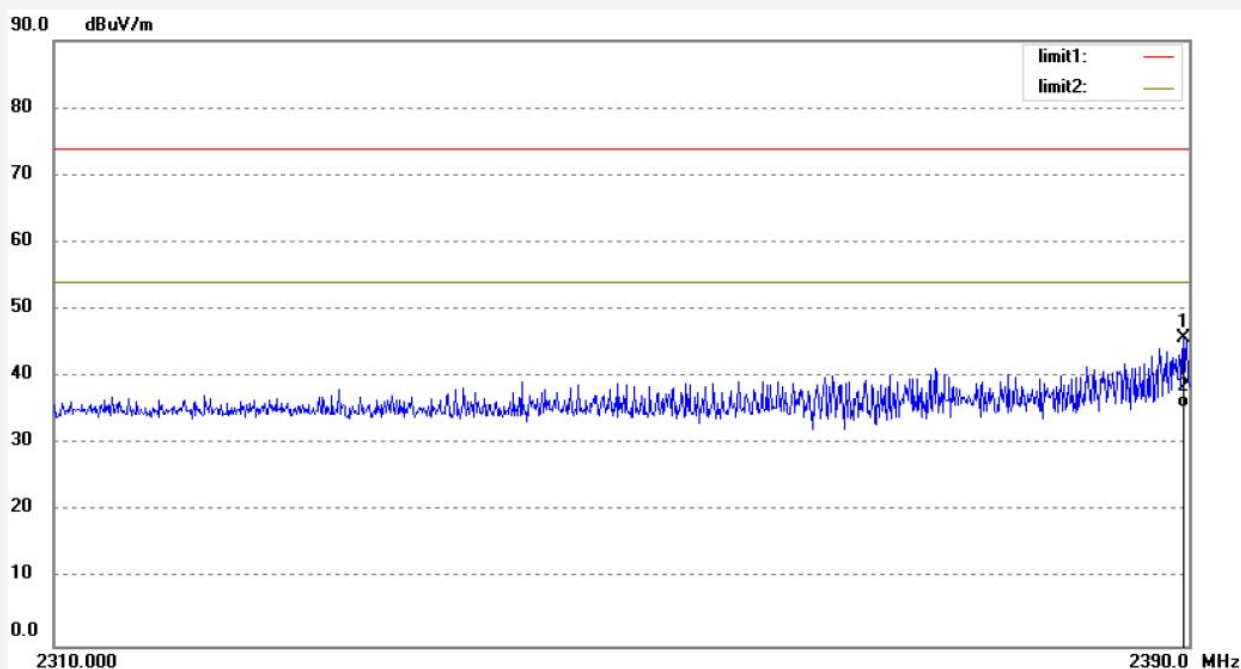


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2389.600	47.42	-1.71	45.71	74.00	-28.29	peak			
2	2389.600	37.12	-1.71	35.41	54.00	-18.59	AVG			

Job No.: LGW2017 #3501
Standard: FCC (Bans Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2480MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Horizontal
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

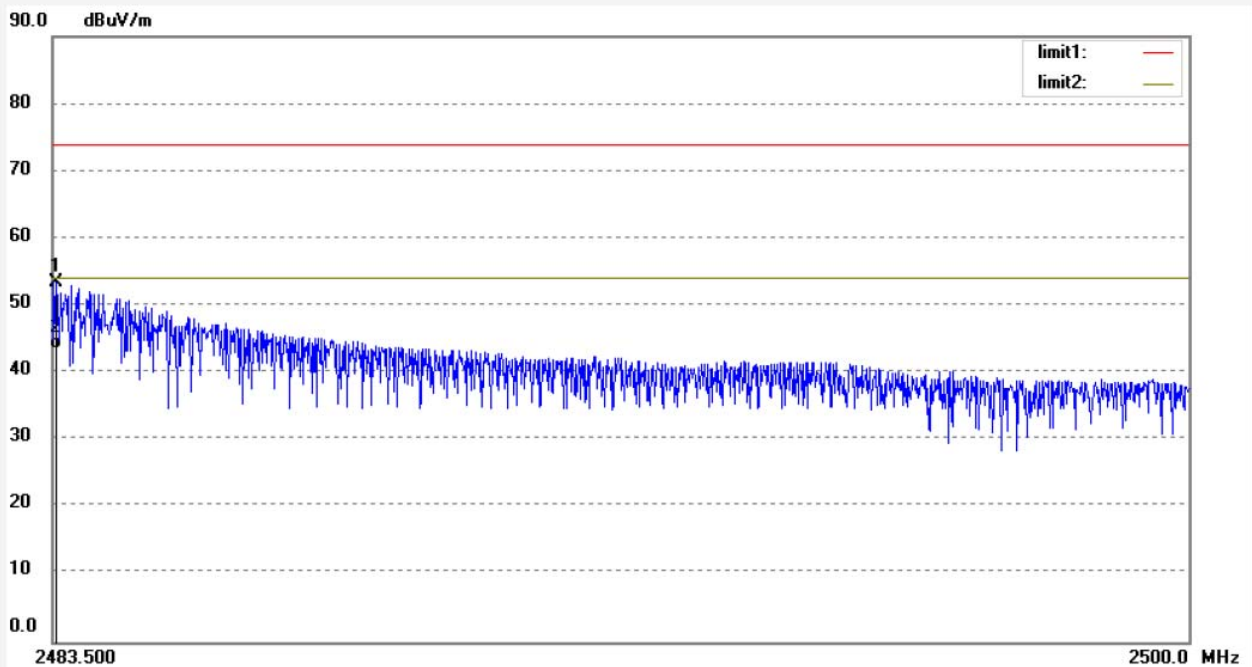


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.550	54.90	-1.40	53.50	74.00	-20.50	peak			
2	2483.550	44.84	-1.40	43.44	54.00	-10.56	AVG			

Job No.: LGW2017 #3502
Standard: FCC (Bans Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2480MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Vertical
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

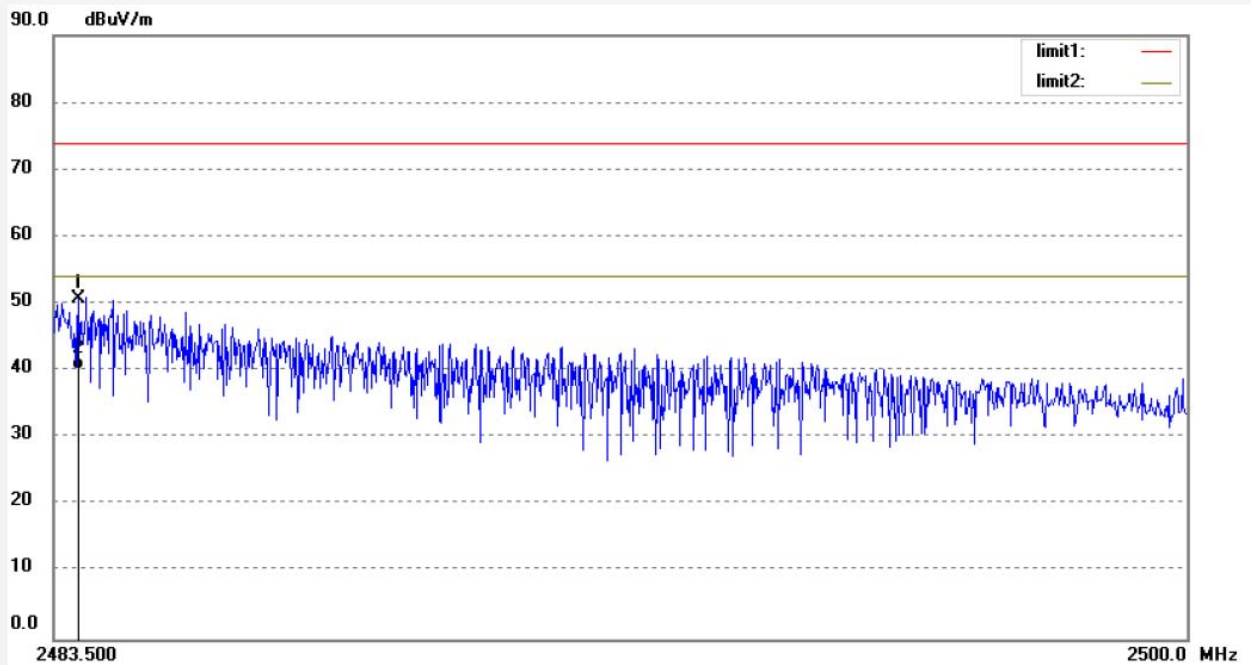


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.863	52.20	-1.41	50.79	74.00	-23.21	peak			
2	2483.863	41.66	-1.41	40.25	54.00	-13.75	AVG			

9. RADIATED SPURIOUS EMISSION TEST


9.1. Block Diagram of Test Setup

9.1.1. Block diagram of connection between the EUT and peripherals

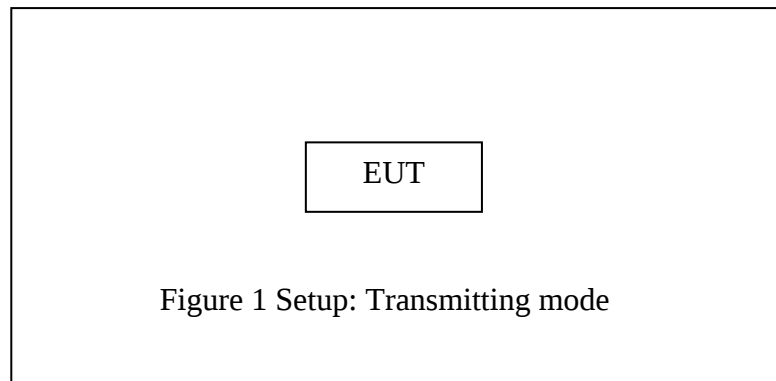


9.1.2. Semi-Anechoic Chamber Test Setup Diagram


(A) Radiated Emission Test Set-Up, Frequency below 30MHz

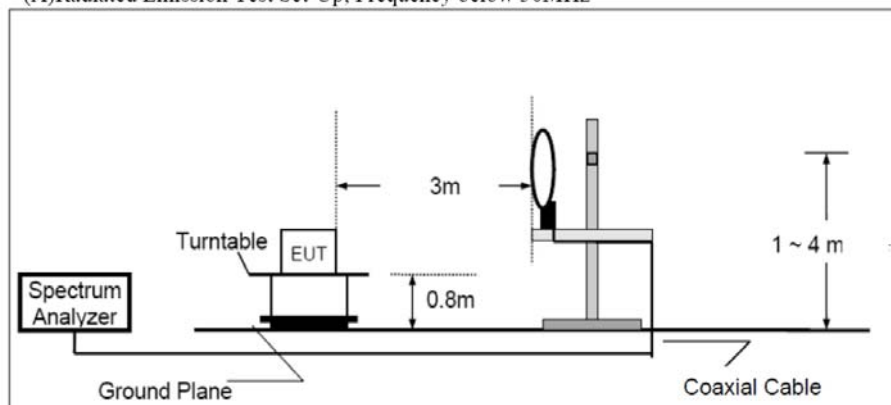

(B) Radiated Emission Test Set-Up, Frequency 30-1000MHz

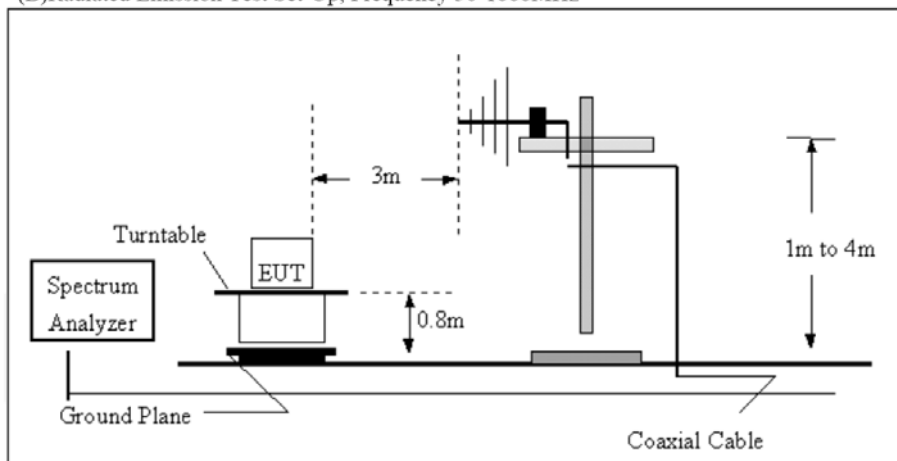

(C) Radiated Emission Test Set-Up, Frequency above 1GHz

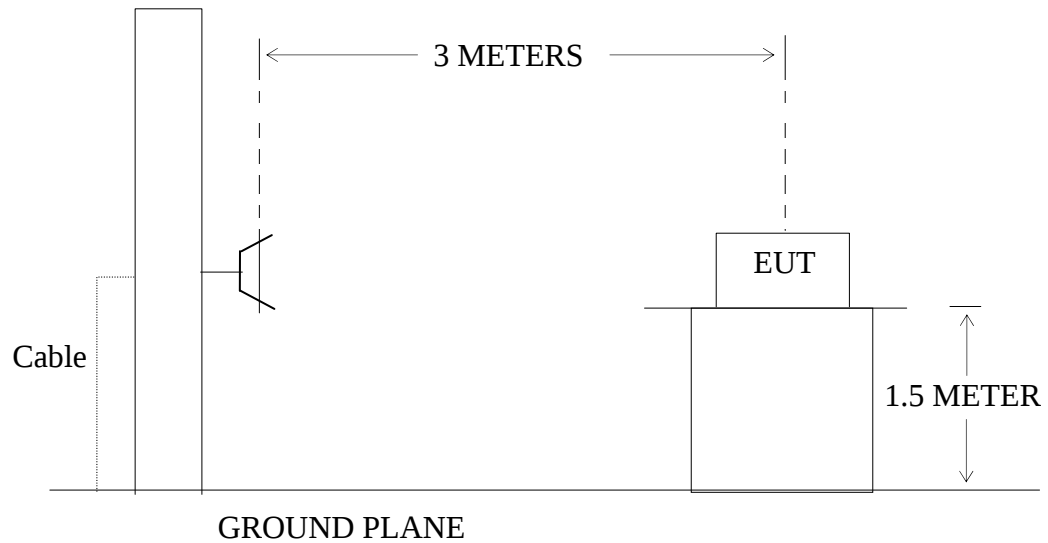

9.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

9.3.Restricted bands of operation

9.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

9.4.Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.5. Operating Condition of EUT

9.5.1. Setup the EUT and simulator as shown as Section 9.1.

9.5.2. Turn on the power of all equipment.

9.5.3. Let the EUT work in TX modes measure it. The transmit frequency is 2405-2480MHz. We select 2405MHz, 2445MHz and 2480MHz TX frequency to transmit.

9.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground (Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground (Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The frequency range from 30MHz to 25000MHz is checked.

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

During the radiated emission test, the spectrum analyzer was set with the following configurations:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

9.7. The Field Strength of Radiation Emission Measurement Results

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The EUT is tested radiation emission at each test mode in three axes. The worst emissions are reported in all test mode.

Low channel(9kHz-25GHz):


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Water Leak Sensor M/N:6AA-SS-ZF-H0
 Manufacturer: LEEDARSON
 Operating Condition: TX 2405MHz
 Test Site: 2# Chamber
 Operator: WADE
 Test Specification: DC 3V
 Comment: X
 Start of Test: 2017-07-24 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

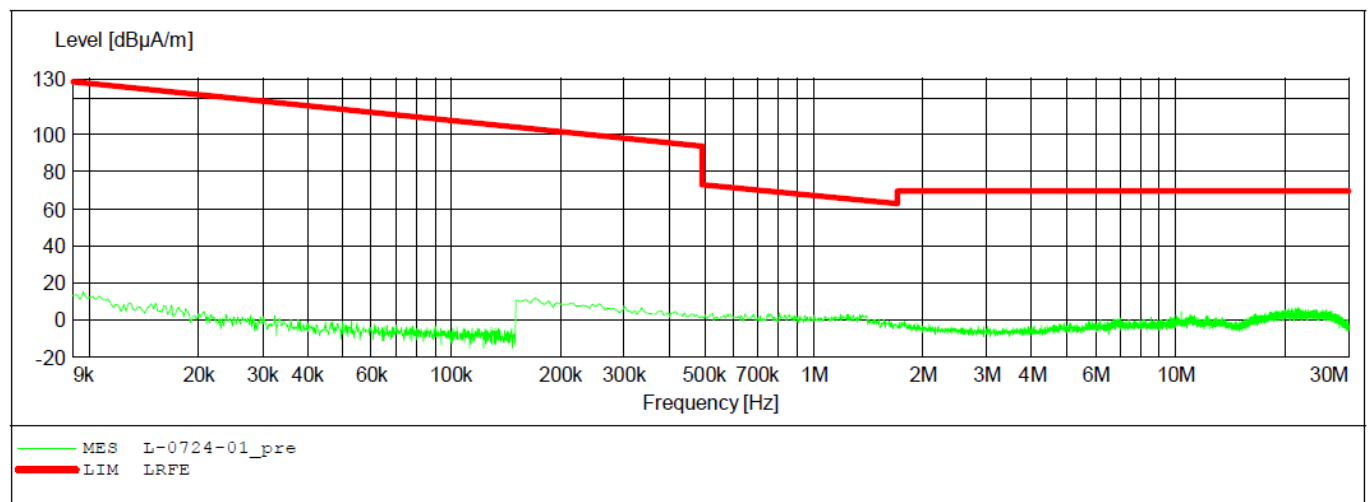


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Water Leak Sensor M/N:6AA-SS-ZF-H0
 Manufacturer: LEEDARSON
 Operating Condition: TX 2405MHz
 Test Site: 2# Chamber
 Operator: WADE
 Test Specification: DC 3V
 Comment: Y
 Start of Test: 2017-07-24 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

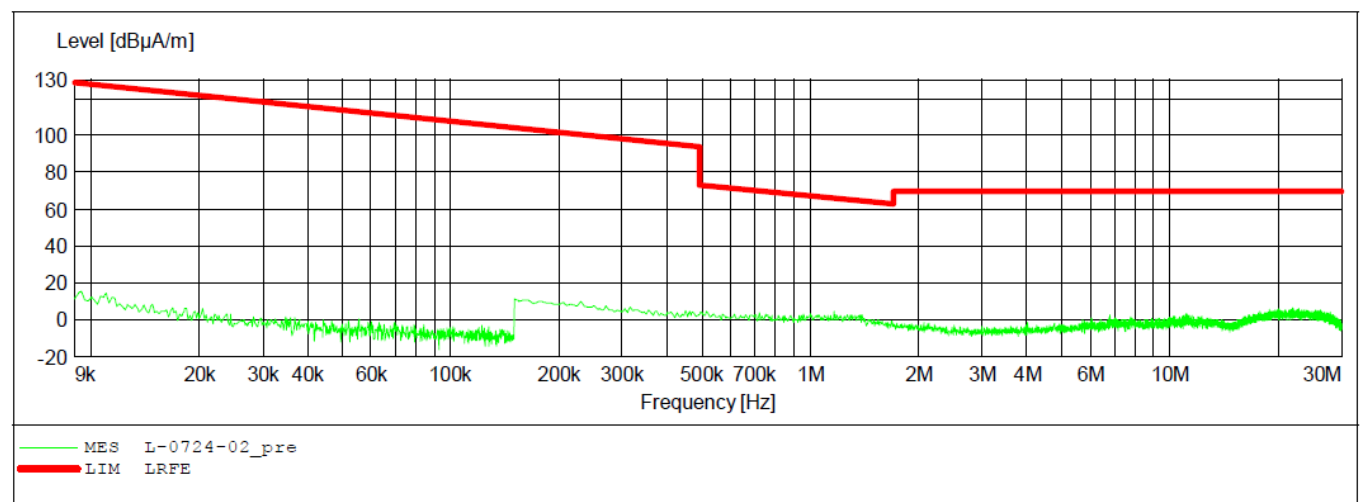


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Water Leak Sensor M/N:6AA-SS-ZF-H0
 Manufacturer: LEEDARSON
 Operating Condition: TX 2405MHz
 Test Site: 2# Chamber
 Operator: WADE
 Test Specification: DC 3V
 Comment: Z
 Start of Test: 2017-07-24 /

SCAN TABLE: "LFRE Fin"


Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

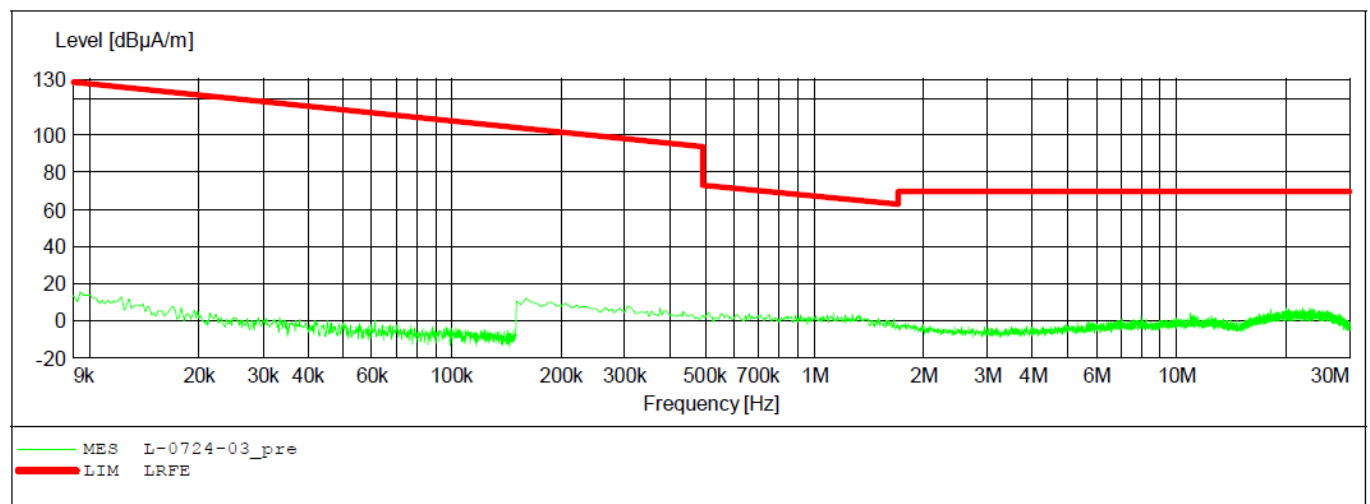

Job No.: LGW2017 #3509
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2405MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Horizontal
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

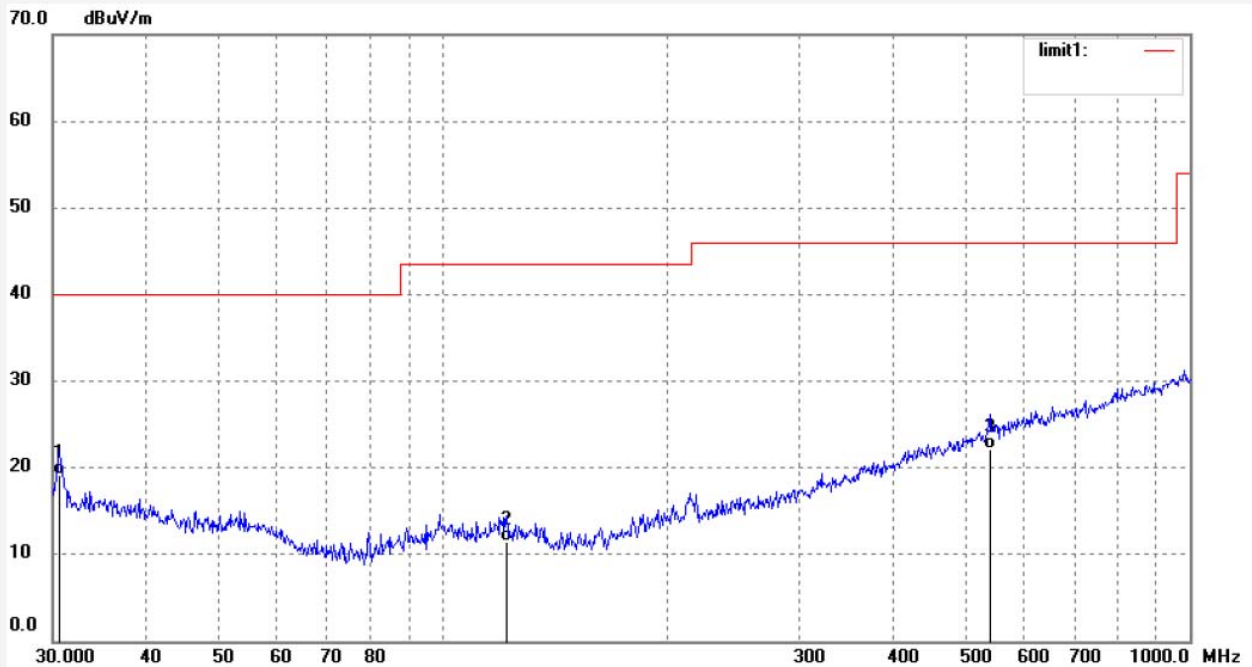


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	30.6378	29.08	-9.98	19.10	40.00	-20.90	QP			
2	121.5485	24.64	-13.23	11.41	43.50	-32.09	QP			
3	539.4774	25.51	-3.35	22.16	46.00	-23.84	QP			

Job No.: LGW2017 #3510
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2405MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Vertical
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

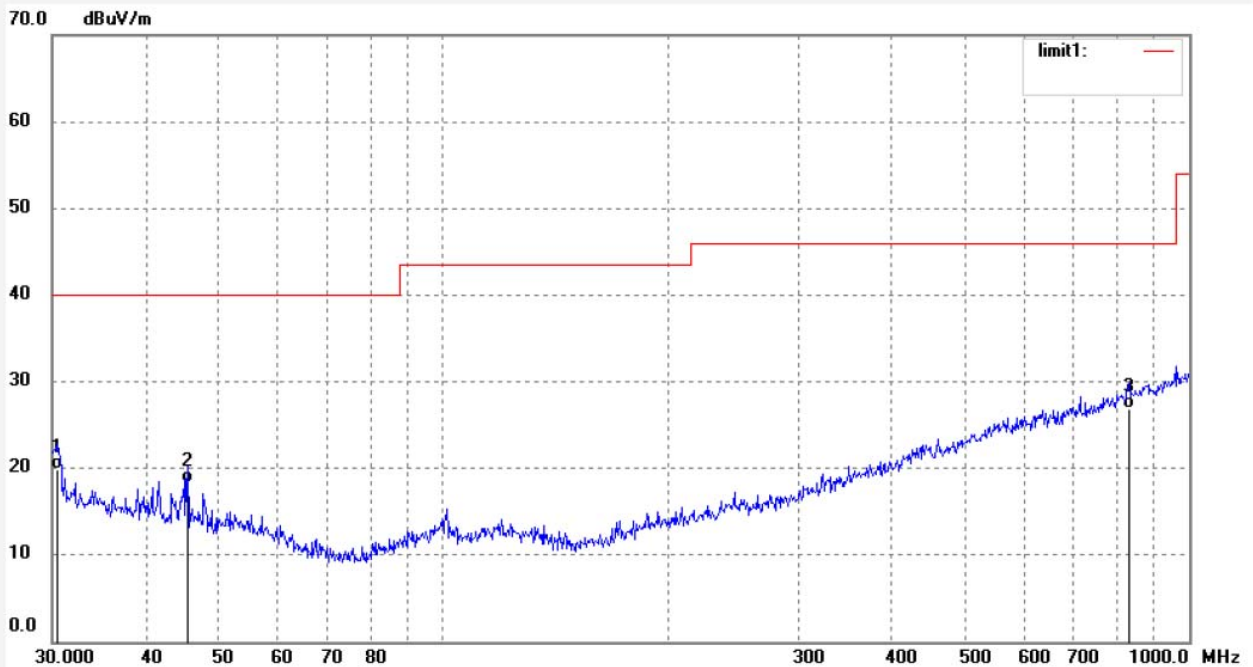


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	30.4237	28.85	-9.04	19.81	40.00	-20.19	QP			
2	45.5347	30.83	-12.62	18.21	40.00	-21.79	QP			
3	830.4002	25.48	1.37	26.85	46.00	-19.15	QP			

Job No.: LGW2017 #3493
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2405MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Horizontal
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

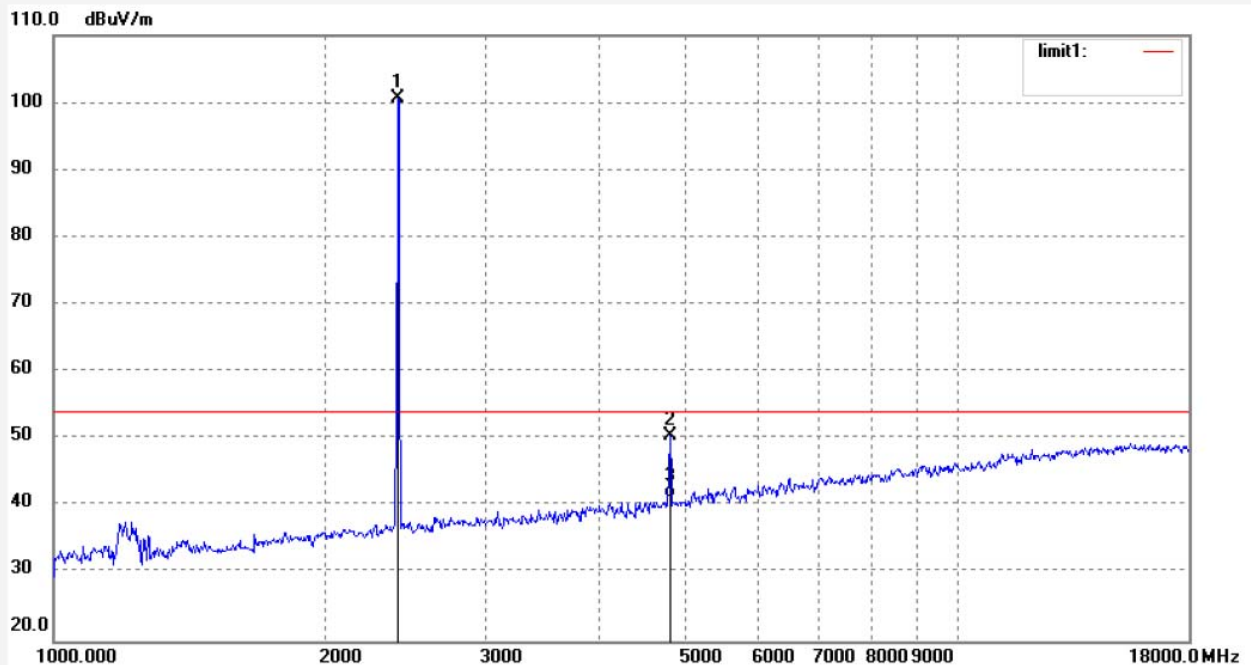


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2405.000	102.21	-1.60	100.61	/	/	peak			
2	4810.027	45.62	4.96	50.58	74.00	-23.42	peak			
3	4810.027	36.39	4.96	41.35	54.00	-12.65	AVG			

Job No.: LGW2017 #3494
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2405MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Vertical
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

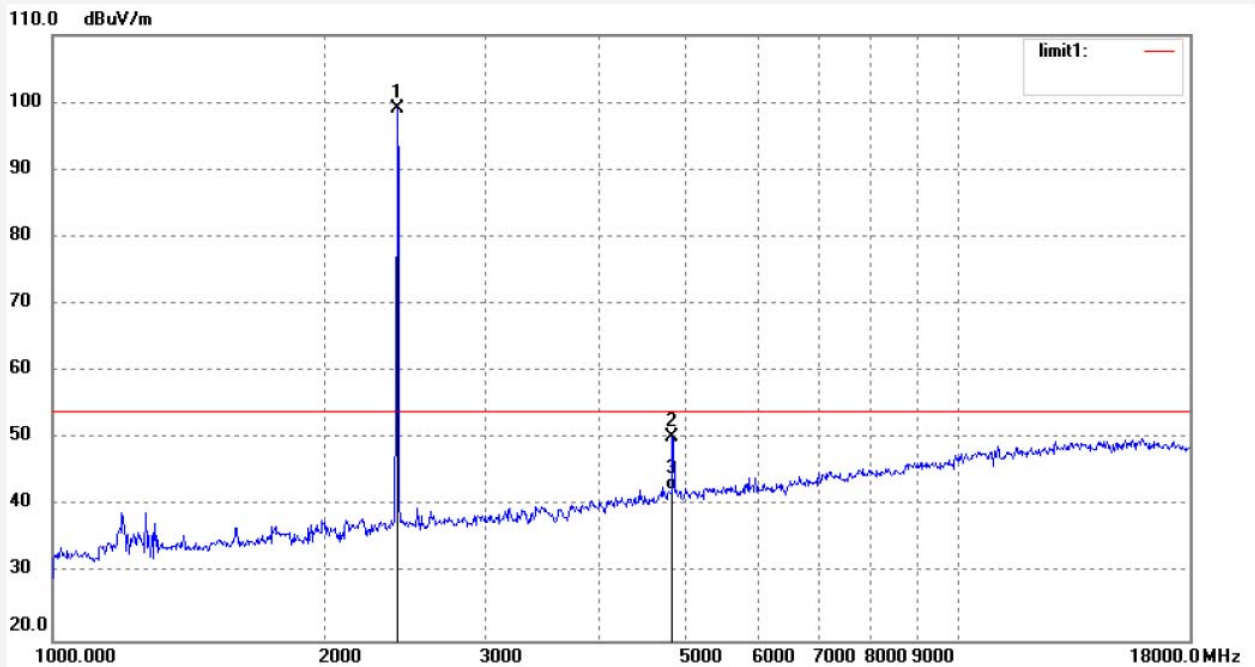


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2405.000	100.73	-1.60	99.13	/	/	peak			
2	4810.025	45.40	4.96	50.36	74.00	-23.64	peak			
3	4810.025	37.39	4.96	42.35	54.00	-11.65	AVG			

Job No.: LGW2017 #3504
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2405MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Horizontal
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

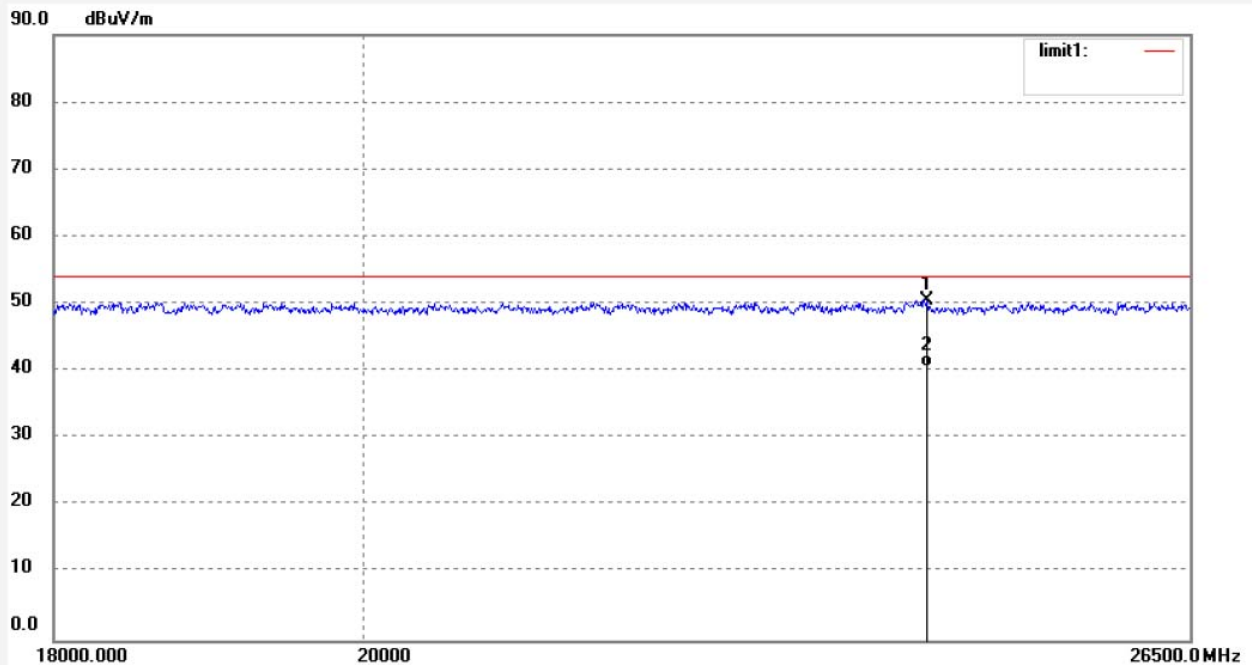


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24235.056	10.35	40.13	50.48	74.00	-23.52	peak			
2	24235.056	0.44	40.13	40.57	54.00	-13.43	AVG			

Job No.: LGW2017 #3503
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2405MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Vertical
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

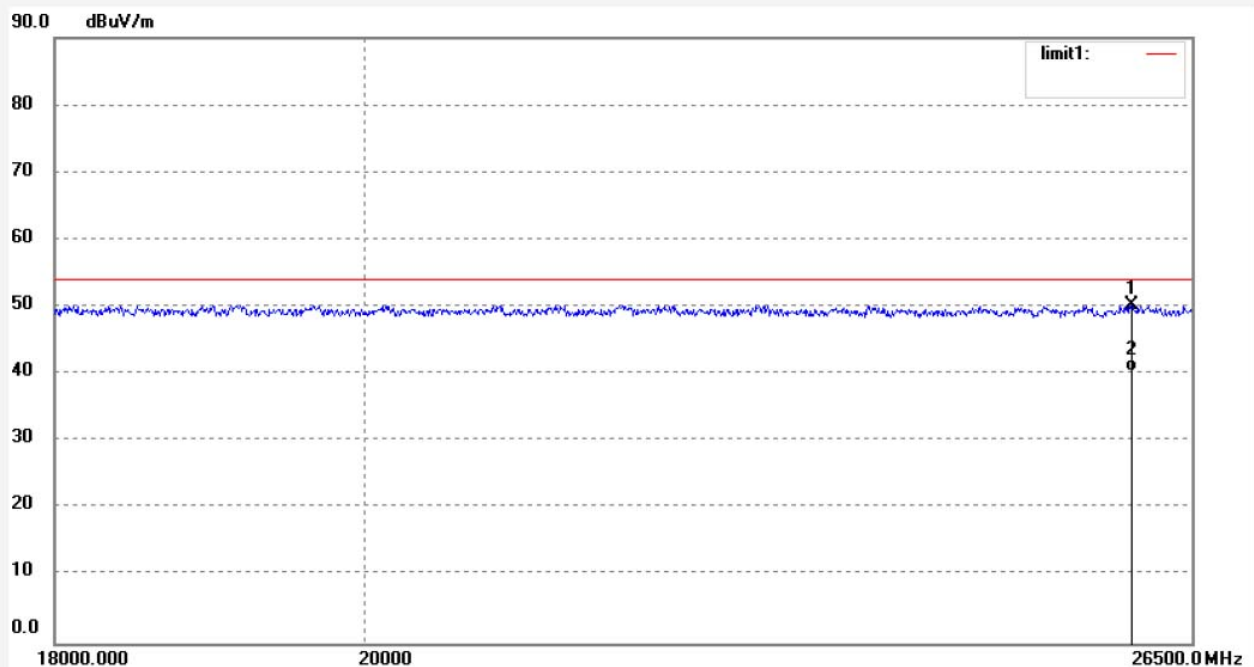

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25962.307	9.23	40.99	50.22	74.00	-23.78	peak			
2	25962.307	-0.64	40.99	40.35	54.00	-13.65	AVG			

Middle channel(9kHz-25GHz):


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Water Leak Sensor M/N:6AA-SS-ZF-H0
 Manufacturer: LEEDARSON
 Operating Condition: TX 2445MHz
 Test Site: 2# Chamber
 Operator: WADE
 Test Specification: DC 3V
 Comment: X
 Start of Test: 2017-07-24 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

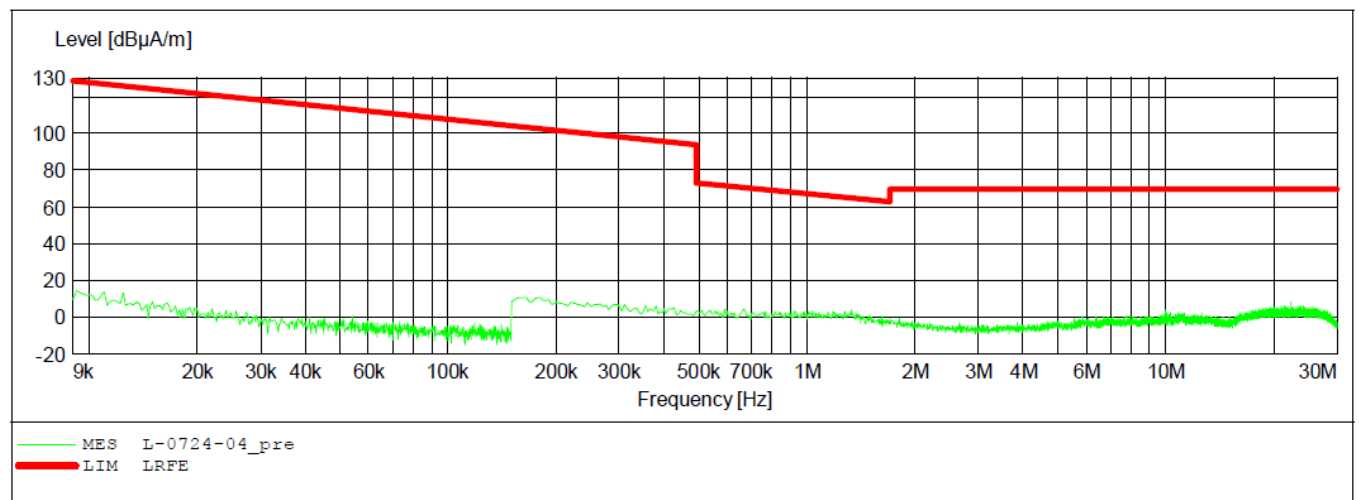


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Water Leak Sensor M/N:6AA-SS-ZF-H0
 Manufacturer: LEEDARSON
 Operating Condition: TX 2445MHz
 Test Site: 2# Chamber
 Operator: WADE
 Test Specification: DC 3V
 Comment: Y
 Start of Test: 2017-07-24 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

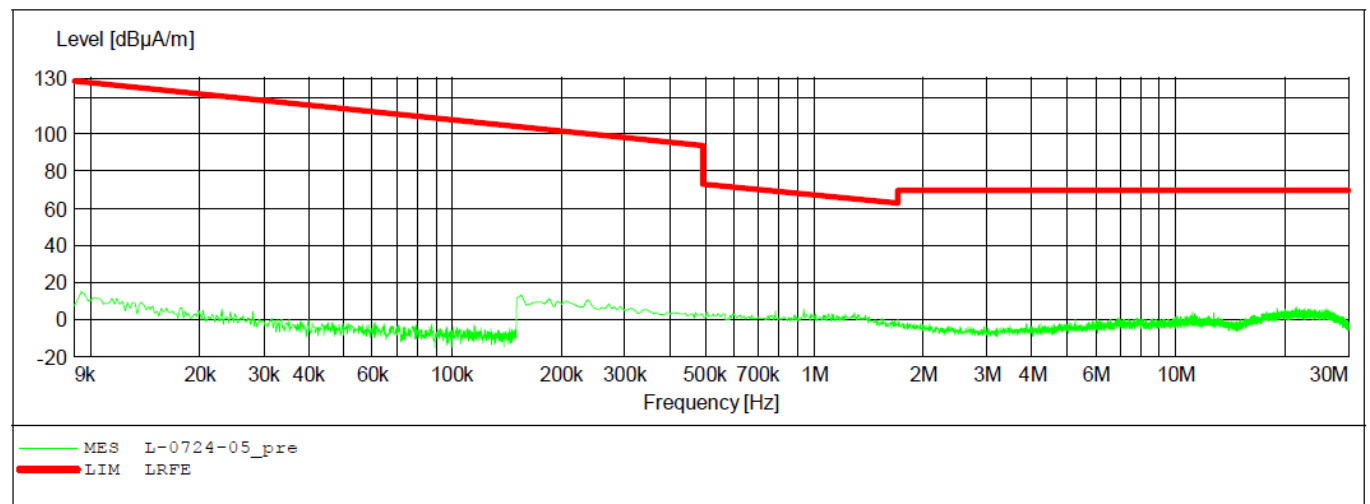


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Water Leak Sensor M/N:6AA-SS-ZF-H0
 Manufacturer: LEEDARSON
 Operating Condition: TX 2445MHz
 Test Site: 2# Chamber
 Operator: WADE
 Test Specification: DC 3V
 Comment: Z
 Start of Test: 2017-07-24 /

SCAN TABLE: "LFRE Fin"


Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

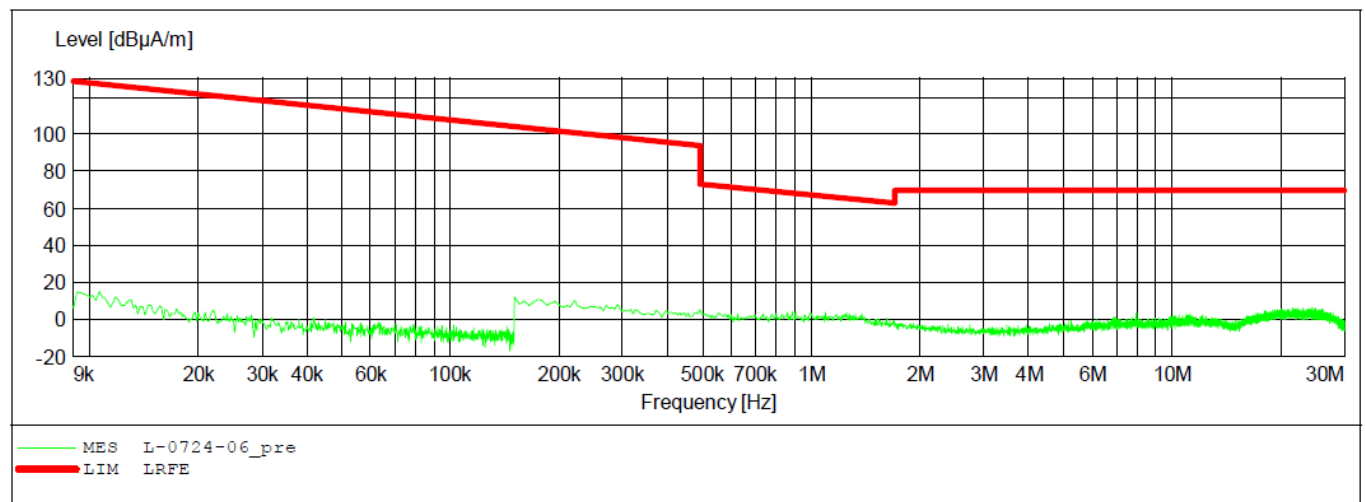

Job No.: LGW2017 #3512
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2445MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Horizontal
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m


Note:

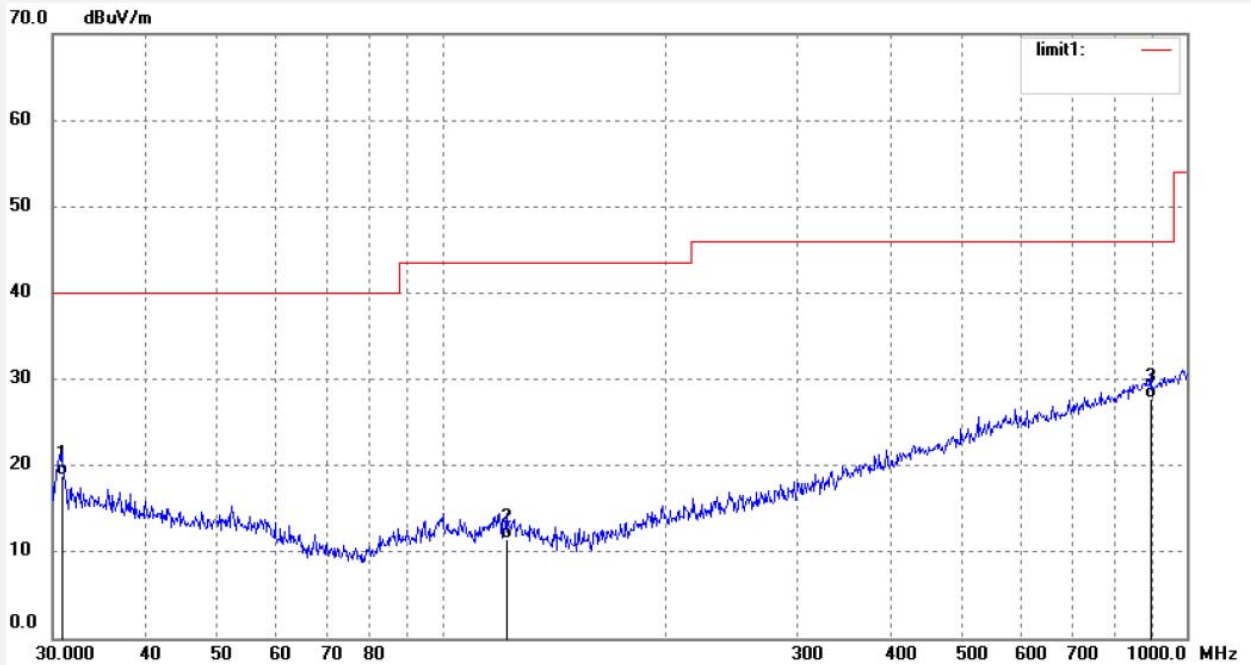

Job No.: LGW2017 #3511
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2445MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Vertical
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

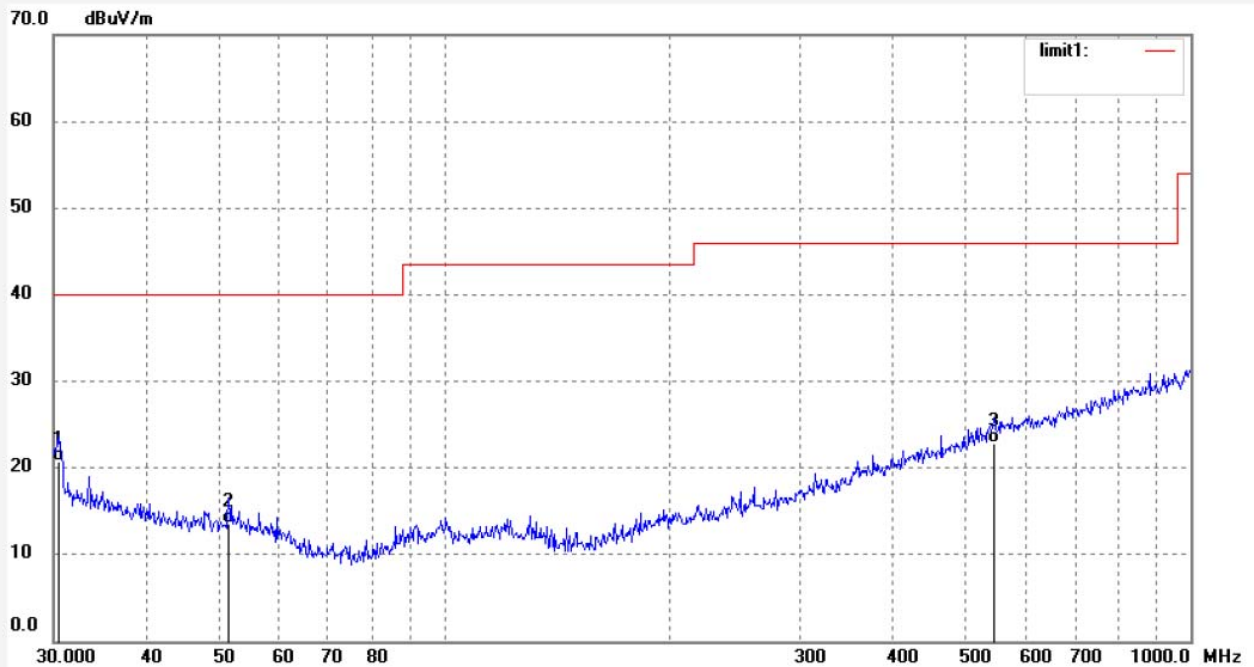


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	30.4237	29.83	-9.04	20.79	40.00	-19.21	QP			
2	51.4806	26.20	-12.69	13.51	40.00	-26.49	QP			
3	545.1825	26.03	-3.23	22.80	46.00	-23.20	QP			

Job No.: LGW2017 #3497
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2445MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Horizontal
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

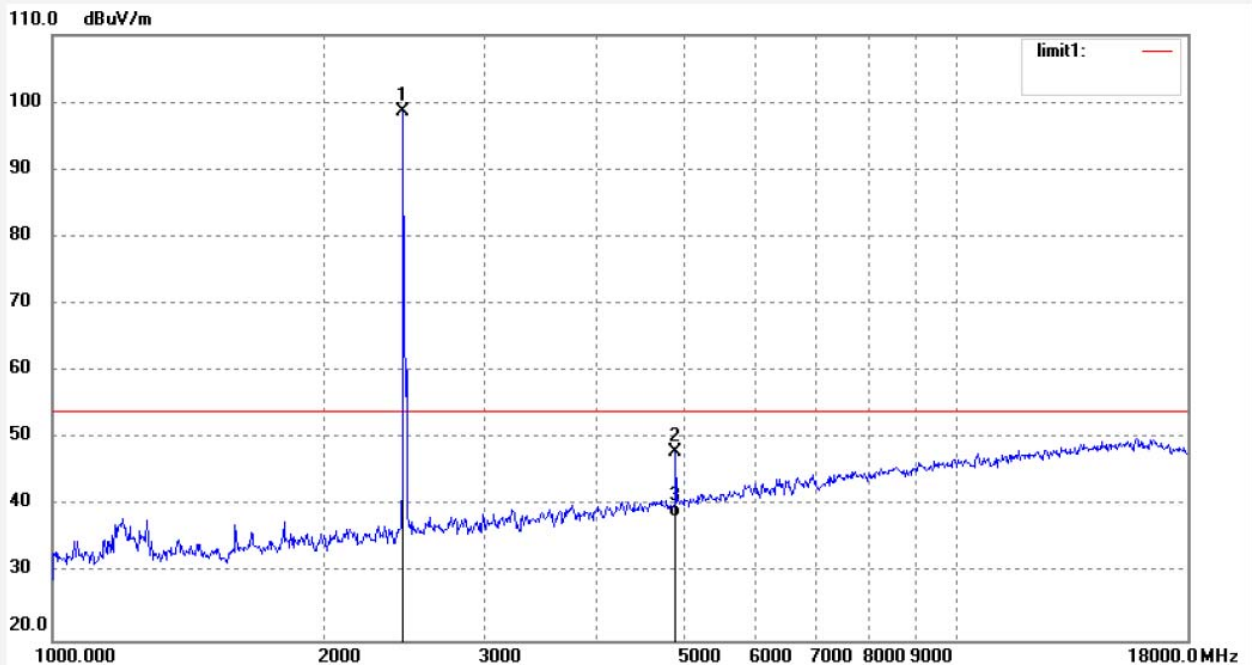


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2445.000	99.99	-1.43	98.56	/	/	peak			
2	4890.028	42.24	5.68	47.92	74.00	-26.08	peak			
3	4890.028	32.73	5.68	38.41	54.00	-15.59	AVG			

Job No.: LGW2017 #3498
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2445MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Vertical
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

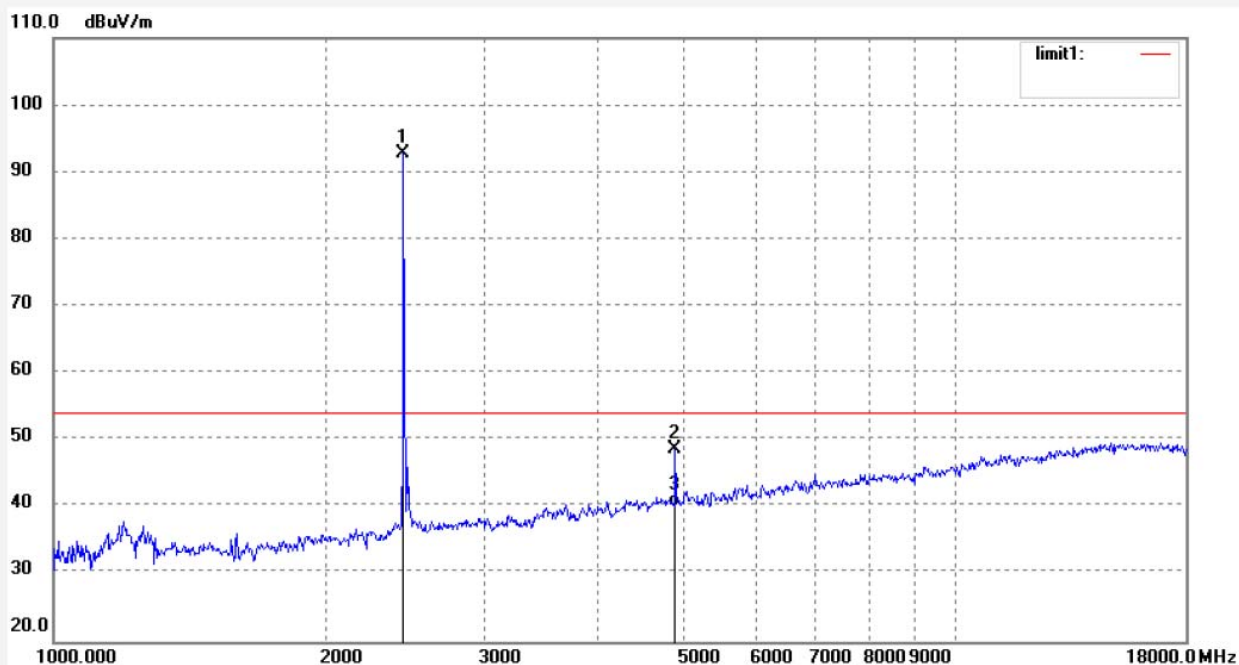


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2445.000	94.23	-1.43	92.80	/	/	peak			
2	4890.026	43.09	5.68	48.77	74.00	-25.23	peak			
3	4890.026	34.46	5.68	40.14	54.00	-13.86	AVG			

Job No.: LGW2017 #3505
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2445MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Horizontal
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

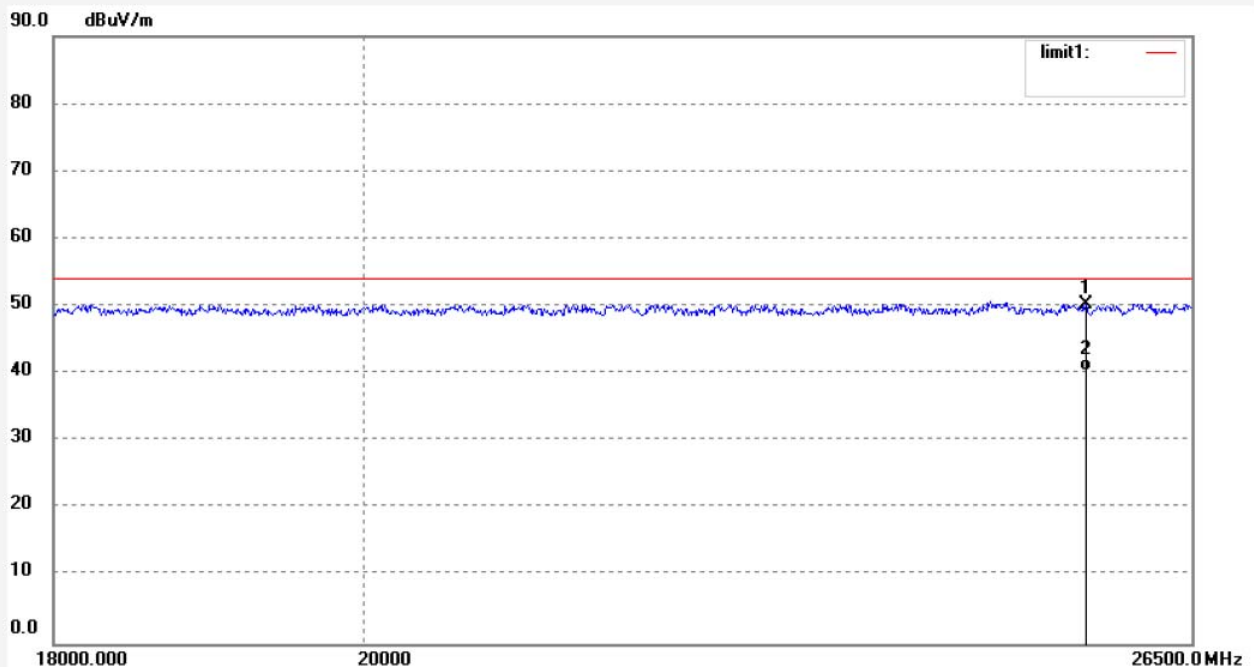


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25563.738	10.24	40.03	50.27	74.00	-23.73	peak			
2	25563.738	0.38	40.03	40.41	54.00	-13.59	AVG			

Job No.: LGW2017 #3506
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2445MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Vertical
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

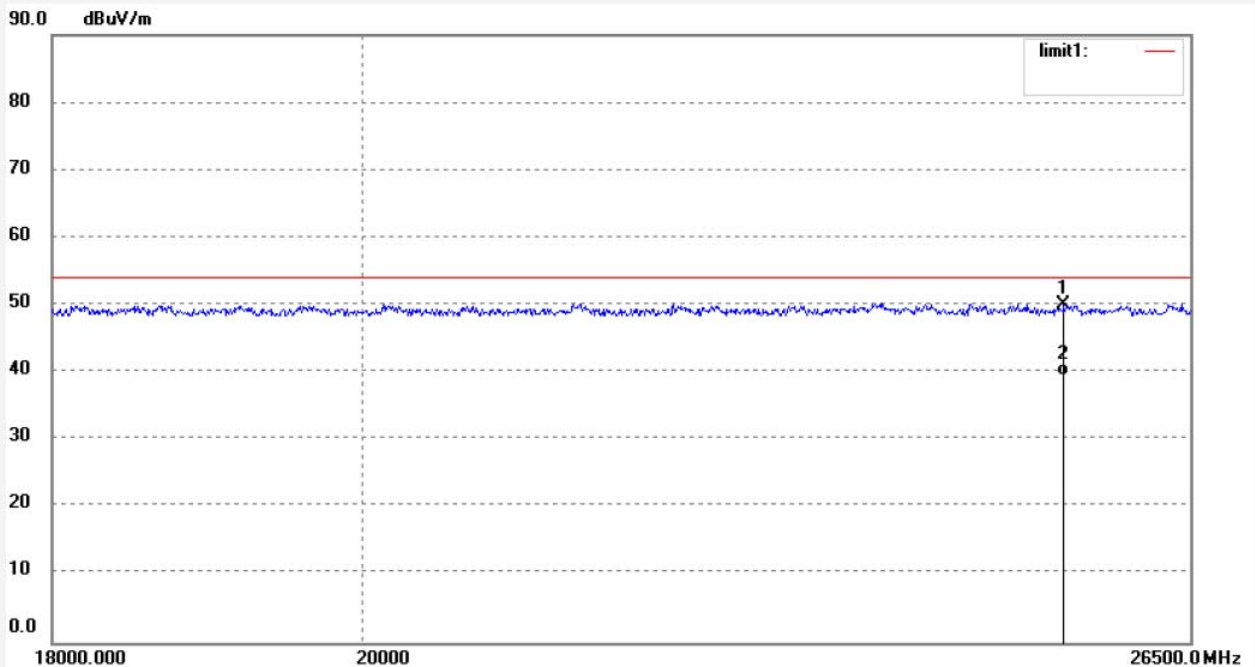

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25386.383	8.90	41.08	49.98	74.00	-24.02	peak			
2	25386.383	-1.62	41.08	39.46	54.00	-14.54	AVG			

High channel(9kHz-25GHz):


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Water Leak Sensor M/N:6AA-SS-ZF-H0
 Manufacturer: LEEDARSON
 Operating Condition: TX 2480MHz
 Test Site: 2# Chamber
 Operator: WADE
 Test Specification: DC 3V
 Comment: X
 Start of Test: 2017-07-24 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

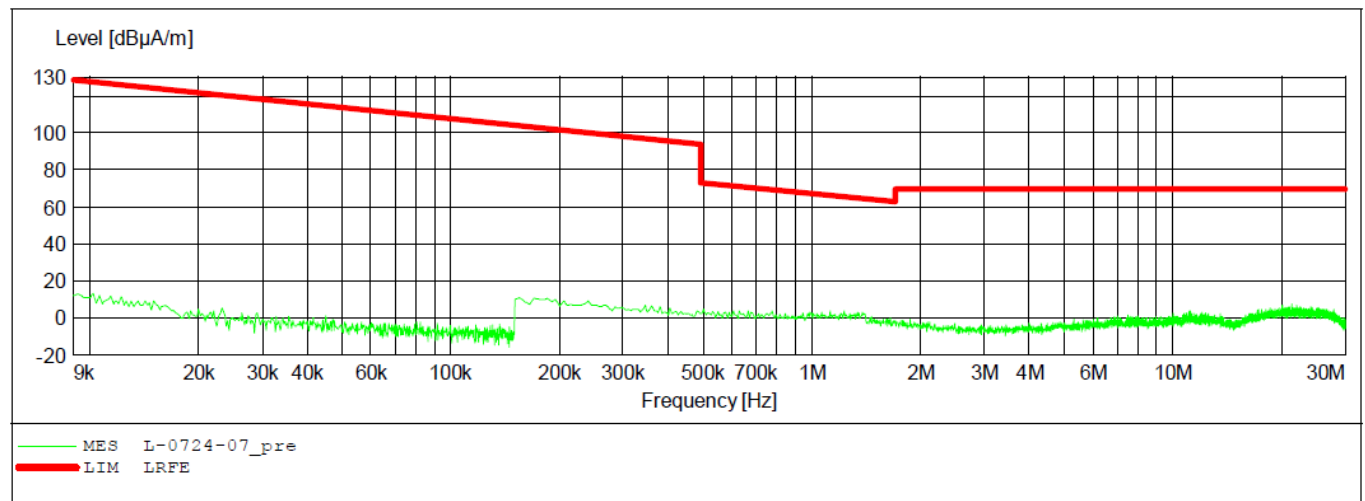


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Water Leak Sensor M/N:6AA-SS-ZF-H0
 Manufacturer: LEEDARSON
 Operating Condition: TX 2480MHz
 Test Site: 2# Chamber
 Operator: WADE
 Test Specification: DC 3V
 Comment: Y
 Start of Test: 2017-07-24 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

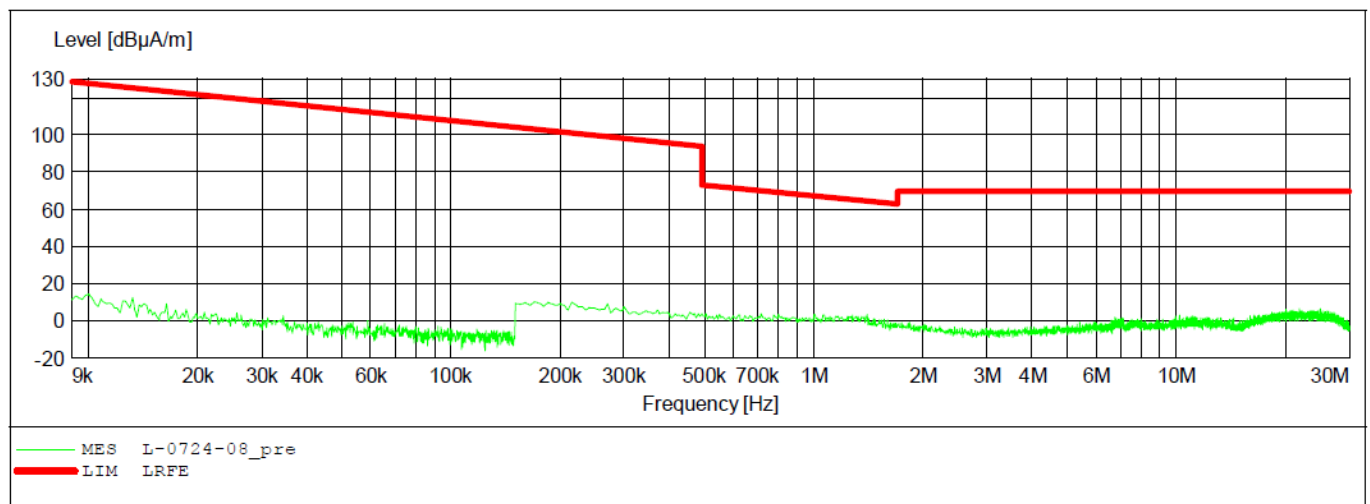


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Water Leak Sensor M/N:6AA-SS-ZF-H0
 Manufacturer: LEEDARSON
 Operating Condition: TX 2480MHz
 Test Site: 2# Chamber
 Operator: WADE
 Test Specification: DC 3V
 Comment: Z
 Start of Test: 2017-07-24 /

SCAN TABLE: "LFRE Fin"


Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

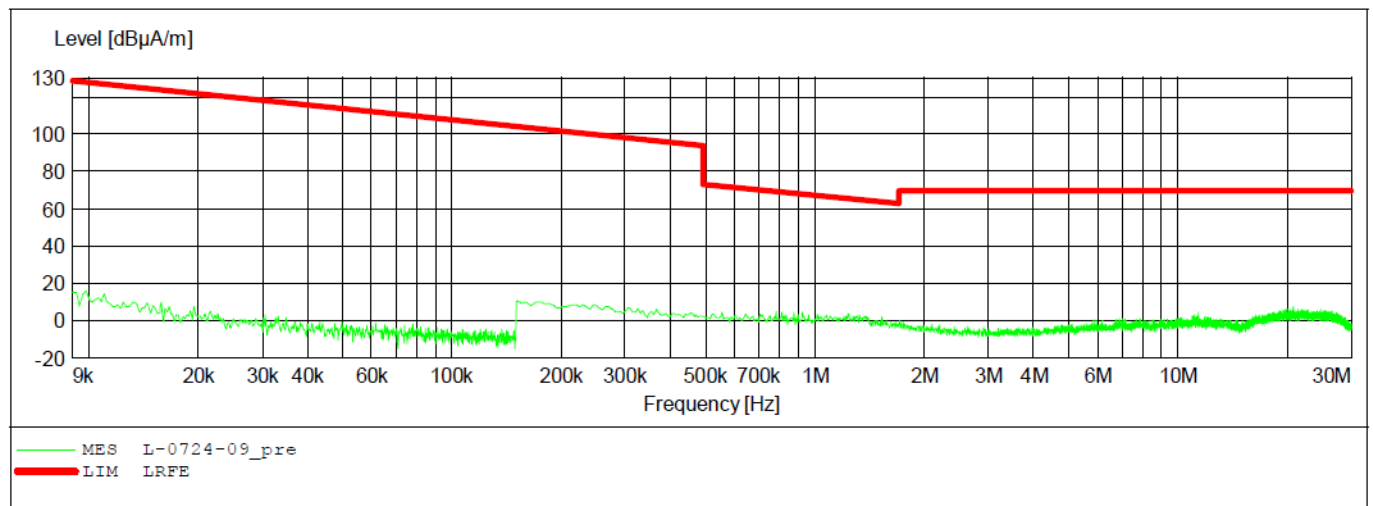

Job No.: LGW2017 #3513
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2480MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Horizontal
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

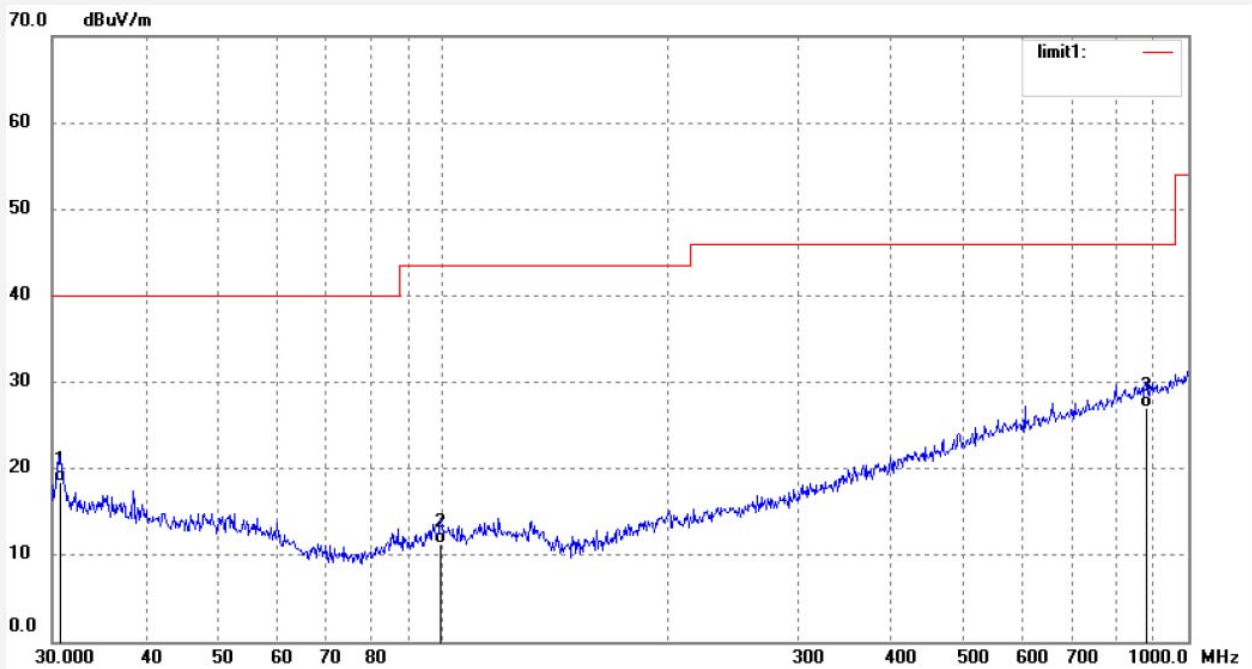


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	30.7454	28.44	-10.00	18.44	40.00	-21.56	QP			
2	99.5279	24.43	-13.21	11.22	43.50	-32.28	QP			
3	878.3214	25.01	2.00	27.01	46.00	-18.99	QP			

Job No.: LGW2017 #3514
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2480MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Vertical
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

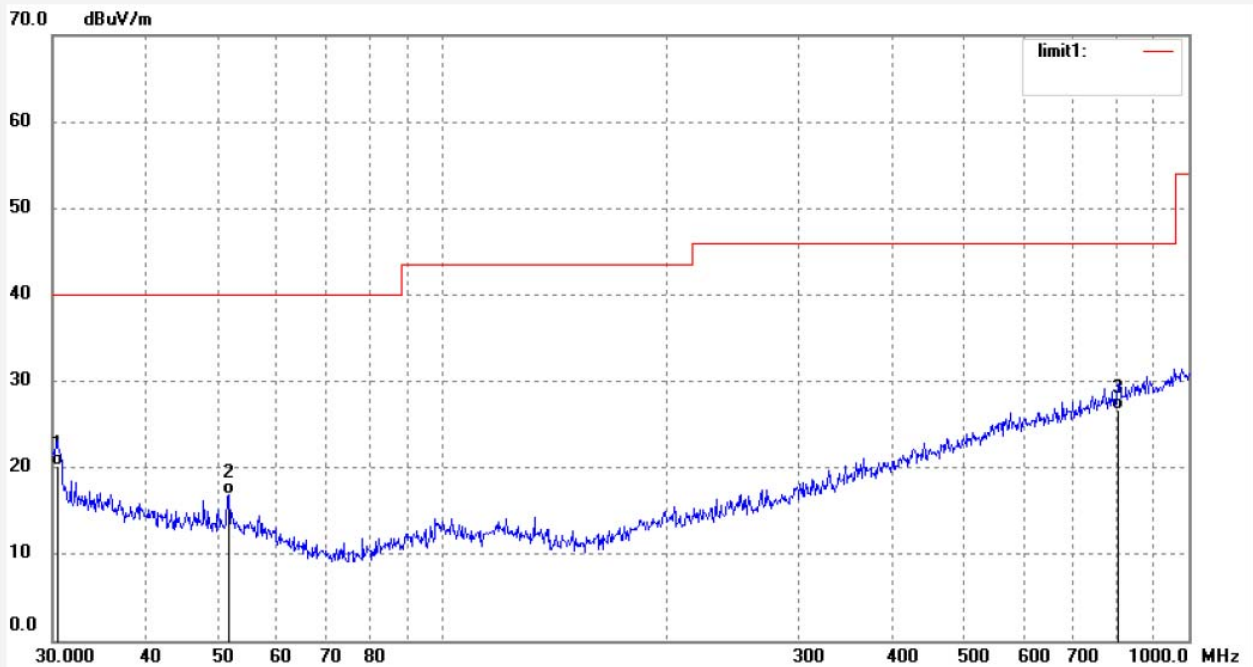


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	30.4237	29.28	-9.04	20.24	40.00	-19.76	QP			
2	51.6615	29.58	-12.71	16.87	40.00	-23.13	QP			
3	804.6028	25.81	0.91	26.72	46.00	-19.28	QP			

Job No.: LGW2017 #3500
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2480MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Horizontal
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

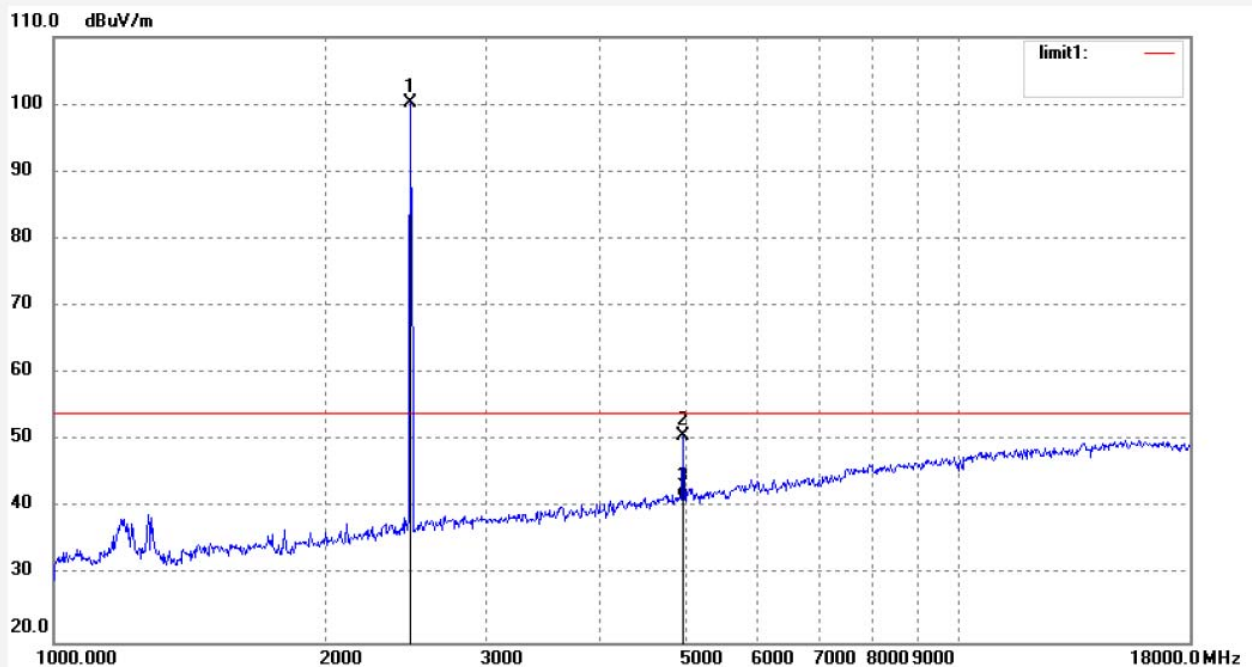


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	101.69	-1.40	100.29	/	/	peak			
2	4960.028	44.56	6.10	50.66	74.00	-23.34	peak			
3	4960.028	35.31	6.10	41.41	54.00	-12.59	AVG			

Job No.: LGW2017 #3499
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2480MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Vertical
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

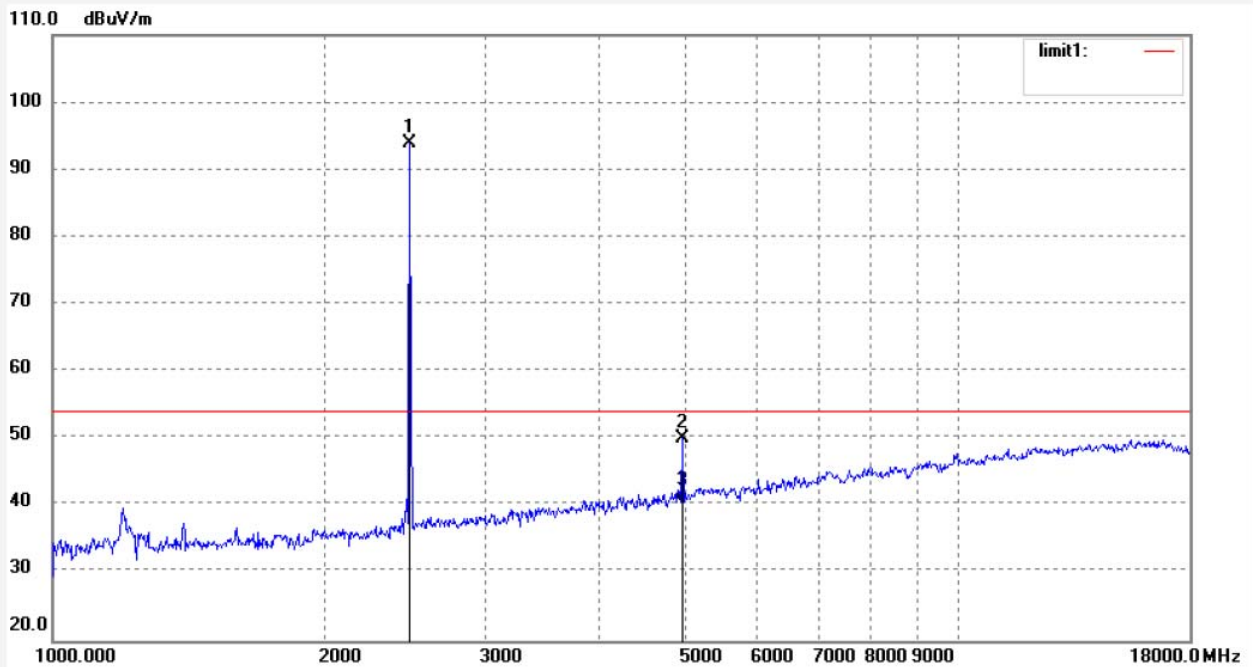


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	95.23	-1.40	93.83	/	/	peak			
2	4960.029	43.87	6.10	49.97	74.00	-24.03	peak			
3	4960.029	34.46	6.10	40.56	54.00	-13.44	AVG			

Job No.: LGW2017 #3508
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2480MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Horizontal
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

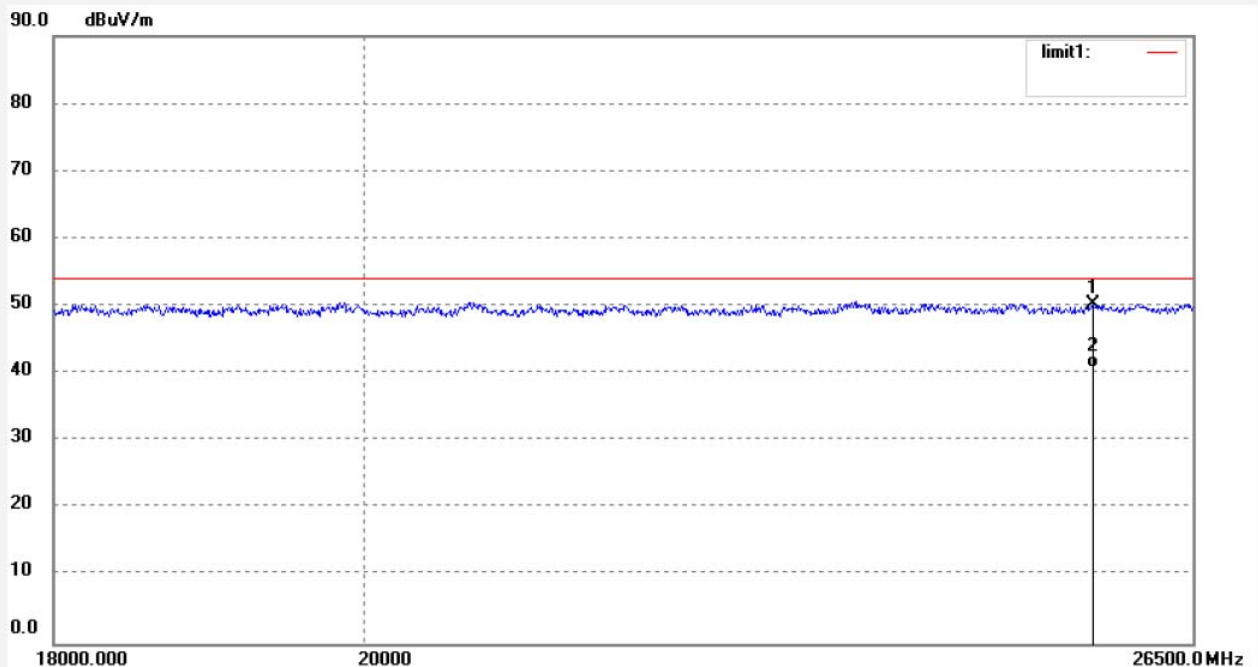


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25613.222	10.14	40.05	50.19	74.00	-23.81	peak			
2	25613.222	0.81	40.05	40.86	54.00	-13.14	AVG			

Job No.: LGW2017 #3507
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Water Leak Sensor
Mode: TX 2480MHz
Model: 6AA-SS-ZF-H0
Manufacturer: LEEDARSON

Polarization: Vertical
Power Source: DC 3V
Date: 17/07/25/
Time:
Engineer Signature: WADE
Distance: 3m


Note:

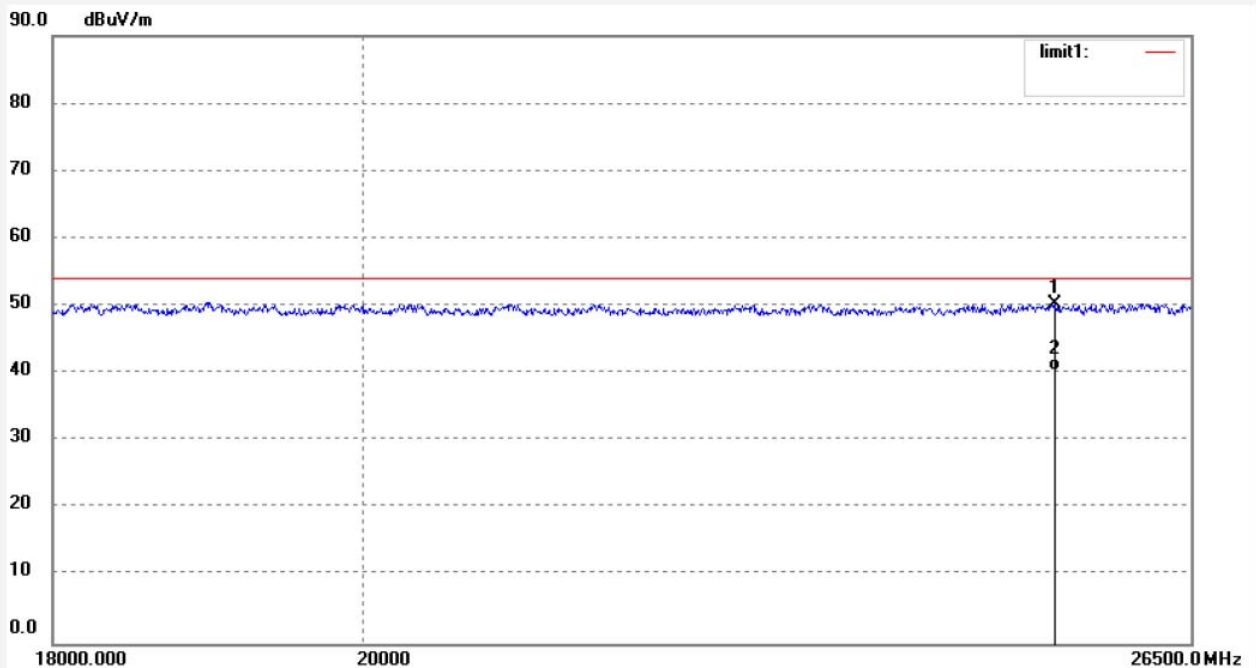

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25307.954	9.11	41.09	50.20	74.00	-23.80	peak			
2	25307.954	-0.74	41.09	40.35	54.00	-13.65	AVG			

10.99% OCCUPIED BANDWIDTH

10.1. Block Diagram of Test Setup



10.2. EUT Configuration on Measurement

The following equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.3. Operating Condition of EUT

10.3.1. Setup the EUT and simulator as shown as Section 10.1.

10.3.2. Turn on the power of all equipment.

10.3.3. Let the EUT work in TX mode then measure it. We select 2405MHz, 2445MHz, 2480MHz TX frequency to transmit.

10.4. Test Procedure

10.4.1. The transmitter output was connected to the spectrum analyzer through a low loss cable. The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

10.4.2. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

10.4.3. A peak, or peak hold, may be used in place of the sampling detector as this may produce a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold may be necessary to determine the occupied bandwidth if the device is not transmitting continuously.


10.4.4. Set SPA “Meas” function, Select “Occupied Bandwidth” function, Select “99% Power Bandwidth”. The frequency of the upper and lower markers indicating the edges of the transmitters “99% Power” emission bandwidth shall be recorded to automate by SPA.

10.5.Measurement Result


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
Low	2405	2.362
Middle	2445	2.466
High	2480	2.405

The spectrum analyzer plots are attached as below.

Low Channel 2405MHz

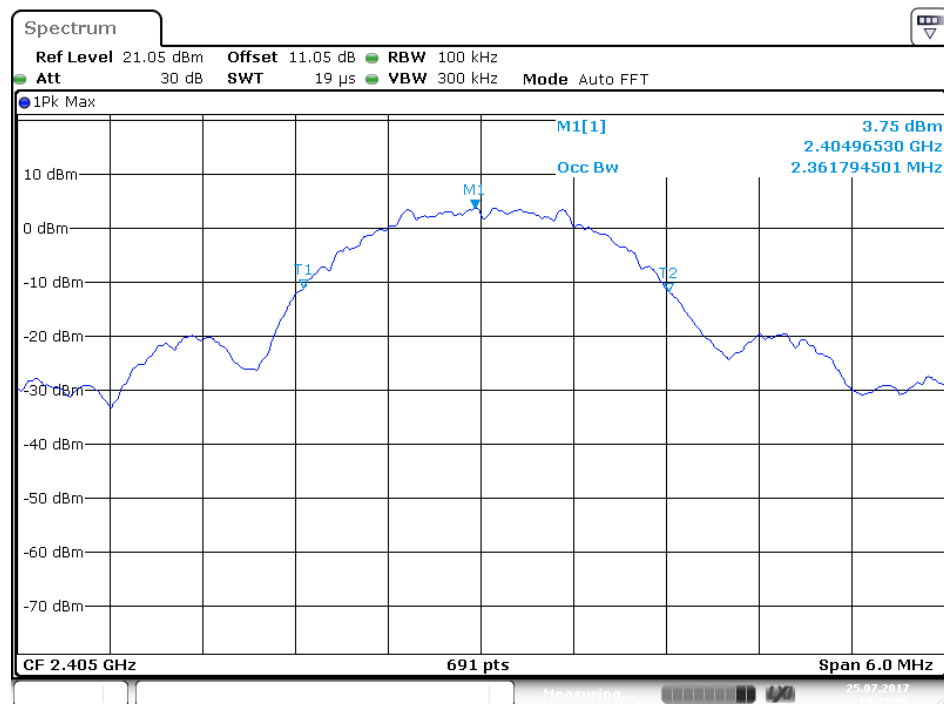


Middle Channel 2445MHz

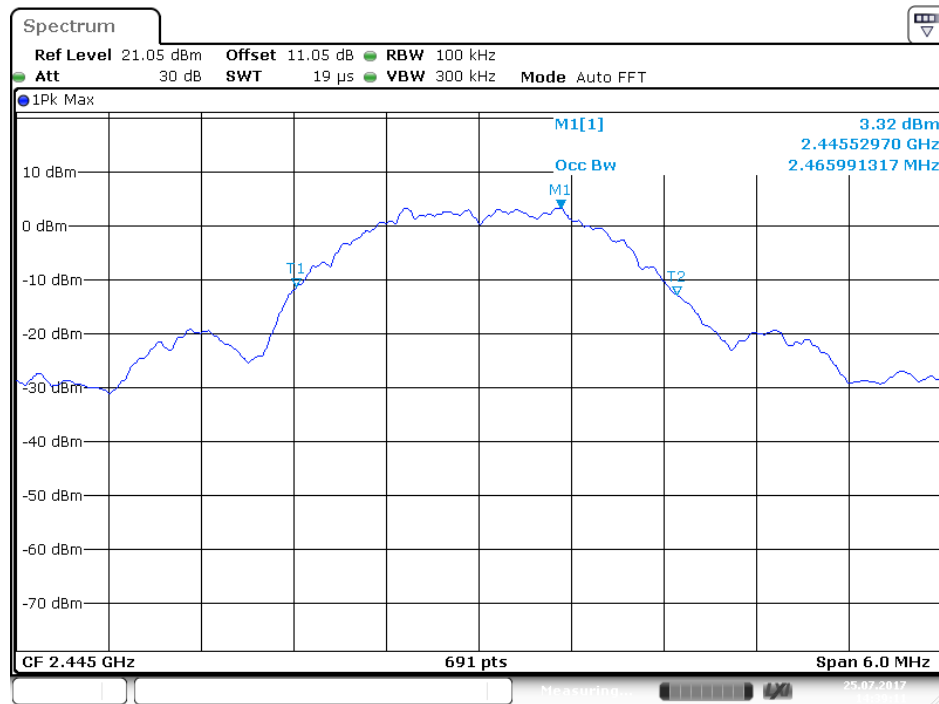

Date: 25.JUL.2017 14:39:11


High Channel 2480MHz

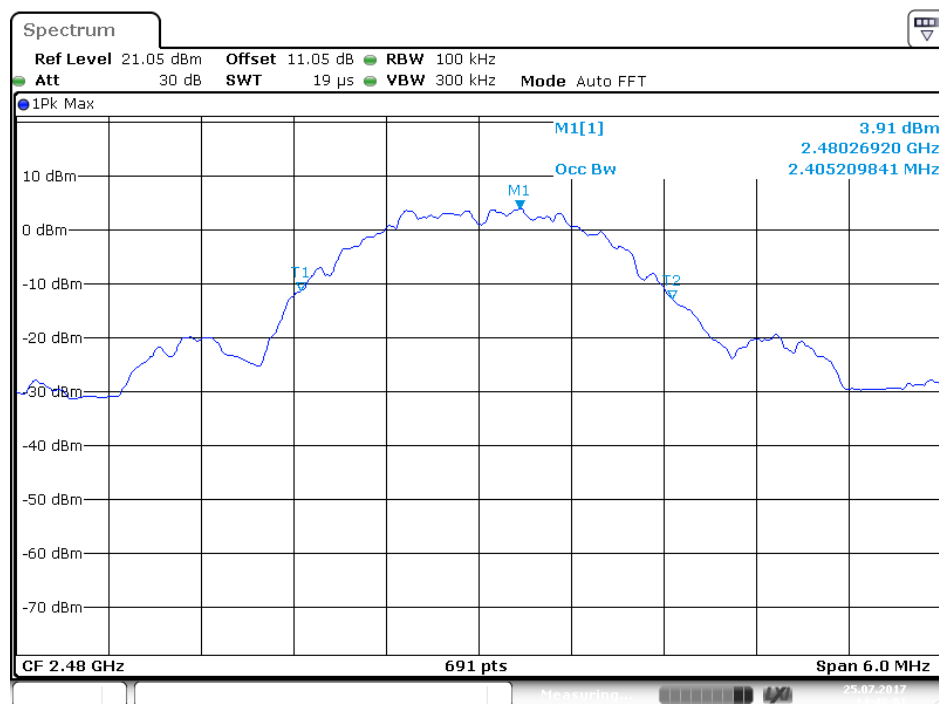

Date: 25.JUL.2017 14:49:02

11.CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

11.1.Block Diagram of Test Setup



11.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

11.3.EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.4.Operating Condition of EUT

11.4.1.Setup the EUT and simulator as shown as Section 11.1.

11.4.2.Turn on the power of all equipment.

11.4.3.Let the EUT work in TX mode then measure it. We select 2405MHz, 2445MHz, 2480MHz TX frequency to transmit.

11.5. Test Procedure

11.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

11.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz


11.5.3. The Conducted Spurious Emission was measured and recorded.

11.6. Test Result

Pass.


The spectrum analyzer plots are attached as below.

Low Channel

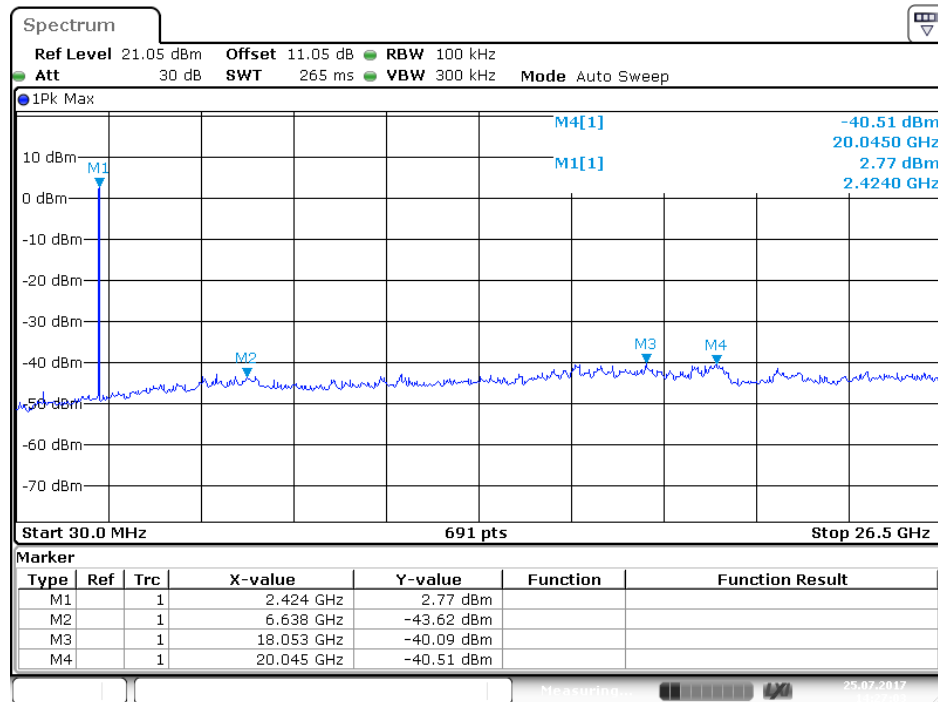


Date: 25.JUL.2017 14:27:03

Middle Channel

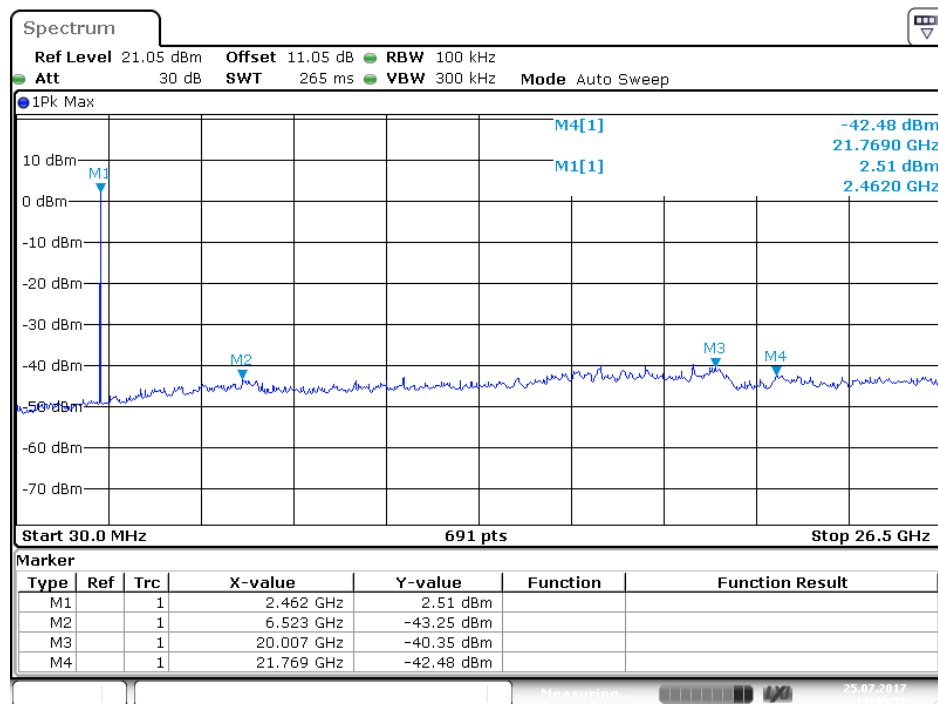

Date: 25.JUL.2017 14:45:51

High Channel

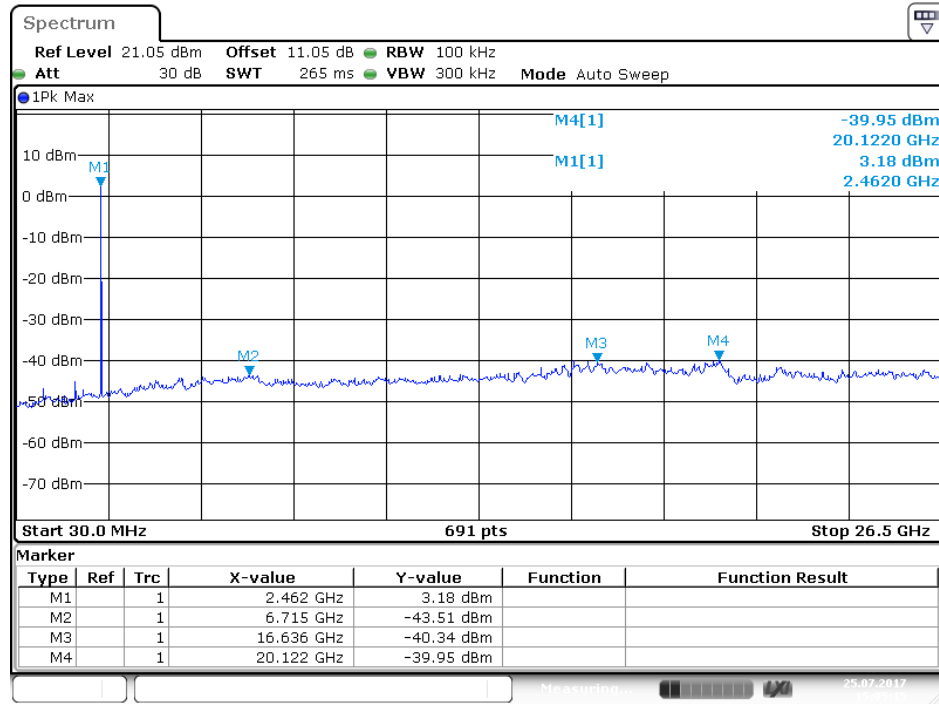

Date: 25.JUL.2017 15:05:15

12.ANTENNA REQUIREMENT

12.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2.Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 1.05dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.